

TEST REPORT

Reference No...... : WTH24X03067087W001
FCC ID..... : XOM-ETS-6000K
Applicant..... : Shenzhen Qiyue Optronics Company Limited
Address..... : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,
Shangmeilin, Futian District, Shenzhen, China
Manufacturer..... : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED BRANCH
Address..... : A/B/C/D Building, Xitian Industrial Park, Dashuikeng Community,Guanlan
Street, Longhua New District, Shenzhen City, China
Product Name..... : 60" Class Smart 4K UHD LED TV
Model No...... : ETS-6000K
Standards..... : FCC Part 15.407
Date of Receipt sample..... : 2024-03-28
Date of Test..... : 2024-03-28 to 2024-04-15
Date of Issue..... : 2024-04-15
Test Report Form No...... : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	8
1.6 TEST FACILITY	8
1.7 EUT SETUP AND TEST MODE	9
1.8 MEASUREMENT UNCERTAINTY	10
1.9 TEST EQUIPMENT LIST AND DETAILS	11
2. SUMMARY OF TEST RESULTS	14
3. ANTENNA REQUIREMENT	15
3.1 STANDARD APPLICABLE	15
3.2 EVALUATION INFORMATION	15
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	16
4.1 STANDARD APPLICABLE	16
4.2 SUMMARY OF TEST RESULTS	16
5. POWER SPECTRAL DENSITY	17
5.1 STANDARD APPLICABLE	17
5.2 TEST PROCEDURE	17
5.3 SUMMARY OF TEST RESULTS/PLOTS	18
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	19
6.1 STANDARD APPLICABLE	19
6.2 TEST PROCEDURE	19
6.3 SUMMARY OF TEST RESULTS/PLOTS	21
7. MAXIMUM CONDUCTED OUTPUT POWER	22
7.1 STANDARD APPLICABLE	22
7.2 TEST PROCEDURE	22
7.3 SUMMARY OF TEST RESULTS/PLOTS	23
8. RADIATED SPURIOUS EMISSIONS	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 TEST RECEIVER SETUP	26
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	26
8.5 SUMMARY OF TEST RESULTS/PLOTS	27
9. FREQUENCY STABILITY	56
9.1 STANDARD APPLICABLE	56
9.2 TEST PROCEDURE	56
9.3 SUMMARY OF TEST RESULTS/PLOTS	56
10 CONDUCTED EMISSIONS	57
10.1 TEST PROCEDURE	57
10.2 BASIC TEST SETUP BLOCK DIAGRAM	57
10.3 TEST RECEIVER SETUP	57
10.4 SUMMARY OF TEST RESULTS/PLOTS	57
APPENDIX SUMMARY	60
APPENDIX A	61
APPENDIX B	83
APPENDIX C	125
APPENDIX D	146

APPENDIX PHOTOGRAPHS 147

Report version

Version No.	Date of issue	Description
Rev.00	2024-04-15	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory: YIBIN WANXIN Electronic Technology Co.,LTD
 Address of factory: Building 5, building6, Yibin Wanxin Electronic Technology
 Intelligent Terminal Industrial Park, Xinggang Road West 136,
 Lingang Economic Development Zone Yibin city, Sichuan province

General Description of EUT	
Product Name:	60" Class Smart 4K UHD LED TV
Trade Name:	Emerson
Model No.:	ETS-6000K
Adding Model(s):	D60A315-U-A-W, XXXXXXXX60XXXXXXX(Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model ETS-6000K, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n-HT20, 802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40, 802.11ac-VHT80
Frequency Range:	5180-5240MHz, 5745-5825MHz
Max. RF Output Power:	5180-5240MHz: Antenna 0: 16.80dBm (Conducted) Antenna 1: 16.83dBm (Conducted) 5745-5825MHz: Antenna 0: 16.55dBm (Conducted) Antenna 1: 16.88dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM, 256QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	5180-5240MHz: 1.93dBi 5745-5825MHz: 1.73dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter "3646631+=" into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode ANT 0	Test Frequency (MHz)												
	NCB: 20MHz												
	518 0	520 0	524 0	526 0	528 0	532 0	550 0	558 0	570 0	572 0	574 5	578 5	582 5
802.11a 6Mbps	87	89	87	/	/	/	/	/	/	/	80	75	75
802.11n-HT20 MCS0	87	85	80	/	/	/	/	/	/	/	75	70	70
802.11ac-VHT2 0 MCS0	87	85	80	/	/	/	/	/	/	/	75	70	70
Mode ANT 0	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11ac-VHT4 0 MCS0	87	85	/	/	/	/	/	/	75	70			
802.11n-HT40 MCS0	87	85	/	/	/	/	/	/	75	70			

Mode ANT 0	NCB: 80MHz					
	5210	5290	5530	5610	/	5775
802.11ac-VHT8 0 MCS0/Nss2	88	/	/	/	/	75

Mode ANT 1	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	85	85	80	/	/	/	/	/	/	/	75	70	70
802.11n-HT20 MCS0	78	78	75	/	/	/	/	/	/	/	70	65	65
802.11ac-VHT20 MCS0	78	78	75	/	/	/	/	/	/	/	70	65	65
Mode ANT 1	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11ac-VHT40 MCS0	80	75	/	/	/	/	/	/	70	68			
802.11n-HT40 MCS0	80	75	/	/	/	/	/	/	70	68			
Mode ANT 1	NCB: 80MHz												
	5210		5290		5530		5610		/		5775		
802.11ac-VHT80 MCS0	80		/		/		/		/		70		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11ac-VHT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM4	802.11n-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM5	802.11ac-VHT40	5190MHz,5230MHz,5755MHz,5795MHz
TM6	802.11ac-VHT80	5210MHz,5775 MHz
Note1 : All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report; 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40. Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac mode for this report; For 5150-5250MHz: Antenna 0 Gain is 1.93dBi; Antenna 1 Gain is 1.93dBi; For 5725-5850MHz: Antenna 1 Gain is 1.73dBi; Antenna 1 Gain is 1.73dBi; According to KDB 662911, for same directional gain: For 5150-5250MHz: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = 1.93+10log(2) dBi=4.94dBi For 5725-5850MHz: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = 1.73+10log(2) dBi=4.74dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI	1.5	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	Legion R7000P ARH7	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2024-02-27	2025-02-26
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2024-02-24	2025-02-23
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2024-02-24	2025-02-23
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2024-02-29	2025-02-28
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28

☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $RBW=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500KHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTH24X03067087W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

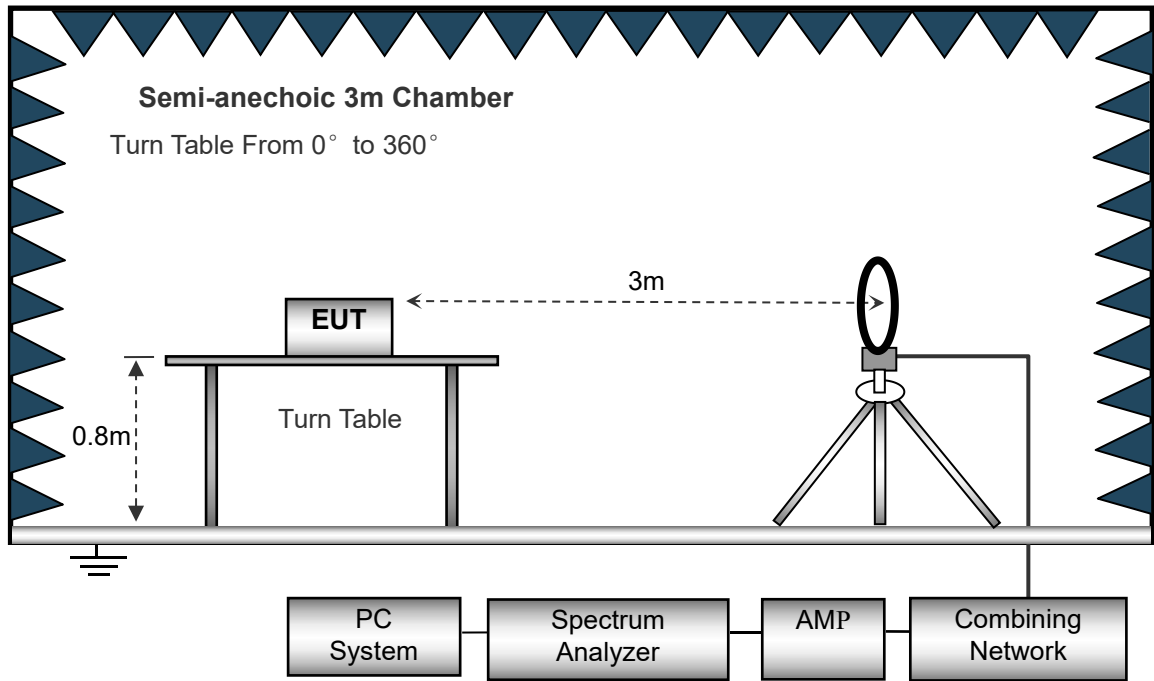
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



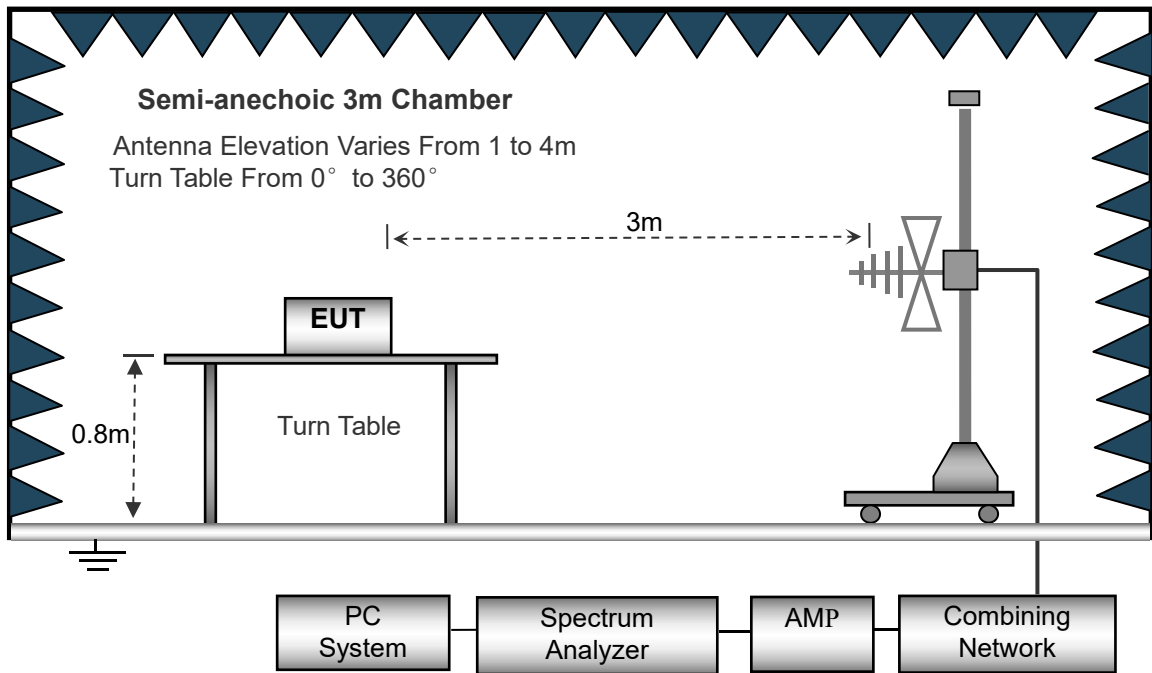The test setup for emission measurement from 30 MHz to 1 GHz.



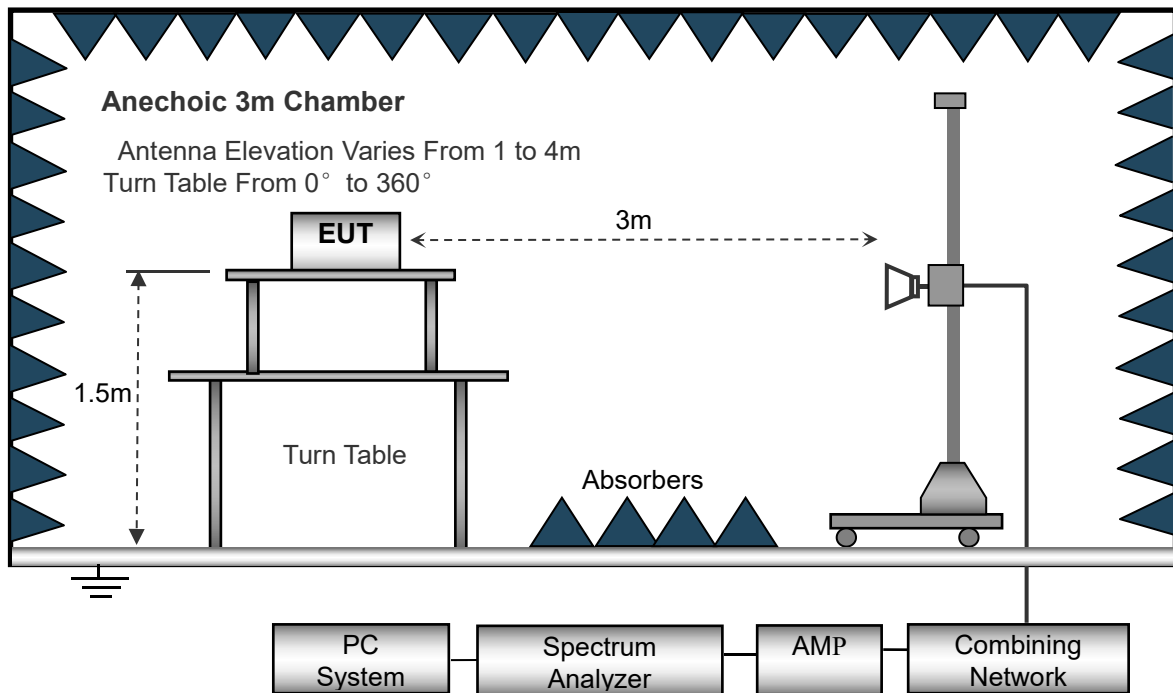The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emission From 30MHz to 1GHz

➤ Antenna 0(worst case)

➤ 5150-5250MHz

802.11a(Worst case)


Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

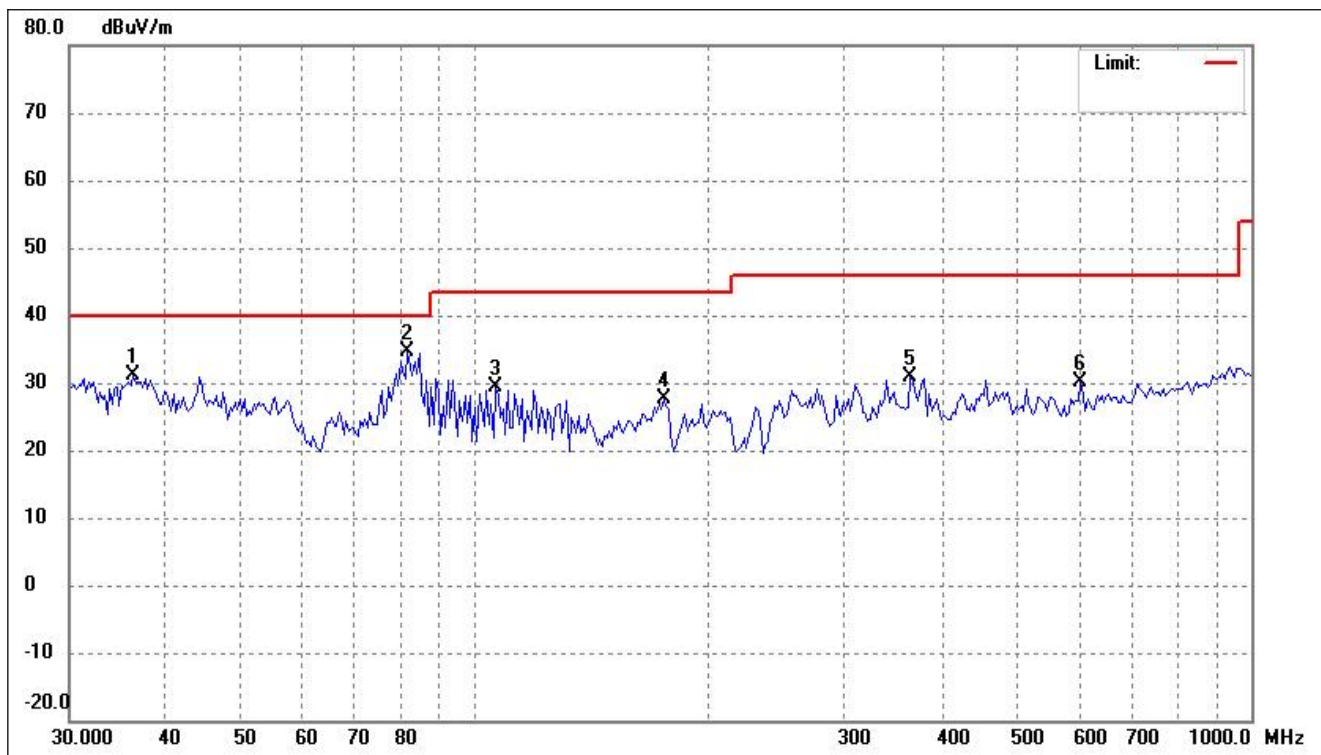

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	36.2678	40.51	-9.28	31.23	40.00	-8.77	-	-	peak
2	81.9478	47.73	-12.99	34.74	40.00	-5.26	-	-	peak
3	106.2812	41.38	-11.91	29.47	43.50	-14.03	-	-	peak
4	175.0404	37.15	-9.61	27.54	43.50	-15.96	-	-	peak
5	363.5231	37.73	-6.76	30.97	46.00	-15.03	-	-	peak
6	602.9287	31.92	-1.71	30.21	46.00	-15.79	-	-	peak


802.11a(Worst case)

Test Channel	5180MHz	Polarity:	Vertical
--------------	---------	-----------	----------

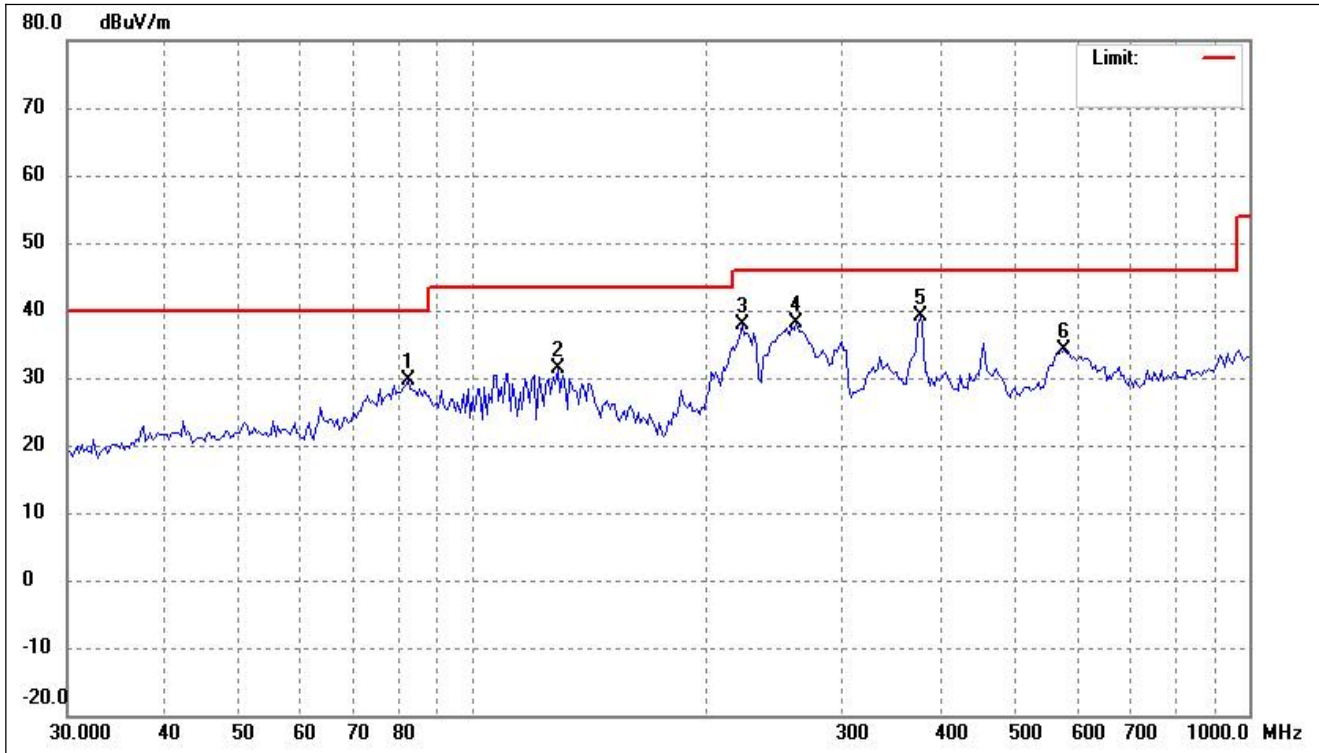


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	82.5257	42.67	-13.00	29.67	40.00	-10.33	-	-	peak
2	128.4862	41.42	-9.96	31.46	43.50	-12.04	-	-	peak
3	222.2807	49.73	-11.97	37.76	46.00	-8.24	-	-	peak
4	261.2730	47.93	-9.71	38.22	46.00	-7.78	-	-	peak
5	376.5228	45.46	-6.44	39.02	46.00	-6.98	-	-	peak
6	578.0359	36.39	-2.19	34.20	46.00	-11.80	-	-	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal

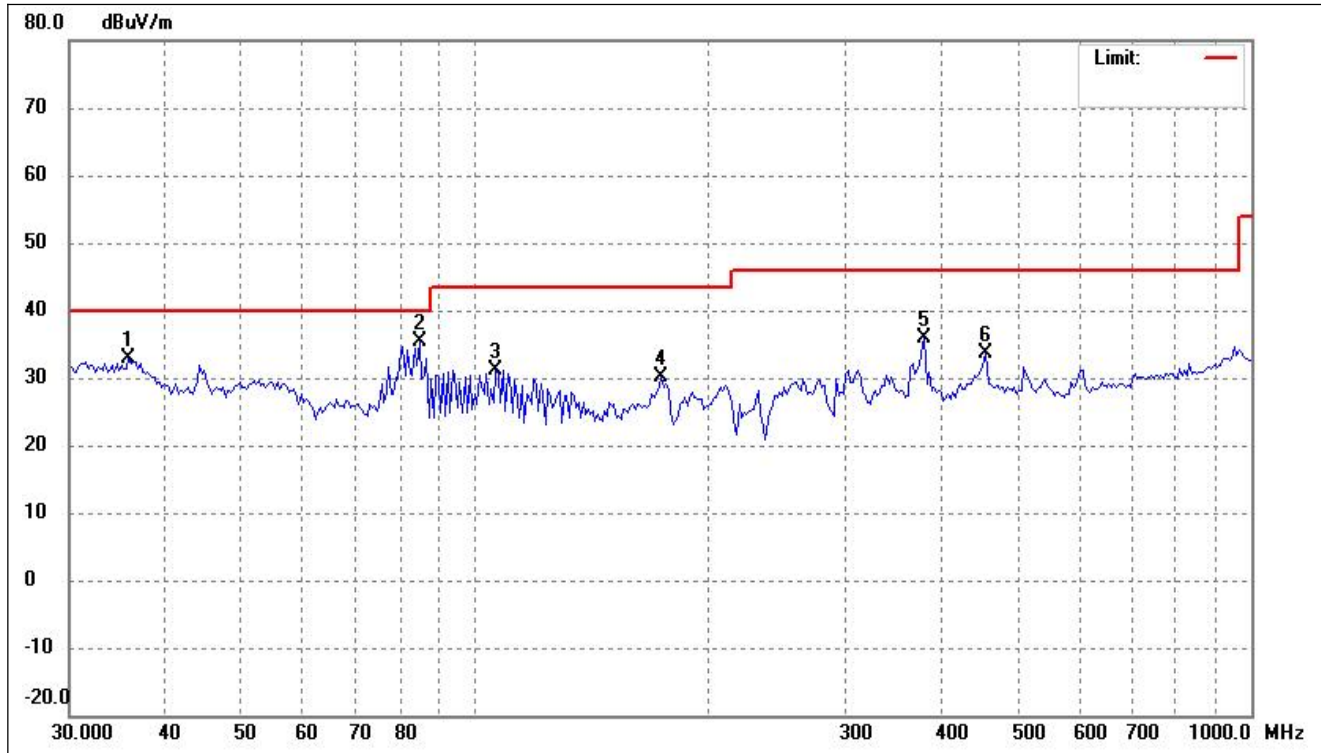

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	35.7617	42.31	-9.39	32.92	40.00	-7.08	-	-	peak
2	84.8783	48.30	-13.03	35.27	40.00	-4.73	-	-	peak
3	106.2812	43.13	-11.91	31.22	43.50	-12.28	-	-	peak
4	173.8147	39.64	-9.42	30.22	43.50	-13.28	-	-	peak
5	379.1780	42.25	-6.38	35.87	46.00	-10.13	-	-	peak
6	455.1888	38.23	-4.52	33.71	46.00	-12.29	-	-	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Vertical

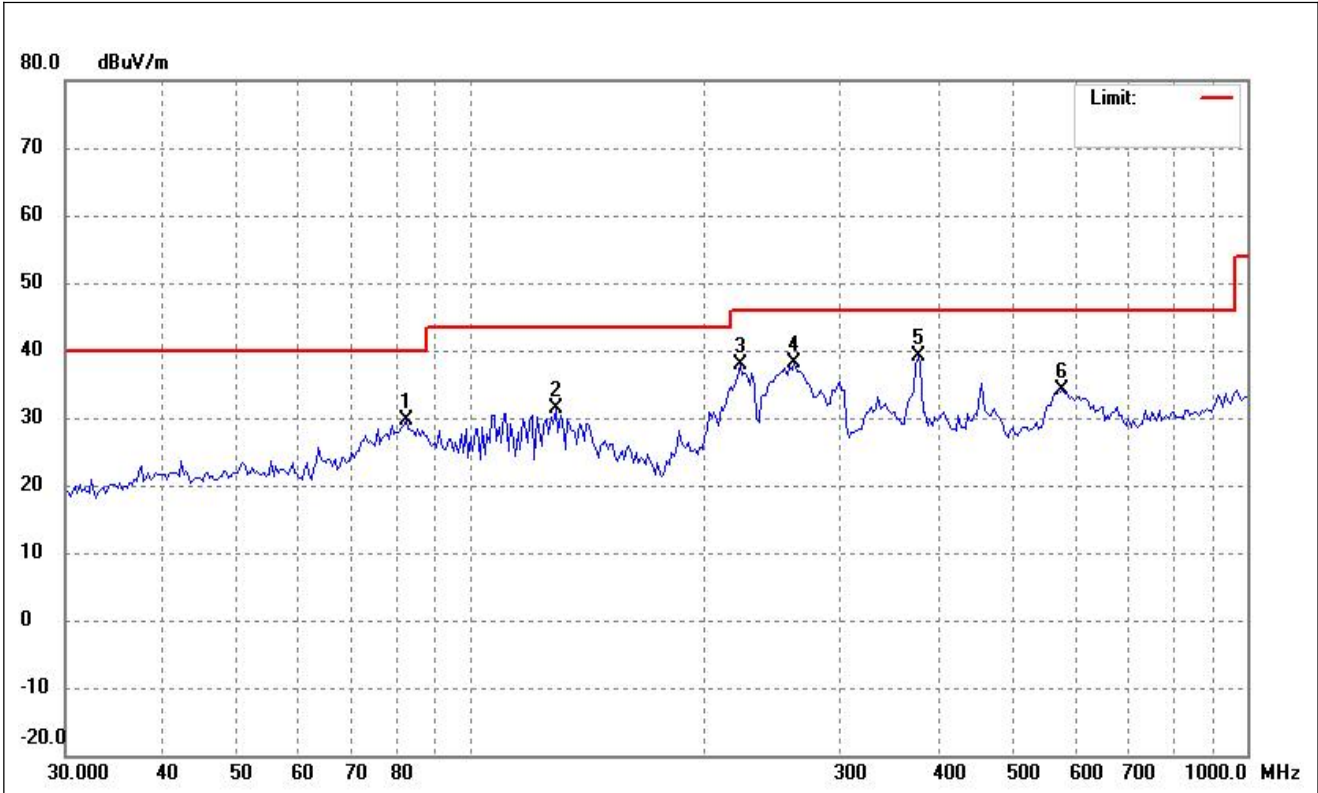

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	82.5257	42.67	-13.00	29.67	40.00	-10.33	-	-	peak
2	128.4862	41.42	-9.96	31.46	43.50	-12.04	-	-	peak
3	222.2807	49.73	-11.97	37.76	46.00	-8.24	-	-	peak
4	261.2730	47.93	-9.71	38.22	46.00	-7.78	-	-	peak
5	376.5228	45.46	-6.44	39.02	46.00	-6.98	-	-	peak
6	578.0359	36.39	-2.19	34.20	46.00	-11.80	-	-	peak

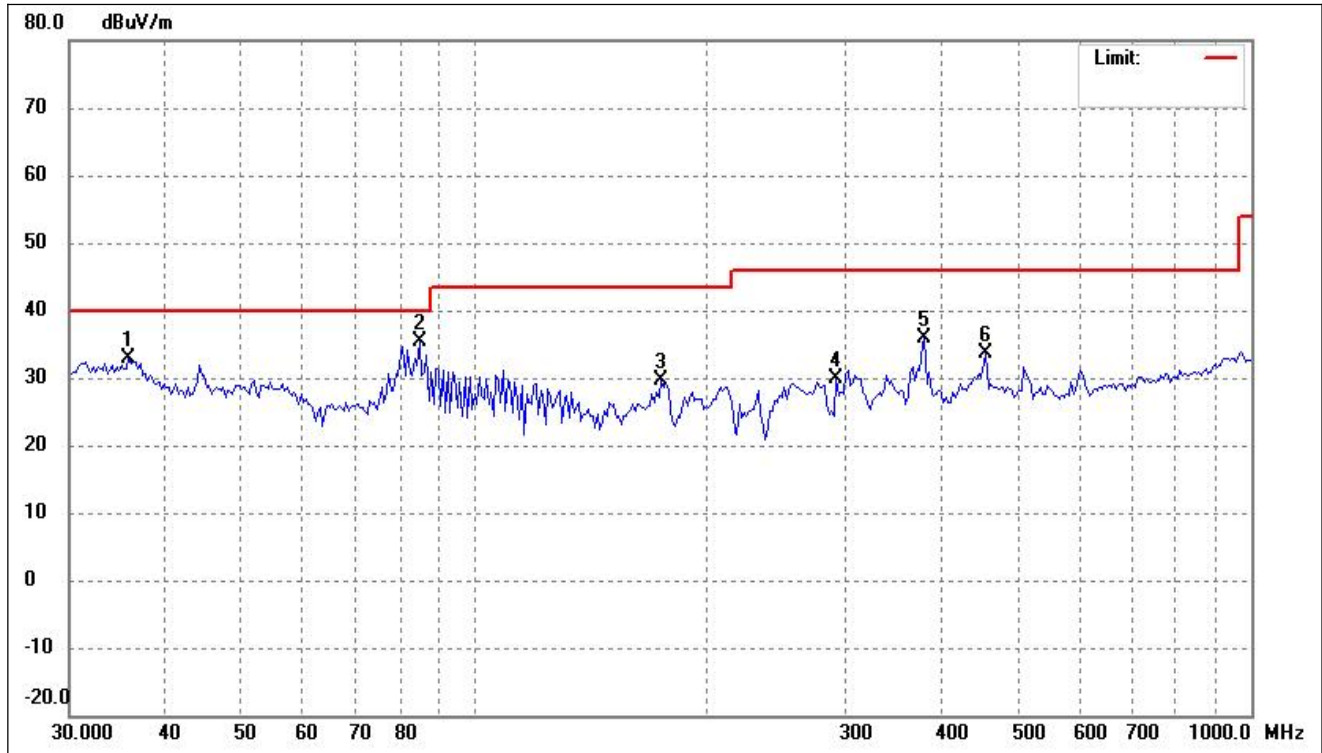
802.11a(Worst case)

Test Channel

5240MHz


Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	35.7617	42.31	-9.39	32.92	40.00	-7.08	-	-	peak
2	84.8783	48.51	-13.03	35.48	40.00	-4.52	-	-	peak
3	173.8147	38.93	-9.42	29.51	43.50	-13.99	-	-	peak
4	292.3643	38.49	-8.52	29.97	46.00	-16.03	-	-	peak
5	379.1780	42.25	-6.38	35.87	46.00	-10.13	-	-	peak
6	455.1888	38.23	-4.52	33.71	46.00	-12.29	-	-	peak

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Vertical

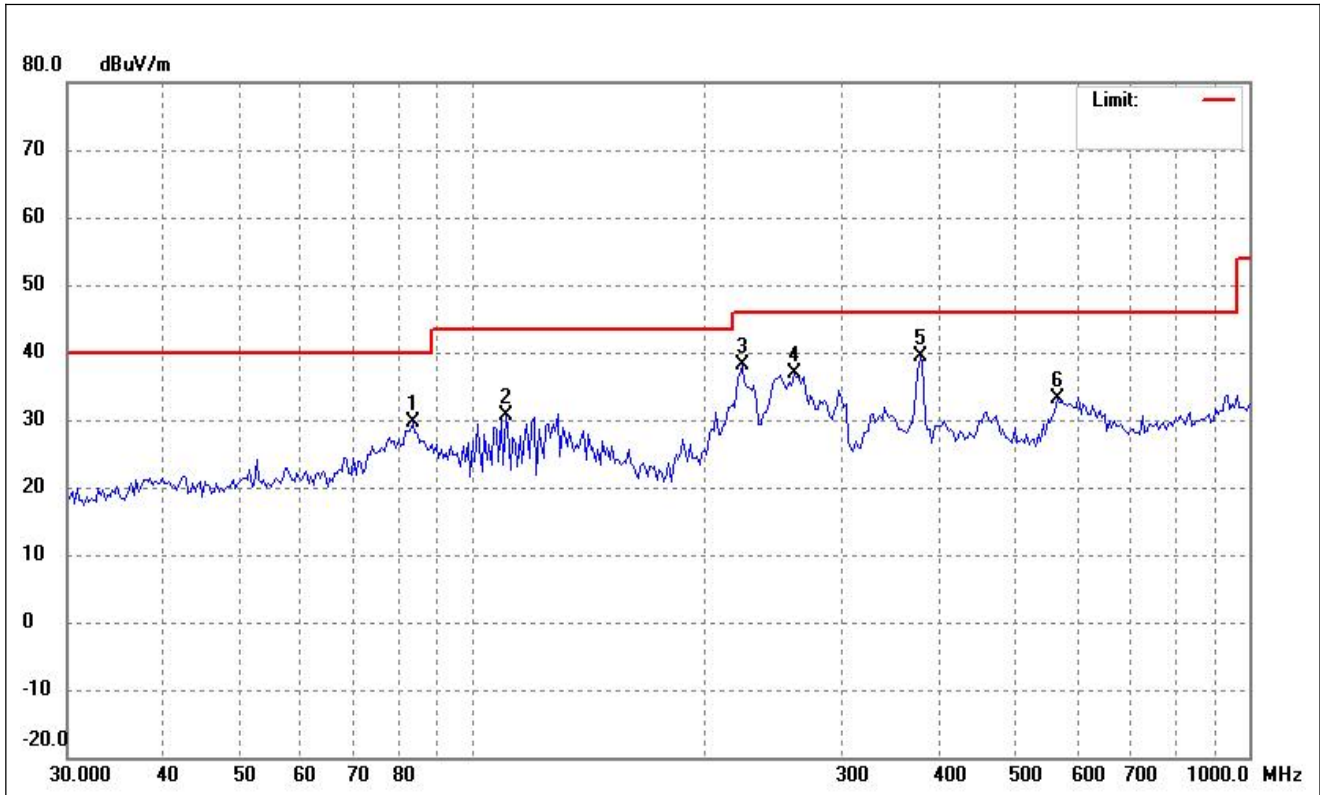


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	83.6937	42.54	-13.01	29.53	40.00	-10.47	-	-	peak
2	110.0818	42.21	-11.57	30.64	43.50	-12.86	-	-	peak
3	222.2807	50.11	-11.97	38.14	46.00	-7.86	-	-	peak
4	259.4434	46.58	-9.79	36.79	46.00	-9.21	-	-	peak
5	376.5228	45.74	-6.44	39.30	46.00	-6.70	-	-	peak
6	565.9776	35.65	-2.47	33.18	46.00	-12.82	-	-	peak

➤ 5725-5850MHz


802.11a(worst case)

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

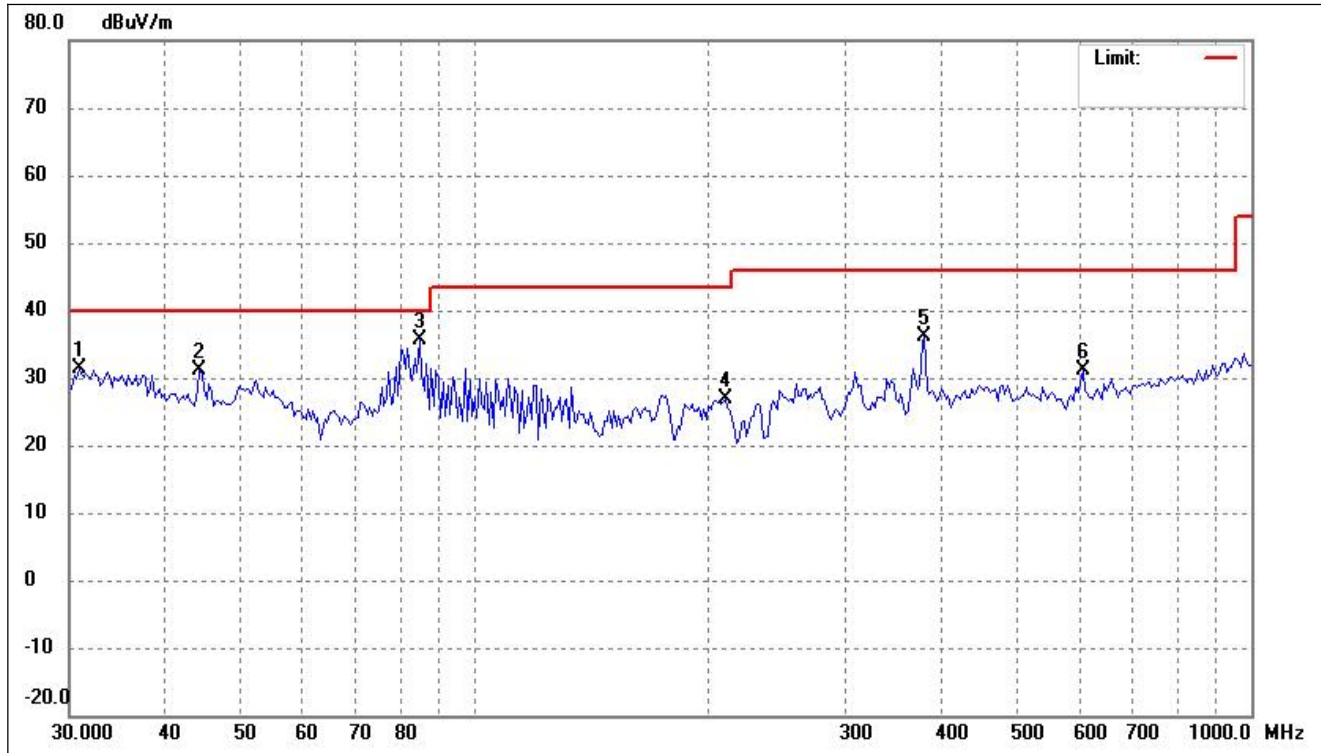


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	30.8552	41.54	-10.08	31.46	40.00	-8.54	-	-	peak
2	44.1544	39.49	-8.47	31.02	40.00	-8.98	-	-	peak
3	84.8783	48.57	-13.03	35.54	40.00	-4.46	-	-	peak
4	210.1294	38.94	-12.18	26.76	43.50	-16.74	-	-	peak
5	379.1780	42.40	-6.38	36.02	46.00	-9.98	-	-	peak
6	607.1806	32.67	-1.64	31.03	46.00	-14.97	-	-	peak

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical

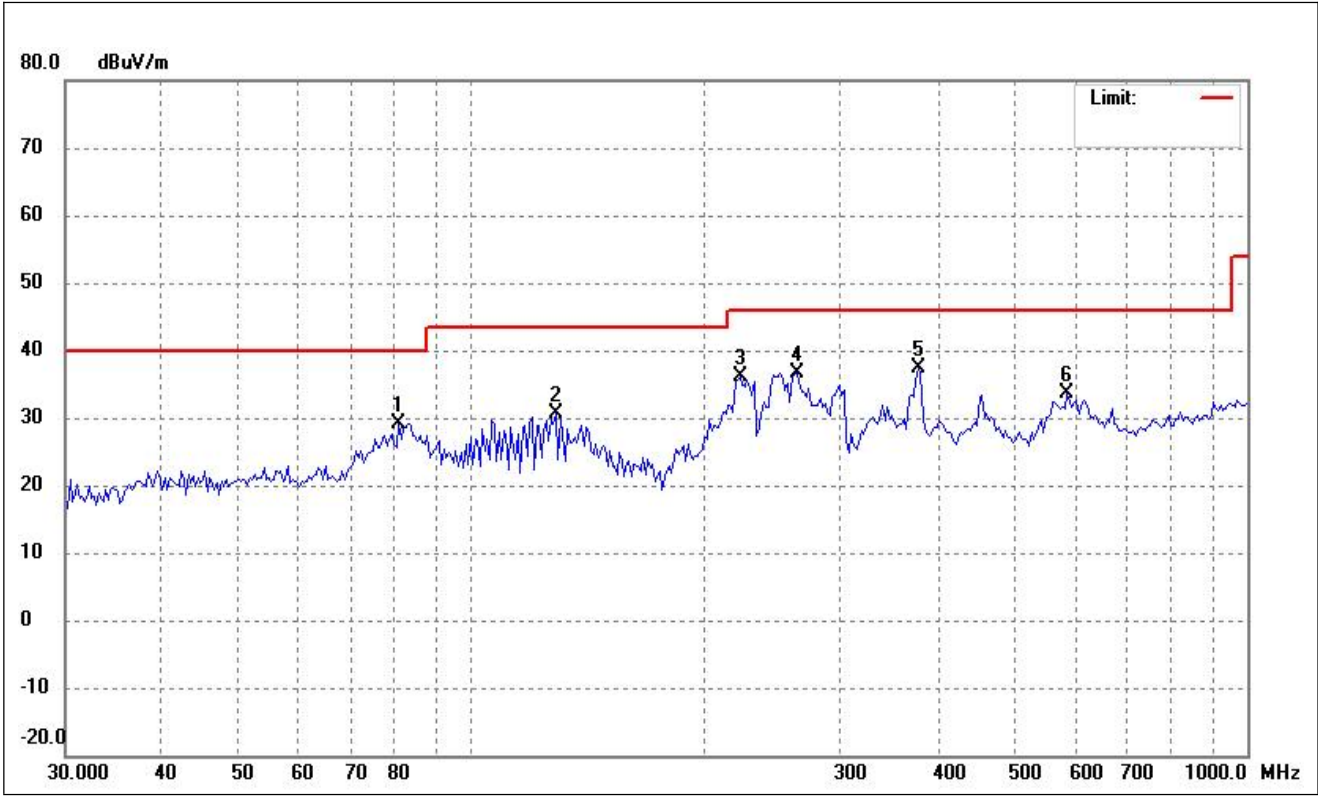


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	80.8042	42.11	-12.98	29.13	40.00	-10.87	-	-	peak
2	128.4862	40.66	-9.96	30.70	43.50	-12.80	-	-	peak
3	222.2807	48.12	-11.97	36.15	46.00	-9.85	-	-	peak
4	263.1155	46.35	-9.64	36.71	46.00	-9.29	-	-	peak
5	376.5228	43.90	-6.44	37.46	46.00	-8.54	-	-	peak
6	586.2172	35.77	-2.03	33.74	46.00	-12.26	-	-	peak

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Horizontal

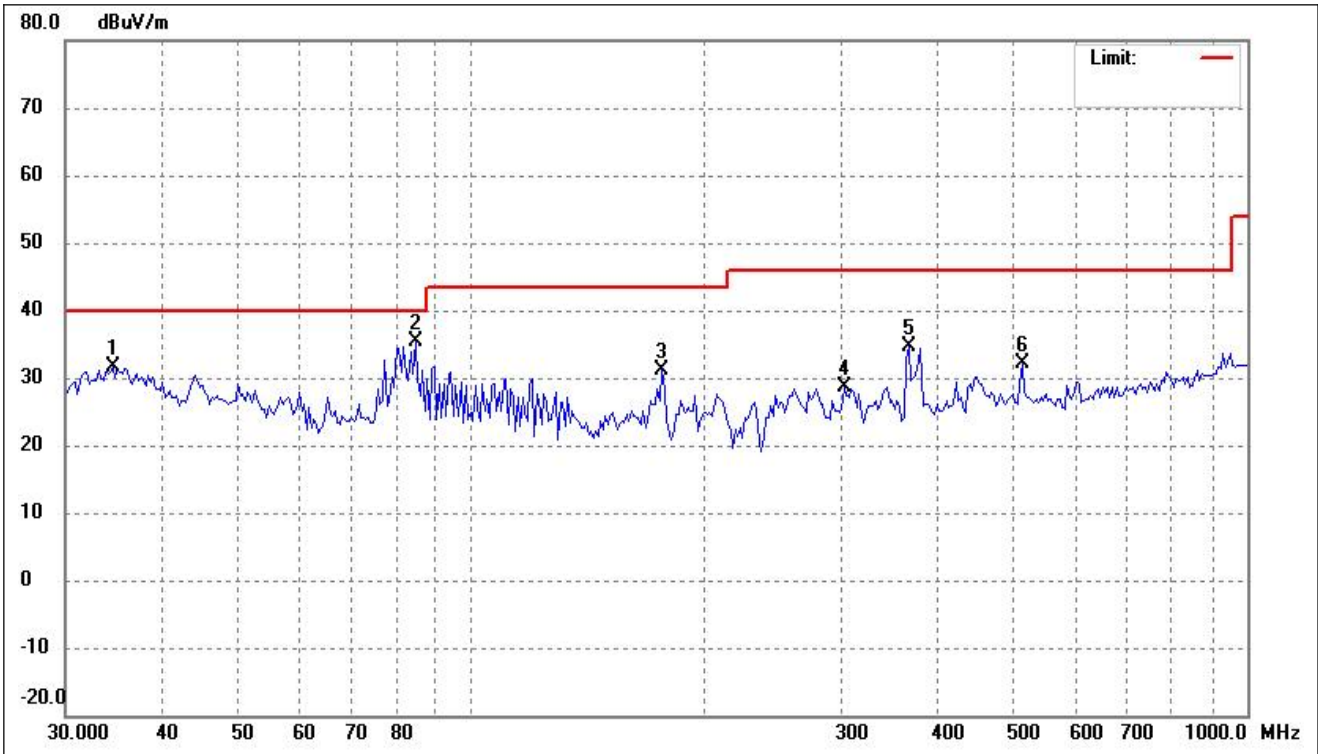


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	34.5270	41.15	-9.61	31.54	40.00	-8.46	-	-	peak
2	84.8783	48.31	-13.03	35.28	40.00	-4.72	-	-	peak
3	176.2748	40.91	-9.78	31.13	43.50	-12.37	-	-	peak
4	302.8193	36.81	-8.18	28.63	46.00	-17.37	-	-	peak
5	366.0866	41.42	-6.70	34.72	46.00	-11.28	-	-	peak
6	512.9478	35.93	-3.70	32.23	46.00	-13.77	-	-	peak

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Vertical

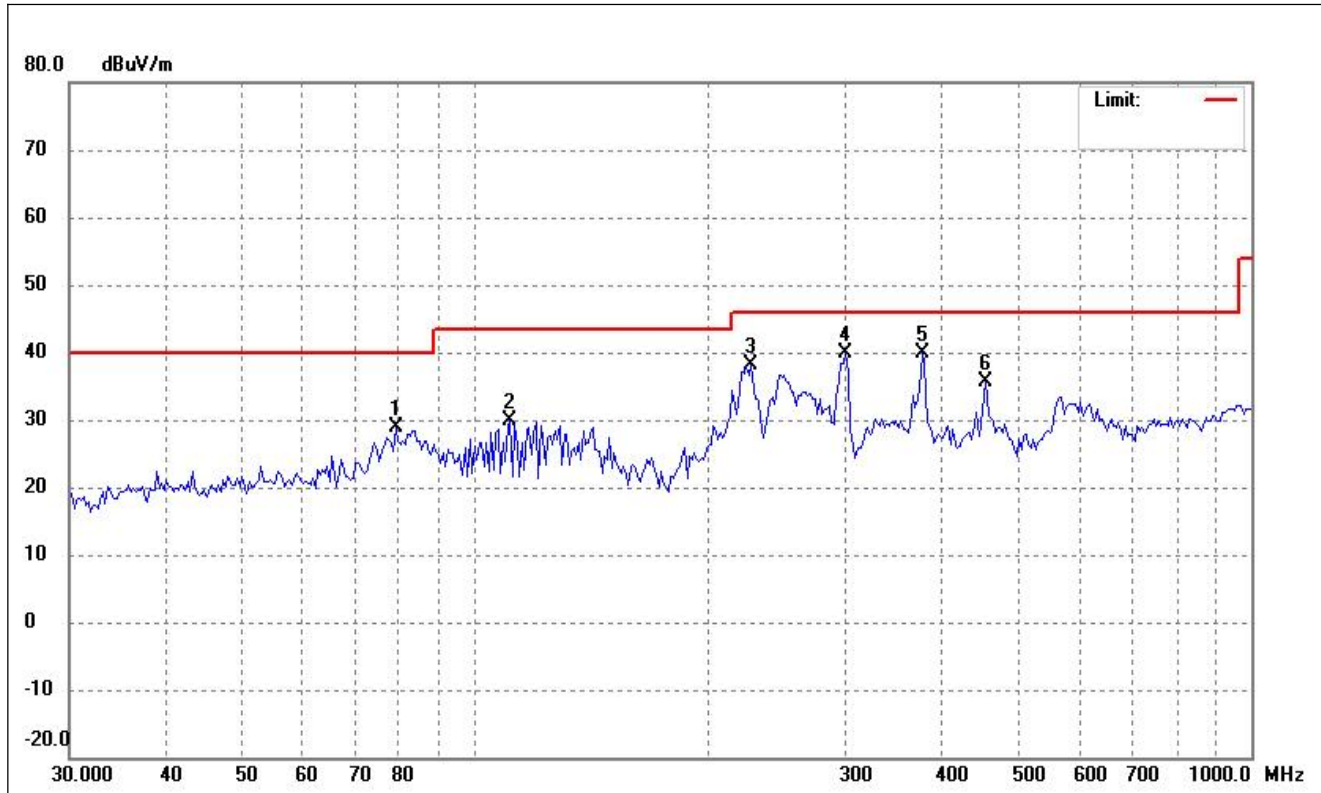


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	79.1185	41.72	-12.77	28.95	40.00	-11.05	-	-	peak
2	110.8581	41.30	-11.49	29.81	43.50	-13.69	-	-	peak
3	227.0164	49.83	-11.76	38.07	46.00	-7.93	-	-	peak
4	300.6988	48.21	-8.24	39.97	46.00	-6.03	-	-	peak
5	376.5228	46.30	-6.44	39.86	46.00	-6.14	-	-	peak
6	455.1888	40.08	-4.52	35.56	46.00	-10.44	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

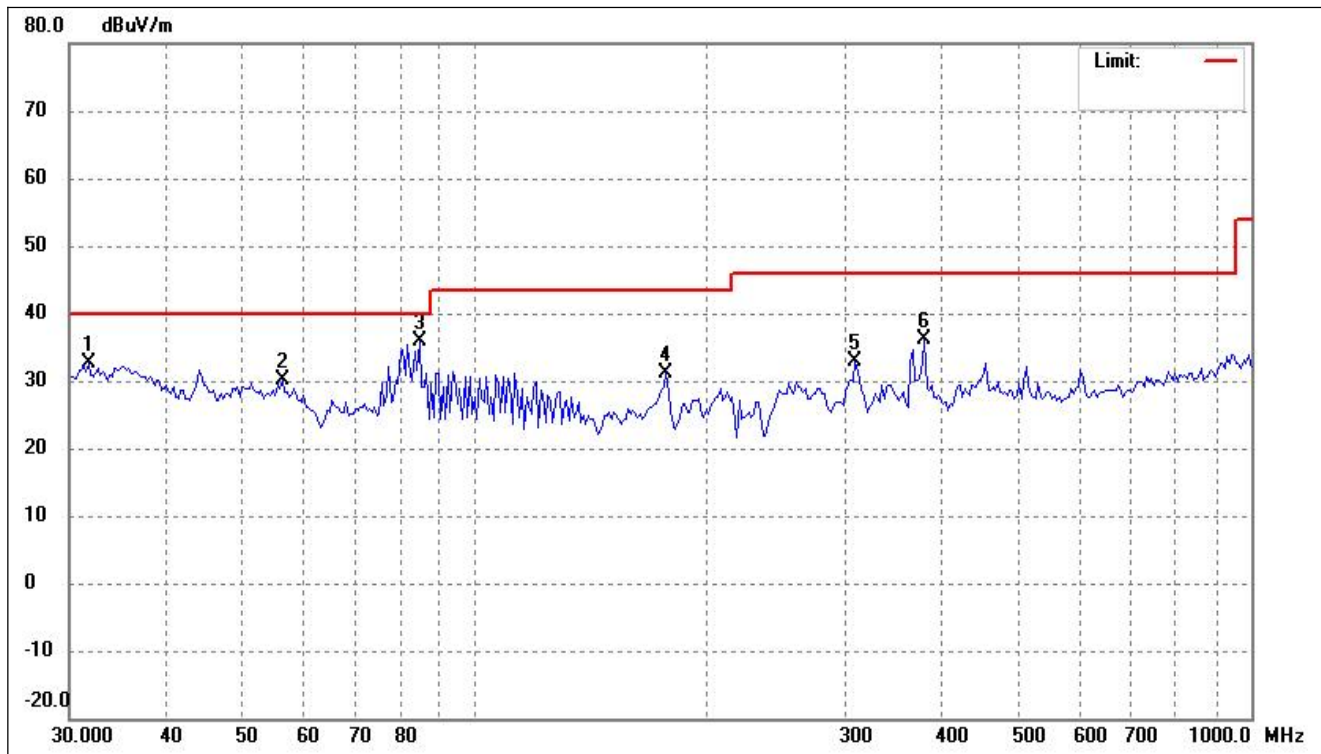

No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	31.7348	42.49	-9.98	32.51	40.00	-7.49	-	-	peak
2	56.4662	38.86	-8.72	30.14	40.00	-9.86	-	-	peak
3	84.8783	48.83	-13.03	35.80	40.00	-4.20	-	-	peak
4	176.2748	40.91	-9.78	31.13	43.50	-12.37	-	-	peak
5	309.2710	40.96	-8.00	32.96	46.00	-13.04	-	-	peak
6	379.1780	42.41	-6.38	36.03	46.00	-9.97	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

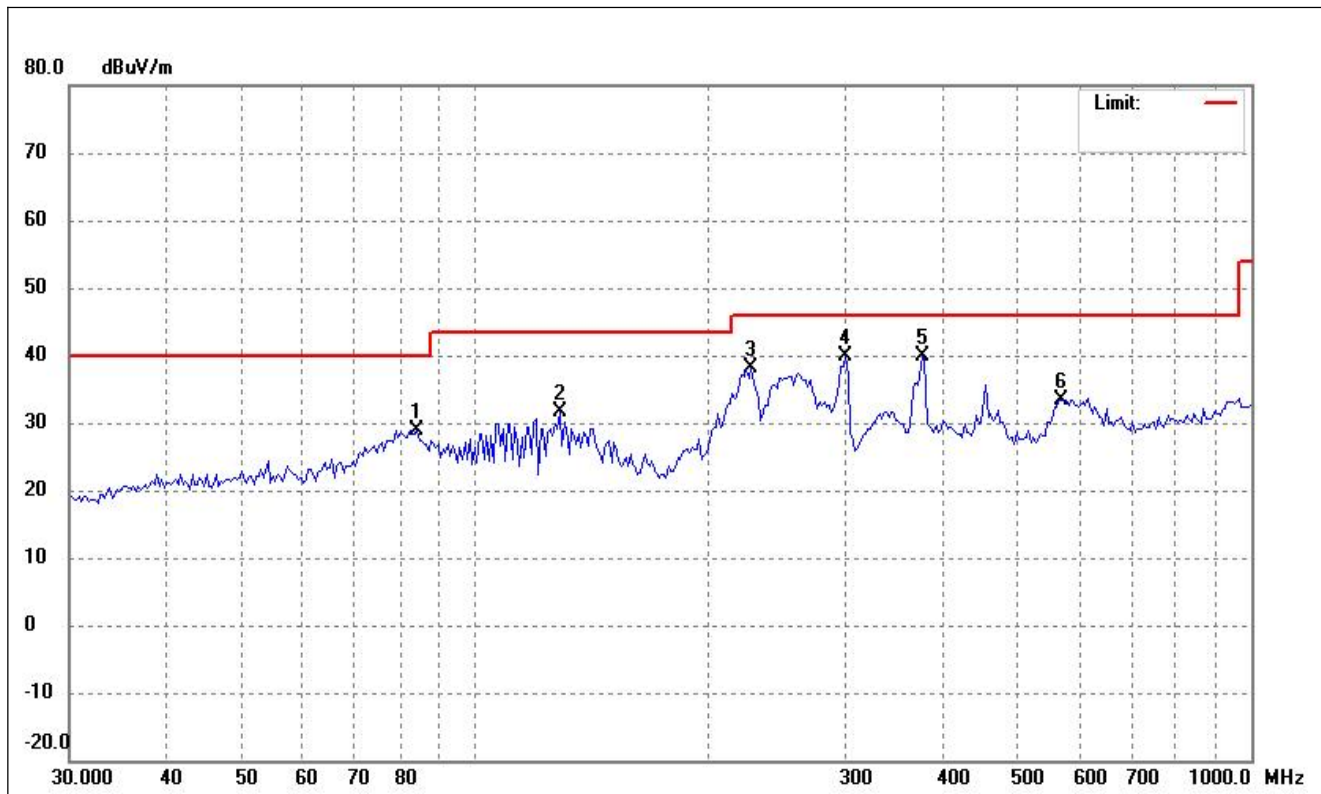


No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. ()	Height (cm)	Remark
1	84.2839	42.01	-13.02	28.99	40.00	-11.01	-	-	peak
2	128.4862	41.50	-9.96	31.54	43.50	-11.96	-	-	peak
3	227.0164	49.83	-11.76	38.07	46.00	-7.93	-	-	peak
4	300.6988	48.21	-8.24	39.97	46.00	-6.03	-	-	peak
5	376.5228	46.30	-6.44	39.86	46.00	-6.14	-	-	peak
6	569.9688	35.86	-2.36	33.50	46.00	-12.50	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


- Spurious Emission above 1GHz
- Antenna 0(worst case)

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

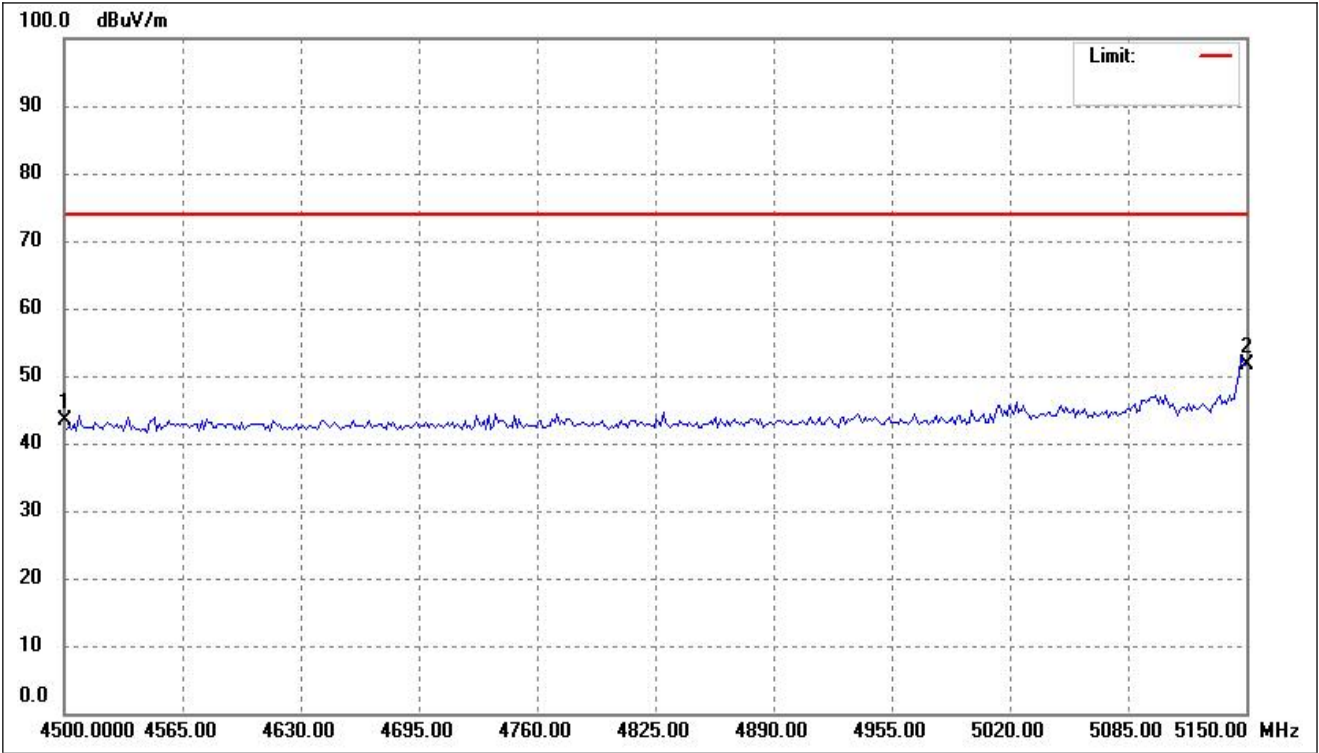

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	4500.000	56.49	-13.10	43.39	74.00	-30.61	-	-	peak
2	5150.000	63.21	-11.66	51.55	74.00	-22.45	-	-	peak

802.11a- Restricted Bandedge(worst case)			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

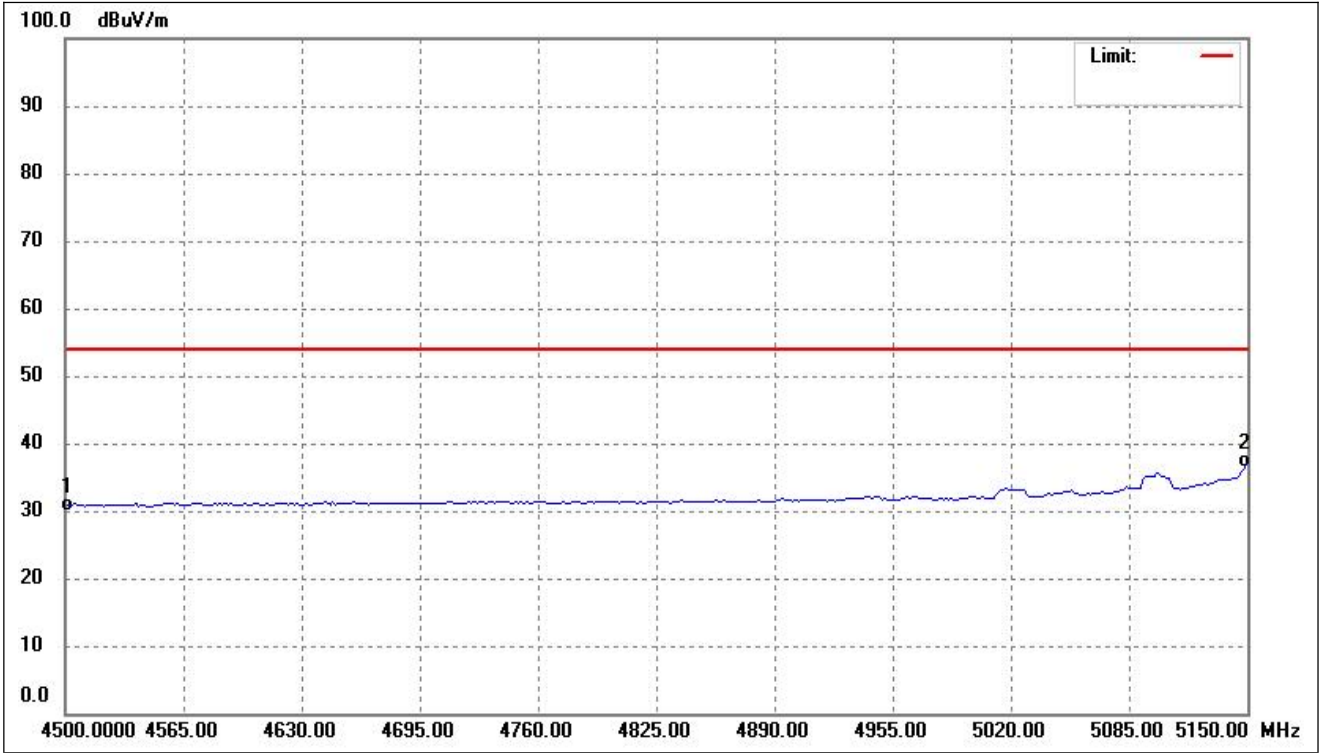

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	43.90	-13.10	30.80	54.00	-23.20	-	-	AVG
2	5150.000	48.97	-11.66	37.31	54.00	-16.69	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-'Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna 0(worst case)
- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	46.01	7.11	53.12	74	-20.88	H	PK
10360	39.63	7.11	46.74	54	-7.26	H	AV
15540	40.00	8.22	48.22	74	-25.78	H	PK
15540	33.67	8.22	41.89	54	-12.11	H	AV
10360	44.34	7.11	51.45	74	-22.55	V	PK
10360	36.57	7.11	43.68	54	-10.32	V	AV
15540	37.02	8.22	45.24	74	-28.76	V	PK
15540	32.32	8.22	40.54	54	-13.46	V	AV
Middle Channel (5200MHz)							
10400	44.91	7.22	52.13	74	-21.87	H	PK
10400	38.28	7.22	45.50	54	-8.50	H	AV
15600	41.32	8.67	49.99	74	-24.01	H	PK
15600	35.70	8.67	44.37	54	-9.63	H	AV
10400	44.75	7.22	51.97	74	-22.03	V	PK
10400	38.56	7.22	45.78	54	-8.22	V	AV
15600	37.94	8.67	46.61	74	-27.39	V	PK
15600	31.32	8.67	39.99	54	-14.01	V	AV
High Channel (5240MHz)							
10480	43.99	7.69	51.68	74	-22.32	H	PK
10480	38.59	7.69	46.28	54	-7.72	H	AV
15720	38.72	8.93	47.65	74	-26.35	H	PK
15720	33.95	8.93	42.88	54	-11.12	H	AV
10480	45.06	7.69	52.75	74	-21.25	V	PK
10480	37.77	7.69	45.46	54	-8.54	V	AV
15720	38.86	8.93	47.79	74	-26.21	V	PK
15720	31.59	8.93	40.52	54	-13.48	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	45.38	9.45	54.83	74	-19.17	H	PK
11490	38.42	9.45	47.87	54	-6.13	H	AV
17235	40.85	10.36	51.21	74	-22.79	H	PK
17235	33.80	10.36	44.16	54	-9.84	H	AV
11490	44.80	9.45	54.25	74	-19.75	V	PK
11490	38.56	9.45	48.01	54	-5.99	V	AV
17235	37.55	10.36	47.91	74	-26.09	V	PK
17235	30.12	10.36	40.48	54	-13.52	V	AV
Middle Channel (5785MHz)							
11570	44.74	9.62	54.36	74	-19.64	H	PK
11570	38.41	9.62	48.03	54	-5.97	H	AV
17355	39.60	10.67	50.27	74	-23.73	H	PK
17355	34.68	10.67	45.35	54	-8.65	H	AV
11570	44.97	9.62	54.59	74	-19.41	V	PK
11570	36.47	9.62	46.09	54	-7.91	V	AV
17355	36.43	10.67	47.10	74	-26.90	V	PK
17355	31.51	10.67	42.18	54	-11.82	V	AV
High Channel (5825MHz)							
11650	44.62	9.84	54.46	74	-19.54	H	PK
11650	38.32	9.84	48.16	54	-5.84	H	AV
17475	40.45	10.95	51.40	74	-22.60	H	PK
17475	34.12	10.95	45.07	54	-8.93	H	AV
11650	46.08	9.84	55.92	74	-18.08	V	PK
11650	38.48	9.84	48.32	54	-5.68	V	AV
17475	39.15	10.95	50.10	74	-23.90	V	PK
17475	30.51	10.95	41.46	54	-12.54	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.03	-27
Highest	Above 5350	-42.02	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.47	-27
	5650 to 5700	-33.56	-27 to -17
	5700 to 5720	-28.75	-17 to 15.6
	5720 to 5725	-17.79	15.6 to 27
Highest	5850 to 5855	-16.22	27 to 15.6
	5855 to 5875	-22.71	15.6 to -17
	5875 to 5925	-33.25	-17 to -27
	Above 5925	-37.81	-27
Note: the data just list the worst cases			

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	44.35	7.11	51.46	74	-22.54	H	PK
10360	37.37	7.11	44.48	54	-9.52	H	AV
15540	38.18	8.22	46.40	74	-27.60	H	PK
15540	33.94	8.22	42.16	54	-11.84	H	AV
10360	44.68	7.11	51.79	74	-22.21	V	PK
10360	37.13	7.11	44.24	54	-9.76	V	AV
15540	37.30	8.22	45.52	74	-28.48	V	PK
15540	31.25	8.22	39.47	54	-14.53	V	AV
Middle Channel (5200MHz)							
10400	43.66	7.22	50.88	74	-23.12	H	PK
10400	37.50	7.22	44.72	54	-9.28	H	AV
15600	37.91	8.67	46.58	74	-27.42	H	PK
15600	35.39	8.67	44.06	54	-9.94	H	AV
10400	45.09	7.22	52.31	74	-21.69	V	PK
10400	36.23	7.22	43.45	54	-10.55	V	AV
15600	37.86	8.67	46.53	74	-27.47	V	PK
15600	30.20	8.67	38.87	54	-15.13	V	AV
High Channel (5240MHz)							
10480	43.70	7.69	51.39	74	-22.61	H	PK
10480	37.09	7.69	44.78	54	-9.22	H	AV
15720	38.05	8.93	46.98	74	-27.02	H	PK
15720	35.20	8.93	44.13	54	-9.87	H	AV
10480	44.38	7.69	52.07	74	-21.93	V	PK
10480	37.68	7.69	45.37	54	-8.63	V	AV
15720	36.78	8.93	45.71	74	-28.29	V	PK
15720	30.86	8.93	39.79	54	-14.21	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	45.09	9.45	54.54	74	-19.46	H	PK
11490	38.43	9.45	47.88	54	-6.12	H	AV
17235	39.56	10.36	49.92	74	-24.08	H	PK
17235	36.63	10.36	46.99	54	-7.01	H	AV
11490	44.77	9.45	54.22	74	-19.78	V	PK
11490	38.11	9.45	47.56	54	-6.44	V	AV
17235	38.51	10.36	48.87	74	-25.13	V	PK
17235	30.26	10.36	40.62	54	-13.38	V	AV
Middle Channel (5785MHz)							
11570	45.73	9.62	55.35	74	-18.65	H	PK
11570	38.10	9.62	47.72	54	-6.28	H	AV
17355	38.99	10.67	49.66	74	-24.34	H	PK
17355	34.78	10.67	45.45	54	-8.55	H	AV
11570	44.90	9.62	54.52	74	-19.48	V	PK
11570	37.61	9.62	47.23	54	-6.77	V	AV
17355	35.53	10.67	46.20	74	-27.80	V	PK
17355	30.92	10.67	41.59	54	-12.41	V	AV
High Channel (5825MHz)							
11650	44.31	9.84	54.15	74	-19.85	H	PK
11650	36.74	9.84	46.58	54	-7.42	H	AV
17475	38.58	10.95	49.53	74	-24.47	H	PK
17475	33.87	10.95	44.82	54	-9.18	H	AV
11650	43.52	9.84	53.36	74	-20.64	V	PK
11650	36.49	9.84	46.33	54	-7.67	V	AV
17475	35.88	10.95	46.83	74	-27.17	V	PK
17475	30.99	10.95	41.94	54	-12.06	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-29.64	-27
Highest	Above 5350	-39.79	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-49.54	-27
	5650 to 5700	-38.08	-27 to -17
	5700 to 5720	-27.46	-17 to 15.6
	5720 to 5725	-18.15	15.6 to 27
Highest	5850 to 5855	-15.08	27 to 15.6
	5855 to 5875	-27.07	15.6 to -17
	5875 to 5925	-33.87	-17 to -27
	Above 5925	-42.57	-27
Note: the data just list the worst cases			

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11ac-VHT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	46.28	7.11	53.39	74	-20.61	H	PK
10360	38.97	7.11	46.08	54	-7.92	H	AV
15540	39.21	8.22	47.43	74	-26.57	H	PK
15540	36.16	8.22	44.38	54	-9.62	H	AV
10360	43.01	7.11	50.12	74	-23.88	V	PK
10360	37.41	7.11	44.52	54	-9.48	V	AV
15540	37.90	8.22	46.12	74	-27.88	V	PK
15540	30.22	8.22	38.44	54	-15.56	V	PK
Middle Channel (5200MHz)							
10400	45.83	7.22	53.05	74	-20.95	H	PK
10400	36.77	7.22	43.99	54	-10.01	H	AV
15600	40.82	8.67	49.49	74	-24.51	H	PK
15600	34.50	8.67	43.17	54	-10.83	H	AV
10400	44.74	7.22	51.96	74	-22.04	V	PK
10400	37.75	7.22	44.97	54	-9.03	V	AV
15600	37.67	8.67	46.34	74	-27.66	V	PK
15600	30.84	8.67	39.51	54	-14.49	V	PK
High Channel (5240MHz)							
10480	44.75	7.69	52.44	74	-21.56	H	PK
10480	38.38	7.69	46.07	54	-7.93	H	AV
15720	39.22	8.93	48.15	74	-25.85	H	PK
15720	35.05	8.93	43.98	54	-10.02	H	AV
10480	44.78	7.69	52.47	74	-21.53	V	PK
10480	36.98	7.69	44.67	54	-9.33	V	AV
15720	37.72	8.93	46.65	74	-27.35	V	PK
15720	31.55	8.93	40.48	54	-13.52	V	PK

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	43.71	9.45	53.16	74	-20.84	H	PK
11490	38.23	9.45	47.68	54	-6.32	H	AV
17235	39.13	10.36	49.49	74	-24.51	H	PK
17235	35.39	10.36	45.75	54	-8.25	H	AV
11490	44.28	9.45	53.73	74	-20.27	V	PK
11490	36.84	9.45	46.29	54	-7.71	V	AV
11490	37.19	9.45	46.64	74	-27.36	V	PK
17235	29.92	10.36	40.28	54	-13.72	V	PK
Middle Channel (5785MHz)							
11570	45.90	9.62	55.52	74	-18.48	H	PK
11570	38.18	9.62	47.80	54	-6.20	H	AV
17355	39.48	10.67	50.15	74	-23.85	H	PK
17355	35.48	10.67	46.15	54	-7.85	H	AV
11570	45.14	9.62	54.76	74	-19.24	V	PK
11570	37.06	9.62	46.68	54	-7.32	V	AV
17355	36.46	10.67	47.13	74	-26.87	V	PK
17355	31.99	10.67	42.66	54	-11.34	V	PK
High Channel (5825MHz)							
11650	44.56	9.84	54.40	74	-19.60	H	PK
11650	36.22	9.84	46.06	54	-7.94	H	AV
17475	39.61	10.95	50.56	74	-23.44	H	PK
17475	35.48	10.95	46.43	54	-7.57	H	AV
11650	44.98	9.84	54.82	74	-19.18	V	PK
11650	38.43	9.84	48.27	54	-5.73	V	AV
17475	35.80	10.95	46.75	74	-27.25	V	PK
17475	31.59	10.95	42.54	54	-11.46	V	PK

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-30.26	-27
Highest	Above 5350	-37.26	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.27	-27
	5650 to 5700	-40.83	-27 to -17
	5700 to 5720	-25.60	-17 to 15.6
	5720 to 5725	-17.66	15.6 to 27
Highest	5850 to 5855	-12.31	27 to 15.6
	5855 to 5875	-23.61	15.6 to -17
	5875 to 5925	-36.99	-17 to -27
	Above 5925	-38.22	-27
Note: the data just list the worst cases			

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5190MHz)							
10380	43.56	7.25	50.81	74	-23.19	H	PK
10380	37.97	7.25	45.22	54	-8.78	H	AV
15570	38.75	8.33	47.08	74	-26.92	H	PK
15570	34.21	8.33	42.54	54	-11.46	H	AV
10380	45.22	7.25	52.47	74	-21.53	V	PK
10380	37.31	7.25	44.56	54	-9.44	V	AV
15570	38.20	8.33	46.53	74	-27.47	V	PK
15570	30.80	8.33	39.13	54	-14.87	V	PK
High Channel (5230MHz)							
10460	44.28	7.54	51.82	74	-22.18	H	PK
10460	38.28	7.54	45.82	54	-8.18	H	AV
15690	40.15	8.86	49.01	74	-24.99	H	PK
15690	34.10	8.86	42.96	54	-11.04	H	AV
10460	46.24	7.54	53.78	74	-20.22	V	PK
10460	37.65	7.54	45.19	54	-8.81	V	AV
15690	36.91	8.86	45.77	74	-28.23	V	PK
15690	30.20	8.86	39.06	54	-14.94	V	PK

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	45.64	9.65	55.29	74	-18.71	H	PK
11510	37.12	9.65	46.77	54	-7.23	H	AV
17265	39.15	10.87	50.02	74	-23.98	H	PK
17265	34.71	10.87	45.58	54	-8.42	H	AV
11510	45.71	9.65	55.36	74	-18.64	V	PK
11510	37.95	9.65	47.60	54	-6.40	V	AV
17265	37.28	10.87	48.15	74	-25.85	V	PK
17265	30.01	10.87	40.88	54	-13.12	V	AV
High Channel (5795MHz)							
11590	44.01	9.81	53.82	74	-20.18	H	PK
11590	36.56	9.81	46.37	54	-7.63	H	AV
17385	39.05	10.89	49.94	74	-24.06	H	PK
17385	35.69	10.89	46.58	54	-7.42	H	AV
11590	43.53	9.81	53.34	74	-20.66	V	PK
11590	37.08	9.81	46.89	54	-7.11	V	AV
17385	36.86	10.89	47.75	74	-26.25	V	PK
17385	29.92	10.89	40.81	54	-13.19	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.86	-27
Highest	Above 5350	-41.31	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-49.05	-27
	5650 to 5700	-37.14	-27 to -17
	5700 to 5720	-24.50	-17 to 15.6
	5720 to 5725	-16.66	15.6 to 27
Highest	5850 to 5855	-13.76	27 to 15.6
	5855 to 5875	-25.86	15.6 to -17
	5875 to 5925	-35.95	-17 to -27
	Above 5925	-37.74	-27
Note: the data just list the worst cases			

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11ac-VHT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5190MHz)							
10380	44.84	7.25	52.09	74	-21.91	H	PK
10380	37.39	7.25	44.64	54	-9.36	H	AV
15570	39.17	8.33	47.50	74	-26.50	H	PK
15570	35.57	8.33	43.90	54	-10.10	H	AV
10380	44.40	7.25	51.65	74	-22.35	V	PK
10380	37.05	7.25	44.30	54	-9.70	V	AV
15570	36.83	8.33	45.16	74	-28.84	V	PK
15570	29.35	8.33	37.68	54	-16.32	V	AV
High Channel (5230MHz)							
10460	45.56	7.54	53.10	74	-20.90	H	PK
10460	37.89	7.54	45.43	54	-8.57	H	AV
15690	40.32	8.86	49.18	74	-24.82	H	PK
15690	35.78	8.86	44.64	54	-9.36	H	AV
10460	44.72	7.54	52.26	74	-21.74	V	PK
10460	37.33	7.54	44.87	54	-9.13	V	AV
15690	36.40	8.86	45.26	74	-28.74	V	PK
15690	31.88	8.86	40.74	54	-13.26	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	46.15	9.65	55.80	74	-18.20	H	PK
11510	37.68	9.65	47.33	54	-6.67	H	AV
17265	40.10	10.87	50.97	74	-23.03	H	PK
17265	35.40	10.87	46.27	54	-7.73	H	AV
11510	44.23	9.65	53.88	74	-20.12	V	PK
11510	35.27	9.65	44.92	54	-9.08	V	AV
17265	38.64	10.87	49.51	74	-24.49	V	PK
17265	31.37	10.87	42.24	54	-11.76	V	AV
High Channel (5795MHz)							
11590	44.14	9.81	53.95	74	-20.05	H	PK
11590	35.91	9.81	45.72	54	-8.28	H	AV
17385	40.10	10.89	50.99	74	-23.01	H	PK
17385	36.27	10.89	47.16	54	-6.84	H	AV
11590	45.23	9.81	55.04	74	-18.96	V	PK
11590	37.17	9.81	46.98	54	-7.02	V	AV
17385	37.12	10.89	48.01	74	-25.99	V	PK
17385	32.07	10.89	42.96	54	-11.04	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.70	-27
Highest	Above 5350	-40.63	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-50.02	-27
	5650 to 5700	-39.90	-27 to -17
	5700 to 5720	-28.16	-17 to 15.6
	5720 to 5725	-15.60	15.6 to 27
Highest	5850 to 5855	-12.50	27 to 15.6
	5855 to 5875	-26.06	15.6 to -17
	5875 to 5925	-34.31	-17 to -27
	Above 5925	-37.97	-27

Note: the data just list the worst cases

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11ac-VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Middle Channel (5210MHz)							
10380	43.02	7.25	50.27	74	-23.73	H	PK
10380	36.26	7.25	43.51	54	-10.49	H	AV
15570	39.75	8.33	48.08	74	-25.92	H	PK
15570	33.87	8.33	42.20	54	-11.80	H	AV
10380	42.87	7.25	50.12	74	-23.88	V	PK
10380	37.61	7.25	44.86	54	-9.14	V	AV
15570	36.71	8.33	45.04	74	-28.96	V	PK
15570	30.69	8.33	39.02	54	-14.98	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Middle Channel (5775MHz)							
11510	42.83	9.65	52.48	74	-21.52	H	PK
11510	34.98	9.65	44.63	54	-9.37	H	AV
17265	39.30	10.87	50.17	74	-23.83	H	PK
17265	34.40	10.87	45.27	54	-8.73	H	AV
11510	44.19	9.65	53.84	74	-20.16	V	PK
11510	35.36	9.65	45.01	54	-8.99	V	AV
17265	37.67	10.87	48.54	74	-25.46	V	PK
17265	29.97	10.87	40.84	54	-13.16	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.26	-27
Highest	Above 5350	-43.81	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-42.08	-27
	5650 to 5700	-37.31	-27 to -17
	5700 to 5720	-30.26	-17 to 15.6
	5720 to 5725	-17.04	15.6 to 27
Highest	5850 to 5855	-14.59	27 to 15.6
	5855 to 5875	-24.74	15.6 to -17
	5875 to 5925	-36.39	-17 to -27
	Above 5925	-36.01	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

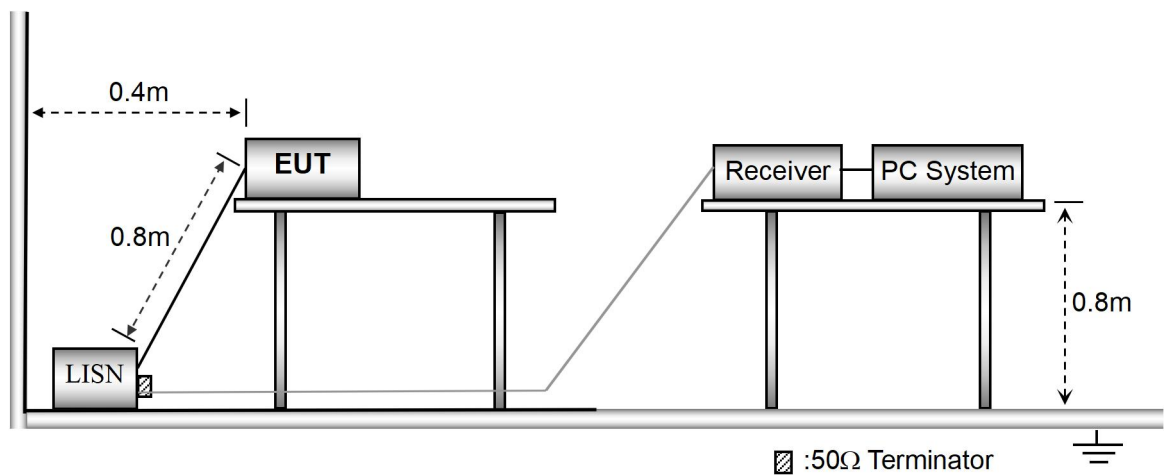
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

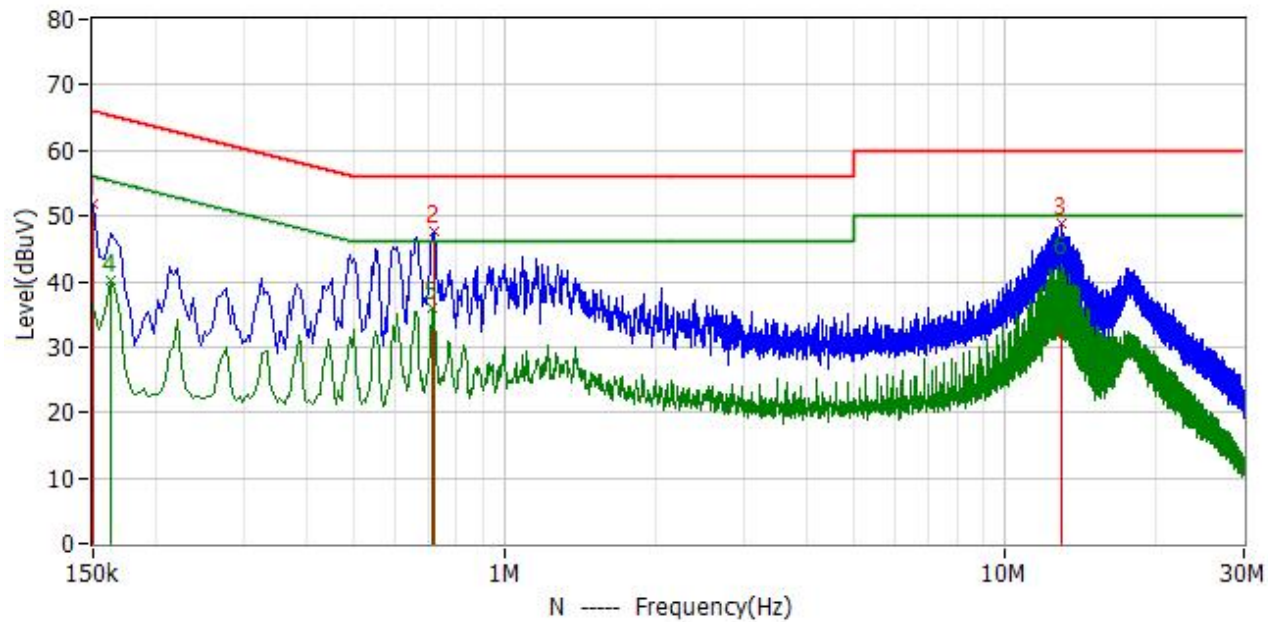

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1*	150.000kHz	42.0	9.7	51.7	66.0	-14.3	PK
2*	722.000kHz	37.8	9.7	47.5	56.0	-8.5	PK
3*	12.946MHz	39.0	9.8	48.8	60.0	-11.2	PK
4*	162.000kHz	30.4	9.7	40.1	55.4	-15.2	AV
5*	718.000kHz	26.3	9.7	36.0	46.0	-10.0	AV
6*	12.946MHz	32.9	9.8	42.7	50.0	-7.3	AV

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

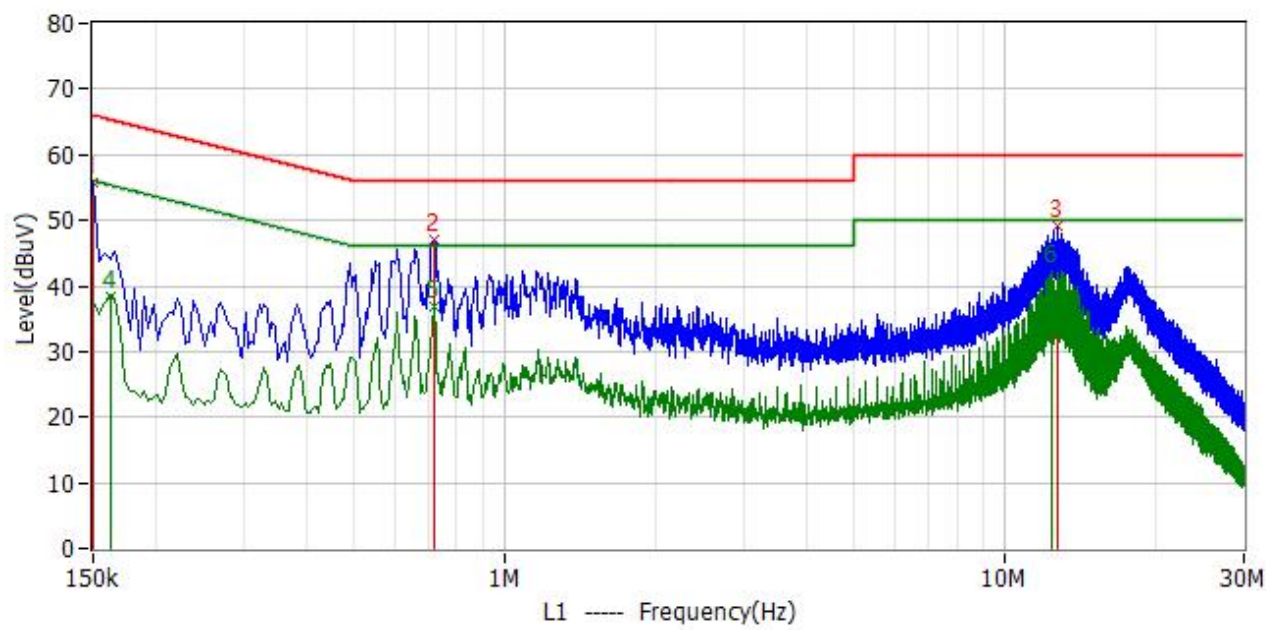

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1*	150.000kHz	45.9	9.9	55.8	66.0	-10.2	PK
2*	722.000kHz	37.2	9.8	47.0	56.0	-9.0	PK
3*	12.678MHz	39.2	9.8	49.0	60.0	-11.0	PK
4*	162.000kHz	28.6	9.9	38.5	55.4	-16.8	AV
5*	722.000kHz	27.2	9.8	37.0	46.0	-9.0	AV
6*	12.434MHz	32.4	9.8	42.2	50.0	-7.8	AV

APPENDIX SUMMARY

Project No.	WTH24X03067087W	Test Engineer	Timi Huang
Start date	2024/4/15	Finish date	2024/4/15
Temperature	24℃	Humidity	52%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	4.44	5.01	/	11
	5200	5.00	4.92	/	11
	5240	4.36	4.96	/	11
802.11n-HT20	5180	3.49	3.99	6.76	11
	5200	3.51	3.25	6.39	11
	5240	3.49	4.11	6.82	11
802.11n-HT40	5190	0.62	1.30	3.98	11
	5230	1.18	1.05	4.13	11
802.11ac-VHT20	5180	3.63	3.57	6.61	11
	5200	3.56	3.79	6.69	11
	5240	3.75	3.79	6.78	11
802.11ac-VHT40	5190	0.84	1.23	4.05	11
	5230	1.24	1.13	4.20	11
802.11ac-VHT80	5210	-1.74	-1.60	1.34	11




Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	ANT 0 dBm/500kHz*	ANT 1 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	0.34	-0.80	2.22	2.56	1.42	30
	5785	0.09	-0.72	2.22	2.31	1.50	30
	5825	0.08	-0.48	2.22	2.30	1.74	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22							

Power Spectral Density						
U-NII-3: 5725-5850MHz						
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz
802.11n-HT20	5745	-1.68	-1.39	2.22	3.70	30
	5785	-1.10	-1.49	2.22	3.94	30
	5825	-1.18	-1.54	2.22	3.87	30
802.11n-HT40	5755	-4.27	-3.96	2.22	1.12	30
	5795	-4.07	-3.62	2.22	1.39	30

802.11ac-VHT 20	5745	-1.70	-1.22	2.22	3.78	30
	5785	-1.11	-1.38	2.22	3.99	30
	5825	-1.01	-1.37	2.22	4.04	30
802.11ac-VHT 40	5755	-4.10	-3.77	2.22	1.30	30
	5795	-4.02	-4.29	2.22	1.08	30
802.11ac-VHT 80	5775	-7.21	-6.19	2.22	-1.44	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						

ANT 0
5150-5250MHz

802.11a-Low	Date: 15.APR.2024 15:10:20
802.11a-Middle	Date: 15.APR.2024 15:11:31
802.11a-High	Date: 15.APR.2024 15:11:58

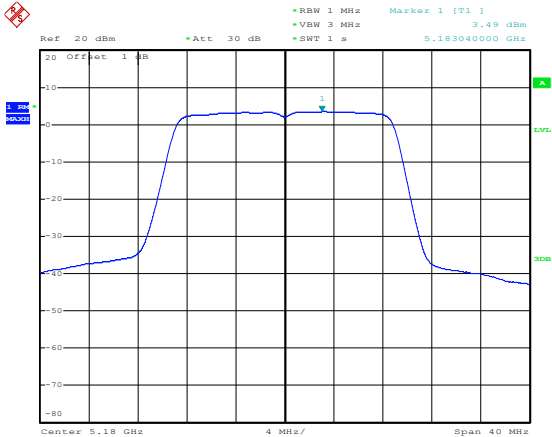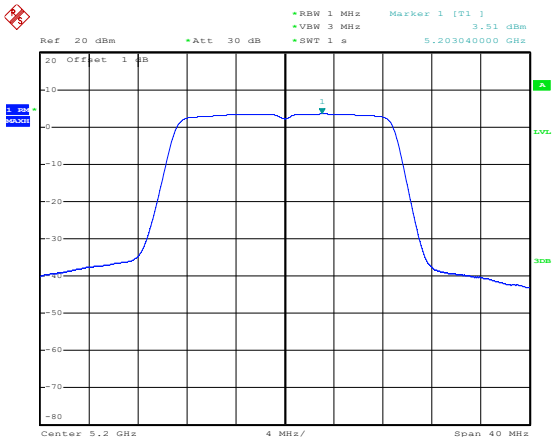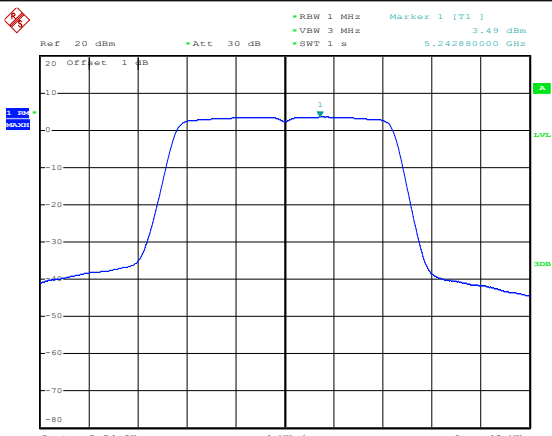802.11n-HT20-Low	 Date: 15.APR.2024 15:13:03
802.11n-HT20-Middle	 Date: 15.APR.2024 15:12:45
802.11n-HT20-High	 Date: 15.APR.2024 15:12:23

802.11n-HT40-Low

Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 0.62 dBm, 5.193840000 GHz

Center: 5.19 GHz, Span: 80 MHz

802.11n-HT40-High

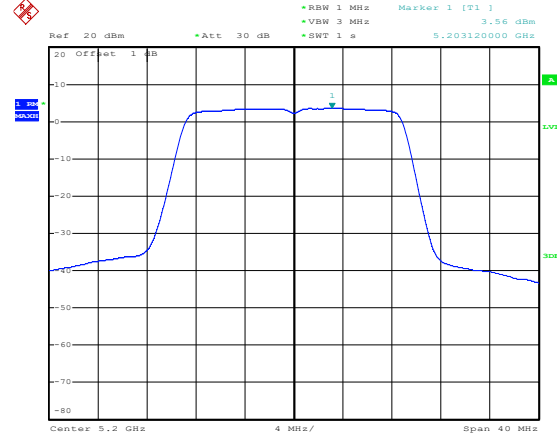
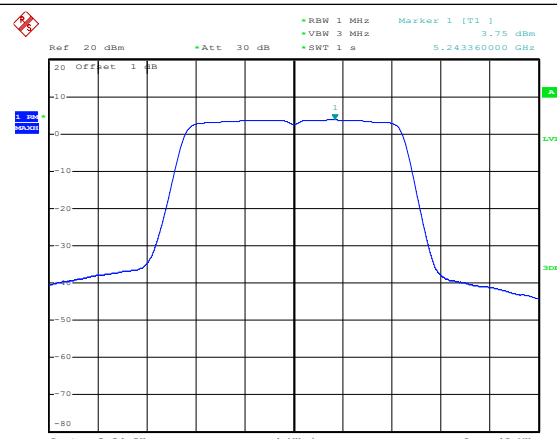
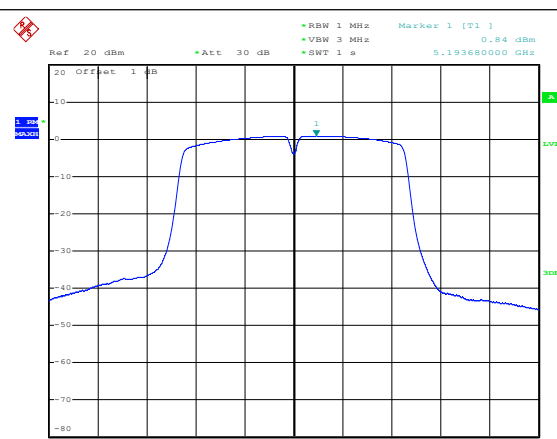
Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 1.18 dBm, 5.232000000 GHz

Center: 5.23 GHz, Span: 80 MHz


802.11ac-VHT20-Low

Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 3.63 dBm, 5.183120000 GHz


Center: 5.18 GHz, Span: 40 MHz

802.11ac-VHT20-Middle	 Date: 15.APR.2024 15:13:56
802.11ac-VHT20-High	 Date: 15.APR.2024 15:14:52
802.11ac-VHT40-Low	 Date: 15.APR.2024 15:16:43



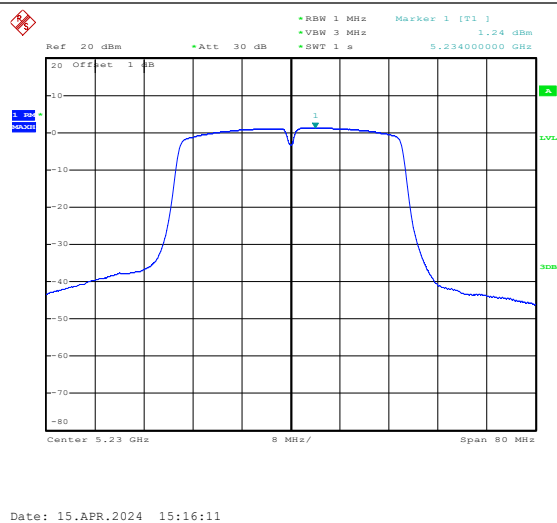
802.11ac-VHT40-High








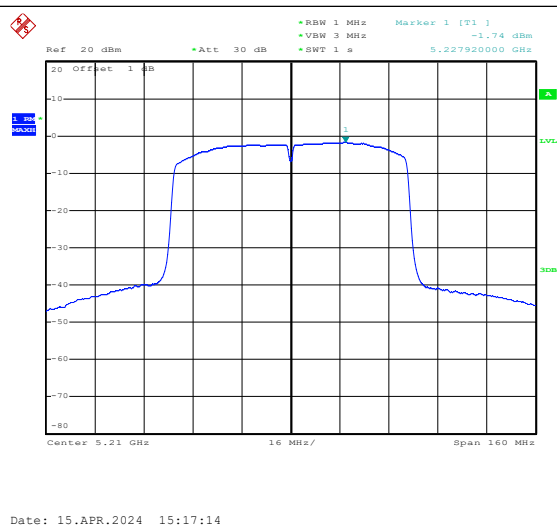
802.11ac-VHT80






5725-5850MHz

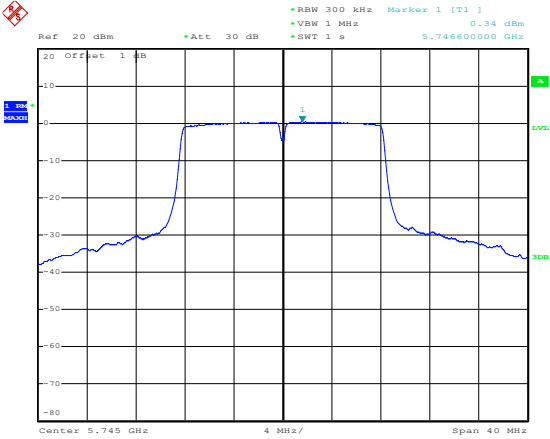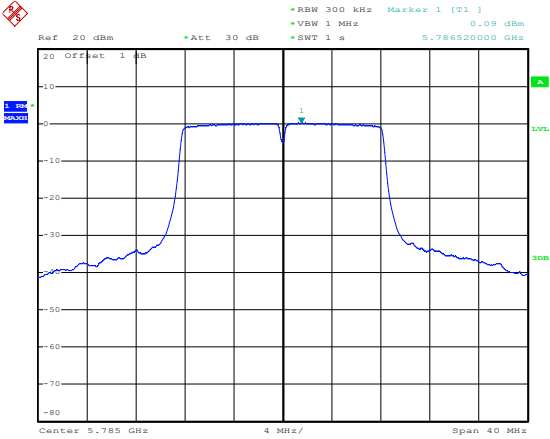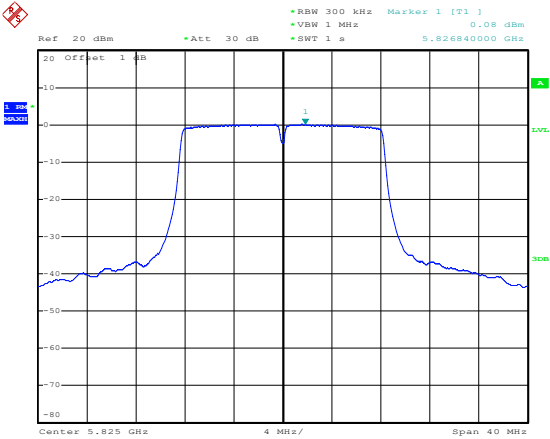
802.11a-Low	 Date: 15.APR.2024 16:01:26
802.11a-Middle	 Date: 15.APR.2024 16:02:01
802.11a-High	 Date: 15.APR.2024 16:02:46

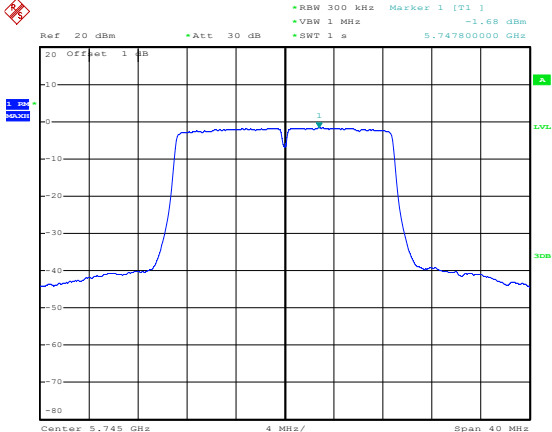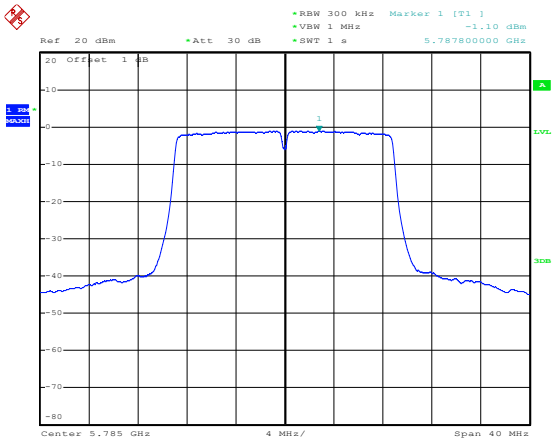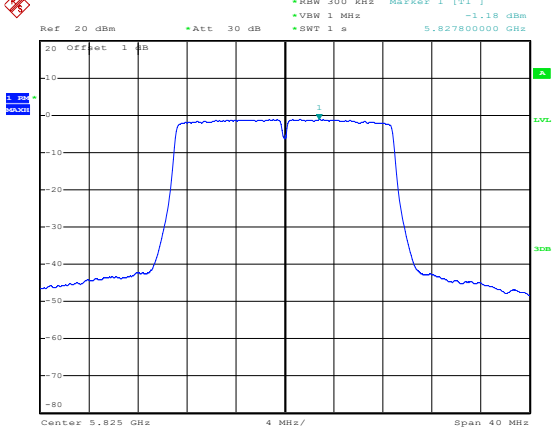Channel	Plot	Date
802.11n-HT20-Low		15.APR.2024 16:04:25
802.11n-HT20-Middle		15.APR.2024 16:04:04
802.11n-HT20-High		15.APR.2024 16:03:12

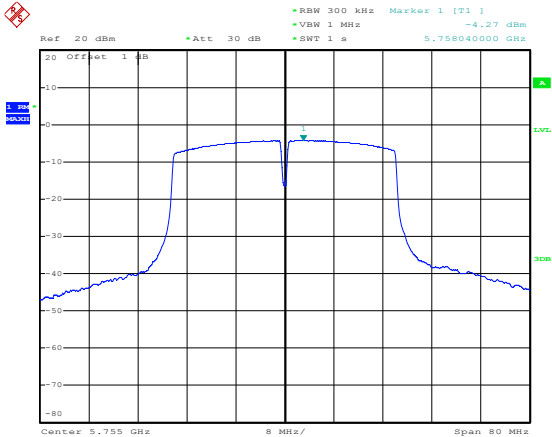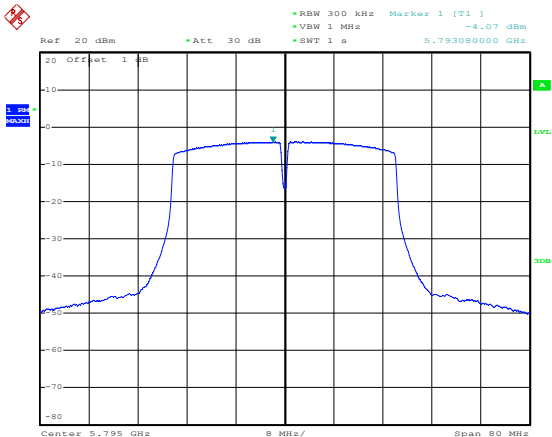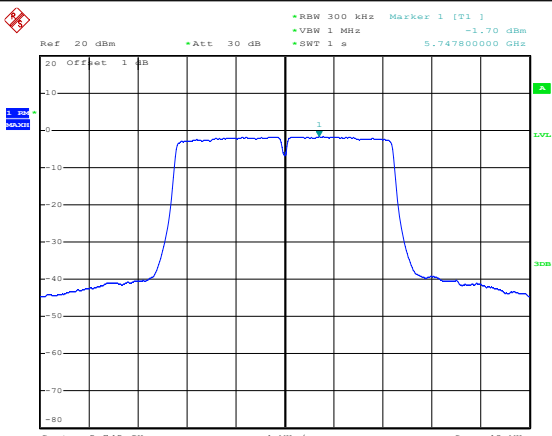
802.11n-HT40-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -4.27 dBm *VBW: 1 MHz *SWT: 1 s 5.755040000 GHz Center: 5.755 GHz 8 MHz/ Span: 80 MHz Date: 15.APR.2024 16:05:58
802.11n-HT40-High	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -4.07 dBm *VBW: 1 MHz *SWT: 1 s 5.793080000 GHz Center: 5.795 GHz 8 MHz/ Span: 80 MHz Date: 15.APR.2024 16:06:18
802.11ac-VHT20-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -1.70 dBm *VBW: 1 MHz *SWT: 1 s 5.747800000 GHz Center: 5.745 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 16:04:49

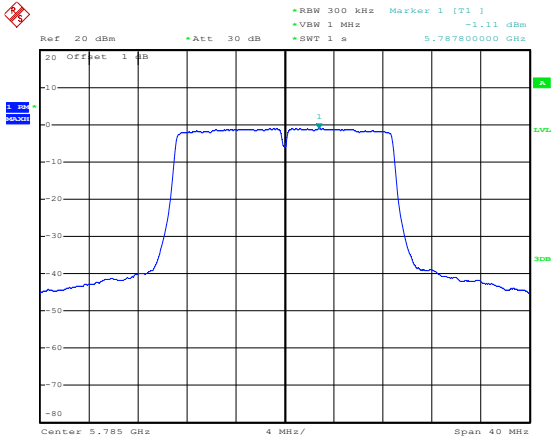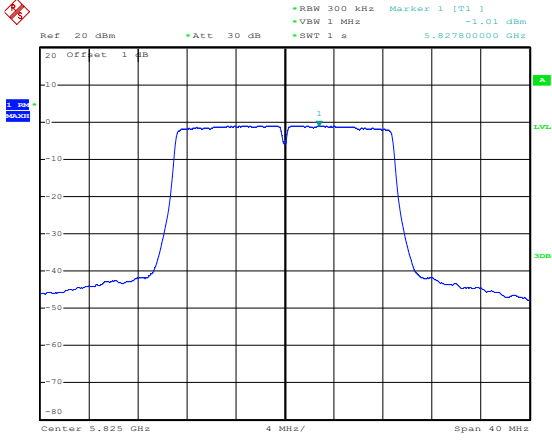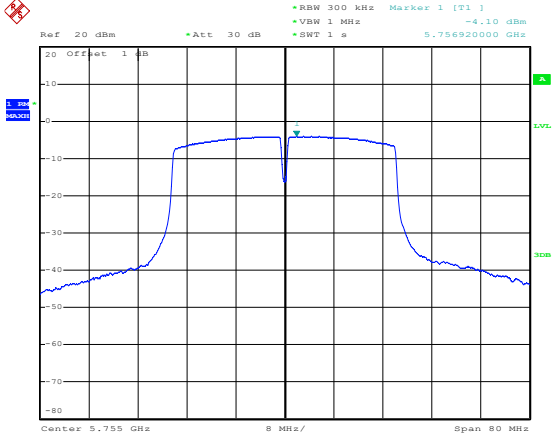802.11ac-VHT20-Middle	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -1.11 dBm *VSW: 1 MHz *SWT: 1 s 5.787800000 GHz Center: 5.785 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 16:05:06
802.11ac-VHT20-High	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -1.01 dBm *VSW: 1 MHz *SWT: 1 s 5.827800000 GHz Center: 5.825 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 16:05:26
802.11ac-VHT40-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -4.10 dBm *VSW: 1 MHz *SWT: 1 s 5.756920000 GHz Center: 5.755 GHz 8 MHz/ Span: 80 MHz Date: 15.APR.2024 16:06:56



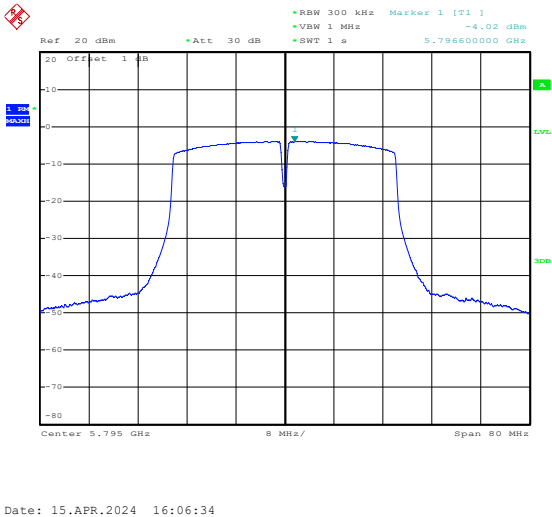
802.11ac-VHT40-High








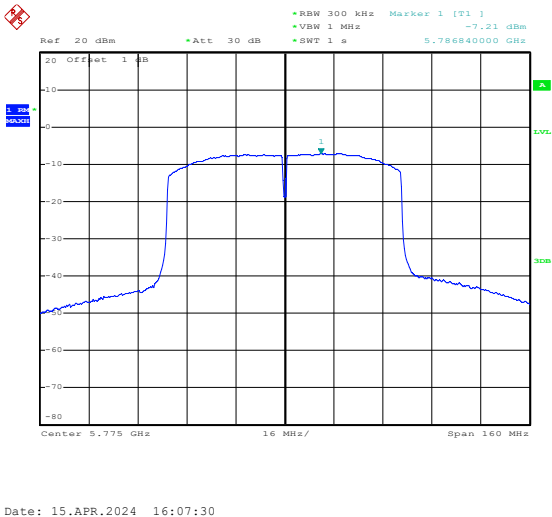
802.11ac-VHT80



ANT 1
5150-5250MHz

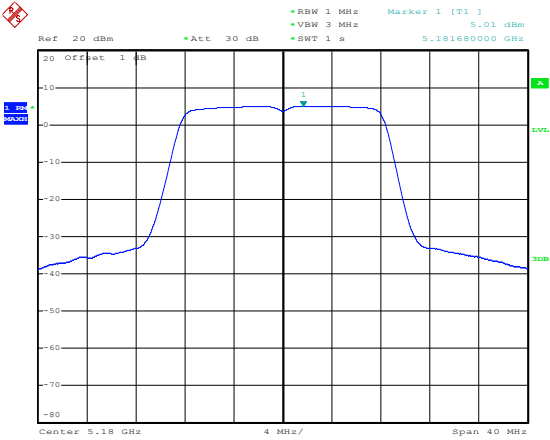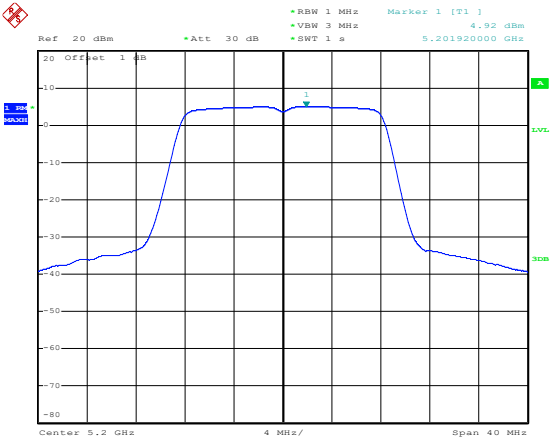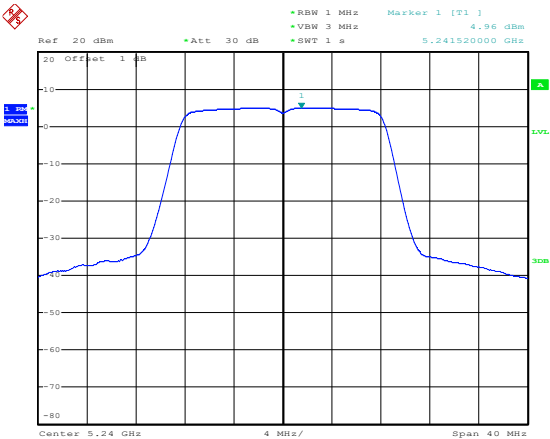
802.11a-Low	 Date: 15.APR.2024 11:35:14
802.11a-Middle	 Date: 15.APR.2024 11:35:37
802.11a-High	 Date: 15.APR.2024 11:35:55

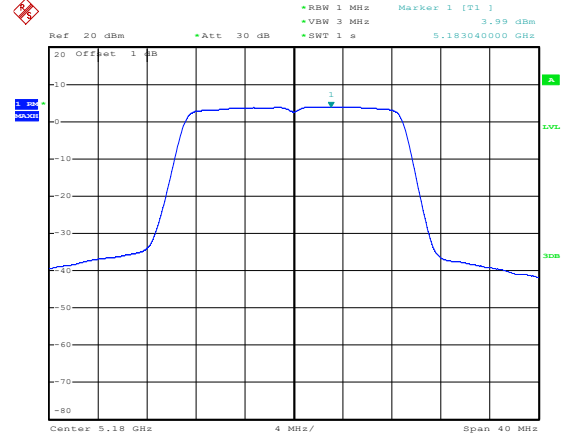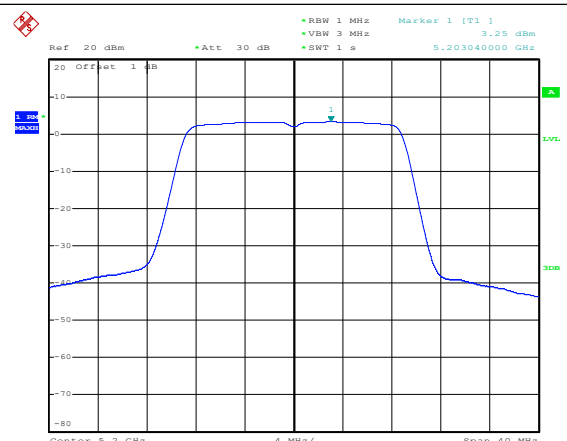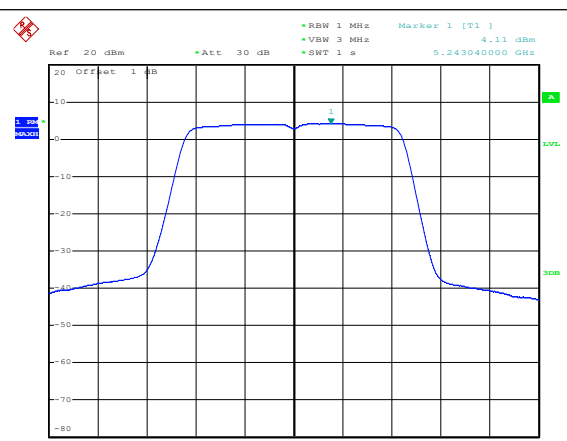802.11n-HT20-Low	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 1 s Marker 1 [T1]: 3.99 dBm 5.183040000 GHz Center: 5.18 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 11:36:50
802.11n-HT20-Middle	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 1 s Marker 1 [T1]: 3.25 dBm 5.203040000 GHz Center: 5.2 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 11:36:32
802.11n-HT20-High	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 1 s Marker 1 [T1]: 4.11 dBm 5.243040000 GHz Center: 5.24 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 11:36:14

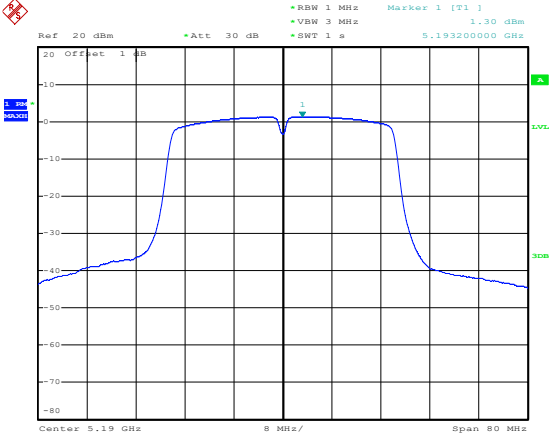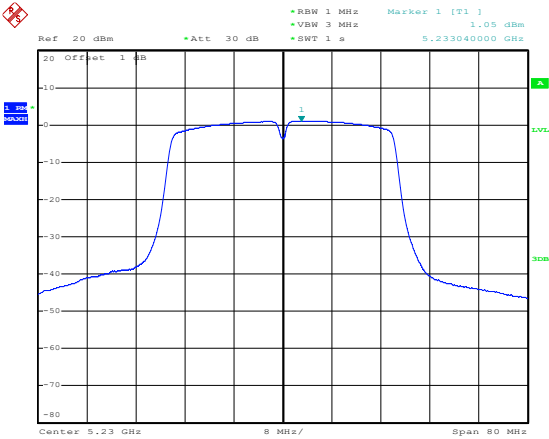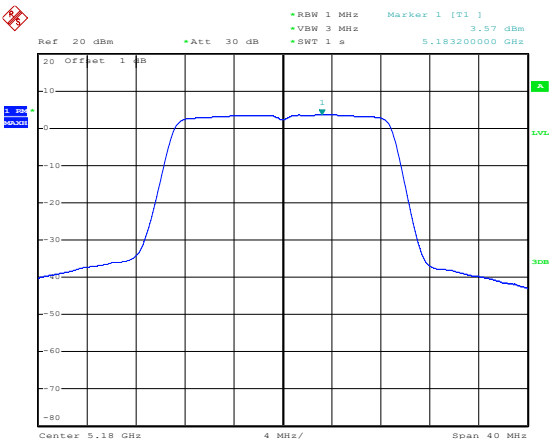
802.11n-HT40-Low	 Date: 15.APR.2024 11:38:17
802.11n-HT40-High	 Date: 15.APR.2024 11:38:36
802.11ac-VHT20-Low	 Date: 15.APR.2024 11:37:07

802.11ac-VHT20-Middle	Date: 15.APR.2024 11:37:29
802.11ac-VHT20-High	Date: 15.APR.2024 11:37:48
802.11ac-VHT40-Low	Date: 15.APR.2024 11:39:10



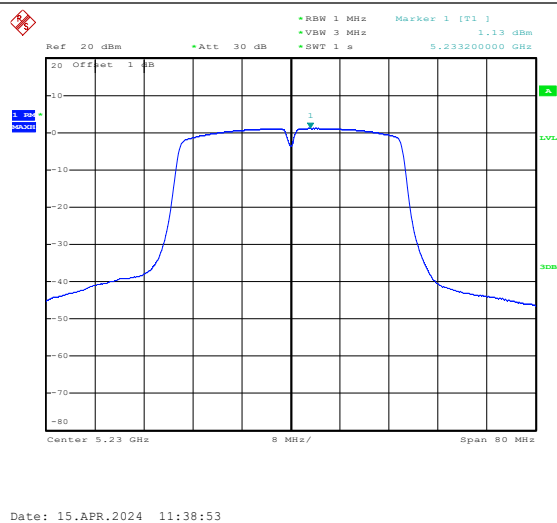
802.11ac-VHT40-High








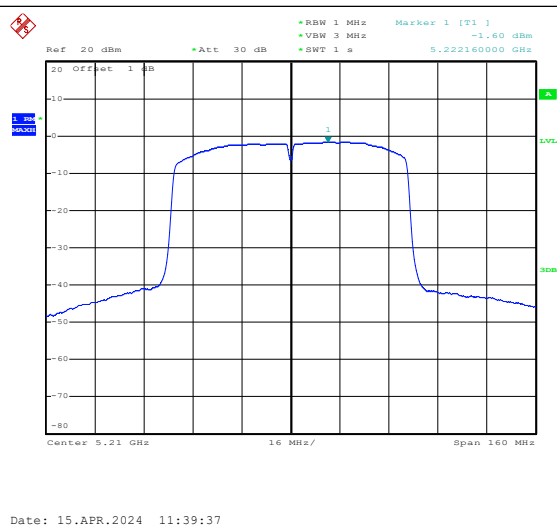
802.11ac-VHT80






5725-5850MHz

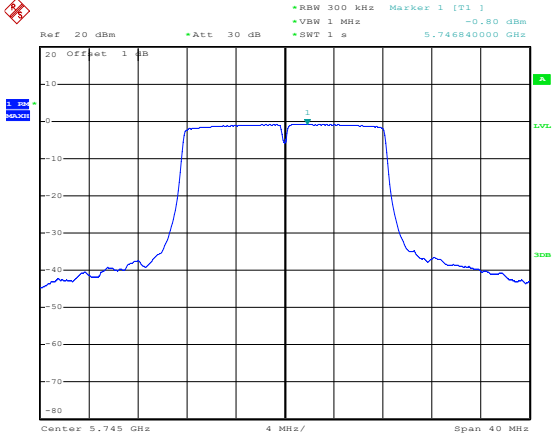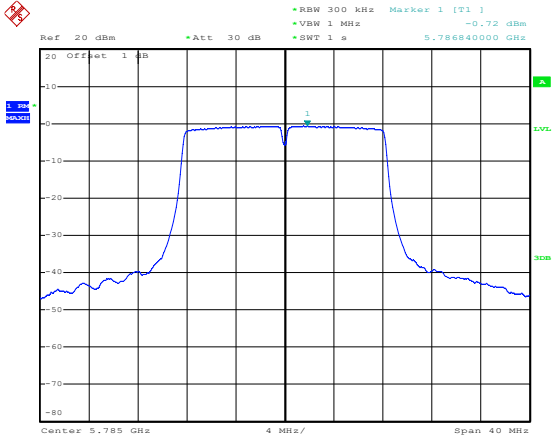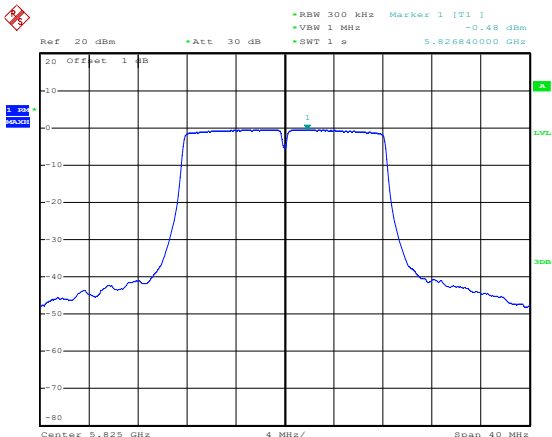
802.11a-Low	 Date: 15.APR.2024 14:02:34
802.11a-Middle	 Date: 15.APR.2024 14:04:03
802.11a-High	 Date: 15.APR.2024 14:04:35

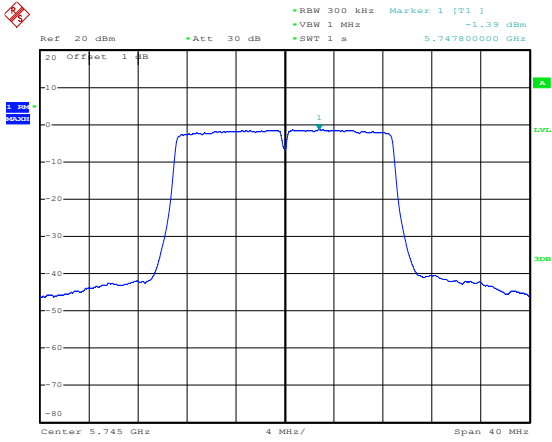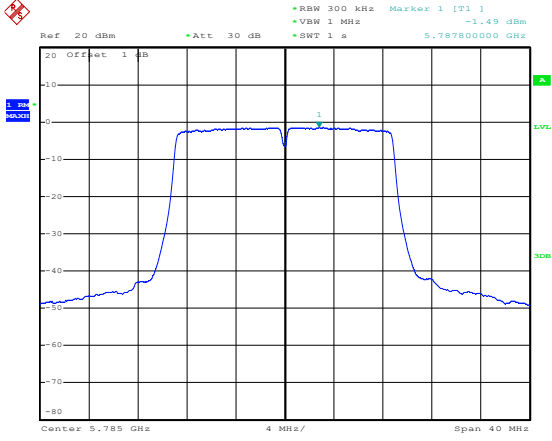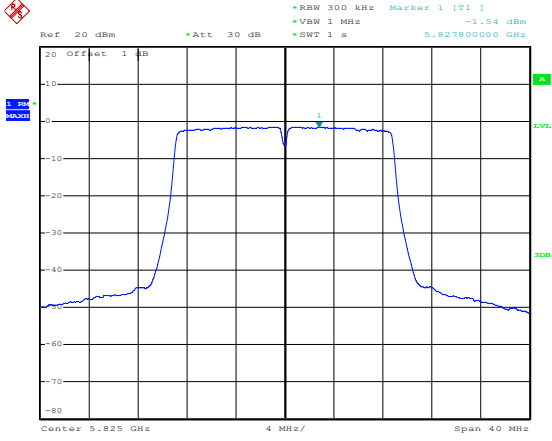802.11n-HT20-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -1.39 dBm *VSW: 1 MHz *SWT: 1 s 5.747800000 GHz Center: 5.745 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 14:07:10
802.11n-HT20-Middle	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -1.49 dBm *VSW: 1 MHz *SWT: 1 s 5.787800000 GHz Center: 5.785 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 14:06:27
802.11n-HT20-High	 Ref: 20 dBm *Att: 30 dB *RBW: 300 kHz Marker 1 [T1] -1.54 dBm *VSW: 1 MHz *SWT: 1 s 5.827800000 GHz Center: 5.825 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 14:05:19

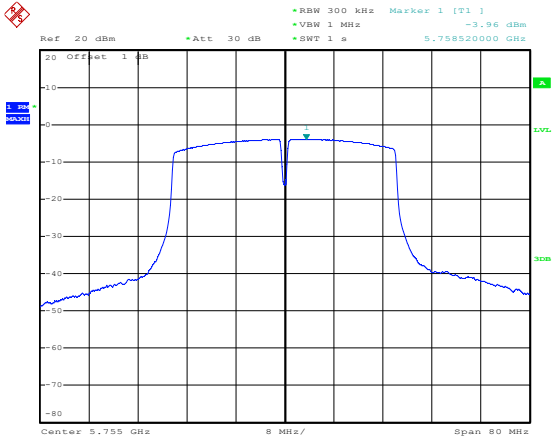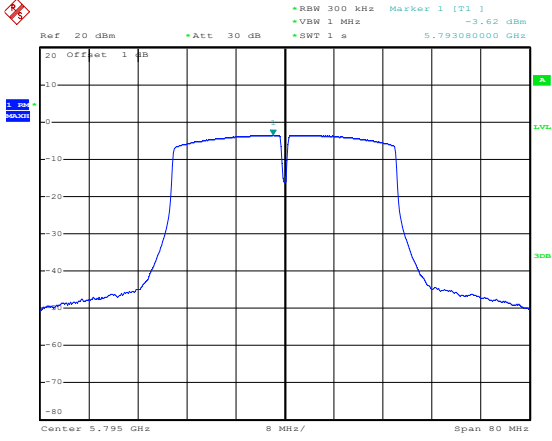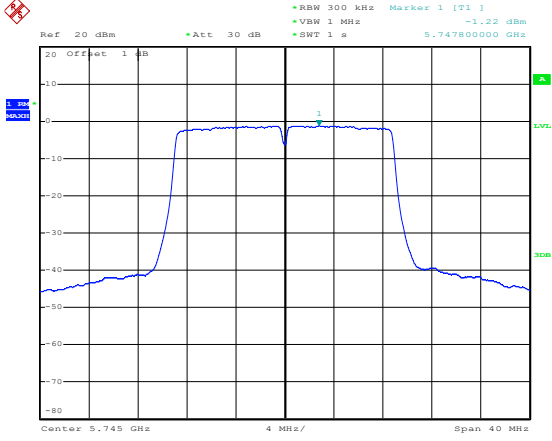
802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.96 dBm *VBW 1 MHz *SWT 1 s 5.75520000 GHz 20 Offset 1 dB Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 14:09:43
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.62 dBm *VBW 1 MHz *SWT 1 s 5.793080000 GHz 20 Offset 1 dB Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 14:10:06
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -1.22 dBm *VBW 1 MHz *SWT 1 s 5.747800000 GHz 20 Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:07:42

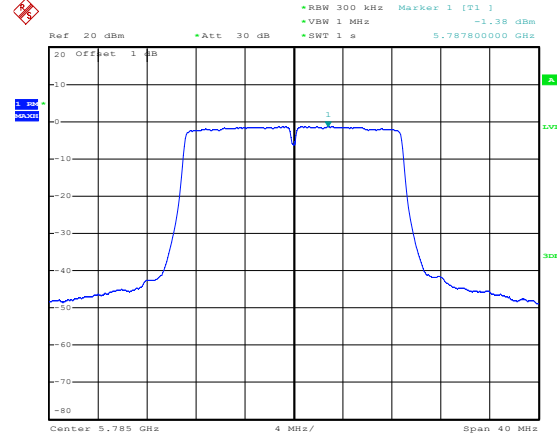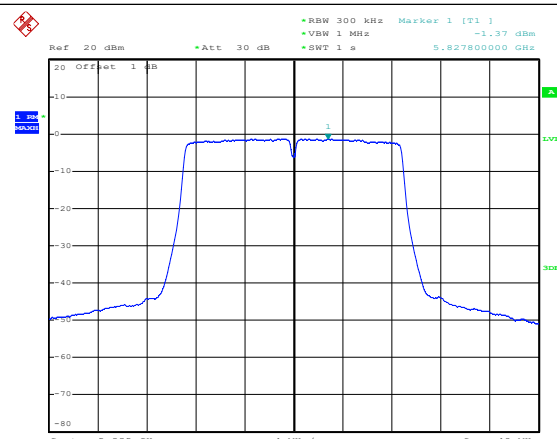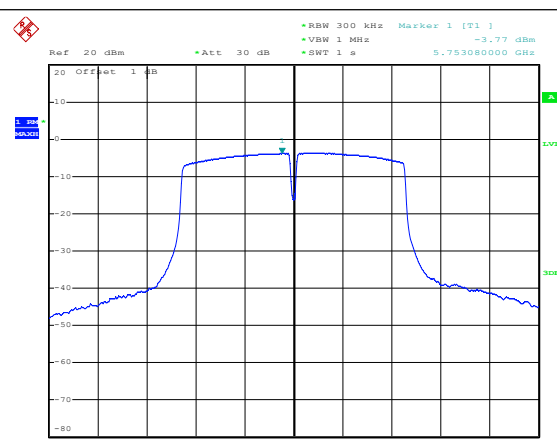802.11ac-VHT20-Middle	 Ref: 20 dBm Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 1 s Marker 1 [T1] -1.38 dBm 5.787800000 GHz Center: 5.785 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 14:08:21
802.11ac-VHT20-High	 Ref: 20 dBm Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 1 s Marker 1 [T1] -1.37 dBm 5.827800000 GHz Center: 5.825 GHz 4 MHz/ Span: 40 MHz Date: 15.APR.2024 14:08:54
802.11ac-VHT40-Low	 Ref: 20 dBm Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 1 s Marker 1 [T1] -3.77 dBm 5.793800000 GHz Center: 5.795 GHz 8 MHz/ Span: 80 MHz Date: 15.APR.2024 14:10:59

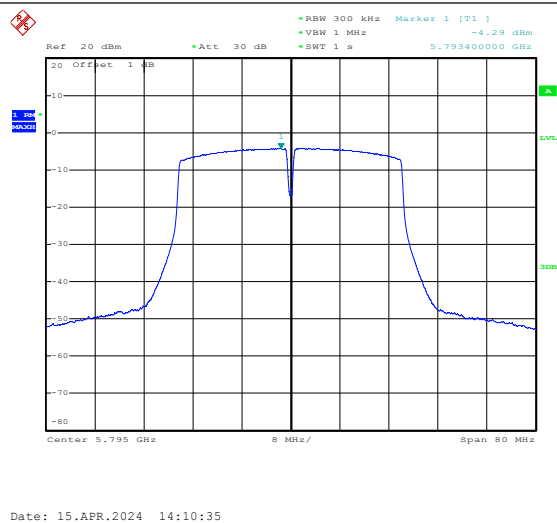802.11ac-VHT40-High



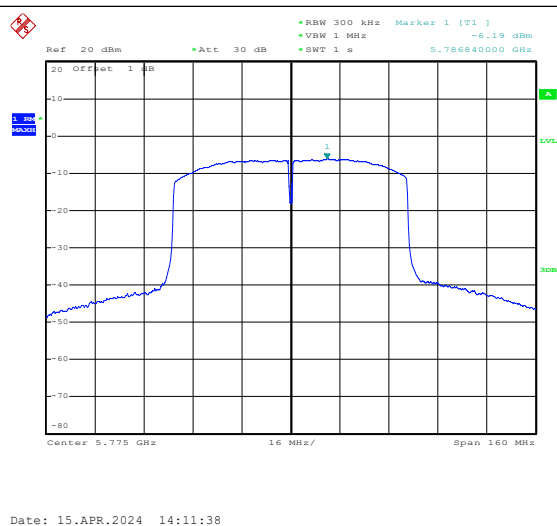802.11ac-VHT80



APPENDIX B




Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	18.88	16.56	18.88	16.56	Pass
	5200	18.88	16.64	18.88	16.56	Pass
	5240	18.88	16.48	18.88	16.48	Pass
802.11n-HT20	5180	19.84	17.68	19.92	17.60	Pass
	5200	19.92	17.68	19.92	17.68	Pass
	5240	19.76	17.60	19.76	17.60	Pass
802.11n-HT40	5190	40.80	36.64	40.80	36.64	Pass
	5230	40.80	36.64	40.80	36.48	Pass
802.11ac-VHT20	5180	19.84	17.68	19.76	17.60	Pass
	5200	19.84	17.68	19.92	17.68	Pass
	5240	19.76	17.60	19.76	17.60	Pass
802.11ac-VHT40	5190	40.80	36.64	40.40	36.64	Pass
	5230	40.80	36.64	40.60	36.48	Pass
802.11ac-VHT80	5210	82.00	74.88	82.00	74.88	Pass

U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	16.72	16.80	16.64	16.64	≥500
	5785	16.72	16.64	16.64	16.56	≥500
	5825	16.64	16.56	16.64	16.56	≥500
802.11n-HT20	5745	17.76	17.68	17.76	17.68	≥500
	5785	17.84	17.68	17.84	17.60	≥500
	5825	17.76	17.60	17.76	17.60	≥500
802.11n-HT40	5755	36.80	36.80	36.80	36.64	≥500
	5795	36.80	36.64	36.80	36.64	≥500
802.11ac-VHT20	5745	17.76	17.68	17.76	17.68	≥500
	5785	17.84	17.68	17.84	17.60	≥500

Reference No.: WTH24X03067087W001

	5825	17.84	17.60	17.84	17.60	≥500
802.11ac-VHT40	5755	36.80	36.80	36.80	36.64	≥500
	5795	36.80	36.64	36.80	36.48	≥500
802.11ac-VHT80	5775	76.48	75.20	76.48	74.88	≥500




[illegible]


[illegible]

[illegible]



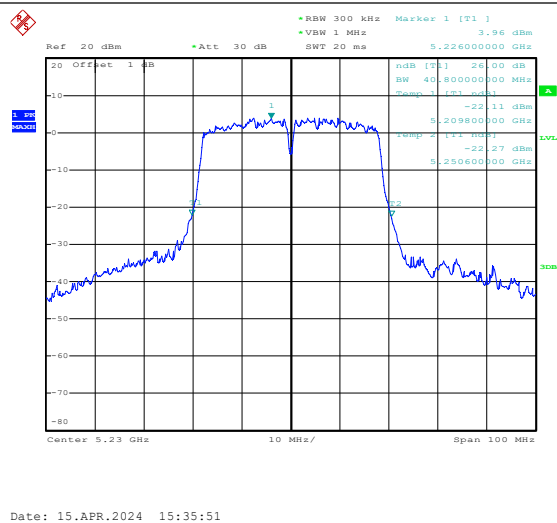
802.11ac-VHT40-High








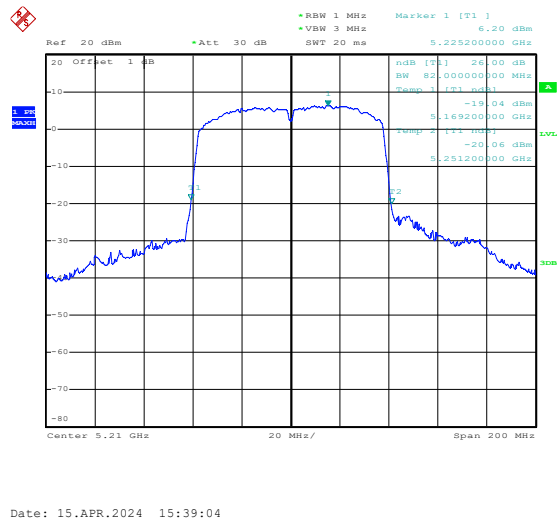
802.11ac-VHT80






6 dB BandwidthMHz
5725-5850MHz

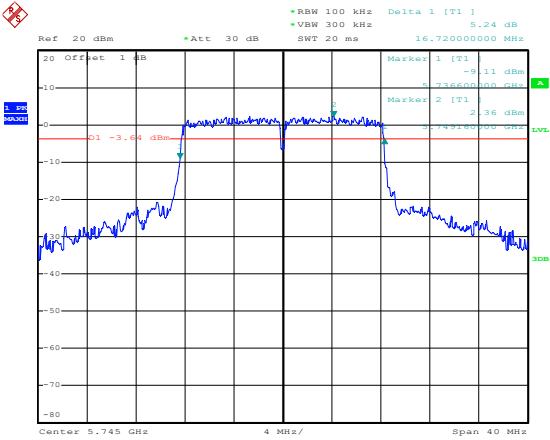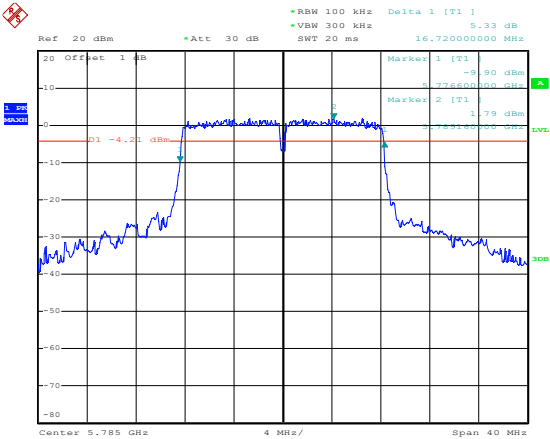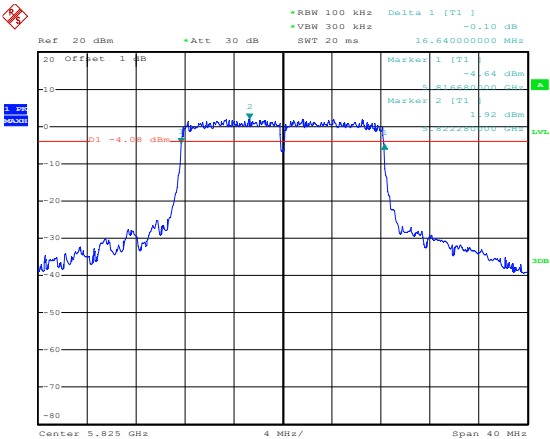
802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 5.24 dB VBW 300 kHz SWT 20 ms 16.720000000 MHz Marker 1 [T1] -9.11 dBm Marker 2 [T1] 2.36 dBm D1 -3.64 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:19:40
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 5.33 dB VBW 300 kHz SWT 20 ms 16.720000000 MHz Marker 1 [T1] -9.90 dBm Marker 2 [T1] 1.79 dBm D1 -4.25 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:20:31
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] -0.10 dB VBW 300 kHz SWT 20 ms 16.640000000 MHz Marker 1 [T1] -4.64 dBm Marker 2 [T1] 1.92 dBm D1 -4.08 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:21:20

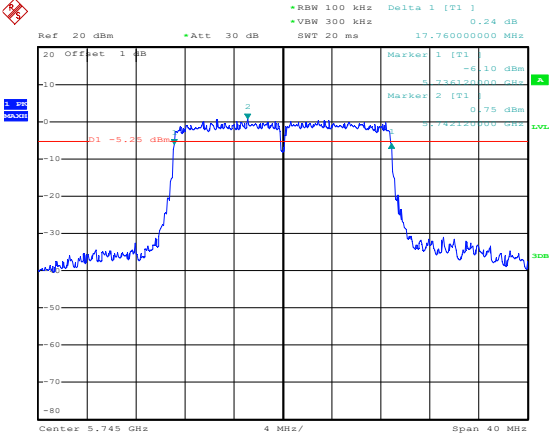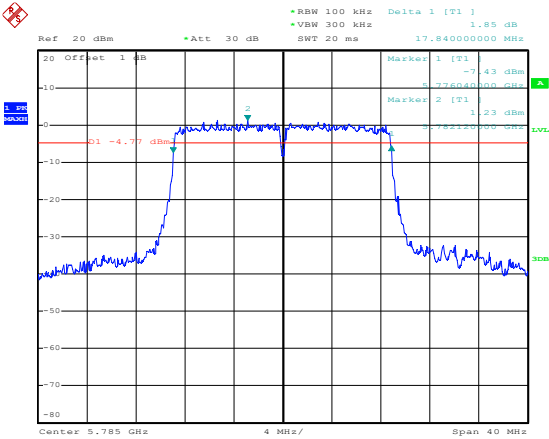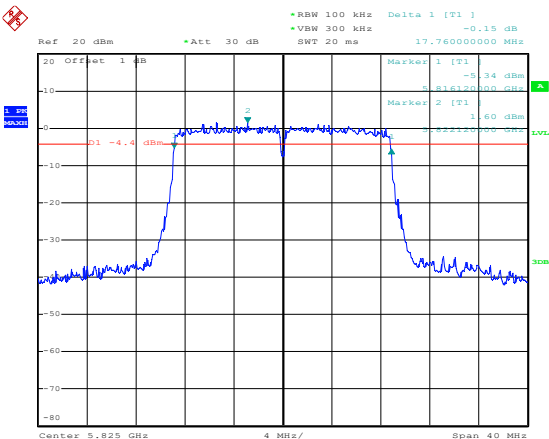802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.76000000 MHz Marker 1 [T1] -6.10 dBm 5.74520000 GHz Marker 2 [T1] 0.75 dBm 5.74520000 GHz D1 -5.25 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:24:35
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.84000000 MHz Marker 1 [T1] -7.43 dBm 5.78520000 GHz Marker 2 [T1] 1.23 dBm 5.78520000 GHz D1 -4.77 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:23:53
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.86000000 MHz Marker 1 [T1] -5.34 dBm 5.82520000 GHz Marker 2 [T1] 1.60 dBm 5.82520000 GHz D1 -4.4 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:23:11

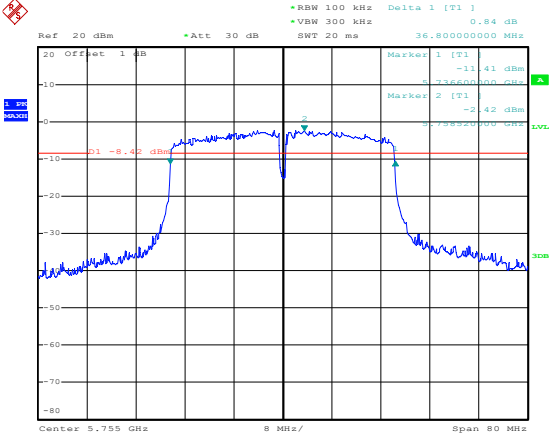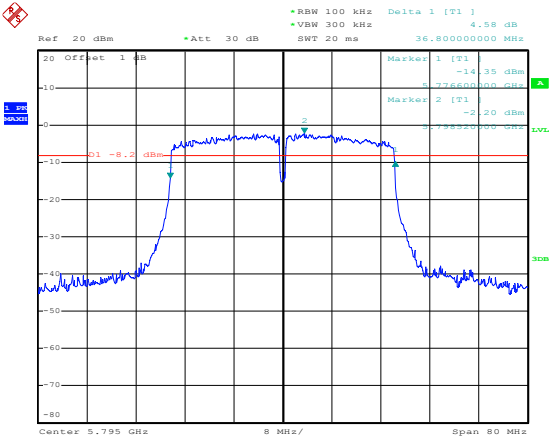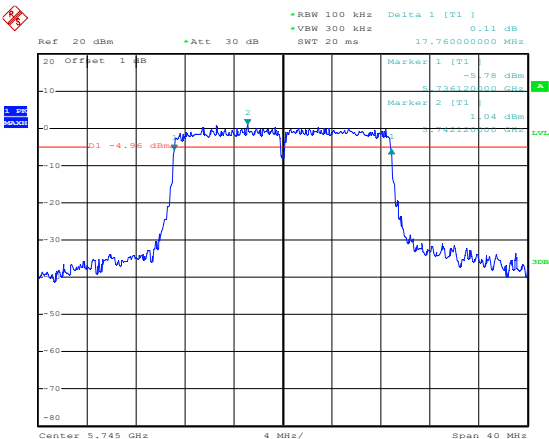
802.11n-HT40-Low	 Date: 15.APR.2024 16:28:11
802.11n-HT40-High	 Date: 15.APR.2024 16:29:07
802.11ac-VHT20-Low	 Date: 15.APR.2024 16:25:22

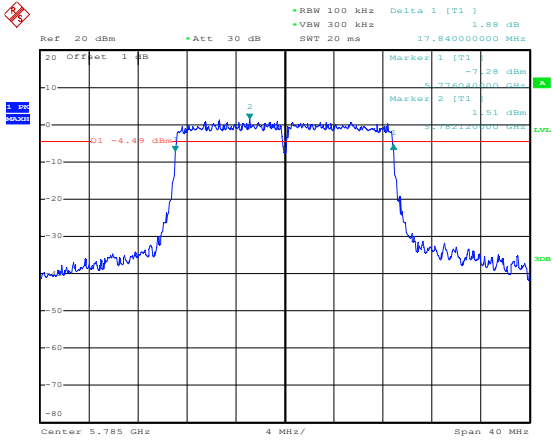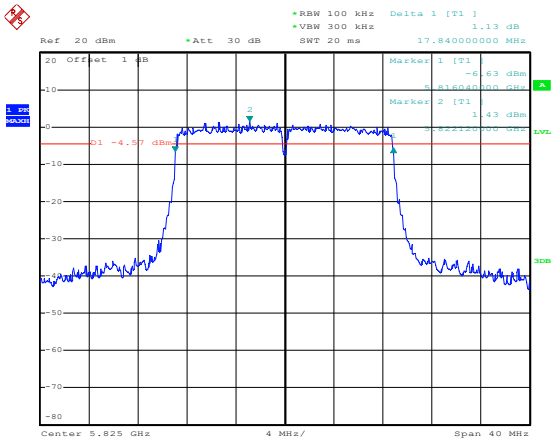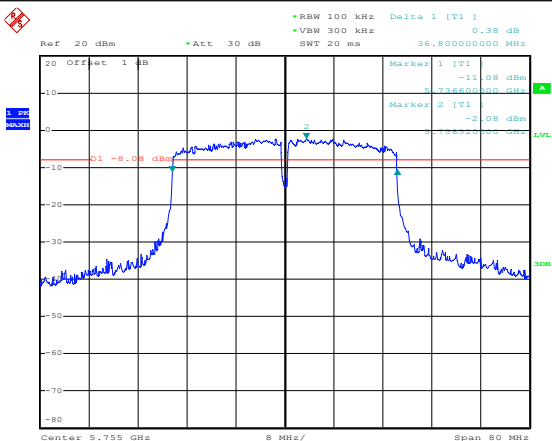802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.88 dB VSW 300 kHz SWT 20 ms 17.84000000 MHz Marker 1 [T1] -7.28 dBm 5.78500000 GHz Marker 2 [T1] 1.51 dBm 5.78500000 GHz D1 -4.49 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:26:02
802.11ac-VHT20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.13 dB VSW 300 kHz SWT 20 ms 17.84000000 MHz Marker 1 [T1] -6.63 dBm 5.82500000 GHz Marker 2 [T1] 1.43 dBm 5.82500000 GHz D1 -4.57 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:27:07
802.11ac-VHT40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.38 dB VSW 300 kHz SWT 20 ms 36.80000000 MHz Marker 1 [T1] -11.08 dBm 5.75500000 GHz Marker 2 [T1] -2.08 dBm 5.75500000 GHz D1 -6.08 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 16:30:57

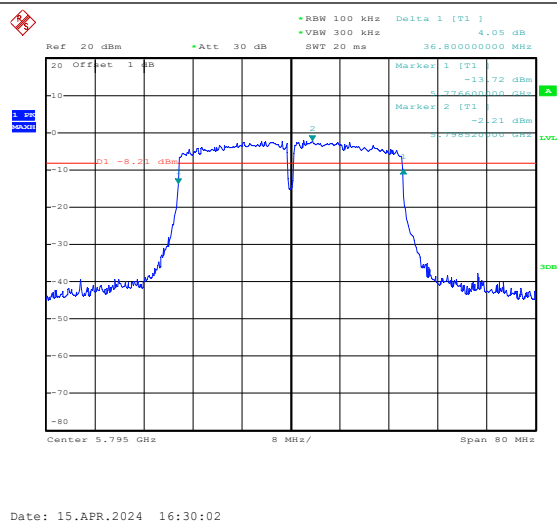802.11ac-VHT40-High




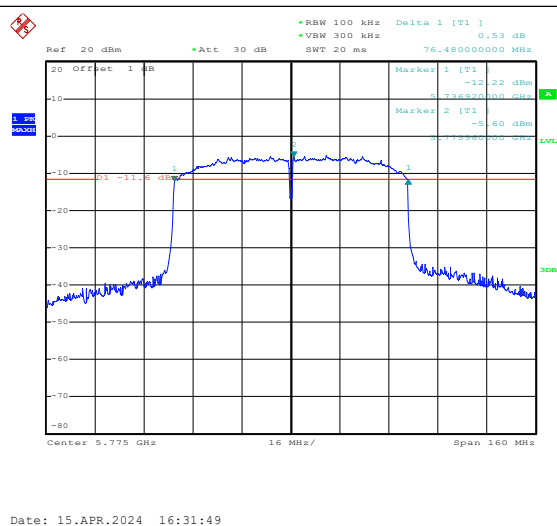
802.11ac-VHT80





ANT 1

26 dB BandwidthMHz

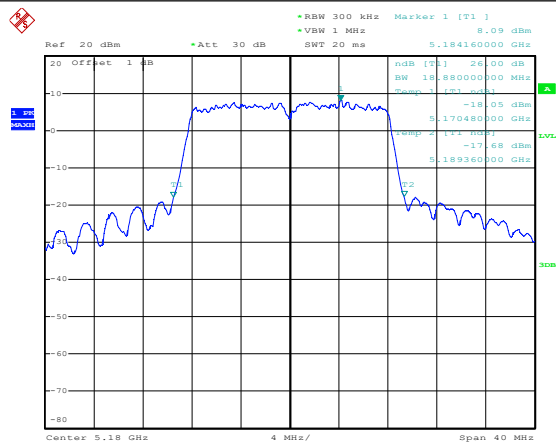

5150-5250MHz



Date: 15.APR.2024 11:49:41


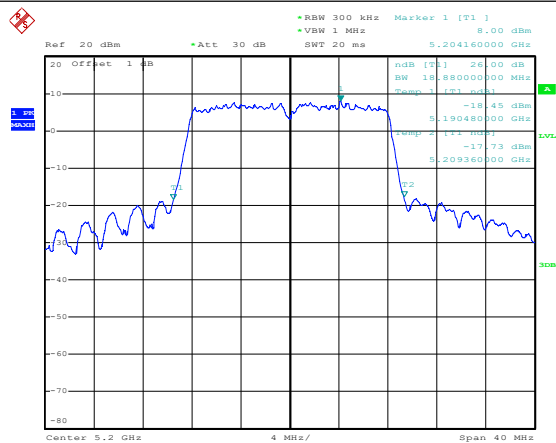



Date: 15.APR.2024 11:50:04

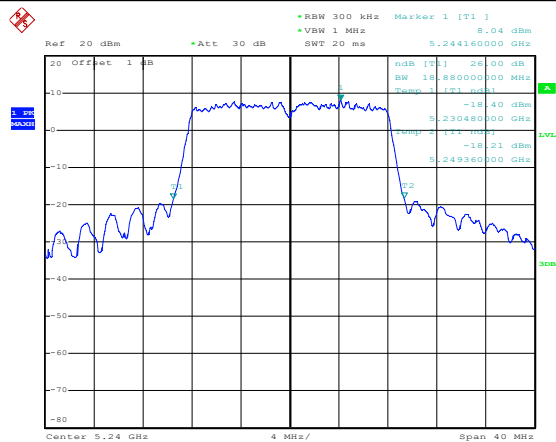

Date: 15.APR.2024 11:50:25

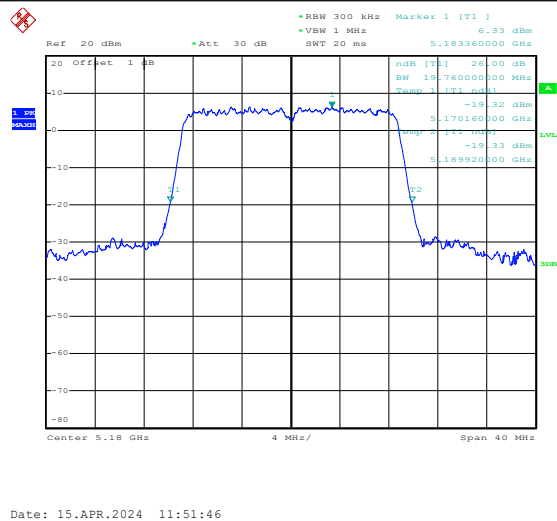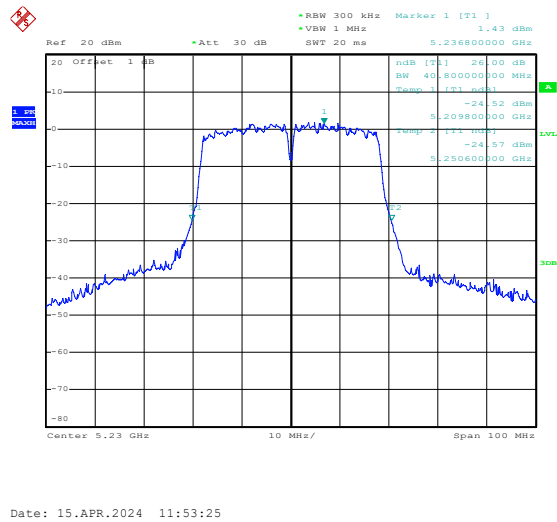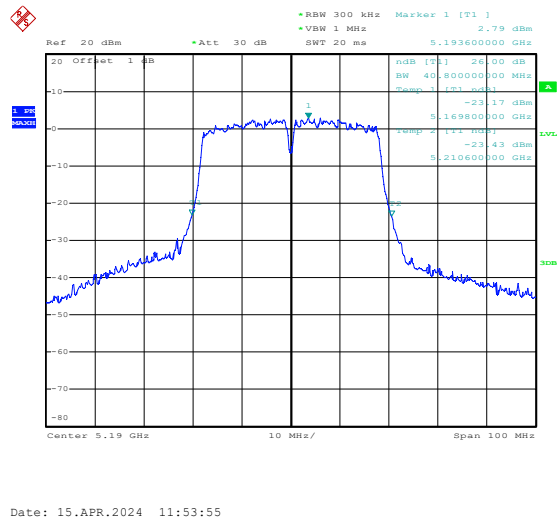
[illegible]




[illegible]

[illegible]

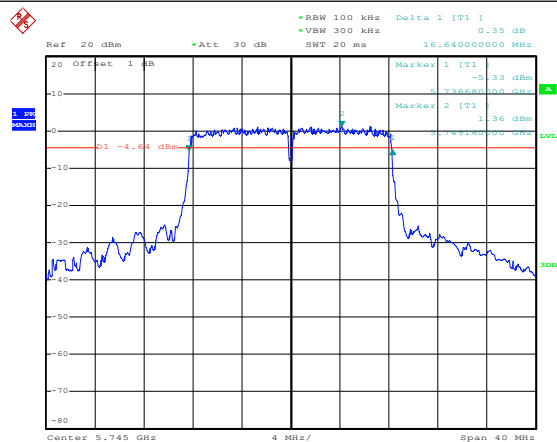
6 dB BandwidthMHz
5725-5850MHz






Date: 15.APR.2024 14:34:56



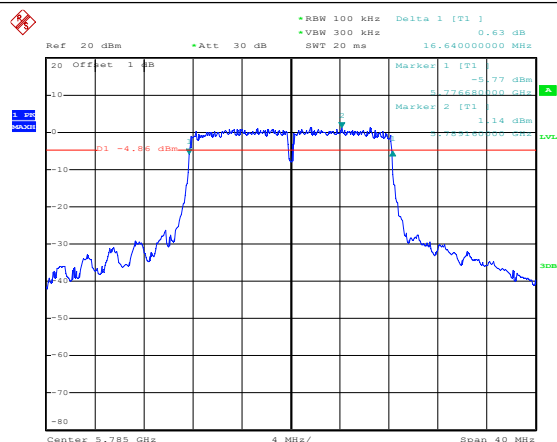





Date: 15.APR.2024 14:36:22

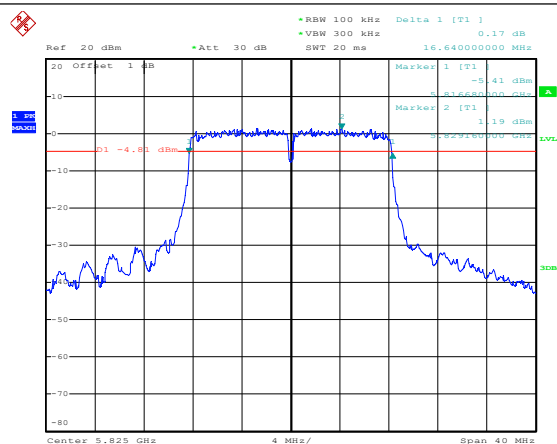


Date: 15.APR.2024 14:37:22

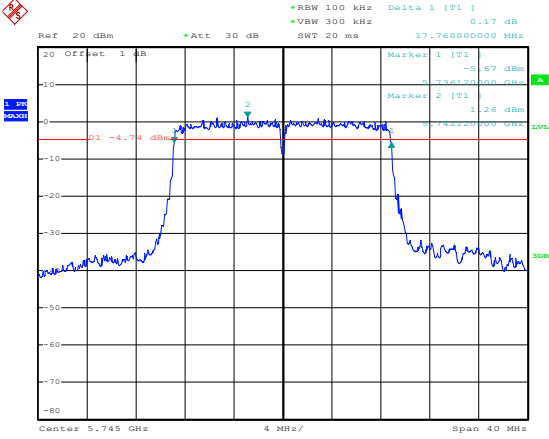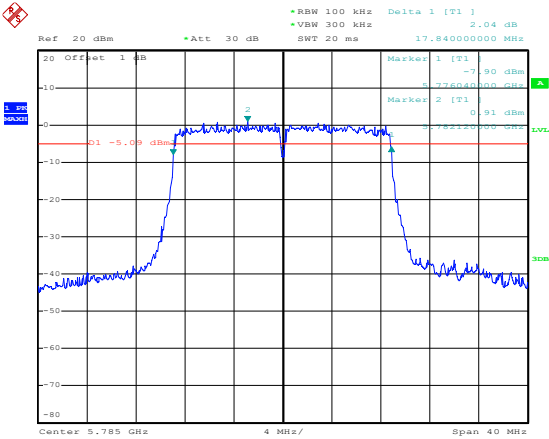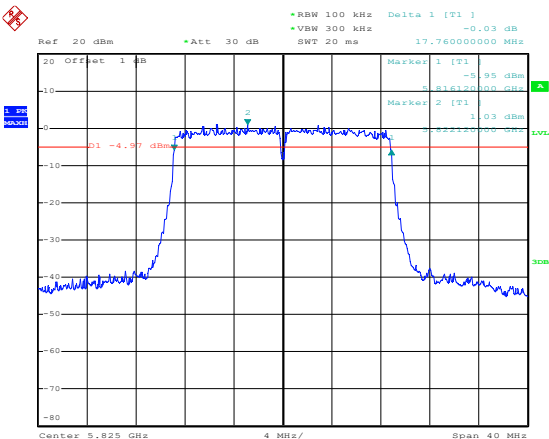802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.76000000 MHz Marker 1 [T1] -5.67 dBm Marker 2 [T1] 1.26 dBm D1 -4.74 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:41:44
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.84000000 MHz Marker 1 [T1] -7.90 dBm Marker 2 [T1] 0.91 dBm D1 -5.09 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:40:02
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.76000000 MHz Marker 1 [T1] -5.95 dBm Marker 2 [T1] 1.03 dBm D1 -4.97 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:39:11

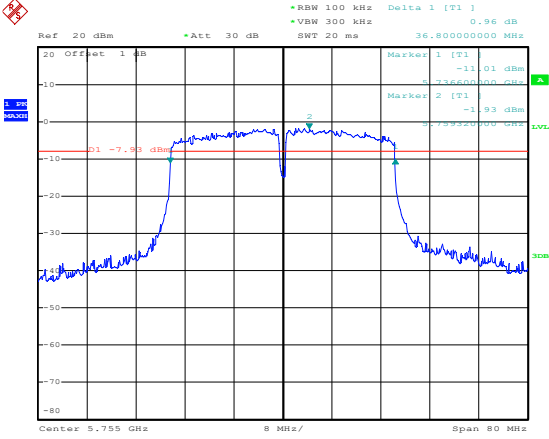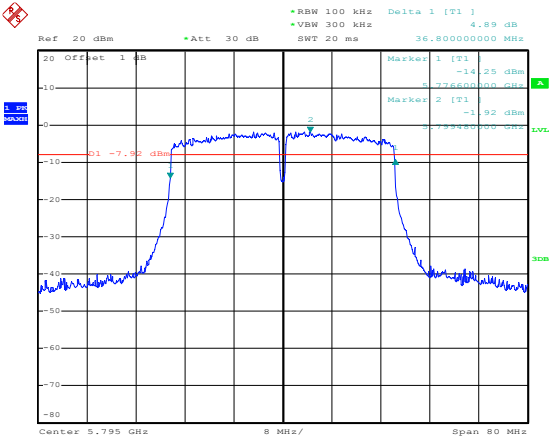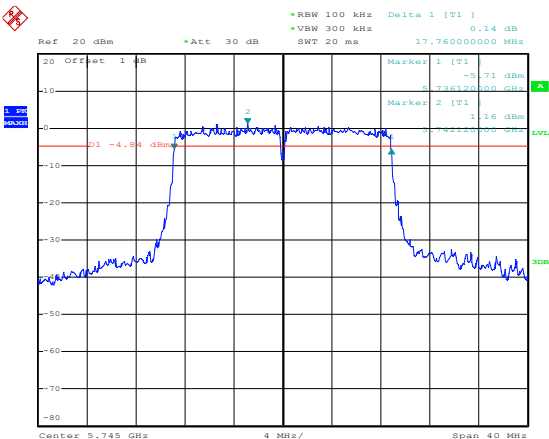
802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.96 dB VSW 300 kHz SWT 20 ms 36.80000000 MHz Marker 1 [T1] -11.01 dBm 5.75500000 GHz Marker 2 [T1] -1.93 dBm 5.75500000 GHz D1 -7.99 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 14:46:46
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 4.89 dB VSW 300 kHz SWT 20 ms 36.80000000 MHz Marker 1 [T1] -14.25 dBm 5.75500000 GHz Marker 2 [T1] -1.92 dBm 5.75500000 GHz D1 -7.92 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 14:49:23
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.14 dB VSW 300 kHz SWT 20 ms 17.76000000 MHz Marker 1 [T1] -5.71 dBm 5.74500000 GHz Marker 2 [T1] -1.16 dBm 5.74500000 GHz D1 -4.84 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:42:46

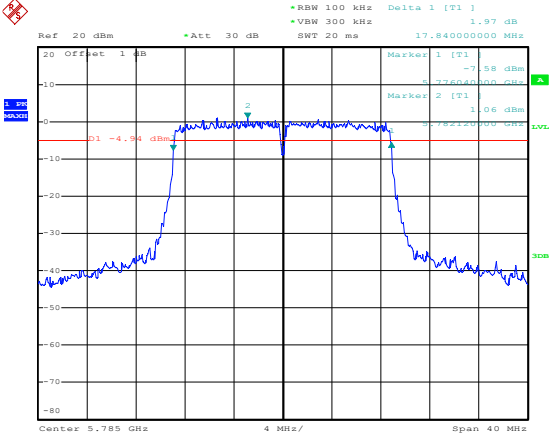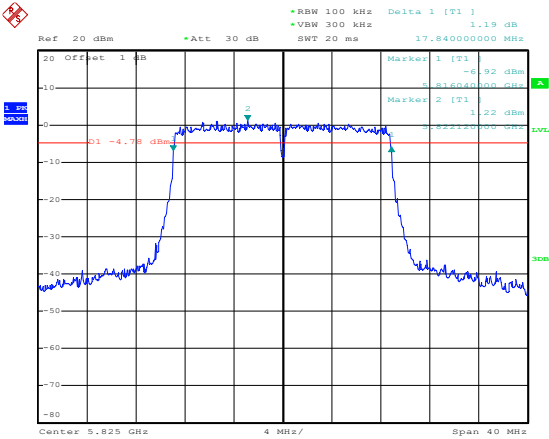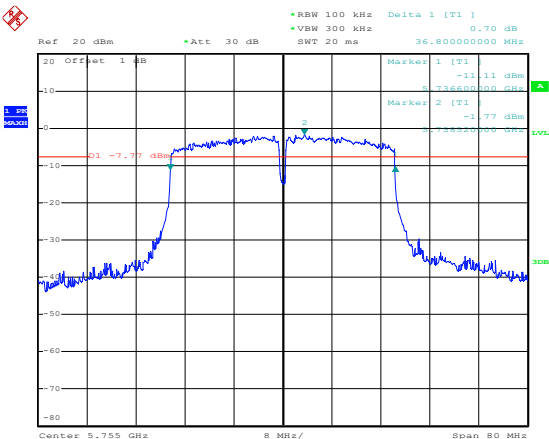802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.97 dB VSW 300 kHz SWT 20 ms 17.84000000 MHz Marker 1 [T1] -7.58 dBm 17.84000000 GHz Marker 2 [T1] 1.06 dBm 17.84000000 GHz D1 -4.94 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:43:50
802.11ac-VHT20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.19 dB VSW 300 kHz SWT 20 ms 17.84000000 MHz Marker 1 [T1] -6.92 dBm 17.84000000 GHz Marker 2 [T1] 1.22 dBm 17.84000000 GHz D1 -4.78 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:45:00
802.11ac-VHT40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.70 dB VSW 300 kHz SWT 20 ms 36.80000000 MHz Marker 1 [T1] -11.11 dBm 36.80000000 GHz Marker 2 [T1] -1.77 dBm 36.80000000 GHz D1 -7.77 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 14:51:45



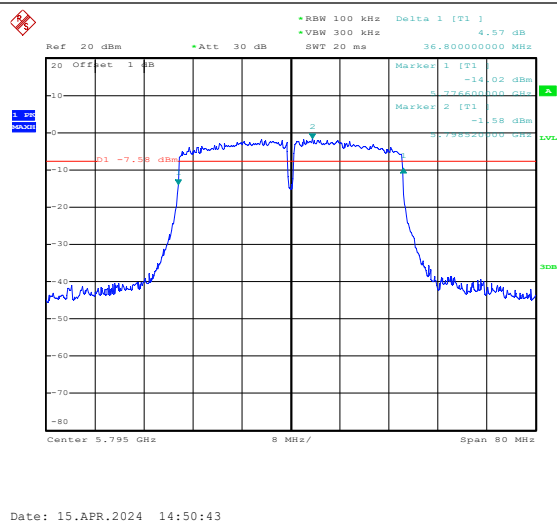
802.11ac-VHT40-High





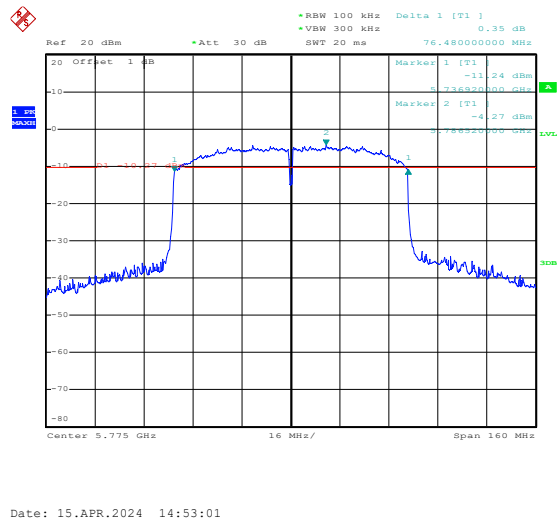
802.11ac-VHT80






ANT 0
99% BandwidthMHz
5150-5250MHz

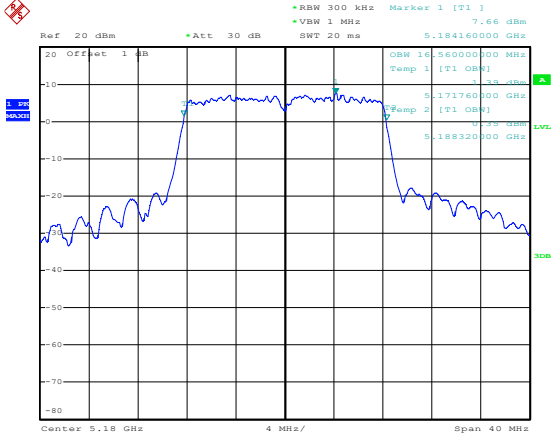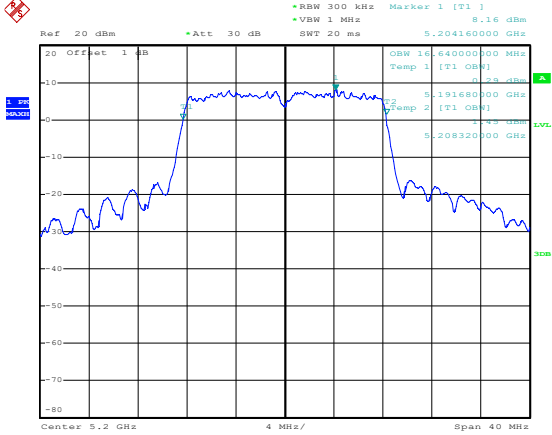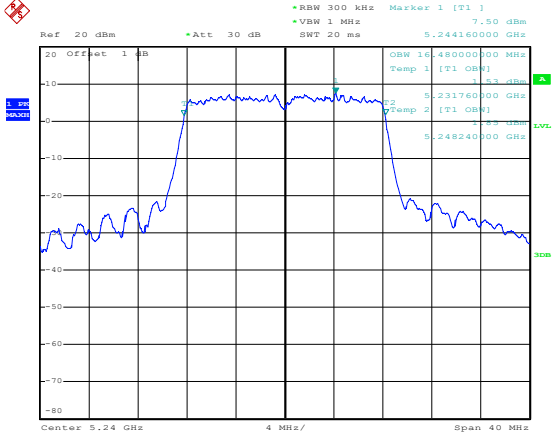802.11a-Low	 Date: 15.APR.2024 15:20:42
802.11a-Middle	 Date: 15.APR.2024 15:21:25
802.11a-High	 Date: 15.APR.2024 15:21:53

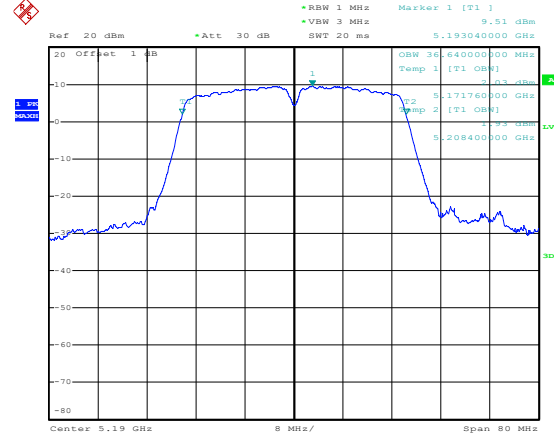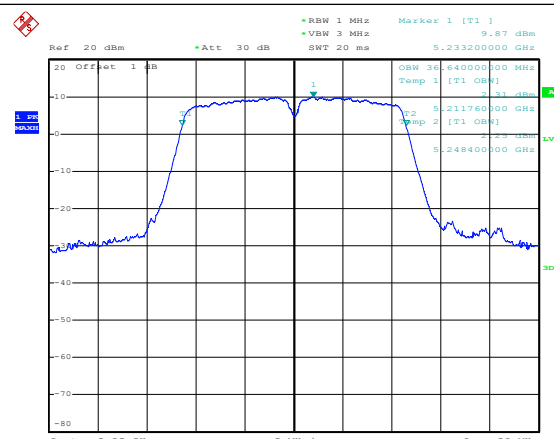
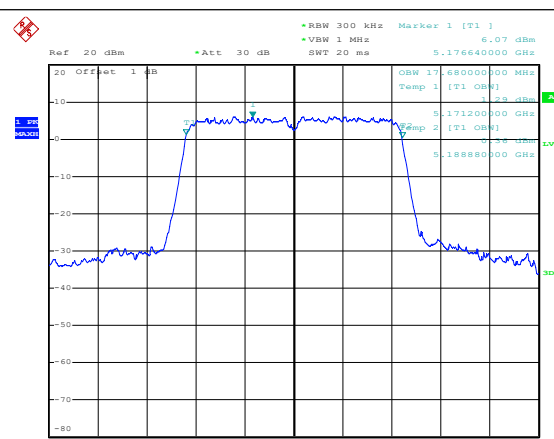
[illegible]

802.11n-HT40-Low	 Date: 15.APR.2024 15:25:11
802.11n-HT40-High	 Date: 15.APR.2024 15:25:39
802.11ac-VHT20-Low	 Date: 15.APR.2024 15:23:19

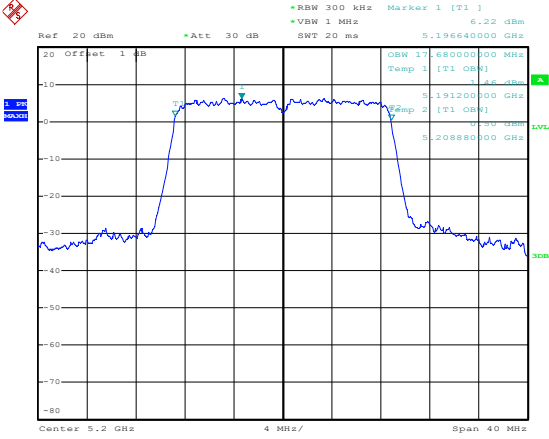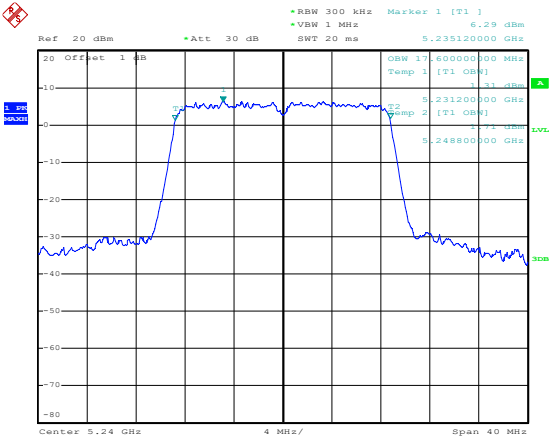
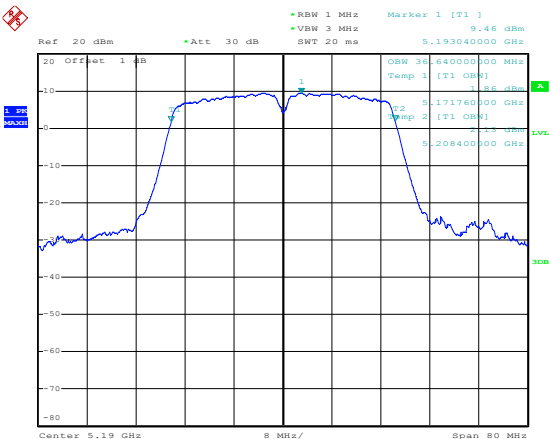
802.11ac-VHT20-Middle	 Date: 15.APR.2024 15:23:43
802.11ac-VHT20-High	 Date: 15.APR.2024 15:24:30
802.11ac-VHT40-Low	 Date: 15.APR.2024 15:26:31

802.11ac-VHT40-High	Ref 20 dBm *Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 5.232880000 GHz 9.91 dBm 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.23 GHz 8 MHz/ Span 80 MHz OSW 30.240000000 MHz Temp 1 [T1] 0.25 dBm 5.211760000 GHz Temp 2 [T1] 0.25 dBm 5.248400000 GHz 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 15.APR.2024 15:26:05
802.11ac-VHT80	Ref 20 dBm *Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 5.225680000 GHz 6.75 dBm 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.21 GHz 16 MHz/ Span 160 MHz OSW 74.880000000 MHz Temp 1 [T1] 0.31 dBm 5.172880000 GHz Temp 2 [T1] 0.31 dBm 5.247760000 GHz 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 15.APR.2024 15:27:07

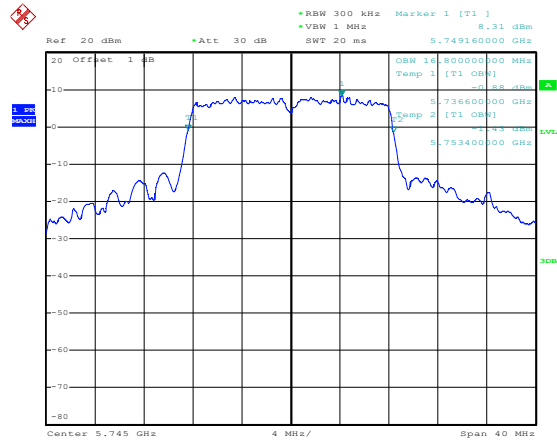

99% BandwidthMHz
5725-5850MHz






Date: 15.APR.2024 16:10:13


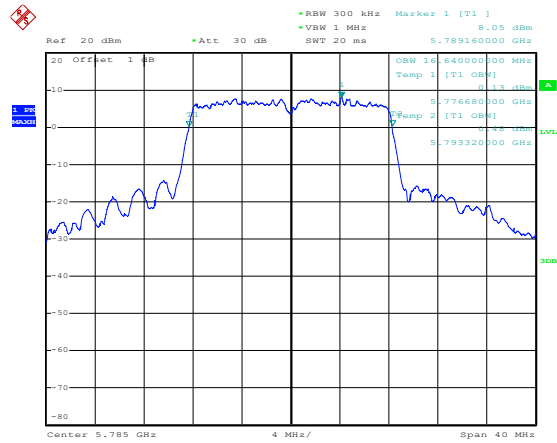



Date: 15.APR.2024 16:10:39

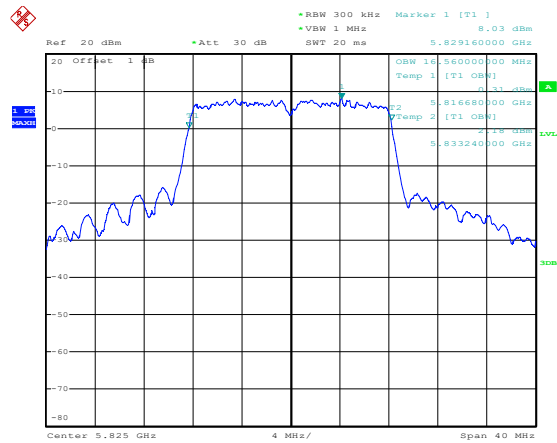


Date: 15.APR.2024 16:11:08

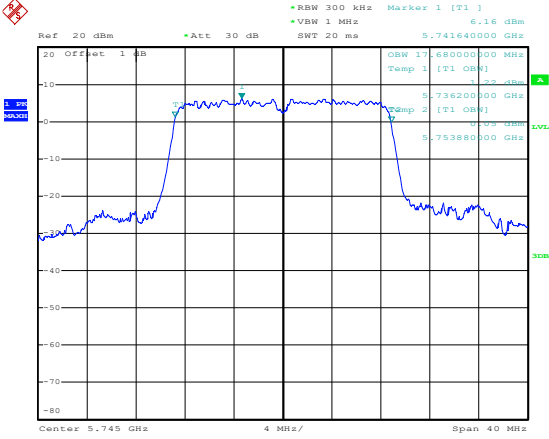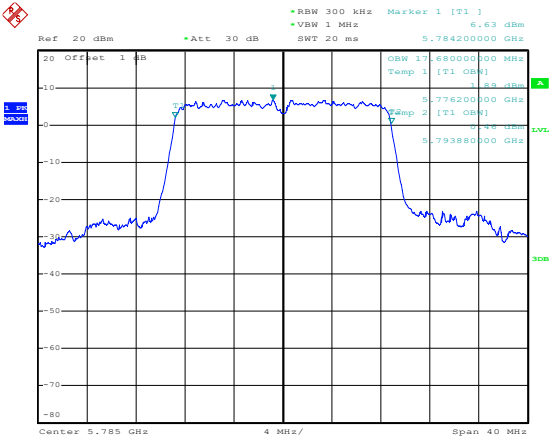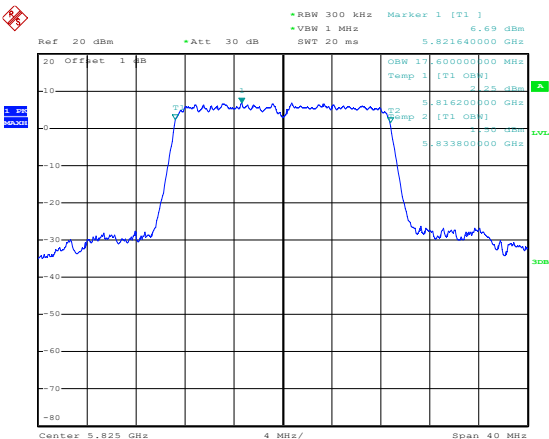802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms RBW 300 kHz Marker 1 [T1] 6.16 dBm VSW 1 MHz OSW 17.68000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.741640000 GHz 5.736200000 GHz 5.733800000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:12:28
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms RBW 300 kHz Marker 1 [T1] 6.63 dBm VSW 1 MHz OSW 17.68000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.784200000 GHz 5.776200000 GHz 5.793800000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:12:01
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms RBW 300 kHz Marker 1 [T1] 6.69 dBm VSW 1 MHz OSW 17.60000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.821640000 GHz 5.816200000 GHz 5.833800000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:11:36

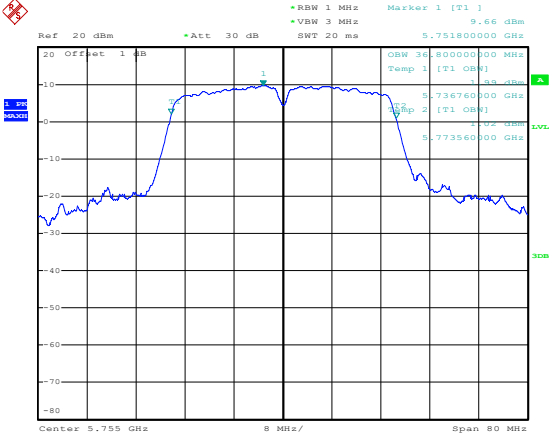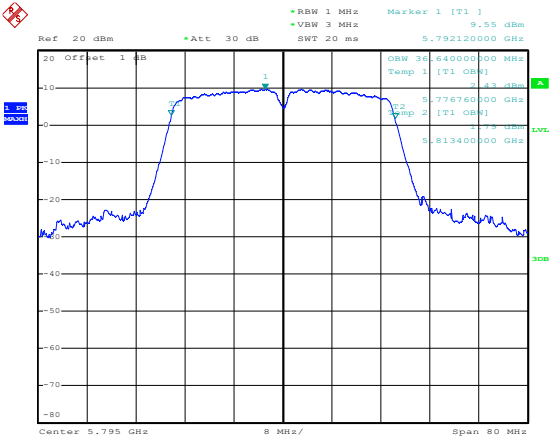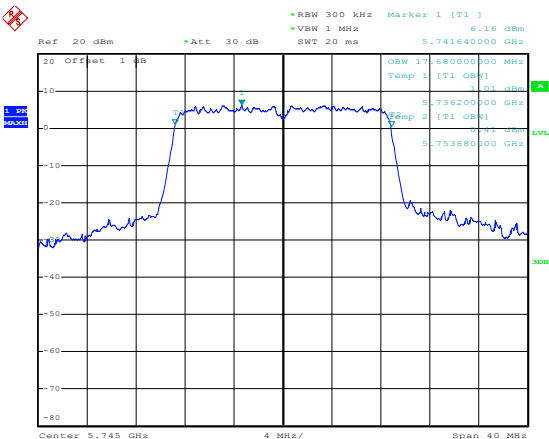
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 9.66 dBm 5.751800000 GHz OSW 30.00000000 MHz Temp 1 [T1] 9.66 dBm 5.736760000 GHz 5.735600000 GHz Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 16:14:17
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 9.55 dBm 5.792120000 GHz OSW 30.00000000 MHz Temp 1 [T1] 9.55 dBm 5.776760000 GHz 5.713400000 GHz Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 16:14:43
802.11ac-VHT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 6.16 dBm 5.741640000 GHz OSW 17.68000000 MHz Temp 1 [T1] 6.16 dBm 5.736200000 GHz 5.753880000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 16:12:55

[illegible]



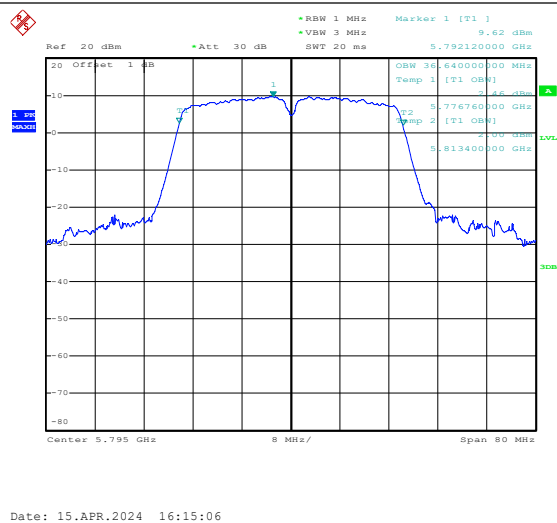
802.11ac-VHT40-High






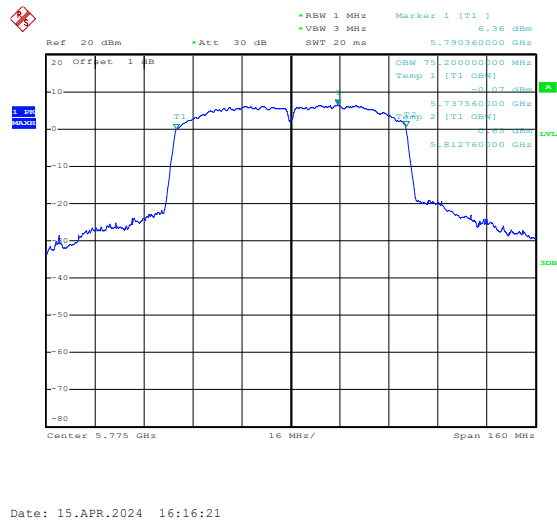
802.11ac-VHT80








ANT 1
99% BandwidthMHz
5150-5250MHz

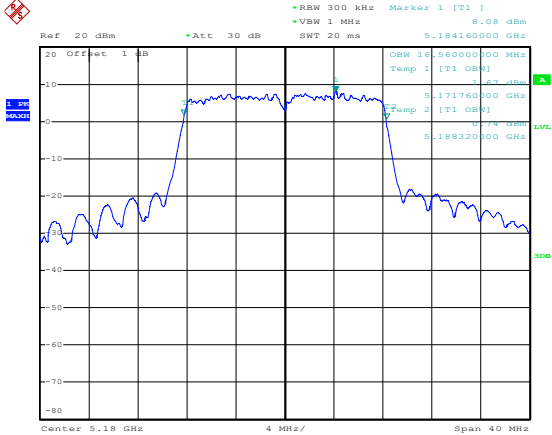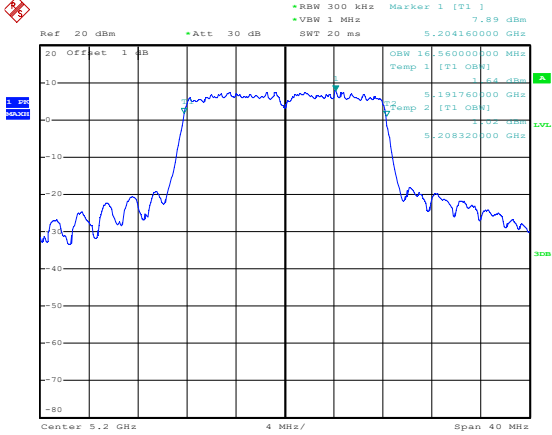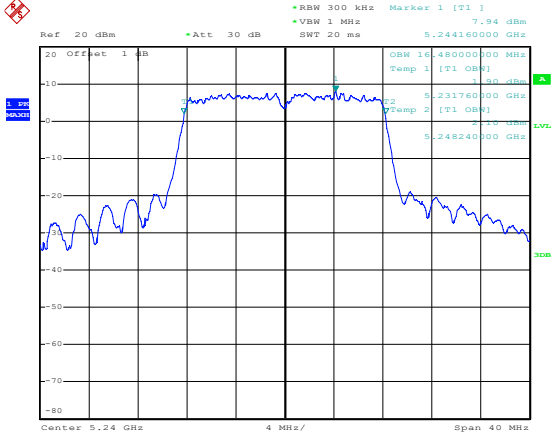802.11a-Low	 Date: 15.APR.2024 11:42:01
802.11a-Middle	 Date: 15.APR.2024 11:42:27
802.11a-High	 Date: 15.APR.2024 11:42:47




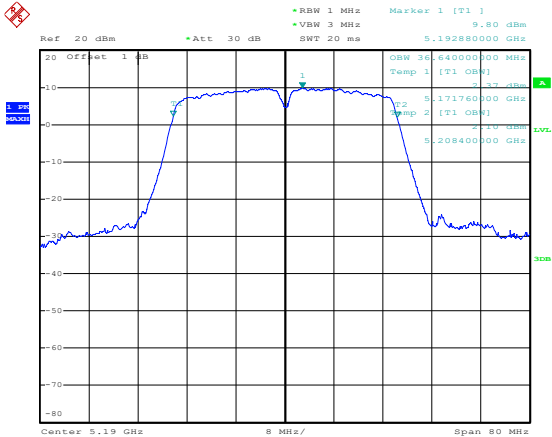
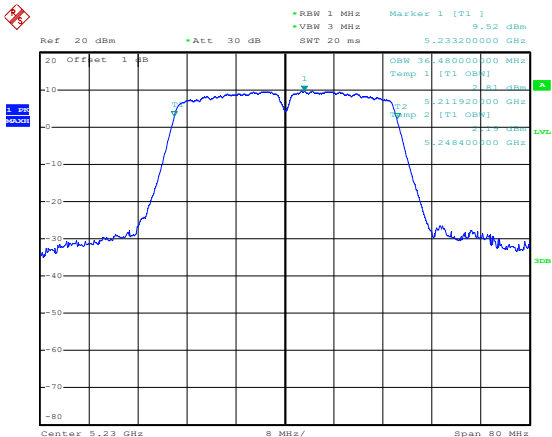
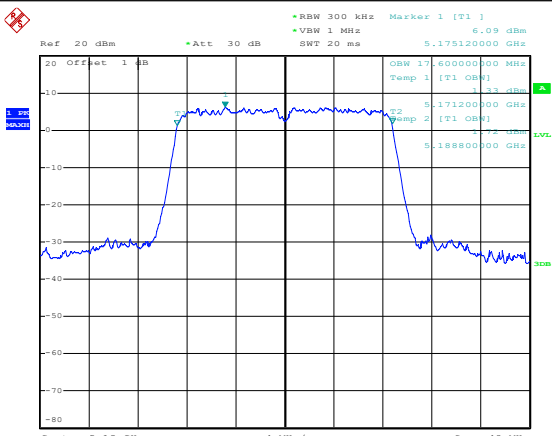
802.11n-HT40-Low	 Date: 15.APR.2024 11:45:32
802.11n-HT40-High	 Date: 15.APR.2024 11:45:54
802.11ac-VHT20-Low	 Date: 15.APR.2024 11:44:12

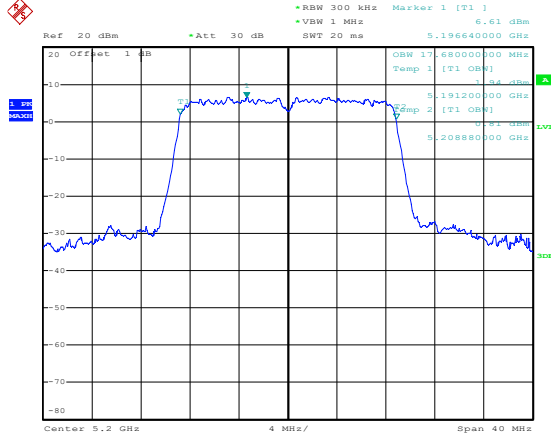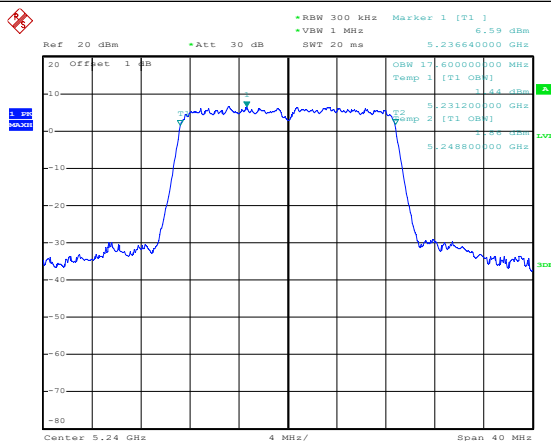
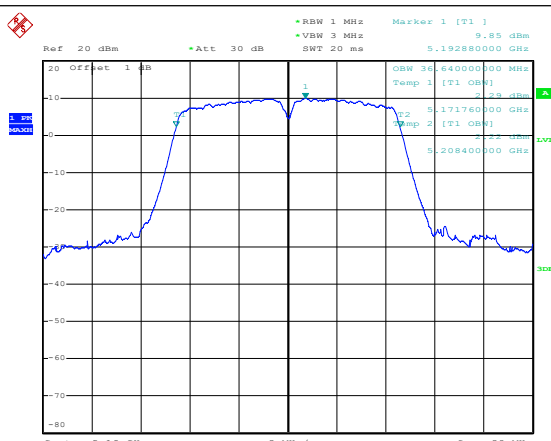
802.11ac-VHT20-Middle	 Date: 15.APR.2024 11:44:33
802.11ac-VHT20-High	 Date: 15.APR.2024 11:44:54
802.11ac-VHT40-Low	 Date: 15.APR.2024 11:46:38


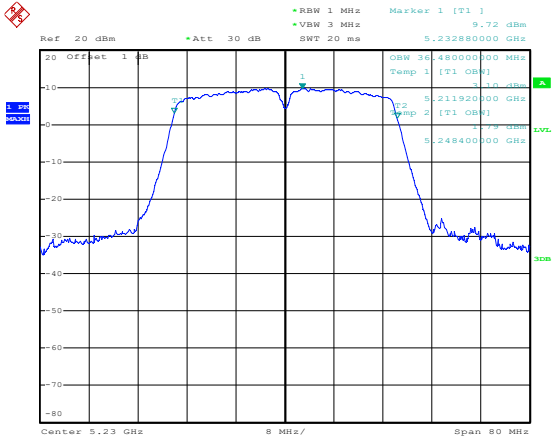
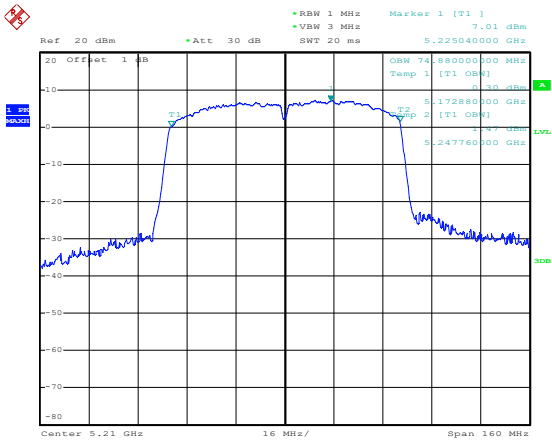
802.11ac-VHT40-High	 Date: 15.APR.2024 11:46:15
802.11ac-VHT80	 Date: 15.APR.2024 11:47:12



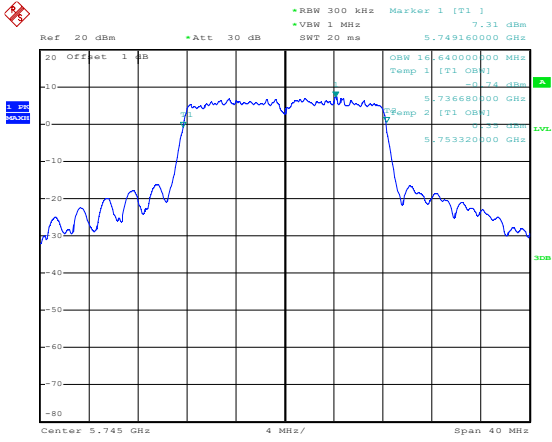
99% BandwidthMHz
5725-5850MHz

802.11a-Low	 Date: 15.APR.2024 14:16:10
-------------	--

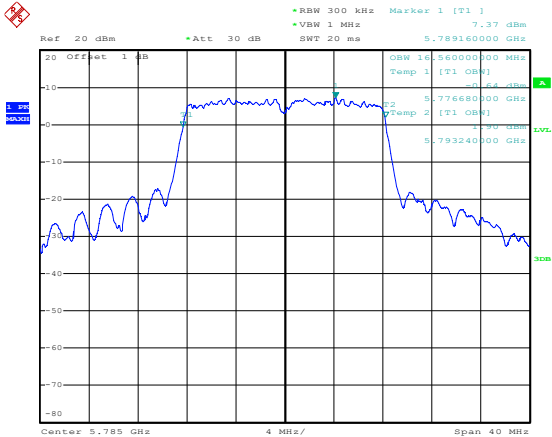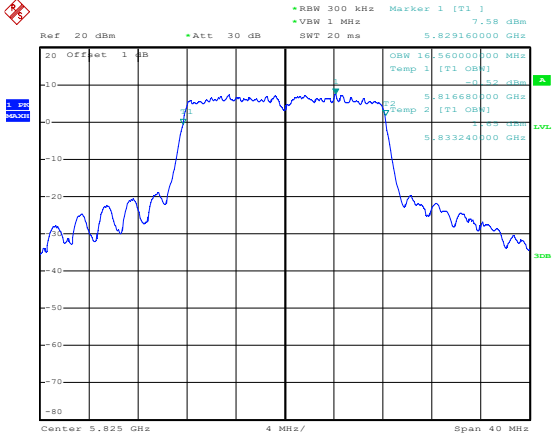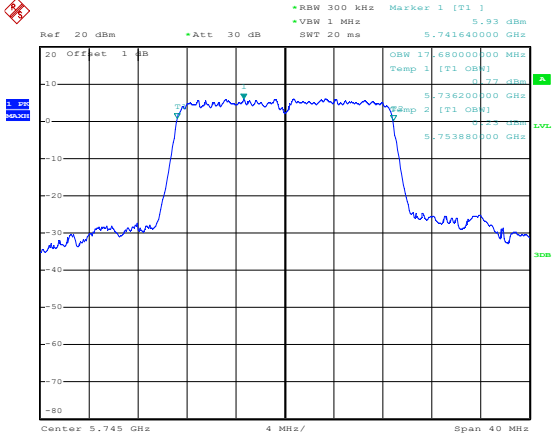
802.11a-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms RBW 300 kHz Marker 1 [T1] 7.37 dBm VSW 1 MHz 5.785160000 GHz OSW 16.560000000 MHz Temp 1 [T1] OSW 50.64 dBm Temp 2 [T1] OSW 5.776680000 GHz 5.793240000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:16:42
802.11a-High	 Ref 20 dBm *Att 30 dB SWT 20 ms RBW 300 kHz Marker 1 [T1] 7.58 dBm VSW 1 MHz 5.829160000 GHz OSW 16.560000000 MHz Temp 1 [T1] OSW 50.62 dBm Temp 2 [T1] OSW 5.816680000 GHz 5.833240000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:19:16
802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms RBW 300 kHz Marker 1 [T1] 5.93 dBm VSW 1 MHz 5.741640000 GHz OSW 17.680000000 MHz Temp 1 [T1] OSW 50.77 dBm Temp 2 [T1] OSW 5.736200000 GHz 5.753880000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:24:03



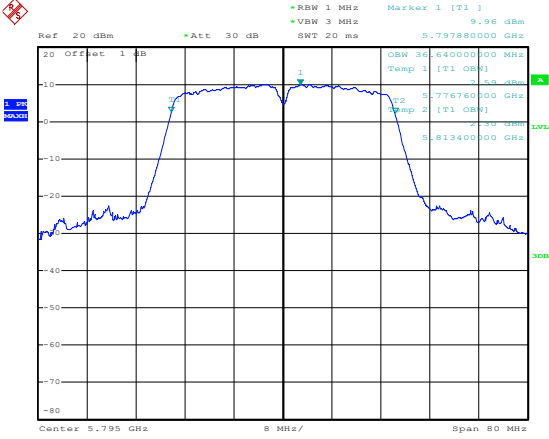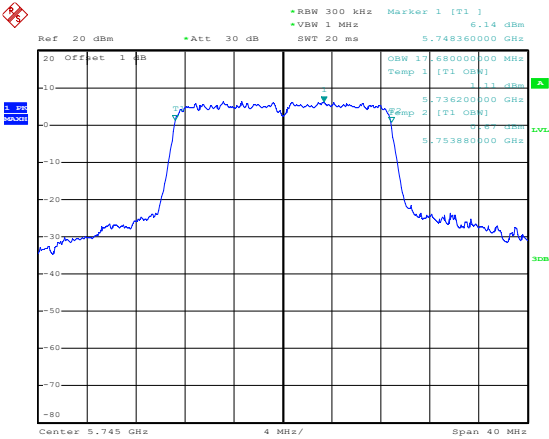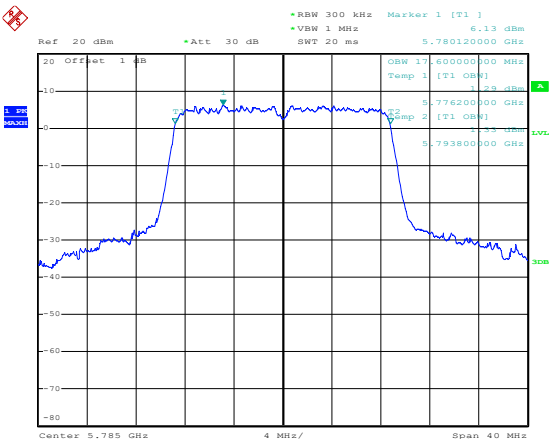802.11n-HT40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 9.96 dBm OSW 30.24000000 MHz Temp 1 [T1] 0.23 dBm Temp 2 [T1] 0.23 dBm 5.776760000 GHz 5.813400000 GHz Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 15.APR.2024 14:27:21
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.14 dBm OSW 17.25000000 MHz Temp 1 [T1] 1.11 dBm Temp 2 [T1] 1.11 dBm 5.736200000 GHz 5.753880000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:24:47
802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.13 dBm OSW 17.60000000 MHz Temp 1 [T1] 1.23 dBm Temp 2 [T1] 1.23 dBm 5.776200000 GHz 5.793800000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 15.APR.2024 14:25:12

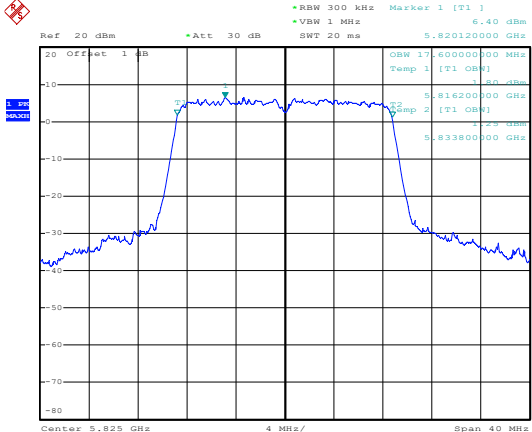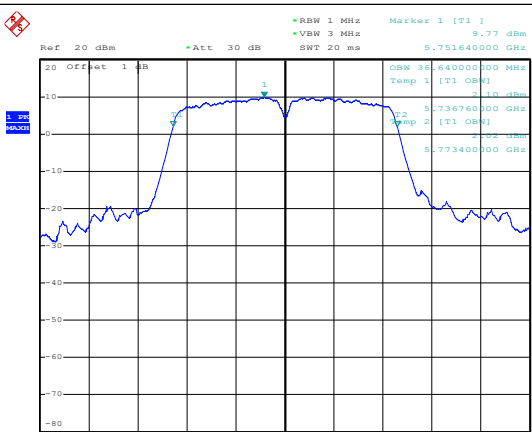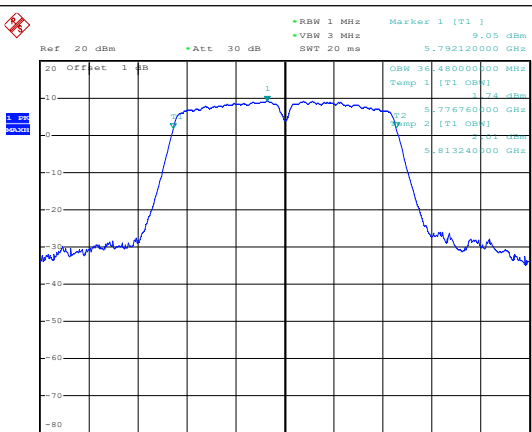802.11ac-VHT20-High	 Date: 15.APR.2024 14:25:43
802.11ac-VHT40-Low	 Date: 15.APR.2024 14:29:25
802.11ac-VHT40-High	 Date: 15.APR.2024 14:27:57

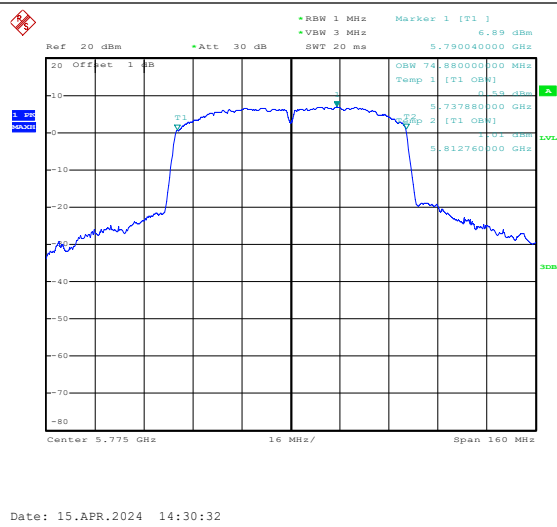802.11ac-VHT80



APPENDIX C


Maximum Conducted Output Power

U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5180	16.27	16.83	/	23.98
	5200	16.80	16.54	/	23.98
	5240	16.15	16.56	/	23.98
802.11n-HT20	5180	15.28	15.76	18.54	23.98
	5200	15.37	15.16	18.28	23.98
	5240	15.49	15.92	18.72	23.98
802.11n-HT40	5190	15.01	15.67	18.36	23.98
	5230	15.44	15.42	18.44	23.98
802.11ac-VHT20	5180	15.29	15.45	18.38	23.98
	5200	15.37	15.83	18.62	23.98
	5240	15.40	15.58	18.50	23.98
802.11ac-VHT40	5190	15.16	15.65	18.42	23.98
	5230	15.53	15.56	18.56	23.98
802.11ac-VHT80	5210	15.41	15.68	18.56	23.98

U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5745	16.55	16.88	/	30.00
	5785	16.17	16.67	/	30.00
	5825	16.31	16.67	/	30.00
802.11n-HT20	5745	15.02	15.69	18.38	30.00
	5785	15.54	15.54	18.55	30.00
	5825	15.54	15.74	18.65	30.00
802.11n-HT40	5755	15.26	15.74	18.52	30.00
	5795	15.29	15.94	18.64	30.00
802.11ac-VHT20	5745	15.12	15.68	18.42	30.00
	5785	15.63	15.51	18.58	30.00
	5825	15.67	15.64	18.67	30.00
802.11ac-VHT40	5755	15.16	15.72	18.46	30.00
	5795	15.38	15.15	18.28	30.00
802.11ac-VHT80	5775	15.20	15.77	18.50	30.00


ANT 0
5150-5250MHz

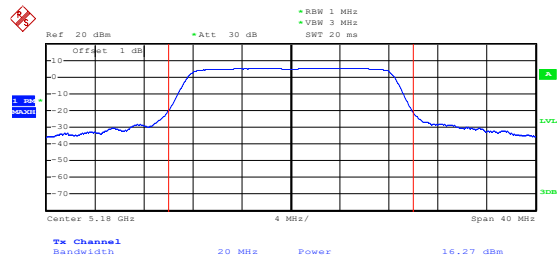802.11a-Low




Date: 15.APR.2024 14:58:45

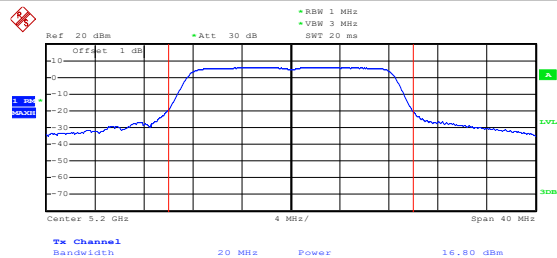802.11a-Middle









Date: 15.APR.2024 14:59:33



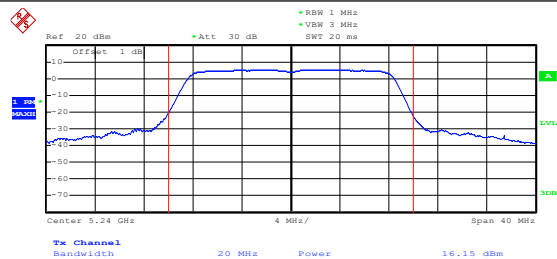
802.11a-High




Date: 15.APR.2024 15:00:21

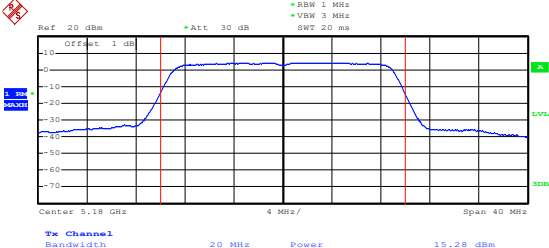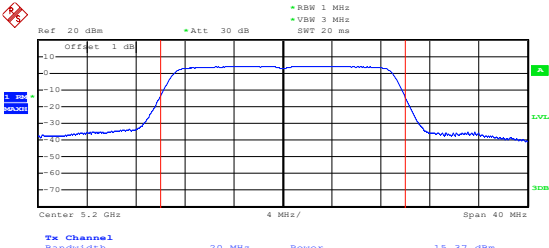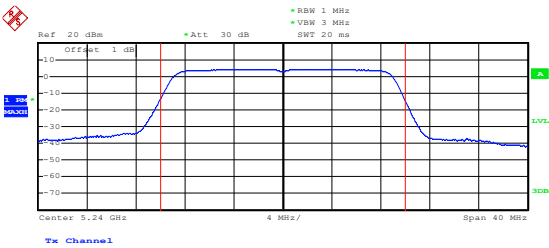802.11n-HT20-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.18 GHz Span: 40 MHz Bandwidth: 20 MHz Power: 15.28 dBm Date: 15.APR.2024 15:02:41
802.11n-HT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.2 GHz Span: 40 MHz Bandwidth: 20 MHz Power: 15.37 dBm Date: 15.APR.2024 15:01:49
802.11n-HT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.24 GHz Span: 40 MHz Bandwidth: 20 MHz Power: 15.49 dBm Date: 15.APR.2024 15:01:19

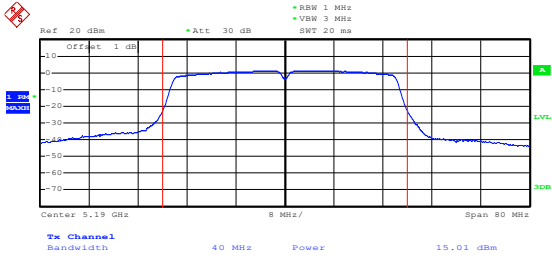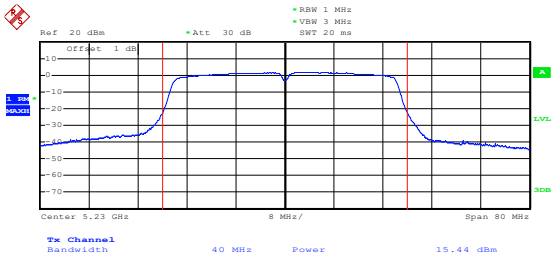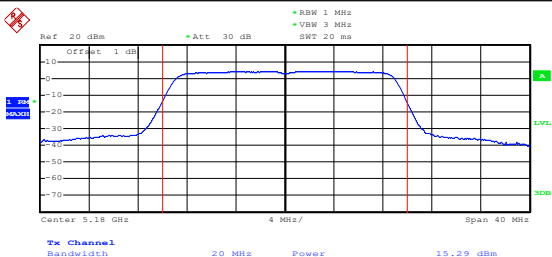802.11n-HT40-Low	 Date: 15.APR.2024 15:04:52
802.11n-HT40-High	 Date: 15.APR.2024 15:05:16
802.11ac-VHT20-Low	 Date: 15.APR.2024 15:03:01

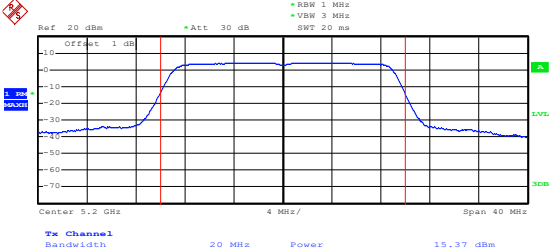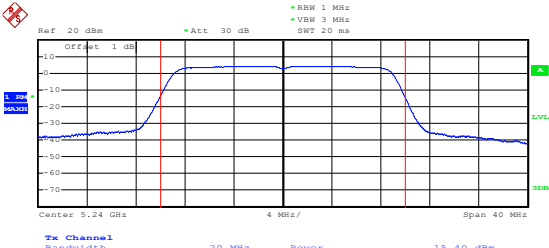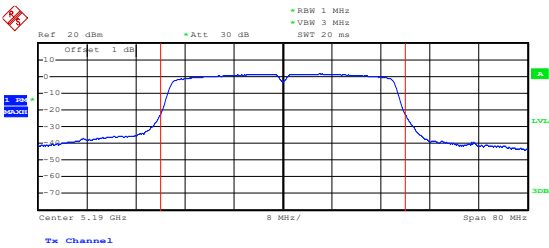
802.11ac-VHT20-Middle	 Date: 15.APR.2024 15:03:23
802.11ac-VHT20-High	 Date: 15.APR.2024 15:04:16
802.11ac-VHT40-Low	 Date: 15.APR.2024 15:06:04

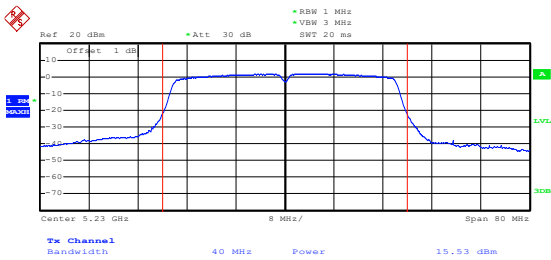802.11ac-VHT40-High





Date: 15.APR.2024 15:05:41

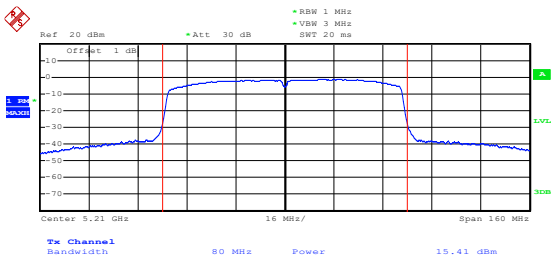802.11ac-VHT80





Date: 15.APR.2024 15:07:04

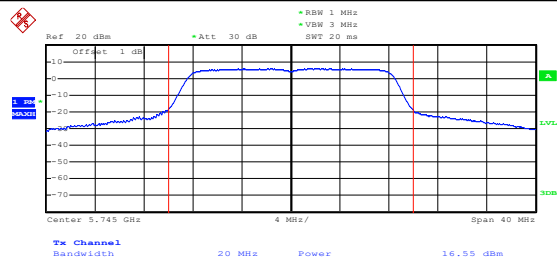

5725-5850MHz






Date: 15.APR.2024 15:52:41


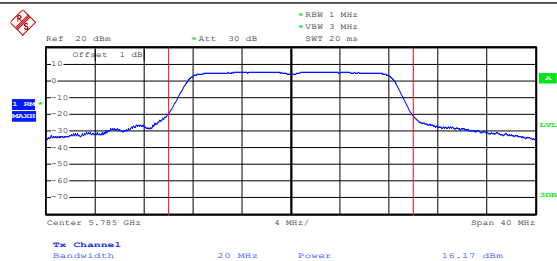






Date: 15.APR.2024 15:53:39

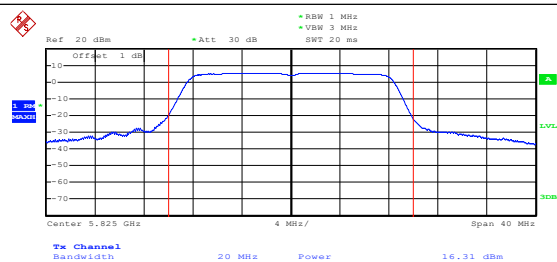

Date: 15.APR.2024 15:54:00

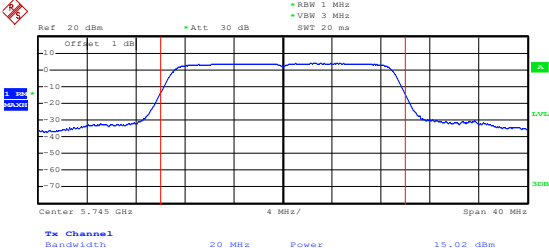
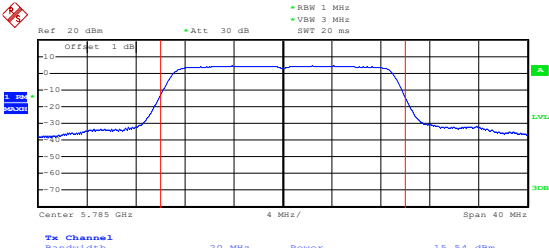
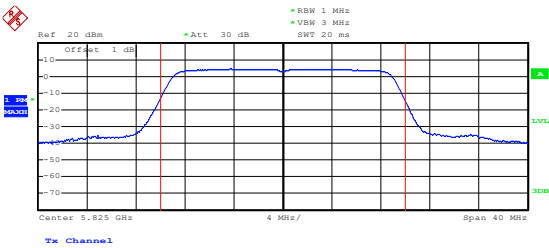
802.11n-HT20-Low	 Date: 15.APR.2024 15:55:22
802.11n-HT20-Middle	 Date: 15.APR.2024 15:54:59
802.11n-HT20-High	 Date: 15.APR.2024 15:54:36

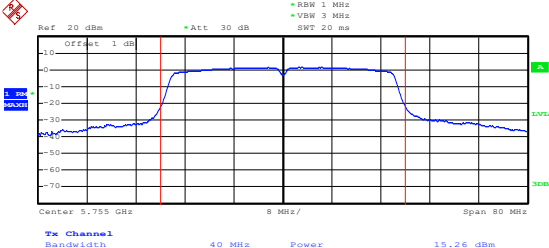
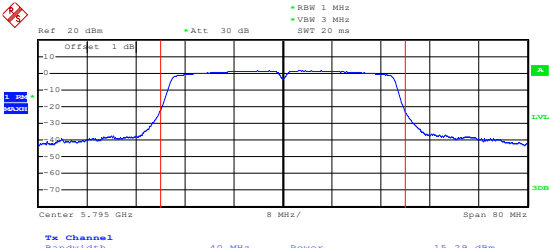
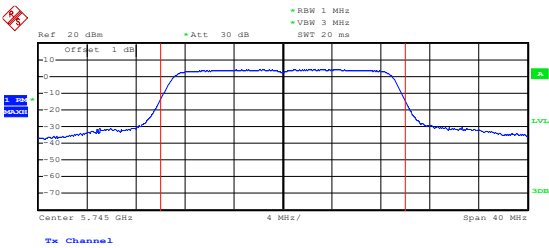
802.11n-HT40-Low	 Date: 15.APR.2024 15:57:18
802.11n-HT40-High	 Date: 15.APR.2024 15:57:37
802.11ac-VHT20-Low	 Date: 15.APR.2024 15:55:47

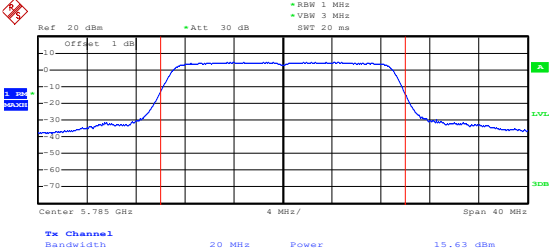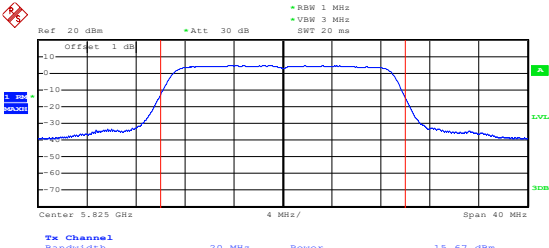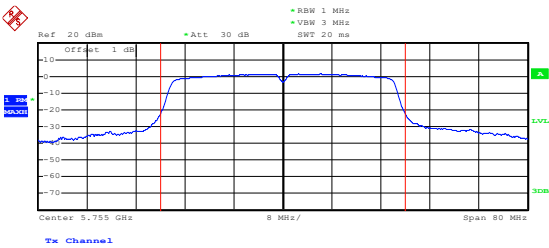802.11ac-VHT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.755 GHz Span: 40 MHz Tx Channel Bandwidth: 20 MHz Power: 15.63 dBm Date: 15.APR.2024 15:56:07
802.11ac-VHT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.825 GHz Span: 40 MHz Tx Channel Bandwidth: 20 MHz Power: 15.67 dBm Date: 15.APR.2024 15:56:31
802.11ac-VHT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.755 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 15.16 dBm Date: 15.APR.2024 15:58:18




802.11ac-VHT40-High	Date: 15.APR.2024 15:57:58
802.11ac-VHT80	Date: 15.APR.2024 15:59:14

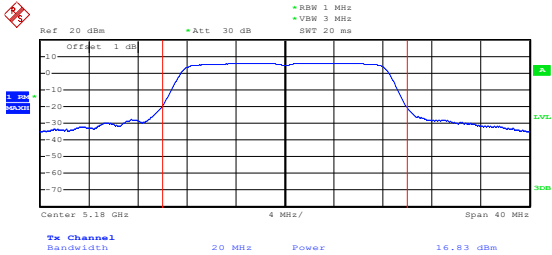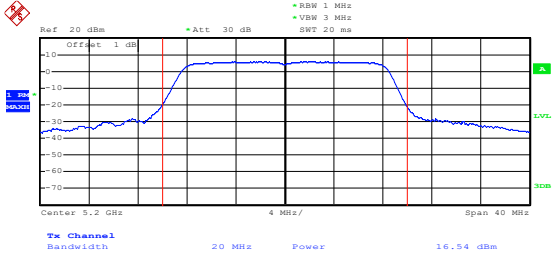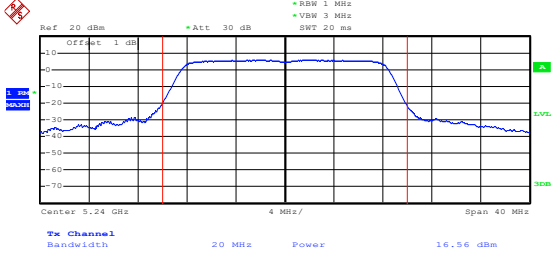ANT 1
5150-5250MHz


802.11a-Low	 Date: 15.APR.2024 11:29:21
802.11a-Middle	 Date: 15.APR.2024 11:30:02
802.11a-High	 Date: 15.APR.2024 11:30:32

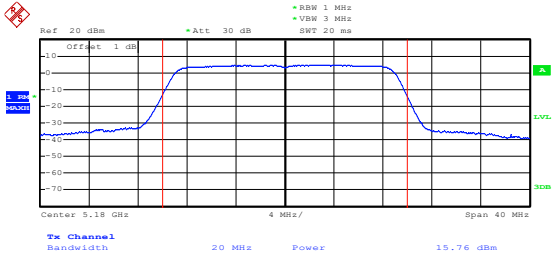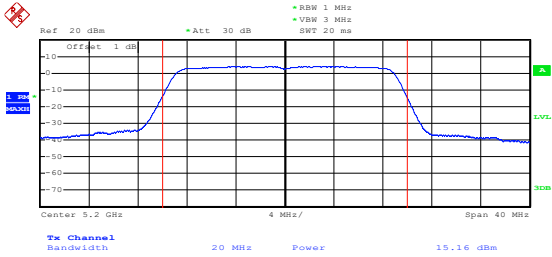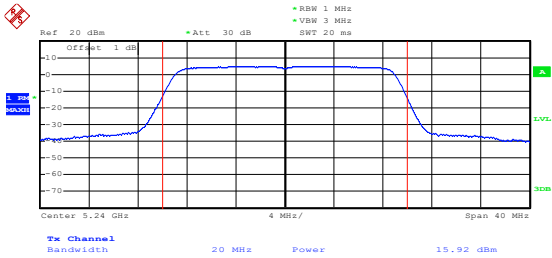802.11n-HT20-Low	 Date: 15.APR.2024 11:31:40
802.11n-HT20-Middle	 Date: 15.APR.2024 11:31:22
802.11n-HT20-High	 Date: 15.APR.2024 11:31:01

802.11n-HT40-Low	Date: 15.APR.2024 11:26:23
802.11n-HT40-High	Date: 15.APR.2024 11:26:42
802.11ac-VHT20-Low	Date: 15.APR.2024 11:32:00

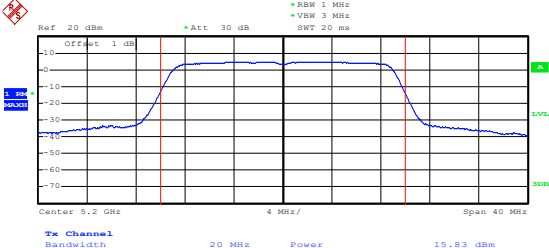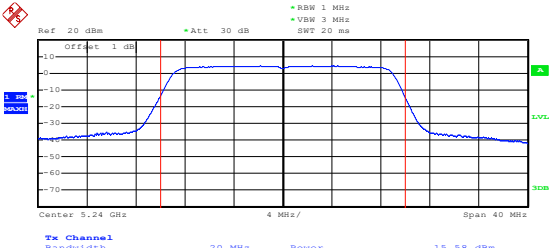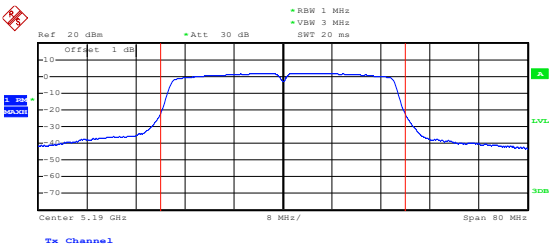
802.11ac-VHT20-Middle	 Date: 15.APR.2024 11:32:18
802.11ac-VHT20-High	 Date: 15.APR.2024 11:32:37
802.11ac-VHT40-Low	 Date: 15.APR.2024 11:27:20

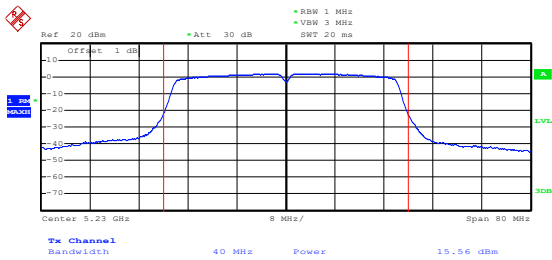802.11ac-VHT40-High






Date: 15.APR.2024 11:27:02



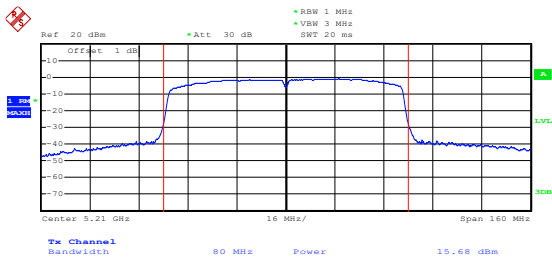
802.11ac-VHT80









Date: 15.APR.2024 11:27:47

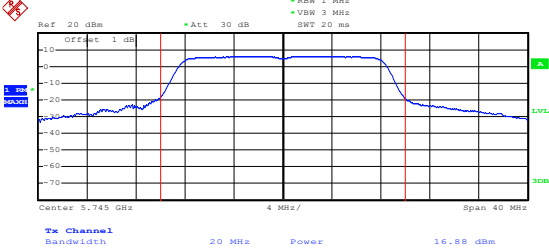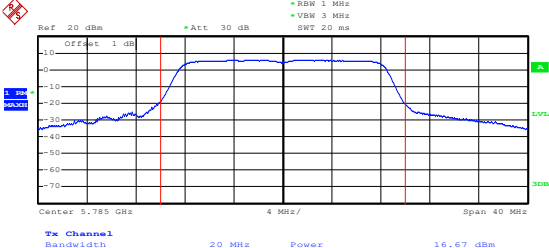
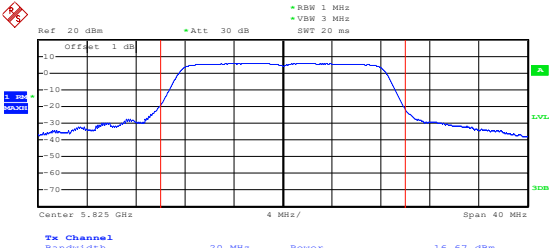
5725-5850MHz

802.11a-Low	 Date: 15.APR.2024 13:46:59
802.11a-Middle	 Date: 15.APR.2024 13:48:15
802.11a-High	 Date: 15.APR.2024 13:48:52

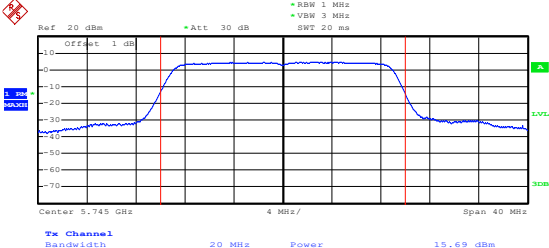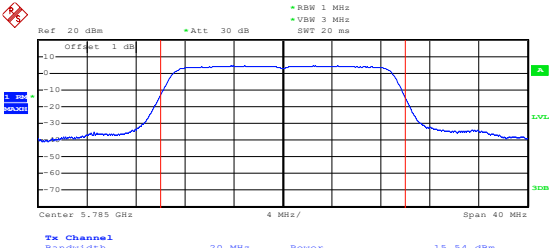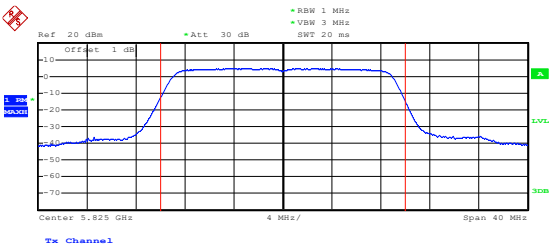802.11n-HT20-Low	 Date: 15.APR.2024 13:50:58
802.11n-HT20-Middle	 Date: 15.APR.2024 13:50:18
802.11n-HT20-High	 Date: 15.APR.2024 13:49:39

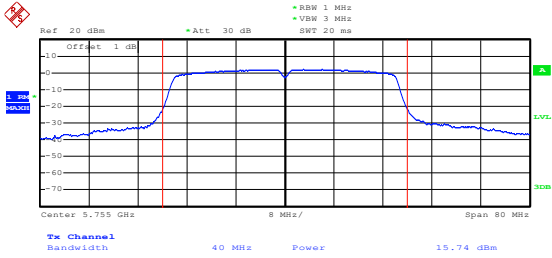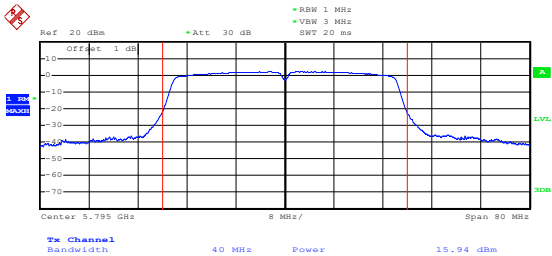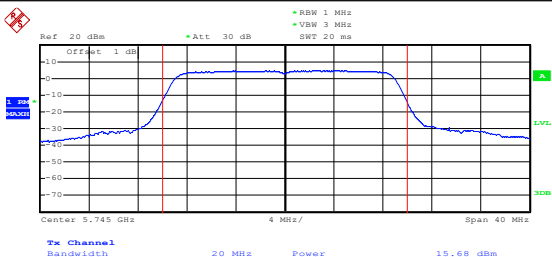802.11n-HT40-Low	 Date: 15.APR.2024 13:53:32
802.11n-HT40-High	 Date: 15.APR.2024 13:54:03
802.11ac-VHT20-Low	 Date: 15.APR.2024 13:51:43

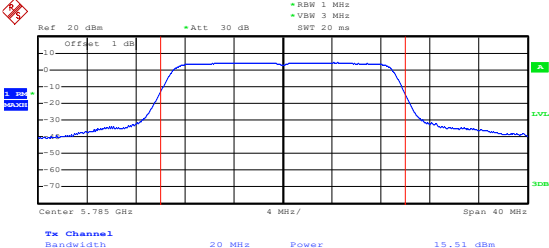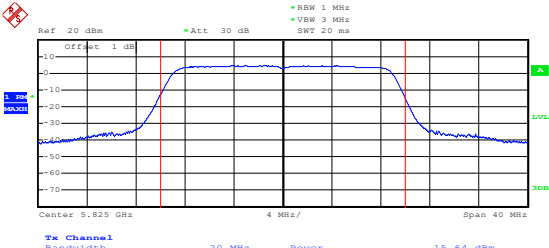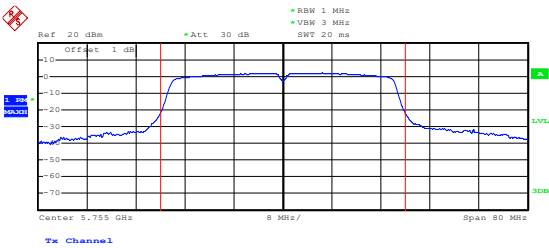802.11ac-VHT20-Middle	 Date: 15.APR.2024 13:52:06
802.11ac-VHT20-High	 Date: 15.APR.2024 13:52:25
802.11ac-VHT40-Low	 Date: 15.APR.2024 13:55:11

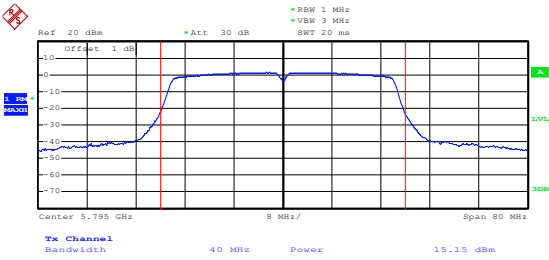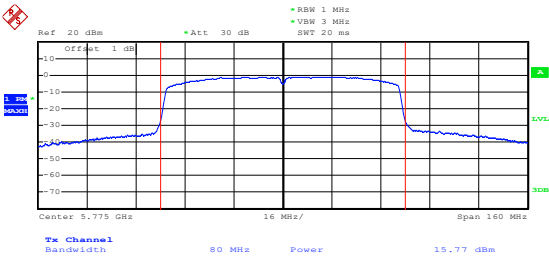802.11ac-VHT40-High	 Date: 15.APR.2024 13:54:35
802.11ac-VHT80	 Date: 15.APR.2024 13:56:12

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VAC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1608	0.3093
100%		-20	1600	0.3076
100%		-10	1592	0.3062
100%		0	1597	0.3072
100%		+10	1612	0.3100
100%		+20	1595	0.3068
100%		+30	1599	0.3076
100%		+40	1601	0.3079
100%		+50	1596	0.3069
Low Battery power	108	+20	1607	0.3090
High Battery power	132	+20	1604	0.3085

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VAC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1610	0.2784
100%		-20	1597	0.2761
100%		-10	1586	0.2742
100%		0	1599	0.2763
100%		+10	1618	0.2798
100%		+20	1597	0.2760
100%		+30	1599	0.2764
100%		+40	1604	0.2772
100%		+50	1594	0.2755
Low Battery power	108	+20	1603	0.2770
High Battery power	132	+20	1606	0.2776

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****