

TEST REPORT

Reference No..... : WTH23X05094415W001
FCC ID : XOMCETV55UQW1F2US
Applicant : Shenzhen Qiyue Optronics Company Limited
Address..... : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,
Shangmeilin, Futian District, Shenzhen , China
Manufacturer : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED BRANCH
Address..... : A/B/C/D Building, Xitian Industrial Park, Dashuikeng Community,Guanlan
Street, Longhua New District, Shenzhen City, China
Product Name : 55" LED UHD TV
Model No..... : CE-TV55UQW1F2US
Standards : FCC Part 15.407
Date of Receipt sample : 2023-05-04
Date of Test..... : 2023-05-04 to 2023-05-30
Date of Issue : 2023-05-30
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	8
1.6 TEST FACILITY	8
1.7 EUT SETUP AND TEST MODE.....	9
1.8 MEASUREMENT UNCERTAINTY	10
1.9 TEST EQUIPMENT LIST AND DETAILS	11
2. SUMMARY OF TEST RESULTS	14
3. ANTENNA REQUIREMENT	15
3.1 STANDARD APPLICABLE.....	15
3.2 EVALUATION INFORMATION.....	15
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	16
4.1 STANDARD APPLICABLE.....	16
4.2 SUMMARY OF TEST RESULTS	16
5. POWER SPECTRAL DENSITY	17
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 SUMMARY OF TEST RESULTS/PLOTS	18
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	19
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS	21
7. MAXIMUM CONDUCTED OUTPUT POWER.....	22
7.1 STANDARD APPLICABLE.....	22
7.2 TEST PROCEDURE.....	22
7.3 SUMMARY OF TEST RESULTS/PLOTS	23
8. RADIATED SPURIOUS EMISSIONS.....	24
8.1 STANDARD APPLICABLE.....	24
8.2 TEST PROCEDURE.....	24
8.3 TEST RECEIVER SETUP	26
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	26
8.5 SUMMARY OF TEST RESULTS/PLOTS	27
9. FREQUENCY STABILITY	56
9.1 STANDARD APPLICABLE.....	56
9.2 TEST PROCEDURE.....	56
9.3 SUMMARY OF TEST RESULTS/PLOTS	56
10 CONDUCTED EMISSIONS	57
10.1 TEST PROCEDURE.....	57
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	57
10.3 TEST RECEIVER SETUP	57
10.4 SUMMARY OF TEST RESULTS/PLOTS	57
APPENDIX SUMMARY	60
APPENDIX A.....	61
APPENDIX B.....	74
APPENDIX C.....	96
APPENDIX D.....	109

APPENDIX PHOTOGRAPHS.....110

Report version

Version No.	Date of issue	Description
Rev.00	2023-05-30	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory: YIBIN WANXIN Electronic Technology Co.,LTD
 Address of factory: Building 5, building6, Yibin Wanxin Electronic Technology Intelligent Terminal Industrial Park, Xinggang Road West 136, Lingang Economic Development Zone Yibin city, Sichuan province.

General Description of EUT	
Product Name:	55" LED UHD TV
Trade Name:	Continental
Model No.:	CE-TV55UQW1F2US
Adding Model(s):	D55N215-U-A-I, XXXXXXXX55XXXXXXXXX(Where "X"can be any alphanumeric of A-Z or 0-9 or blank or -, indicates different client)
Rated Voltage:	AC120V/60Hz
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model CE-TV55UQW1F2US, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	5150-5250MHz: Antenna 0: 14.81dBm (Conducted) Antenna 1: 14.93dBm (Conducted) 5725-5850MHz: Antenna 0: 14.17dBm (Conducted) Antenna 1: 14.61dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM,256QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	5150-5250MHz Antenna 0 & 1: 1.93dBi 5725-5850MHz Antenna 0 & 1: 1.73dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter "3646631+=" into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	ANT 0	75	75	75	/	/	/	/	/	/	/	67	67	67
	ANT 1	70	70	70	/	/	/	/	/	/	/	58	58	58
802.11n-HT20 MCS0	ANT 0	72	72	72	/	/	/	/	/	/	/	60	60	60
	ANT 1	65	65	65	/	/	/	/	/	/	/	55	55	55
Mode	Ant.	NCB: 40MHz												
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	ANT 0	72	72	/	/	/	/	/	/	60	60			
	ANT 1	65	65	/	/	/	/	/	/	53	53			

Mode	Ant.	NCB: 80MHz					
		5210	5290	5530	5610	5690	5775
65802.11ac-VH	ANT 0	70	/	/	/	/	60
80 MCS0/Nss2	ANT 1		/	/	/	/	53

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz ,5775 MHz
Note1 : All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report; 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40. Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac mode for this report; For 5150-5250MHz: Antenna 0 Gain is 1.93dBi; Antenna 1 Gain is 1.93dBi; For 5725-5850MHz: Antenna 0 Gain is 1.73dBi; Antenna 1 Gain is 1.73dBi; According to KDB 662911, for same directional gain: For 5150-5250MHz: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $1.93+10\log(2)$ dBi=4.94dBi For 5725-5850MHz: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $1.73+10\log(2)$ dBi=4.74dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI	1.5	Shielded	Without Ferrit

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Dell	9MMJ442	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2023-02-25	2024-02-24
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2023-02-25	2024-02-24
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2023-02-25	2024-02-24
WTXE1045A 1001	Power Divider	RF-Lambda	RFLT4W5M18G	14110400 027	2023-02-25	2024-02-24
☒ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☒ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18

WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A101 79	2023-02-25	2024-02-24
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
☐ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
☐ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-11A	LP228060 221	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
☒ Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{ MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3\text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500KHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTH23X05094415W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

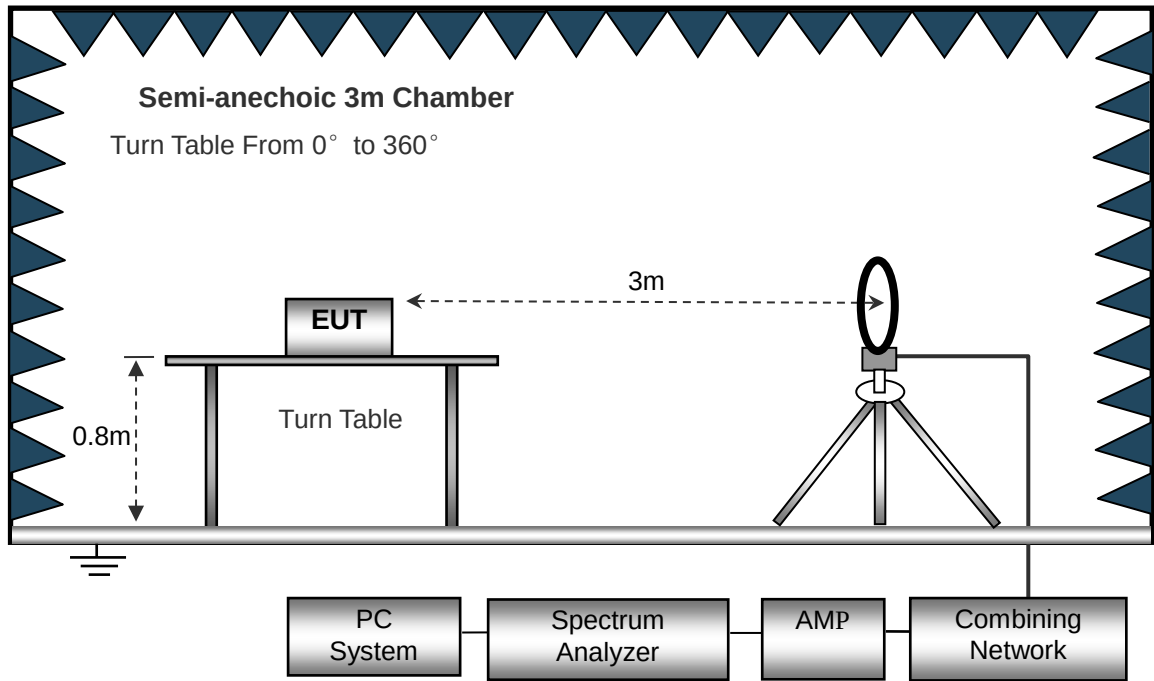
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

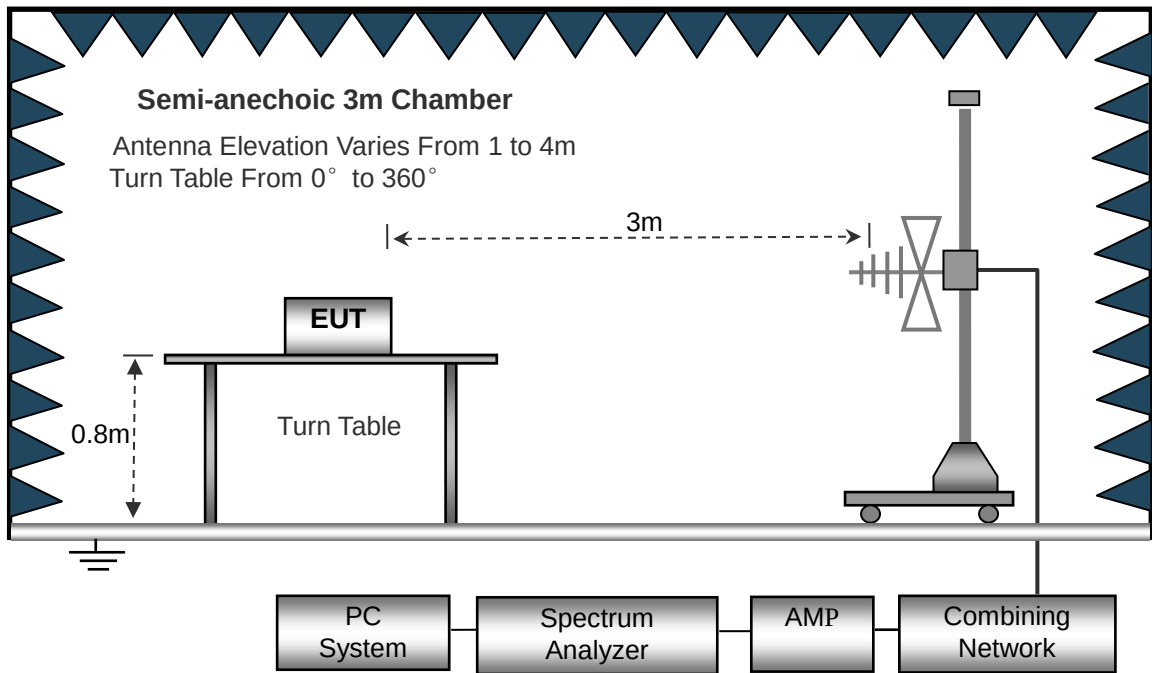
The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

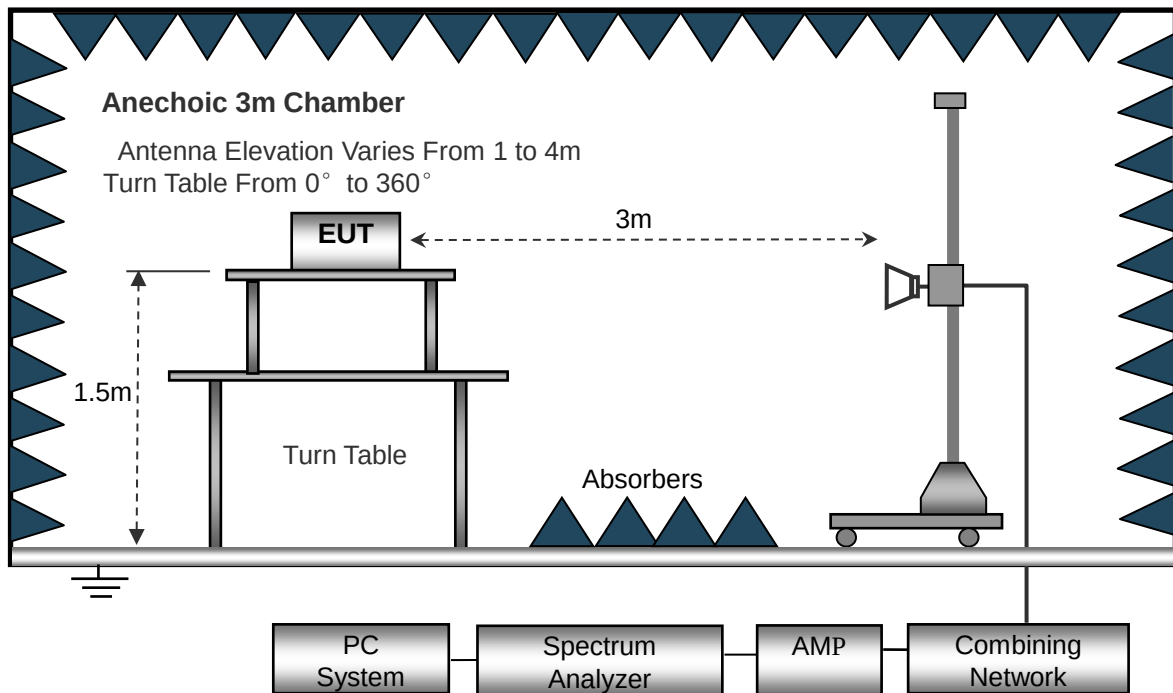
The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30 MHz to 1 GHz.



The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

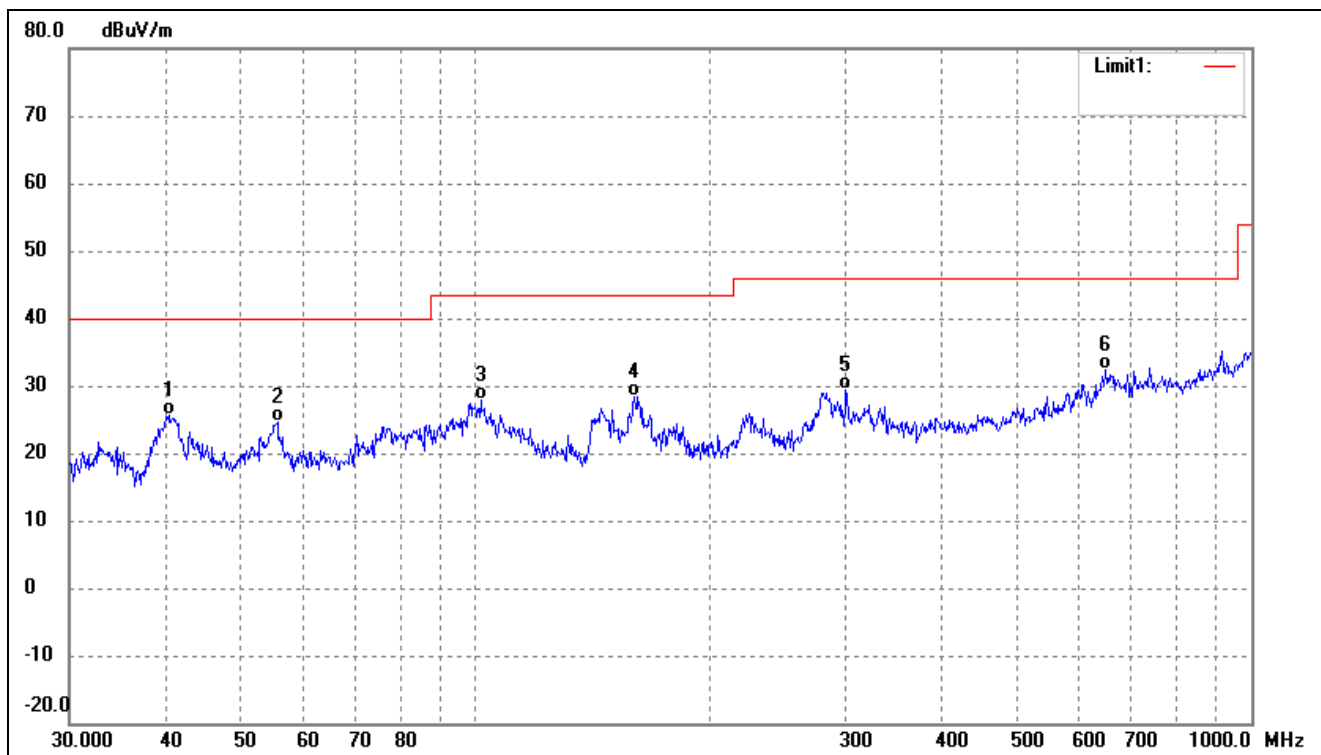
$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Antenna 0(Worst case)
- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.2757	34.14	-8.54	25.60	40.00	-14.40	-	-	QP
2	55.6094	32.43	-7.71	24.72	40.00	-15.28	-	-	QP
3	101.6443	36.41	-8.51	27.90	43.50	-15.60	-	-	QP
4	160.3457	39.59	-11.19	28.40	43.50	-15.10	-	-	QP
5	300.3673	33.97	-4.70	29.27	46.00	-16.73	-	-	QP
6	649.6597	30.30	2.00	32.30	46.00	-13.70	-	-	QP

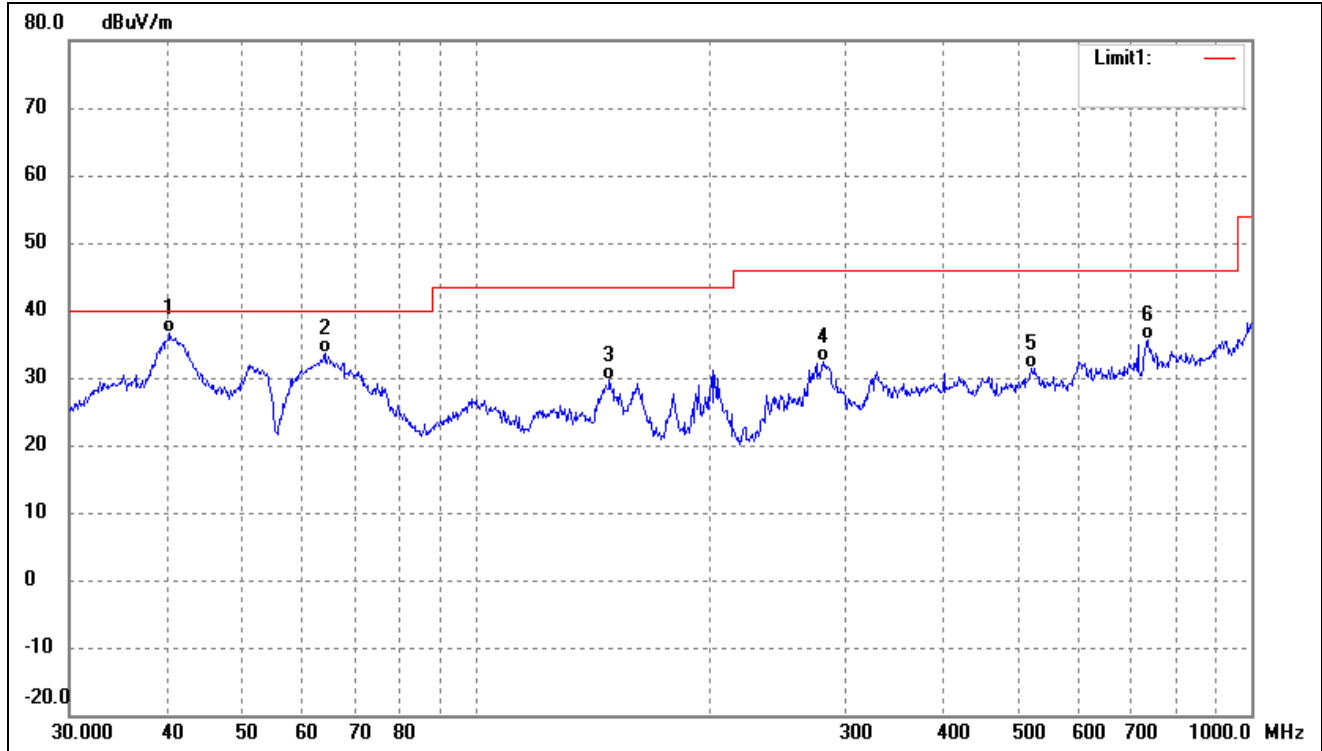
802.11a(Worst case)

Test Channel

5180MHz

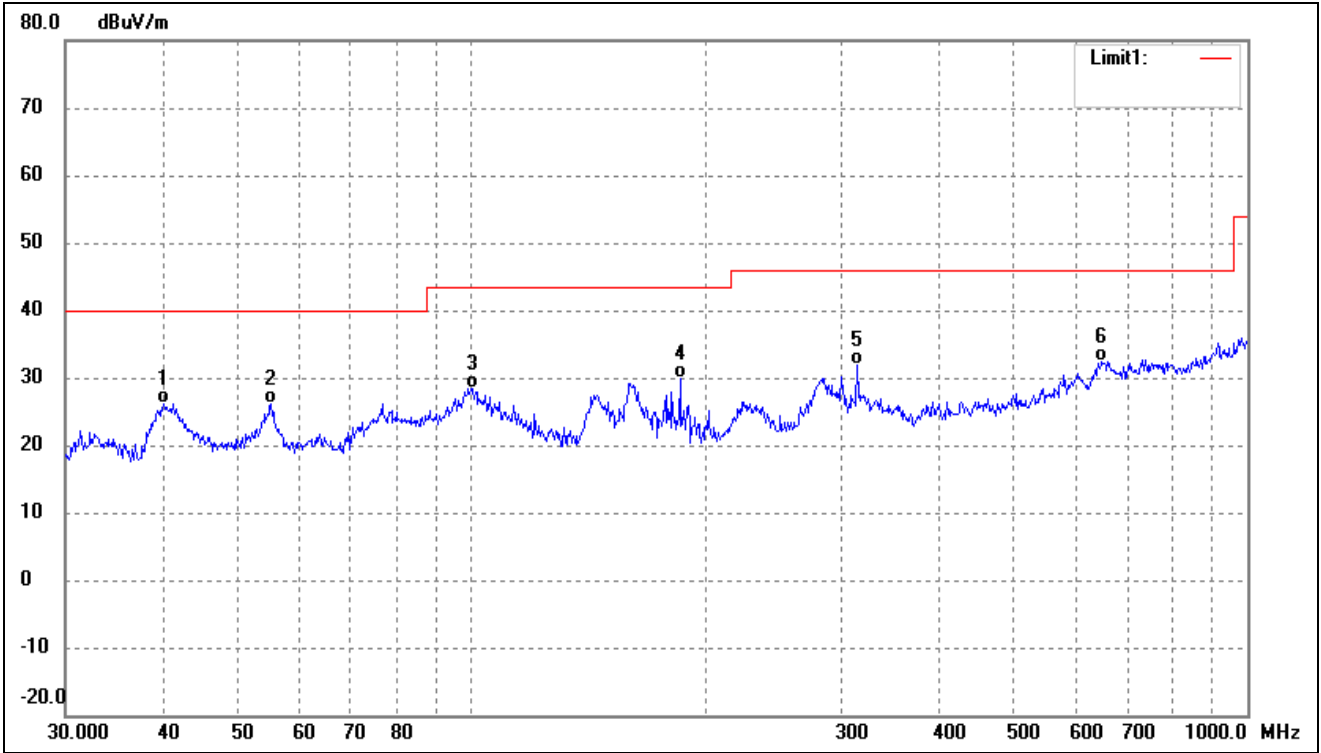
Polarity:

Vertical



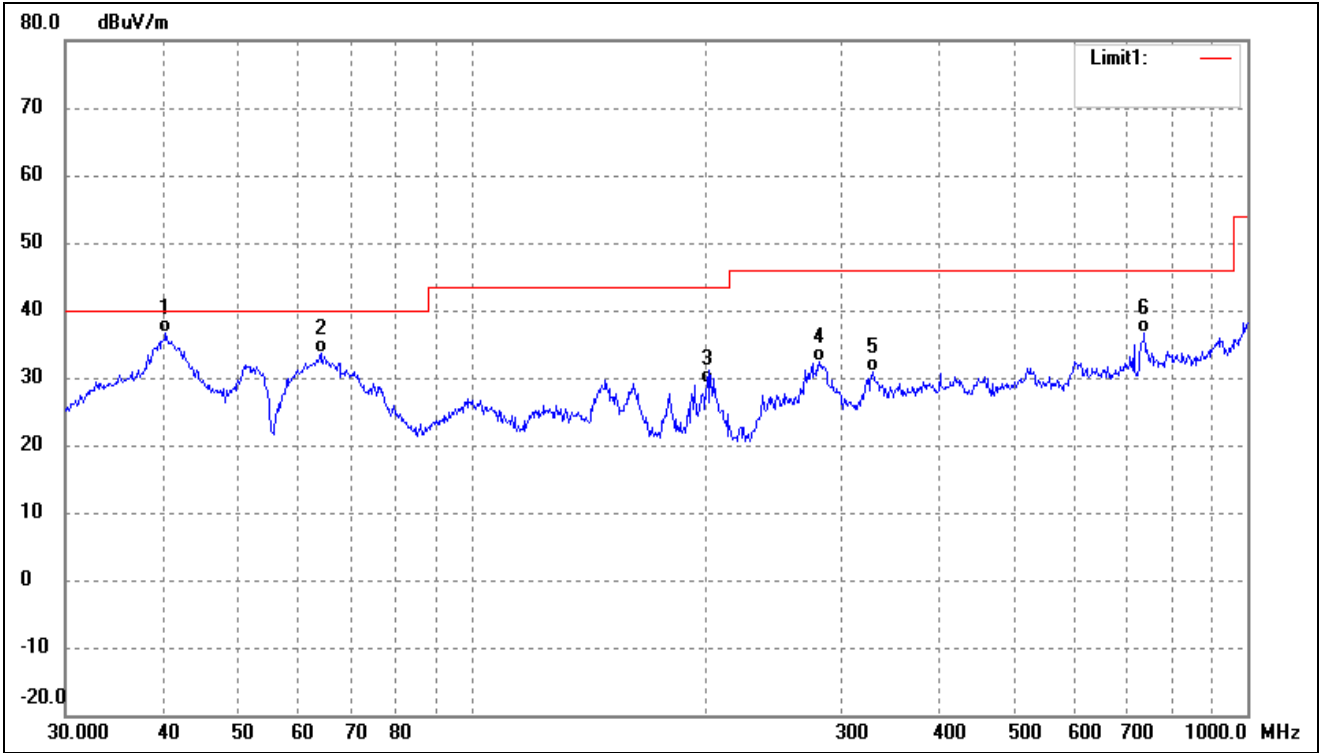
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.4172	45.13	-8.50	36.63	40.00	-3.37	-	-	QP
2	63.9828	43.07	-9.52	33.55	40.00	-6.45	-	-	QP
3	148.9625	41.36	-11.76	29.60	43.50	-13.90	-	-	QP
4	281.0075	37.71	-5.26	32.45	46.00	-13.55	-	-	QP
5	520.8882	32.25	-0.87	31.38	46.00	-14.62	-	-	QP
6	734.4913	32.14	3.53	35.67	46.00	-10.33	-	-	QP

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal



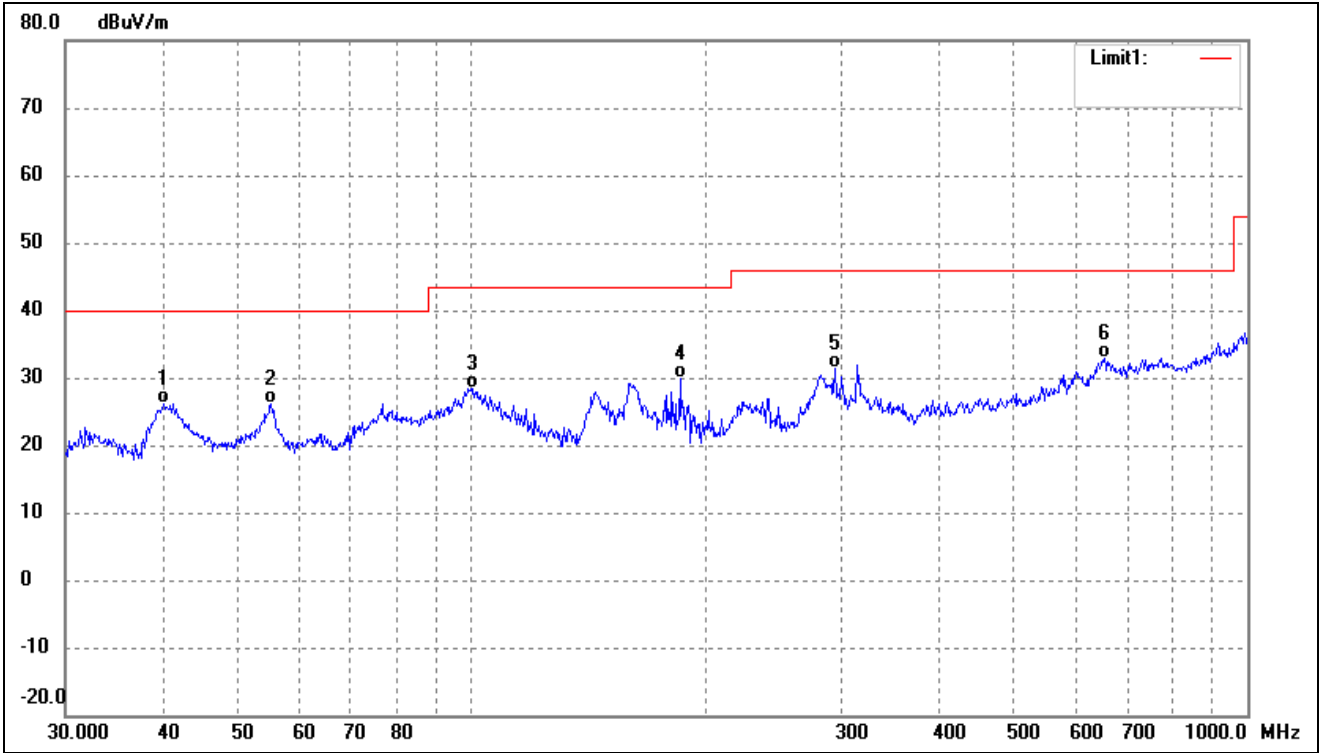
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.1347	34.78	-8.57	26.21	40.00	-13.79	-	-	QP
2	55.2207	33.67	-7.65	26.02	40.00	-13.98	-	-	QP
3	100.5806	37.07	-8.58	28.49	43.50	-15.01	-	-	QP
4	185.7882	39.02	-9.20	29.82	43.50	-13.68	-	-	QP
5	314.3765	36.28	-4.48	31.80	46.00	-14.20	-	-	QP
6	649.6597	30.30	2.00	32.30	46.00	-13.70	-	-	QP

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Vertical



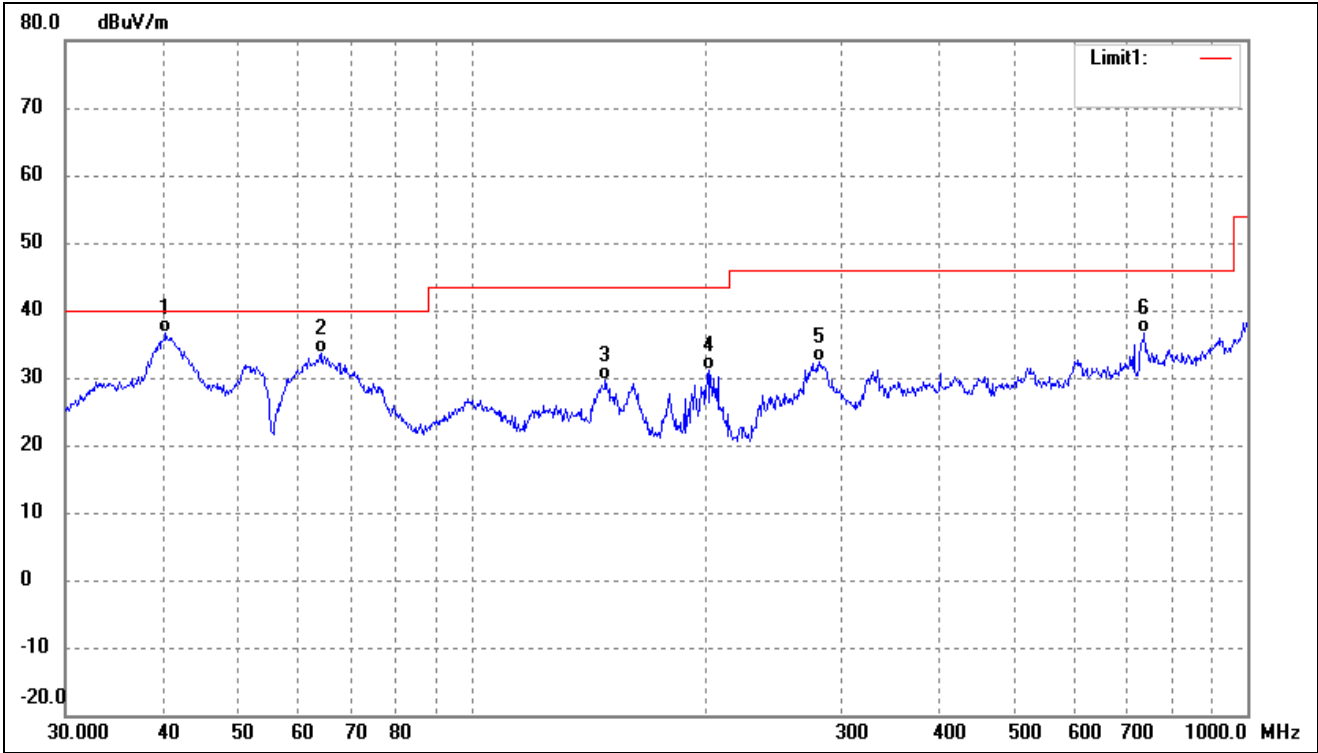
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.4172	45.13	-8.50	36.63	40.00	-3.37	-	-	QP
2	63.9828	43.07	-9.52	33.55	40.00	-6.45	-	-	QP
3	201.3930	37.05	-8.00	29.05	43.50	-14.45	-	-	QP
4	281.0075	37.71	-5.26	32.45	46.00	-13.55	-	-	QP
5	329.0390	34.79	-3.89	30.90	46.00	-15.10	-	-	QP
6	737.0714	33.02	3.61	36.63	46.00	-9.37	-	-	QP

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.1347	34.78	-8.57	26.21	40.00	-13.79	-	-	QP
2	55.2207	33.67	-7.65	26.02	40.00	-13.98	-	-	QP
3	100.5806	37.07	-8.58	28.49	43.50	-15.01	-	-	QP
4	185.7882	39.02	-9.20	29.82	43.50	-13.68	-	-	QP
5	294.1137	36.13	-4.83	31.30	46.00	-14.70	-	-	QP
6	654.2318	30.79	2.03	32.82	46.00	-13.18	-	-	QP

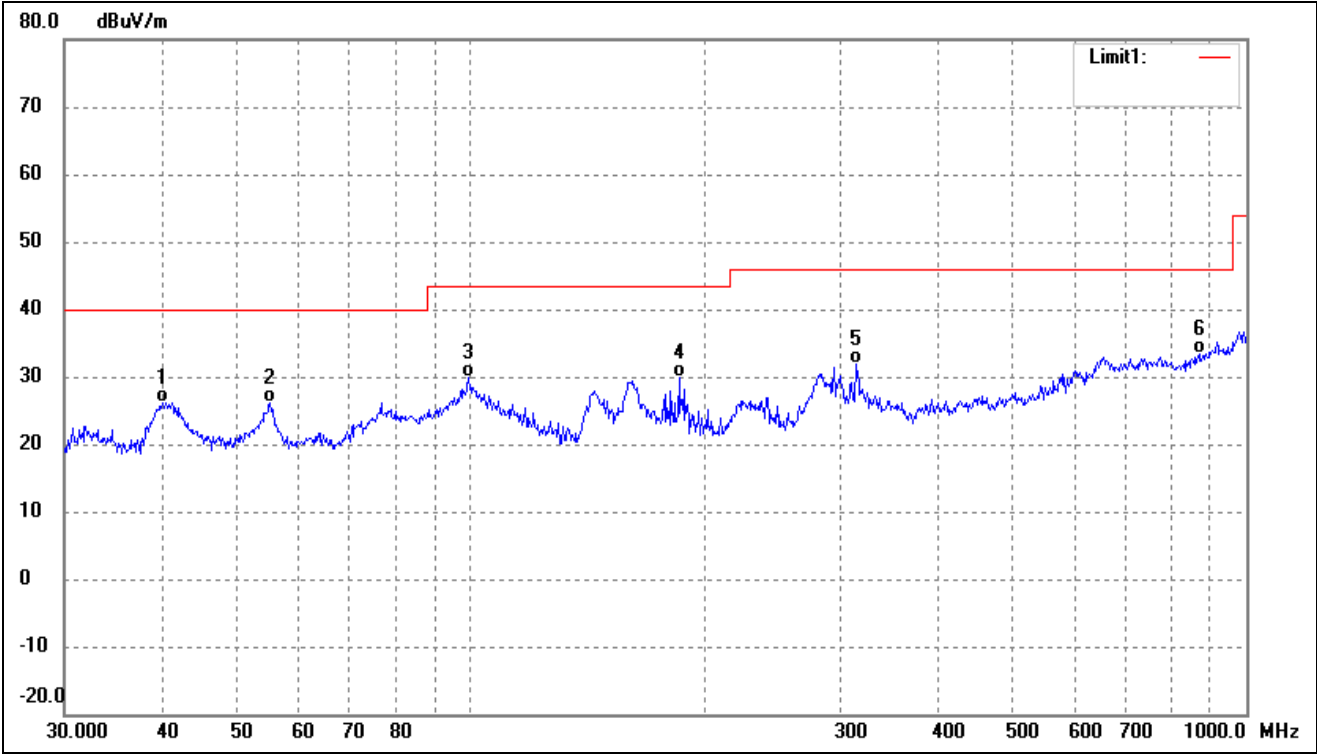
802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.4172	45.13	-8.50	36.63	40.00	-3.37	-	-	QP
2	63.9828	43.07	-9.52	33.55	40.00	-6.45	-	-	QP
3	148.9625	41.36	-11.76	29.60	43.50	-13.90	-	-	QP
4	202.1005	39.14	-7.99	31.15	43.50	-12.35	-	-	QP
5	281.0075	37.71	-5.26	32.45	46.00	-13.55	-	-	QP
6	737.0714	33.02	3.61	36.63	46.00	-9.37	-	-	QP

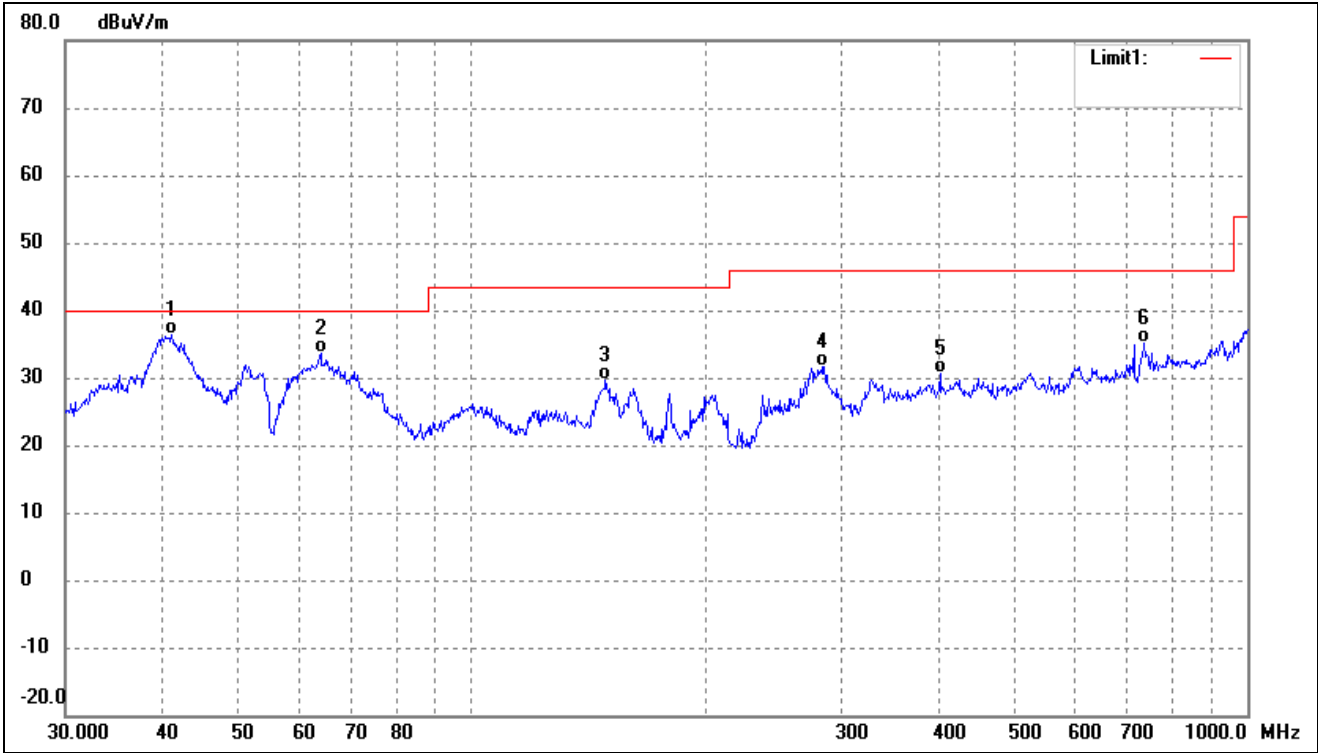
5725-5850MHz

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.1347	34.78	-8.57	26.21	40.00	-13.79	-	-	QP
2	55.2207	33.67	-7.65	26.02	40.00	-13.98	-	-	QP
3	99.5281	38.43	-8.66	29.77	43.50	-13.73	-	-	QP
4	185.7882	39.02	-9.20	29.82	43.50	-13.68	-	-	QP
5	314.3765	36.28	-4.48	31.80	46.00	-14.20	-	-	QP
6	872.1832	28.29	5.17	33.46	46.00	-12.54	-	-	QP

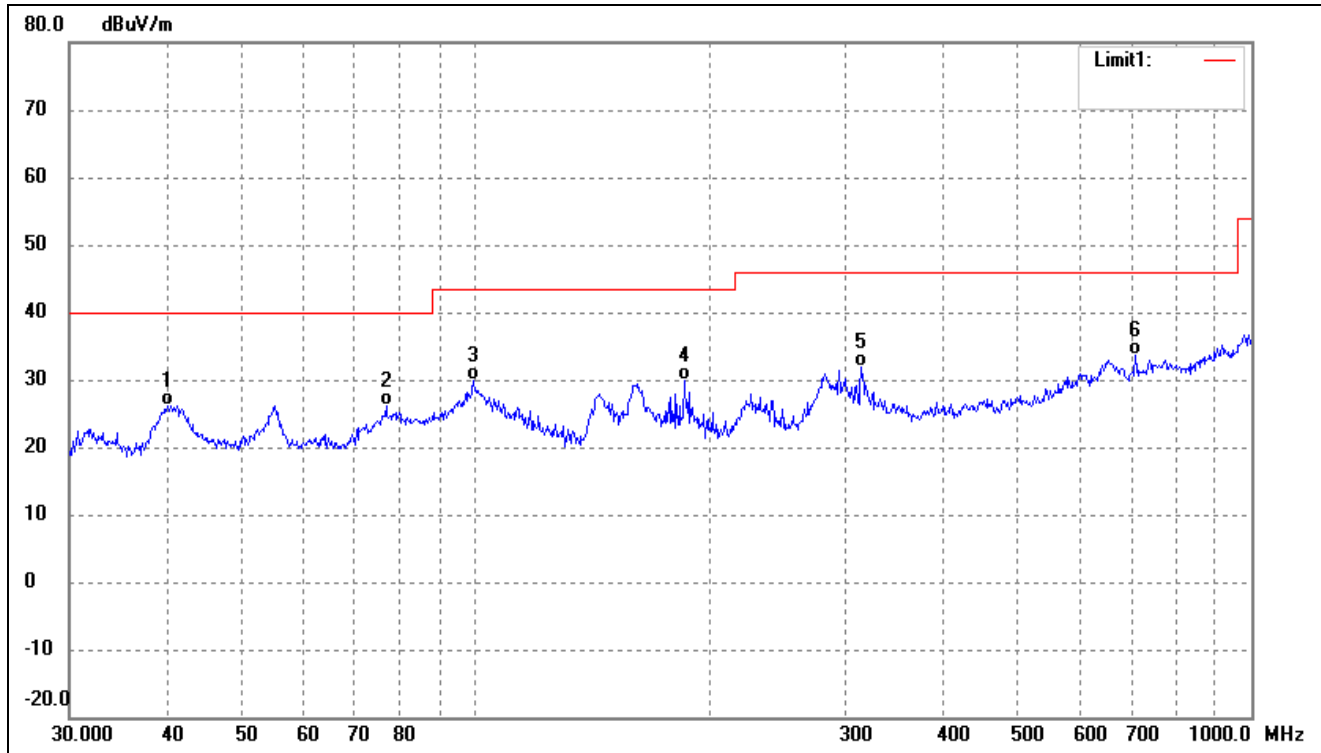
802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (□)	Height (cm)	Remark
1	41.1320	44.68	-8.38	36.30	40.00	-3.70	-	-	QP
2	63.9828	43.07	-9.52	33.55	40.00	-6.45	-	-	QP
3	148.9625	41.36	-11.76	29.60	43.50	-13.90	-	-	QP
4	283.9792	36.69	-5.14	31.55	46.00	-14.45	-	-	QP
5	401.8385	33.12	-2.48	30.64	46.00	-15.36	-	-	QP
6	737.0714	31.53	3.61	35.14	46.00	-10.86	-	-	QP

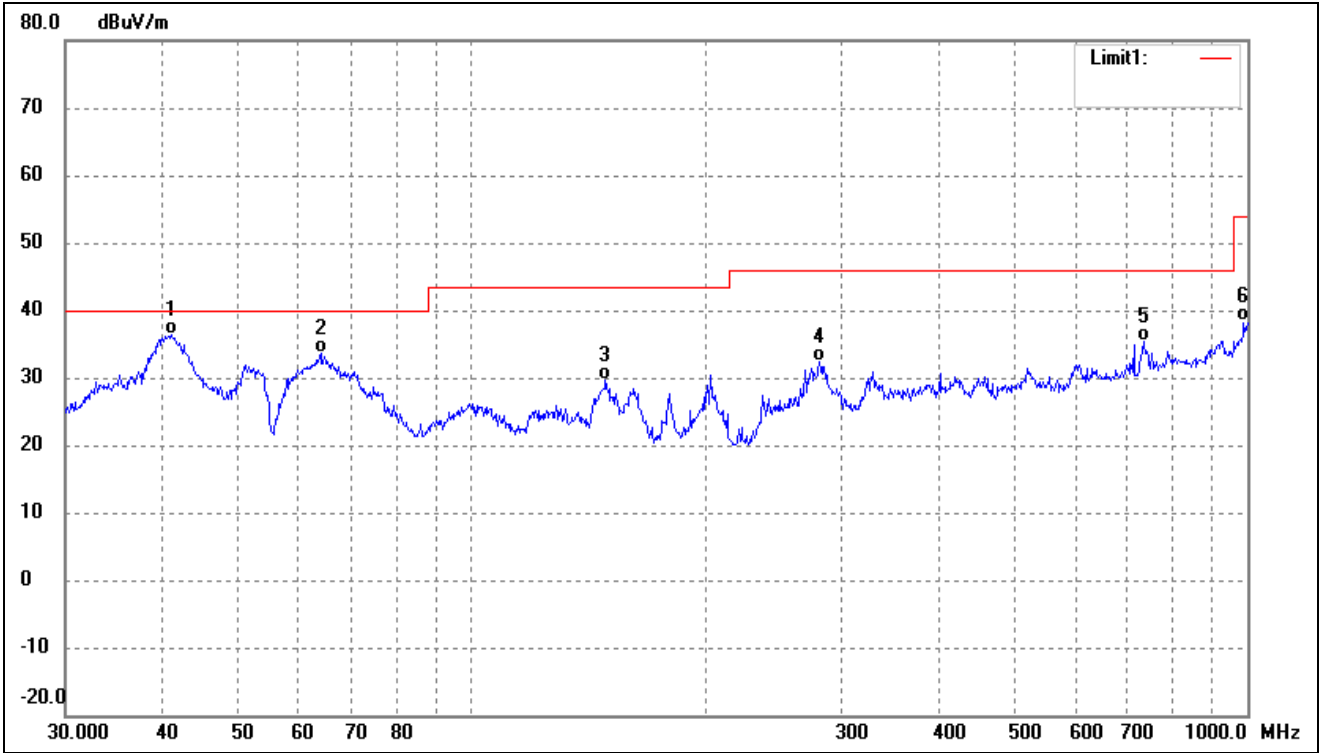
802.11a(worst case)

Test Channel	5785MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



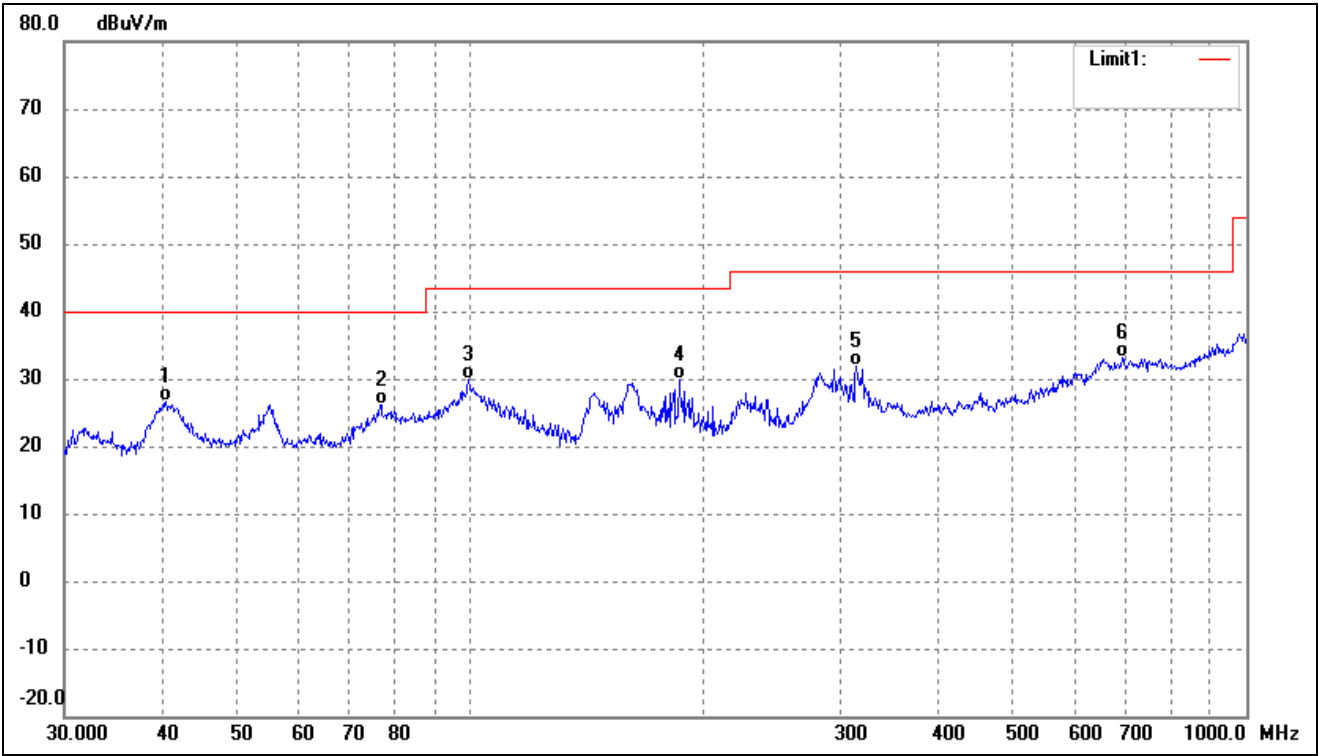
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.1347	34.78	-8.57	26.21	40.00	-13.79	-	-	QP
2	76.7808	38.95	-12.77	26.18	40.00	-13.82	-	-	QP
3	99.5281	38.43	-8.66	29.77	43.50	-13.73	-	-	QP
4	185.7882	39.02	-9.20	29.82	43.50	-13.68	-	-	QP
5	314.3765	36.28	-4.48	31.80	46.00	-14.20	-	-	QP
6	709.1823	31.50	2.11	33.61	46.00	-12.39	-	-	QP

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Vertical



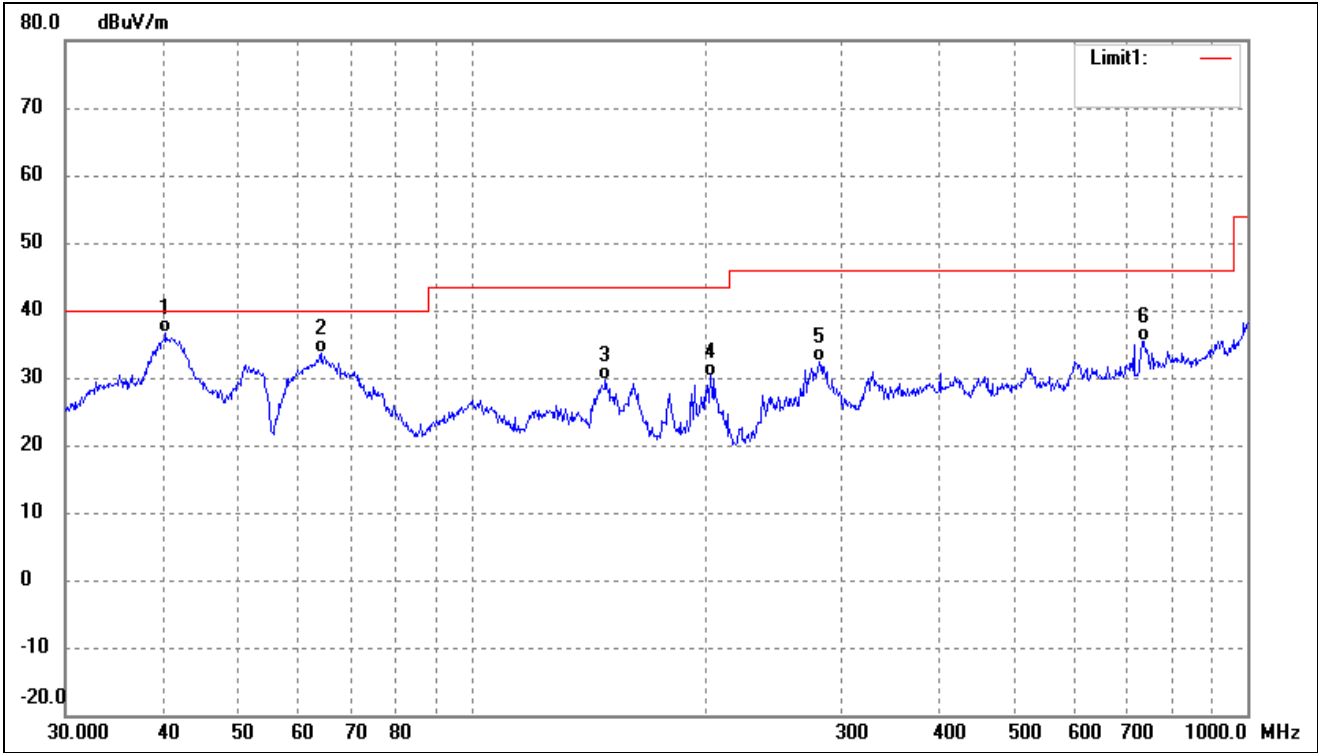
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	41.1320	44.68	-8.38	36.30	40.00	-3.70	-	-	QP
2	63.9828	43.07	-9.52	33.55	40.00	-6.45	-	-	QP
3	148.9625	41.36	-11.76	29.60	43.50	-13.90	-	-	QP
4	281.0075	37.71	-5.26	32.45	46.00	-13.55	-	-	QP
5	734.4913	31.89	3.53	35.42	46.00	-10.58	-	-	QP
6	1000.0000	32.11	6.17	38.28	54.00	-15.72	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.5591	35.07	-8.48	26.59	40.00	-13.41	-	-	QP
2	76.7808	38.95	-12.77	26.18	40.00	-13.82	-	-	QP
3	99.5281	38.43	-8.66	29.77	43.50	-13.73	-	-	QP
4	185.7882	39.02	-9.20	29.82	43.50	-13.68	-	-	QP
5	314.3765	36.28	-4.48	31.80	46.00	-14.20	-	-	QP
6	691.9867	31.03	2.07	33.10	46.00	-12.90	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

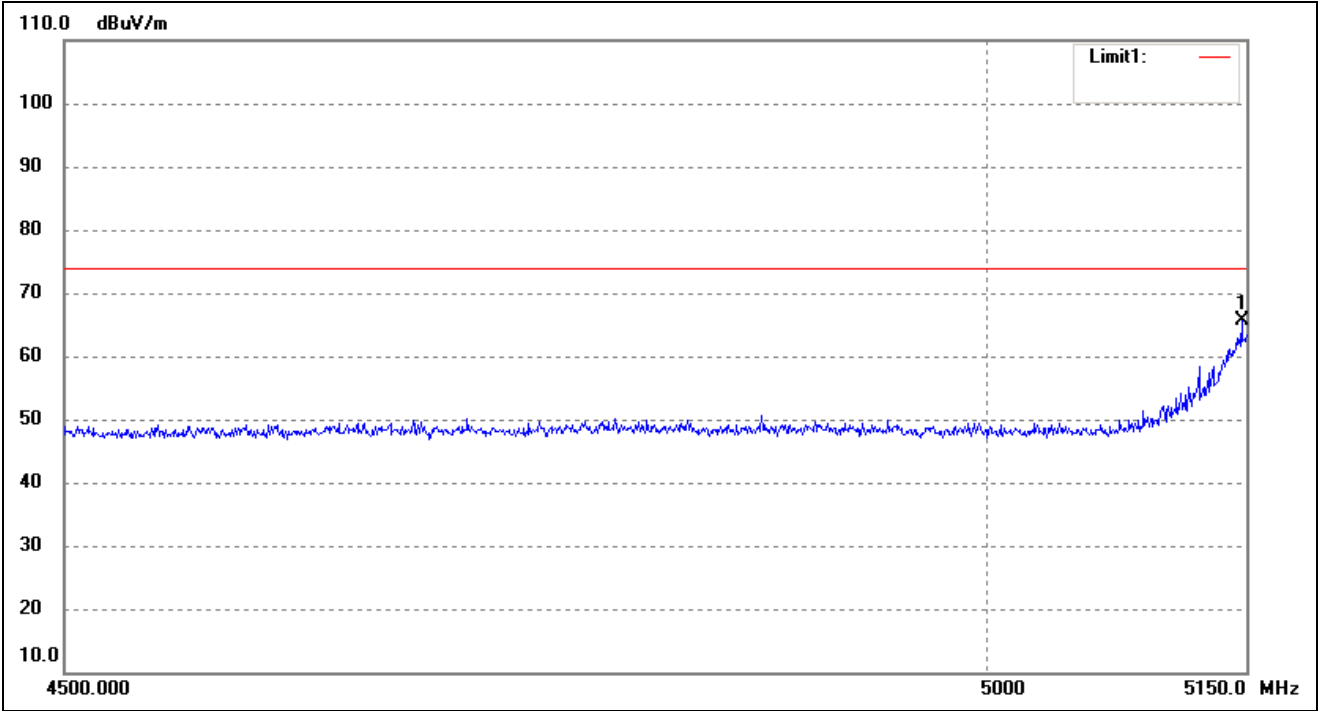


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.4172	45.13	-8.50	36.63	40.00	-3.37	-	-	QP
2	63.9828	43.07	-9.52	33.55	40.00	-6.45	-	-	QP
3	148.9625	41.36	-11.76	29.60	43.50	-13.90	-	-	QP
4	203.5228	38.27	-8.02	30.25	43.50	-13.25	-	-	QP
5	281.0075	37.71	-5.26	32.45	46.00	-13.55	-	-	QP
6	734.4913	31.89	3.53	35.42	46.00	-10.58	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

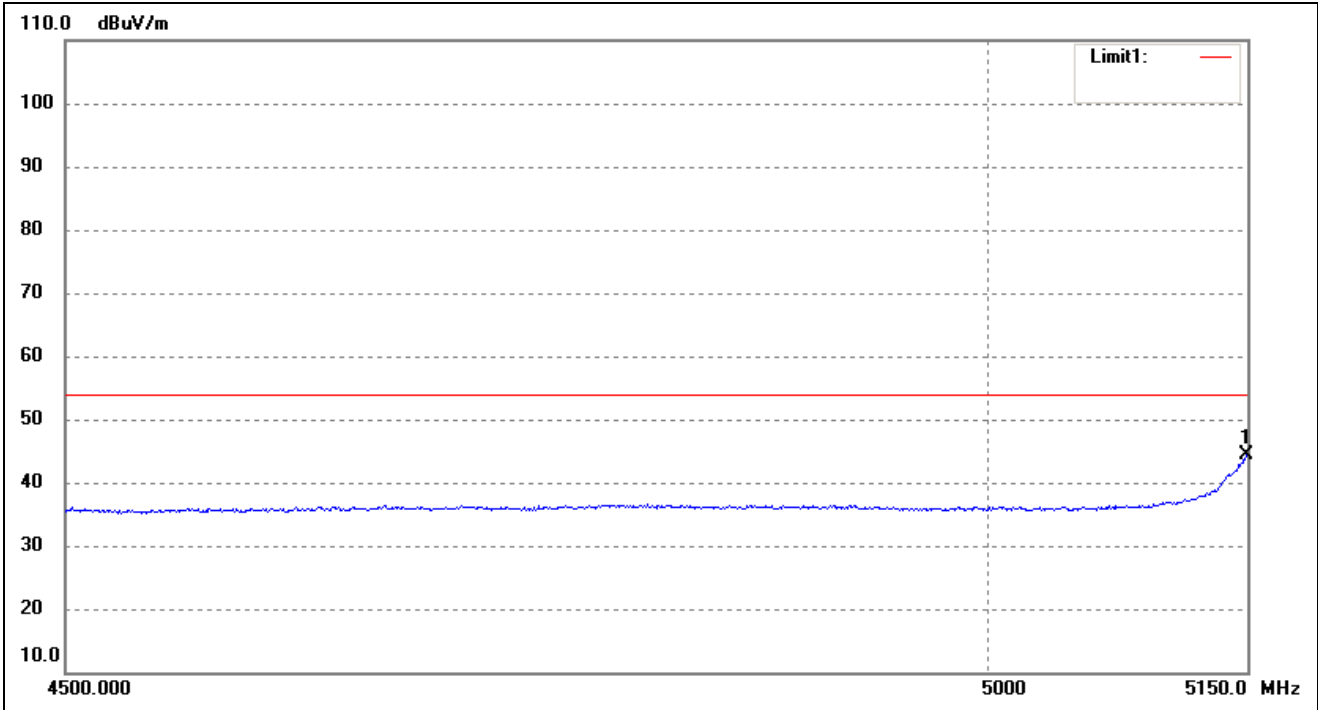
- Spurious Emission above 1GHz
- Antenna 0(worst case)

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Corr. dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	113.3163	26.95	-13.39	13.56	43.50	-29.94	-	-	peak

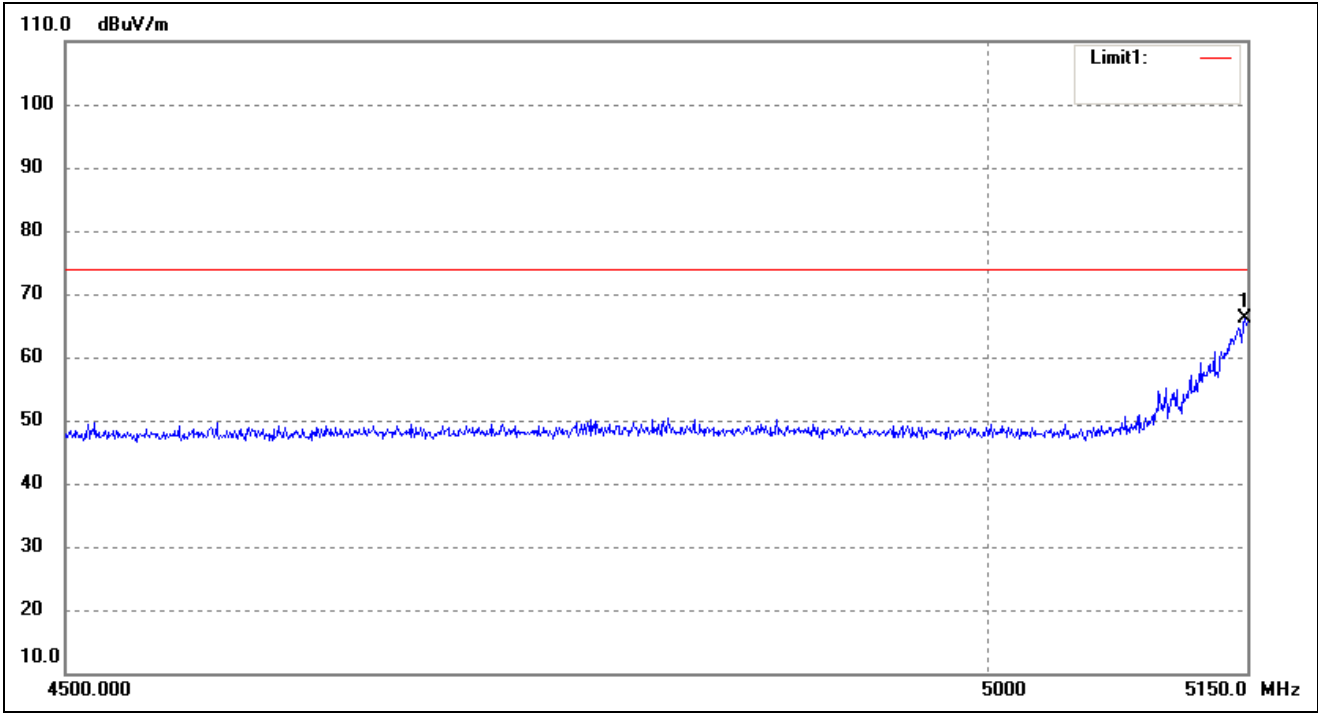
802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequenc y	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(□)	(cm)	
1	5149.305	48.59	-4.32	44.27	54.00	-9.73	-	-	AVG

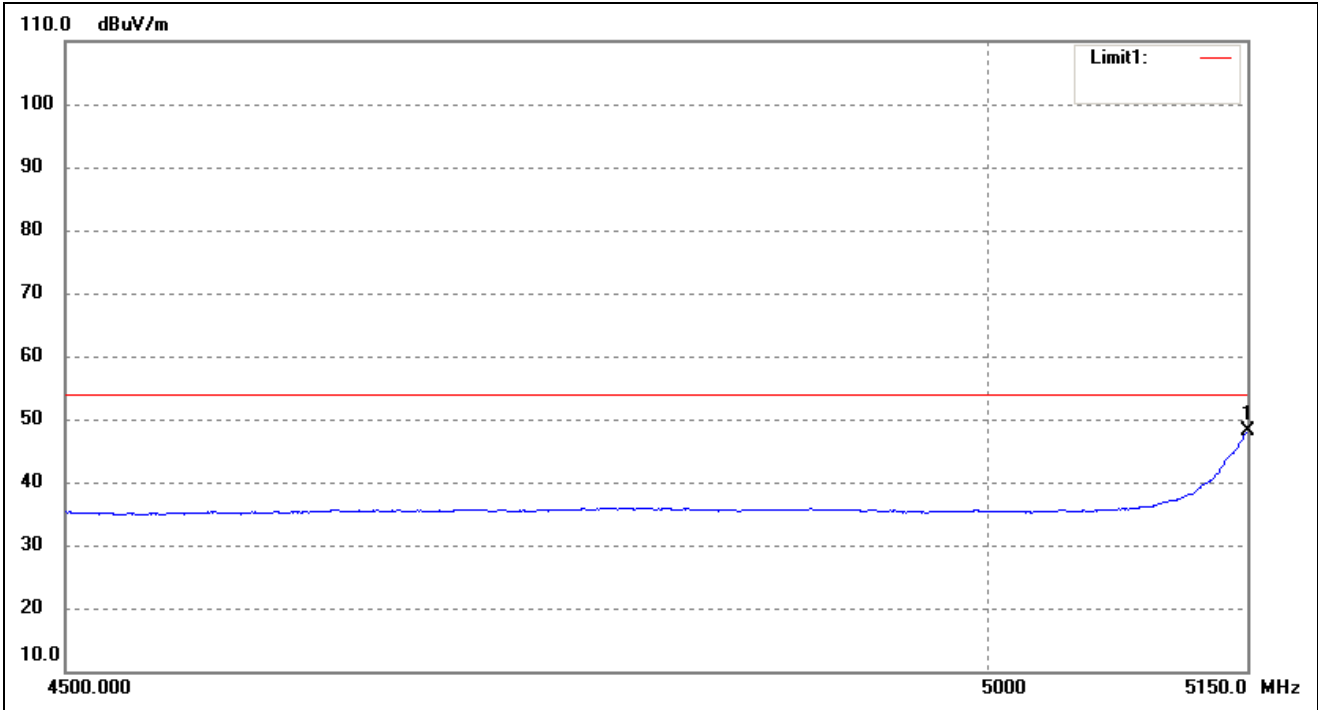
➤ Antenna 1

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequenc y	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(□)	(cm)	
1	5148.610	70.50	-4.32	66.18	74.00	-7.82	-	-	peak

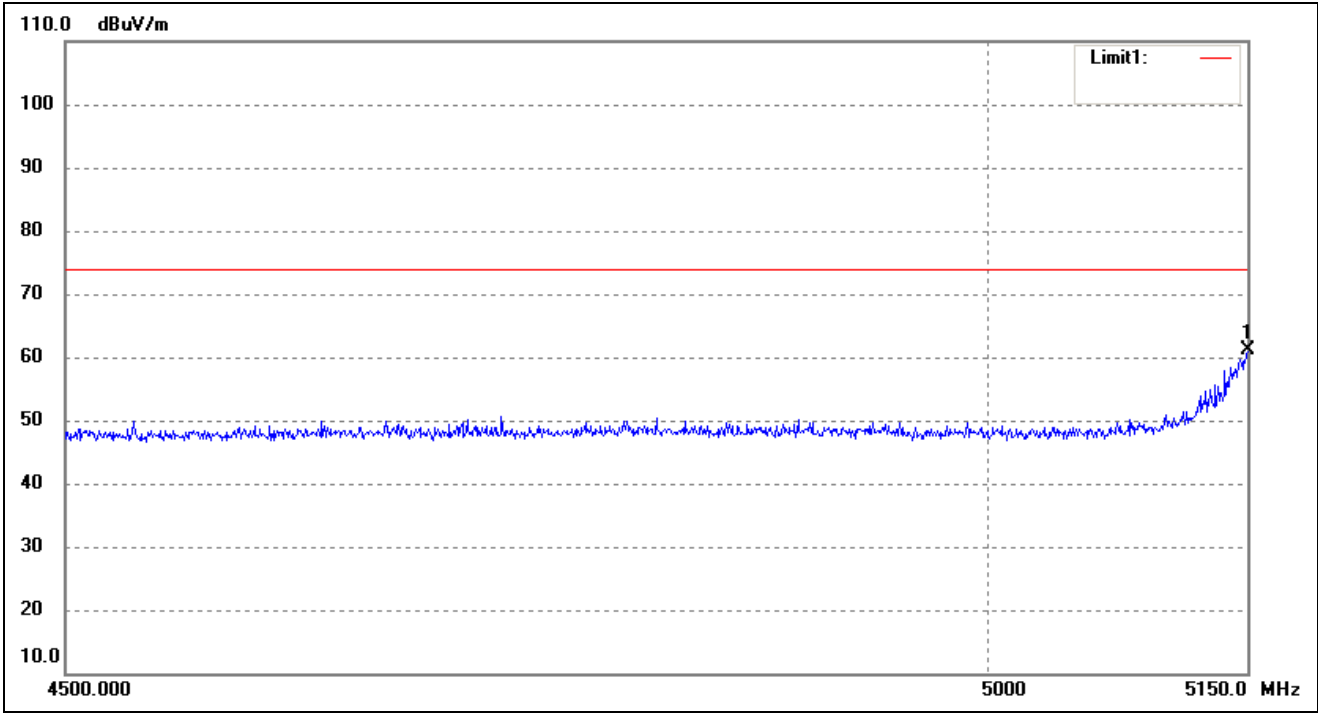
802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (□)	Height (cm)	Remark
1	5150.000	52.57	-4.32	48.25	54.00	-5.75	-	-	AVG

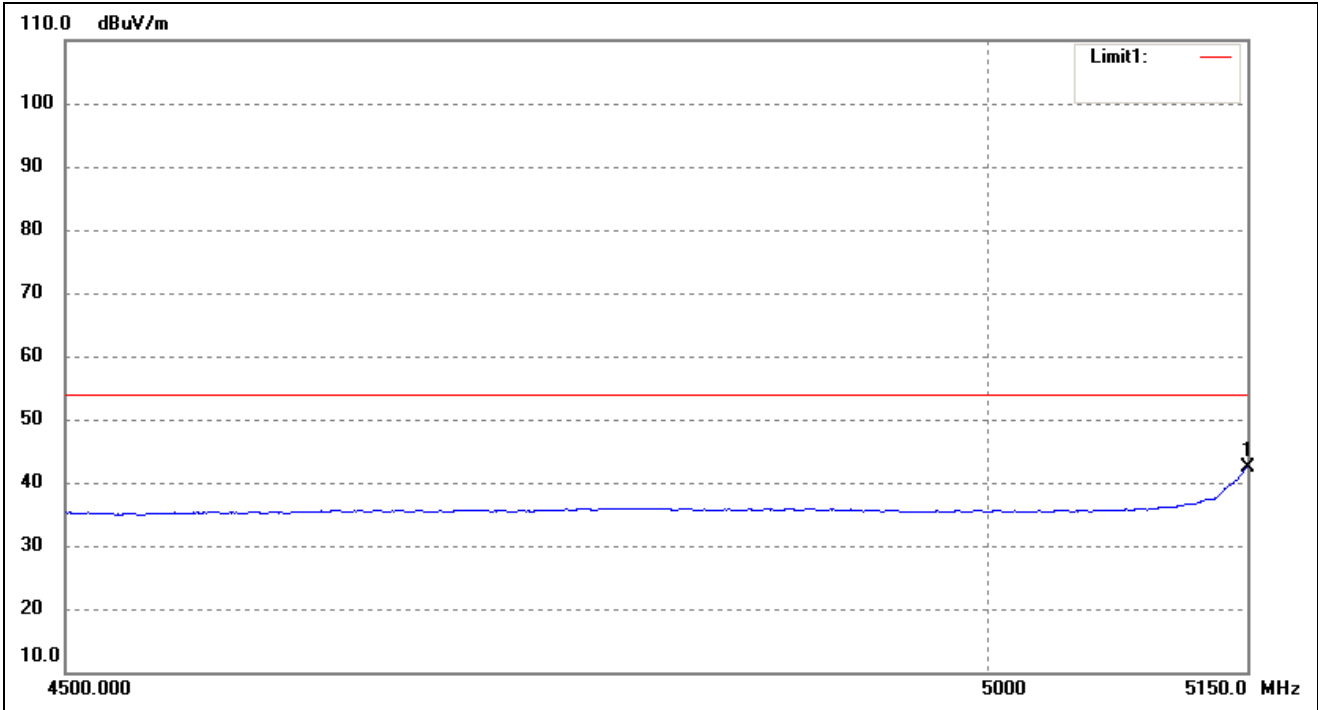
➤ Antenna 0 & Antenna 1

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



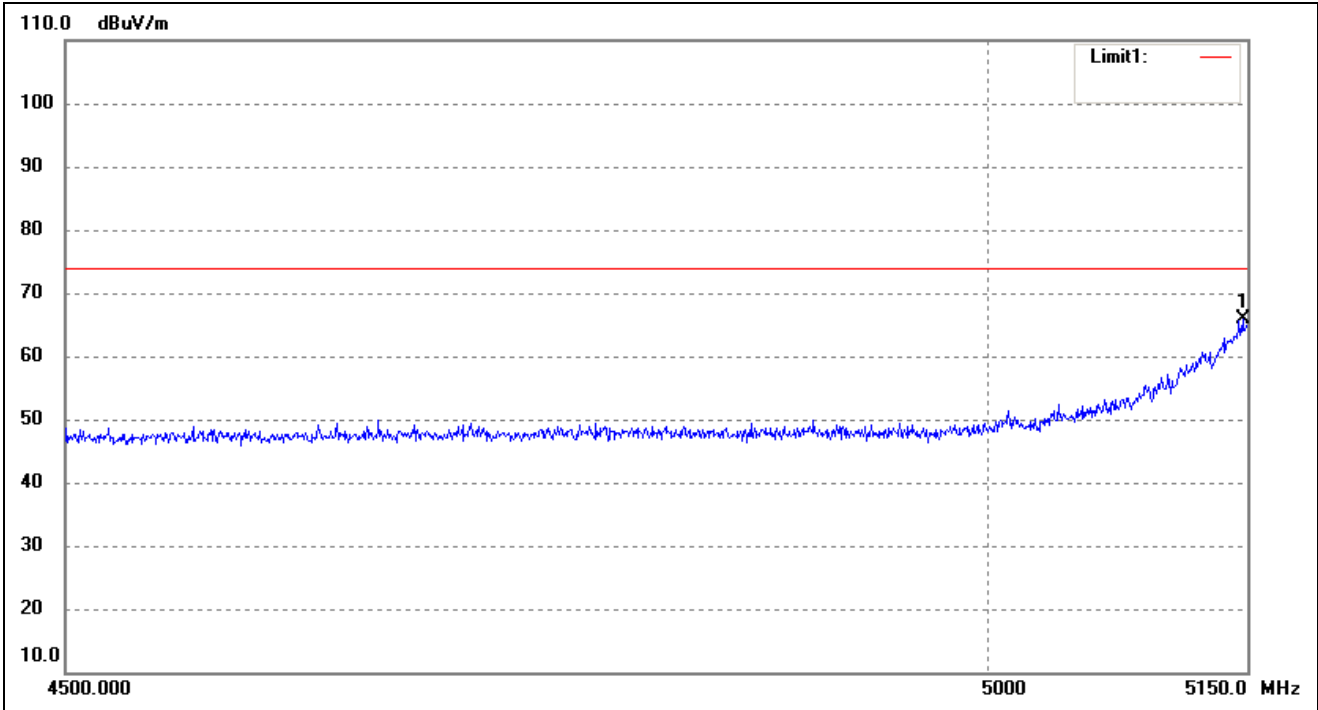
No.	Frequenc y	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(□)	(cm)	
1	5150.000	65.46	-4.32	61.14	74.00	-12.86	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



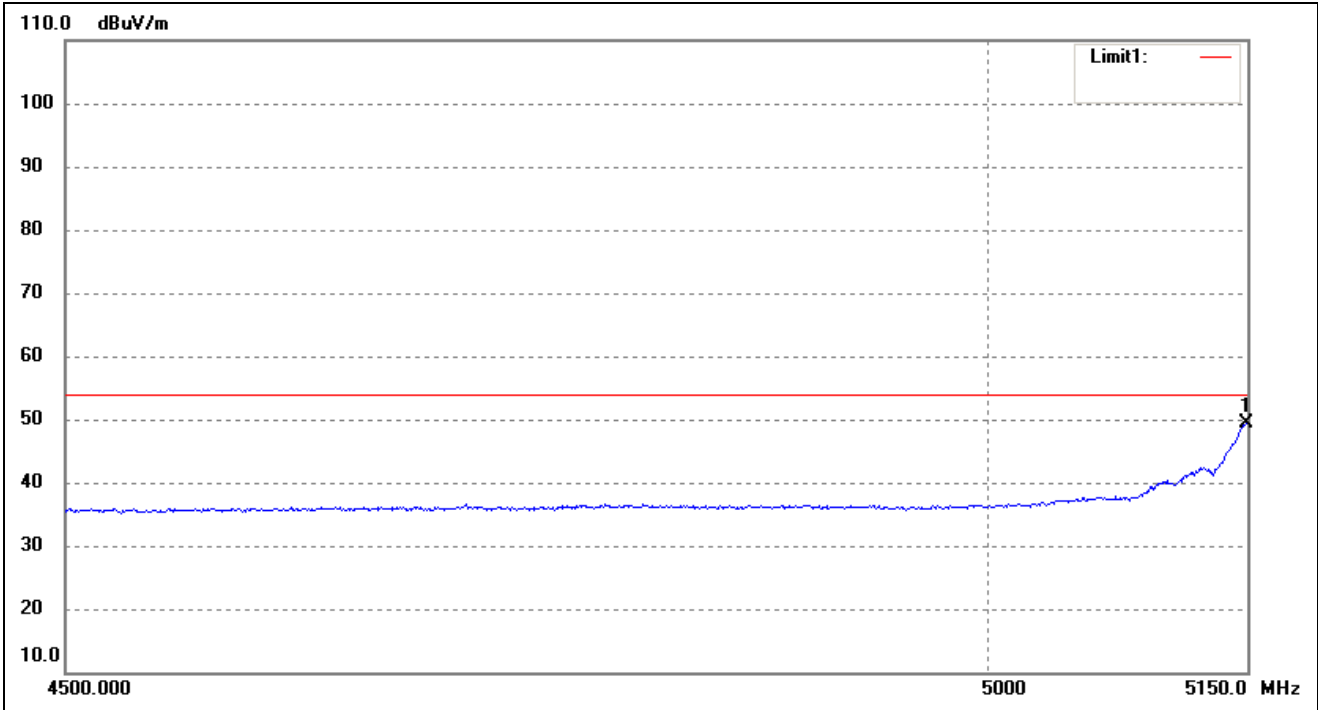
No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	5150.000	46.76	-4.32	42.44	54.00	-11.56	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



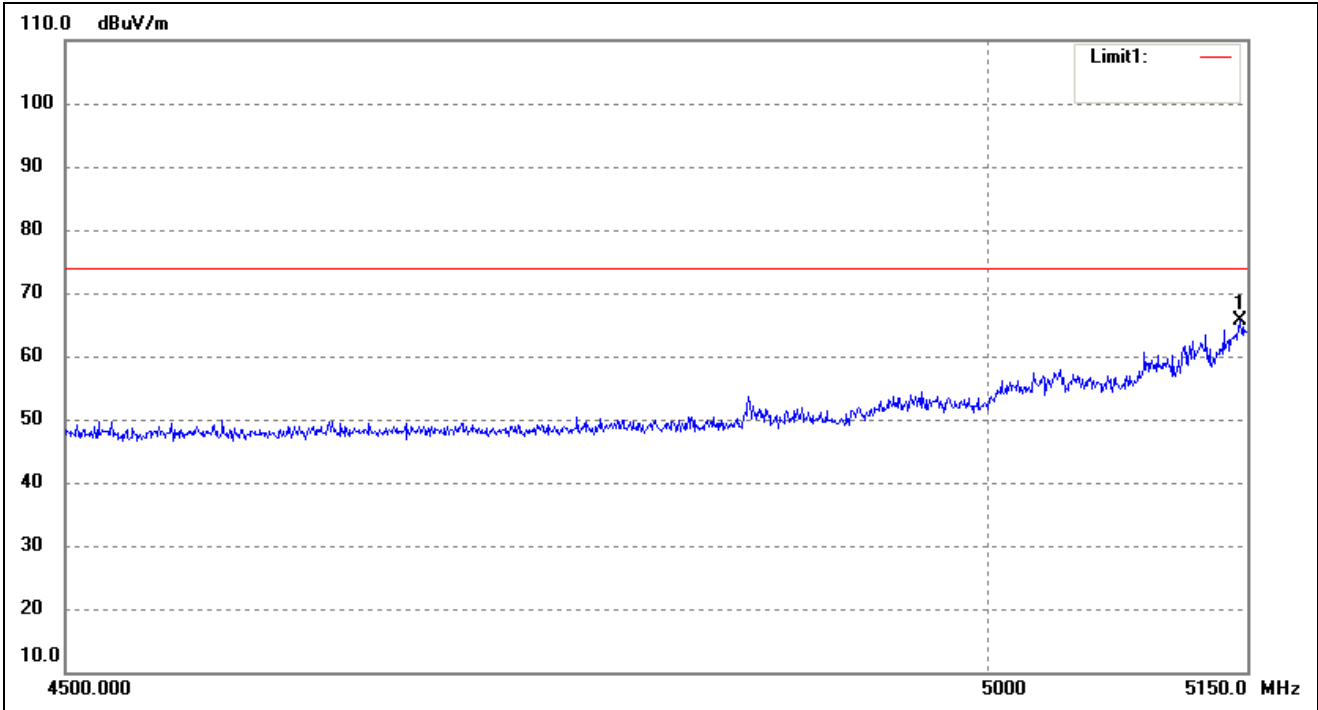
No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	5147.221	70.23	-4.32	65.91	74.00	-8.09	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



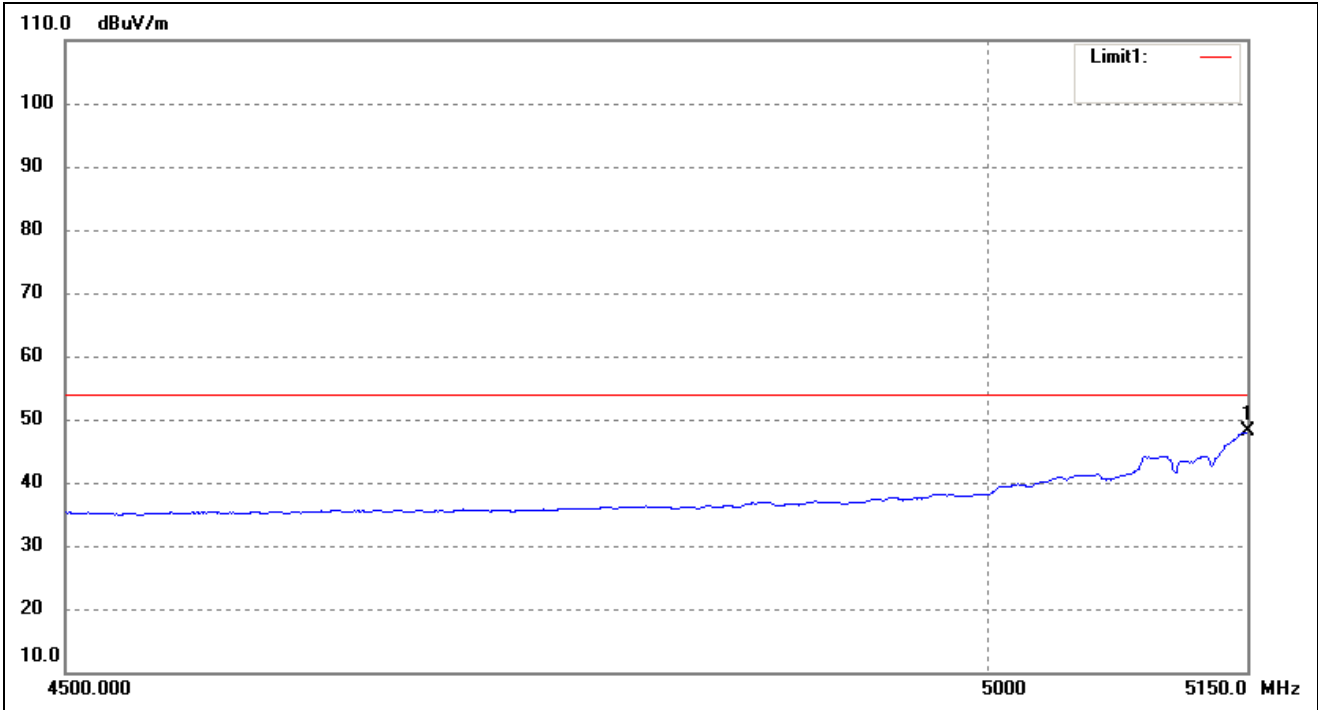
No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (□)	Height (cm)	Remark
1	5149.305	53.66	-4.32	49.34	54.00	-4.66	-	-	AVG

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	5145.833	69.92	-4.32	65.60	74.00	-8.40	-	-	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequenc y (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	5150.000	52.39	-4.32	48.07	54.00	-5.93	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna 0(worst case)
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.78	7.11	61.89	74	-12.11	H	PK
15540	36.66	8.22	44.88	54	-9.12	H	AV
10360	57.64	7.11	64.75	74	-9.25	V	PK
15540	39.12	8.22	47.34	54	-6.66	V	AV
Middle Channel (5200MHz)							
10400	56.50	7.22	63.72	74	-10.28	H	PK
15600	33.78	8.67	42.45	54	-11.55	H	AV
10400	55.27	7.22	62.49	74	-11.51	V	PK
15600	32.27	8.67	40.94	54	-13.06	V	AV
High Channel (5240MHz)							
10480	54.79	7.69	62.48	74	-11.52	H	PK
15720	34.40	8.93	43.33	54	-10.67	H	AV
10480	53.39	7.69	61.08	74	-12.92	V	PK
15720	36.43	8.93	45.36	54	-8.64	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.53	9.45	64.98	74	-9.02	H	PK
17235	31.36	10.36	41.72	54	-12.28	H	AV
11490	52.50	9.45	61.95	74	-12.05	V	PK
17235	28.55	10.36	38.91	54	-15.09	V	AV
Middle Channel (5785MHz)							
11570	56.60	9.62	66.22	74	-7.78	H	PK
17355	32.69	10.67	43.36	54	-10.64	H	AV
11570	54.31	9.62	63.93	74	-10.07	V	PK
17355	36.38	10.67	47.05	54	-6.95	V	AV
High Channel (5825MHz)							
11650	56.64	9.84	66.48	74	-7.52	H	PK
17475	33.63	10.95	44.58	54	-9.42	H	AV
11650	50.28	9.84	60.12	74	-13.88	V	PK
17475	35.70	10.95	46.65	54	-7.35	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.32	-27
Highest	Above 5350	-42.52	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-47.60	-27
	5650 to 5700	-36.76	-27 to -17
	5700 to 5720	-29.00	-17 to 15.6
	5720 to 5725	-18.41	15.6 to 27
Highest	5850 to 5855	-15.91	27 to 15.6
	5855 to 5875	-25.95	15.6 to -17
	5875 to 5925	-35.19	-17 to -27
	Above 5925	-40.16	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.11	7.11	62.22	74	-11.78	H	PK
15540	37.22	8.22	45.44	54	-8.56	H	AV
10360	56.07	7.11	63.18	74	-10.82	V	PK
15540	38.62	8.22	46.84	54	-7.16	V	AV
Middle Channel (5200MHz)							
10400	57.86	7.22	65.08	74	-8.92	H	PK
15600	36.50	8.67	45.17	54	-8.83	H	AV
10400	55.69	7.22	62.91	74	-11.09	V	PK
15600	31.19	8.67	39.86	54	-14.14	V	AV
High Channel (5240MHz)							
10480	54.50	7.69	62.19	74	-11.81	H	PK
15720	34.18	8.93	43.11	54	-10.89	H	AV
10480	53.79	7.69	61.48	74	-12.52	V	PK
15720	31.90	8.93	40.83	54	-13.17	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	9.45	65.76	74	-8.24	9.45	H	PK
17235	10.36	45.11	54	-8.89	10.36	H	AV
11490	9.45	64.77	74	-9.23	9.45	V	PK
17235	10.36	40.60	54	-13.40	10.36	V	AV
Middle Channel (5785MHz)							
11570	9.62	65.50	74	-8.50	9.62	H	PK
17355	10.67	42.67	54	-11.33	10.67	H	AV
11570	9.62	61.57	74	-12.43	9.62	V	PK
17355	10.67	46.79	54	-7.21	10.67	V	AV
High Channel (5825MHz)							
11650	9.84	61.45	74	-12.55	9.84	H	PK
17475	10.95	45.71	54	-8.29	10.95	H	AV
11650	9.84	61.98	74	-12.02	9.84	V	PK
17475	10.95	41.78	54	-12.22	10.95	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-30.23	-27
Highest	Above 5350	-36.53	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.80	-27
	5650 to 5700	-37.99	-27 to -17
	5700 to 5720	-25.18	-17 to 15.6
	5720 to 5725	-17.14	15.6 to 27
Highest	5850 to 5855	-15.86	27 to 15.6
	5855 to 5875	-24.60	15.6 to -17
	5875 to 5925	-36.19	-17 to -27
	Above 5925	-36.48	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.72	7.25	63.97	74	-10.03	H	PK
15570	32.79	8.33	41.12	54	-12.88	H	AV
10380	53.69	7.25	60.94	74	-13.06	V	PK
15570	36.33	8.33	44.66	54	-9.34	V	AV
High Channel (5230MHz)							
10460	52.47	7.54	60.01	74	-13.99	H	PK
15690	29.25	8.86	38.11	54	-15.89	H	AV
10460	53.00	7.54	60.54	74	-13.46	V	PK
15690	28.14	8.86	37.00	54	-17.00	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	57.23	9.65	66.88	74	-7.12	H	PK
17265	36.26	10.87	47.13	54	-6.87	H	AV
11510	56.99	9.65	66.64	74	-7.36	V	PK
17265	32.73	10.87	43.60	54	-10.40	V	AV
High Channel (5795MHz)							
11590	55.11	9.81	64.92	74	-9.08	H	PK
17385	33.29	10.89	44.18	54	-9.82	H	AV
11590	54.10	9.81	63.91	74	-10.09	V	PK
17385	33.59	10.89	44.48	54	-9.52	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.81	-27
Highest	Above 5350	-43.36	-27
Note: the data just list the worst cases.			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.71	-27
	5650 to 5700	-34.82	-27 to -17
	5700 to 5720	-26.77	-17 to 15.6
	5720 to 5725	-16.03	15.6 to 27
Highest	5850 to 5855	-14.26	27 to 15.6
	5855 to 5875	-26.12	15.6 to -17
	5875 to 5925	-37.11	-17 to -27
	Above 5925	-38.46	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	54.22	7.58	61.80	74	-12.20	H	PK
10420	34.54	8.67	43.21	54	-10.79	H	AV
10420	57.02	7.58	64.60	74	-9.40	H	PK
10420	35.65	8.67	44.32	54	-9.68	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	53.23	9.87	63.10	74	-10.90	H	PK
11550	37.54	11.02	48.56	54	-5.44	H	AV
11550	56.48	9.87	66.35	74	-7.65	H	PK
11550	35.20	11.02	46.22	54	-7.78	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.74	-27
Highest	Above 5350	-44.96	-27
Note: the data just list the worst cases.			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.11	-27
	5650 to 5700	-36.23	-27 to -17
	5700 to 5720	-27.54	-17 to 15.6
	5720 to 5725	-14.94	15.6 to 27
Highest	5850 to 5855	-15.26	27 to 15.6
	5855 to 5875	-24.53	15.6 to -17
	5875 to 5925	-36.85	-17 to -27
	Above 5925	-39.70	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

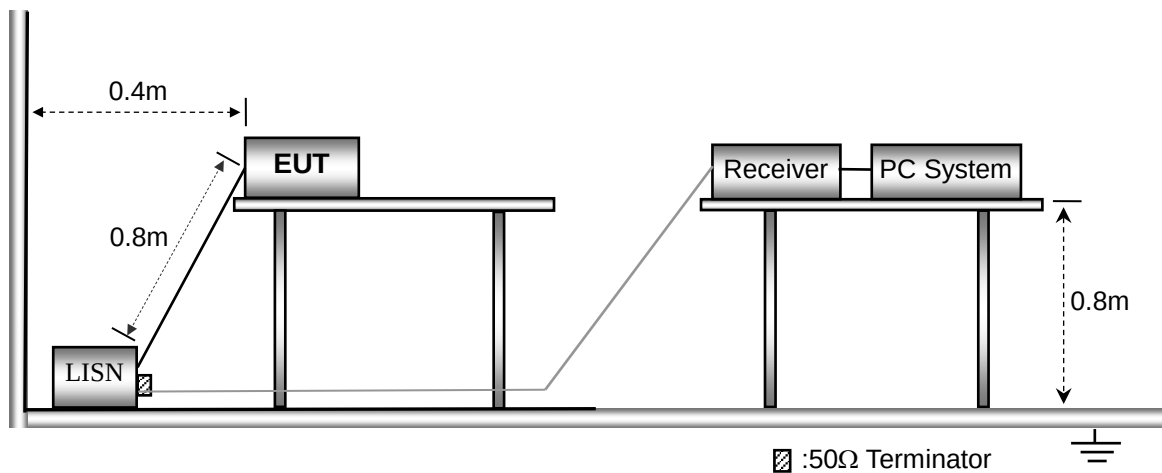
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram



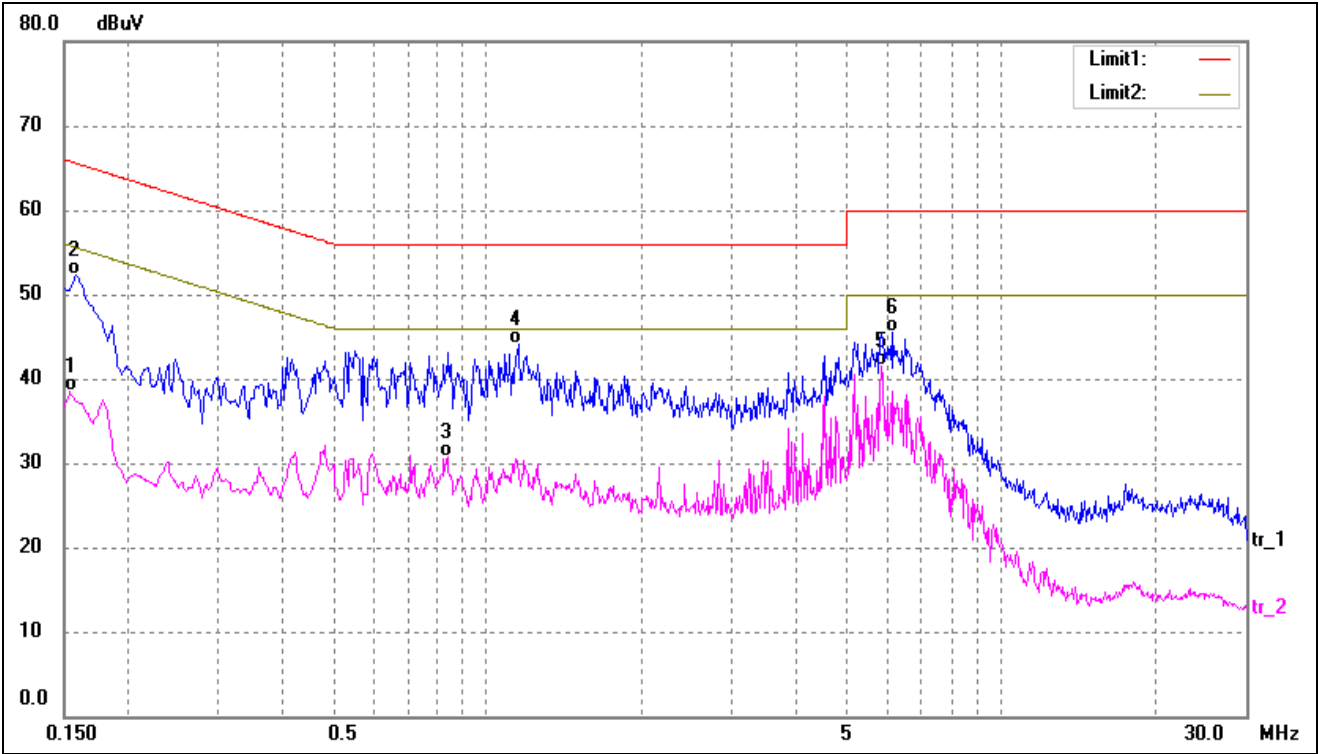
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

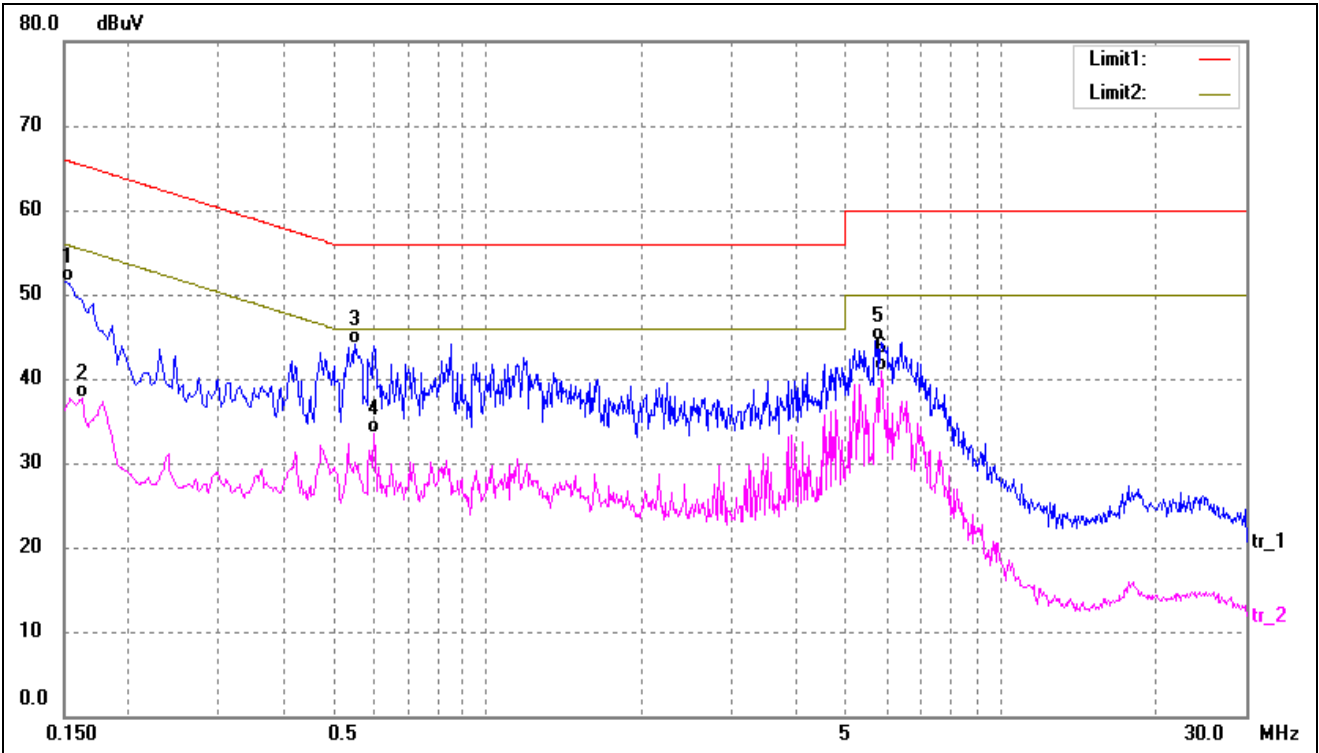
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	28.00	10.41	38.41	55.78	-17.37	AVG
2	0.1580	41.92	10.40	52.32	65.56	-13.24	QP
3	0.8380	20.49	10.17	30.66	46.00	-15.34	AVG
4	1.1500	33.96	10.16	44.12	56.00	-11.88	QP
5*	5.8659	31.04	10.38	41.42	50.00	-8.58	AVG
6	6.1340	35.20	10.38	45.58	60.00	-14.42	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	41.14	10.40	51.54	65.99	-14.45	QP
2	0.1620	27.22	10.40	37.62	55.36	-17.74	AVG
3	0.5540	33.83	10.22	44.05	56.00	-11.95	QP
4	0.6020	23.29	10.22	33.51	46.00	-12.49	AVG
5	5.6860	34.17	10.38	44.55	60.00	-15.45	QP
6*	5.8659	30.62	10.38	41.00	50.00	-9.00	AVG

APPENDIX SUMMARY

Project No.	WTH23X05094415W	Test Engineer	BAldi Zhong
Start date	2023/5/12	Finish date	2023/5/18
Temperature	23.2℃	Humidity	45%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	2.667	2.24	/	11
	5200	2.714	2.43	/	11
	5240	2.726	2.48	/	11
802.11n-HT20	5180	1.733	1.84	4.80	11
	5200	1.881	1.91	4.91	11
	5240	1.865	2.15	5.02	11
802.11n-HT40	5190	-0.732	-1.15	2.07	11
	5230	-0.08	-1.27	2.38	11
802.11ac-HT80	5210	-4.267	-6.00	-2.04	11

Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	ANT 0 dBm/500kHz*	ANT 1 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	-2.622	-1.24	2.22	-0.402	0.98	30
	5785	-2.915	-1.28	2.22	-0.695	0.94	30
	5825	-3.448	-1.61	2.22	-1.228	0.61	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22							

Power Spectral Density						
U-NII-3: 5725-5850MHz						
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz
802.11n-HT20	5745	-4.296	-2.79	2.22	1.75	30
	5785	-4.549	-2.71	2.22	1.70	30
	5825	-4.686	-2.94	2.22	1.50	30
802.11n HT40	5755	-7.401	-5.64	2.22	-1.20	30
	5795	-7.719	-5.79	2.22	-1.42	30
802.11ac VH80	5775	-10.333	-9.76	2.22	-4.81	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						

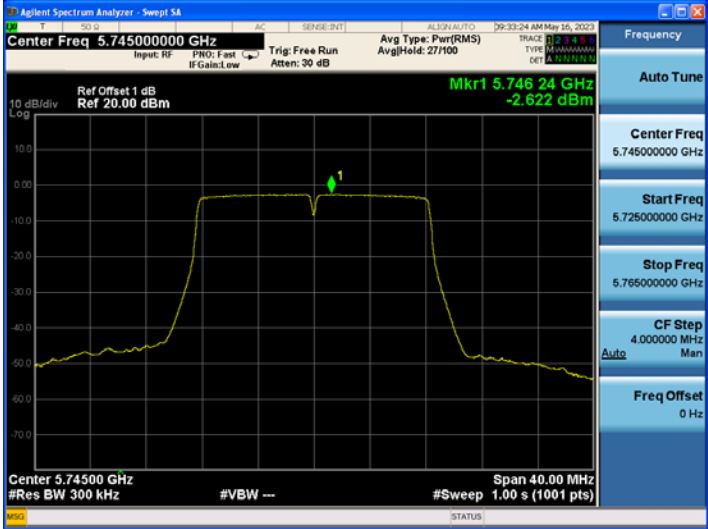
ANT 0
5150-5250MHz

802.11a-Low	
802.11a-Middle	
802.11a-High	

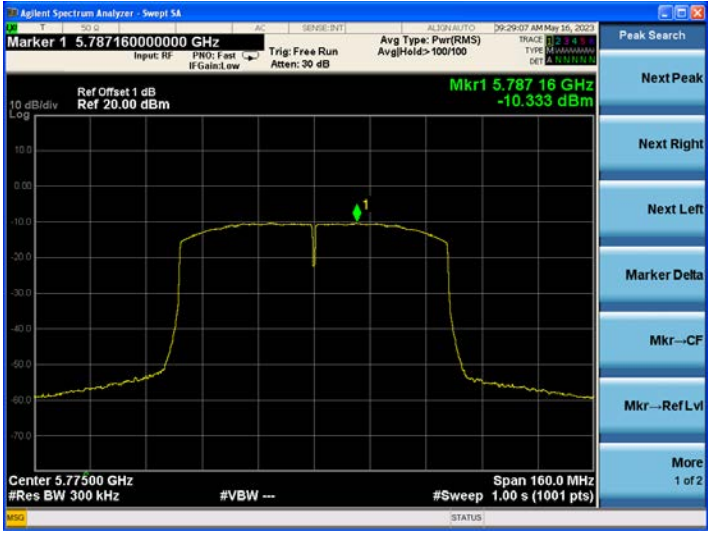
802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-HT80	

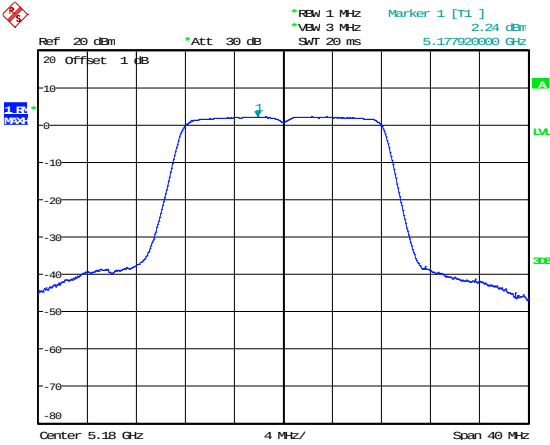
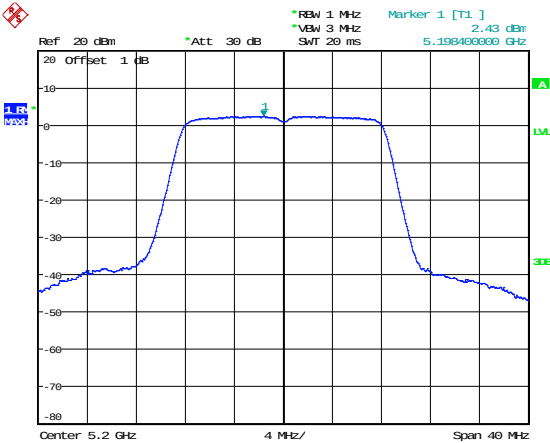
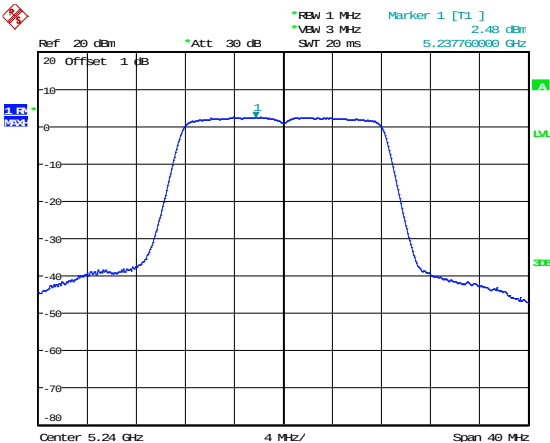
5725-5850MHz

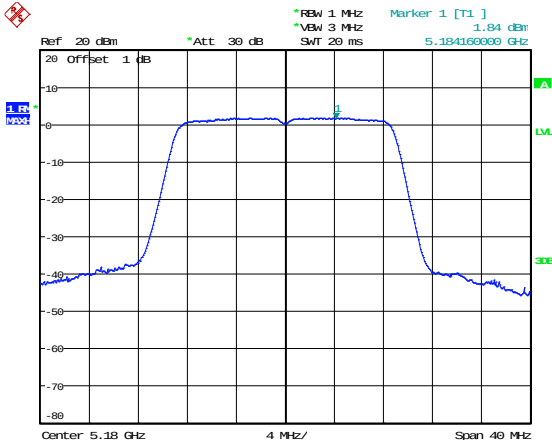
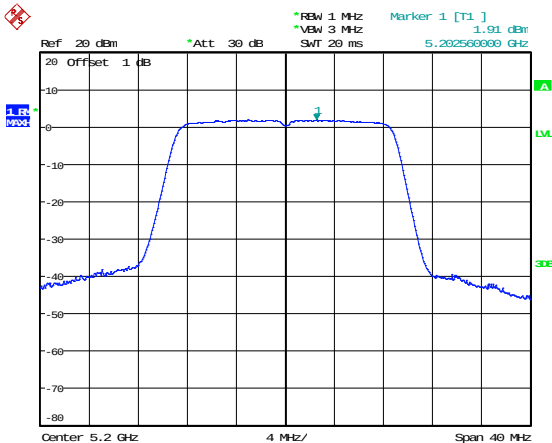
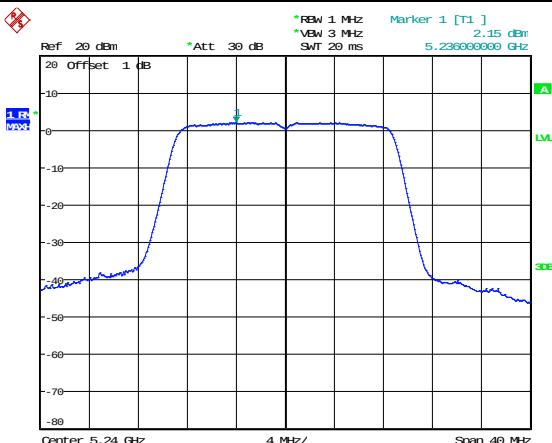
802.11a-Low	
802.11a-Middle	
802.11a-High	

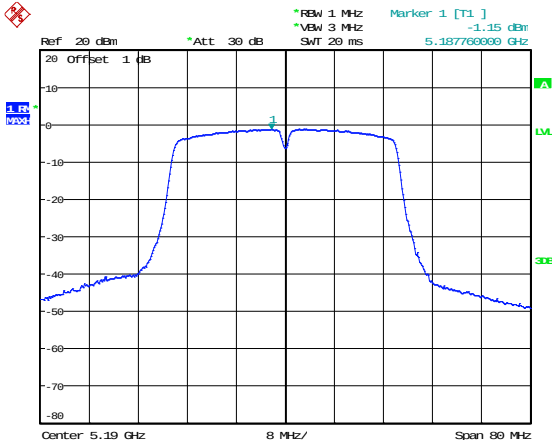
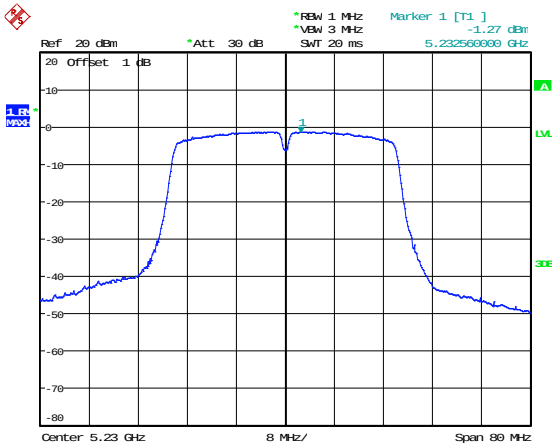
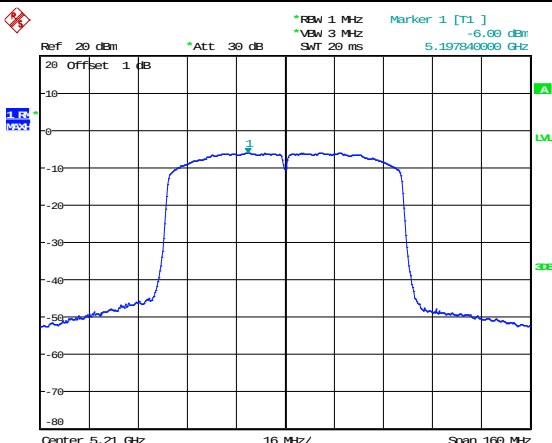
802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-HT80	

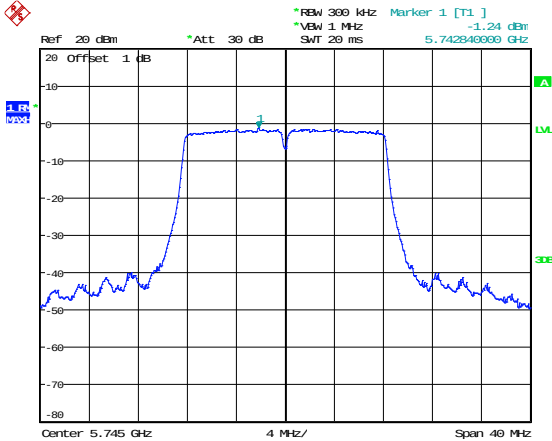
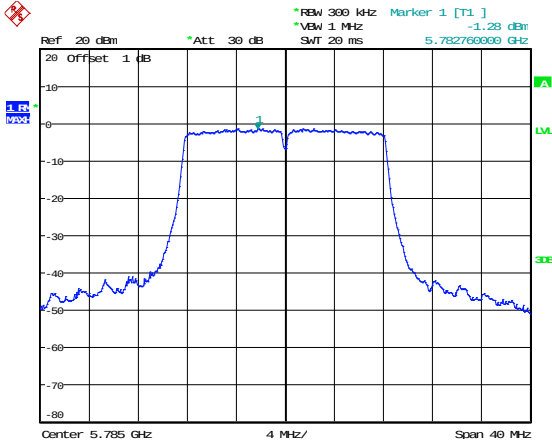
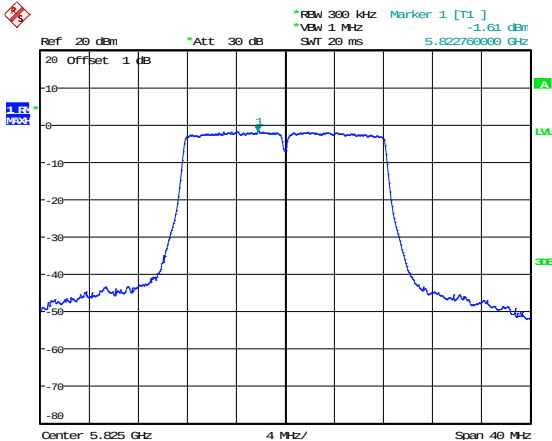
ANT 1
5150-5250MHz

802.11a-Low	 Date: 18.MAY.2023 09:52:48
802.11a-Middle	 Date: 18.MAY.2023 09:53:04
802.11a-High	 Date: 18.MAY.2023 09:53:20

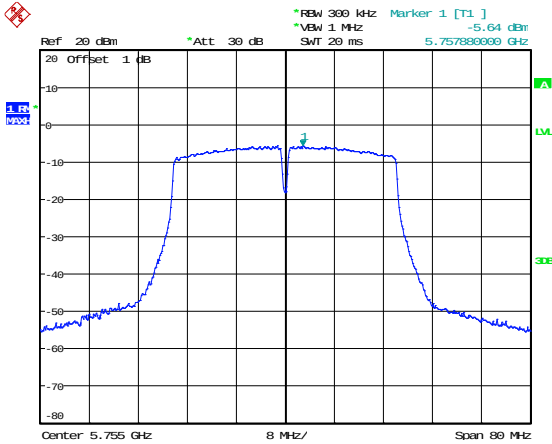
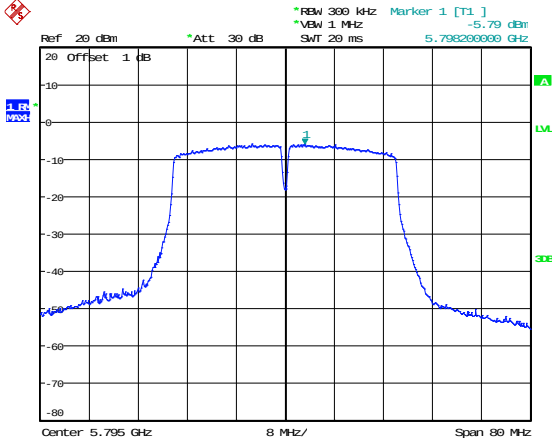
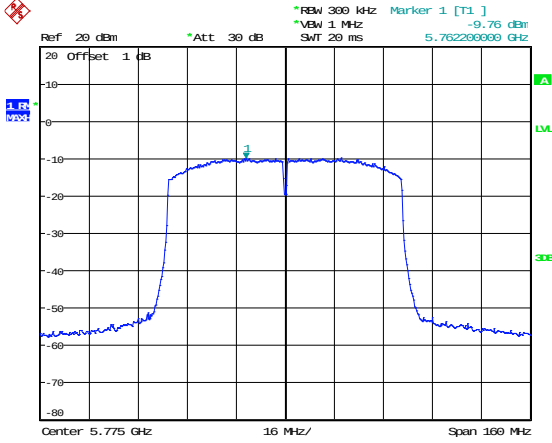
802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.84 dBm *VBW 3 MHz SWT 20 ms 5.184160000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 18.MAY.2023 09:51:51
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.91 dBm *VBW 3 MHz SWT 20 ms 5.202560000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 18.MAY.2023 09:52:04
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 2.15 dBm *VBW 3 MHz SWT 20 ms 5.236000000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 18.MAY.2023 09:52:21

802.11n-HT40-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 1 MHz *VBW: 3 MHz *SWT: 20 ms Marker 1 [T1] -1.15 dBm 5.197760000 GHz Center: 5.19 GHz 8 MHz/ Span: 80 MHz Date: 18.MAY.2023 09:51:13
802.11n-HT40-High	 Ref: 20 dBm *Att: 30 dB *RBW: 1 MHz *VBW: 3 MHz *SWT: 20 ms Marker 1 [T1] -1.27 dBm 5.232560000 GHz Center: 5.23 GHz 8 MHz/ Span: 80 MHz Date: 18.MAY.2023 09:51:29
802.11ac-HT80	 Ref: 20 dBm *Att: 30 dB *RBW: 1 MHz *VBW: 3 MHz *SWT: 20 ms Marker 1 [T1] -6.00 dBm 5.197840000 GHz Center: 5.21 GHz 16 MHz/ Span: 160 MHz Date: 18.MAY.2023 09:50:43

5725-5850MHz

802.11a-Low	 Date: 17.MAY.2023 17:48:52
802.11a-Middle	 Date: 17.MAY.2023 17:49:12
802.11a-High	 Date: 17.MAY.2023 17:49:38

802.11n-HT20-Low	Date: 17.MAY.2023 17:50:10
802.11n-HT20-Middle	Date: 17.MAY.2023 17:50:46
802.11n-HT20-High	Date: 17.MAY.2023 17:51:11

802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -5.64 dBm *VBW 1 MHz 5.757890000 GHz SWT 20 ms Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 17.MAY.2023 17:51:52
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -5.79 dBm *VBW 1 MHz 5.798200000 GHz SWT 20 ms Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 17.MAY.2023 17:53:38
802.11ac-HT80	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -9.76 dBm *VBW 1 MHz 5.762200000 GHz SWT 20 ms Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 17.MAY.2023 17:55:03

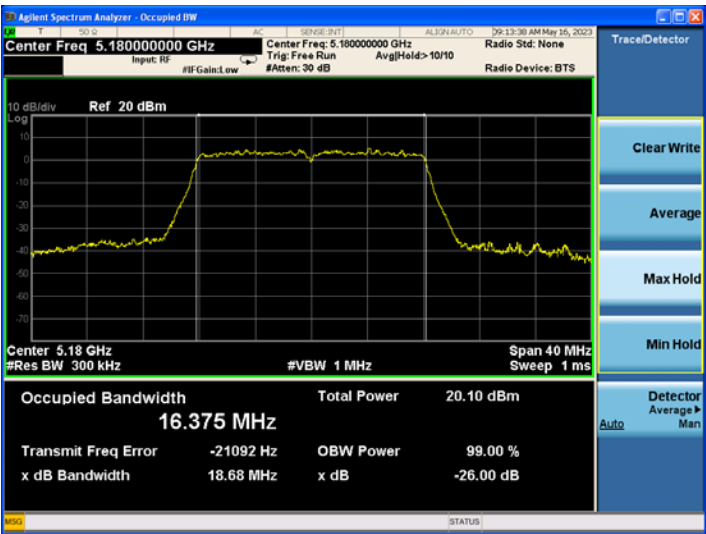
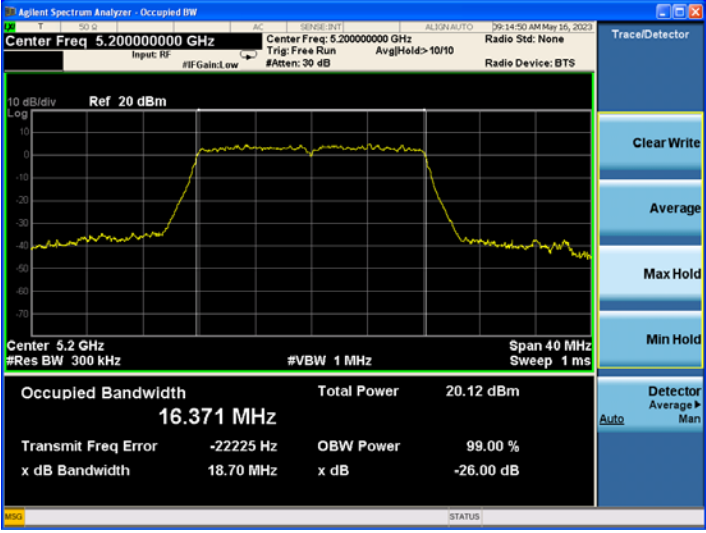
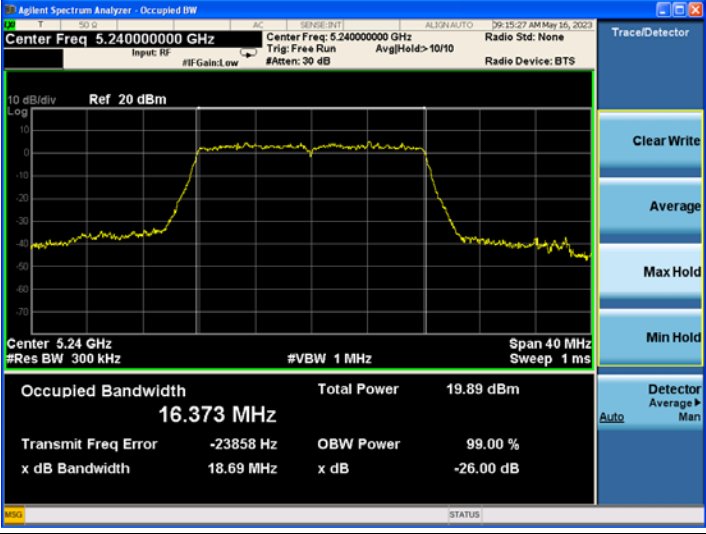
APPENDIX B

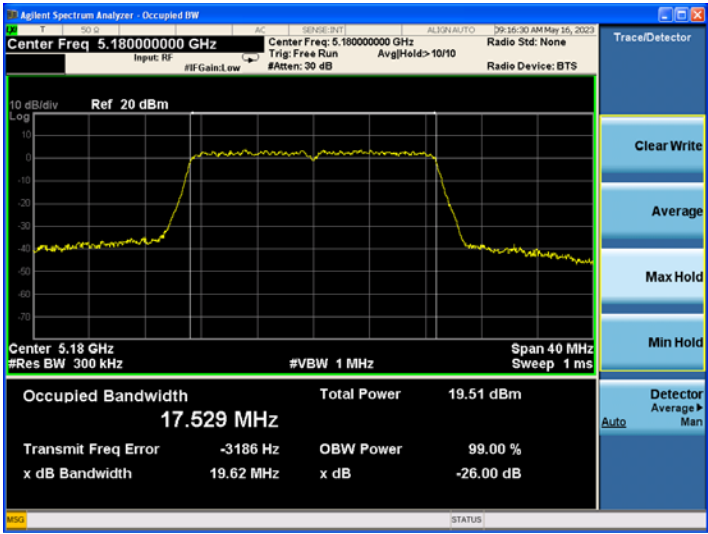
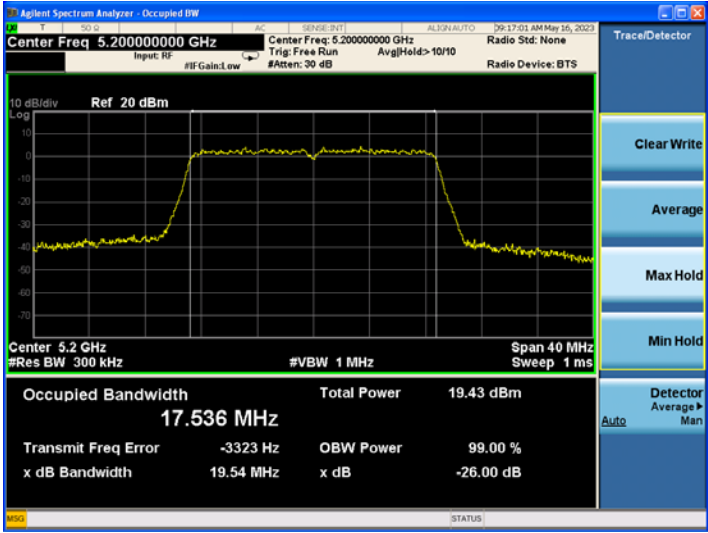
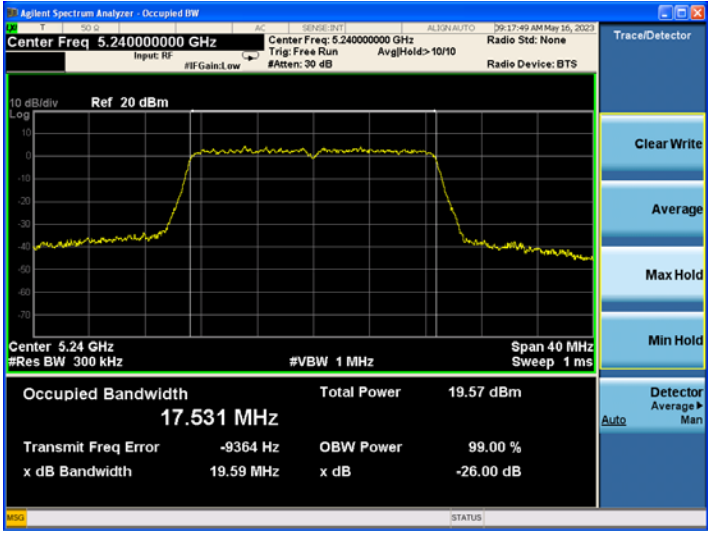
Emission Bandwidth and Occupied Bandwidth

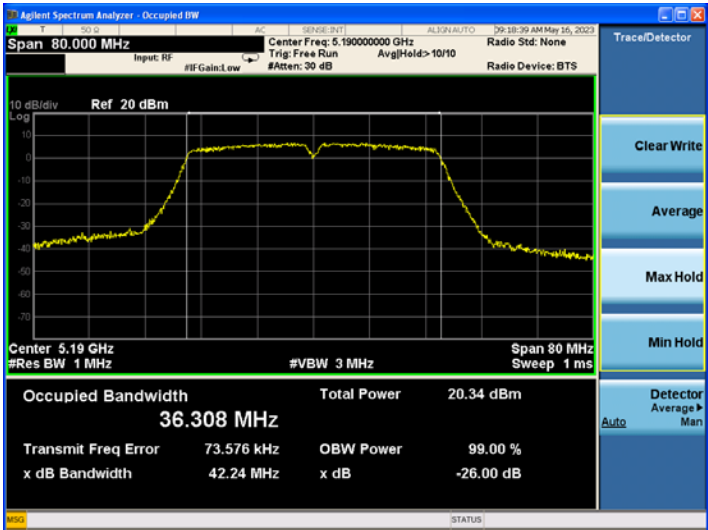
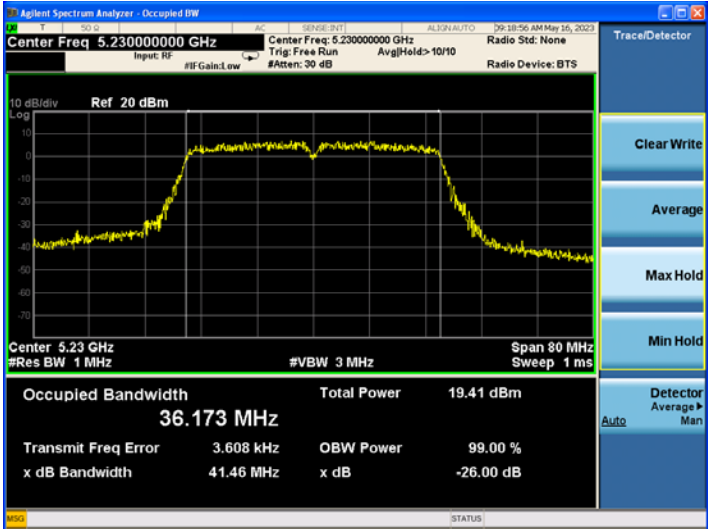
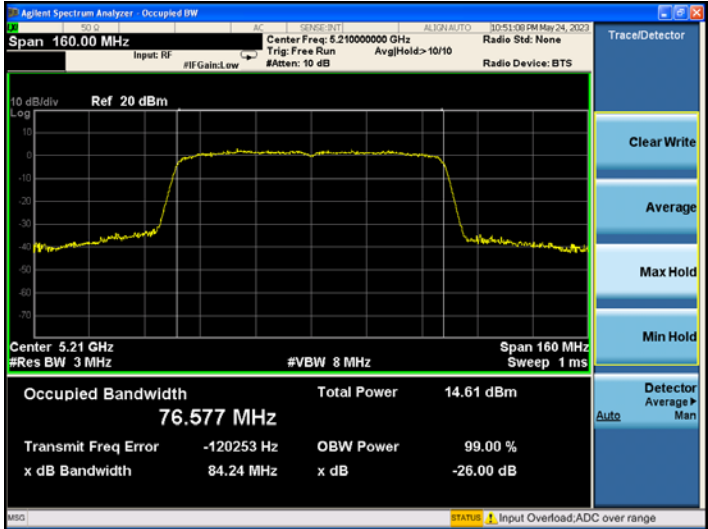
U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	18.68	16.375	18.88	16.48	Pass
	5200	18.70	16.371	18.88	16.48	Pass
	5240	18.69	16.373	18.88	16.48	Pass
802.11n-HT20	5180	19.62	17.529	19.76	17.60	Pass
	5200	19.54	17.536	19.84	17.60	Pass
	5240	19.59	17.531	19.76	17.60	Pass
802.11n-HT40	5190	42.24	36.308	42.60	36.48	Pass
	5230	41.46	36.173	42.60	36.48	Pass
802.11ac-HT80	5210	84.24	76.577	84.60	74.56	Pass

U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	16.49	16.376	16.64	16.48	≥500
	5785	16.54	16.386	16.64	16.48	≥500
	5825	16.47	16.383	16.72	16.48	≥500
802.11n-HT20	5745	17.66	17.534	17.76	17.60	≥500
	5785	17.64	17.533	17.84	17.60	≥500
	5825	17.65	17.528	17.76	17.60	≥500
802.11n-HT40	5755	36.04	36.214	36.80	36.48	≥500
	5795	36.42	36.231	36.80	36.48	≥500
802.11ac-HT80	5775	74.52	75.512	75.84	74.56	≥500

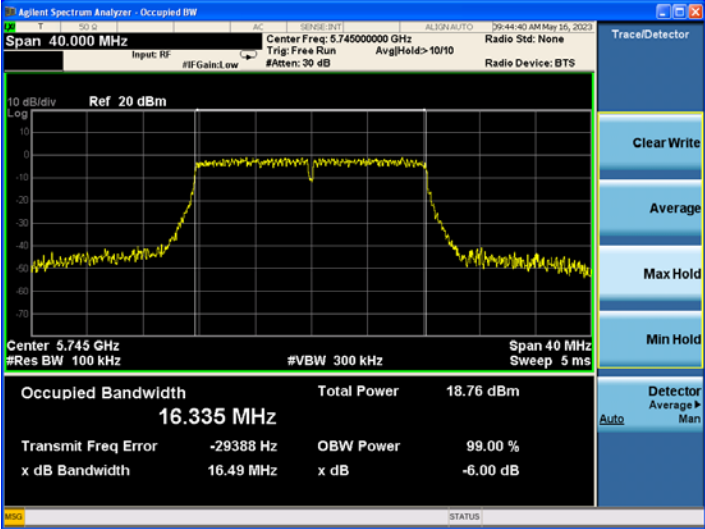
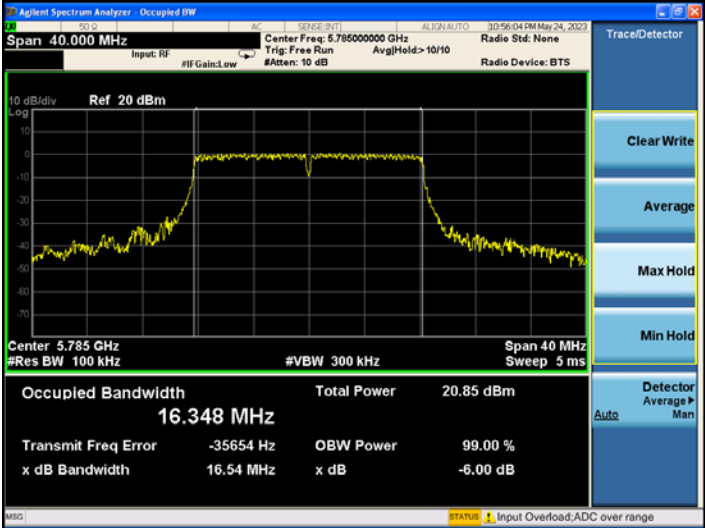
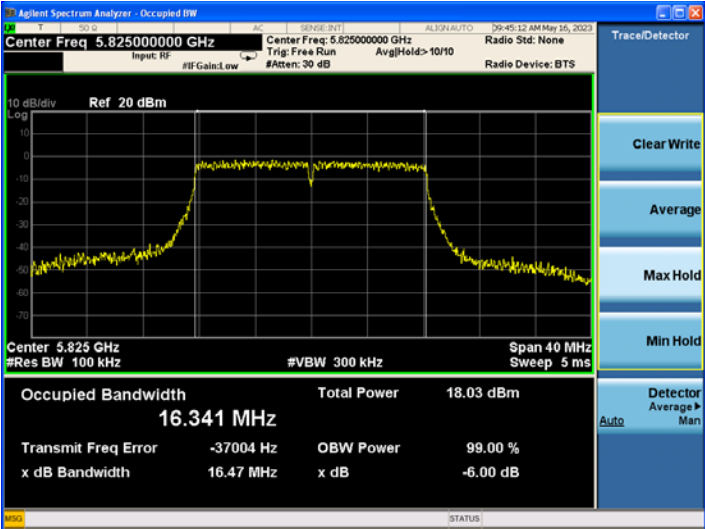
26 dB Bandwidth MHz
ANT 0
5150-5250MHz

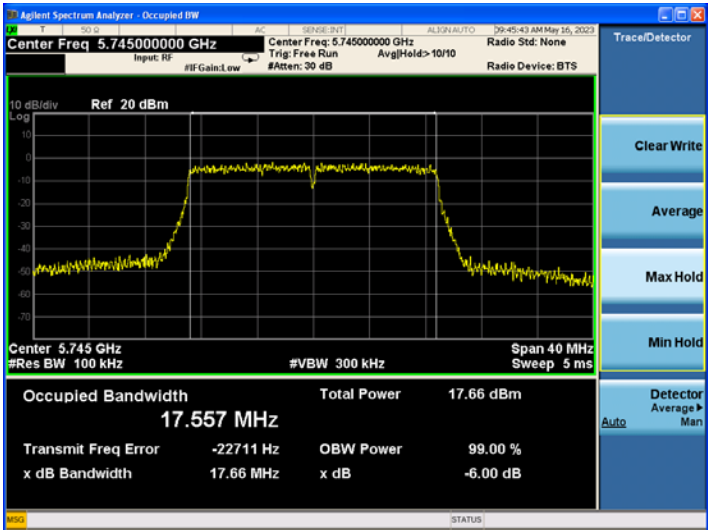
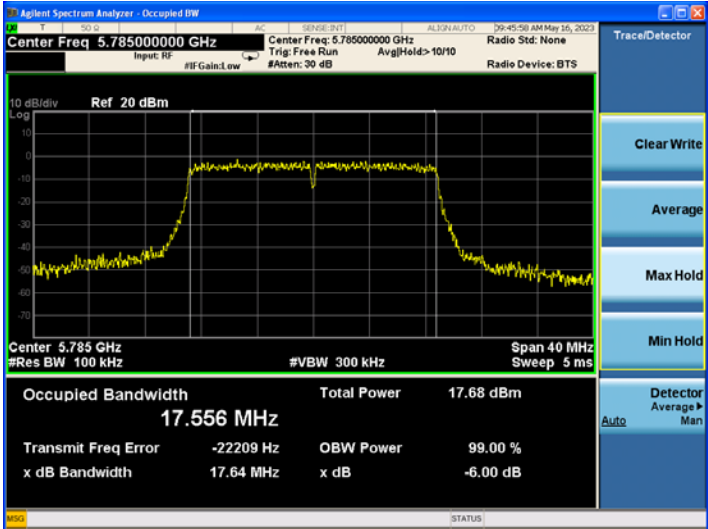
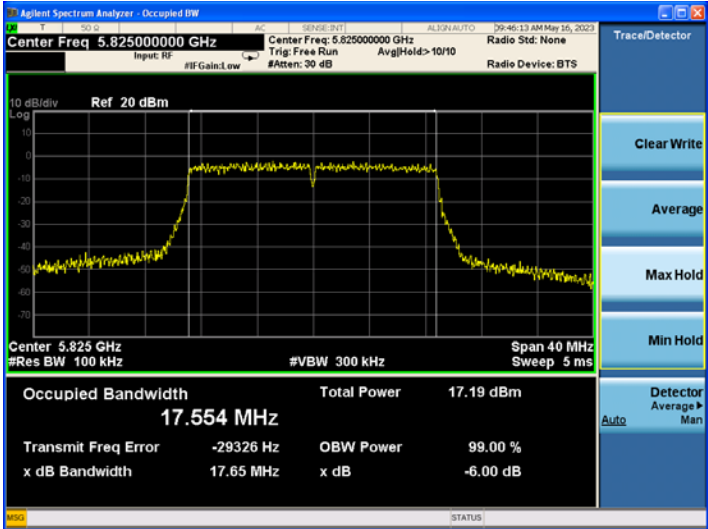
802.11a-Low	
802.11a-Middle	
802.11a-High	

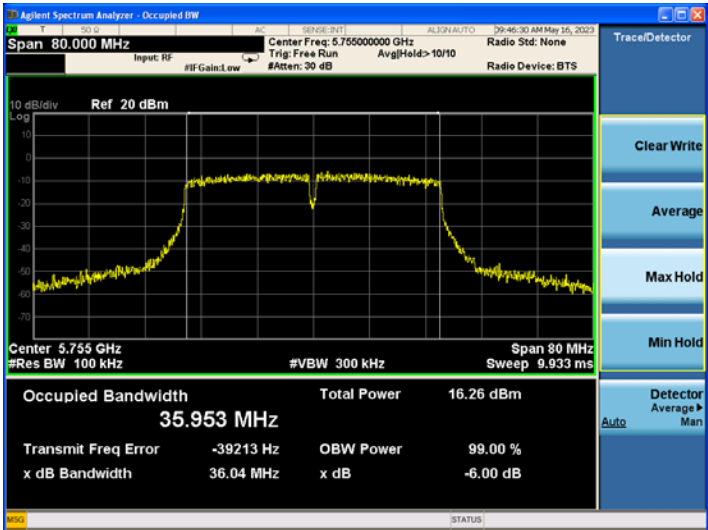
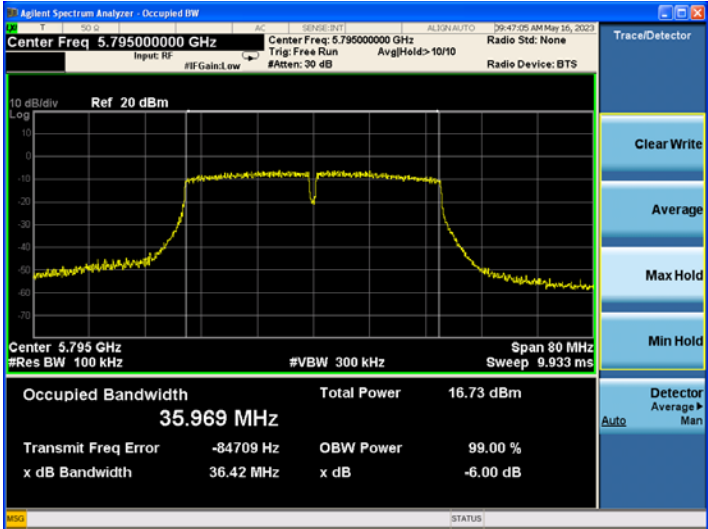
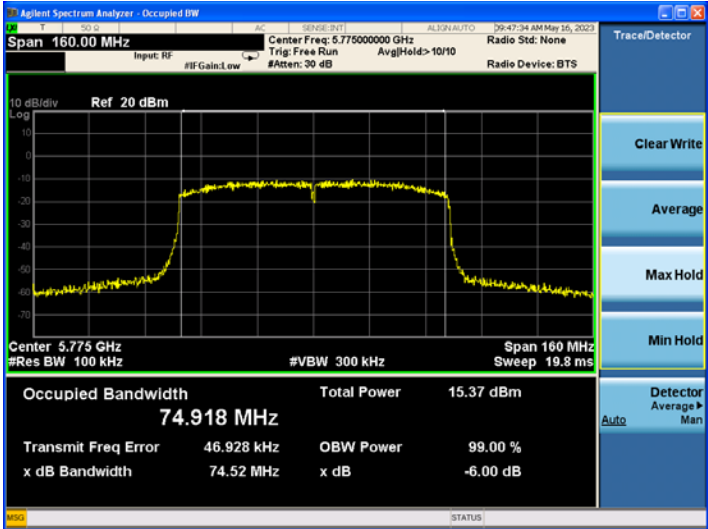
802.11n-HT20-Low	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.18000000 GHz Center Freq: 5.18000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.529 MHz Total Power 19.51 dBm Transmit Freq Error -3186 Hz OBW Power 99.00 % x dB Bandwidth 19.62 MHz x dB -26.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS
802.11n-HT20-Middle	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.20000000 GHz Center Freq: 5.20000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.536 MHz Total Power 19.43 dBm Transmit Freq Error -3323 Hz OBW Power 99.00 % x dB Bandwidth 19.54 MHz x dB -26.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS
802.11n-HT20-High	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.24000000 GHz Center Freq: 5.24000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.531 MHz Total Power 19.57 dBm Transmit Freq Error -9364 Hz OBW Power 99.00 % x dB Bandwidth 19.59 MHz x dB -26.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-HT80	

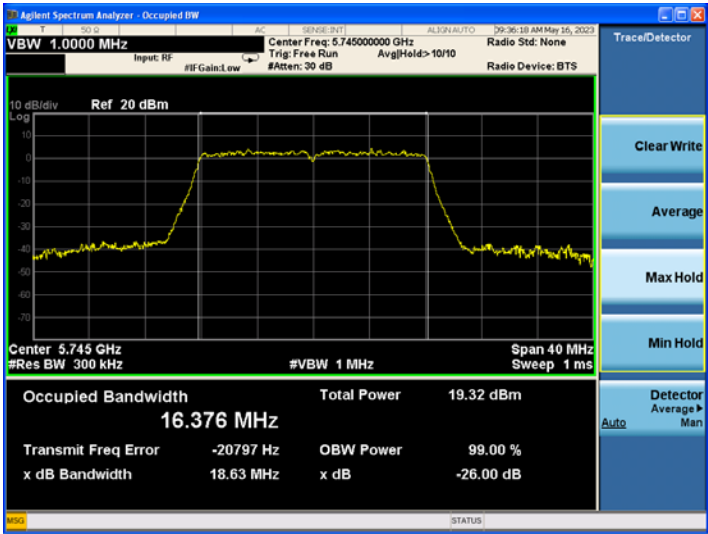
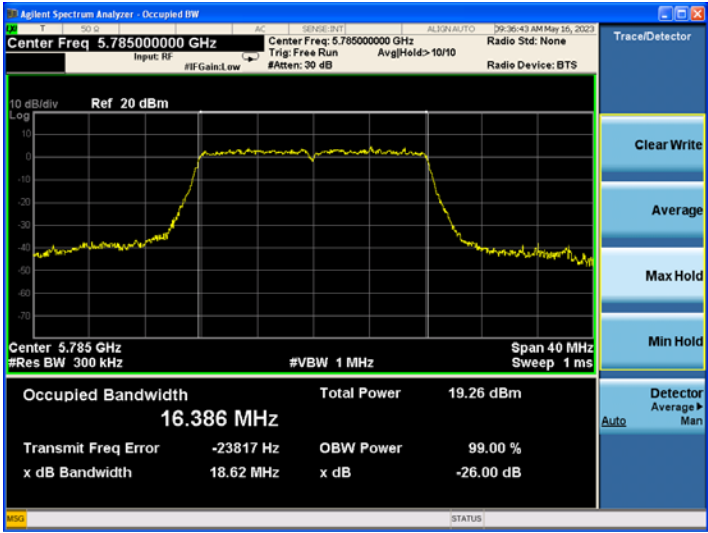
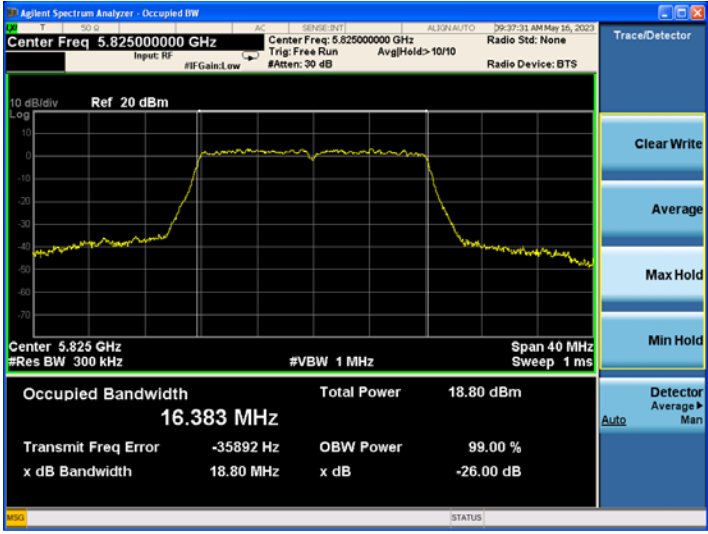
5725-5850MHz

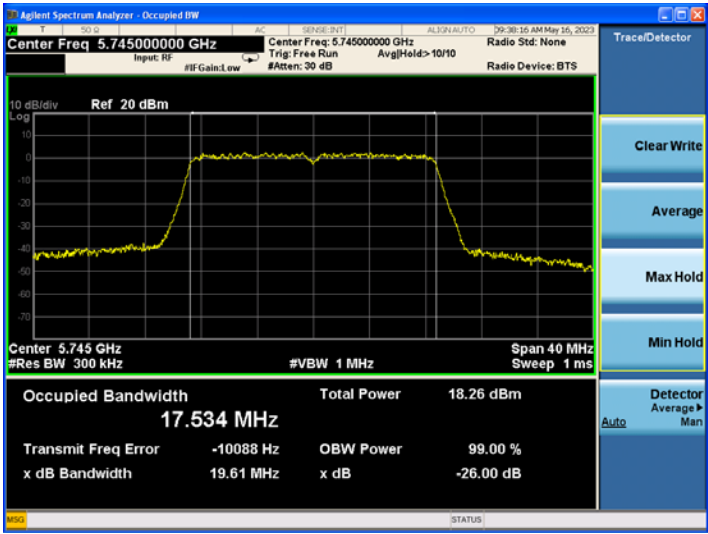
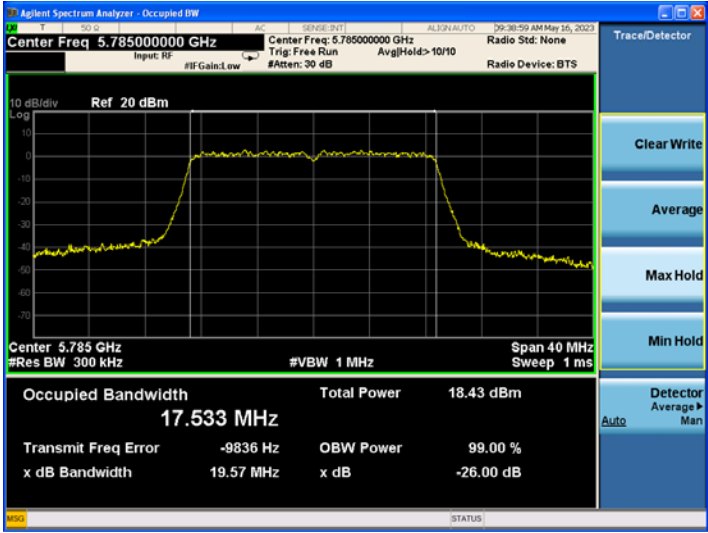
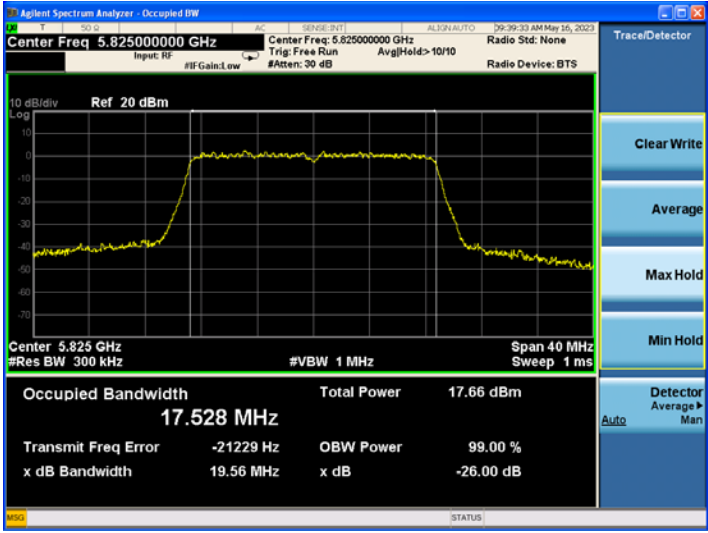
802.11a-Low	
802.11a-Middle	
802.11a-High	

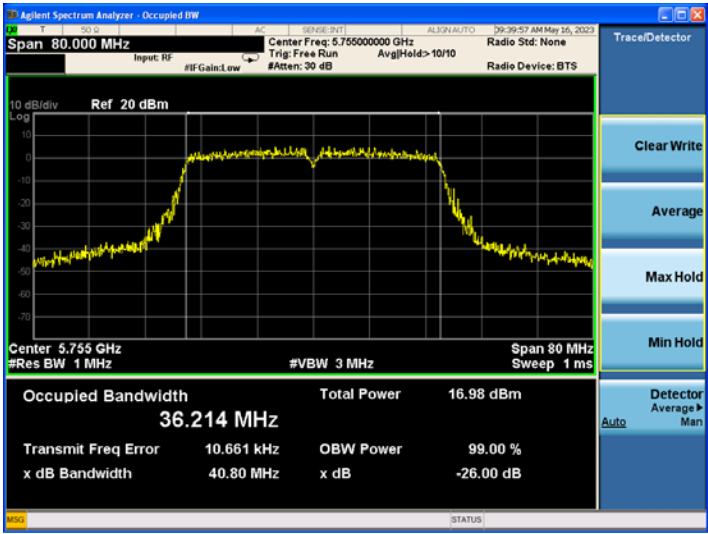
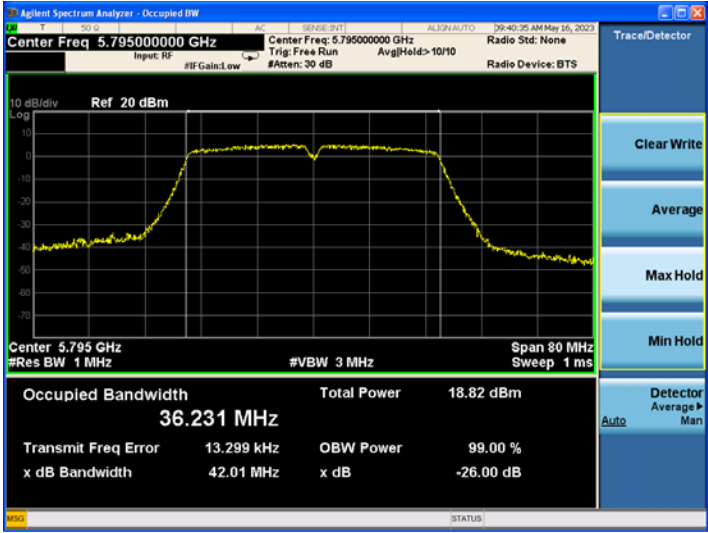
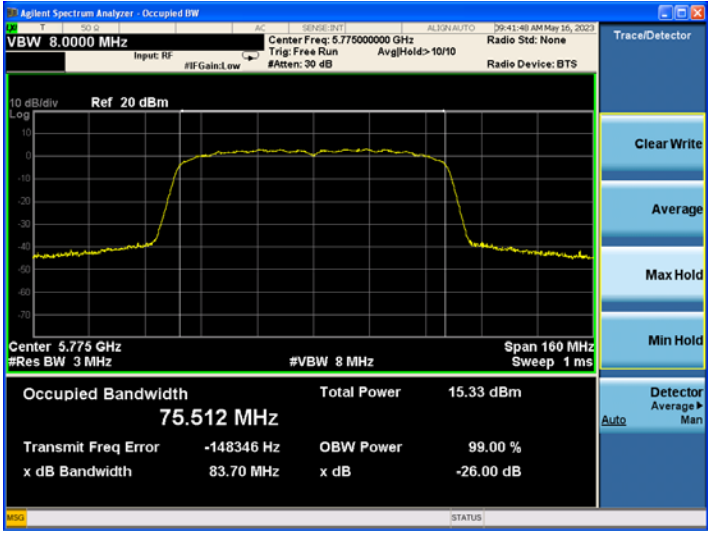
802.11n-HT20-Low	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.745000000 GHz Center Freq: 5.745000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 5 ms Occupied Bandwidth 17.557 MHz Total Power 17.66 dBm Transmit Freq Error -22711 Hz OBW Power 99.00 % x dB Bandwidth 17.66 MHz x dB -6.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS
802.11n-HT20-Middle	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.785000000 GHz Center Freq: 5.785000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 5 ms Occupied Bandwidth 17.556 MHz Total Power 17.68 dBm Transmit Freq Error -22209 Hz OBW Power 99.00 % x dB Bandwidth 17.64 MHz x dB -6.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS
802.11n-HT20-High	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.825000000 GHz Center Freq: 5.825000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 5 ms Occupied Bandwidth 17.554 MHz Total Power 17.19 dBm Transmit Freq Error -29326 Hz OBW Power 99.00 % x dB Bandwidth 17.65 MHz x dB -6.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-HT80	

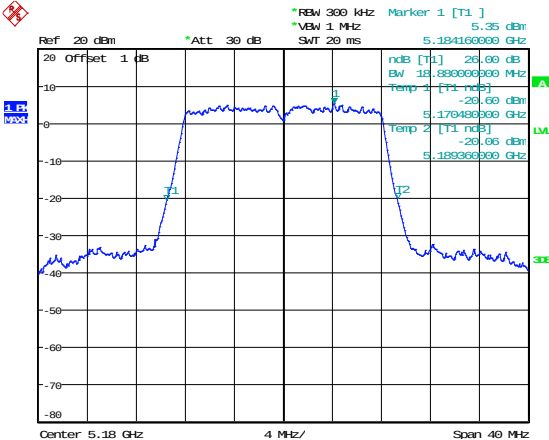
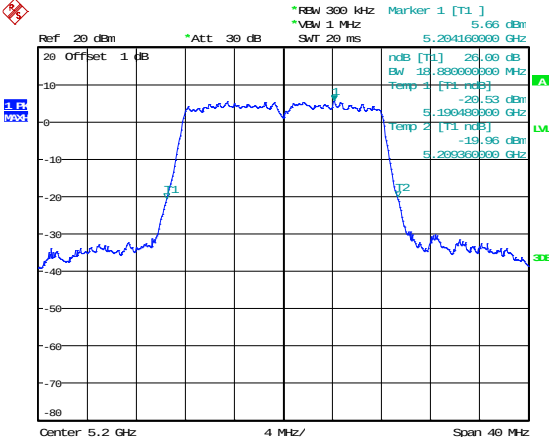
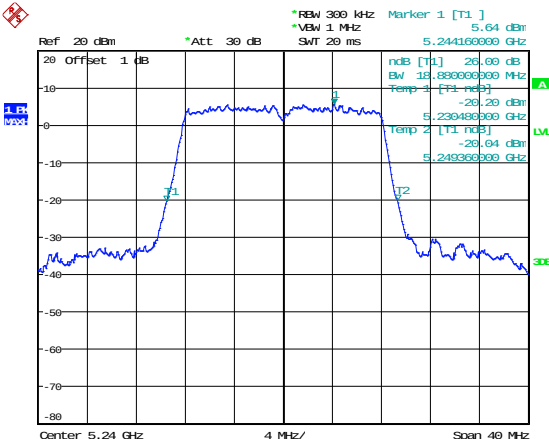
99% Bandwidth MHz
5725-5850MHz

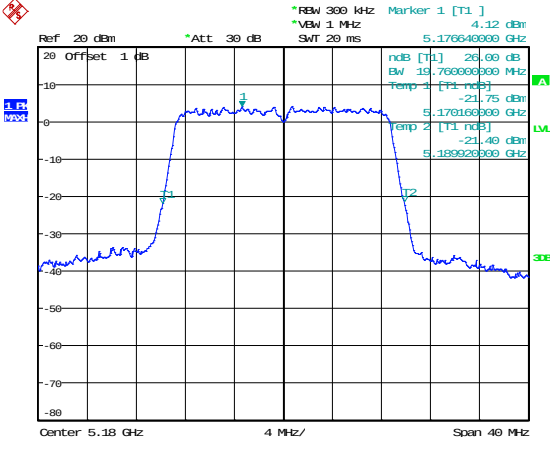
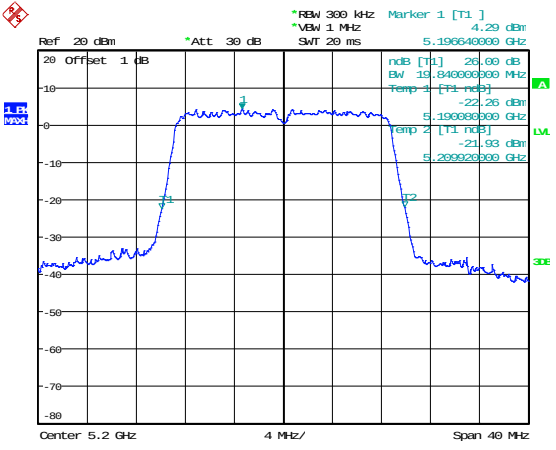
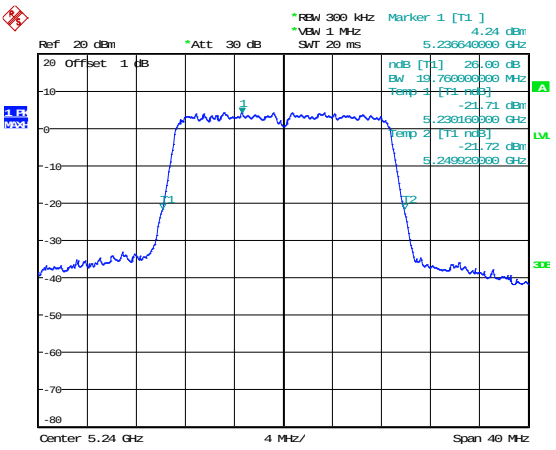
802.11a-Low	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 16.376 MHz Total Power 19.32 dBm Transmit Freq Error -20797 Hz OBW Power 99.00 % x dB Bandwidth 18.63 MHz x dB -26.00 dB
802.11a-Middle	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.785000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 16.386 MHz Total Power 19.26 dBm Transmit Freq Error -23817 Hz OBW Power 99.00 % x dB Bandwidth 18.62 MHz x dB -26.00 dB
802.11a-High	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.825000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 16.383 MHz Total Power 18.80 dBm Transmit Freq Error -35892 Hz OBW Power 99.00 % x dB Bandwidth 18.80 MHz x dB -26.00 dB

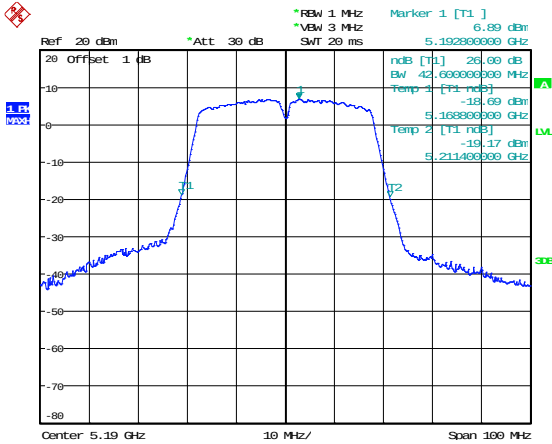
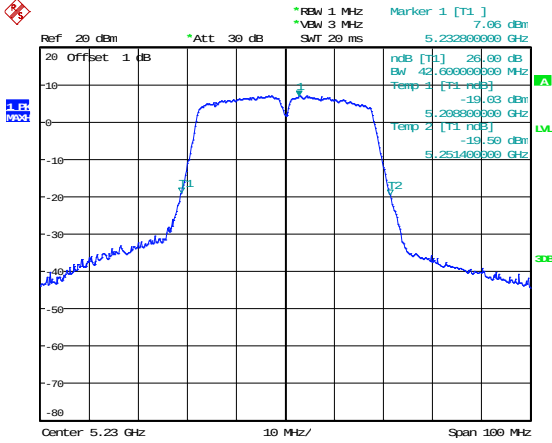
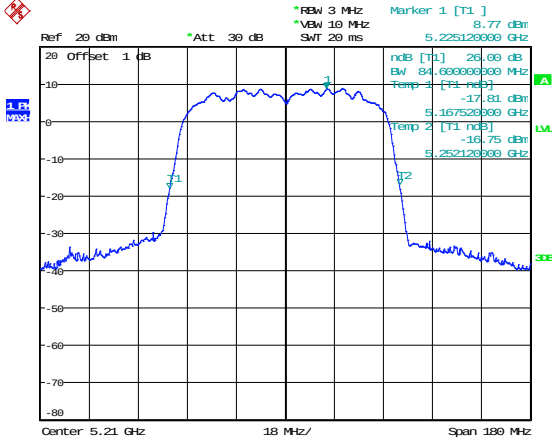
802.11n-HT20-Low	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.745000000 GHz Center Freq: 5.745000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.534 MHz Total Power 18.26 dBm Transmit Freq Error -10088 Hz OBW Power 99.00 % x dB Bandwidth 19.61 MHz x dB -26.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS
802.11n-HT20-Middle	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.785000000 GHz Center Freq: 5.785000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.533 MHz Total Power 18.43 dBm Transmit Freq Error -9836 Hz OBW Power 99.00 % x dB Bandwidth 19.57 MHz x dB -26.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS
802.11n-HT20-High	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.825000000 GHz Center Freq: 5.825000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 20 dBm Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.528 MHz Total Power 17.66 dBm Transmit Freq Error -21229 Hz OBW Power 99.00 % x dB Bandwidth 19.56 MHz x dB -26.00 dB Clear Write Average Max Hold Min Hold Detector Average Auto Man STATUS

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-HT80	

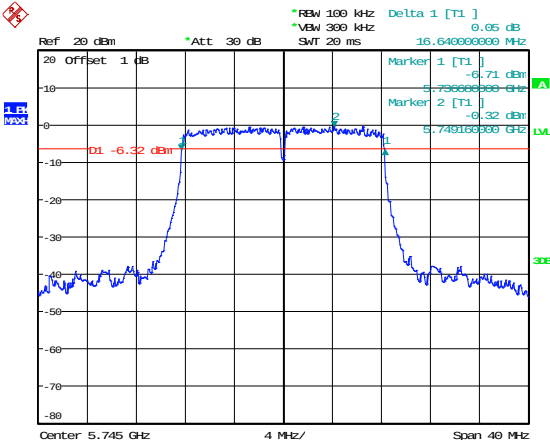
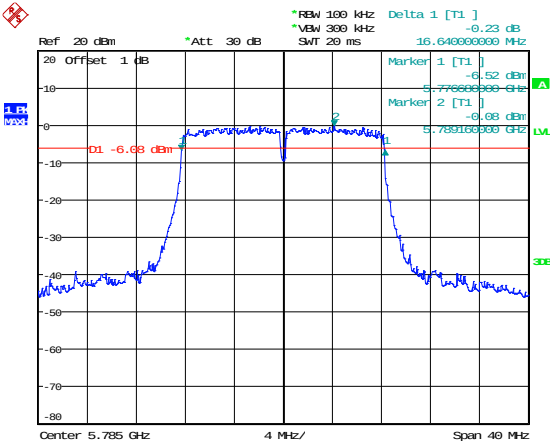
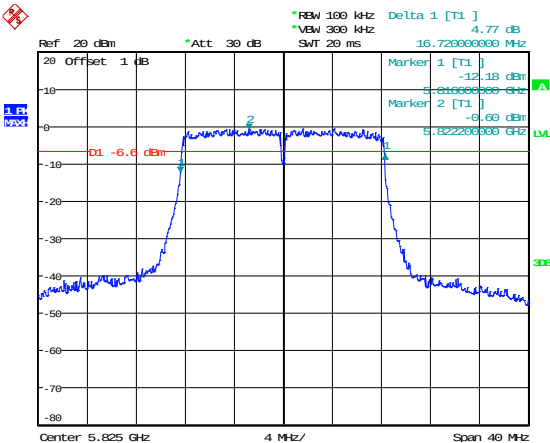
ANT 1
26 dB Bandwidth MHz
5150-5250MHz

802.11a-Low	 Date: 18.MAY.2023 10:07:45
802.11a-Middle	 Date: 18.MAY.2023 10:08:09
802.11a-High	 Date: 18.MAY.2023 10:08:35

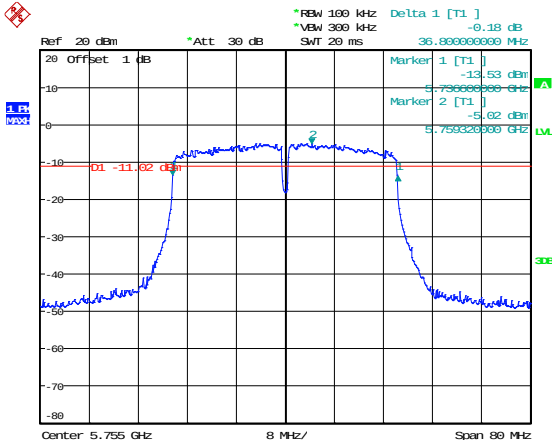
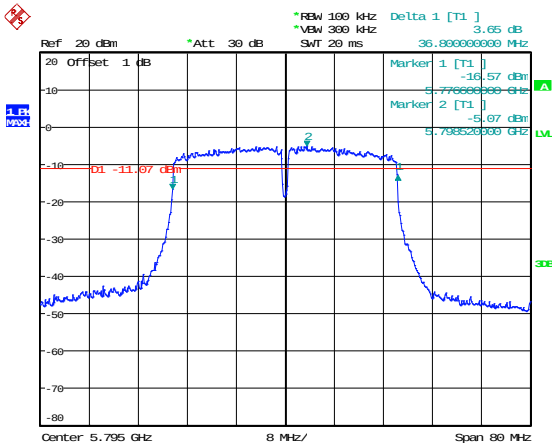
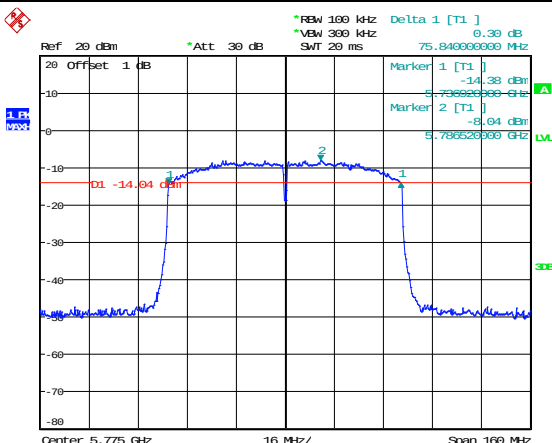
802.11n-HT20-Low	 Date: 18.MAY.2023 10:01:25
802.11n-HT20-Middle	 Date: 18.MAY.2023 10:01:47
802.11n-HT20-High	 Date: 18.MAY.2023 10:03:00


802.11n-HT40-Low	 Ref: 20 dBm *Att: 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 20 ms Marker 1 [T1] 6.89 dBm 5.19290000 GHz <table><tr><td>ndB [T1]</td><td>26.00 dB</td></tr><tr><td>BW</td><td>42.66800000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-19.69 dBm</td></tr><tr><td>Temp 2 [T1 ndB]</td><td>-19.17 dBm</td></tr></table> Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 18.MAY.2023 10:00:36	ndB [T1]	26.00 dB	BW	42.66800000 MHz	Temp 1 [T1 ndB]	-19.69 dBm	Temp 2 [T1 ndB]	-19.17 dBm
ndB [T1]	26.00 dB								
BW	42.66800000 MHz								
Temp 1 [T1 ndB]	-19.69 dBm								
Temp 2 [T1 ndB]	-19.17 dBm								
802.11n-HT40-High	 Ref: 20 dBm *Att: 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 20 ms Marker 1 [T1] 7.06 dBm 5.23280000 GHz <table><tr><td>ndB [T1]</td><td>26.00 dB</td></tr><tr><td>BW</td><td>42.66800000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-19.63 dBm</td></tr><tr><td>Temp 2 [T1 ndB]</td><td>-19.50 dBm</td></tr></table> Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 18.MAY.2023 10:00:52	ndB [T1]	26.00 dB	BW	42.66800000 MHz	Temp 1 [T1 ndB]	-19.63 dBm	Temp 2 [T1 ndB]	-19.50 dBm
ndB [T1]	26.00 dB								
BW	42.66800000 MHz								
Temp 1 [T1 ndB]	-19.63 dBm								
Temp 2 [T1 ndB]	-19.50 dBm								
802.11ac-HT80	 Ref: 20 dBm *Att: 30 dB *RBW 3 MHz *VBW 10 MHz *SWT 20 ms Marker 1 [T1] 8.77 dBm 5.225120000 GHz <table><tr><td>ndB [T1]</td><td>26.00 dB</td></tr><tr><td>BW</td><td>84.66800000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-17.81 dBm</td></tr><tr><td>Temp 2 [T1 ndB]</td><td>-16.75 dBm</td></tr></table> Center 5.21 GHz 10 MHz/ Span 100 MHz Date: 18.MAY.2023 09:59:35	ndB [T1]	26.00 dB	BW	84.66800000 MHz	Temp 1 [T1 ndB]	-17.81 dBm	Temp 2 [T1 ndB]	-16.75 dBm
ndB [T1]	26.00 dB								
BW	84.66800000 MHz								
Temp 1 [T1 ndB]	-17.81 dBm								
Temp 2 [T1 ndB]	-16.75 dBm								

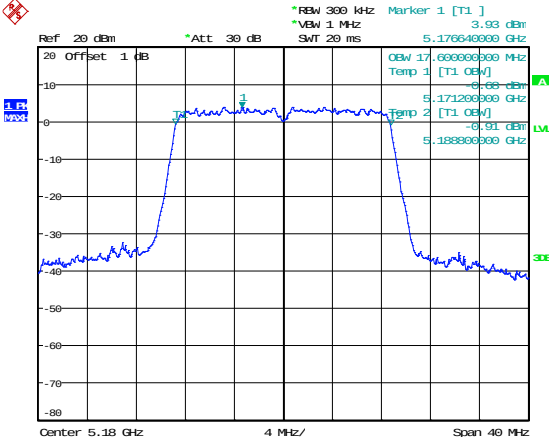
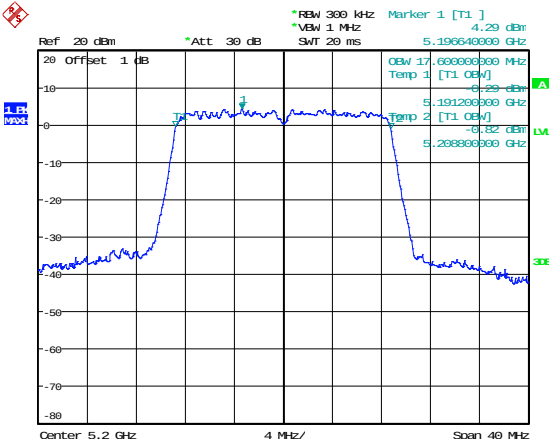
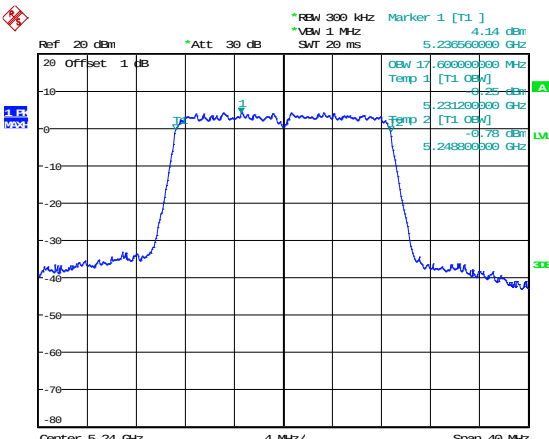
5725-5850MHz

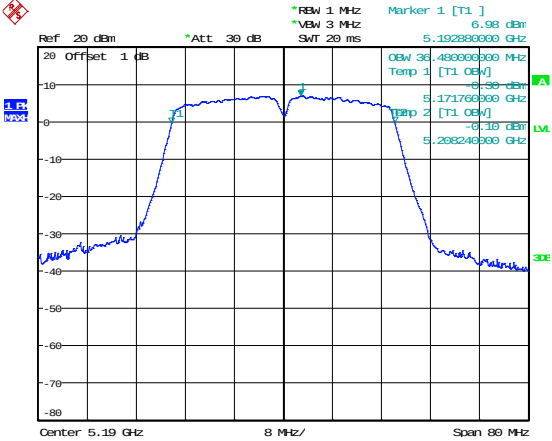
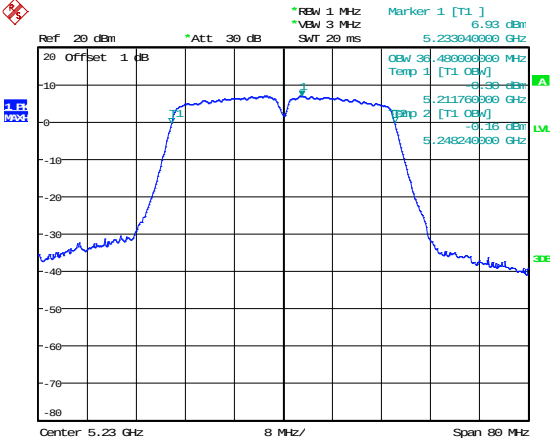
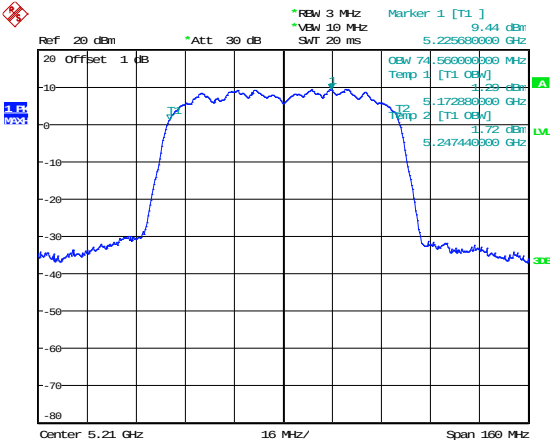
802.11a-Low	 Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 0.05 dB *VBW 300 kHz *SWT 20 ms 16.64000000 MHz Marker 1 [T1] -6.71 dBm 5.73000000 GHz Marker 2 [T1] -6.32 dBm 5.74500000 GHz D1 -6.32 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2023 18:05:13
802.11a-Middle	 Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] -0.23 dB *VBW 300 kHz *SWT 20 ms 16.64000000 MHz Marker 1 [T1] -6.52 dBm 5.77000000 GHz Marker 2 [T1] -6.08 dBm 5.78500000 GHz D1 -6.08 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2023 18:05:47
802.11a-High	 Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 4.77 dB *VBW 300 kHz *SWT 20 ms 16.72000000 MHz Marker 1 [T1] -12.18 dBm 5.81000000 GHz Marker 2 [T1] -6.60 dBm 5.82500000 GHz D1 -6.6 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2023 18:06:36

802.11n-HT20-Low	Date: 17.MAY.2023 18:07:24
802.11n-HT20-Middle	Date: 17.MAY.2023 18:08:11
802.11n-HT20-High	Date: 17.MAY.2023 18:08:57

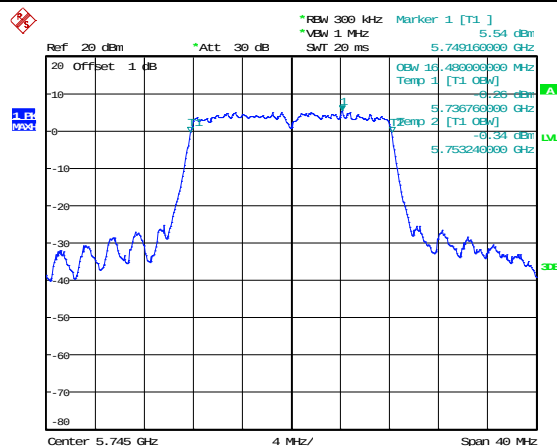
802.11n-HT40-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Delta 1 [T1]: -0.18 dB, Marker 1 [T1]: -13.53 dBm, Marker 2 [T1]: -5.02 dBm, Center: 5.755 GHz, Span: 80 MHz Date: 17.MAY.2023 18:09:38
802.11n-HT40-High	 Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Delta 1 [T1]: 3.65 dB, Marker 1 [T1]: -13.57 dBm, Marker 2 [T1]: -5.07 dBm, Center: 5.795 GHz, Span: 80 MHz Date: 17.MAY.2023 18:10:15
802.11ac-HT80	 Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 20 ms, Delta 1 [T1]: 0.30 dB, Marker 1 [T1]: -14.38 dBm, Marker 2 [T1]: -8.04 dBm, Center: 5.775 GHz, Span: 160 MHz Date: 17.MAY.2023 18:11:05



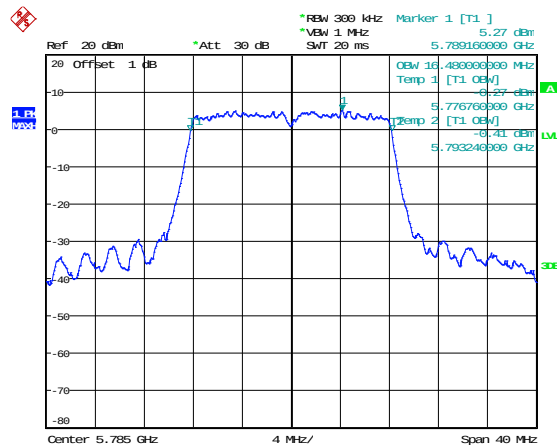
802.11n-HT20-Low	 Date: 18.MAY.2023 09:56:33
802.11n-HT20-Middle	 Date: 18.MAY.2023 09:56:47
802.11n-HT20-High	 Date: 18.MAY.2023 09:57:05

802.11n-HT40-Low	 Date: 18.MAY.2023 09:57:26
802.11n-HT40-High	 Date: 18.MAY.2023 09:57:48
802.11ac-HT80	 Date: 18.MAY.2023 09:58:28

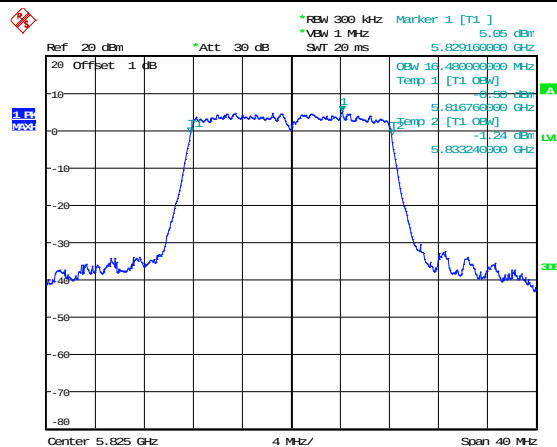
5725-5850MHz



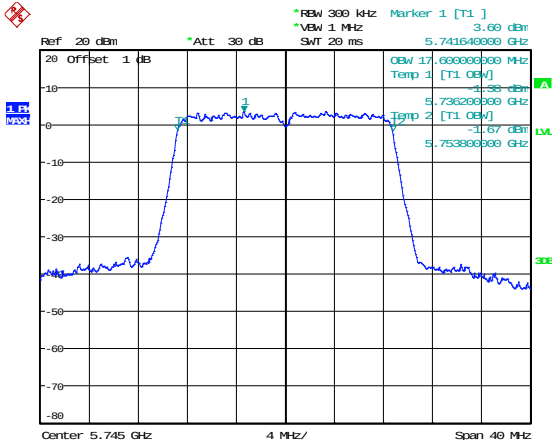
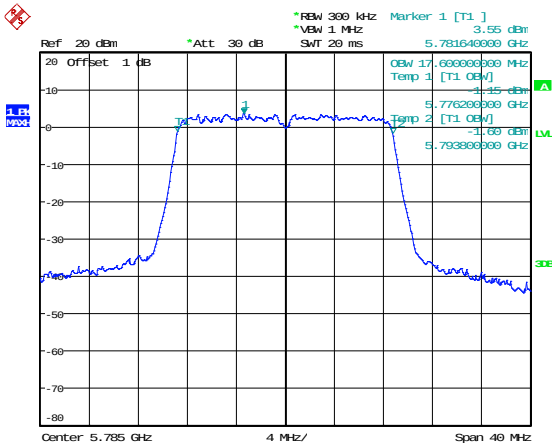
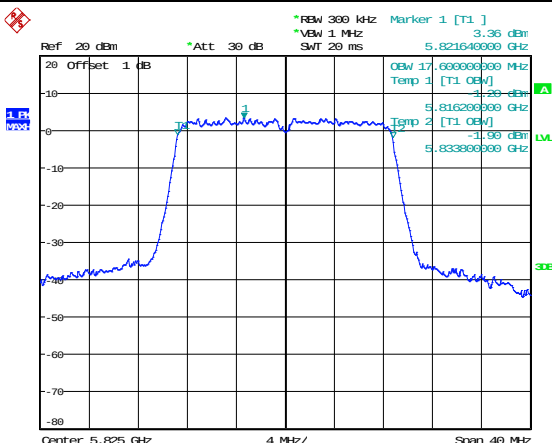
Date: 17.MAY.2023 18:02:29

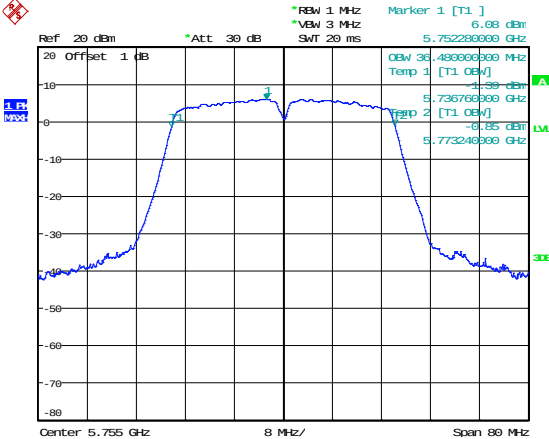
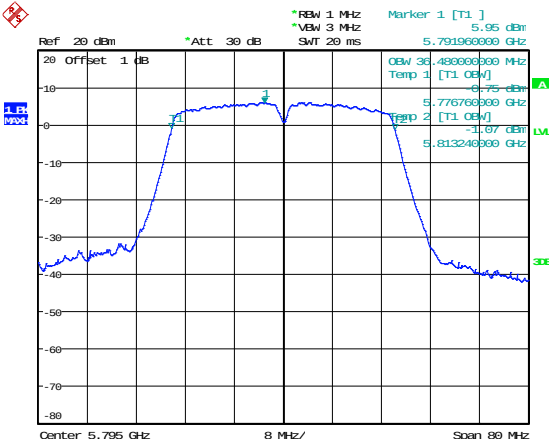
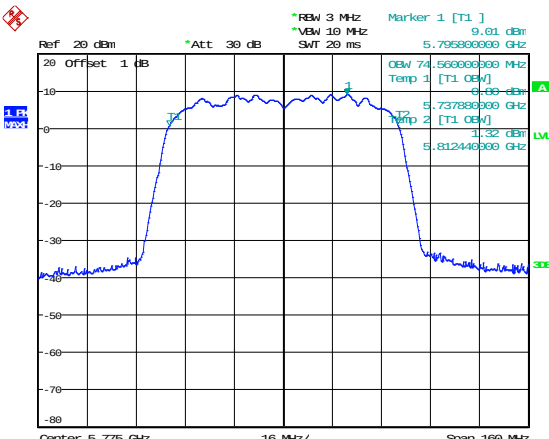


Date: 17.MAY.2023 18:03:00



Date: 17.MAY.2023 18:03:24

802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 3.60 dBm *VBW 1 MHz 5.741640000 GHz SWT 20 ms Offset 1 dB OBW 17.600000000 MHz Temp 1 [T1 OBW] -1.60 dBm Temp 2 [T1 OBW] 5.736200000 GHz -1.67 dBm 5.753800000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2023 18:00:31
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 3.55 dBm *VBW 1 MHz 5.781640000 GHz SWT 20 ms Offset 1 dB OBW 17.600000000 MHz Temp 1 [T1 OBW] -1.45 dBm Temp 2 [T1 OBW] 5.776200000 GHz -1.60 dBm 5.793800000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2023 18:01:07
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 3.36 dBm *VBW 1 MHz 5.821640000 GHz SWT 20 ms Offset 1 dB OBW 17.600000000 MHz Temp 1 [T1 OBW] -1.20 dBm Temp 2 [T1 OBW] 5.816200000 GHz -1.90 dBm 5.833800000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2023 18:01:44

802.11n-HT40-Low	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, SWT: 20 ms, Marker 1 [T1], 6.08 dBm, 5.752280000 GHz, OBW: 30.480000000 MHz, Temp: 1 [T1, OBW], -1.59 dBm, 5.736760000 GHz, Temp: 2 [T1, OBW], -0.85 dBm, 5.773240000 GHz, Center: 5.755 GHz, 8 MHz/, Span: 80 MHz Date: 17.MAY.2023 17:58:56
802.11n-HT40-High	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, SWT: 20 ms, Marker 1 [T1], 5.95 dBm, 5.791960000 GHz, OBW: 30.480000000 MHz, Temp: 1 [T1, OBW], -0.75 dBm, 5.776760000 GHz, Temp: 2 [T1, OBW], -1.07 dBm, 5.813240000 GHz, Center: 5.795 GHz, 8 MHz/, Span: 80 MHz Date: 17.MAY.2023 17:59:31
802.11ac-HT80	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, SWT: 20 ms, Marker 1 [T1], 9.01 dBm, 5.795880000 GHz, OBW: 74.560000000 MHz, Temp: 1 [T1, OBW], 0.00 dBm, 5.737880000 GHz, Temp: 2 [T1, OBW], 1.32 dBm, 5.812440000 GHz, Center: 5.775 GHz, 16 MHz/, Span: 160 MHz Date: 17.MAY.2023 17:57:48

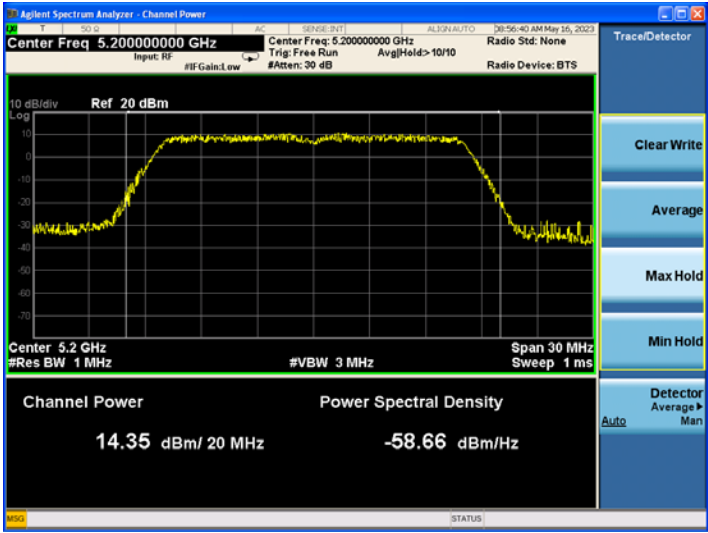
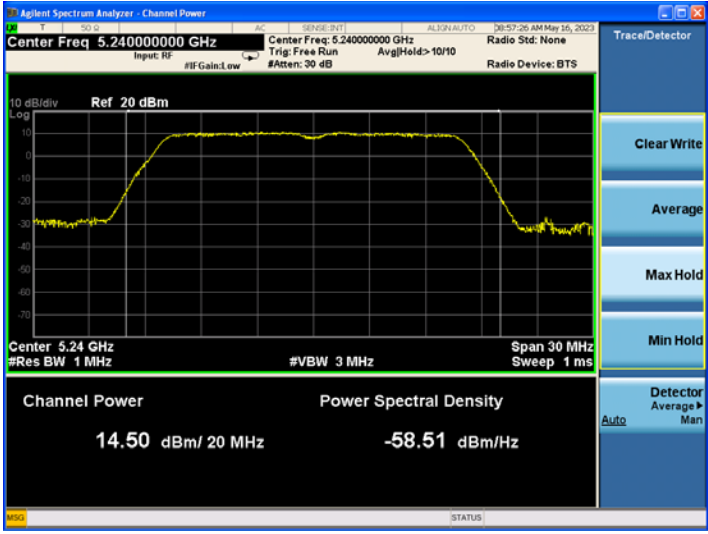
APPENDIX C

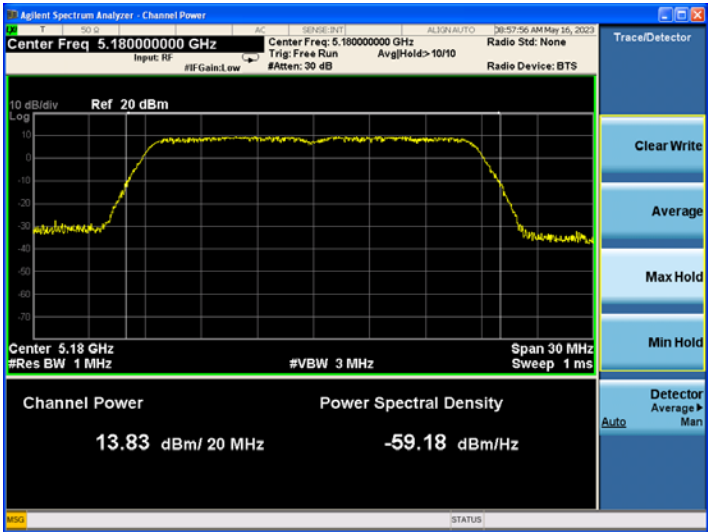
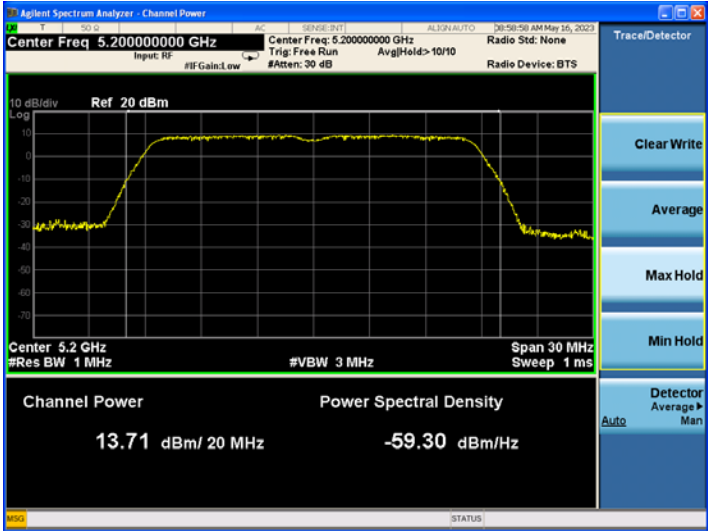
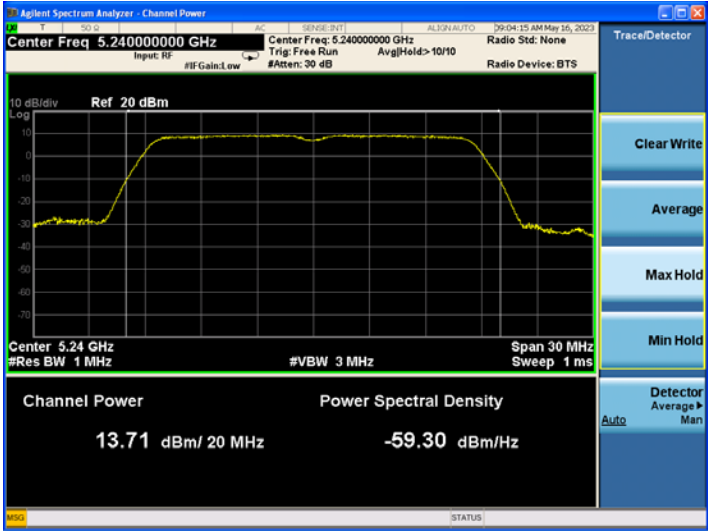
Maximum Conducted Output Power

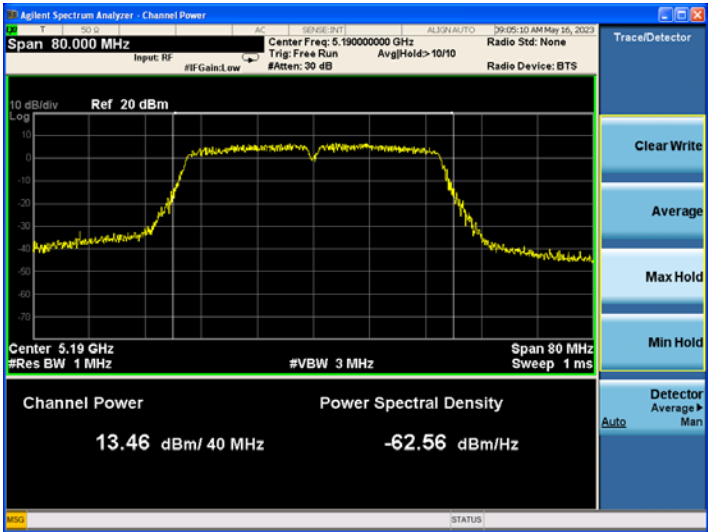
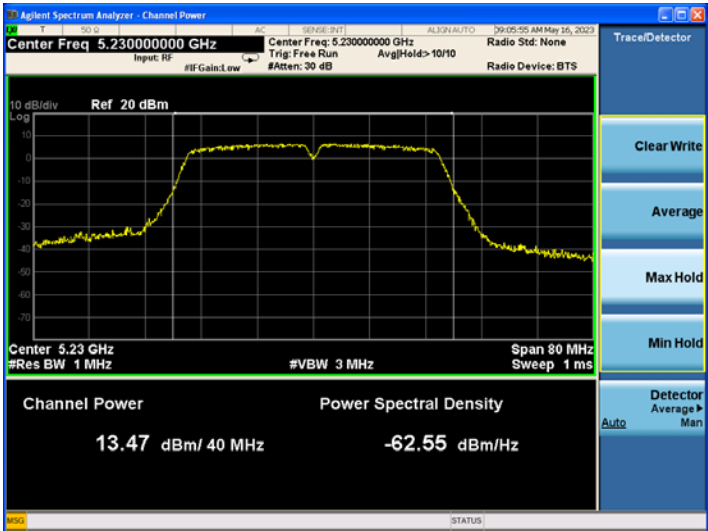
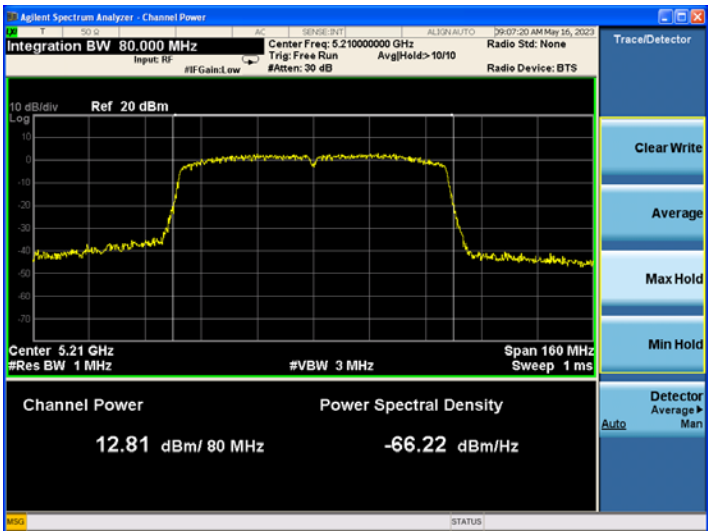
U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5180	14.81	14.80	/	23.98
	5200	14.35	14.93	/	23.98
	5240	14.50	14.61	/	23.98
802.11n-HT20	5180	13.83	13.44	16.65	23.98
	5200	13.71	13.58	16.66	23.98
	5240	13.71	13.62	16.68	23.98
802.11n-HT40	5190	13.46	13.06	16.27	23.98
	5230	13.47	13.02	16.26	23.98
802.11ac VH80	5210	12.81	11.60	15.26	23.98

U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5745	13.87	14.38	/	30.00
	5785	14.17	14.61	/	30.00
	5825	13.27	14.17	/	30.00
802.11n-HT20	5745	12.99	13.15	16.08	30.00
	5785	13.24	13.16	16.21	30.00
	5825	12.44	12.78	15.62	30.00
802.11n-HT40	5755	12.24	12.18	15.22	30.00
	5795	12.09	11.81	14.96	30.00
802.11ac VH80	5775	11.12	11.62	14.39	30.00

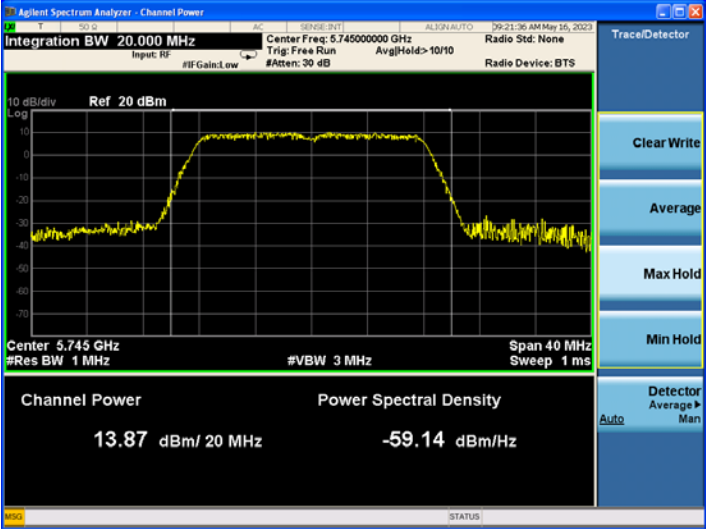
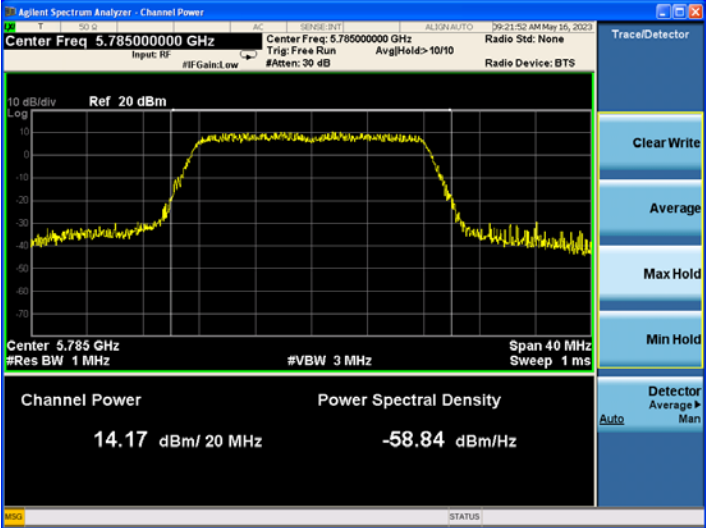
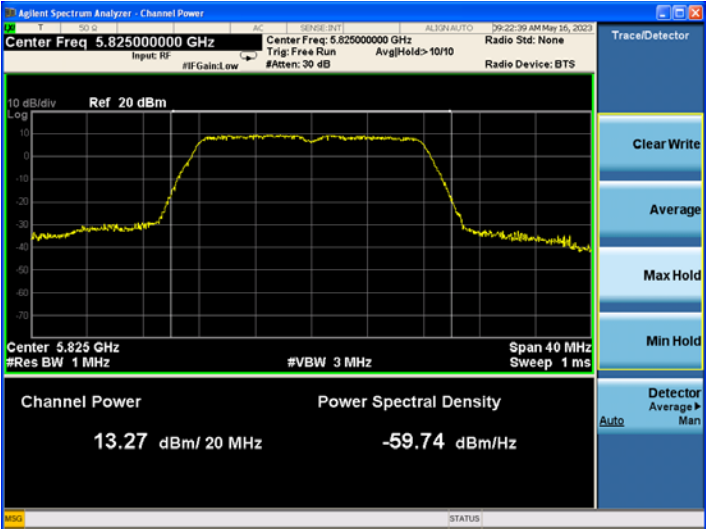
ANT 0
5150-5250MHz

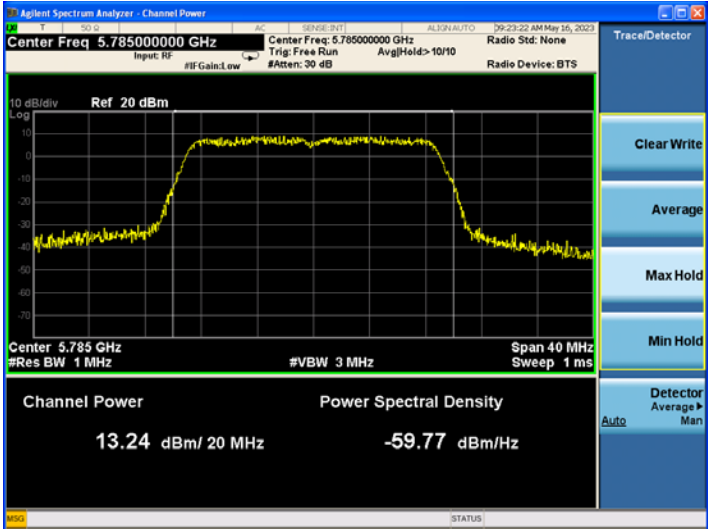
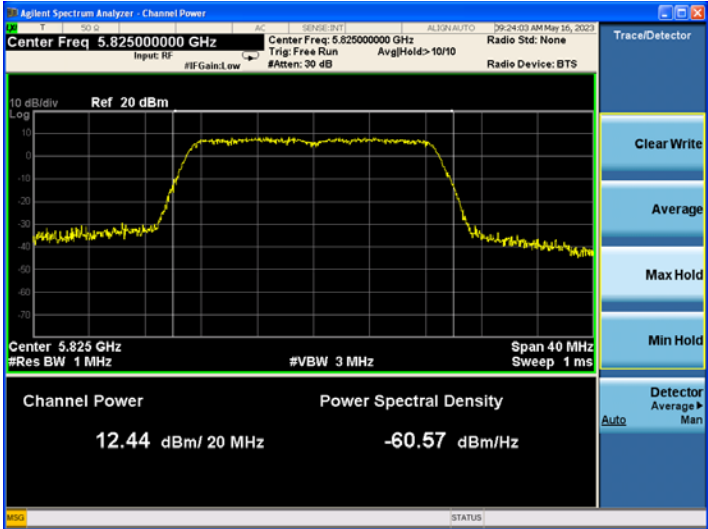
802.11a-Low	
802.11a-Middle	
802.11a-High	

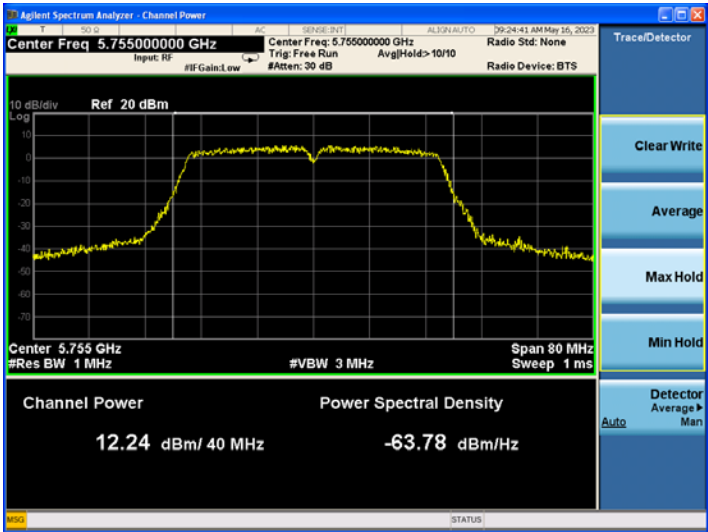
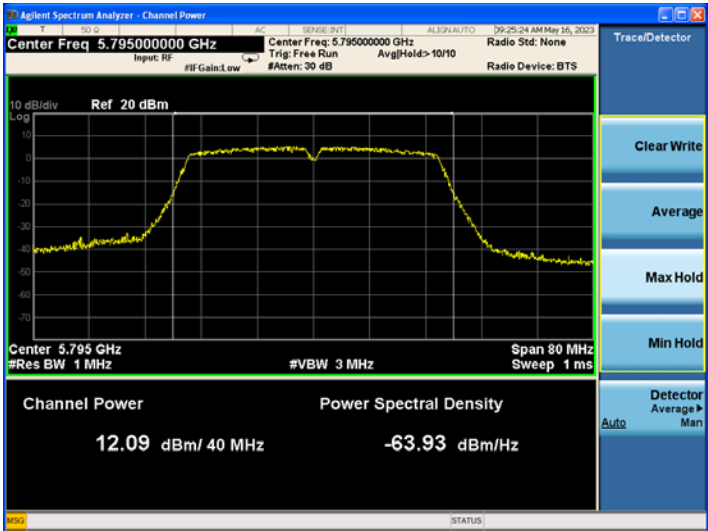
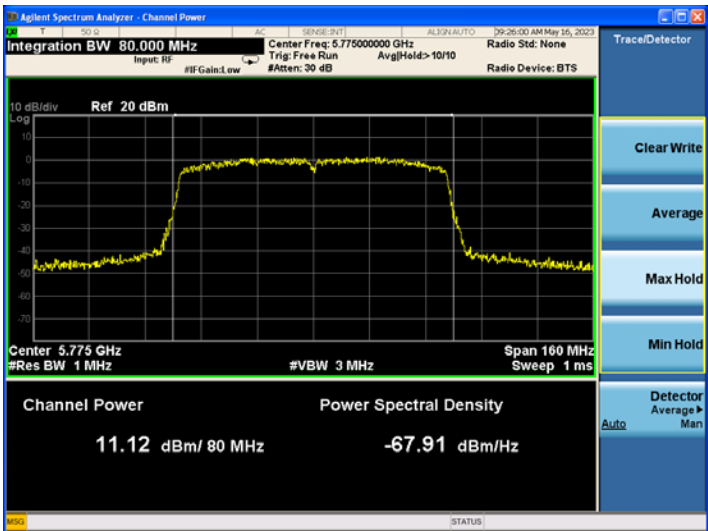
802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	 Agilent Spectrum Analyzer - Channel Power Span 80.000 MHz Center Freq: 5.190000000 GHz Radio Std: None Input: RF #IF Gain: Low #Atten: 30 dB Avg: Hold: 10/10 Radio Device: BTS 10 dB/div Ref 20 dBm Center 5.19 GHz #Res BW 1 MHz #VBW 3 MHz Span 80 MHz Sweep 1 ms Channel Power 13.46 dBm/40 MHz Power Spectral Density -62.56 dBm/Hz
802.11n-HT40-High	 Agilent Spectrum Analyzer - Channel Power Center Freq: 5.230000000 GHz Center Freq: 5.230000000 GHz Radio Std: None Input: RF #IF Gain: Low #Atten: 30 dB Avg: Hold: 10/10 Radio Device: BTS 10 dB/div Ref 20 dBm Center 5.23 GHz #Res BW 1 MHz #VBW 3 MHz Span 80 MHz Sweep 1 ms Channel Power 13.47 dBm/40 MHz Power Spectral Density -62.55 dBm/Hz
802.11ac-HT80	 Agilent Spectrum Analyzer - Channel Power Integration BW 80.000 MHz Center Freq: 5.210000000 GHz Radio Std: None Input: RF #IF Gain: Low #Atten: 30 dB Avg: Hold: 10/10 Radio Device: BTS 10 dB/div Ref 20 dBm Center 5.21 GHz #Res BW 1 MHz #VBW 3 MHz Span 160 MHz Sweep 1 ms Channel Power 12.81 dBm/80 MHz Power Spectral Density -66.22 dBm/Hz

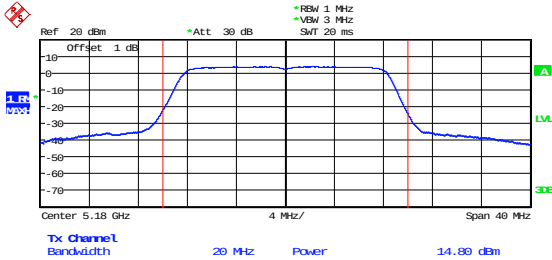
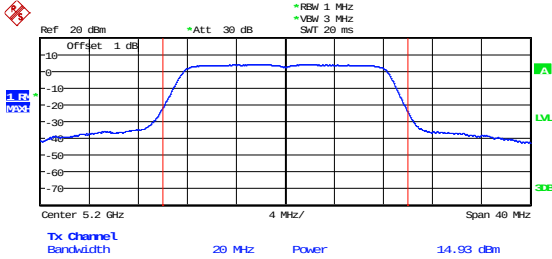
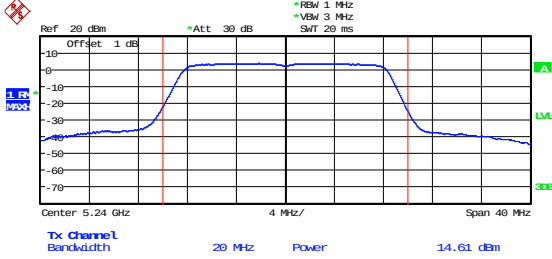
5725-5850MHz

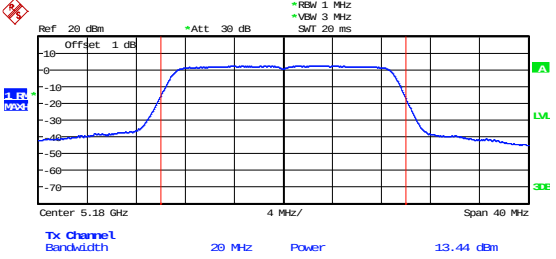
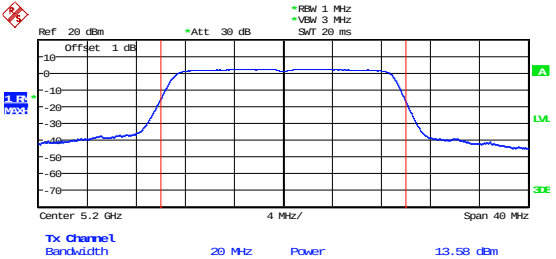
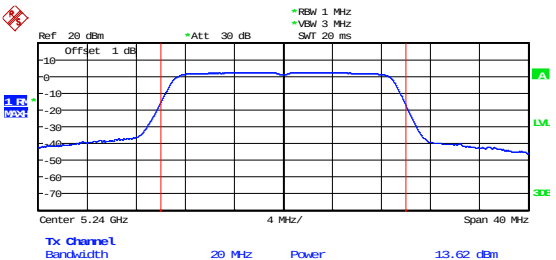
802.11a-Low	
802.11a-Middle	
802.11a-High	

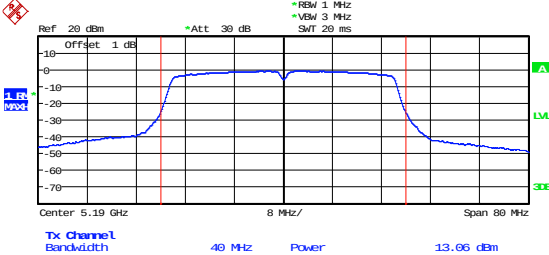
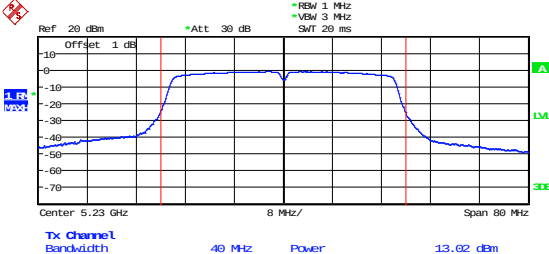
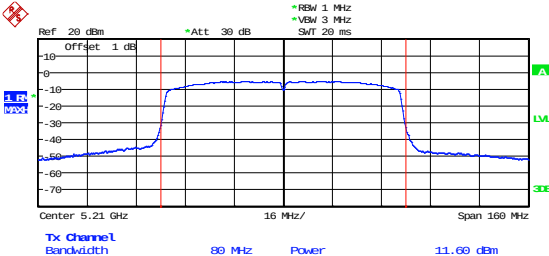
802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	
802.11n-HT40-High	
802.11ac-HT80	

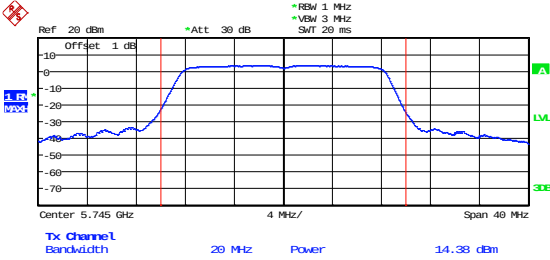
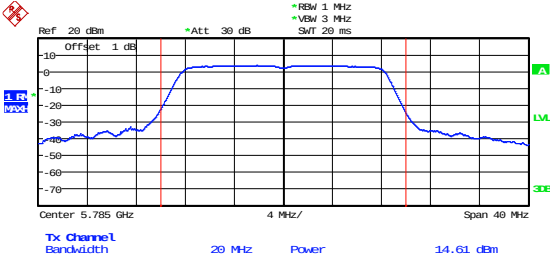
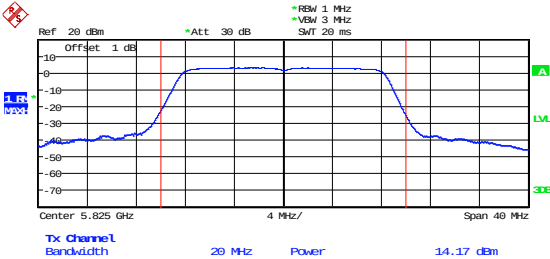
ANT 1
5150-5250MHz

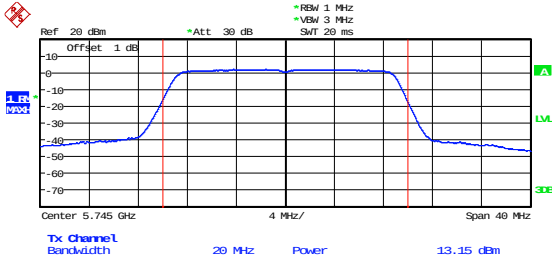
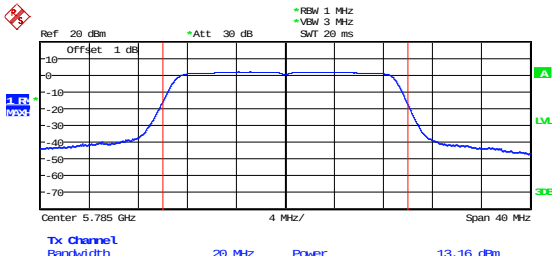
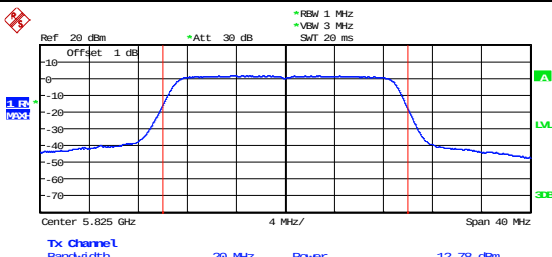
802.11a-Low	 Date: 18.MAY.2023 09:47:35
802.11a-Middle	 Date: 18.MAY.2023 09:47:46
802.11a-High	 Date: 18.MAY.2023 09:48:05

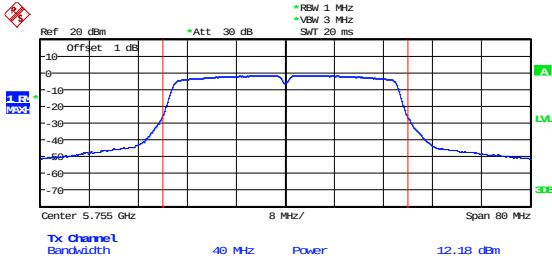
802.11n-HT20-Low	 Date: 18.MAY.2023 09:48:22
802.11n-HT20-Middle	 Date: 18.MAY.2023 09:48:37
802.11n-HT20-High	 Date: 18.MAY.2023 09:48:49

802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center 5.19 GHz Tx Channel Bandwidth 40 MHz Power 13.06 dBm Date: 18.MAY.2023 09:49:13
802.11n-HT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center 5.23 GHz Tx Channel Bandwidth 40 MHz Power 13.62 dBm Date: 18.MAY.2023 09:49:29
802.11ac-HT80	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center 5.21 GHz Tx Channel Bandwidth 80 MHz Power 11.60 dBm Date: 18.MAY.2023 09:49:51

5725-5850MHz

802.11a-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.38 dBm Date: 17.MAY.2023 17:42:20
802.11a-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.61 dBm Date: 17.MAY.2023 17:42:42
802.11a-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.17 dBm Date: 17.MAY.2023 17:43:03

802.11n-HT20-Low	 Date: 17.MAY.2023 17:43:30
802.11n-HT20-Middle	 Date: 17.MAY.2023 17:43:53
802.11n-HT20-High	 Date: 17.MAY.2023 17:44:15

802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center: 5.795 GHz Tx Channel Bandwidth: 40 MHz Power: 12.18 dBm Date: 17.MAY.2023 17:45:01
-------------------------	---

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1586	0.3049
100%		-20	1581	0.3041
100%		-10	1599	0.3074
100%		0	1596	0.3070
100%		+10	1587	0.3053
100%		+20	1600	0.3076
100%		+30	1599	0.3076
100%		+40	1587	0.3051
100%		+50	1580	0.3039
Low Battery power	102	+20	1586	0.3049
High Battery power	138	+20	1581	0.3041

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1585	0.2753
100%		-20	1587	0.2757
100%		-10	1595	0.2771
100%		0	1585	0.2753
100%		+10	1581	0.2746
100%		+20	1597	0.2776
100%		+30	1598	0.2777
100%		+40	1594	0.2769
100%		+50	1594	0.2769
Low Battery power	102	+20	1585	0.2753
High Battery power	138	+20	1587	0.2757

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****