

# Test report

**268950-7TRFWL**

Date of issue: March 25, 2015

Applicant:

**TableTop Media**

Product:

**ZIOSK**

Model:

**Z400**

FCC ID:

**XOX-Z400**

Specification:

◆ **FCC 47 CFR Part 15 Subpart C, §15.247**

Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

#### Test location

|              |                                            |
|--------------|--------------------------------------------|
| Company name | Nemko Canada Inc.                          |
| Address      | 303 River Road                             |
| City         | Ottawa                                     |
| Province     | Ontario                                    |
| Postal code  | K1V 1H2                                    |
| Country      | Canada                                     |
| Telephone    | +1 613 737 9680                            |
| Facsimile    | +1 613 737 9691                            |
| Toll free    | +1 800 563 6336                            |
| Website      | www.nemko.com                              |
| Site number  | FCC ID: 176392 (3 m semi anechoic chamber) |

|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Tested by          | Andrey Adelberg, Senior Wireless/EMC Specialist                                     |
| Reviewed by        | Kevin Rose, Wireless/EMC Specialist                                                 |
| Date               | March 25, 2015                                                                      |
| Reviewer Signature |  |

#### Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.  
© Nemko Canada Inc.

## Table of contents

|                                                                                             |           |
|---------------------------------------------------------------------------------------------|-----------|
| <b>Table of contents</b>                                                                    | <b>3</b>  |
| <b>Section 1. Report summary</b>                                                            | <b>4</b>  |
| 1.1 Applicant and manufacturer                                                              | 4         |
| 1.2 Test specifications                                                                     | 4         |
| 1.3 Test methods                                                                            | 4         |
| 1.4 Statement of compliance                                                                 | 4         |
| 1.5 Exclusions                                                                              | 4         |
| 1.6 Test report revision history                                                            | 4         |
| <b>Section 2. Summary of test results</b>                                                   | <b>5</b>  |
| 2.1 FCC Part 15 Subpart C, general requirements test results                                | 5         |
| 2.2 FCC Part 15 Subpart C, intentional radiators test results                               | 5         |
| <b>Section 3. Equipment under test (EUT) details</b>                                        | <b>6</b>  |
| 3.1 Sample information                                                                      | 6         |
| 3.2 EUT information                                                                         | 6         |
| 3.3 Technical information                                                                   | 6         |
| 3.4 Product description and theory of operation                                             | 6         |
| 3.5 EUT exercise details                                                                    | 6         |
| 3.6 EUT setup diagram                                                                       | 6         |
| <b>Section 4. Engineering considerations</b>                                                | <b>7</b>  |
| 4.1 Modifications incorporated in the EUT                                                   | 7         |
| 4.2 Technical judgment                                                                      | 7         |
| 4.3 Deviations from laboratory tests procedures                                             | 7         |
| <b>Section 5. Test conditions</b>                                                           | <b>8</b>  |
| 5.1 Atmospheric conditions                                                                  | 8         |
| 5.2 Power supply range                                                                      | 8         |
| <b>Section 6. Measurement uncertainty</b>                                                   | <b>9</b>  |
| 6.1 Uncertainty of measurement                                                              | 9         |
| <b>Section 7. Test equipment</b>                                                            | <b>10</b> |
| 7.1 Test equipment list                                                                     | 10        |
| <b>Section 8. Testing data</b>                                                              | <b>11</b> |
| 8.1 FCC 15.247(a)(2) Minimum 6 dB bandwidth for systems using digital modulation techniques | 11        |
| 8.2 FCC 15.247(b) Transmitter output power and e.i.r.p. requirements                        | 13        |
| 8.3 FCC 15.247(d) Spurious (out-of-band) emissions                                          | 15        |
| 8.4 FCC 15.247(e) Power spectral density for digitally modulated devices                    | 18        |
| <b>Section 9. Block diagrams of test set-ups</b>                                            | <b>20</b> |
| 9.1 Radiated emissions set-up                                                               | 20        |
| 9.2 Antenna terminal set-up                                                                 | 20        |



Section 1. Report summary

1.1 Applicant and manufacturer

|                 |                                  |
|-----------------|----------------------------------|
| Company name    | TableTop Media                   |
| Address         | 12404 Park Central Drive Ste 350 |
| City            | Dallas                           |
| Province/State  | TX                               |
| Postal/Zip code | 75251                            |
| Country         | United States                    |

1.2 Test specifications

|                                              |                                                              |
|----------------------------------------------|--------------------------------------------------------------|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz |
|----------------------------------------------|--------------------------------------------------------------|

1.3 Test methods

|                                                                    |                                                |
|--------------------------------------------------------------------|------------------------------------------------|
| Guidance for compliance measurements on DTS operating under 15.247 | 558074 D01 Meas Guidance v03r02 (June 5, 2014) |
|--------------------------------------------------------------------|------------------------------------------------|

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

None

1.6 Test report revision history

| Revision # | Details of changes made to test report |
|------------|----------------------------------------|
| TRF        | Original report issued                 |

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

| Part       | Test description          | Verdict                     |
|------------|---------------------------|-----------------------------|
| §15.31(e)  | Variation of power source | Pass <sup>1</sup>           |
| §15.203    | Antenna requirement       | Pass <sup>2</sup>           |
| §15.207(a) | Conducted limits          | Not applicable <sup>3</sup> |

Notes: <sup>1</sup> Measurements were performed with fully charged battery

<sup>2</sup> The Antennas are located within the enclosure of EUT and not user accessible.

<sup>3</sup> EUT is battery operated

### 2.2 FCC Part 15 Subpart C, intentional radiators test results

| Part               | Test description                                                                                                           | Verdict        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------|----------------|
| §15.247(a)(1)(i)   | Frequency hopping systems operating in the 902–928 MHz band                                                                | Not applicable |
| §15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725–5850 MHz band                                                              | Not applicable |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band                                                            | Not applicable |
| §15.247(a)(2)      | Minimum 6 dB bandwidth for systems using digital modulation techniques                                                     | Pass           |
| §15.247(b)(1)      | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band        | Not applicable |
| §15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band                                   | Not applicable |
| §15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass           |
| §15.247(c)(1)      | Fixed point-to-point operation with directional antenna gains greater than 6 dBi                                           | Not applicable |
| §15.247(c)(2)      | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams                                    | Pass           |
| §15.247(d)         | Spurious emissions                                                                                                         | Pass           |
| §15.247(e)         | Power spectral density for digitally modulated devices                                                                     | Pass           |
| §15.247(f)         | Time of occupancy for hybrid systems                                                                                       | Not applicable |

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

|                        |                    |
|------------------------|--------------------|
| Receipt date           | September 15, 2014 |
| Nemko sample ID number | 1                  |

### 3.2 EUT information

---

|               |              |
|---------------|--------------|
| Product name  | ZIOSK        |
| Model         | Z400         |
| Serial number | 001EC0890C7C |

### 3.3 Technical information

---

|                               |                                                                                                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------|
| Operating band                | 2400–2483.5 MHz                                                                                         |
| Operating frequency           | 2402–2480 MHz                                                                                           |
| Modulation type and data rate | Bluetooth Low Energy (BLE)                                                                              |
| Emission designator           | F1D                                                                                                     |
| Power requirements            | 7.4 V <sub>DC</sub> Lithium battery                                                                     |
| Antenna information           | 0.83 dBi<br>The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator. |

### 3.4 Product description and theory of operation

---

The Ziosk is a wireless, battery operated touch screen device with a 7" LCD display, used for pay-at-the-table applications in casual dining restaurants. The device can display menu items, specials, entertainment and local area information; it can also process credit card payments and print receipts.

### 3.5 EUT exercise details

---

EUT was connected to Laptop via internal (not user accessible) USB connector and Android shell commands were used to control channel, modulation and data rate settings.

### 3.6 EUT setup diagram

---




Figure 3.6-1: Setup diagram

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

# Section 5. Test conditions

---

## 5.1 Atmospheric conditions

---

|                   |               |
|-------------------|---------------|
| Temperature       | 15–30 °C      |
| Relative humidity | 20–75 %       |
| Air pressure      | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

## 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC measurements; as well as described in UKAS LAB34: The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of  $K=2$  with 95% certainty.

## Section 7. Test equipment

---

### 7.1 Test equipment list

---

*Table 7.1-1: Equipment list*

| Equipment                   | Manufacturer    | Model no.  | Asset no. | Cal cycle | Next cal.  |
|-----------------------------|-----------------|------------|-----------|-----------|------------|
| 3 m EMI test chamber        | TDK             | SAC-3      | FA002047  | 1 year    | Mar. 18/15 |
| Flush mount turntable       | Sunol           | FM2022     | FA002082  | —         | NCR        |
| Controller                  | Sunol           | SC104V     | FA002060  | —         | NCR        |
| Antenna mast                | Sunol           | TLT2       | FA002061  | —         | NCR        |
| Receiver/spectrum analyzer  | Rohde & Schwarz | ESU 26     | FA002043  | 1 year    | Oct. 24/14 |
| Bilog antenna (20–3000 MHz) | Sunol           | JB3        | FA002108  | 1 year    | Mar. 12/15 |
| Horn antenna (1–18 GHz)     | EMCO            | 3115       | FA000825  | 1 year    | Mar. 10/15 |
| Pre-amplifier (1–18 GHz)    | JCA             | JCA118-503 | FA002091  | 1 year    | June 23/15 |
| Spectrum analyzer           | Rohde & Schwarz | FSU        | FA001877  | 1 year    | Jan. 27/15 |

Note: NCR - no calibration required

## Section 8. Testing data

### 8.1 FCC 15.247(a)(2) Minimum 6 dB bandwidth for systems using digital modulation techniques

#### 8.1.1 Definitions and limits

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 8.1.2 Test summary

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 15, 2014 | Temperature       | 23 °C     |
| Test engineer | Andrey Adelberg    | Air pressure      | 1005 mbar |
| Verdict       | Pass               | Relative humidity | 32 %      |

#### 8.1.3 Observations, settings and special notes

Spectrum analyser settings:

|                      |          |
|----------------------|----------|
| Resolution bandwidth | 100 kHz  |
| Video bandwidth      | 300 kHz  |
| Frequency span       | 2 MHz    |
| Detector mode        | Peak     |
| Trace mode           | Max Hold |

#### 8.1.4 Test data

**Table 8.1-1: 6 dB bandwidth results**

| Frequency, MHz | 6 dB bandwidth, MHz | Minimum limit, MHz | Margin, MHz |
|----------------|---------------------|--------------------|-------------|
| 2402           | 0.716               | 0.50               | 0.216       |
| 2442           | 0.712               | 0.50               | 0.212       |
| 2480           | 0.712               | 0.50               | 0.212       |

Section 8  
Test name  
Specification

Testing data  
FCC 15.247(a)(2) Minimum 6 dB bandwidth for systems using digital modulation techniques  
FCC 15 Subpart C

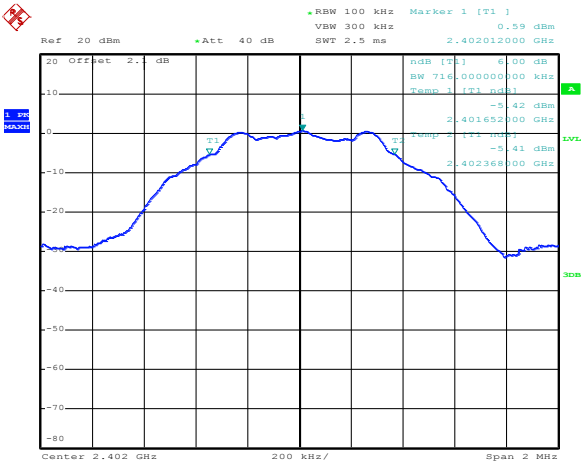


Figure 8.1-1: 6 dB bandwidth on low channel

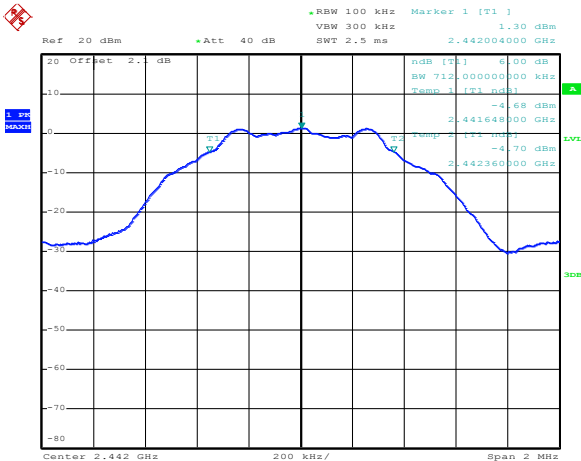


Figure 8.1-2: 6 dB bandwidth on mid channel

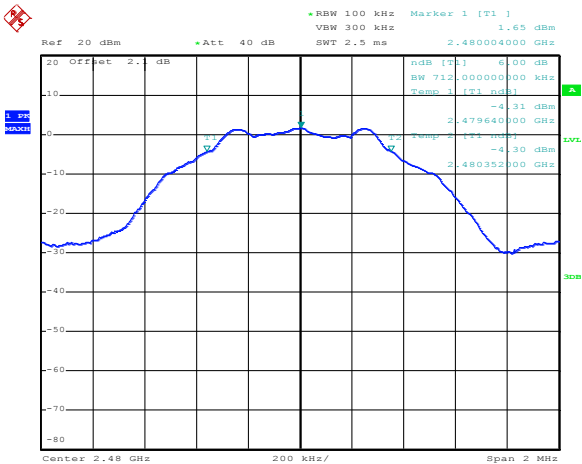


Figure 8.1-3: 6 dB bandwidth on high channel

## 8.2 FCC 15.247(b) Transmitter output power and e.i.r.p. requirements

### 8.2.1 Definitions and limits

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
  - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
    - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 8.2.2 Test summary

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 15, 2014 | Temperature       | 22 °C     |
| Test engineer | Andrey Adelberg    | Air pressure      | 1005 mbar |
| Verdict       | Pass               | Relative humidity | 31 %      |

### 8.2.3 Observations, settings and special notes


The test was performed according to DTS guidelines section 9.1.1: Method RBW ≥ DTS bandwidth. Antenna gain is 1.8 dBi; therefore there was no need to reduce the output power limit. Spectrum analyser settings:

|                      |          |
|----------------------|----------|
| Resolution bandwidth | 3 MHz    |
| Video bandwidth      | 10 MHz   |
| Detector mode        | Peak     |
| Trace mode           | Max hold |

### 8.2.4 Test data

**Table 8.2-1: Output power measurements results**

| Frequency, MHz | Output power, dBm |       | Power margin, dB | Antenna gain, dBi | EIRP, dBm  |       | EIRP margin, dB |
|----------------|-------------------|-------|------------------|-------------------|------------|-------|-----------------|
|                | Measured          | Limit |                  |                   | Calculated | Limit |                 |
| 2402           | -0.43             | 30.00 | 30.43            | 0.83              | 0.40       | 36.00 | 35.60           |
| 2442           | 0.37              | 30.00 | 29.63            | 0.83              | 1.20       | 36.00 | 34.80           |
| 2480           | 0.76              | 30.00 | 29.24            | 0.83              | 1.59       | 36.00 | 34.41           |

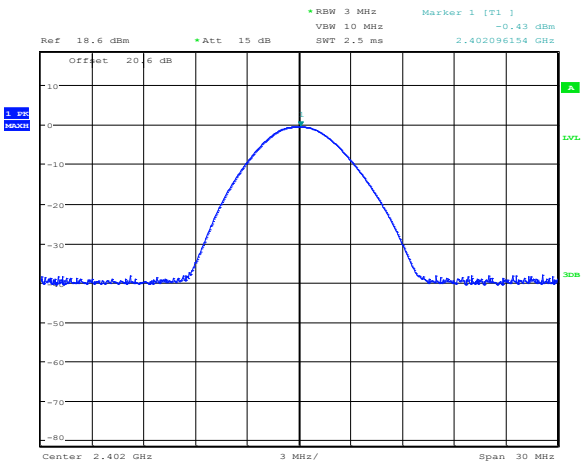

Date: 21.NOV.2014 15:44:49

Figure 8.2-1: Output power, sample plot

## 8.3 FCC 15.247(d) Spurious (out-of-band) emissions

### 8.3.1 Definitions and limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Table 8.3-1: FCC §15.209 – Radiated emission limits**

| Frequency, MHz | Field strength of emissions |                                 | Measurement distance, m |
|----------------|-----------------------------|---------------------------------|-------------------------|
|                | $\mu\text{V/m}$             | $\text{dB}\mu\text{V/m}$        |                         |
| 0.009–0.490    | 2400/F                      | $67.6 - 20 \times \log_{10}(F)$ | 300                     |
| 0.490–1.705    | 24000/F                     | $87.6 - 20 \times \log_{10}(F)$ | 30                      |
| 1.705–30.0     | 30                          | 29.5                            | 30                      |
| 30–88          | 100                         | 40.0                            | 3                       |
| 88–216         | 150                         | 43.5                            | 3                       |
| 216–960        | 200                         | 46.0                            | 3                       |
| above 960      | 500                         | 54.0                            | 3                       |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

**Table 8.3-2: Restricted frequency bands**

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110       | 16.42–16.423        | 399.9–410     | 4.5–5.15    |
| 0.495–0.505       | 16.69475–16.69525   | 608–614       | 5.35–5.46   |
| 2.1735–2.1905     | 16.80425–16.80475   | 960–1240      | 7.25–7.75   |
| 4.125–4.128       | 25.5–25.67          | 1300–1427     | 8.025–8.5   |
| 4.17725–4.17775   | 37.5–38.25          | 1435–1626.5   | 9.0–9.2     |
| 4.20725–4.20775   | 73–74.6             | 1645.5–1646.5 | 9.3–9.5     |
| 6.215–6.218       | 74.8–75.2           | 1660–1710     | 10.6–12.7   |
| 6.26775–6.26825   | 108–121.94          | 1718.8–1722.2 | 13.25–13.4  |
| 6.31175–6.31225   | 123–138             | 2200–2300     | 14.47–14.5  |
| 8.291–8.294       | 149.9–150.05        | 2310–2390     | 15.35–16.2  |
| 8.362–8.366       | 156.52475–156.52525 | 2483.5–2500   | 17.7–21.4   |
| 8.37625–8.38675   | 156.7–156.9         | 2690–2900     | 22.01–23.12 |
| 8.41425–8.41475   | 162.0125–167.17     | 3260–3267     | 23.6–24.0   |
| 12.29–12.293      | 167.72–173.2        | 3332–3339     | 31.2–31.8   |
| 12.51975–12.52025 | 240–285             | 3345.8–3358   | 36.43–36.5  |
| 12.57675–12.57725 | 322–335.4           | 3600–4400     | Above 38.6  |
| 13.36–13.41       |                     |               |             |

### 8.3.2 Test summary

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 16, 2014 | Temperature       | 22 °C     |
| Test engineer | Andrey Adelberg    | Air pressure      | 1004 mbar |
| Verdict       | Pass               | Relative humidity | 31 %      |

### 8.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic. Cabinet radiation measurements were performed at a distance of 3 m. No emissions were detected within 20 dB of the specification limit therefore none are reported as per FCC §15.31(o). Band edge data is presented below. Conducted restricted bands average limit was calculated as follows: 54 dBμV/m – 95.23 dB – 0.83 dBi = –42.06 dBm.

Spectrum analyser settings for measurements within restricted bands below 1 GHz:

|                      |          |
|----------------------|----------|
| Resolution bandwidth | 100 kHz  |
| Video bandwidth      | 300 kHz  |
| Detector mode        | Peak     |
| Trace mode           | Max Hold |


Spectrum analyser settings for peak measurements within restricted bands above 1 GHz:

|                      |          |
|----------------------|----------|
| Resolution bandwidth | 1 MHz    |
| Video bandwidth      | 3 MHz    |
| Detector mode        | Peak     |
| Trace mode           | Max Hold |

Spectrum analyser settings for average measurements within restricted bands above 1 GHz:


|                      |                                 |
|----------------------|---------------------------------|
| Resolution bandwidth | 1 MHz                           |
| Video bandwidth      | 10 Hz                           |
| Detector mode        | RMS                             |
| Trace mode           | Power averaging over 100 sweeps |

### 8.3.4 Test data

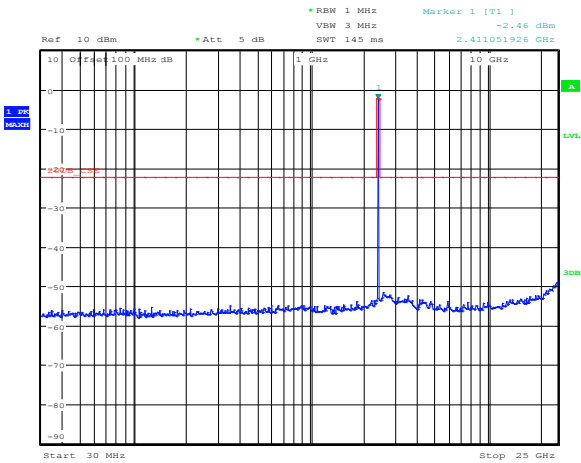


Date: 24.NOV.2014 13:27:42

**Figure 8.3-1:** Conducted spurious emissions outside restricted bands, low channel

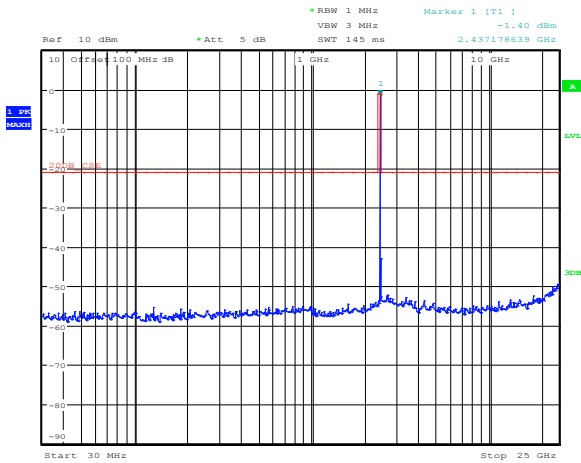


Date: 24.NOV.2014 13:28:17

**Figure 8.3-2:** Conducted spurious emissions outside restricted bands, mid channel

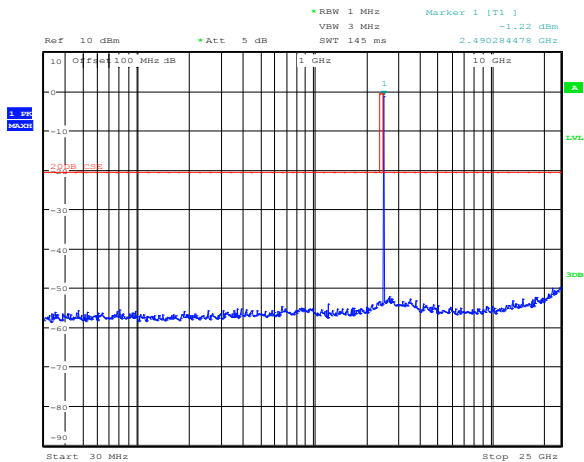


Date: 24.NOV.2014 13:28:46

Figure 8.3-3: Conducted spurious emissions outside restricted bands, high channel

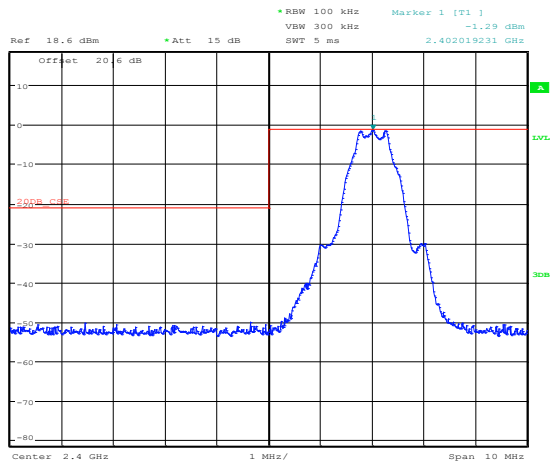

Date: 21.NOV.2014 16:49:26

Figure 8.3-4: Conducted spurious emissions at the lower band edge

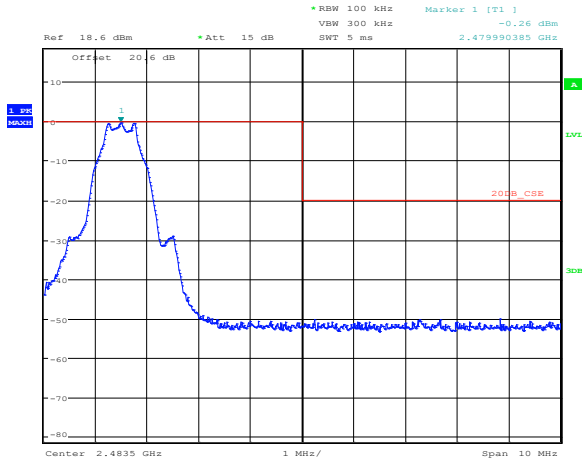

Date: 21.NOV.2014 16:46:32

Figure 8.3-5: Conducted spurious emissions at the upper band edge

Table 8.3-3: Band edges measurements results for restricted bands

| Channel | Frequency, MHz | Peak field strength, dBμV/m |       | Peak margin, dB | Average, dBμV/m |       | Average margin, dB |
|---------|----------------|-----------------------------|-------|-----------------|-----------------|-------|--------------------|
|         |                | Measured                    | Limit |                 | Measured        | Limit |                    |
| Low     | 2390.0         | 33.78                       | 74.00 | 40.22           | 33.78           | 54.00 | 20.22              |
| High    | 2483.5         | 54.99                       | 74.00 | 19.01           | 39.80           | 54.00 | 14.20              |

Note: lower band edge peak field strength measurement results were below average limit, therefore no further measurement was performed at this frequency.

## 8.4 FCC 15.247(e) Power spectral density for digitally modulated devices

---

### 8.4.1 Definitions and limits

---

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 8.4.2 Test summary

---

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 16, 2014 | Temperature       | 22 °C     |
| Test engineer | Andrey Adelberg    | Air pressure      | 1004 mbar |
| Verdict       | Pass               | Relative humidity | 32 %      |

### 8.4.3 Observations, settings and special notes

---

The test was performed using method described in section 10.2 Method PKPSD (peak PSD) (trace averaging with EUT transmitting at full power throughout each sweep). Spectrum analyser settings:

|                      |          |
|----------------------|----------|
| Resolution bandwidth | 100 kHz  |
| Video bandwidth      | 1 MHz    |
| Detector mode        | Peak     |
| Trace mode           | Max hold |

8.4.4 Test data

Table 8.4-1: PSD measurements results

| Frequency, MHz | PSD, dBm/100 kHz | PSD limit, dBm/3 kHz | Margin, dB |
|----------------|------------------|----------------------|------------|
| 2402           | 0.54             | 8.00                 | 7.46       |
| 2442           | 1.24             | 8.00                 | 6.76       |
| 2480           | 1.65             | 8.00                 | 6.35       |


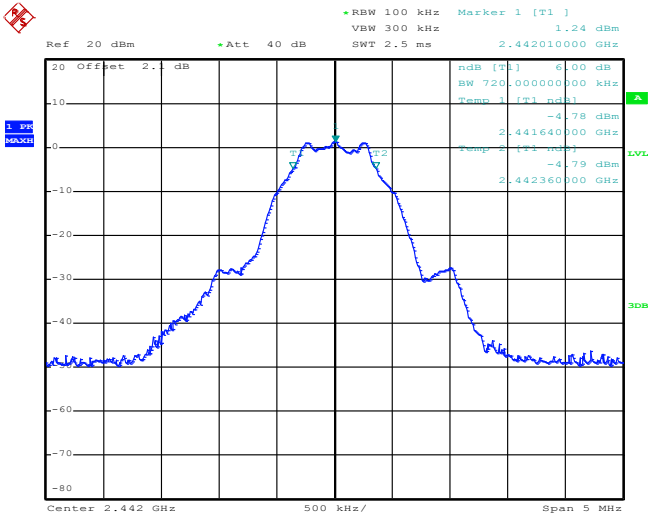


Figure 8.4-1: PSD sample plot

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

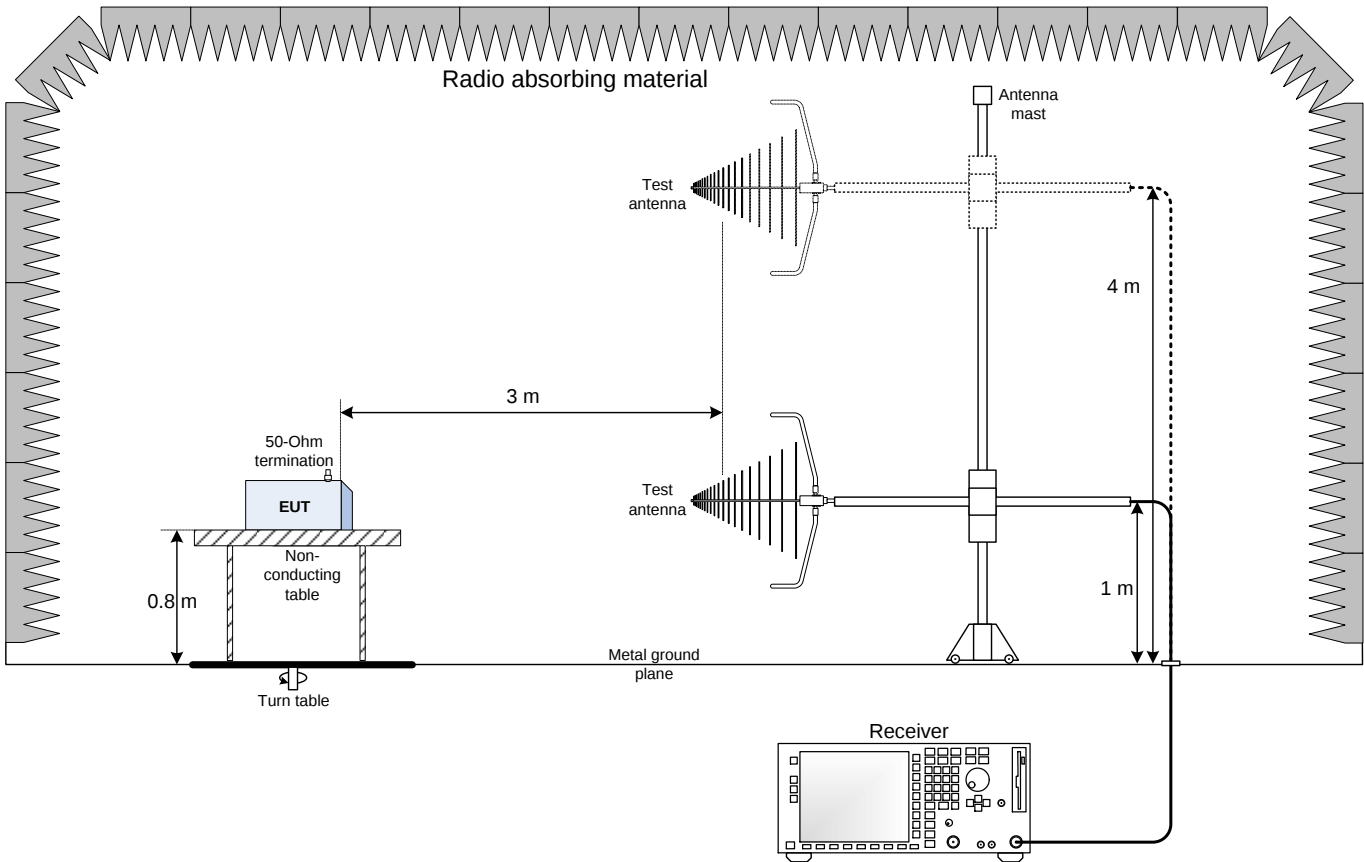

9.2 Antenna terminal set-up

