

FCC Measurement/Technical Report on

WLAN and Bluetooth module

JODY-W683-01A

FCC ID: XPYJODYW6A
IC: 8595A-JODYW6A

Test Report Reference: MDE_UBLOX_2411_FCC_03_rev01

Test Laboratory:
7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Jörg-Timm Kilisch
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company
www.7layers.com

Commerzbank AG Account No. 303 016 000 Bank Code 300 400 00 IBAN DE81 3004 0000 0303 0160 00 Swift Code COBADEFF

Table of Contents

1 Applied Standards and Test Summary	3
1.1 Applied Standards	3
1.2 FCC-IC Correlation Table	4
1.3 Measurement Summary	4
2 Revision History / Signatures	10
3 Administrative Data	11
3.1 Testing Laboratory	11
3.2 Project Data	11
3.3 Applicant Data	11
3.4 Manufacturer Data	12
4 Test object Data	13
4.1 General EUT Description	13
4.2 EUT Main components	13
4.3 Ancillary Equipment	14
4.4 Auxiliary Equipment	15
4.5 EUT Setups	15
4.6 Operating Modes / Test Channels	16
4.7 Product labelling	16
5 Test Results	17
5.1 Occupied Bandwidth (6 dB)	17
5.2 Occupied Bandwidth (99%)	21
5.3 Peak Power Output	25
5.4 Spurious RF Conducted Emissions	28
5.5 Transmitter Spurious Radiated Emissions	37
5.6 Band Edge Compliance Conducted	73
5.7 Band Edge Compliance Radiated	80
5.8 Power Density	107
6 Test Equipment	112
6.1 Test Equipment Hardware	112
6.2 Test Equipment Software	115
7 Antenna Factors, Cable Loss and Sample Calculations	116
7.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	116
7.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	117
7.3 Antenna R&S HL562 (30 MHz – 1 GHz)	118
7.4 Antenna R&S HF907 (1 GHz – 18 GHz)	119
7.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	120
7.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	121
8 Measurement Uncertainties	122
9 Photo Report	123

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization
Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-24 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02".

ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024 is applied.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 3: 5.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 3: 5.4 (d)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 3: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 3: 5.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.3
Receiver spurious emissions	–	–

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15
 Subpart C §15.247

§ 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10, chapter 11.8.1

Final Result

OP-Mode Radio Technology, Operating Frequency	Setup	Date	FCC	IC
WLAN ax 20 MHz, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, mid	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, mid	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, mid	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, mid	S01_01A_DB01	2025-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 15
 Subpart C §15.247

IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10, chapter 6.9.3

Final Result

OP-Mode Radio Technology, Operating Frequency	Setup	Date	FCC	IC
WLAN ax 20 MHz, high	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN ax 20 MHz, low	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN ax 20 MHz, mid	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN b, high	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN b, low	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN b, mid	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN g, high	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN g, low	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN g, mid	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN n 20 MHz, high	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN n 20 MHz, low	S01_01A_DB01	2025-06-18	N/A	Performed
WLAN n 20 MHz, mid	S01_01A_DB01	2025-06-18	N/A	Performed

47 CFR CHAPTER I FCC PART 15
 Subpart C §15.247

§ 15.247 (b) (3)

Peak Power Output

The measurement was performed according to ANSI C63.10, chapter 11.9.2.3.2

Final Result

OP-Mode Radio Technology, Operating Frequency, Measurement method	Setup	Date	FCC	IC
WLAN ax 20 MHz, high, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, low, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, mid, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, high, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, low, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, mid, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, high, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, low, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, mid, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, high, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, low, conducted	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, mid, conducted	S01_01A_DB01	2025-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 15
 Subpart C §15.247

§ 15.247 (d)

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10, chapter 11.11

Final Result

OP-Mode Radio Technology, Operating Frequency	Setup	Date	FCC	IC
WLAN ax 20 MHz, high	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, low	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, mid	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, high	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, low	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, mid	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN g, high	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN g, low	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN g, mid	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN n 20 MHz, high	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN n 20 MHz, low	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN n 20 MHz, mid	S01_01A_DB01	2025-06-23	Passed	Passed

47 CFR CHAPTER I FCC PART 15
 Subpart C §15.247

§ 15.247 (d)

Transmitter Spurious Emissions in Restricted Bands

The measurement was performed according to ANSI C63.10, chapter 6.4, 6.5, 6.6.5 (radiated method), 11.12.2.5.2.1 (conducted method)

Final Result

OP-Mode Radio Technology, Operating Frequency, Measurement range	Setup	Date	FCC	IC
WLAN ax 20 MHz, high, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, high, 30 MHz - 1 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, high, 9 kHz - 30 MHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, low, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, low, 30 MHz - 1 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, low, 9 kHz - 30 MHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, mid, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, mid, 30 MHz - 1 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN ax 20 MHz, mid, 9 kHz - 30 MHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-23	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-21	Passed	Passed
WLAN b, high, 9 kHz - 30 MHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-17	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-21	Passed	Passed
WLAN b, low, 9 kHz - 30 MHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-22	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-21	Passed	Passed

47 CFR CHAPTER I FCC PART 15 § 15.247 (d)
 Subpart C §15.247

Transmitter Spurious Emissions in Restricted Bands

The measurement was performed according to ANSI C63.10, chapter 6.4, 6.5, 6.6.5 (radiated method), 11.12.2.5.2.1 (conducted method) Final Result

OP-Mode Radio Technology, Operating Frequency, Measurement range	Setup	Date	FCC	IC
WLAN b, mid, 9 kHz - 30 MHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz Remark: Measurement Method Radiated	S02_01A_DB01	2025-07-22	Passed	Passed
WLAN g, high, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN g, low, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN g, mid, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN n 20 MHz, high, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN n 20 MHz, low, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed
WLAN n 20 MHz, mid, 1 GHz - 26 GHz Remark: Measurement Method Conducted	S01_01A_DB01	2025-06-23	Passed	Passed

47 CFR CHAPTER I FCC PART 15 § 15.247 (d)
 Subpart C §15.247

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10, chapter 11.11 Final Result

OP-Mode Radio Technology, Operating Frequency, Band Edge	Setup	Date	FCC	IC
WLAN ax 20 MHz, high, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, low, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, high, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, low, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, high, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, low, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, high, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, low, low	S01_01A_DB01	2025-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 15 § 15.247 (d)
 Subpart C §15.247

Band Edge Compliance Restricted Bands

The measurement was performed according to ANSI C63.10, chapter 6.6.5, 11.12.2.5.2.1 Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
WLAN ax 20 MHz, low Remark: low BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, high Remark: high BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, low Remark: low BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, high Remark: high BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, high Remark: high BE radiated measurement	S02_01A_DB01	2025-07-23	Passed	Passed
WLAN g, low Remark: low BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, high Remark: high BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, low Remark: low BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, high Remark: high BE conducted measurement	S01_01A_DB01	2025-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 15 § 15.247 (e)
 Subpart C §15.247

Power Density

The measurement was performed according to ANSI C63.10, chapter 11.10.7 Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
WLAN ax 20 MHz, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN ax 20 MHz, mid	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN b, mid	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN g, mid	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, high	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, low	S01_01A_DB01	2025-06-18	Passed	Passed
WLAN n 20 MHz, mid	S01_01A_DB01	2025-06-18	Passed	Passed

N/A: Not applicable
 N/P: Not performed

2 REVISION HISTORY / SIGNATURES

Report version control			
Version	Release date	Change Description	Version validity
initial	2025-10-01	--	valid
rev01	2026-01-05	Corrected EUT Software Version in chapter 4.2 EUT Main components	valid

COMMENT: Only Path C has been tested for the variant JODY-W683-01A in this report. All tests have been performed for the main variant JODY W683-21A. See report MDE_UBLOX_2411_FCC_01 for the results.



(responsible for accreditation scope)
Dipl.-Ing. Marco Kullik



(responsible for testing and report)
Dipl.-Ing. Daniel Gall



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkKS D-PL-12140-01-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik
Report Template Version: 2025-02-28

3.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2026-01-05
Testing Period: 2025-06-18 to 2025-07-23

3.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
8800 Thalwil
Switzerland
Contact Person: Filip Kruzela

3.4 MANUFACTURER DATA

Company Name: See Applicant

Address:

Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	WLAN and Bluetooth Module
Product name	JODY-W6
Type	JODY-W683-01A
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	1.8 / 3.3 V
Antenna / Gain	External antenna / 4.1 dBi gain (Radiated measurements were performed with 50 Ohm termination) The EUT has three antenna ports. One is for Bluetooth and two are for WLAN. For WLAN there are three cores, but only two cores are active. Core 1 supports 20 and 40 MHz BW, belongs to MAC one and is routed to the middle antenna port (referred to in the report as Path B), while the second one (Path C) supports 20 MHz only and is routed to antenna port marked with Path A/C in the following picture. 
Tested Modulation Type	BT Classic: GFSK (BDR), Pi/4 DQPSK (EDR 2), 8DPSK (EDR 3) BT LE: GFSK WLANb: DSSS WLANg/n/ax: OFDM
Specific product description for the EUT	The EUT is a Bluetooth and WLAN module. Supported technologies are Bluetooth Classic, Bluetooth Low Energy and WLAN b, g, n, ax 20 and 40 MHz bandwidth.
EUT ports (connected cables during testing):	Enclosure Data DC Antenna The EUT is a module with solder pads for surface mounting, so no cables were connected to the EUT itself.
Tested datarates	BT Classic: 1 (BDR), 2 (EDR 2) and 3 Mbps (EDR 3) BT LE: 1 and 2 Mbps WLAN b: 1 Mbps, g: 24 Mbps, n: MCS 7 SISO, ax: MSC 10

Special software used for testing	Labtool V2.0.0.26.3 on computer board provided by applicant.																																																																									
Used output power setting in test software	WLAN Path C: <table><tr><th colspan="12">2.4 GHz</th></tr><tr><th>Mode</th><th>Ch.1</th><th>Ch.2</th><th>Ch.3</th><th>Ch.4</th><th>Ch.5</th><th>Ch.6</th><th>Ch.7</th><th>Ch.8</th><th>Ch.9</th><th>Ch.10</th><th>Ch.11</th></tr><tr><td>b</td><td>19</td><td colspan="4">21</td><td colspan="3">22</td><td colspan="2">21</td><td>18</td><td>17</td></tr><tr><td>g</td><td>13</td><td>14</td><td colspan="2">16</td><td colspan="3">18</td><td>17</td><td>16</td><td>14</td><td>11</td></tr><tr><td>n20</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>17</td><td>16</td><td>15</td><td>14</td><td>10</td></tr><tr><td>ax20</td><td>12</td><td>13</td><td colspan="2">15</td><td>16</td><td colspan="2">17</td><td>16</td><td>14</td><td>12</td><td>9</td></tr></table>	2.4 GHz												Mode	Ch.1	Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9	Ch.10	Ch.11	b	19	21				22			21		18	17	g	13	14	16		18			17	16	14	11	n20	13	14	15	16	17	18	17	16	15	14	10	ax20	12	13	15		16	17		16	14	12	9
2.4 GHz																																																																										
Mode	Ch.1	Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9	Ch.10	Ch.11																																																															
b	19	21				22			21		18	17																																																														
g	13	14	16		18			17	16	14	11																																																															
n20	13	14	15	16	17	18	17	16	15	14	10																																																															
ax20	12	13	15		16	17		16	14	12	9																																																															

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT 01A DB01	DE1015194db01	
Sample Parameter	Value	
Serial No.	CF8B8F44FC164A40500	
HW Version	PCB: 03, BOM: 05	
SW Version	18.99.2.p145.298	
Comment		

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

-	-	-
---	---	---

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
Carrier Board	UBLOX, JODY-Carrier Board, Rev. E, -, -	Board providing ports
M2-card adapter	UBLOX, JODY Carrier Board M.2 Adapter, REV. B, -, -	M2-card adapter
Okdo ROCK #5	Okdo ROCK, ROCK 5 Model B 8GB Single Board Computer , -, -, #5	Computer for controlling device

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S02_01A_DB01	EUT 01A DB01, M2-card adapter, Carrier Board,	Radiated Setup
S01_01A_DB01	EUT 01A DB01, Okdo ROCK #5, M2-card adapter, Carrier Board,	Conducted Setup

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

WLAN

20 MHz Test Channels:

Channel:

Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
1	6	11
2412	2437	2462

For Duty Cycle plots see report MDE_UBLOX_2411_FCC_01

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 OCCUPIED BANDWIDTH (6 DB)

Standard FCC Part 15 Subpart C

The test was performed according to:
ANSI C63.10, chapter 11.8.1

5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.


The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1-5 % of OBW, at least 100 kHz
- Video Bandwidth (VBW): $\geq 3 \times \text{RBW}$
- Span: see plots
- Trace: Maxhold
- Sweeps: see plots
- Sweep time: Auto
- Detector: Peak

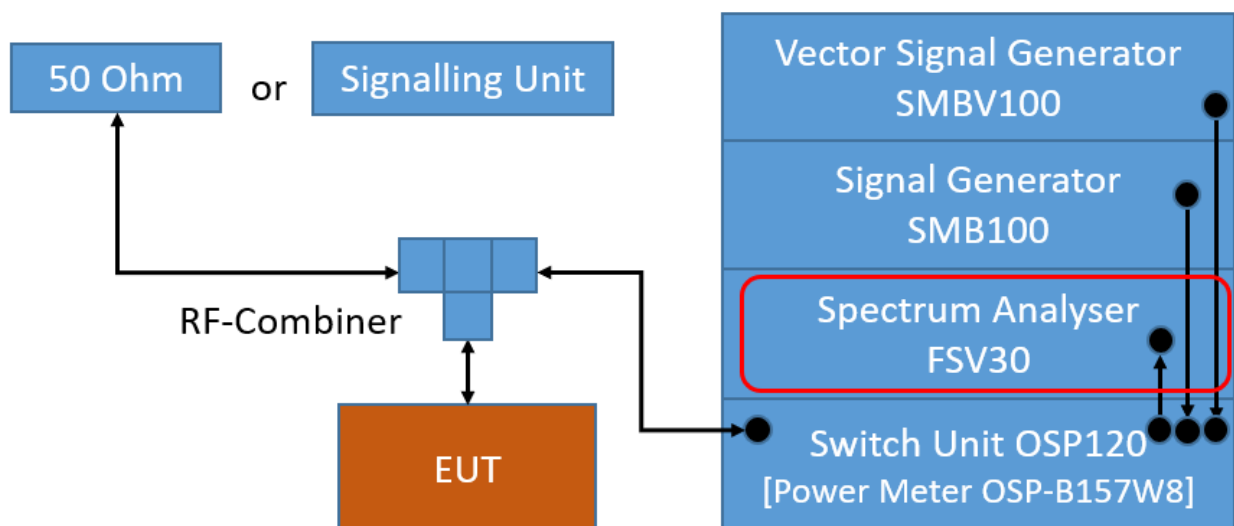

TS8997; Channel Bandwidth

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 1013 hPa
 Humidity: 44 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	9.1	0.5	8.6
	6	2437	9.1	0.5	8.6
	11	2462	9.1	0.5	8.6

WLAN g-Mode; 20 MHz; 24 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.7	0.5	16.2
	6	2437	16.7	0.5	16.2
	11	2462	16.7	0.5	16.2

WLAN n-Mode; 20 MHz; MCS7

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.8	0.5	17.3
	6	2437	17.9	0.5	17.4
	11	2462	17.9	0.5	17.4

WLAN ax-Mode; 20 MHz; MCS10

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	18.9	0.5	18.4
	6	2437	18.8	0.5	18.3
	11	2462	19.0	0.5	18.5

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = mid
(S01_01A_DB01)



Date: 18 JUN 2025 19:46:30

Radio Technology = WLAN g, Operating Frequency = low
(S01_01A_DB01)




Date: 18 JUN 2025 19:59:07

Radio Technology = WLAN n 20 MHz, Operating Frequency = low
(S01_01A_DB01)



Date: 18 JUN 2025 20:22:48

Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid
(S01_01A_DB01)

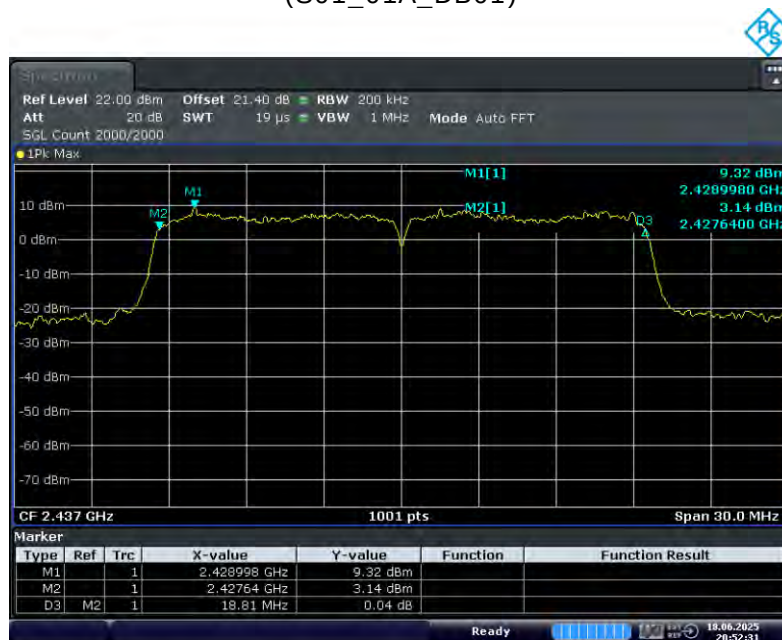

Date: 18 JUN 2025 20:52:31

5.1.5 TEST EQUIPMENT USED

- R&S TS8997

5.2 OCCUPIED BANDWIDTH (99%)

Standard FCC Part 15 Subpart C

The test was performed according to:
ANSI C63.10, chapter 6.9.3

5.2.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1 to 5 % of the OBW
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 1.5 to 5 times the OBW
- Trace: Maxhold
- Sweeps: see plots
- Sweptime: Auto
- Detector: Peak

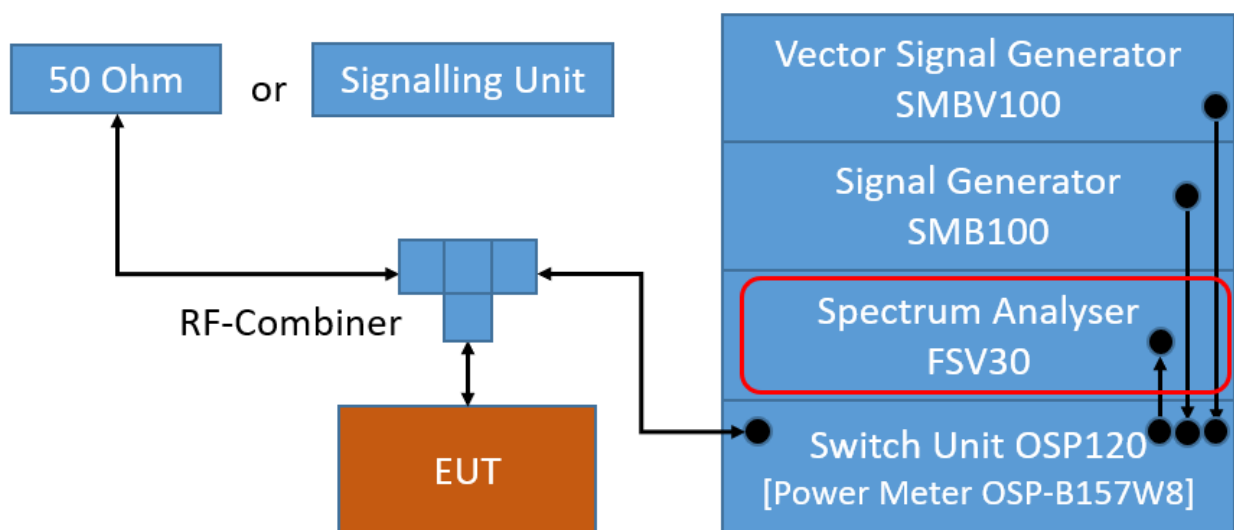

TS8997; Channel Bandwidth

5.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit.

5.2.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 1013 hPa
 Humidity: 44 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	11.8
	6	2437	12.0
	11	2462	11.8

WLAN g-Mode; 20 MHz; 24 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	16.6
	6	2437	16.7
	11	2462	16.5

WLAN n-Mode; 20 MHz; MCS7

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.7
	6	2437	17.7
	11	2462	17.7

WLAN ax-Mode; 20 MHz; MCS10

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	18.8
	6	2437	18.9
	11	2462	18.8

Remark: Please see next sub-clause for the measurement plot.


5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = mid
(S01_01A_DB01)



Date: 18 JUN 2025 19:46:41

Radio Technology = WLAN g, Operating Frequency = mid
(S01_01A_DB01)

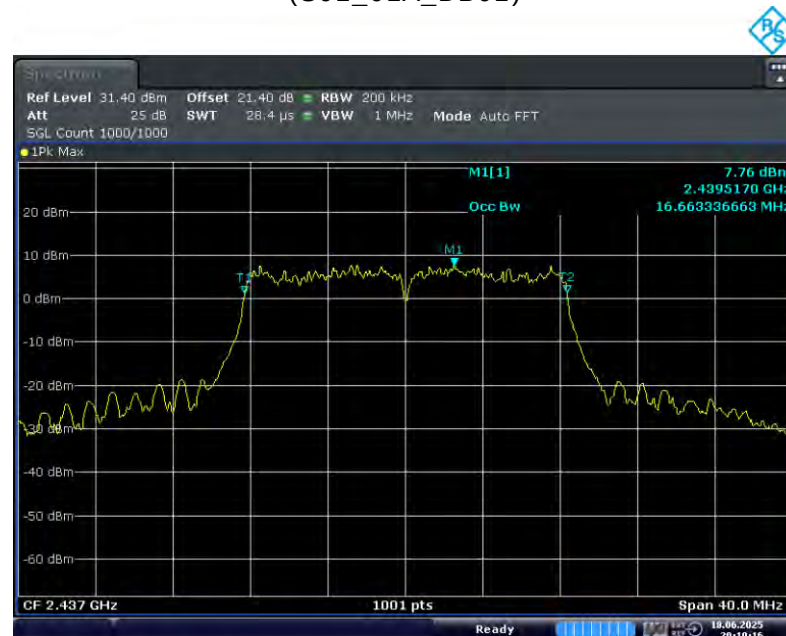

Date: 18 JUN 2025 20:10:17

5.3 PEAK POWER OUTPUT

Standard FCC Part 15 Subpart C

The test was performed according to:
ANSI C63.10, chapter 11.9.2.3.2

5.3.1 TEST DESCRIPTION


DTS EQUIPMENT:

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.


Maximum conducted average output power (e.g. WLAN):

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Measurement is performed using the gated RF average power meter integrated in the OSP 120 module OSP-B157W8 with signal bandwidth >300 MHz.

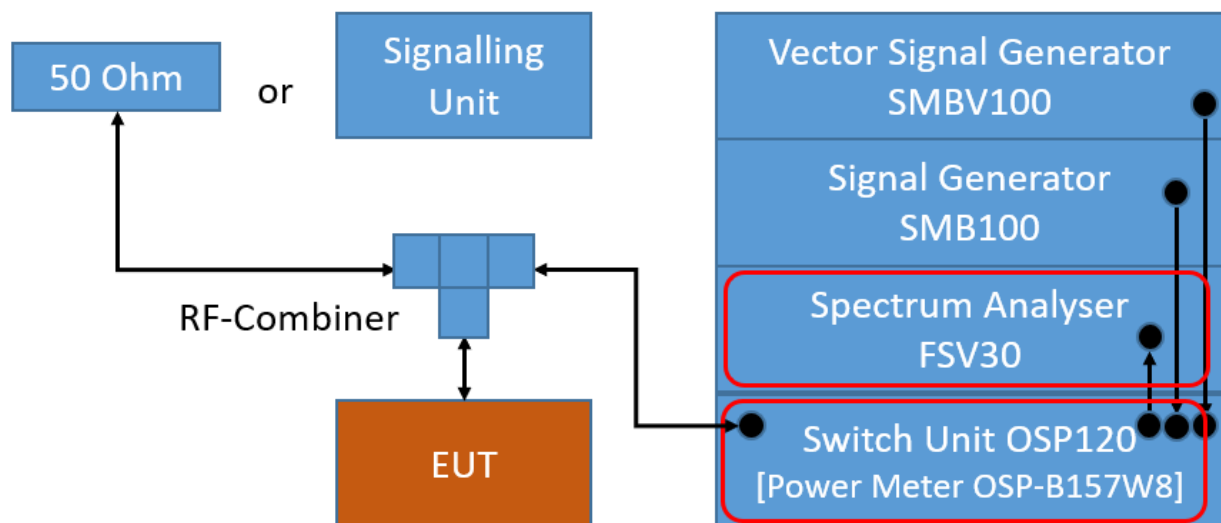

TS8997; Output Power

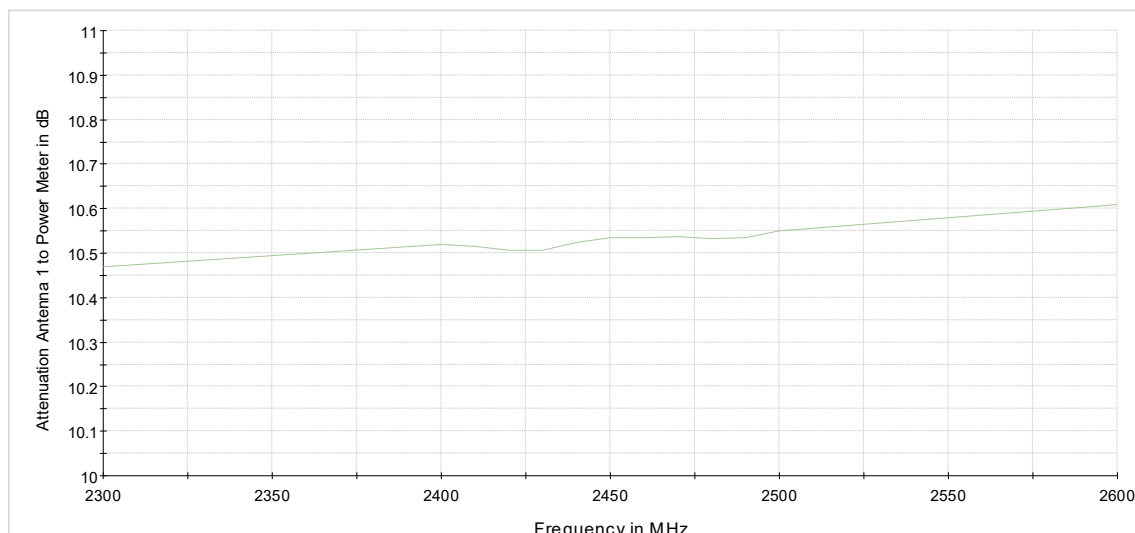

Attenuation of the measurement path to Power Meter

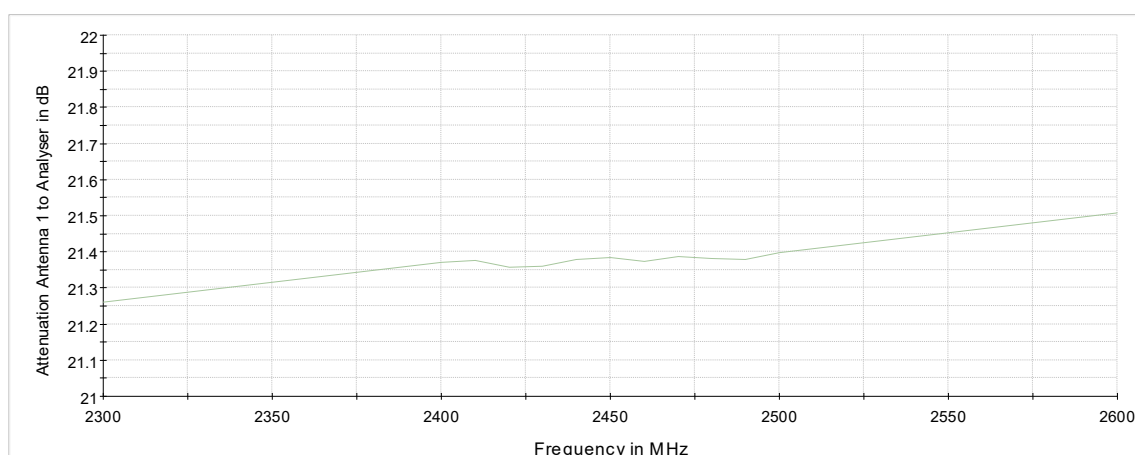

Attenuation of the measurement path to Analyser

5.3.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

=> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Frequency Hopping Systems:

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

5.3.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 1013 hPa
 Humidity: 44 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	18.8	30.0	11.2	18.8
	6	2437	21.5	30.0	8.5	21.5
	11	2462	17.5	30.0	12.5	17.5

WLAN g-Mode; 20 MHz; 24 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	14.3	30.0	15.7	14.3
	6	2437	18.1	30.0	11.9	18.1
	11	2462	12.7	30.0	17.3	12.7

WLAN n-Mode; 20 MHz; MCS7

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	14.2	30.0	15.8	14.2
	6	2437	18.0	30.0	12.0	18.0
	11	2462	11.6	30.0	18.4	11.6

WLAN ax-Mode; 20 MHz; MCS10

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	13.5	30.0	16.5	13.5
	6	2437	18.2	30.0	11.8	18.2
	11	2462	10.9	30.0	19.1	10.9

Remark: Power Meter Measurement, no plots provided.

5.3.4 TEST EQUIPMENT USED

- R&S TS8997

5.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard FCC Part 15 Subpart C

The test was performed according to:
ANSI C63.10, chapter 11.11

5.4.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyser settings:

- Frequency range: 30 – 26000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: see plots
- Sweep Time: Auto
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc or 30 dBc limit.

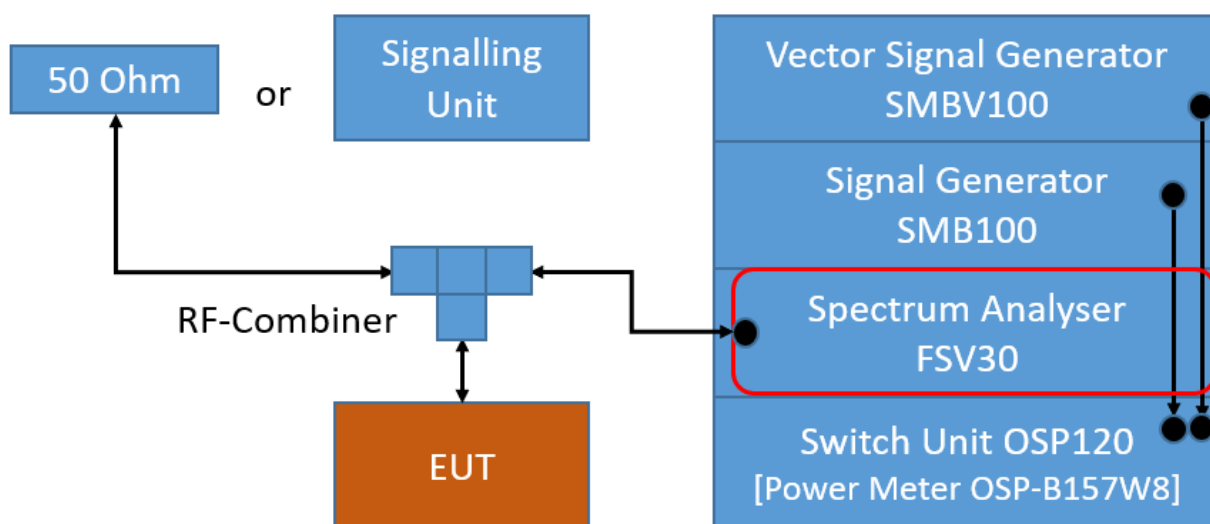

TS8997; Spurious RF Conducted Emissions

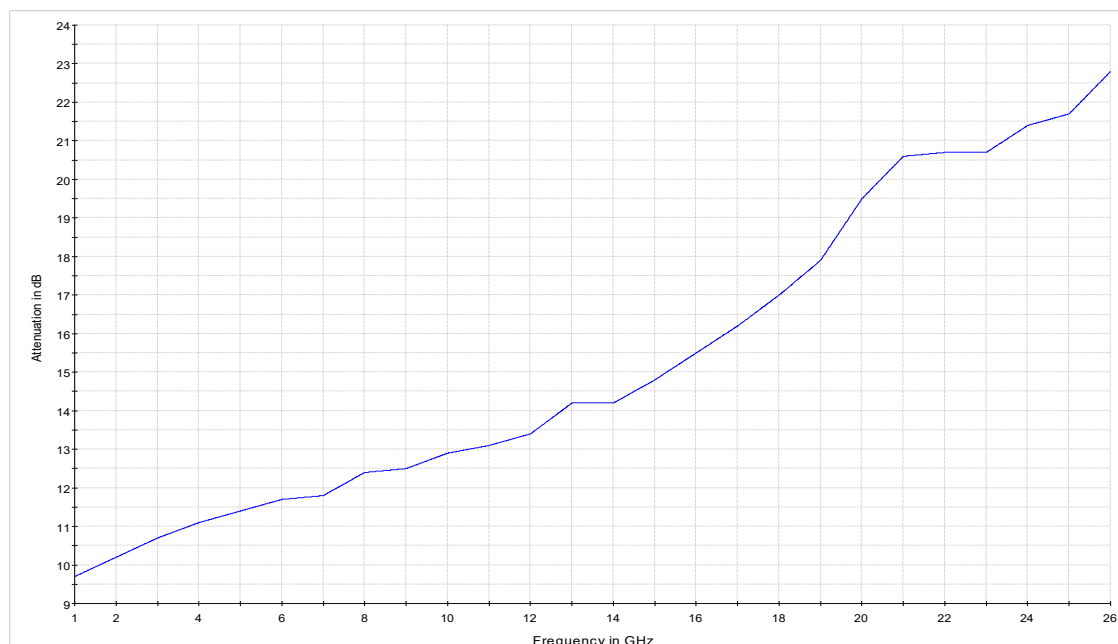

Attenuation of the measurement part

5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.4.3 TEST PROTOCOL

Ambient temperature: 22 °C
 Air Pressure: 1004 hPa
 Humidity: 50 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	25719.2	-40.8	PEAK	100	9.5	-20.5	20.4
6	2437	25948.1	-41.0	PEAK	100	12.3	-17.7	23.3
11	2462	25826.3	-40.9	PEAK	100	8.5	-21.5	19.3

WLAN g-Mode; 20 MHz; 24 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	25859.6	-40.9	PEAK	100	2.8	-27.2	13.7
6	2437	24828.1	-41.1	PEAK	100	7.0	-23.0	18.1
11	2462	25486.3	-41.0	PEAK	100	1.3	-28.8	12.2

WLAN n-Mode; 20 MHz; MCS7

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	25755.7	-40.5	PEAK	100	2.7	-27.3	13.2
6	2437	25996.8	-41.3	PEAK	100	6.9	-23.1	18.2
11	2462	25908.3	-40.7	PEAK	100	1.1	-28.9	11.8

WLAN ax-Mode; 20 MHz; MCS10

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	25772.8	-40.4	PEAK	100	1.9	-28.1	12.3
6	2437	25962.7	-40.1	PEAK	100	6.7	-23.4	16.8
11	2462	25428.7	-40.7	PEAK	100	-0.1	-30.1	10.6

Remark: Please see next sub-clause for the measurement plot.

5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = low
(S01_01A_DB01)



Radio Technology = WLAN b, Operating Frequency = mid
(S01_01A_DB01)



Radio Technology = WLAN b, Operating Frequency = high
(S01_01A_DB01)



Radio Technology = WLAN g, Operating Frequency = low
(S01_01A_DB01)



Radio Technology = WLAN g, Operating Frequency = mid
(S01_01A_DB01)



Radio Technology = WLAN g, Operating Frequency = high
(S01_01A_DB01)



Radio Technology = WLAN n 20 MHz, Operating Frequency = low
(S01_01A_DB01)



Radio Technology = WLAN n 20 MHz, Operating Frequency = mid
(S01_01A_DB01)



Radio Technology = WLAN n 20 MHz, Operating Frequency = high
(S01_01A_DB01)



Radio Technology = WLAN ax 20 MHz, Operating Frequency = low
(S01_01A_DB01)



Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid
(S01_01A_DB01)



Radio Technology = WLAN ax 20 MHz, Operating Frequency = high
(S01_01A_DB01)



5.4.5 TEST EQUIPMENT USED

- R&S TS8997

5.5 TRANSMITTER SPURIOUS EMISSIONS IN RESTRICTED BANDS

Standard FCC Part 15 Subpart C

Radiated Measurement Method:

The test was performed according to:
 ANSI C63.10, chapter 6.4, 6.5, 6.6.5

Conducted Measurement Method:

The test was performed according to:
 ANSI C63.10, chapter 11.12.2.5.2.1

5.5.1 TEST DESCRIPTION

Radiated Measurements with 50 Ohm termination at the antenna port:

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

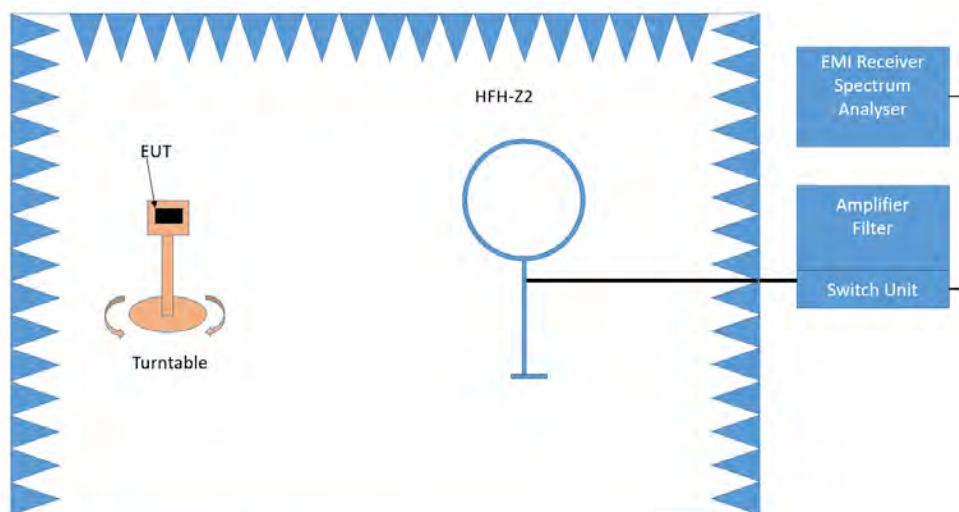

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak (9 kHz – 150 kHz, Peak / Average 150 kHz- 30 MHz)
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

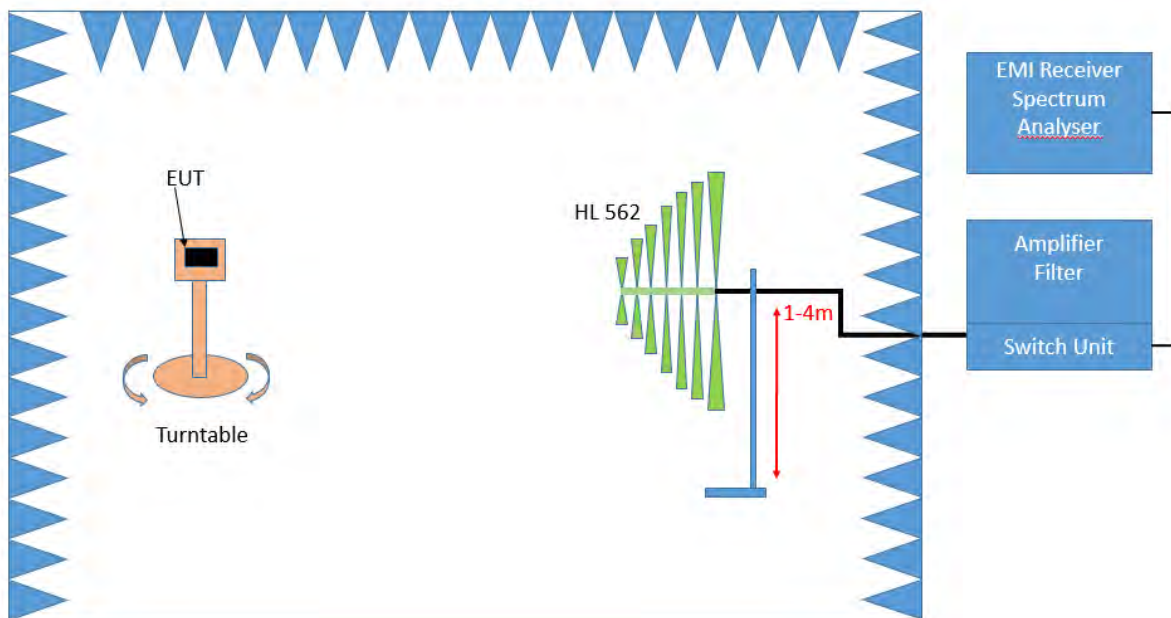

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz

- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 4 m
- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360° . During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary between 1 – 4 meter. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: 360°
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s


After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement above 1 GHz

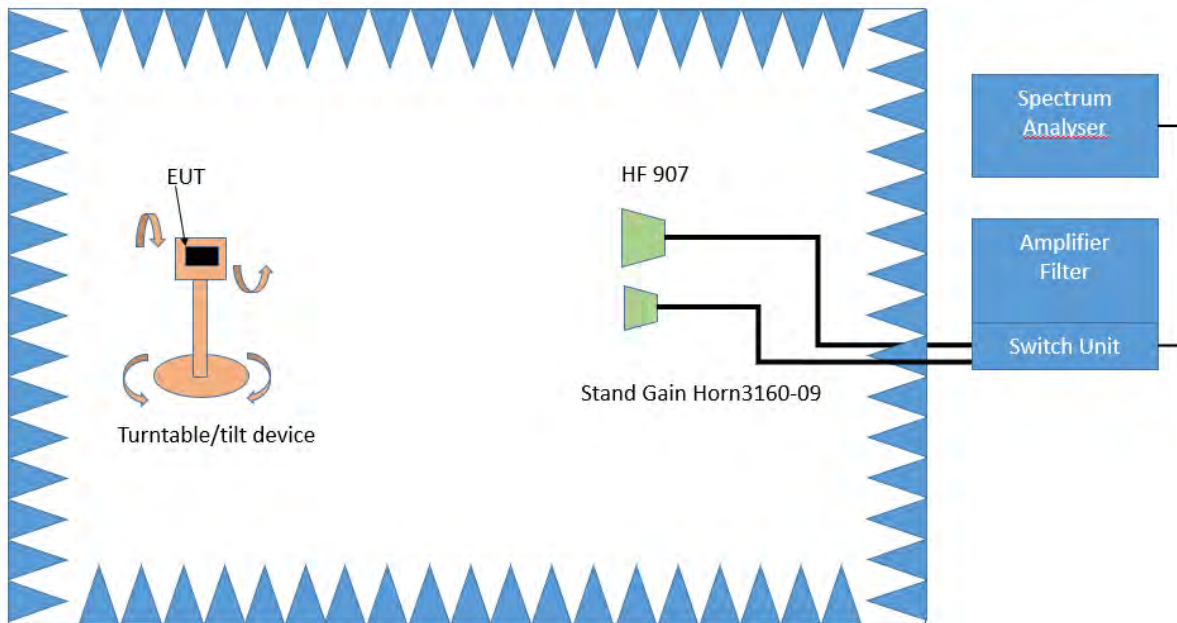

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).


§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$


Conducted Measurements at antenna ports:

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

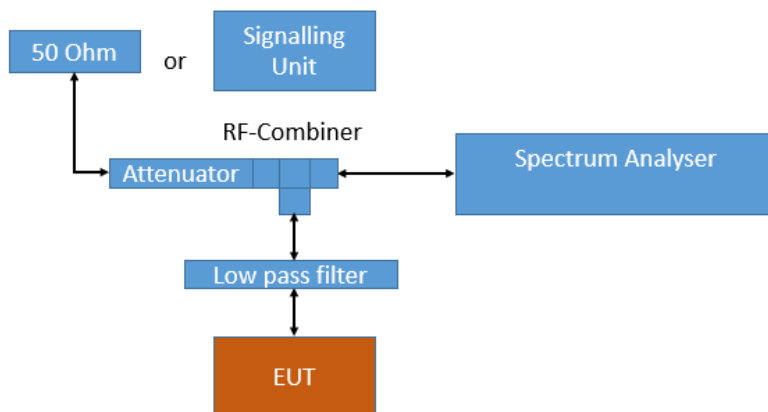


Measurement <1 GHz: Path Attenuation Transducer DUT1_3dB_UFLx_TP2000

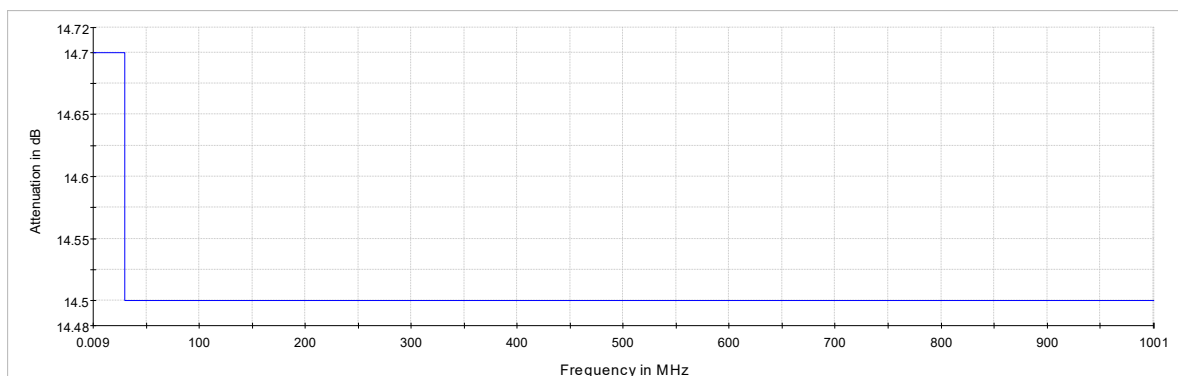


Transducer DUT1_3dB_UFLx_TP2000

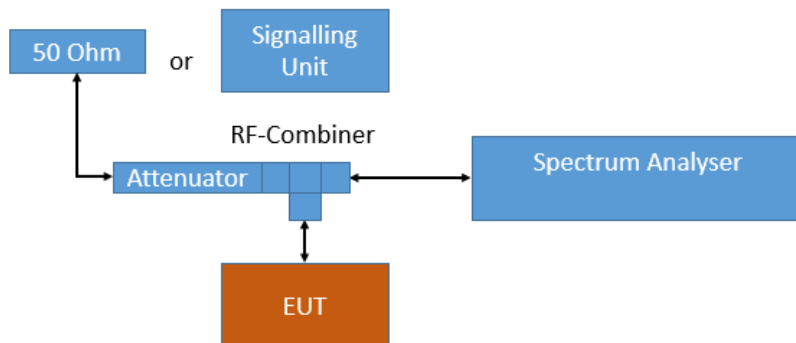


Measurement 1 – 13.5 GHz: Path Attenuation Transducer DUT1_3dB_UFLx

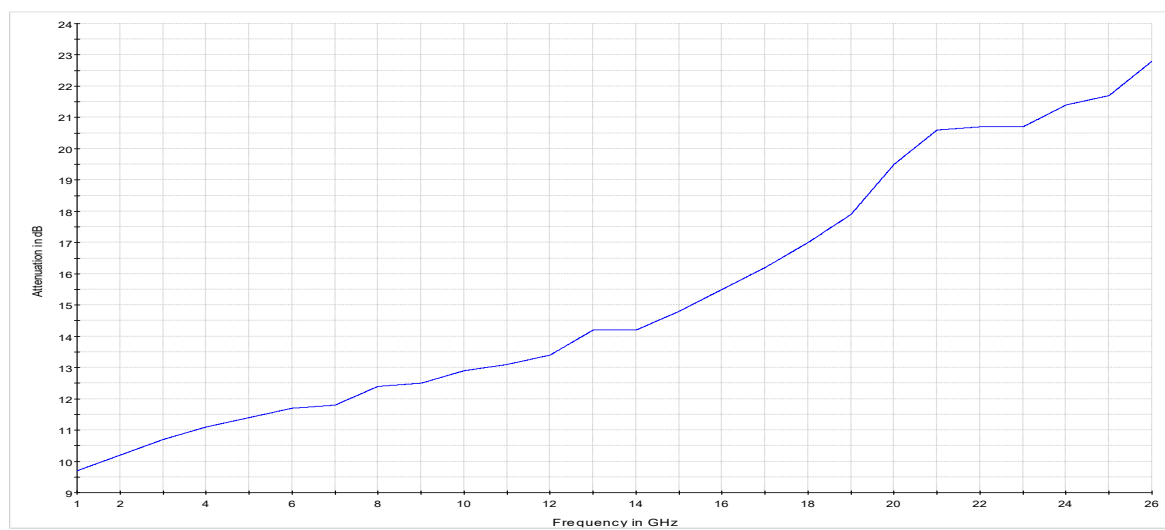

Transducer DUT1_3dB_UFLx

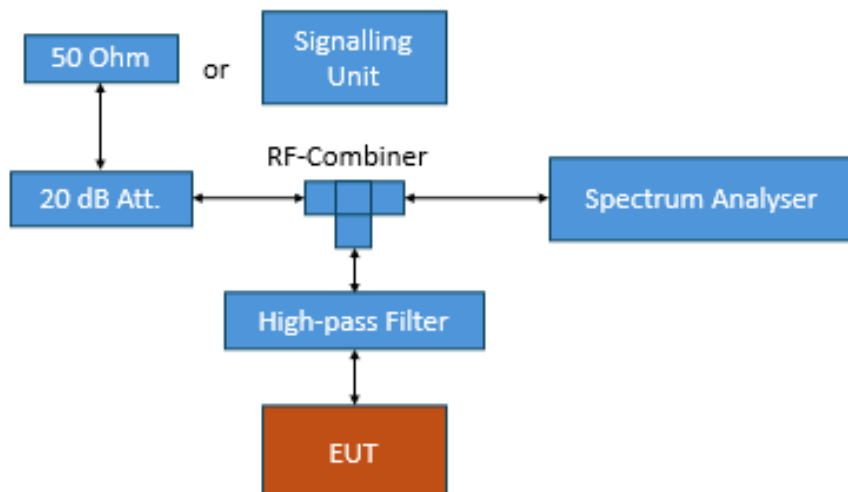

Measurement 13.5 - 26 GHz: Path Attenuation Transducer DUT1_3dB_UFLx_HF11

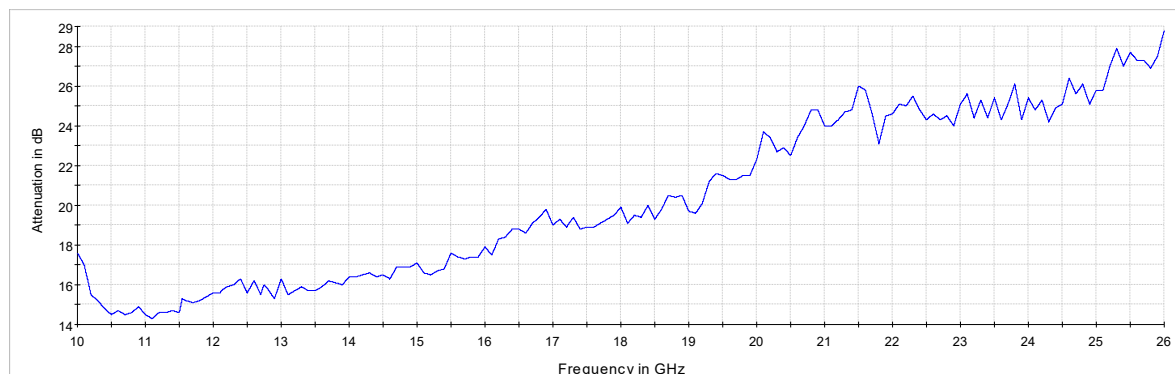

Transducer DUT1_3dB_UFLx_HF11

Analyser settings:

- Frequency range: 0.009 – 30 MHz
- Resolution Bandwidth (RBW): 10 kHz
- Video Bandwidth (VBW): 30 kHz
- Trace: Maxhold
- Sweeps: see plots
- Sweep Time: coupled
- Detector: Peak
- Frequency range: 30 – 1000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: see plots
- Sweep Time: coupled
- Detector: Peak

- Frequency range: 1000 – 26000 MHz
- Resolution Bandwidth (RBW): 1000 kHz
- Video Bandwidth (VBW): 3000 kHz
- Trace: Maxhold, Average Power
- Sweeps: see plots
- Sweep Time: coupled
- Detector: Peak, RMS

For the conducted emissions in restricted bands the Value is measured in dBm and then converted to dBμV/m as given in KDB 558074:

1. Measure the conducted output power in dBm.
2. Add the maximum antenna gain in dBi. (Included in measurement result by offset)
3. Add the appropriate ground reflection factor (included in measurement result by transducer factor)
 - 6 dB for frequencies ≤ 30 MHz;
 - 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and
 - 0 dB for frequencies > 1000 MHz).
4. Convert the resultant EIRP level to an equivalent electric field strength level using the following relationship:
 - $E = \text{EIRP} - 20 \log D + 104.8$
 - Where E is the electric field strength in dBμV/m,
 - EIRP is the equivalent isotropically radiated power in dBm
 - D is the specified measurement distance in m

Value [dBμV/m] = Measured value [dBm] (including gain and ground reflection factor) – 20 log D + 104.8

5.5.3 TEST PROTOCOL

Ambient temperature: 22 °C
 Air Pressure: 1004 hPa
 Humidity: 50 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
Conducted	2412	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2437	4874.2	55.1	PEAK	1000	74.0	18.9	RB
Conducted	2437	4874.2	48.3	AV	1000	54.0	5.7	RB
Conducted	2462	- - -	- - -	- - -	- - -	- - -	- - -	RB
Radiated	2412	19296.1	54.7	PEAK	1000	74.0	19.3	RB
Radiated	2412	19296.1	48.5	AV	1000	54.0	5.5	RB
Radiated	2437	7310.1	55.7	PEAK	1000	74.0	18.3	RB
Radiated	2437	7310.1	51.5	AV	1000	54.0	2.5	RB
Radiated	2437	12184.1	52.5	PEAK	1000	74.0	21.5	RB
Radiated	2437	12184.1	46.3	AV	1000	54.0	7.7	RB
Radiated	2462	1718.8	47.0	PEAK	1000	74.0	27.0	RB
Radiated	2462	1718.8	34.2	AV	1000	54.0	19.8	RB
Radiated	2462	7385.4	49.1	PEAK	1000	74.0	24.9	RB
Radiated	2462	7385.4	41.5	AV	1000	54.0	12.5	RB
Radiated	2462	19696.1	53.4	PEAK	1000	74.0	20.6	RB
Radiated	2462	19696.1	46.0	AV	1000	54.0	8.0	RB

WLAN g-Mode; 20 MHz; 24 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
Conducted	2412	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2437	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2462	- - -	- - -	- - -	- - -	- - -	- - -	RB

WLAN n-Mode; 20 MHz; MCS7
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
Conducted	2412	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2437	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2462	- - -	- - -	- - -	- - -	- - -	- - -	RB

WLAN ax-Mode; 20 MHz; MCS10

Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
Conducted	2412	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2437	- - -	- - -	- - -	- - -	- - -	- - -	RB
Conducted	2462	- - -	- - -	- - -	- - -	- - -	- - -	RB


Remark: Please see next sub-clause for the measurement plot.

Radiated Measurements were performed with 50 Ohm termination at the antenna ports.


5.5.4 MEASUREMENT PLOTS

Conducted Measurements

Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range = 9 kHz - 30 MHz
(S01_01A_DB01)

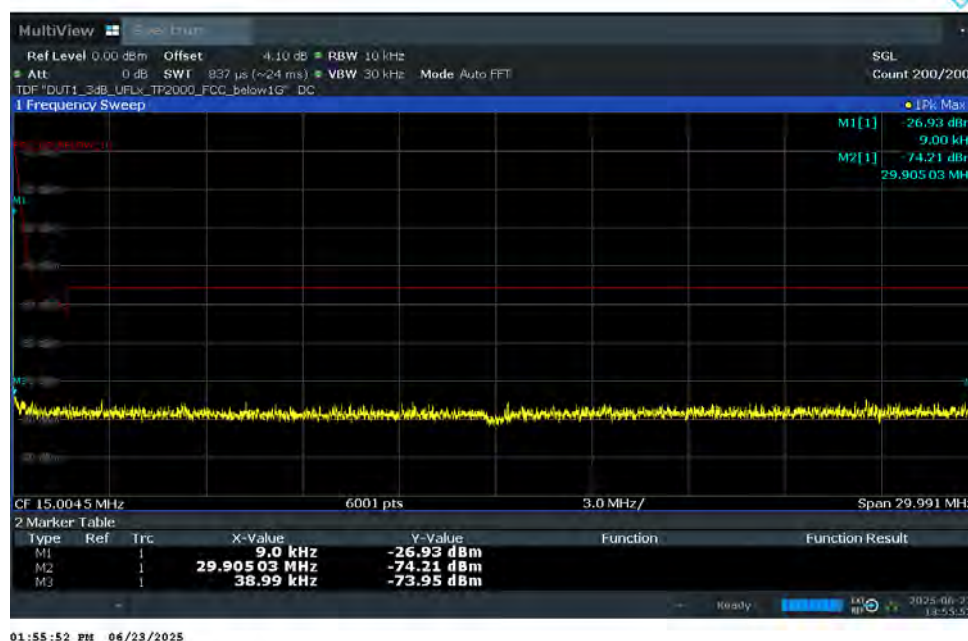

Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range = 30 MHz - 1 GHz
(S01_01A_DB01)

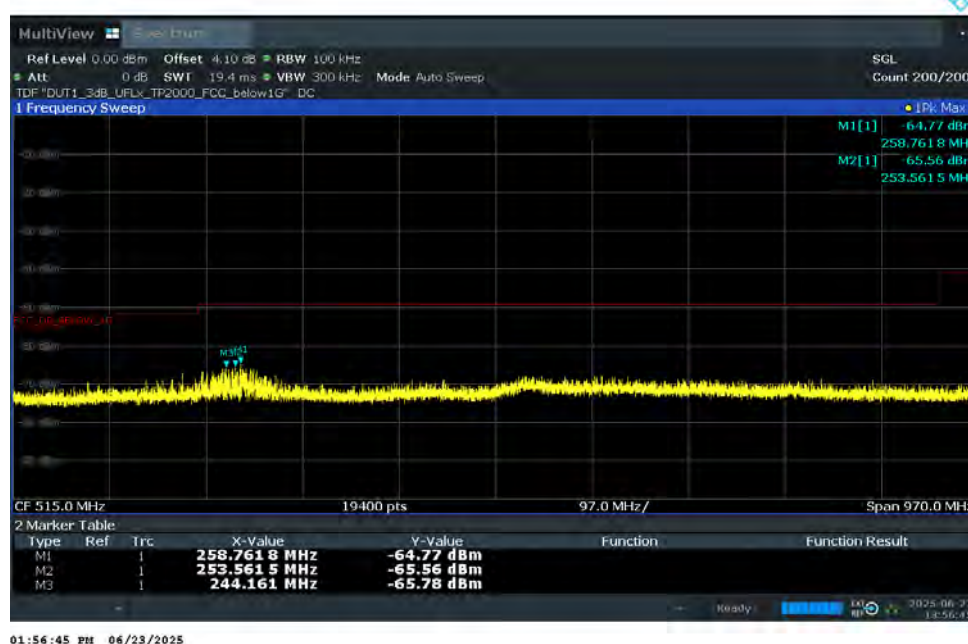

Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)




02:12:27 PM 06/23/2025




02:55:47 PM 06/23/2025

Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz
(S01_01A_DB01)

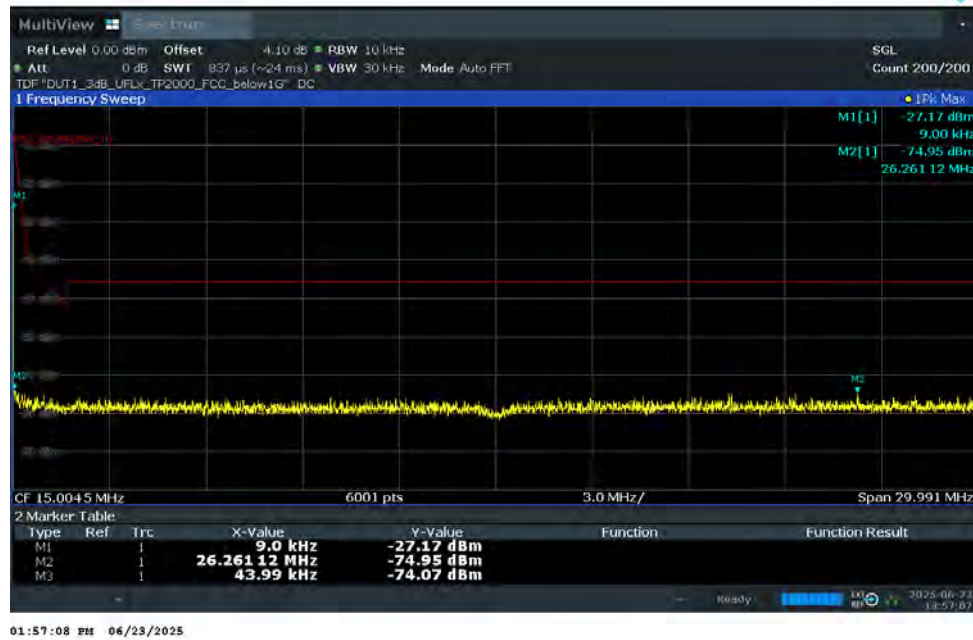

Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range = 30 MHz - 1 GHz
(S01_01A_DB01)

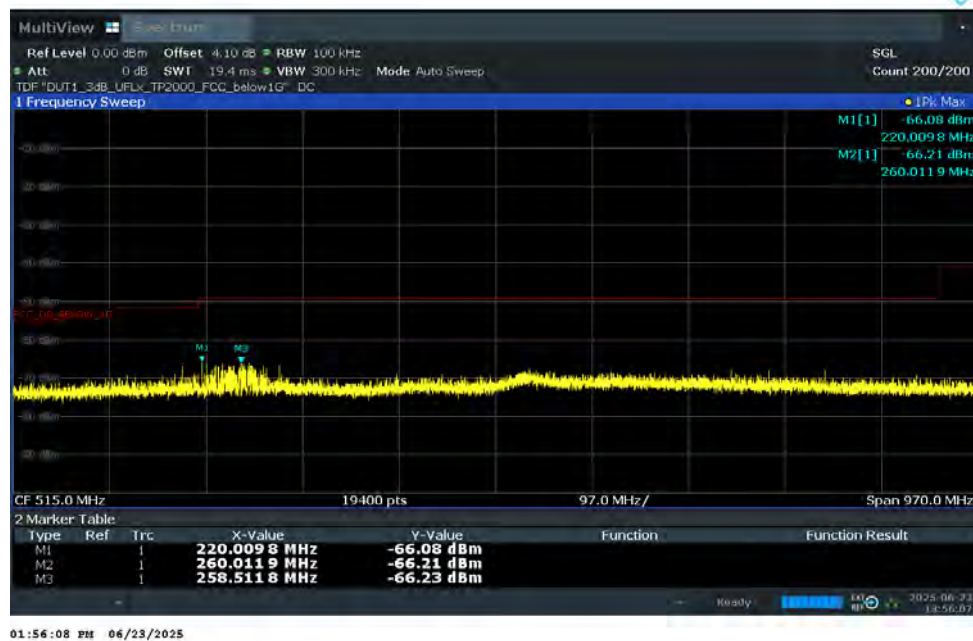

Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)




02:13:42 PM 06/23/2025




02:57:06 PM 06/23/2025

Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range = 9 kHz - 30 MHz
(S01_01A_DB01)

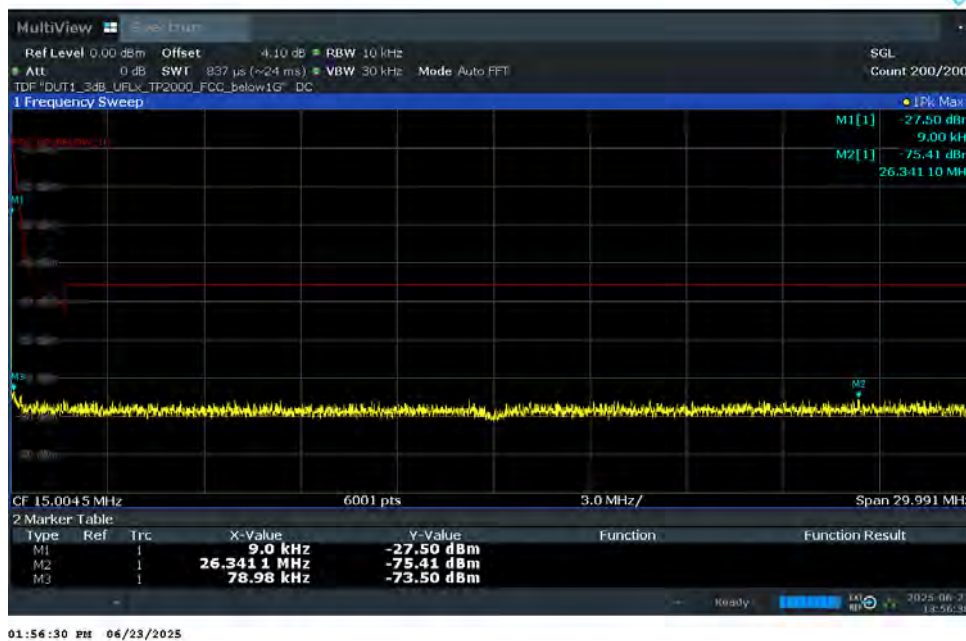

Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range = 30 MHz - 1 GHz
(S01_01A_DB01)

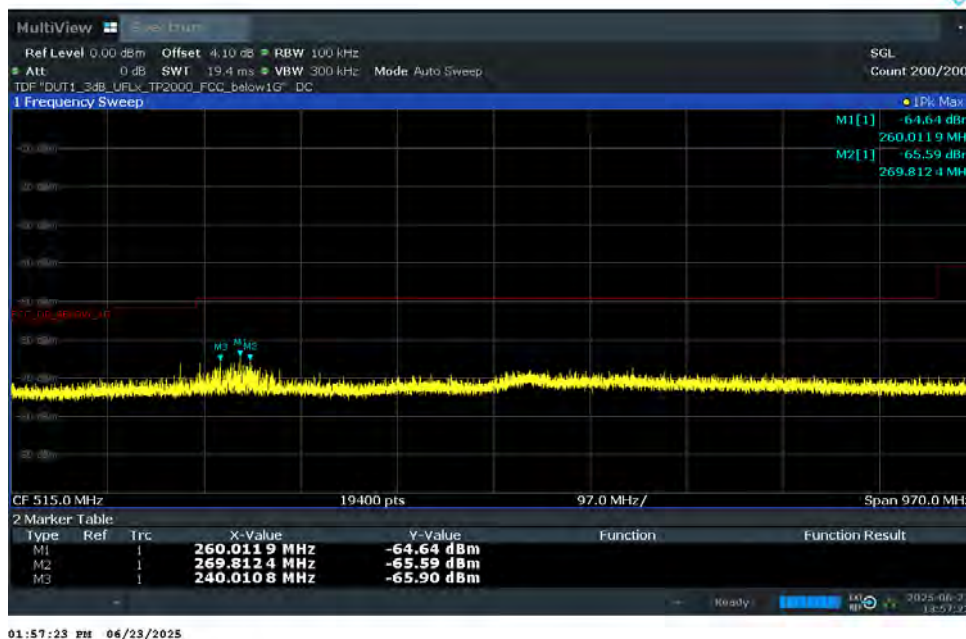

Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)




02:14:56 PM 06/23/2025




02:58:25 PM 06/23/2025

Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 9 kHz - 30
MHz
(S01_01A_DB01)

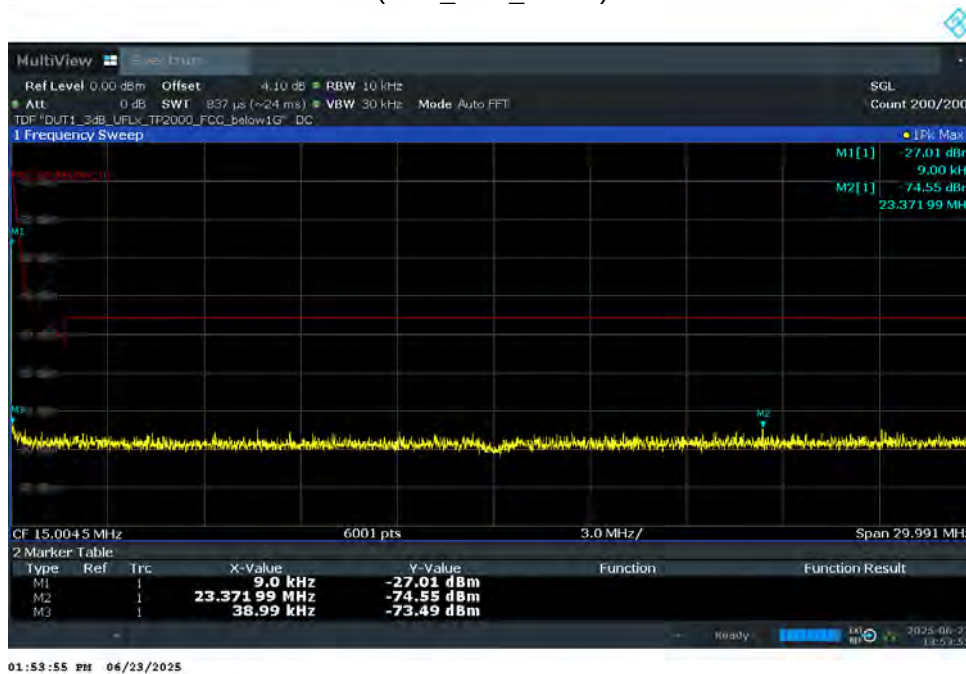

Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 30 MHz - 1
GHz
(S01_01A_DB01)

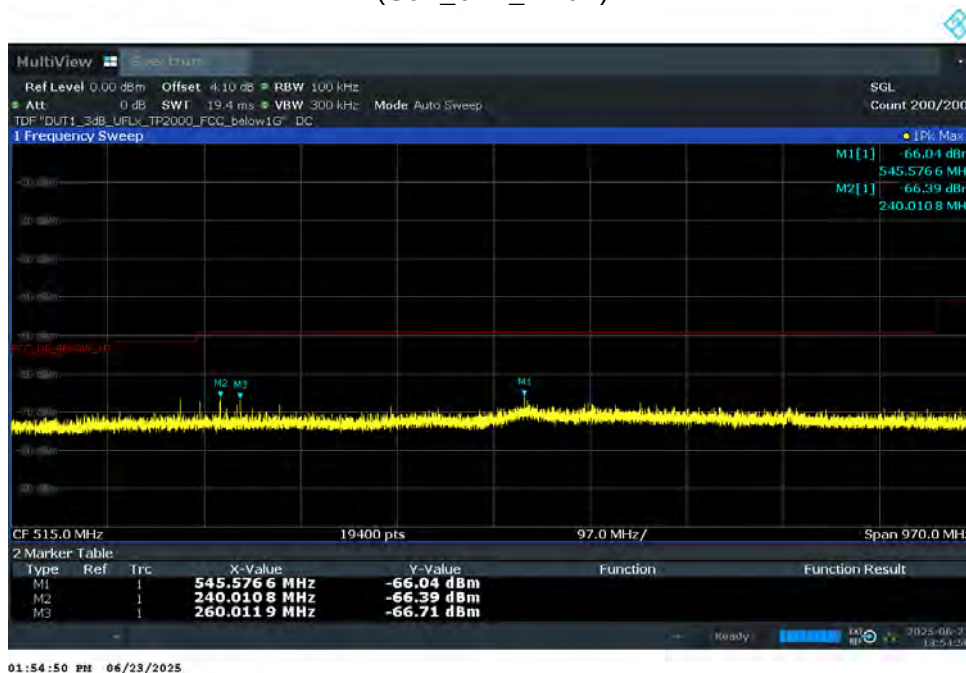

Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)




02:01:11 PM 06/23/2025




02:43:51 PM 06/23/2025

Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz
(S01_01A_DB01)

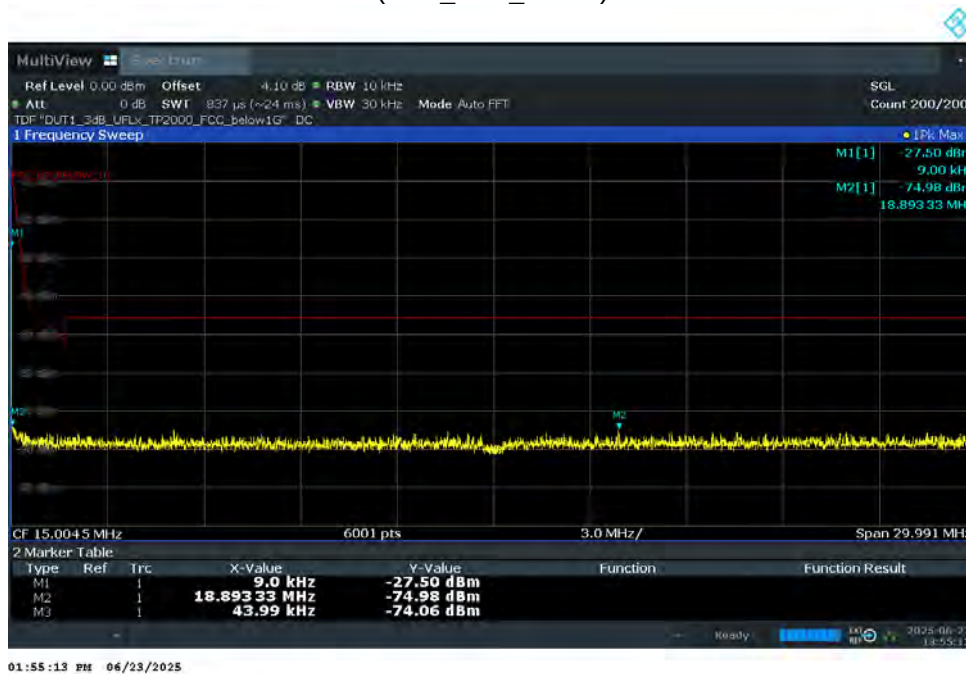

Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 30 MHz - 1 GHz
(S01_01A_DB01)

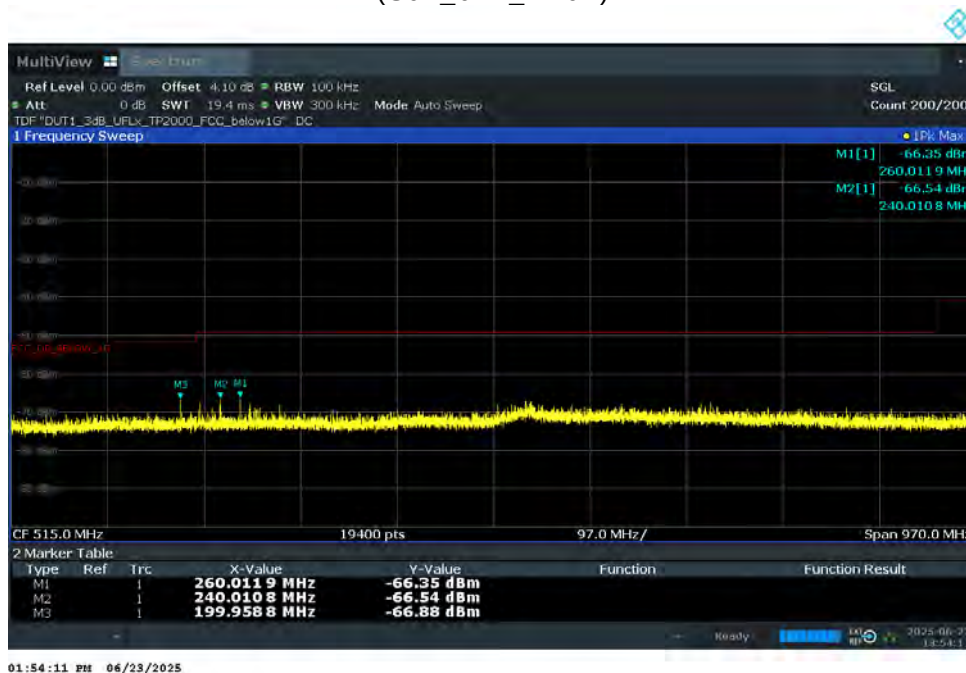

Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)




02:02:23 PM 06/23/2025




02:45:10 PM 06/23/2025

Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 9 kHz - 30 MHz
(S01_01A_DB01)

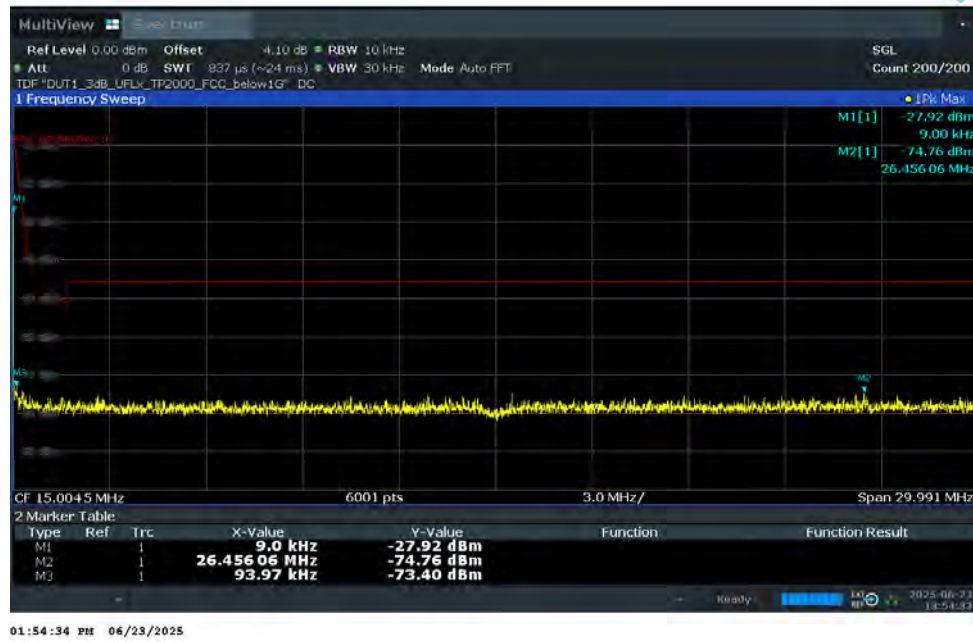

Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 30 MHz - 1 GHz
(S01_01A_DB01)

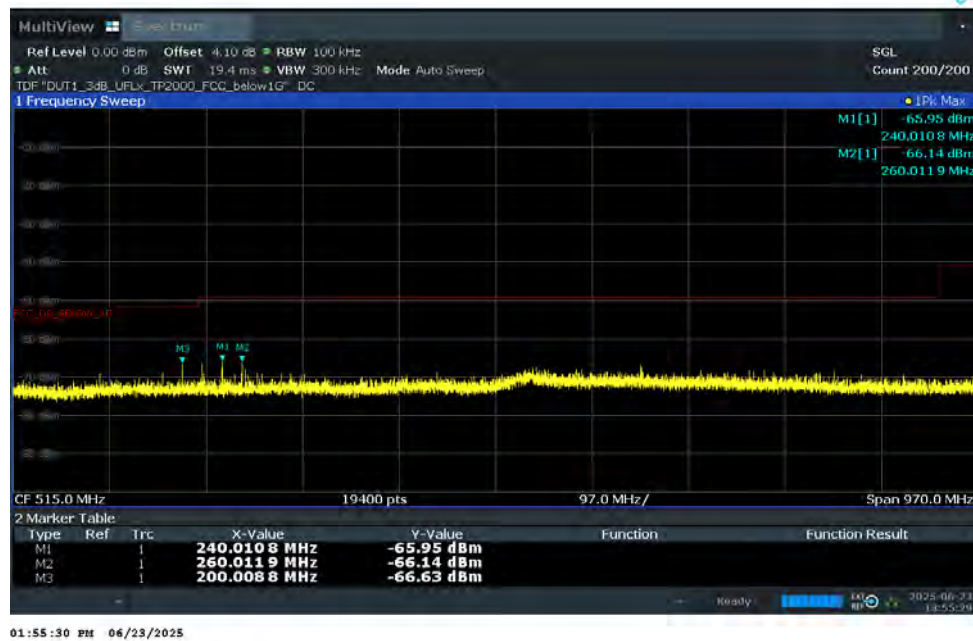

Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)



02:03:38 PM 06/23/2025



02:46:30 PM 06/23/2025

Radio Technology = WLAN g, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)



02:04:53 PM 06/23/2025



02:47:51 PM 06/23/2025

Radio Technology = WLAN g, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)



02:06:06 PM 06/23/2025



02:49:11 PM 06/23/2025

Radio Technology = WLAN g, Operating Frequency = high, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)



02:07:29 PM 06/23/2025



02:50:31 PM 06/23/2025

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Measurement range = 1 GHz
- 26 GHz
(S01_01A_DB01)



02:08:42 PM 06/23/2025



02:51:50 PM 06/23/2025

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)



02:09:58 PM 06/23/2025



02:53:09 PM 06/23/2025

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Measurement range = 1 GHz - 26 GHz
(S01_01A_DB01)




02:11:13 PM 06/23/2025



02:54:28 PM 06/23/2025

Radiated Measurements


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 30 MHz - 1
 GHz
 (S02_01A_DB01)

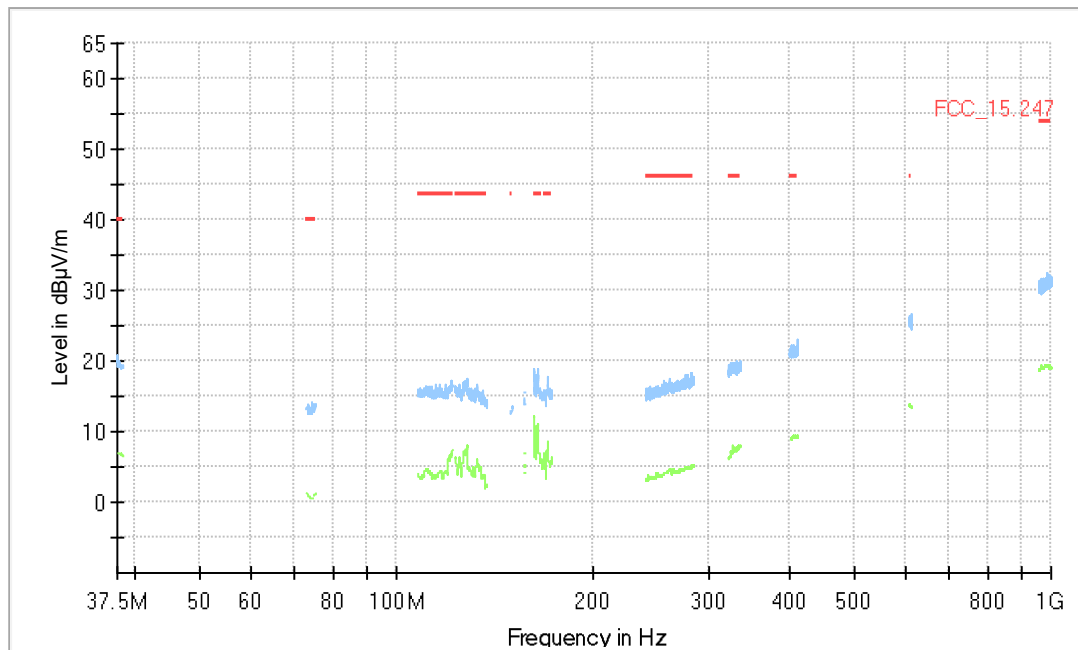

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
(S02_01A_DB01)

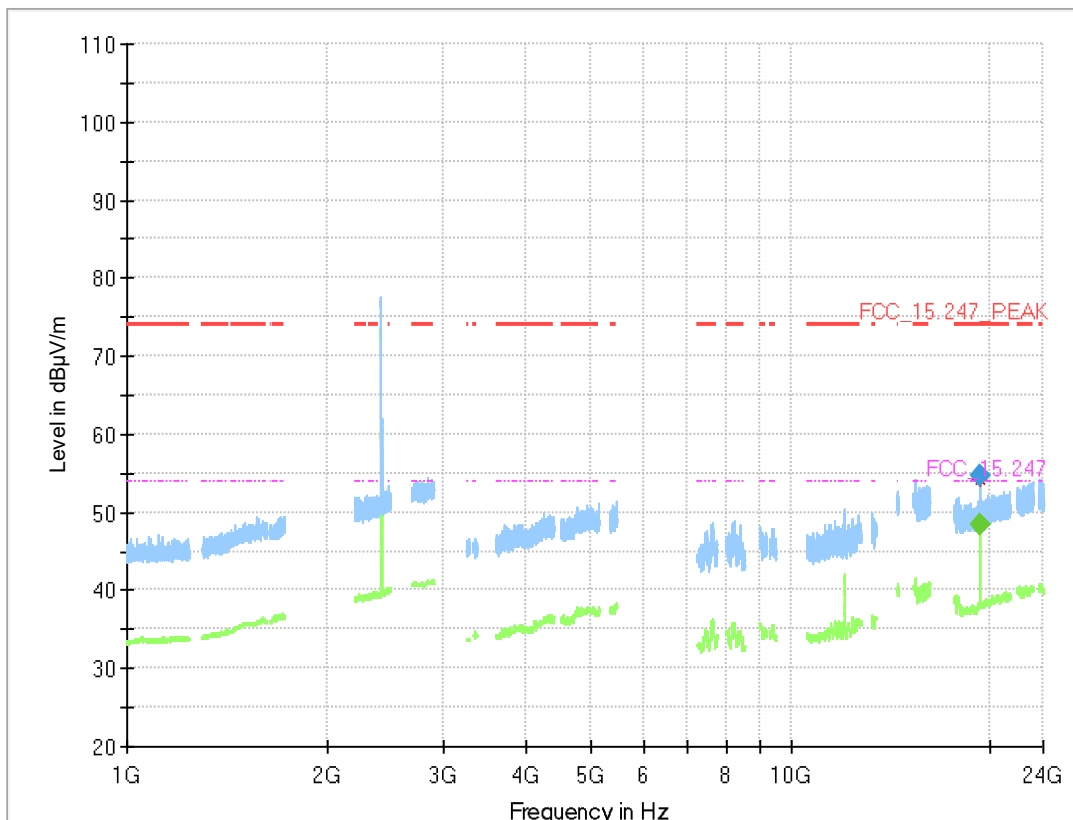

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
19296.080	---	48.5	54.00	5.48	1000.0	1000.000	150.0	V	25.0	75.0	16.1
19296.080	54.7	---	74.00	19.34	1000.0	1000.000	150.0	V	25.0	75.0	16.1


Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 9 kHz - 30
MHz
(S02_01A_DB01)

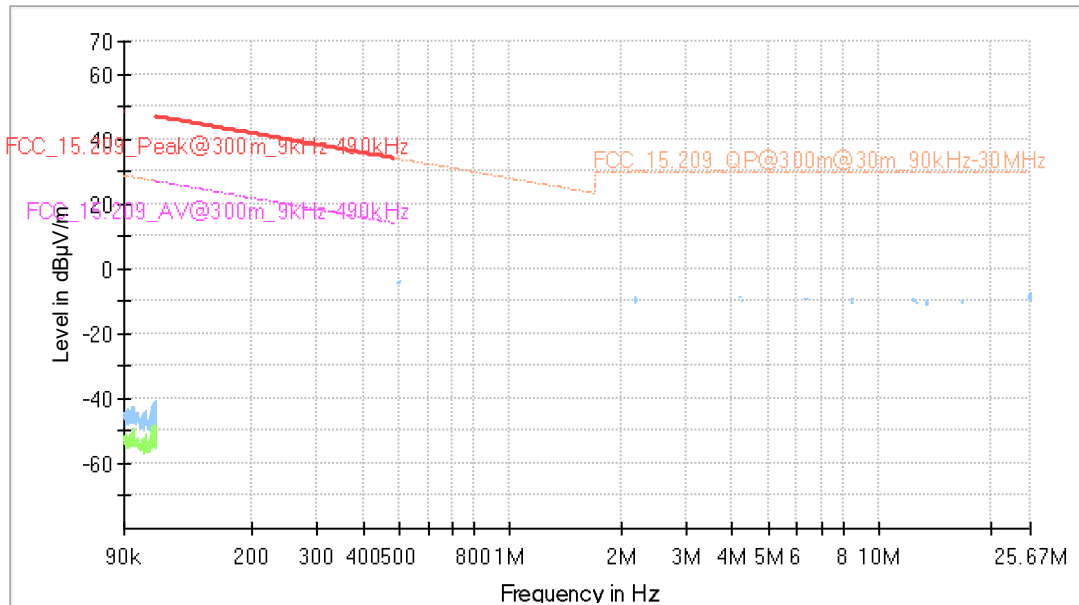

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth h (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 30 MHz - 1
 GHz
 (S02_01A_DB01)

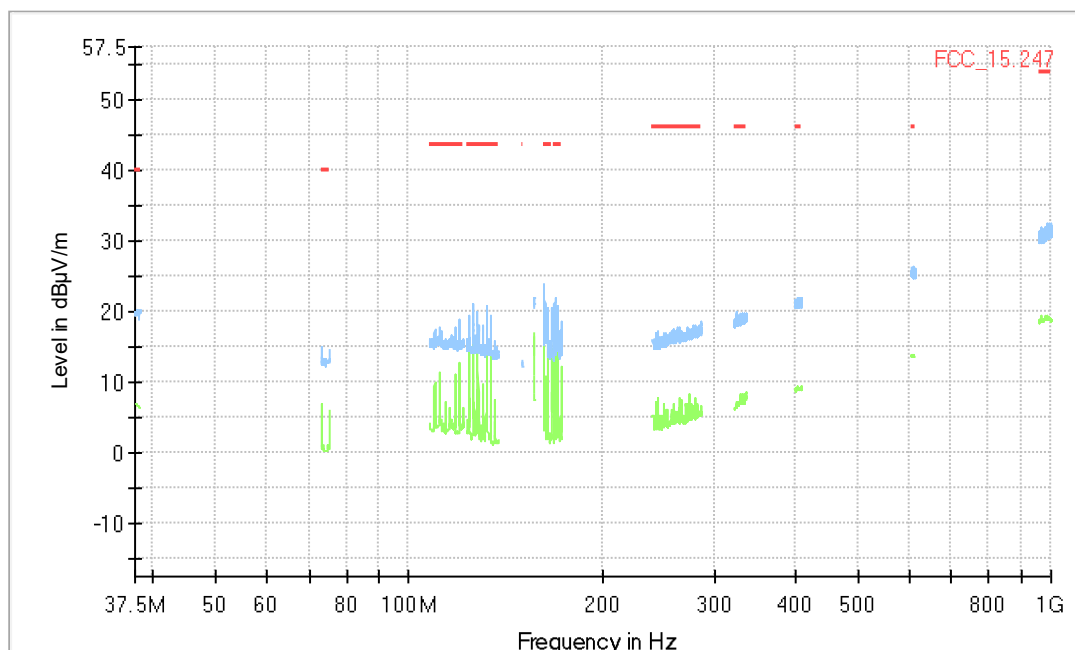

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz
(S02_01A_DB01)

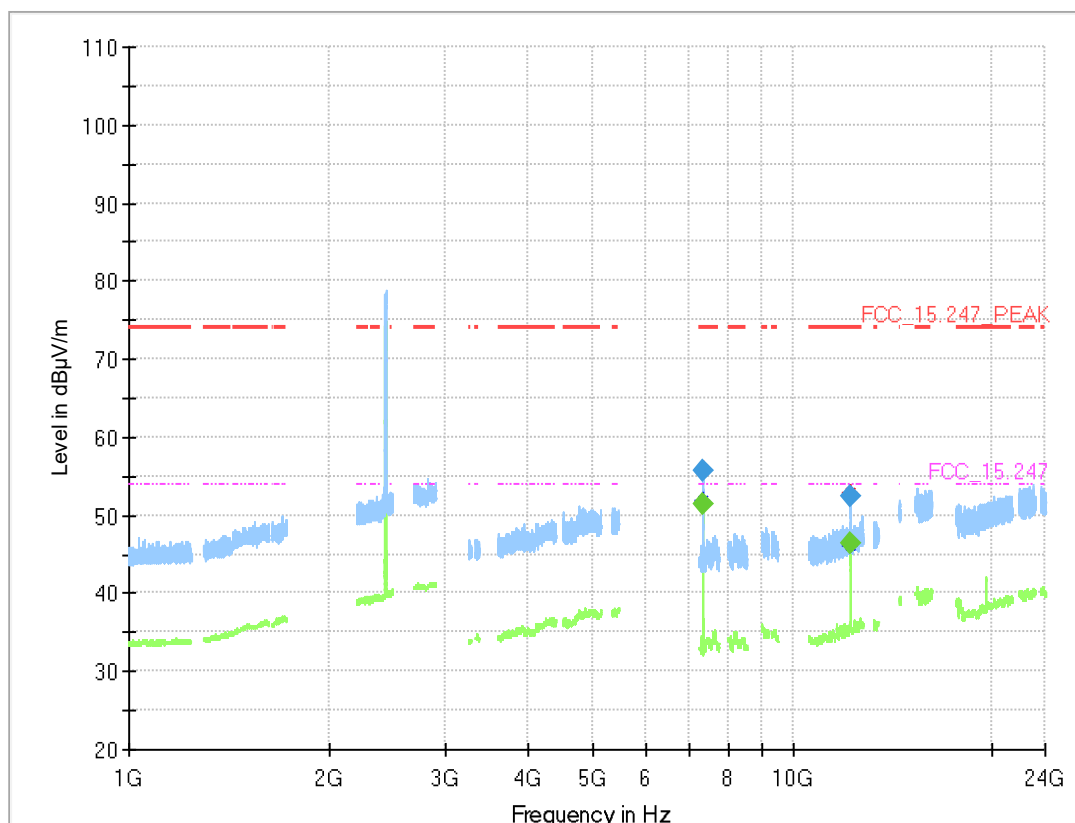

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
7310.125	---	51.5	54.00	2.45	1000.0	1000.000	150.0	V	-89.0	4.0	1.6
7310.125	55.7	---	74.00	18.30	1000.0	1000.000	150.0	V	-89.0	4.0	1.6
12184.135	---	46.3	54.00	7.68	1000.0	1000.000	150.0	V	-19.0	75.0	5.3
12184.135	52.5	---	74.00	21.46	1000.0	1000.000	150.0	V	-19.0	75.0	5.3


Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 30 MHz - 1
GHz
(S02_01A_DB01)

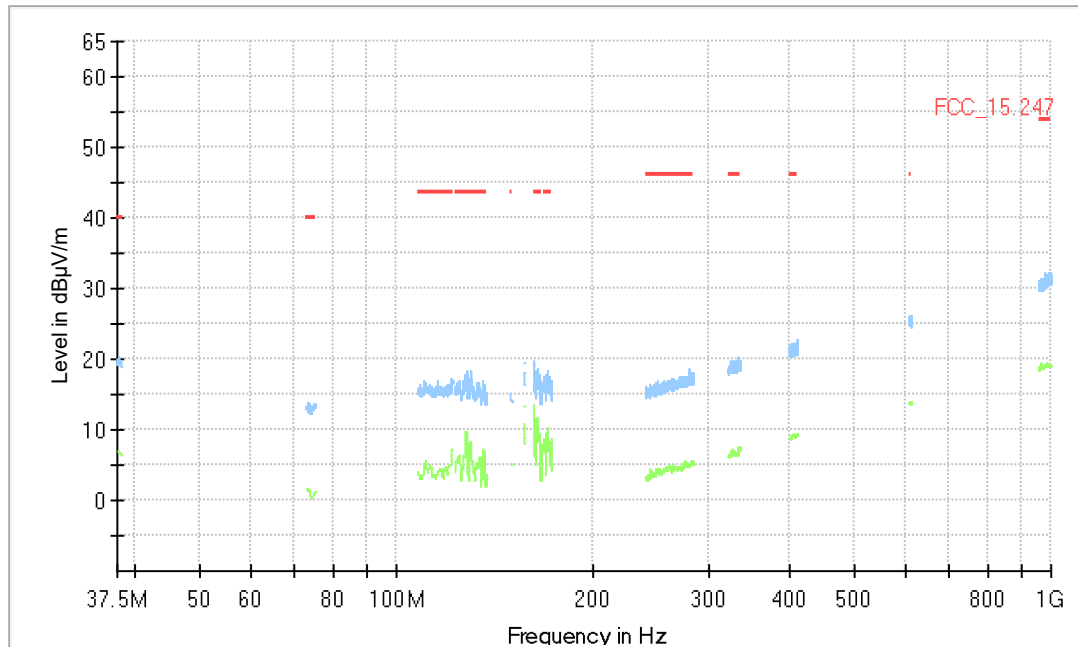

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---

Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 1 GHz - 26 GHz
(S02_01A_DB01)

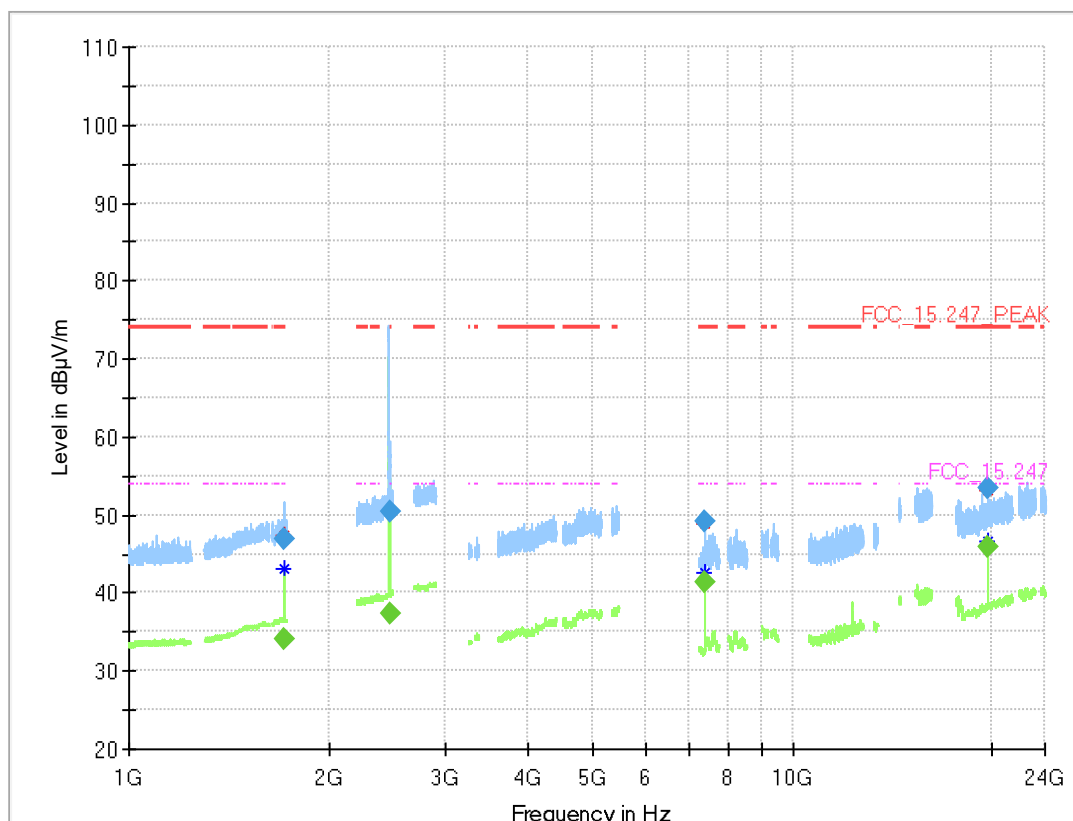

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
1718.834	---	34.2	54.00	19.81	1000.0	1000.000	150.0	H	-118.0	15.0	4.4
1718.834	47.0	---	74.00	27.00	1000.0	1000.000	150.0	H	-118.0	15.0	4.4
2484.375	---	37.3	54.00	16.70	1000.0	1000.000	150.0	H	-35.0	4.0	7.7
2484.375	50.5	---	74.00	23.50	1000.0	1000.000	150.0	H	-35.0	4.0	7.7
7385.375	---	41.5	54.00	12.52	1000.0	1000.000	150.0	V	-90.0	15.0	3.0
7385.375	49.1	---	74.00	24.93	1000.0	1000.000	150.0	V	-90.0	15.0	3.0
19696.090	---	46.0	54.00	8.04	1000.0	1000.000	150.0	H	68.0	75.0	16.5
19696.090	53.4	---	74.00	20.63	1000.0	1000.000	150.0	H	68.0	75.0	16.5

5.5.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC
- Radiated Emissions SAC H-Field
- Radiated Emissions SAC up to 1 GHz
- R&S TS8997

5.6 BAND EDGE COMPLIANCE CONDUCTED

Standard FCC Part 15 Subpart C

The test was performed according to:
ANSI C63.10, chapter 11.11


5.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions".


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Lower Band Edge:
Measured range: 2310.0 MHz to 2483.5 MHz
- Upper Band Edge:
Measured range: 2400.0 MHz to 2500 MHz
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweptime: Auto
- Sweeps: Till stable (min. 300, max. 15000)
- Trace: Maxhold

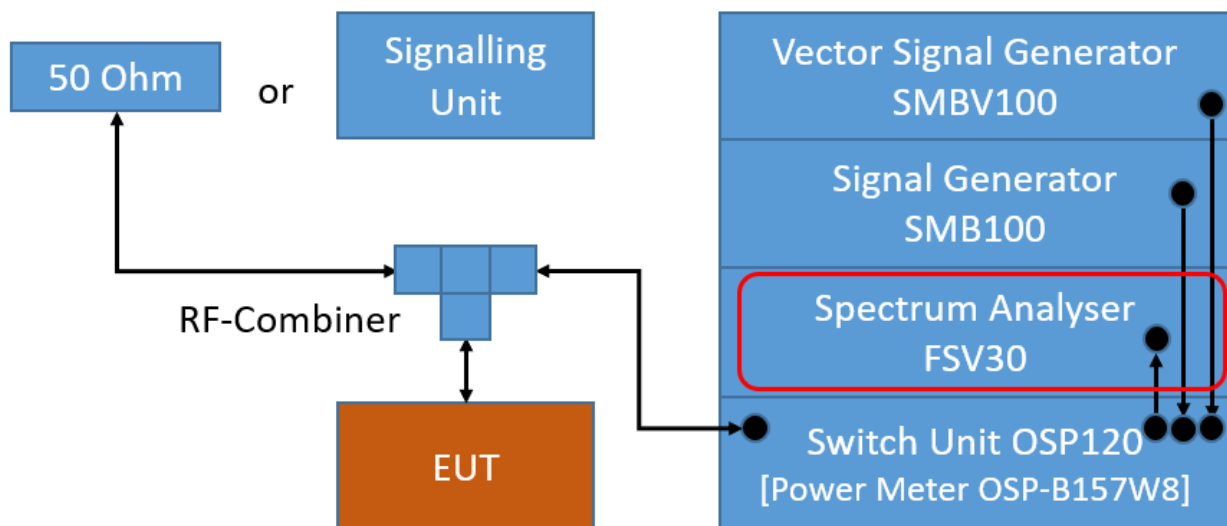

TS8997; Band Edge Conducted

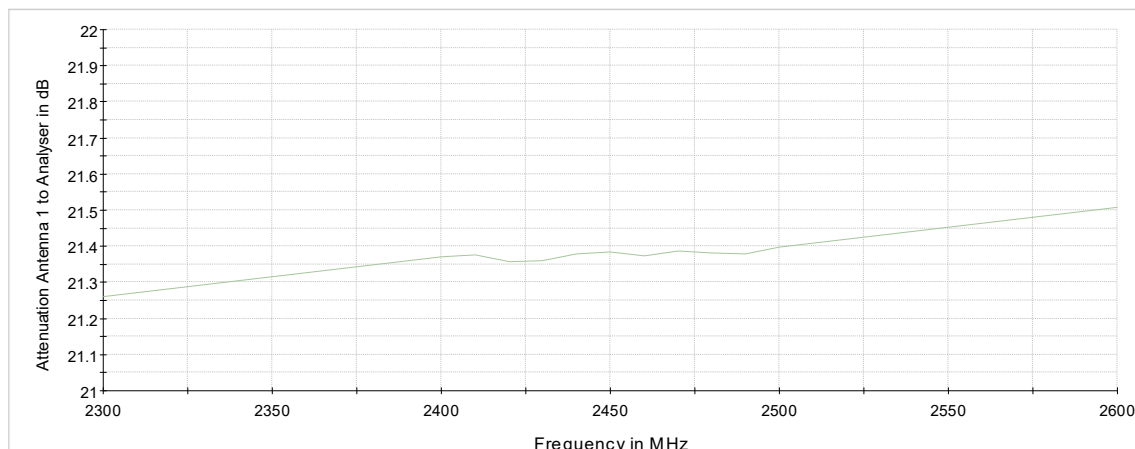

Attenuation of the measurement path

5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

5.6.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 1013hPa
 Humidity: 44%
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-38.5	PEAK	100	9.5	-20.5	18.0
11	2462	2483.5	-45.1	PEAK	100	8.3	-21.8	23.4

WLAN g-Mode; 20 MHz; 24 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-41.3	PEAK	100	3.0	-27.0	14.3
11	2462	2483.5	-44.8	PEAK	100	1.3	-28.7	16.0

WLAN n-Mode; 20 MHz; MCS7

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-42.0	PEAK	100	3.3	-26.8	15.3
11	2462	2483.5	-45.5	PEAK	100	0.6	-29.5	16.1


WLAN ax-Mode; 20 MHz; MCS10

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-42.5	PEAK	100	2.0	-28.0	14.5
11	2462	2483.5	-44.2	PEAK	100	-0.6	-30.6	13.7


Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN b, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)

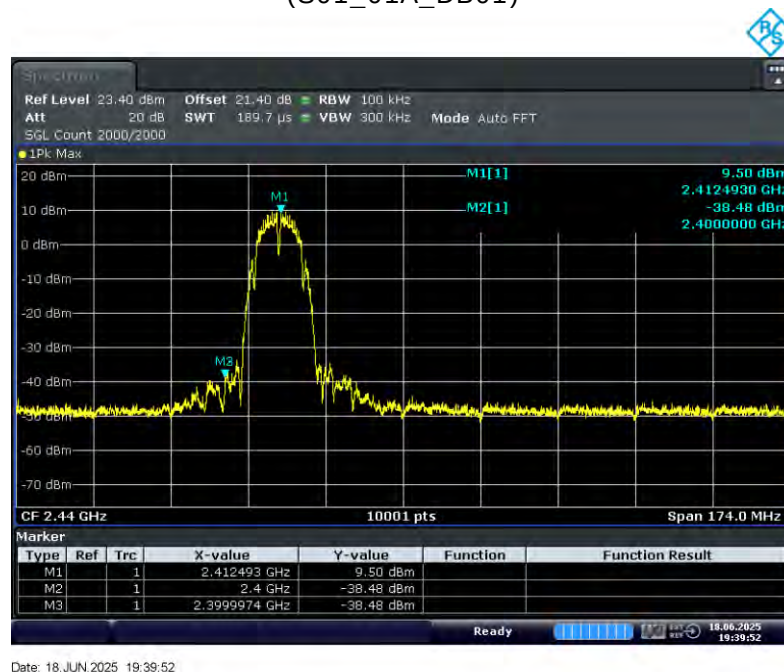

Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high
(S01_01A_DB01)

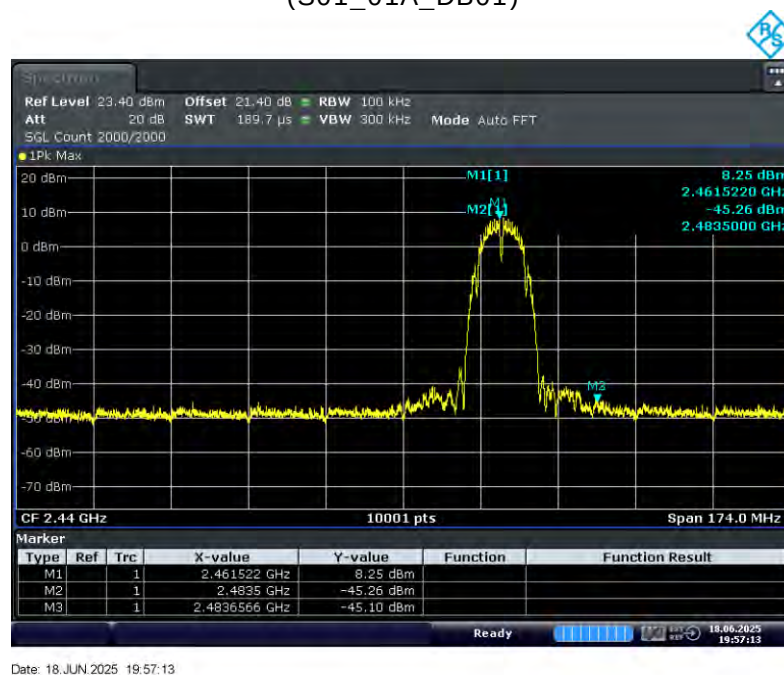


Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)

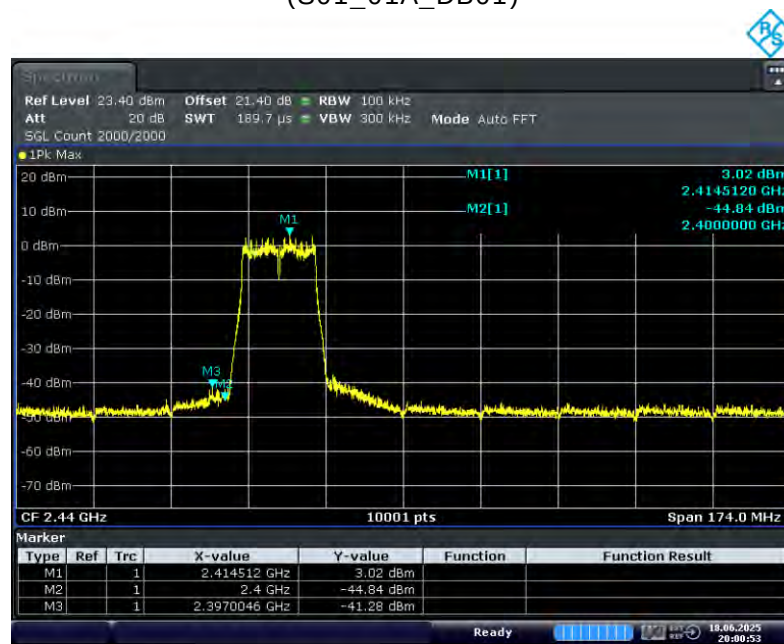


Date: 18 JUN 2025 20:00:54

Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high
(S01_01A_DB01)

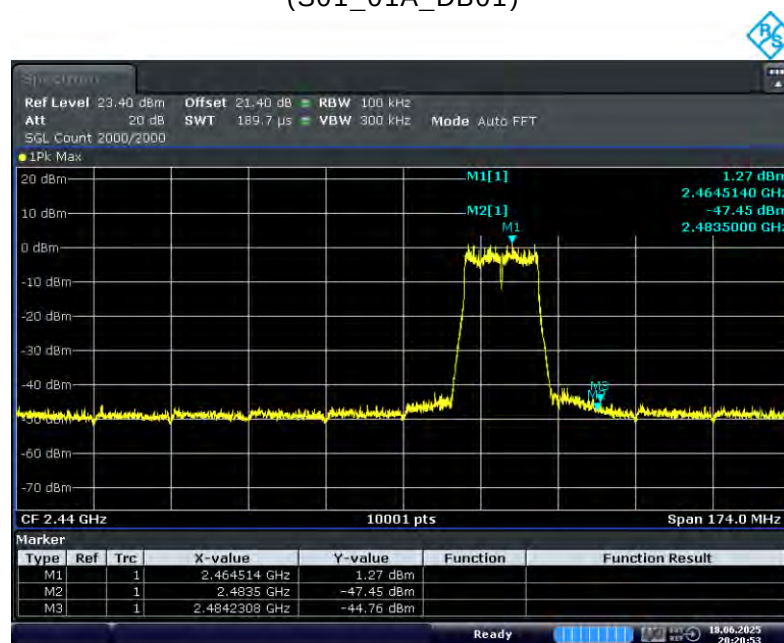


Date: 18 JUN 2025 20:20:53

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)

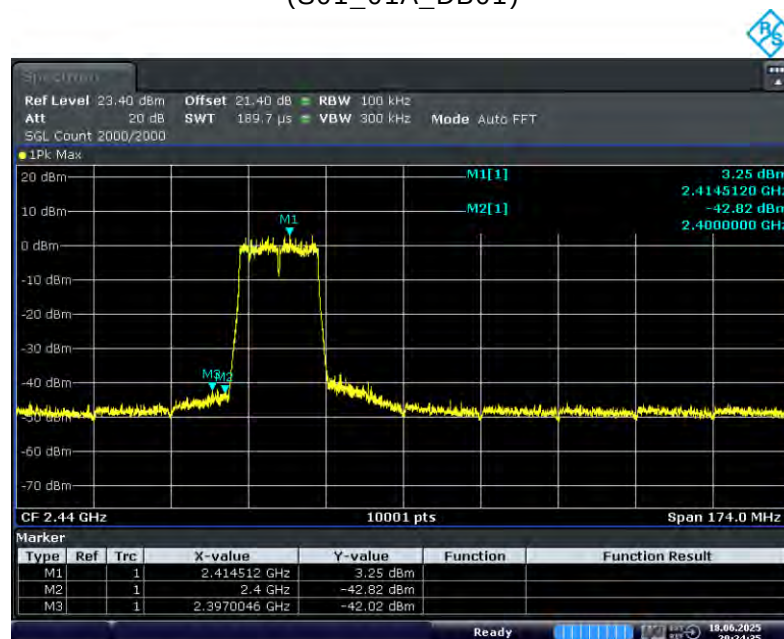


Date: 18 JUN 2025 20:24:35

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
(S01_01A_DB01)

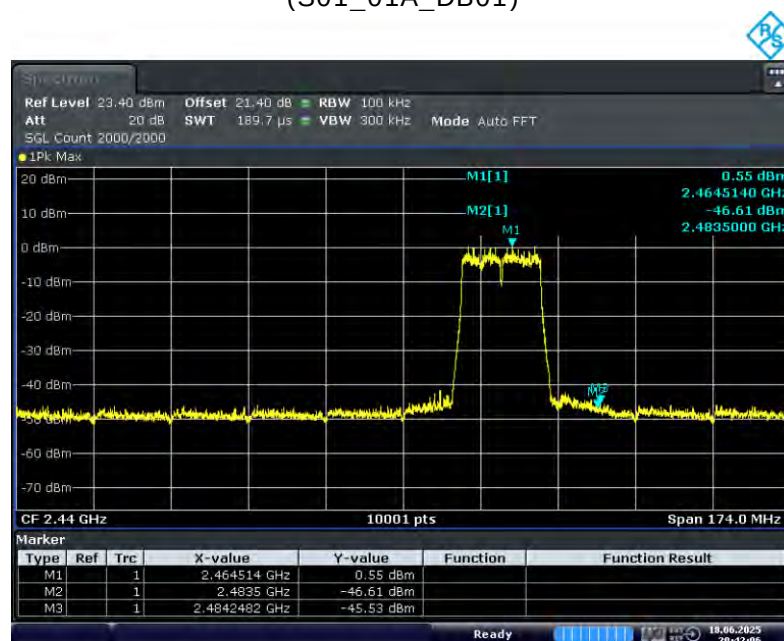


Date: 18 JUN 2025 20:42:07

Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)

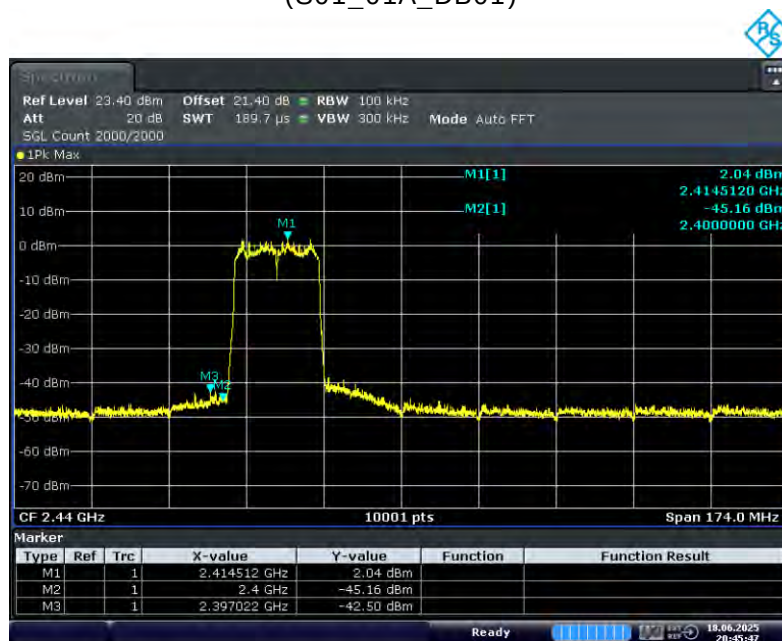

Date: 18 JUN 2025 20:45:48

Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Band Edge = high
(S01_01A_DB01)

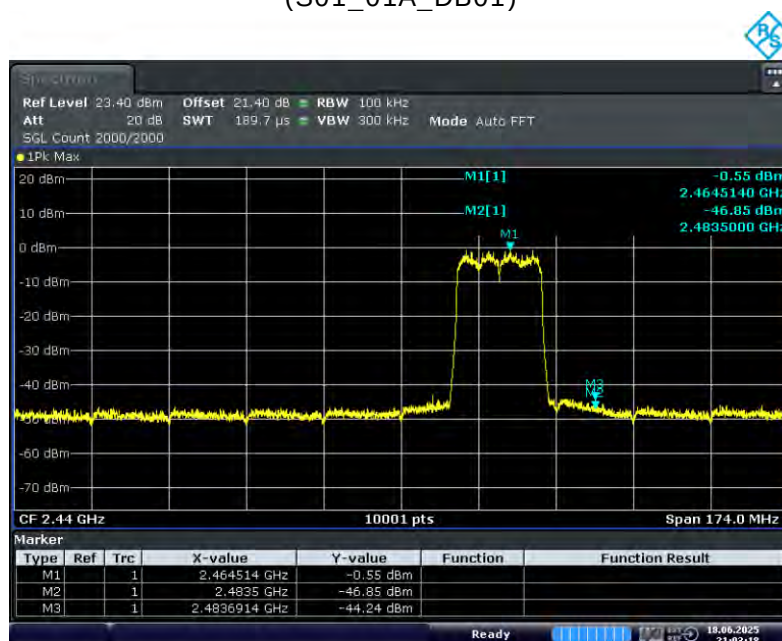

Date: 18 JUN 2025 21:03:18

5.6.5 TEST EQUIPMENT USED

- R&S TS8997


5.7 BAND EDGE COMPLIANCE RESTRICTED BANDS

Standard FCC Part 15 Subpart C

The test was performed according to:

ANSI C63.10, chapter 6.6.5 (radiated measurement with 50 Ohm termination)
 chapter 11.12.2.5.2.1 (conducted measurement at antenna port)

5.7.1 TEST DESCRIPTION

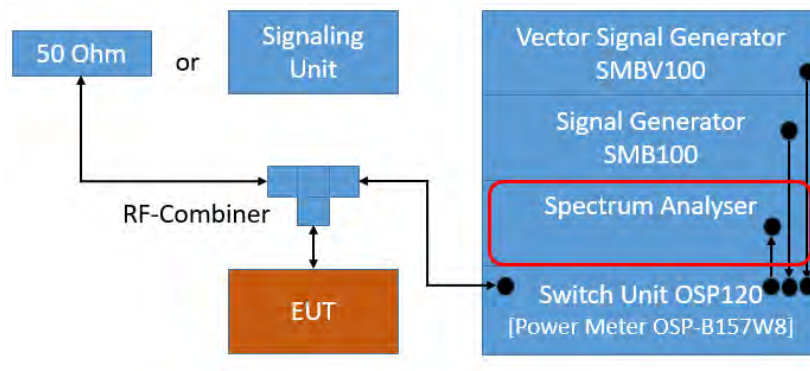

TS8997

Path attenuation is not considered in form of transducer factor but is part of the reference level offset.

Reference Level offset is calculated as follows:

Bluetooth / Path A / Path C:

Path Attenuation + Antenna Gain = 21.4 dB + 4.1 dBi = 25.5 dB offset

Path B: 22.1 dB + 4.1 dBi = 26.2 dB

5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

5.7.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 1013 hPa
 Humidity: 44 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Conducted	2412	2390.0	56.7	PEAK	1000	74.0	17.3
Conducted	2412	2390.0	49.4	AV	1000	54.0	4.6
Conducted	2417	2390.0	57.4	PEAK	1000	74.0	16.6
Conducted	2417	2390.0	49.9	AV	1000	54.0	4.1
Conducted	2422	2390.0	56.4	PEAK	1000	74.0	17.6
Conducted	2422	2390.0	47.1	AV	1000	54.0	6.9
Conducted	2427	2390.0	56.7	PEAK	1000	74.0	17.3
Conducted	2427	2390.0	46.2	AV	1000	54.0	7.8
Conducted	2432	2390.0	56.3	PEAK	1000	74.0	17.7
Conducted	2432	2390.0	46.1	AV	1000	54.0	7.9
Conducted	2437	2390.0	56.7	PEAK	1000	74.0	17.3
Conducted	2437	2390.0	46.5	AV	1000	54.0	7.6
Conducted	2437	2483.5	57.1	PEAK	1000	74.0	16.9
Conducted	2437	2483.5	50.2	AV	1000	54.0	3.8
Conducted	2442	2483.5	57.4	PEAK	1000	74.0	16.6
Conducted	2442	2483.5	50.3	AV	1000	54.0	3.7
Conducted	2447	2483.5	57.6	PEAK	1000	74.0	16.4
Conducted	2447	2483.5	49.8	AV	1000	54.0	4.2
Conducted	2452	2483.5	57.9	PEAK	1000	74.0	16.1
Conducted	2452	2483.5	49.9	AV	1000	54.0	4.1
Conducted	2457	2483.5	55.9	PEAK	1000	74.0	18.2
Conducted	2457	2483.5	48.4	AV	1000	54.0	5.6
Conducted	2462	2483.5	57.5	PEAK	1000	74.0	16.5
Conducted	2462	2483.5	51.6	AV	1000	54.0	2.4
Radiated	2462	2483.5	50.5	PEAK	1000	74.0	23.5
Radiated	2462	2483.5	37.3	AV	1000	54.0	16.7

WLAN g-Mode; 20 MHz; 24 Mbit/s
Applied duty cycle correction (AV): 0 dB

Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Conducted	2412	2390.0	61.3	PEAK	1000	74.0	12.7
Conducted	2412	2390.0	48.8	AV	1000	54.0	5.2
Conducted	2417	2390.0	59.5	PEAK	1000	74.0	14.5
Conducted	2417	2390.0	47.9	AV	1000	54.0	6.1
Conducted	2422	2390.0	63.9	PEAK	1000	74.0	10.1
Conducted	2422	2390.0	48.9	AV	1000	54.0	5.1
Conducted	2427	2390.0	59.1	PEAK	1000	74.0	14.9
Conducted	2427	2390.0	47.8	AV	1000	54.0	6.2
Conducted	2432	2390.0	61.0	PEAK	1000	74.0	13.0
Conducted	2432	2390.0	49.0	AV	1000	54.0	5.0
Conducted	2437	2390.0	59.9	PEAK	1000	74.0	14.1
Conducted	2437	2390.0	48.1	AV	1000	54.0	5.9
Conducted	2437	2483.5	60.1	PEAK	1000	74.0	13.9
Conducted	2437	2483.5	47.8	AV	1000	54.0	6.2
Conducted	2442	2483.5	61.5	PEAK	1000	74.0	12.5
Conducted	2442	2483.5	49.0	AV	1000	54.0	5.0
Conducted	2447	2483.5	63.8	PEAK	1000	74.0	10.2
Conducted	2447	2483.5	50.1	AV	1000	54.0	3.9
Conducted	2452	2483.5	63.3	PEAK	1000	74.0	10.7
Conducted	2452	2483.5	50.9	AV	1000	54.0	3.1
Conducted	2457	2483.5	62.8	PEAK	1000	74.0	11.3
Conducted	2457	2483.5	50.9	AV	1000	54.0	3.1
Conducted	2462	2483.5	61.2	PEAK	1000	74.0	12.8
Conducted	2462	2483.5	49.1	AV	1000	54.0	4.9

WLAN n-Mode; 20 MHz; MCS7

Applied duty cycle correction (AV): 0 dB

Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Conducted	2412	2390.0	64.0	PEAK	1000	74.0	10.0
Conducted	2412	2390.0	49.3	AV	1000	54.0	4.7
Conducted	2417	2390.0	64.6	PEAK	1000	74.0	9.4
Conducted	2417	2390.0	48.7	AV	1000	54.0	5.3
Conducted	2422	2390.0	61.8	PEAK	1000	74.0	12.2
Conducted	2422	2390.0	48.4	AV	1000	54.0	5.6
Conducted	2427	2390.0	61.0	PEAK	1000	74.0	13.1
Conducted	2427	2390.0	48.7	AV	1000	54.0	5.3
Conducted	2432	2390.0	65.9	PEAK	1000	74.0	8.1
Conducted	2432	2390.0	48.6	AV	1000	54.0	5.4
Conducted	2437	2390.0	62.0	PEAK	1000	74.0	12.1
Conducted	2437	2390.0	48.6	AV	1000	54.0	5.4
Conducted	2437	2483.5	61.3	PEAK	1000	74.0	12.7
Conducted	2437	2483.5	48.5	AV	1000	54.0	5.5
Conducted	2442	2483.5	63.9	PEAK	1000	74.0	10.1
Conducted	2442	2483.5	49.3	AV	1000	54.0	4.7
Conducted	2447	2483.5	66.1	PEAK	1000	74.0	7.9
Conducted	2447	2483.5	49.6	AV	1000	54.0	4.4
Conducted	2452	2483.5	64.8	PEAK	1000	74.0	9.2
Conducted	2452	2483.5	50.5	AV	1000	54.0	3.5
Conducted	2457	2483.5	65.2	PEAK	1000	74.0	8.8
Conducted	2457	2483.5	51.6	AV	1000	54.0	2.4
Conducted	2462	2483.5	63.6	PEAK	1000	74.0	10.4
Conducted	2462	2483.5	49.0	AV	1000	54.0	5.0

WLAN ax-Mode; 20 MHz; MCS10

Applied duty cycle correction (AV): 0 dB

Measurement Method	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
Conducted	2412	2390.0	61.7	PEAK	1000	74.0	12.3
Conducted	2412	2390.0	48.9	AV	1000	54.0	5.1
Conducted	2417	2390.0	60.1	PEAK	1000	74.0	13.9
Conducted	2417	2390.0	47.8	AV	1000	54.0	6.2
Conducted	2422	2390.0	66.1	PEAK	1000	74.0	7.9
Conducted	2422	2390.0	49.4	AV	1000	54.0	4.6
Conducted	2427	2390.0	62.8	PEAK	1000	74.0	11.2
Conducted	2427	2390.0	48.1	AV	1000	54.0	5.9
Conducted	2432	2390.0	61.7	PEAK	1000	74.0	12.3
Conducted	2432	2390.0	47.9	AV	1000	54.0	6.1
Conducted	2437	2390.0	62.4	PEAK	1000	74.0	11.6
Conducted	2437	2390.0	48.4	AV	1000	54.0	5.6
Conducted	2437	2483.5	64.9	PEAK	1000	74.0	9.1
Conducted	2437	2483.5	48.5	AV	1000	54.0	5.5
Conducted	2442	2483.5	64.6	PEAK	1000	74.0	9.4
Conducted	2442	2483.5	50.3	AV	1000	54.0	3.7
Conducted	2447	2483.5	64.2	PEAK	1000	74.0	9.8
Conducted	2447	2483.5	50.9	AV	1000	54.0	3.1
Conducted	2452	2483.5	61.8	PEAK	1000	74.0	12.2
Conducted	2452	2483.5	49.9	AV	1000	54.0	4.1
Conducted	2457	2483.5	61.8	PEAK	1000	74.0	12.2
Conducted	2457	2483.5	49.6	AV	1000	54.0	4.4
Conducted	2462	2483.5	62.7	PEAK	1000	74.0	11.3
Conducted	2462	2483.5	48.7	AV	1000	54.0	5.3


Remark: Please see next sub-clause for the measurement plot.

Radiated measurements were performed with 50 Ohm termination at the antenna ports.

5.7.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Conducted Measurements

Radio Technology = WLAN b, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)

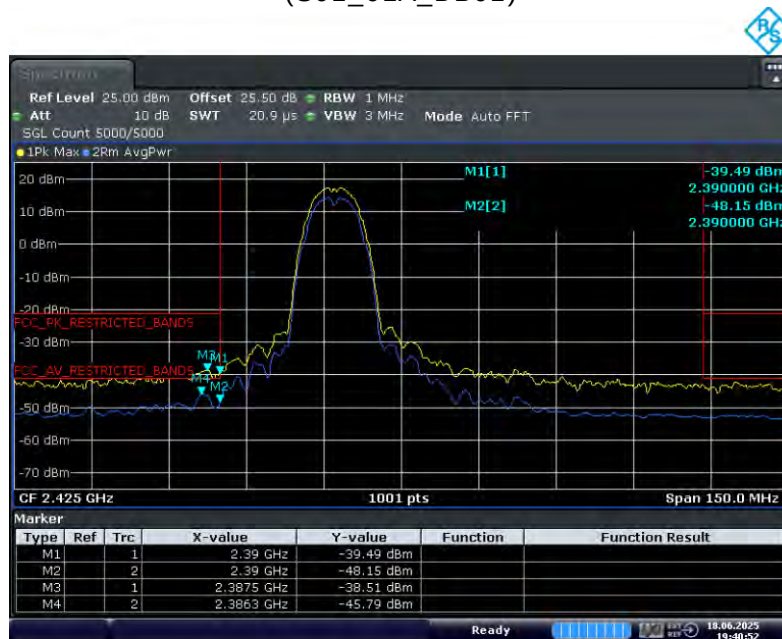


Date: 18 JUN 2025 19:40:52

TX on 2412 MHz

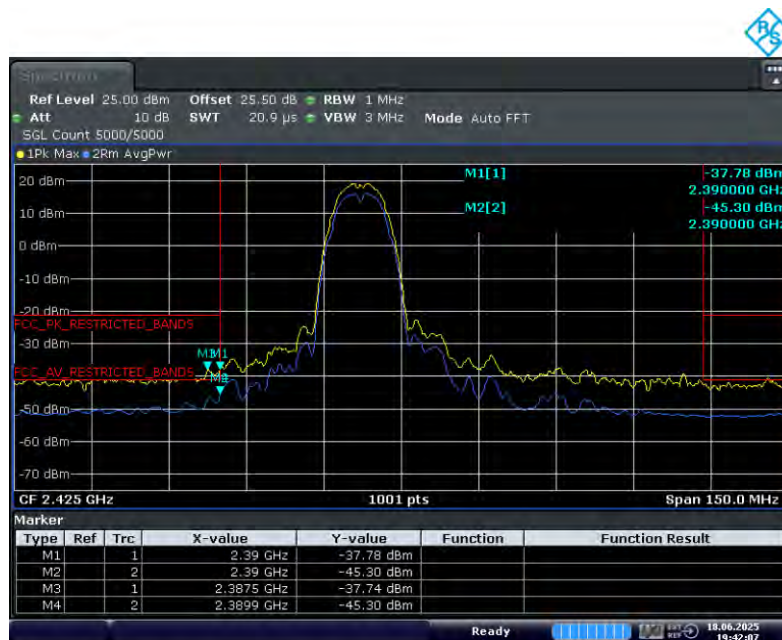

Date: 18 JUN 2025 19:42:07

TX on 2417 MHz

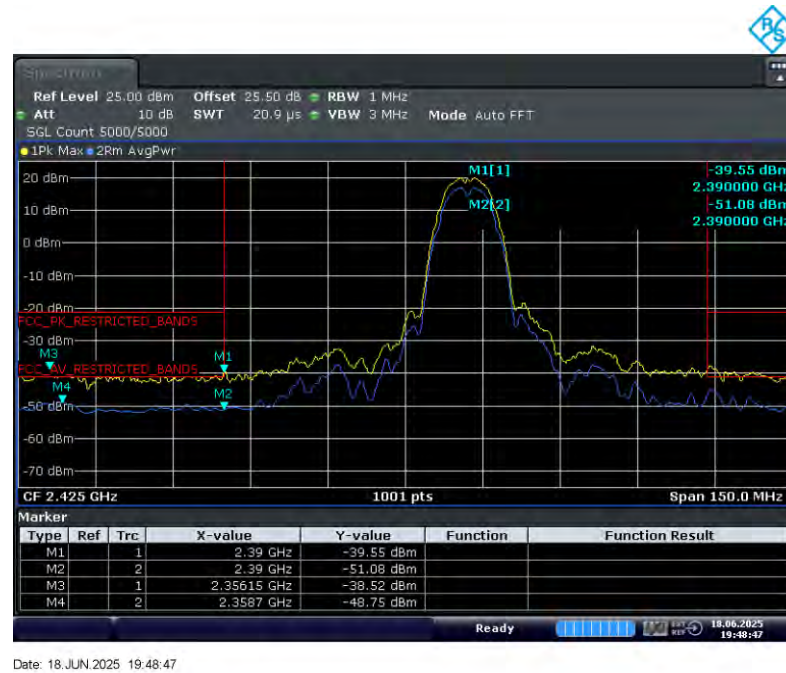

Date: 18 JUN 2025 19:48:47



TX on 2437 MHz


Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high (S01_01A_DB01)



Date: 18 JUN 2025 19:51:02

TX on 2442 MHz

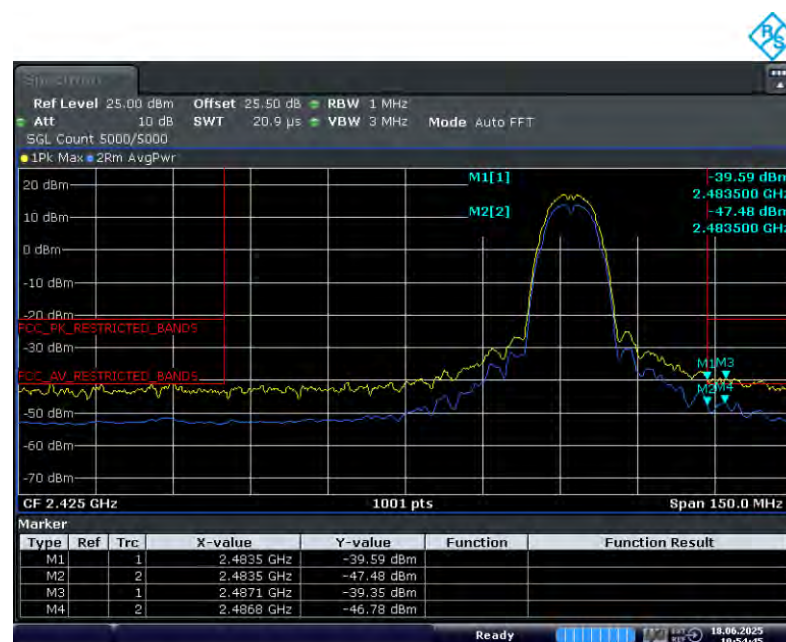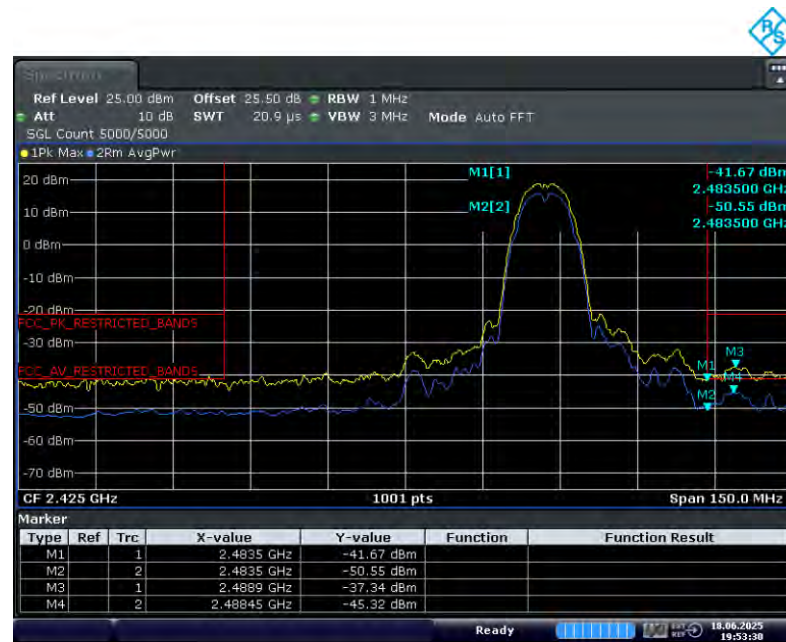

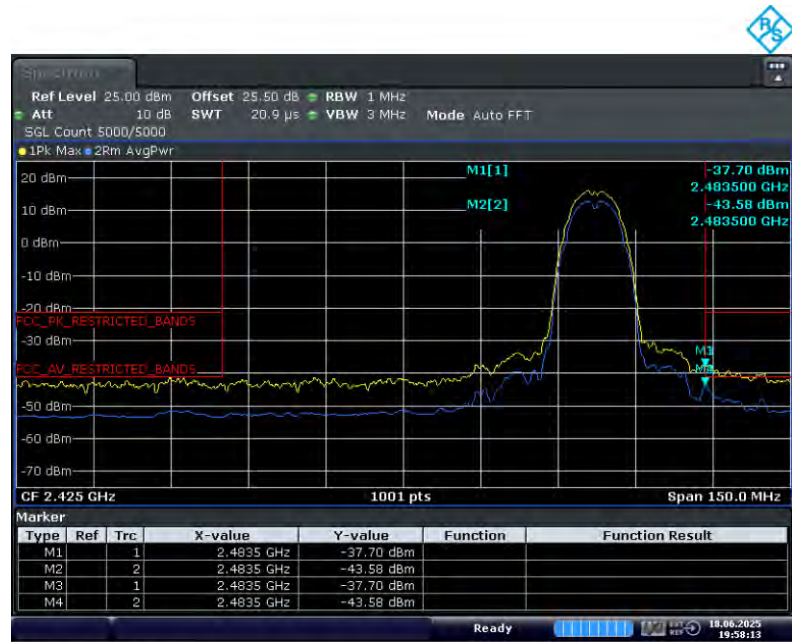

Date: 18 JUN 2025 19:58:14


TX on 2462 MHz

Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)




Date: 18 JUN 2025 20:01:55

TX on 2412 MHz

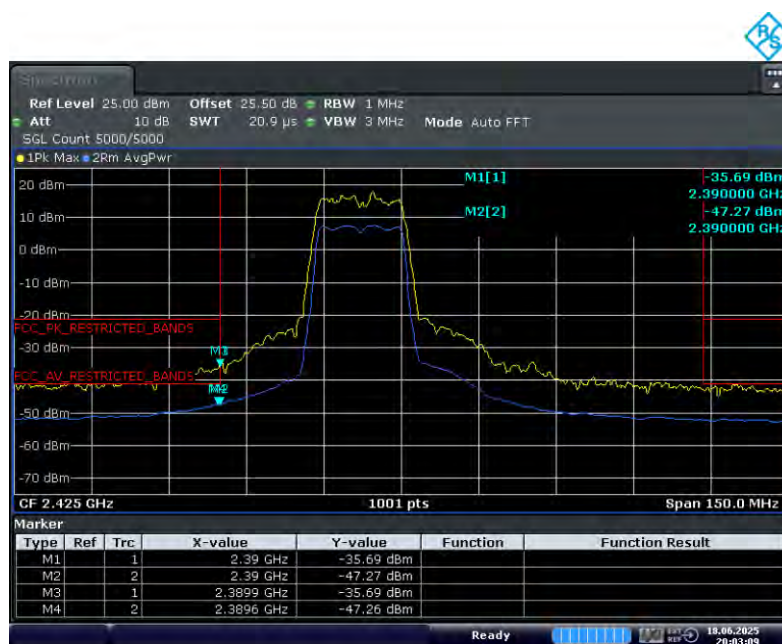


Date: 18 JUN 2025 20:03:09

TX on 2417 MHz

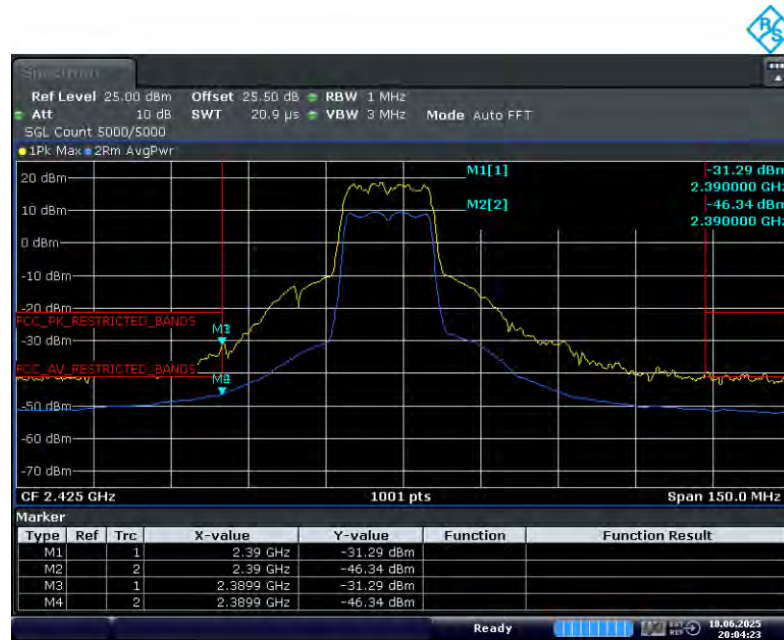

Date: 18 JUN 2025 20:04:23


TX on 2422 MHz

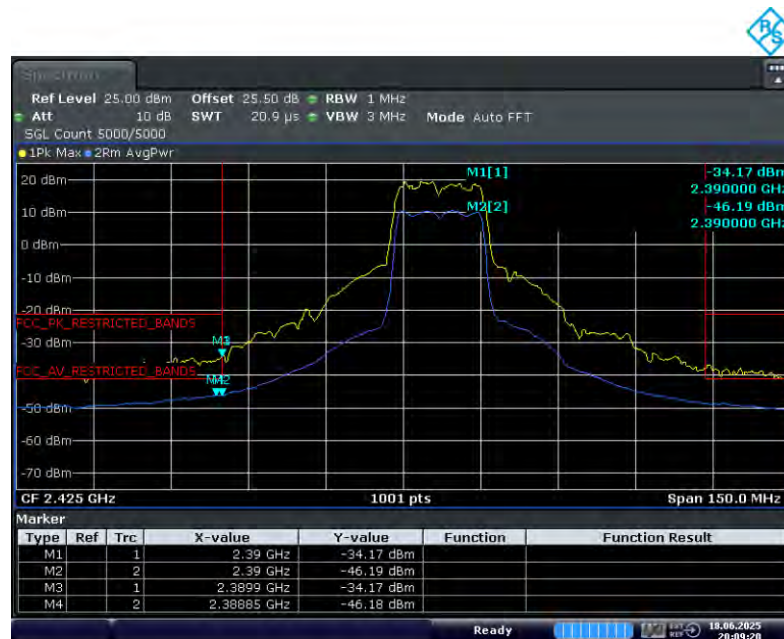

Date: 18 JUN 2025 20:09:20


TX on 2433 MHz

Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high
(S01_01A_DB01)

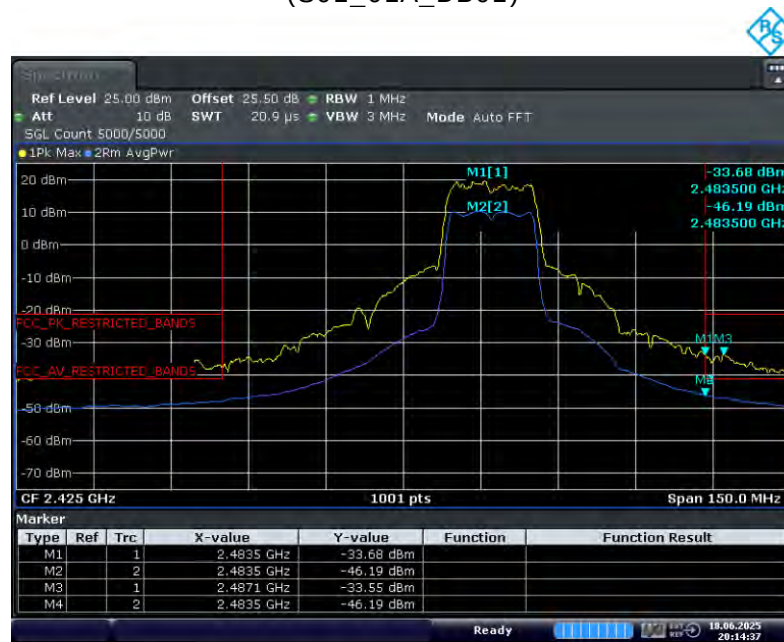

Date: 18 JUN 2025 20:14:38


TX on 2442 MHz

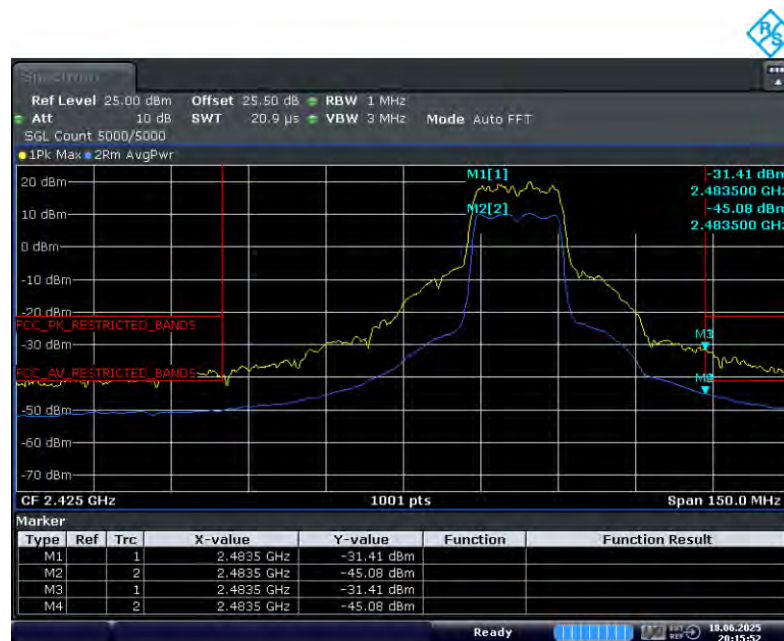

Date: 18 JUN 2025 20:15:52

TX on 2447 MHz



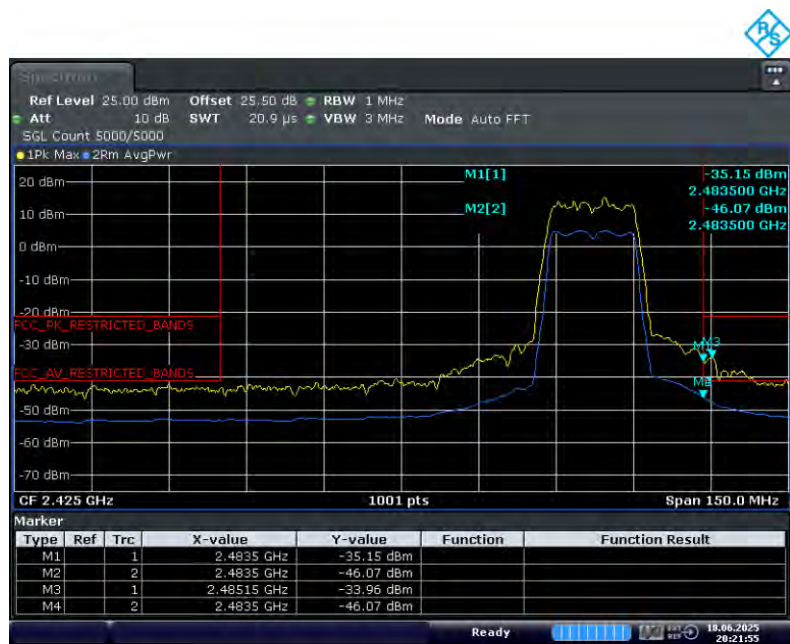

Date: 18 JUN 2025 20:21:54


TX on 2462 MHz

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)




Date: 18 JUN 2025 20:25:36

TX on 2412 MHz

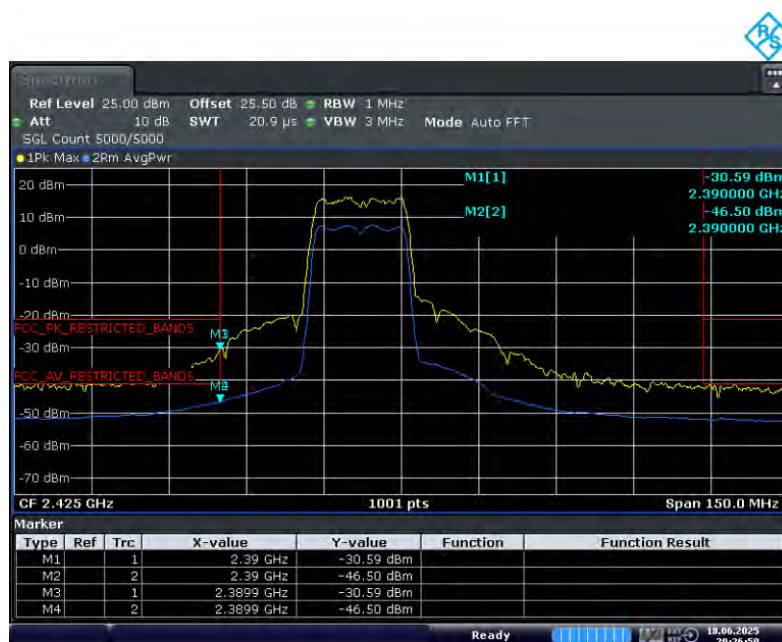


Date: 18 JUN 2025 20:26:50

TX on 2417 MHz

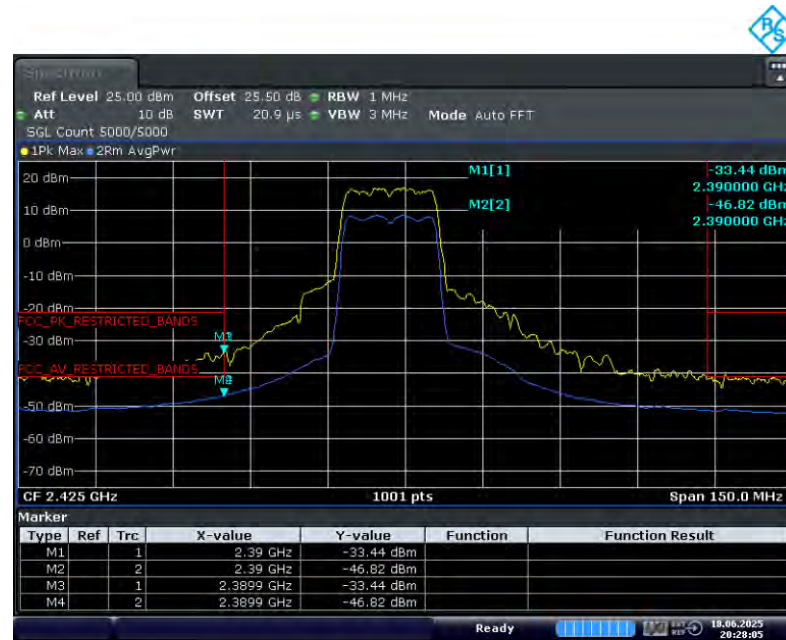


Date: 18 JUN 2025 20:28:05

TX on 2422 MHz

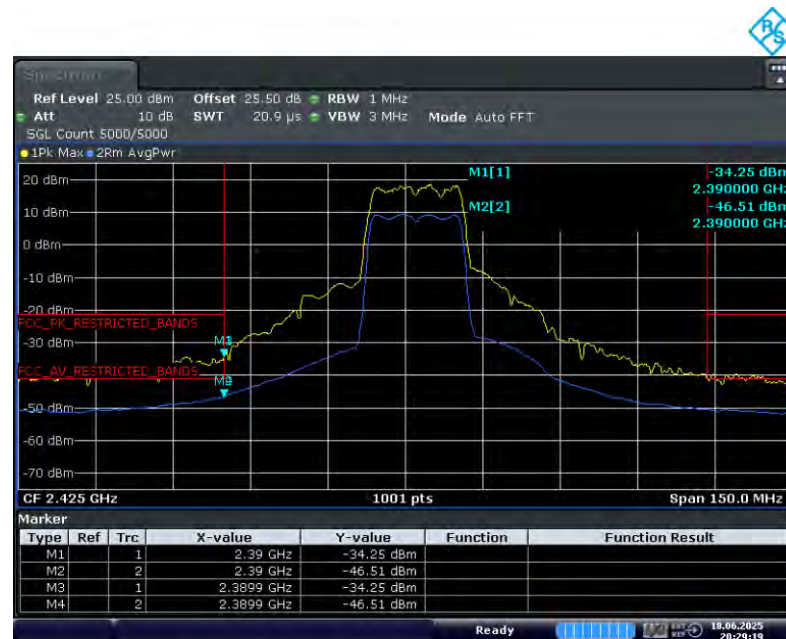


Date: 18 JUN 2025 20:29:19

TX on 2427 MHz

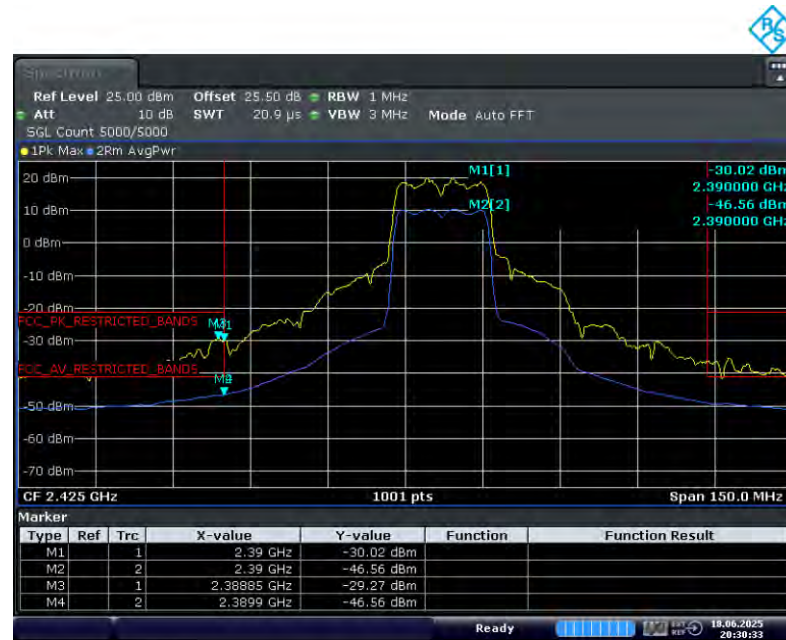

Date: 18 JUN 2025 20:30:34

TX on 2432 MHz

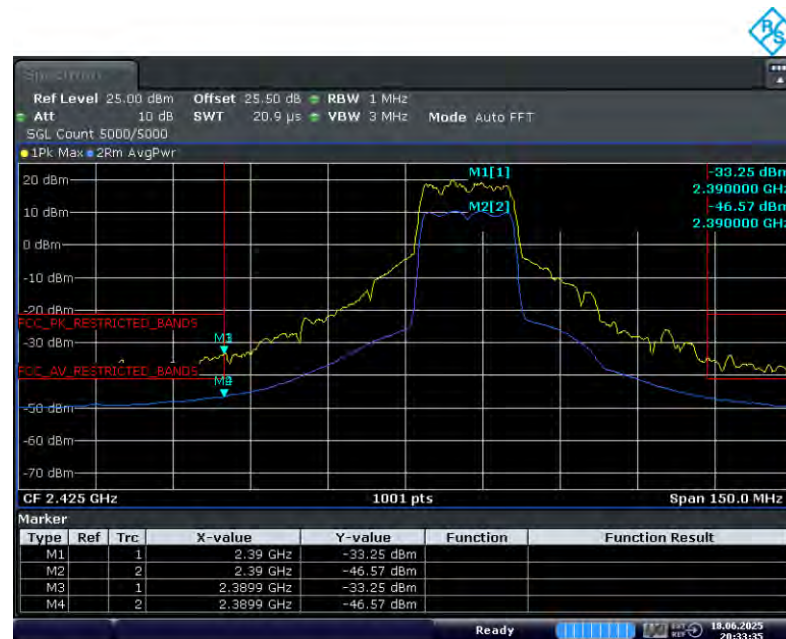

Date: 18 JUN 2025 20:33:36


TX on 2437 MHz

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
(S01_01A_DB01)



Date: 18 JUN 2025 20:34:37

TX on 2437 MHz

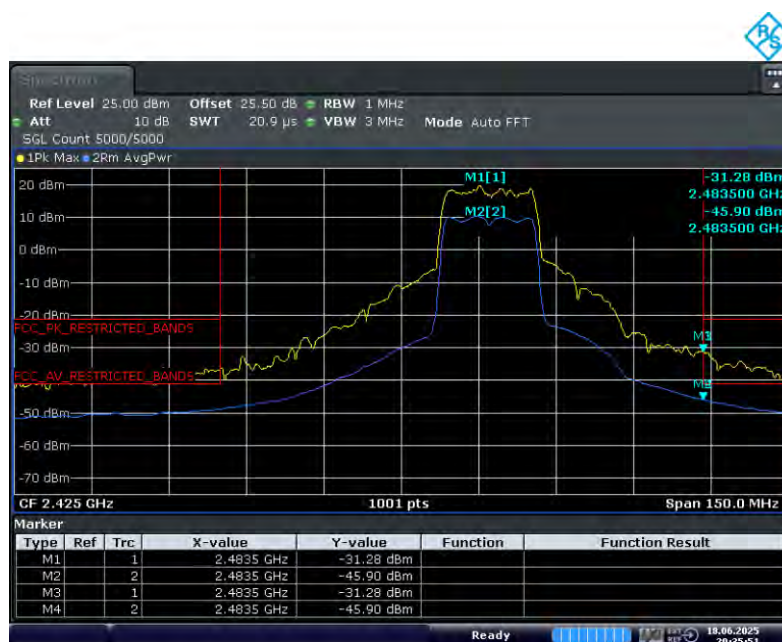


Date: 18 JUN 2025 20:35:51

TX on 2442 MHz



Date: 18 JUN 2025 20:37:05

TX on 2447 MHz

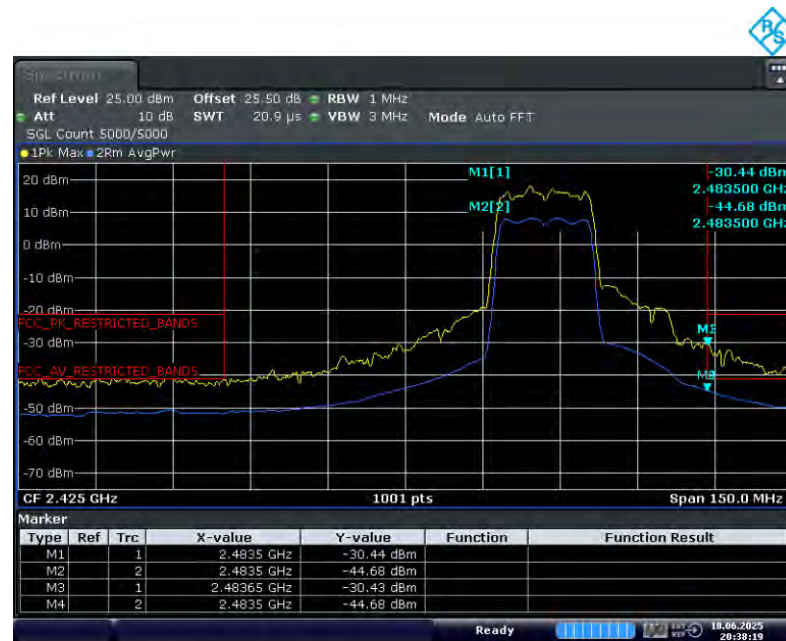


Date: 18 JUN 2025 20:38:20

TX on 2452 MHz



Date: 18 JUN 2025 20:39:34

TX on 2457 MHz

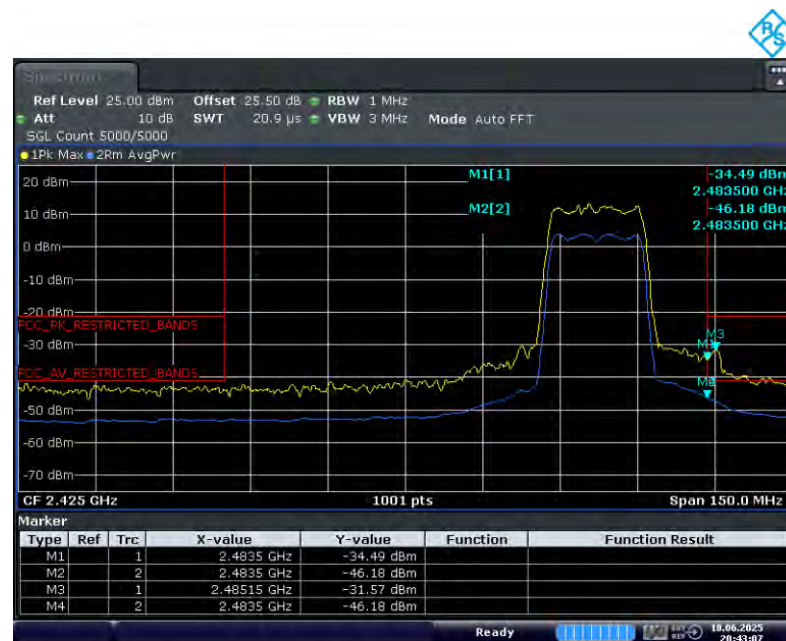

Date: 18 JUN 2025 20:43:07

TX on 2462 MHz

Radio Technology = WLAN ax 20 MHz, Operating Frequency = low, Band Edge = low
(S01_01A_DB01)



Date: 18 JUN 2025 20:46:49

TX on 2412 MHz



Date: 18 JUN 2025 20:48:03

TX on 2417 MHz




Date: 18 JUN 2025 20:49:17

TX on 2422 MHz



Date: 18 JUN 2025 20:51:46

TX on 2432 MHz

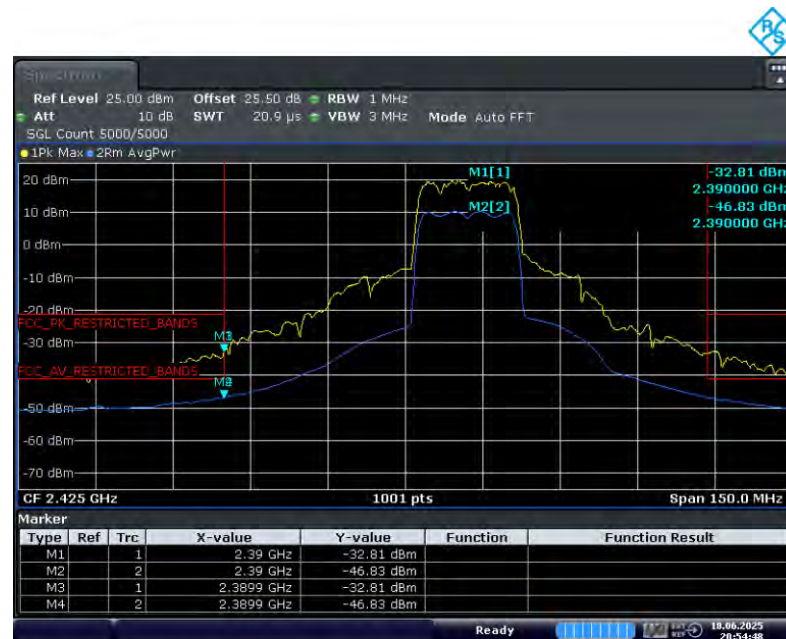

Date: 18 JUN 2025 20:54:48


TX on 2437 MHz

Radio Technology = WLAN ax 20 MHz, Operating Frequency = high, Band Edge = high (S01_01A_DB01)



Date: 18 JUN 2025 20:57:03

TX on 2442 MHz

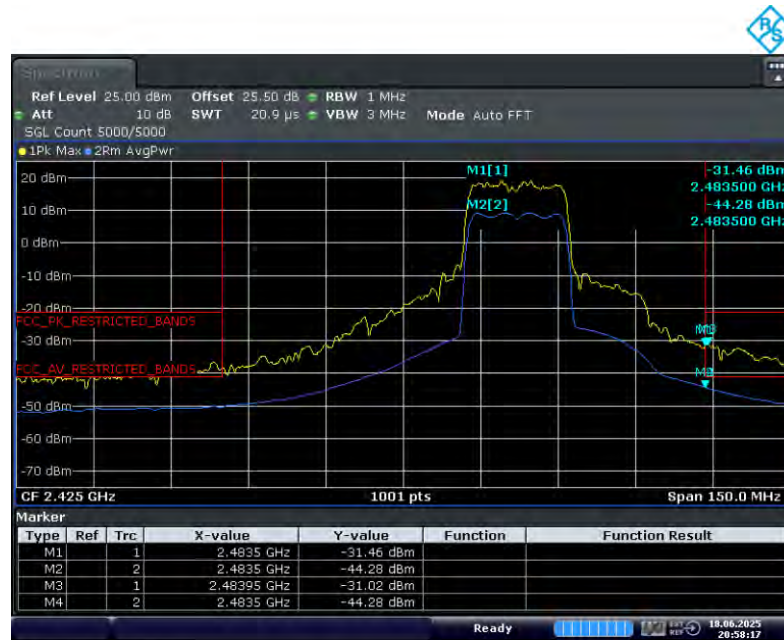


Date: 18 JUN 2025 20:58:17

TX on 2447 MHz




Date: 18 JUN 2025 20:59:32

TX on 2452 MHz

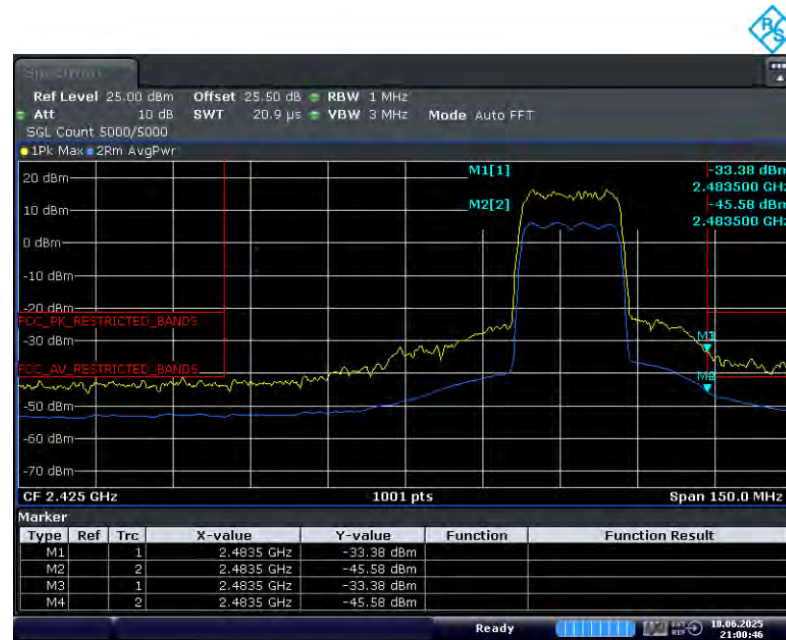

Date: 18 JUN 2025 21:00:46

TX on 2457 MHz

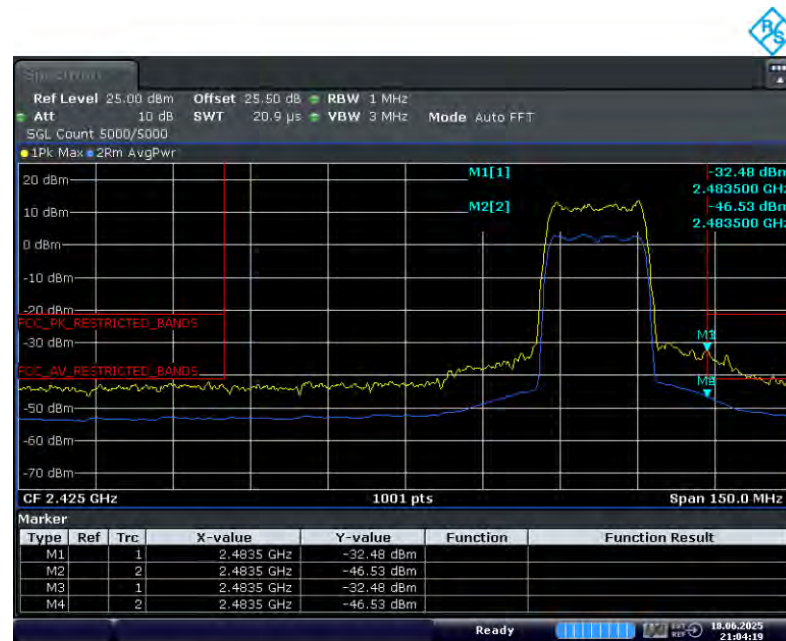


Date: 18 JUN 2025 21:04:19

TX on 2462 MHz

Radiated Measurements

Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high
(S02_01A_DB01)

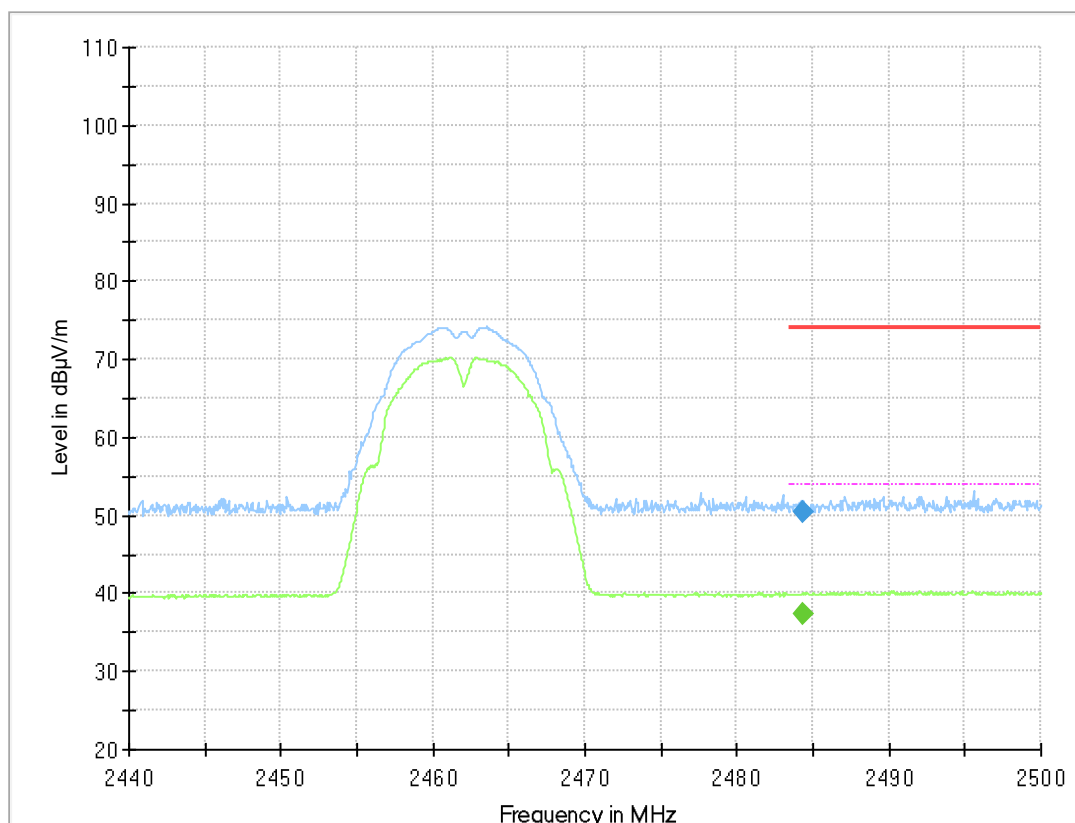

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2484.375	---	37.3	54.00	16.70	1000.0	1000.000	150.0	H	-35.0	4.0	7.7
2484.375	50.5	---	74.00	23.50	1000.0	1000.000	150.0	H	-35.0	4.0	7.7

5.7.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC
- R&S TS8997

5.8 POWER DENSITY

Standard FCC Part 15 Subpart C

The test was performed according to:
ANSI C63.10, chapter 11.10.7

5.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.


The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Maximum Average Power Spectral Density (e.g. WLAN):

Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz, 10 kHz or 3 kHz
- Video Bandwidth (VBW): ≥ 3 times RBW
- Sweep Points: ≥ 2 times span / RBW
- Trace: Average Power
- Sweeps: see plots
- Sweptime: auto
- Detector: RMS

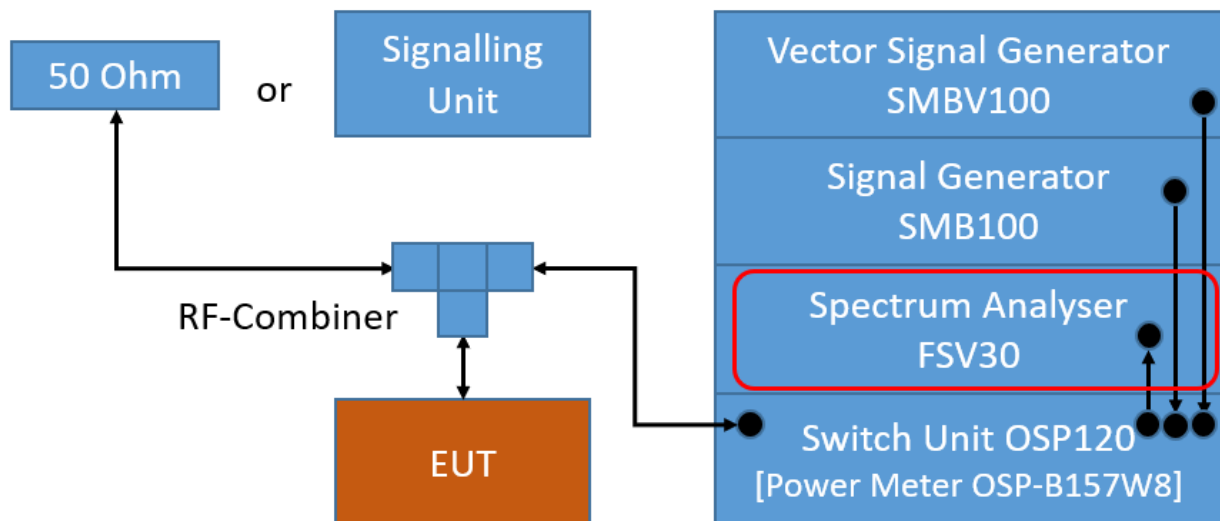

TS8997; Power Spectral Density

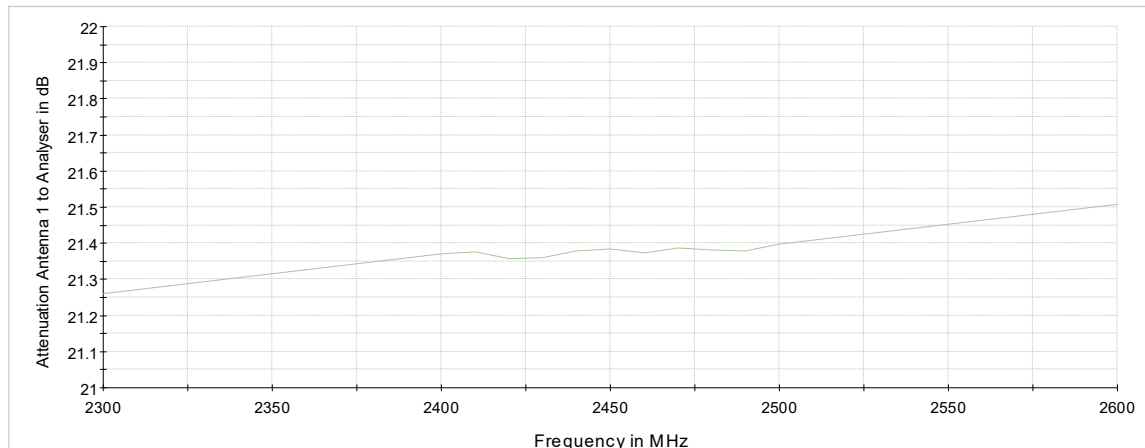

Attenuation of the measurement path

5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques.

...

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

5.8.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 1013 hPa
 Humidity: 44 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm / 3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-8.5	10.0	8.0	16.5
	6	2437	-5.9	10.0	8.0	13.9
	11	2462	-9.9	10.0	8.0	17.9

WLAN g-Mode; 20 MHz; 24 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm / 3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-12.9	10.0	8.0	20.9
	6	2437	-9.4	10.0	8.0	17.4
	11	2462	-14.9	10.0	8.0	22.9

WLAN n-Mode; 20 MHz; MCS7

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm / 3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-15.1	10.0	8.0	23.1
	6	2437	-11.4	10.0	8.0	19.4
	11	2462	-17.8	10.0	8.0	25.8

WLAN ax-Mode; 20 MHz; MCS10

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm / 3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-16.3	10.0	8.0	24.3
	6	2437	-11.3	10.0	8.0	19.3
	11	2462	-18.8	10.0	8.0	26.8

Remark: Please see next sub-clause for the measurement plot.


5.8.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = mid
(S01_01A_DB01)




Date: 18 JUN 2025 19:47:46

Radio Technology = WLAN g, Operating Frequency = mid
(S01_01A_DB01)

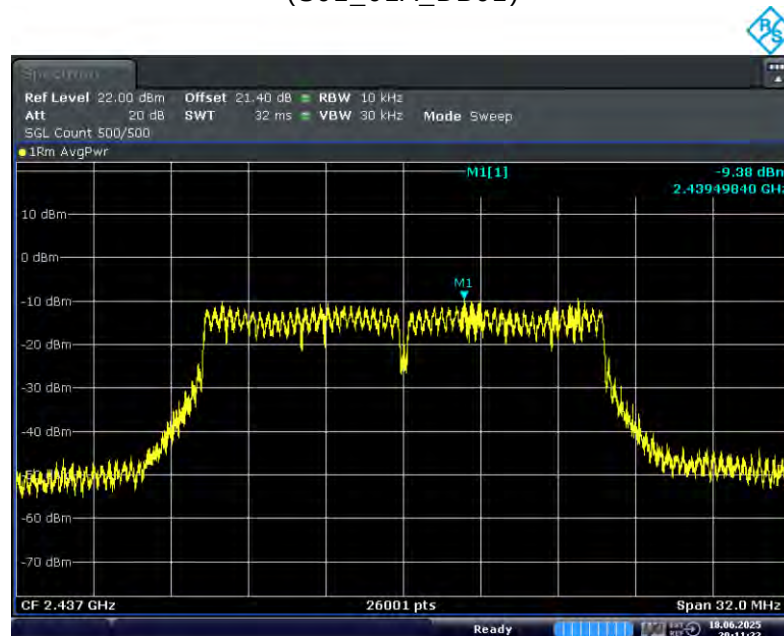


Date: 18 JUN 2025 20:11:22

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid
(S01_01A_DB01)

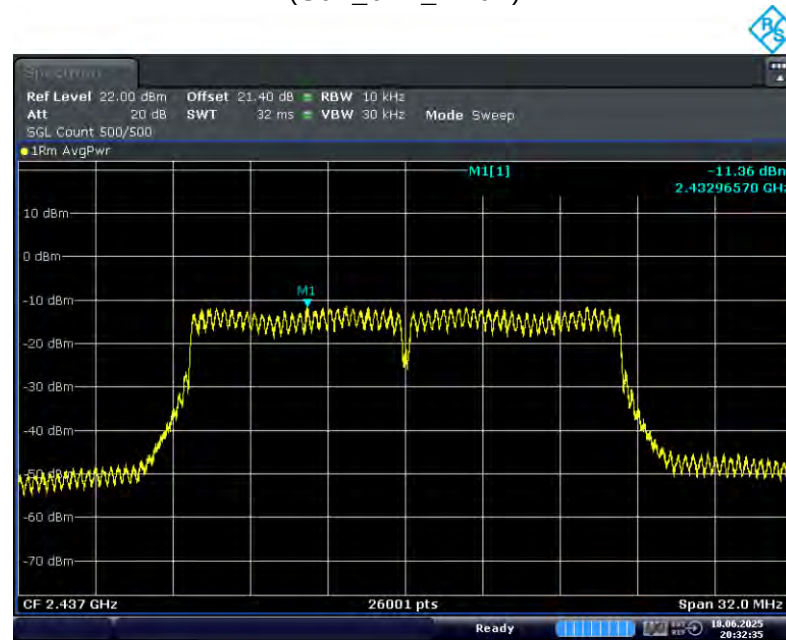

Radio Technology = WLAN ax 20 MHz, Operating Frequency = mid
(S01_01A_DB01)

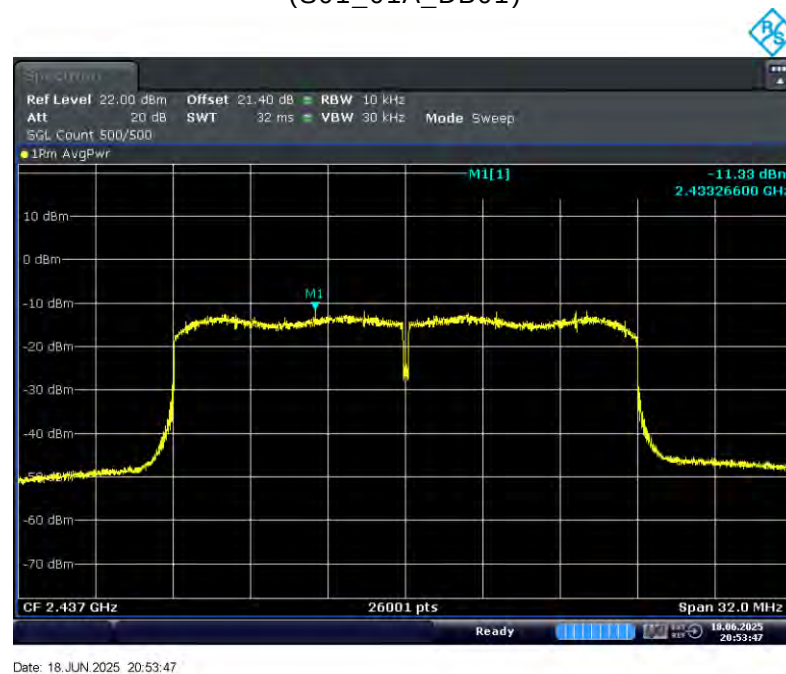

5.8.5 TEST EQUIPMENT USED

- R&S TS8997

6 TEST EQUIPMENT

6.1 TEST EQUIPMENT HARDWARE

- 1 R&S TS8997
2.4 and 5 GHz Bands Conducted Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
1.2	EX520	Digital Multimeter 12	Extech Instruments Corp	05157876	2024-12	2026-12
1.3	Opus10 THI (8152.00N)	T/H Logger 01	Lufft Mess- und Regeltechnik GmbH	5809	2023-12	2025-12
1.4	FSW43	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	102013	2023-07	2025-07
1.5	Opus10 THI (8152.00)	T/H Logger 14	Lufft Mess- und Regeltechnik GmbH	13993	2023-12	2025-12
1.6	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2023-08	2025-08
1.7	OSP120	Contains Power Meter and Switching Unit OSP-B157W8 PLUS	Rohde & Schwarz	101158	2024-08	2027-08
1.8	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2025-10

- 2 Radiated Emissions FAR 2.4 GHz FCC
Radiated emission tests for 2.4 GHz ISM devices in a fully anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
2.2	Innco Systems CO3000	Controller for bore sight mast FAC	innco systems GmbH	CO3000/1460 /54740522/P	N/A	N/A
2.3	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq		N/A	N/A
2.4	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	N/A	N/A
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
2.6	HF 906	Double-ridged horn	Rohde & Schwarz	357357/002		
2.7	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	N/A	N/A
2.8	FSW43	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	103779	2024-12	2026-12

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.9	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
2.10	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069	N/A	N/A
2.11	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09	N/A	N/A
2.12	MA3000/0800-XP-ET-compact	Bore Sight Antenna Mast	innco systems GmbH	9210522	N/A	N/A
2.13	TT 1.5 WI	Turn Table	Maturo GmbH	-	N/A	N/A
2.14	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008	N/A	N/A
2.15	Opus 20 THI (8120.00)	ThermoHygro Datalogger	Lufft Mess- und Regeltechnik GmbH	115.0318.080 2.033	2023-08	2025-08
2.16	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/379 0709	N/A	N/A
2.17	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324	N/A	N/A
2.18	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2024-10	2027-10

3 Radiated Emissions SAC H-Field

Radiated emission tests in the H-Field in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
3.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
3.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
3.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
3.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
3.6	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
3.7	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
3.8	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
3.9	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006	2024-04	2027-04

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2025-10

4 Radiated Emissions SAC up to 1 GHz
 Radiated emission tests up to 1 GHz in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
4.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
4.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
4.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
4.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
4.5	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2025-04	2028-04
4.6	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
4.7	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
4.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
4.9	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
4.10	HL562E ULTRALOG	Biconical-log-per Antenna (30 MHz - 6 GHz)	Rohde & Schwarz GmbH & Co. KG	102299	2024-07	2027-07
4.11	Chase CBL6111C + INMET 64671 18N-6dB	Hybrid Antenna with 6dB Attenuator		2624 Kartei-Nr E-003226/K1026	2023-03	2026-03
4.12	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2025-10
4.13	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/11920513	N/A	N/A

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6.2 TEST EQUIPMENT SOFTWARE

Semi-Anechoic Chamber:		
Software	Version	
EMC32 Measurement Software	10.60.10	
INNCO Mast Controller	1.02.62	
INNCO Mast Height	34.10	
INNCO Mast Elevation	36.11	
MATURO Controller	1.24	
MATURO Mast	12.19	
MATURO Turn-Table	30.10	
Fully-Anechoic Chamber:		
Software	Version	
EMC32 Measurement Software	10.60.10	
MATURO Controller	1.30	
MATURO Turn-Unit	11.10	
MATURO Mast	12.10	
MATURO Turntable	12.11	
INNCO Controller	1.03.02	
INNCO Mast Height	34.10	
INNCO Mast Elevation	36.11	
TS 8997		
WMS32 Measurement Software	11.60.00 (till 2024-03-19), 11.70.00 + Hotfix 01	
Conducted AC Emissions:		
Software	Version	
EMC32 Measurement Software	10.60.20	

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF HFH- Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d _{Limit} (meas. distance (limit)	d _{used} (meas. distance (used)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 $\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHz – 40 GHz)

Frequency	AF EMCO 3160-10	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d _{Limit} (meas. distance (limit)	d _{used} (meas. distance (used)
GHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

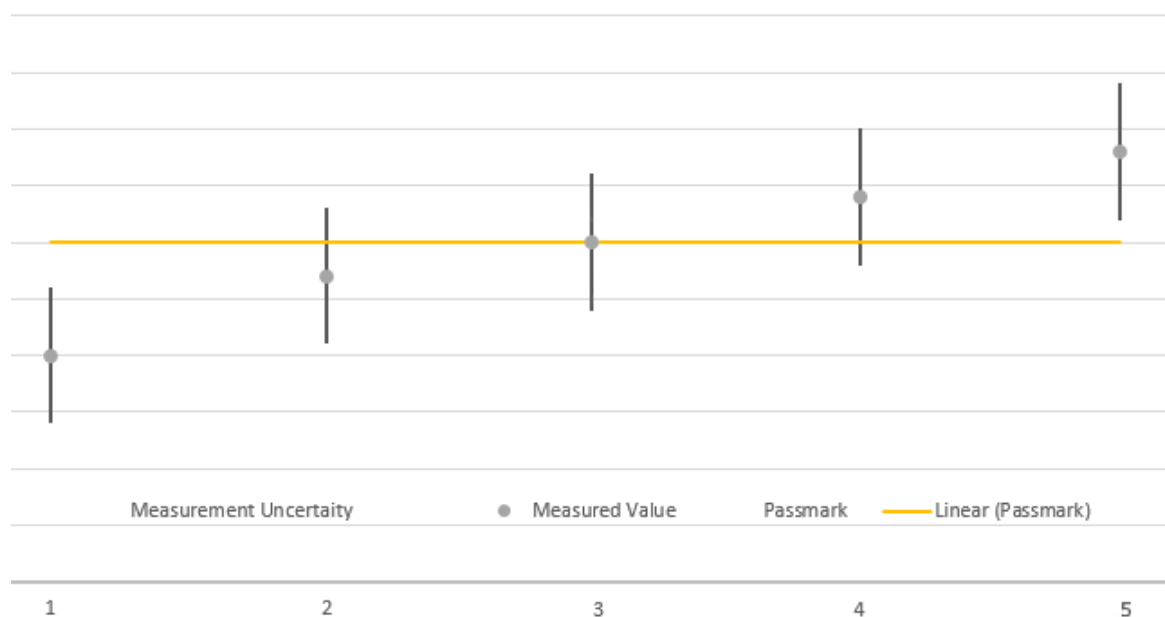

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	on pass mark	within pass mark	Passed
4	above pass mark	within pass mark	Failed
5	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.

*****END OF TEST REPORT*****