

**PARTIAL - TEST REPORT**  
**No.: 6-0143-12-11-2a**

According to:  
**FCC Regulations**  
 Part 15C, Part 22 & Part 24  
**IC-Regulations**  
 RSS-132 Issue 2, RSS-133 Issue 5 &  
 RSS-Gen Issue 3







for

**u-blox AG**

RF-Module LISA-U260-01

**FCC-ID: XPYLISAU200**

**IC-ID: 8595A-LISAU200**

Laboratory Accreditation and Listings			
 <b>Deutsche            Akkreditierungsstelle</b> D-PL-12047-01-01	 <b>FEDERAL COMMUNICATIONS COMMISSION</b> • USA • Reg. No.: 736496 MRA US-EU 0003	 <b>Industry Canada</b> Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 <b>Voluntary Controls for            Electromagnetic Emissions</b> Reg. No.: R-2665, R-2666 C-2914, T-1967, G-301
 <b>AUTHORIZED            RF LABORATORY</b>	 <b>LAB CODE 20011130-00</b>		
accredited according to DIN EN ISO/IEC 17025			
<b>CETECOM GmbH</b> Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com			

**Table of contents**

**1. SUMMARY OF TEST RESULTS.....3**

    1.1. TX mode, tests overview FCC and Canada IC Standards (RSS).....3

**2. ADMINISTRATIVE DATA .....4**

    2.1. Identification of the testing laboratory .....4

    2.2. Test location .....4

    2.3. Organizational items .....4

    2.4. Applicant’s details .....4

    2.5. Manufacturer’s details .....4

**3. EQUIPMENT UNDER TEST (EUT).....5**

    3.1. Technical data of main EUT declared by applicant .....5

    3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....6

    3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....6

    3.4. EUT set-ups .....6

    3.5. EUT operating modes .....7

    3.6. Parameter Settings on mobile phone and base station CMU200 .....8

**4. DESCRIPTION OF TEST SYSTEM SET-UP’S .....10**

    4.1. Test system set-up for AC power-line conducted emission measurements .....10

    4.2. Test system set-up for conducted RF-measurement at antenna port.....11

    4.3. Test system set-up for radiated magnetic field measurements below 30 MHz .....12

    4.4. Test system set-up for radiated spurious emission measurements .....14

**5. MEASUREMENTS .....15**

    5.1. General Limit - Conducted emissions on AC-Power lines .....15

    5.2. RF Peak power output conducted .....16

    5.3. RF-Parameter - RF Peak power output radiated .....18

    5.4. Radiated field strength emissions below 30 MHz .....20

    5.5. Conducted out of Band RF emissions and Block Edge .....23

    5.6. RF-Parameter - Radiated out of Band RF emissions and Band Edge .....27

    5.7. Occupied and emission bandwidth .....30

    5.8. Frequency stability on temperature and voltage variations.....32

    5.9. Measurement uncertainties .....37

**6. ABBREVIATIONS USED IN THIS REPORT .....37**

**7. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES .....38**

**8. INSTRUMENTS AND ANCILLARY .....38**

    8.1. Used equipment “CTC” .....38

<b>Table of annex</b>	<b>Total pages</b>
ANNEX 1: MEASUREMENT DIAGRAMS	84
ANNEX 2: INTERNAL EUT PHOTOGRAPHS	4
ANNEX 3: EXTERNAL EUT PHOTOGRAPHS	4
ANNEX 4: PHOTOGRAPHS OF TEST SET UP’S	4

The listed attachments are an integral part of this report.

# 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. This test report shows results for GSM/(E)GPRS Band 850 and 1900, W-CDMA Band II and V technologies only. Other implemented wireless technologies were not considered within this test report.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H and Part 24, Subpart E (Broadband PCS) of the FCC CFR 47 Rules, Edition October 2011 and Canada RSS-132 Issue 2, RSS-133 Issue 5 and RSS-Gen Issue 3 standards.

## 1.1. TX mode, tests overview FCC and Canada IC Standards (RSS)

No. of Diagram chapter	Test Cases	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1.1	Emissions AC-Power lines 0,15-30 MHz conducted	AC-Power lines	§15.207	RSS-Gen, Issue 3: Chapter 7.2.4	§15.207 limits IC: Table 4, Chapter 7.2.4	1	5+6	passed
--	RF Power conducted	Antenna terminal	§2.1046	--	N/A	2	1 + 2+ 3 + 4 + 5 + 6 + 7+8	passed
2.0, 2.2, 2.4 & 2.6	RF-Power (ERP/EIRP) radiated	Cabinet	§2.1046 §22.913(a)(2) §24.232(c)	RSS-132: 4.4 SRSP-503: 5.1.3  RSS-133: 4.1/6.4 SRSP-510: 5.1.2	< 7 Watt (ERP)  < 2 Watt (EIRP)	1	1 + 2 + 3 + 4 + 5 + 6	passed
1.2 & 1.3	26dB Emission bandwidth & 99% Occupied bandwidth	Antenna terminal	§2.202 §2.1049 §22.917(a) §24.238(a)	RSS/Gen:4.6.1	99% Power	2	3 + 4 + 5 + 6	passed
1.7 & 1.8	Spurious emissions conducted	Antenna terminal	§2.1051 §2.1057 §22.917(a)(b) §24.238(a)(b)	RSS-132: 4.5.1 RSS -133: 6.5.1(a)(b)	43+10log(P) dBc	2	5+6	passed
1.4, 1.6, 1.9, 2.1, 2.3 & 2.5	Spurious emissions radiated (30 MHz...X*GHz) *tenth-times of fc	Cabinet + Inter-connect cables	§15.209(a) §15.205 §15.247 (d)	RSS-Gen: 4.11 & 7.2.5 RSS-Gen: 210, issue 8, chapter 2.5 & A9.2	Emissions in restricted bands must meet the general field-strength radiated limits	1	1 + 2+ 3 + 4 + 5 + 6	passed
			§2.1053(a) §2.1057 §22.917(a)(b) §24.238(a)(b)	RSS-132: 4.5.1 & 4.5.2 RSS 133: 6.5.1(a)(b)	43+10log(P) dBc	1		passed
--	Frequency stability conducted	Antenna terminal	§22.355, table C-1 §24.235 §2.1055(a)(2)	RSS-132: 4.3  RSS-133: 6.3	< ±2.5ppm  <±0.1 ppm	1	5+6	passed

Remark: GSM/(E)GPRS Band 850 and 1900 only partial done . Due to customer declaration RF module LISA U260-01 based on parent module of certified LISA U200-01. Therefore only W-CDMA Band II and V technologies is tested full.

.....  
Dipl.-Ing. Ch. Lorenz  
Responsible for test section

GmbH  
Im Teelbruch 116  
45219 Essen  
Tel.: + 49 (0) 20 54 / 95 19 - 0  
Fax: + 49 (0) 20 54 / 95 19 - 997

.....  
Dipl.-Ing. B. Taslica  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. W. Richter
Deputy:	Dipl.-Ing. J. Schmitt

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Responsible for test report and project leader:	Dipl.-Ing. B. Taslica
Receipt of EUT:	2012-10-01
Date(s) of test:	2012-10-02- 2012-10-15
Date of report:	2012-10-19
-----	
Version of template:	12.08

### 2.4. Applicant's details

Applicant's name:	u-blox AG
Address:	Zürcherstrasse 68 8800 Thalwil  Switzerland
Contact person:	Mr. Giulio Comar

### 2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

### 3. Equipment under test (EUT)

#### 3.1. Technical data of main EUT declared by applicant

Main function	GSM/GPRS/WCDMA RF Module (Data/Voice)	
Type	LISA-U260-01	
GSM Frequency range (US/Canada -bands)	GSM 850: 824 – 849 MHz (Uplink), 869-894 MHz (Downlink) GSM1900: 1850-1910 MHz (Uplink), 1930-1990 MHz (Downlink) FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990MHz (Downlink) FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894MHz (Downlink)	
Type of modulation	GSM, GPRS, GMSK EGPRS-Mode: 8-PSK FDD-Mode Release99: QPSK FDD Mode Release 5+6: DL 16 QAM, UL QPSK/BPSK additionally	
Number of channels (USA/Canada -bands)	GSM 850: 128 – 251, 125 channels GSM1900: 512 – 810, 300 channels FDD Band 2: UARFCN range 9262 – 9400 – 9538 FDD Band 5: UARFCN range 4132 – 4183 – 4233	
Antenna Type	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input type="checkbox"/> External, separate RF-connector	
Antenna Gain	<input checked="" type="checkbox"/> radiated:.3.0 dBi average gain	
Max. Output Power: (radiated)	GSM 850 EDGE 850	29.1 dBm (PK) 27.7 dBm (PK)
	GSM 1900 EDGE 1900	27.3 dBm (PK) 26.0 dBm (PK)
Max. Output Power (conducted):	GSM 850 EDGE 850	32.21 dBm (PK) / 32.04 dBm (AV) 29.48 dBm (PK) / 26.53 dBm (AV)
	GSM 1900 EDGE 1900	29.15 dBm (PK) / 28.93 dBm (AV) 28.24 dBm (PK) / 25.26 dBm (AV)
Max. Output Power: (radiated)	FDD-II RMC99	27.3 dBm (PK)
	FDD-V RMC99	23.3 dBm (PK)
Max. Output Power (conducted):	FDD-II RMC99 FDD-II HSUPA	22.36 dBm (RMS) 21.84 dBm (RMS)
	FDD-V RMC99 FDD-V HSUPA	22.45 dBm (RMS) 21.92 dBm (RMS)
FCC-ID	XPYLISAU200	
IC	8595A-LISAU200	
Installed options	<input checked="" type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA/Canada) <input type="checkbox"/> W-LAN, Bluetooth <sup>®</sup> wireless technologies <input type="checkbox"/> battery charging option <input type="checkbox"/> GPS (not tested within this test report) <input type="checkbox"/> FM-Radio (Receiver only) <input type="checkbox"/> NFC (not tested within this test report)	
Power supply	<input checked="" type="checkbox"/> 3.8 V DC (nominal), 3.4 V DC (minimum) and 4.2 V DC (maximum)	
Lowest radio frequency signal	Master clock 26 MHz	
EUT sample type	<input checked="" type="checkbox"/> Pre-Production	
FCC label attached	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no	

### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	RF-Module	LISA-U260-01 (US variant)	IMEI: 354235050002 264	146AC0	22.60
EUT B	Adapter Board	LISA-U200 FAE	SN113	IP02_HW_CS_ 150000	--

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	Magnetic Mount Antenna	Taoglas GA.107	#1	--	--
AE 2	Amplus AC/DC Charger with additional ferrite on AC-line (AC 110V/60Hz, DC 12 V)	NTS 30W EuP 5-12, max 4000mA	# 1	--	--
AE 3	USB cable	Mini USB to USB	#1	1,8m	--
AE 4	Laptop	CTC #7	--	--	--

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
Set. 1	EUT A + EUT B + AE 1 + AE 2 + AE 3 + AE 4	Used only for radiated tests
Set. 2	EUT A + EUT B	Used only for conducted tests (power supply cables at EUT A for nominal voltage)

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

#### GSM modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	GSM 850 TCH mode TCH=128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 2	EGPRS 850 TCH mode TCH=128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8PSK modulation, slot 3 active, uplink gamma: 6 (27dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 3	GSM 1900 TCH mode TCH=512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 4	EGPRS 1900 TCH mode PCL=0 (max. power) TCH=512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8-PSK modulation, slot 3 active, uplink gamma: 5 (26 dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.

\*) EUT operating mode no. is used to simplify the test report.

#### FDD modes

op. 5	FDD-Mode 2 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 24dBm.
op. 6	FDD-Mode 5 12.2 kbps RMC	The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 7	FDD Mode 2 HSUPA	In addition to normal FDD-Mode, the UE was set to operate in HSDPA and HSUPA Mode too. Chosen settings: 12.2kbps RMC + HSPA 34.108
op. 8	FDD Mode 5 HSUPA	This setting was chosen for all release 6 mobile equipment.

\*) EUT operating mode no. is used to simplify the test report.

### 3.6. Parameter Settings on mobile phone and base station CMU200

Following settings apply to the MS during the measurements in **GSM/GPRS/(E)GPRS-Mode** only:

Parameter	Traffic Mode	Idle Mode
Traffic Channels mobile station (EUT)	GSM 850: TCH <sub>MS</sub> = 128/ 190 /251 GSM 1900: TCH <sub>MS</sub> = 512 / 661 / 810	--
maximum power level (PCL)	GSM 850: PCL = 5 (2 Watt) GSM 1900: PCL = 0 (1 Watt)	--
Modulation	GSM/GPRS: GMSK-Modulation Scheme EDGE: 8-PSK Modulation Scheme	--
DTX	off	--
Bitstream	PRBS 2E9-1 (pseudo-random-sequence) – CCITT 0.153	
Timeslot(s) in Uplink	3	
Hopping	off	
Timeslot (slot mode)	GSM-Mode: single GPRS-Mode: maximum allowed uplink slots no. according MS class	
MS slot class	Class 12	
Maximum data transmission rate, single time slot	GSM: 9,6 kbit/s Slot GPRS: 17,6 kbit/s Slot EDGE: 59,2 kBit/s Slot	
Speech transcoding (Traffic Mode)	Full rate Version 1	
Speed rate	130 Kb/s	
Mode	BCCH and TCH	
BCCH – base station (CMU,CMD)	GSM 850: 182 GSM 1900: 651	
TCH – base station (CMD, CMU)	auto	
Power level TCH – base station (used timeslot level)	- 70 dBm	
Power level BCCH – base station (control channel level)	- 80 dBm	
External attenuation RF/AF- Input/Output	Accord. calibration prior to measurements	
Mobile Country Code	310	310
Domain	PS or CS	
BS_AG_BLKS_RES	Not applicable	0
Paging reorganisation		Off (0)
Signalling channel		SDCCH
Location Update		Auto
Cell access		Disabled (barred)



Following settings apply to the UE (EUT) during the measurements in **FDD-Mode** only:

Parameter	Traffic Mode	Idle Mode
UARFCN UE Uplink (EUT) (according TS34.108)	FDD 2 = 9262/ 9400/ 9538 FDD 5 = 4132/ 4182/ 4233	--
UARFCN Node B (downlink) (according TS34.108)	FDD 2 = 9663/ 9800/ 9937 FDD 5 = 4358/ 4040/ 4457	
UE power class	Class 3 (+24dBm) nominal	
HSDPA UE category/ HSUPA category	8/6	
Maximum power	FDD 2/4/5 12.2kbps RMC -> all TPC bits up ("1") HSDPA-mode = accord. in 3GPP TS34.108 HSUPA mode = accord. in 3GPP TS34.108	--
Modulation	12.2kbps RMC-mode: (UL) QPSK-Modulation Scheme HSDPA/HSUPA= (UL) BPSK/QPSK, (DL) 16 QAM Modulation Scheme is applicable	--
Compression mode	Off	--
Bitstream	PRBS 2E9-1 (pseudo-random-sequence) – CCITT 0.153	
Maximum data transmission rate:	GSM: 17,6 kbps Slot EDGE: 59,2 kbps Slot FDD: QPSK 5,76 Mbps (UL) 16 QAM 14,4 Mbps (DL)	
Node B Downlink physical channels settings	According Table E.5.1/E.5.1A in 3GPP TS34.121	
External attenuation RF/AF- Input/Output	Accord. Set-up calibration prior to measurements	


## 4. Description of test system set-up's

### 4.1. Test system set-up for AC power-line conducted emission measurements

**Specification:** ANSI C63.4-2009 chapter 7, ANSI C63.10-2009 chapter 6.2

**General Description:** The radio frequency voltage conducted back into the AC power line in the frequency range 150 kHz to 30 MHz has to be investigated. Compliance should be tested by measuring the radio frequency voltage between each power line and ground at the power terminals in the stated frequency range. A 50 Ohm / 50 μH line impedance stabilization network (LISN) is used coupling the interface to the measurement equipment. The EUT power input leads are connected through the LISN to the AC-power source. The LISN enclosure is electrically connected to the ground plane. The measuring instrument is connected to the coaxial output of the LISN. Tabletop devices were set-up on a 80 cm height above reference ground plane, floor standing equipment 10 cm raised above ground plane. Measurements have been performed on each phase line and neutral line of the devices AC-power lines. The EUT was power supplied with 110 V/60 Hz. The EUT was tested in the defined operating mode and installed (connected) to accessory equipment according the general description of use given by the applicant.

**Schematic:**

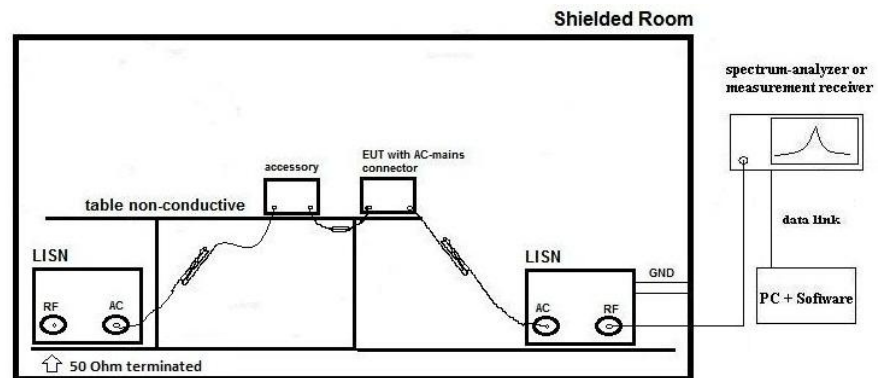

Only schematic view, we refer to figure 6, 7 and 8 of ANSI C63.4-2009 for more details.

**Testing method:** **Exploratory, preliminary measurements** as a first step, determines the worst-case phase line (neutral or phase) as well as the most critical operating mode of the equipment. A complete frequency-sweep with PK-Detector is performed on each current-carrying conductor.

**Final testing** for power phases and critical frequencies (Margin to AV- or QP limit lower than 3 dB) as a second step includes measurements with receivers detector set to Quasi-Peak and Average.

**Formula:**  $V_C = V_R + C_L$  (1)  
 $M = L_T - V_C$  (2)

$V_C$  = measured Voltage –corrected value  
 $V_R$  = Receiver reading  
 $C_L$  = Cable loss  
 $M$  = Margin  
 $L_T$  = Limit


Values are in dB, positive margin means value is below limit.

## 4.2. Test system set-up for conducted RF-measurement at antenna port

Specification: ANSI C63.10-2009

General Description: The EUT's RF-signal is first attenuated before it is connected to the spectrum – analyzer to avoid overload. The specific attenuation is determined prior to the measurement within a set-up calibration. The value is taken into account by correcting the measurement readings on the spectrum-analyzer either by a transducer factor (TDF) or an relative offset to reference level.

Schematic:

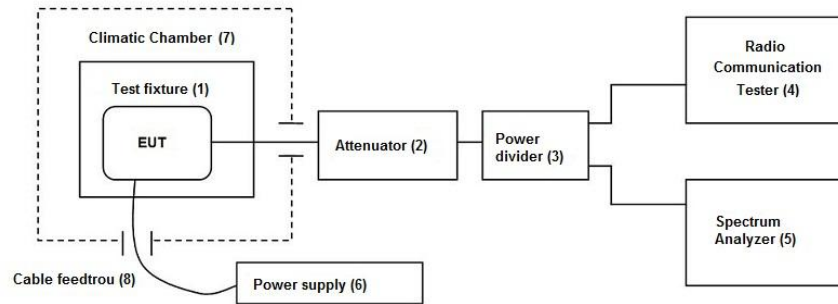

Testing method: According to ANSI C63.10-2009 for each individual test, see details in each chapter.


### 4.3. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.4-2009 chapter 8.2.1, ANSI C63.10-2009 chapter 6.4

**General Description:** Evaluating the radiated field emissions to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commissions.

**Schematic:**

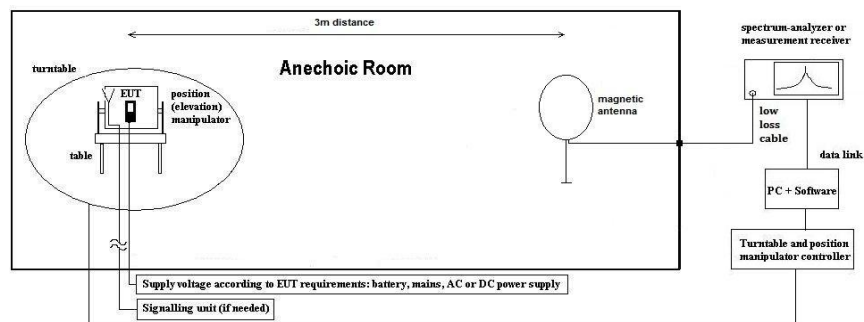

**Testing method:**

**Exploratory, preliminary measurement**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband loop antenna and software.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions.

The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT’s worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$G_A$  = Gain of pre-amplifier (if used)

$L_T$  = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**

Reference for applied correction (extrapolating) factors:

IEEE Transaction EMC, Vol. 47, No. 3, Aug. 2005, Journal Paper


“*Extrapolating Near-field emissions of low frequency loop transmitters*”.

#### 4.4. Test system set-up for radiated spurious emission measurements

**Specification:** ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.6

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-4 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 20 GHz and 1 meter above 20 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 20 GHz. From 20 GHz to 40 GHz a horn antenna is used. The antennas are set to fixed antenna height of 1.55 m and the EUT aligned within 3 dB cone of radiation pattern.

**Schematic:**

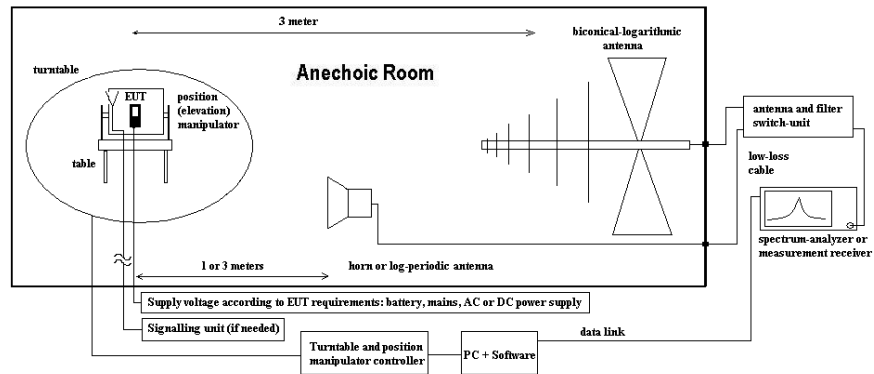

**Testing method:**

##### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

##### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height is fixed to 1.55 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{C_{E(I)RP}} = E_C - 95.2 \text{ dB}|_{3m}$$

$$M = L_T - E_{C_{E(I)RP}}$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

$E_{C_{E(I)RP}}$  = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. General Limit - Conducted emissions on AC-Power lines

#### 5.1.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter 2.2.1)	<input type="checkbox"/> Please see Chapter 2.2.2	<input type="checkbox"/> Please see Chapter 2.2.3
test site	<input type="checkbox"/> 333 EMI field	<input checked="" type="checkbox"/> 348 EMI cond.	
receiver	<input type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> 377 ESCS 30	<input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26
LISN	<input checked="" type="checkbox"/> 005 ESH2-Z5	<input type="checkbox"/> 007 ESH3-Z6	<input type="checkbox"/> 300 ESH3-Z5 & 50Ω used for AE <input type="checkbox"/> no LISN for AE
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input checked="" type="checkbox"/> 060 110 V 60 Hz via PAS 5000	

#### 5.1.2. Requirements (TX mode)

FCC	Part 15, Subpart C, §15.207		
IC	RSS-Gen., § 7.2.4		
ANSI	C63.10-2009		
Limit	Frequency [MHz]	QUASI-Peak [dBμV]	AVERAGE [dBμV]
	0.15 – 0.5	66 to 56*	56 to 46*
	0.5 – 5	56	46
	5 – 30	60	50
Remark: * decreases with the logarithm of the frequency			

#### 5.1.3. Test condition and test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding	<input type="checkbox"/> none	<input checked="" type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top (40 cm distance to reference ground plane (wall))	<input type="checkbox"/> floor standing	EUT stands isolated on reference ground plane (floor)
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%	
EMI-Receiver or Analyzer settings	Scan data	<input type="checkbox"/> 9 – 150 kHz, RBW = 200 Hz, Step = 61 Hz	<input checked="" type="checkbox"/> 150 kHz – 30 MHz, RBW = 9 kHz, Step = 4 kHz
	Scan-Mode	6 dB EMI-Receiver Mode	
	Pre-measurement Final measurement	Peak detector, Repetitive-Scan, max-hold, sweep-time 50 μs per frequency point Average & Quasi-peak detector at critical frequencies	
General measurement procedures	Please see chapter "Test system set-up for AC power line conducted emissions measurements"		

#### 5.1.4. Measurement results

The results are presented below in summary form only. For more information please see the diagrams.

#### TX-Mode

EUT Diagram No.	Type and S/N or operating mode no. or commend	set-up no.	set-up 1	Result
		Used Detector	Power line Additional (scan-) information or remarks	
1.01	5	<input checked="" type="checkbox"/> Peak (pre-scan) <input checked="" type="checkbox"/> CAV (final) <input checked="" type="checkbox"/> QP (final)	L1/ N -	passed
1.02	6	<input checked="" type="checkbox"/> Peak (pre-scan) <input checked="" type="checkbox"/> CAV (final) <input checked="" type="checkbox"/> QP (final)	L1/ N -	passed

## 5.2. RF Peak power output conducted

### 5.2.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input checked="" type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input type="checkbox"/> 456 EA 3013A	<input checked="" type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 331 HC 4055	<input checked="" type="checkbox"/> 248 6 dB Attenuator	<input type="checkbox"/> 529 Power divider
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		
	<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000		

### 5.7.2 Standards and References

FCC: §2.1046 (conducted)

- Maximum Power Output of the mobile phone should be determined while measured conducted.
- Limit GSM850/FDDV: 7 Watt = 38.45dBm (ERP)
- Limit GSM1900/FDDII: 2 Watt = 33.00 dBm (EIRP)
- PAR (PEAK-AVERAGE-RATIO) ≤ 13 dB

### 5.7.3 Test condition and measurement test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%

- See description in chapter “Test system set-up for conducted RF-measurement at antenna port”
- A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (0.3dB for attenuation of antenna connector)

#### Mobile phone settings

- according chapter 3.6

#### Base station setting

- according 3.6 chapter



**5.7.2 Results (conducted)**

	ARFCN	Frequency (MHz)	Burst Power (dBm)	Limit (dBm)	Result	
power_GSM_850_average	128	824.2	31.97	38.45	Passed	
	192	837.0	32.04		Passed	
	251	848.8	32.02		Passed	
power_GSM_850_peak	128	824.2	32.16		Passed	
	192	837.0	32.21		Passed	
	251	848.8	32.17		Passed	
power_EGPRS_850_average	128	824.2	26.43		Passed	
	192	837.0	26.53		Passed	
	251	848.8	26.51		Passed	
power_EGPRS_850_peak	128	824.2	29.30		Passed	
	192	837.0	29.48		Passed	
	251	848.8	29.44		Passed	
power_GSM_1900_average	512	1850.2	28.93		33.00	Passed
	661	1880.0	28.78			Passed
	810	1909.8	28.73			Passed
power_GSM_1900_peak	512	1850.2	29.15	Passed		
	661	1880.0	29.01	Passed		
	810	1909.8	28.92	Passed		
power_EGPRS_1900_average	512	1850.2	25.26	Passed		
	661	1880.0	25.17	Passed		
	810	1909.8	25.06	Passed		
power_EGPRS_1900_peak	512	1850.2	28.24	Passed		
	661	1880.0	28.11	Passed		
	810	1909.8	27.97	Passed		

	U-ARFCN	Frequency (MHz)	RMC	Limit (dBm)	Result
			Power RMS (dBm)		
power_FDD_2	9262	1852.4	22.36	33.00	Passed
	9400	1880.0	22.17		Passed
	9538	1907.6	22.28		Passed
power_FDD_5	4132	826.4	22.45	38.45	Passed
	4182	836.4	22.41		Passed
	4233	846.6	22.34		Passed

	U-ARFCN	Frequency (MHz)	HSUPA	Limit (dBm)	Result
			Power RMS (dBm)		
power_FDD_2	9262	1852.4	21.84	33.00	Passed
	9400	1880.0	21.36		Passed
	9538	1907.6	21.41		Passed
power_FDD_5	4132	826.4	21.92	38.45	Passed
	4182	836.4	21.80		Passed
	4233	846.6	21.74		Passed

### 5.3. RF-Parameter - RF Peak power output radiated

#### 5.3.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab. <input checked="" type="checkbox"/> 443 FAR
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170 <input checked="" type="checkbox"/> 608 HL 562 <input checked="" type="checkbox"/> 549 HL025 <input type="checkbox"/> 477 GPS
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 546 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL <input type="checkbox"/> 482 Filter Matrix <input type="checkbox"/> 378 RadiSense
DC power	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050 <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE 40
otherwise	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/> 248 6 dB Att.	<input type="checkbox"/> 529 Power div. <input type="checkbox"/> - cable OTA20
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains <input checked="" type="checkbox"/> 060 110 V 60 Hz via PAS 5000		

#### 5.3.2. Requirements

<b>FCC</b>	§2.1046 (radiated), §22.913(a)(2), § 24.232(c)
<b>IC</b>	RSS-132:4.4 + SRSP 503:5.1.3 for GSM 850; RSS-133:4.1/6.4 + SRSP-510:5.1.2 for GSM 1900
<b>Limit</b>	Maximum Power Output of the mobile phone should be determined while measured radiated E(IRP).
	Limits GSM850/ FDD 5: 7 Watt = 38.45 dBm (ERP)
	Limit GSM1900/ FDD 2: 2 Watt = 33.00 dBm (EIRP)

#### 5.3.3. Test condition and measurement test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link <input type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%

##### 5.3.3.1. Test method

The measurements were made at the upper, center, and lower carrier traffic frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.

The measurements were performed by using the **substitution method** (ANSI/TIA/EIA 603) with a spectrum-analyzer. This method can be described like follows:

1. choosing of suitable spectrum-analyzer settings for performing the measurements. This settings of the spectrum analyzer must be maintained for both stages of the measurements: EUT emission measurements and also for measurements of the substituted level.

Parameter	Setting for GSM measurements	Settings for UTRA/FDD measurements
RBW <sub>3dB</sub>	3 MHz	10 MHz
VBW	10 MHz	10 MHz
Span	20 MHz	50 MHz
Detector Mode	Positive max-hold	Positive max-hold
Average	off	off
Sweep Time	coupled	coupled

2. The maximum level of the peak power was recorded, while the emissions were maximized by rotating the EUT in three orthogonal axes, which was situated on a non-conductive turntable of 1.55 m height ( $P_{MEAS,1}$ ). This was performed for both measuring antenna polarisations (vertical/horizontal), the maximum of both values is used for further measurements and final substitution ( $P_{MEAS,1,MAX}$ ).
3. As the maximum emission is recorded, the EUT is replaced by a frequency dependant suitable antenna, which is connected to a RF-signal generator, which is transmitting on the determined worst-case frequency as determined in step 2.
4. The RF-signal level of the signal generator is adjusted as long the same worst-case level determined first step is measured at the spectrum analyzer ( $P_{SMHU}=P_{MEAS,1,MAX}$ )
5. Than the RF-signal cable is disconnected from the antenna and connected to a power-level meter. The level is determined ( $P_{MEAS,2}$ ).
6. The final result is calculated by adding the ERP/EIRP gain of the antenna which substitutes the EUT.  

$$P_{EUT,SUBST} = P_{MEAS,2} + G_{ANTENNA}$$

### 5.3.4. Measurement Results

**General remarks:** PAR (PEAK-AVERAGE-RATIO) ≤ 13 dB (Please refer chapter 5.7.2)

#### 5.3.4.1. GSM 850 results (radiated)

Set-up 1 & op. modes 1 & 2			Peak Output Power [dBm]		Limit	Result
Test case	Diagram no.	ARFCN no./ Frequency	PK			
GSM 850	8.13_G850_ERP	128/ 824.2MHz	26.1	ERP-Value	38.45 dBm	passed
	8.14_G850_ERP	190/ 836.6 MHz	27.8			
	8.15_G850_ERP	251/ 848.8 MHz	<b>29.1</b>			
E-GPRS 850	8.16_EDGE_ERP	128/ 824.2 MHz	<b>27.7</b>			passed
	8.17_EDGE_ERP	190/ 836.6 MHz	26.7			
	8.18_EDGE_ERP	251/ 848.8 MHz	27.4			

#### 5.3.4.2. GSM 1900 results (radiated)

Set-up 1 / op. modes 3 & 4			Peak Output Power [dBm]		Limit	Result
Test case	Diagram no.	ARFCN no./ Frequency	PK			
GSM 1900	8.07_1900_EIRP	512/ 1850.2 MHz	<b>27.3</b>	EIRP-Value	33.00 dBm	passed
	8.08_1900_EIRP	661/ 1880.0 MHz	27.1			
	8.09_1900_EIRP	810/ 1909.8 MHz	27.2			
E-GPRS 1900	8.10_EIRP_EDGE	512/ 1850.2 MHz	<b>26.0</b>			passed
	8.11_EIRP_EDGE	661/ 1880.0 MHz	24.4			
	8.12_EIRP_EDGE	810/ 1909.8 MHz	22.9			

#### 5.3.4.2.1. FDD2 (radiated)

Set-up 1 / op. modes 5			Power[dBm]		Limit	Result
Test case	Diagram no.	U-ARFCN no.	PK			
Release 99, 12.2kbps RMC	8.01_FDDII_EIRP	9262	27.3	EIRP-Value	33.00 dBm	Passed
	8.02_FDDII_EIRP	9400	27.0			
	8.03_FDDII_EIRP	9538	25.8			

#### 5.3.4.2.2. FDD 5 (radiated)

Set-up 1 / op. modes 6			Power[dBm]		Limit	Result
Test case	Diagram no.	U-ARFCN no.	PK			
Release 99, 12.2kbps RMC	8.04_FDDV_ERP	9262	23.3	ERP-Value	38.45 dBm	Passed
	8.05_FDDV_ERP	9400	22.0			
	8.06_FDDV_ERP	9538	21.6			

### 5.4. Radiated field strength emissions below 30 MHz

#### 5.4.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input checked="" type="checkbox"/> 001 ESS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input checked="" type="checkbox"/> 060 110 V 60 Hz via PAS 5000	<input type="checkbox"/> 289 CBL 6141
			<input checked="" type="checkbox"/> 030 HFH-Z2
			<input type="checkbox"/> 477 GPS
			<input type="checkbox"/> 482 Filter Matrix
			<input type="checkbox"/> 378 RadiSense
			<input type="checkbox"/> 494 AG6632A
			<input type="checkbox"/> 498 NGPE 40

#### 5.4.2. Standards and Limits: CFR 47, §15.205, §15.209, RSS-Gen

Frequency [MHz]	Field strength		Measurement distance [meters]	Remarks
	[µV/m]	[dBµV/m]		
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3m
0.490 – 1.705	24000/f (kHz)	87.6 – 20 Log(f) (kHz)	30	Correction factor used due to measurement distance of 3m
1.705 – 30	30	29.54	30	Correction factor used due to measurement distance of 3m

Remark: \* decreases with the logarithm of the frequency

#### 5.4.3. Test condition and measurement test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
EMI-Receiver (Analyzer) Settings	Span/Range: 9 kHz to 150 kHz; 150 kHz to 30 MHz RBW/VBW: 200Hz/auto; 10 kHz/ auto (ANSI63.10/CISPR#16) Detector/ Mode: PEAK, TRACE max-hold mode, repetitive scan for exploratory measurements Quasi-Peak, for final measurement on critical frequencies (f<1GHz)		

#### 5.4.4. Description of Set-up

- The Test setup is describe in chapter “Test system set-up for radiated magnetic field measurements below 30 MHz“

**5.4.5 GSM/EDGE Measurement Results**

Due to uncritical measurements between GSM and EDGE (only noise floor) only channels with highest ERP and EIRP value selected for the tests. The other channels were not selected, because RF module LISA U260-01 is based on module of certified LISA U200-01.

**G850**

Set-up No.		1								
Operating Mode		1 & 2								
Diagram no.	Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. height (cm)	Polarity	Turntable position (deg)	Corr. (dB) (C <sub>F</sub> )	Margin (dB) (M)	Limit (dBμV/m) (L <sub>T</sub> )
2.01_CS_H & 2.01_PS_L  (high & low channel)	0.009 to 0.150	<-58	10	0.2	100	--	0°...360°	300 to 3m	>20	See diagram
	0.150 to 0.5	≤ -20		10				300 to 3m	>20	
	0.5 to 30	≤ 17.9		10				300 to 3m 30 to 3m	11.64	29.54

Remark: Selected worst-case measurement to the closest limit, here EDGE mode. Please see the other measured channels as diagrams at the annex.

**PCS1900**

Set-up No.		1								
Operating Mode		4								
Diagram no.	Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. height (cm)	Polarity	Turntable position (deg)	Corr. (dB) (C <sub>F</sub> )	Margin (dB) (M)	Limit (dBμV/m) (L <sub>T</sub> )
2.02_CS_L & 2.02_PS_L  (low & low channel)	0.009 to 0.150	<-58	10	0.2	100	--	0°...360°	300 to 3m	>20	See diagram
	0.150 to 0.5	≤ -19		10				300 to 3m	>20	
	0.5 to 30	≤ 18.0		10				300 to 3m 30 to 3m	11.54	29.54

Remark: Selected worst-case measurement to the closest limit, here GSM mode. Please see the other measured channels as diagrams at the annex.

**5.4.6 Verdict:** Summary of GSM/EDGE measurement results for radiated frequencies below 30 MHz - Passed

### 5.4.5 FDD Measurement Results

#### FDD II

Set-up No.		1								
Operating Mode		5								
Diagram no.	Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. height (cm)	Polarity	Turntable position (deg)	Corr. (dB) (C <sub>F</sub> )	Margin (dB) (M)	Limit (dBμV/m) (L <sub>T</sub> )
2.07 (mid. ch.)	Same settings (see below)	See diagram	10	Same settings (see below)	100	--	0°..360°	Same settings (see below)	See diagram	
2.08 (high ch.)										
2.06 (low channel)	0.009 to 0.150	<-58	10	0.2	100	--	0°..360°	300 to 3m	>20	See diagram
	0.150 to 0.5	≤ -15		10				300 to 3m	>20	
	0.5 to 30	≤ 17		10				300 to 3m 30 to 3m	12.54	29.54

Remark: Selected worst-case measurement to the closest limit of E-GPRS mode. Please see the other measured channels as diagrams at the next chapter.

#### FDD V

Set-up No.		1								
Operating Mode		6								
Diagram no.	Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. height (cm)	Polarity	Turntable position (deg)	Corr. (dB) (C <sub>F</sub> )	Margin (dB) (M)	Limit (dBμV/m) (L <sub>T</sub> )
2.03 (low ch.)	Same settings (see below)	See diagram	10	Same settings (see below)	100	--	0°..360°	Same settings (see below)	See diagram	
2.04 (mid. ch.)										
2.05 (high channel)	0.009 to 0.150	<-58	10	0.2	100	--	0°..360°	300 to 3m	>20	See diagram
	0.150 to 0.5	≤ -20		10				300 to 3m	>20	
	0.5 to 30	≤ 16.3		10				300 to 3m 30 to 3m	13.24	32.5

Remark: Selected worst-case measurement to the closest limit of E-GPRS mode. Please see the other measured channels as diagrams at the next chapter.

### 5.4.6 Verdict: Summary of all EDGE measurement results for radiated frequencies below 30 MHz - Passed

## 5.5. Conducted out of Band RF emissions and Block Edge

### 5.5.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 337 OATS
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> 489 ESU
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 547 CMU
power supply	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input checked="" type="checkbox"/> 529 6dB divider	<input checked="" type="checkbox"/> 530 10dB Att.	<input type="checkbox"/> 110 USB LWL
line voltage	<input type="checkbox"/> 110 V 60 Hz via public mains	<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000	<input type="checkbox"/> 347 Radio.lab.
			<input type="checkbox"/> 443 FAR
			<input type="checkbox"/> 477 GPS
			<input type="checkbox"/> 268 EA- 3050
			<input type="checkbox"/> 494 AG6632A
			<input checked="" type="checkbox"/> 498 NGPE 40
			<input type="checkbox"/> 482 Filter Matrix
			<input type="checkbox"/> 431 Near field

### 5.5.2 References

FCC: §2.1053(a)-conducted, §2.1057, §22.917(a)(b); §24.238(a)(b)

IC: RSS-132: 4.5.1&4.5.2, RSS-133: 6.5.1(a)(b)

„the power of emissions shall be attenuated below the transmitter output power (p) by at least least 43+10Log(P) dB“

### 5.5.3 Test condition and measurement test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link (radiated)	<input checked="" type="checkbox"/> cable connection (conducted)	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%

### 5.5.4 Frequency range

The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the block-edge where a AVERAGE detector applied.

“The specification that all emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range of the mobile phone (1 to 0.001 W) to a constant limit of -13 dBm.”

“§ 2.1057 Frequency spectrum to be investigated. (a) In all of the measurements set forth in §§ 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz”

### 5.5.5 Description of Set-up

- see conducted set-up in chapter 4.2

### 5.5.6 Settings on Mobile Phone

The measurements were made at the upper, middle, and lower carrier frequencies of the operating band. Choosing three representative TX-carrier frequencies of the mobile phone within each operable GSM band, should be sufficient to demonstrate compliance with the emissions limits outside and adjacent to the frequency blocks.

A call was established with settings according chapter 3.6

**5.5.8 Settings of Spectrum-Analyser**

Frequency range	RBW (resolution bandwidth)	VBW (video bandwidth)
<b>BLOCK-EDGE compliance:</b> 1 MHz immediately adjacent to the frequency blocks	1% from applicants stated/measured emission bandwidth	3..10 times the RBW
More than 1 MHz outside and adjacent the frequency blocks	1kHz or 100kHz to measurement frequencies up to 1MHz 1 MHz for measurement frequency range 1MHz to maximum 10-times TX-frequency	3..10 times the RBW

**5.5.8.1 Settings for FDDV Mode**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	1	0.001	0.01	10	25	MaxH-PK
Sweep 1 (subrange 2)	1	30	0.1	1	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	1000	0.1	1	10	35	MaxH-PK
Sweep 2 (subrange 2)	1000	2500	1	1	15	35	MaxH-PK
Sweep 2 (subrange 3)	2500	9000	1	1	60	35	MaxH-PK
Sweep 3a (Block-Edge)	823	824	0.03	0.1	30	35	MaxH-PK
Sweep 3b (Block-Edge)	823	824	0.03	0.1	30	35	MaxH-AV
Sweep 4a (Block-Edge)	850	851	0.03	0.1	30	35	MaxH-PK
Sweep 4b (Block-Edge)	850	851	0.03	0.1	30	35	MaxH-AV



**5.5.8.2 Settings for FDD II Mode**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	1	0.001	0.01	10	25	MaxH-PK
Sweep 1 (subrange 2)	1	30	0.1	1	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	1000	0.1	1	10	35	MaxH-PK
Sweep 2 (subrange 2)	1000	2500	1	1	15	35	MaxH-PK
Sweep 2 (subrange 3)	2500	19500	1	1	160	35	MaxH-PK
Sweep 3a (Block-Edge)	1849	1850	0.03	0.1	30	35	MaxH-PK
Sweep 3b (Block-Edge)	1849	1850	0.03	0.1	30	35	MaxH-AV
Sweep 4a (Block-Edge)	1910	1911	0.03	0.1	30	35	MaxH-PK
Sweep 4b (Block-Edge)	1910	1911	0.03	0.1	30	35	MaxH-AV

**Remarks:** Due to not available exact 1% RBW of the measurement equipment, the lower available RBW was used for the FDD measurements.

An additional correction factor of 10 Log (RBW1/ RBW2) to the result was added. RBW1 is the narrower measurement resolution bandwidth (used RBW) and RBW2 is either the 1% emissions bandwidth or 1 MHz (**KDB890810**).

**Formula:** Block-Edge compliance correction factor for FDD bands

$10\log(50 \text{ kHz}/30 \text{ KHz})$ to be used= 2.22 dB
---

**5.5.2. Results (conducted)**

Only worst-case level from the measurements are selected in the below-mentioned tables. Please refer at the annex ‘measurement diagrams’ for more details at all diagrams.

**5.5.3. FDD II TCH : Op. Mode 5, Set-up 2**

Transmitting channels/ frequencies: TX = 9262/ 1852.4 MHz, 9400/ 1880 MHz, 9538/ 1907.6 MHz							
Sweep no.	Diagram numbers	Frequency of emission [MHz]	Worst-Peak level [dBm]	Frequency of worst-peak level [GHz]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1	12.01-12.03	0.009 to 30	--	--	<-50	-13	Passed
Sweep 2	12.04-12.06	30 to 20000	--	--	<-29.1		Passed
Sweep 3 & 4 <sup>1.)</sup>	12.07-12.08	1910.19	-16.7+2.22=-14.48	--	--		Passed

Remark: 1.) Block-Edge compliance incl. formula

**5.5.4. FDD V TCH : Op. Mode 6, Set-up 2**

Transmitting channels/ frequencies: TX = 4132/ 826.4 MHz, 4182/ 836.4 MHz, 4233/ 846.6 MHz							
Sweep no.	Diagram numbers	Frequency of emission [MHz]	Worst-Peak level [dBm]	Frequency of worst-peak level [GHz]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1	12.11-12.13	0.009 to 30	--	--	<-50.4	-13	Passed
Sweep 2	12.14-12.16	30 to 9000	--	--	<-32.8		Passed
Sweep 3 & 4 <sup>1.)</sup>	12.17-12.18	823-824/ 849-850	-21.1+2.22=-18.88	--	--		Passed

Remark: 1.) Block-Edge compliance incl. formula

## 5.6. RF-Parameter - Radiated out of Band RF emissions and Band Edge

### 5.6.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK
antenna	<input checked="" type="checkbox"/> 608 HL 562	<input checked="" type="checkbox"/> 549 HL 025	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55
signaling	<input type="checkbox"/> 392 MT8820A	<input checked="" type="checkbox"/> 546 CMU	<input type="checkbox"/> 547 CMU
power supply	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 529 6dB divider	<input type="checkbox"/> 530 6dB Att.	<input type="checkbox"/> 110 USB LWL
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input checked="" type="checkbox"/> 060 110 V 60 Hz via PAS 5000	<input type="checkbox"/> 268 EA- 3050
			<input type="checkbox"/> 494 AG6632A
			<input type="checkbox"/> 498 NGPE 40
			<input type="checkbox"/> 431 Near field

### 5.6.2. Requirements/Limits

FCC	<input checked="" type="checkbox"/> Part 2.1053(a), Part2.1057 <input type="checkbox"/> Part 15 Subpart C, §15.209 @ frequencies defined in §15.205 <input checked="" type="checkbox"/> Part 22 Subpart H, §22.917(a)(b) <input checked="" type="checkbox"/> Part 24 Subpart E, §24.238(a)(b)	
IC	<input checked="" type="checkbox"/> RSS-132, Issue 2: 4.5.1.1, <input checked="" type="checkbox"/> RSS-133, Issue 5: 6.5.1(a)(b)	
Limit	Frequency [MHz]	Radiated emissions limits, 3 meters
	30 – 20000	Peak [dBm]
		-13

### 5.6.3. Test condition and measurement test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply
Equipment set up	<input checked="" type="checkbox"/> table top	<input type="checkbox"/> floor standing
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter “Test system set-up for spurious emission measurement”	
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the block-edge where a AVERAGE detector applied. Below described settings for spectrum-analyzer applies.	
Mobile phone settings	<p>A call was established with settings according chapter “Parameter settings on mobile phone and base station CMU200”</p> <p>The UE and used accessories (if any used) were set to work according their intended use/specification stated as by the applicant</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.</p>	

#### 5.6.3.1. Spectrum-Analyzer settings for GSM/GPRS/E-GPRS 850 Mode/ FDD V Mode

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 2 (subrange 2)	1000	2800	1	1	15	10	MaxH-PK
Sweep 3 (subrange 3)	2800	9000	1	1	60	10	MaxH-PK
Sweep 4a (Block-Edge)	823	824	0.003(GSM)	0.01	30	10	MaxH-PK
Sweep 4b (Block-Edge)	849	850	0.03 (FDD)	0.1	30	10	MaxH-PK

**5.6.3.2. Spectrum-analyzer settings for GSM/GPRS/E-GPRS 1900 Mode/ FDD II Mode**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 2 (subrange 2)	1000	2800	1	1	15	10	MaxH-PK
Sweep 3 (subrange 3)	2800	20000	1	1	160	10	MaxH-PK
Sweep 4a (Band-Edge)	1849	1850	0.003(GSM)	0.01	30	10	MaxH-PK
Sweep 4b (Band-Edge)	1910	1911	0.03 (FDD)	0.1	30	10	MaxH-AV

Due to not available exact 1% RBW of the measurement equipment, the lower available RBW was used for these measurements.

An additional correction factor of 10 Log (RBW1/ RBW2) to the result was added to RBW1 is the narrower measurement resolution bandwidth (used RBW) and RBW2 is either the 1% emissions bandwidth or 1 MHz.

**Formula:** Band-Edge compliance correction factor for FDD bands -> 10log(50kHz/30kHz) to be used=2.22dB

**5.6.4. Results spurious emissions radiated**

Generally only measured level will be notify here which has a margin to limit below 3 dB otherwise see the results at annex 1.

Due to uncritical measurements of GSM and EDGE modes selected only the highest ERP and EIRP value of the below-mentioned tables.

**5.6.4.1. G850**

Diagram no.	Carrier Channel	Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
						PK	AV	QP	
8.15_G850_RSE_H	High	30 – 9000 MHz	1	1	Uplink carrier of GSM band on diagrams	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.16_G850_EDGE_RSE_L	Low			2		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.13 & 8.15_BE	Low & High	823-824/ 849-850		1	Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.16 & 8.18_BE	Low & High			2		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

**5.6.4.2. PCS 1900**

Diagram no.	Carrier Channel	Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
						PK	AV	QP	
8.07_1900_RSE_L	Low	30 MHz – 20 GHz	1	3	Uplink carrier of GSM band on diagrams	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.10_1900_EDGE_RSE_L	Low			4		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.07 & 8.09_BE	Low & High	1849 – 1850 MHz/ 1910 – 1911 MHz		3	Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.10 & 8.12_BE	Low & High			4		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

**5.6.4.3. FDD II**

Diagram no.	Carrier Channel	Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
						PK	AV	QP	
8.01_FDDII_RSE_RMC_L	Low	30 MHz – 20 GHz	1	5	Uplink carrier of FDD band on diagrams	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.02_FDDII_RSE_RMC_M	Middle					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.03_FDDII_RSE_RMC_H	High	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.01_BE_L	Low	1849 – 1850 MHz/ 1910 – 1911 MHz			Band Edge Compliance Calculated level: -23.21+ 2.22= -20.99 dBm	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.03_BE_H	High				Band Edge Compliance Calculated level: -23.62+ 2.22= -21.40				

Remark: Band-Edge compliance incl. formula

**5.6.4.4. FDD V**

Diagram no.	Carrier Channel	Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
						PK	AV	QP	
8.04_FDDV_RSE_RMC_L	Low	30 MHz – 9 GHz	1	6	Uplink carrier of FDD band on diagrams	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.05_FDDV_RSE_RMC_M	Middle					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.06_FDDII_RSE_RMC_H	High	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.04_BE_L	Low	823-824/ 849-850			Band Edge Compliance Calculated level: -32.5+ 2.22= -30.28	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.06_BE_H	High				Band Edge Compliance Calculated level: -30.8 + 2.22= -28.58				

Remark: Band-Edge compliance incl. formula

## 5.7. Occupied and emission bandwidth

### 5.7.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 337 OATS <input checked="" type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> 489 ESU <input type="checkbox"/>
signaling	<input checked="" type="checkbox"/> 547 CMU		
otherwise	<input checked="" type="checkbox"/> 530 10dB Attenuator		<input checked="" type="checkbox"/> cable K15

### 5.7.2. References of occupied and emission bandwidth

FCC: §2.202, §2.1049, §22.917(a), §24.238(a), §27.53(h)

IC: RSS-Gen: 4.6.1

„the **occupied bandwidth** is the frequency bandwidth, such that, below it lower and above it upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated”

### 5.7.3. Test Set-up

- see conducted measurement set-up described in 4.2

### 5.7.4. Mobile phone settings

- Provisions with the requirements is based on the fact, that GSM modulation scheme is GMSK Modulation for GSM equipment with a maximum data transmission rate of 17,6 kBit/s per Slot.
- Provisions with the requirements is based on the fact, that EDGE modulation scheme is 8-PSK Modulation for EDGE equipment with a maximum data transmission rate of 69,2 kBit/s per Slot.
- Provisions with the requirements is based on the fact, that FDD modulation scheme is QPSK Modulation for FDD equipment with a maximum data transmission rate of 12,2 kBit/s per Slot.
- a call was established with settings according chapter 3.6

### 5.7.5. Settings of the Spectrum-Analyser

Frequency range	RBW (resolution bandwidth)	VBW (video bandwidth)
1 MHz around carrier frequency	1% from applicants stated/measured emission bandwidth	3..10 times the RBW

### 5.7.6. Test method

The measurements were made at the upper, middle and lower carrier traffic frequencies of the operating band. Choosing three TX-carrier frequencies of the mobile phone within each operable GSM band, should be sufficient to demonstrate compliance

Additionally the emission bandwidth (-26 dBc bandwidth) was recorded for all three channels. The results were taken in order to determine according the §24.238 the measurement resolution bandwidth, which should be approximately 1% of the emission bandwidth.

### 5.7.7. Results

#### Set-up 2, Op-Mode 2

Channel/ Frequency (MHz)	Occupied 99% bandwidth [kHz]	Emission bandwidth [kHz]
EDGE 850	Channel 128/ 824.2 MHz	246.79
	Channel 192/ 837.0 MHz	<b>248.39</b>
	Channel 251/ 848.8 MHz	246.79
		309.29
		<b>315.70</b>
		312.50

Remarks: See diagrams at annex 1.

#### Set-up 2, Op-Mode 4

Channel/ Frequency (MHz)	Occupied 99% bandwidth [kHz]	Emission bandwidth [kHz]
EDGE 1900	Channel 512/ 1850.2 MHz	251.60
	Channel 661/ 1880.0 MHz	251.60
	Channel 810/ 1909.8 MHz	<b>256.41</b>
		314.10
		310.89
		312.50

Remarks: See diagrams at annex 1.

Set-up 2, Op-Mode 5

Channel/ Frequency (MHz)		Occupied 99% bandwidth [MHz]	Emission bandwidth [MHz]
FDD II	Channel 9262	<b>4.072</b>	<b>4.599</b>
	Channel 9400	4.060	4.588
	Channel 9538	4.060	<b>4.599</b>

Remarks: See diagrams at annex 1.

Set-up 2, Op-Mode 6

Channel/ Frequency (MHz)		Occupied 99% bandwidth [MHz]	Emission bandwidth [MHz]
FDD V	Channel 4132	4.049	<b>4.59</b>
	Channel 4183	<b>4.060</b>	4.58
	Channel 4233	<b>4.060</b>	4.57

Remarks: See diagrams at annex 1.

**5.7.8. Verdict:** Passed

## 5.8. Frequency stability on temperature and voltage variations

### 5.8.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
Climatic test chamber	<input checked="" type="checkbox"/> 331 HC 4055		
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000	

### 5.8.2. Standards and References:

FCC: §2.1055(a)(2), §22.355, §24.235

IC: RSS-GEN issue 3: 7.2.6, RSS-132: 4.3, RSS-133: 6.3

#### §22.355 Table C-1;

*“The frequency stability shall be sufficient to ensure that the fundamental emission stays within  $\pm 2.5$  ppm in Hz of frequency block”*

#### § 24.235:

*The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation*

### 5.8.3. Test condition and measurement test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%

### 5.8.4. Limit

As the limit is not specified in detail for FDD Band II/IV, it was fixed to an limit according 3GPP34.121 ( $0.1 \times f \times 10^{-6}$ ) Hz (0.1ppm), where f the frequency [Hz] of the transmitting equipment

### 5.8.5. Test Set-up

In order to maintain the voltage constant over the time period of the tests, a dummy battery was connected to a laboratory power supply. The power supply voltage was controlled on the input of the power supply terminals of the EUT.

A conducted measurement test set-up described in chapter “Test system set-up for conducted RF-measurement at antenna port”.

### 5.8.6. Mobile phone settings

The measurements were made at the upper, middle, and lower carrier frequencies of the operating band. Choosing three representative TX-carrier frequencies of the mobile phone within each operable GSM band, should be sufficient to demonstrate compliance.

A call was established with settings according chapter 3.6

### 5.8.7. Test method

The RF Channel spacing is 200 kHz, with a guard band of 200 kHz of each band of the sub-bands. The aim of the EUT is to function under all extreme conditions within authorized sub-bands in regard to temperature and voltage variations. The frequency deviation was recorded with base station’s build in capability. (CMU)

As the standard requires that the fundamental emissions stays within the authorized band, a limit of 2.5 ppm for G850/FDDV and 0.1ppm for 1900/FDDII/FDDIV bands is considered low enough to ensure this.



**5.8.8. Frequency shift of carrier against a voltage range at constant nominal temperature of 20° Celsius**


- 1.) determine the carrier frequency for the middle channel at room temperature and nominal voltage [20°C]
- 2.) The voltage was reduced in 0.1V steps to the lower end point, where the mobile phone stops working. (this shall be specified by the manufacturer) Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self heating effects.
- 3.) The voltage was increased in 0.1V steps to the upper declared voltage of the battery. Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self heating effects.

**5.8.9.Results**

The GSM mode not tested, because RF module LISA U260-01 based on parent module of certified LISA U200-01 and therefore already tested.


**5.8.10. FDD V Mode: Op. Mode 6, set-up 2**

Voltage [V]	Nominal Frequency [Hz]	Maximum frequency error		Verdict
		[Hz]	[ppm]	
3.30	836600000	-39	-0.047	Passed
3.40		-41	-0.049	
3.50		-40	-0.048	
3.60		-42	-0.050	
3.70		-43	-0.051	
3.80		-42	-0.050	
3.90		-41	-0.049	
4.00		-42	-0.050	
4.10		-40	-0.048	
4.20		-41	-0.049	
4.30		-40	-0.048	
4.40		-41	-0.049	

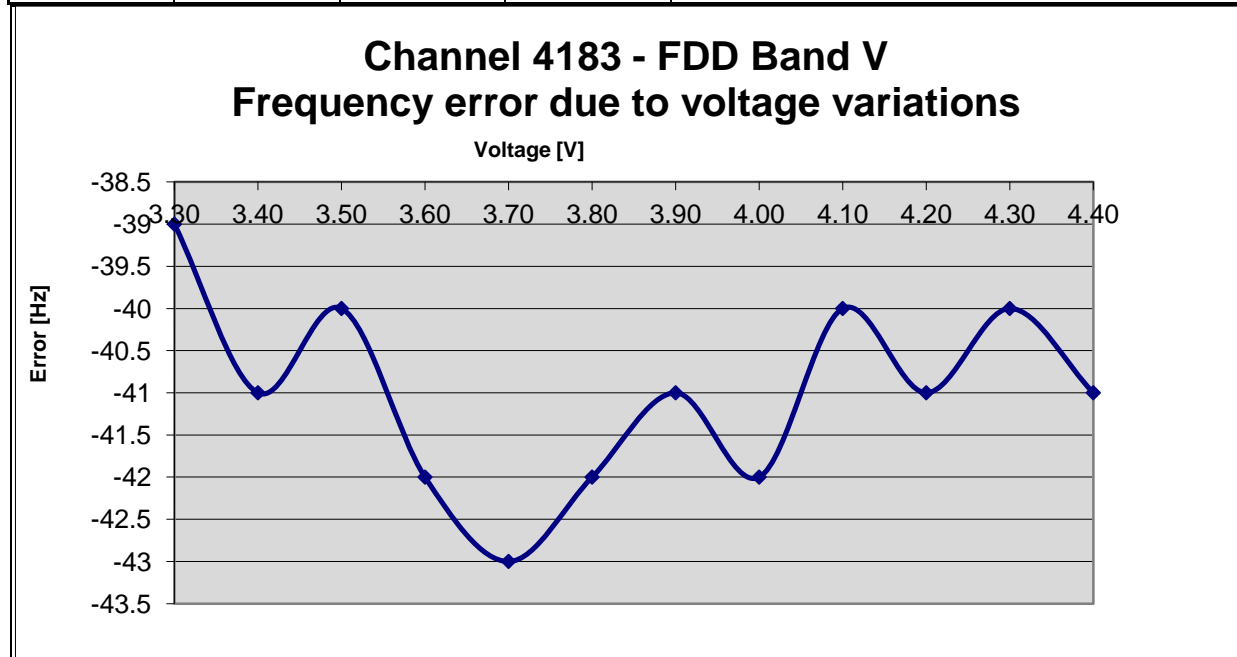

**5.8.11. FDD II Mode: Op. Mode 5, set-up 2**

Voltage [V]	Nominal Frequency [Hz]	Maximum frequency error		Verdict
		[Hz]	[ppm]	
3.30	1880000000	-17	-0.009	Passed
3.40		-14	-0.007	
3.50		-16	-0.009	
3.60		-14	-0.007	
3.70		-15	-0.008	
3.80		-45	-0.024	
3.90		-15	-0.008	
4.00		-15	-0.008	
4.10		-16	-0.009	
4.20		-13	-0.007	
4.30		-14	-0.007	
4.40		-15	-0.008	

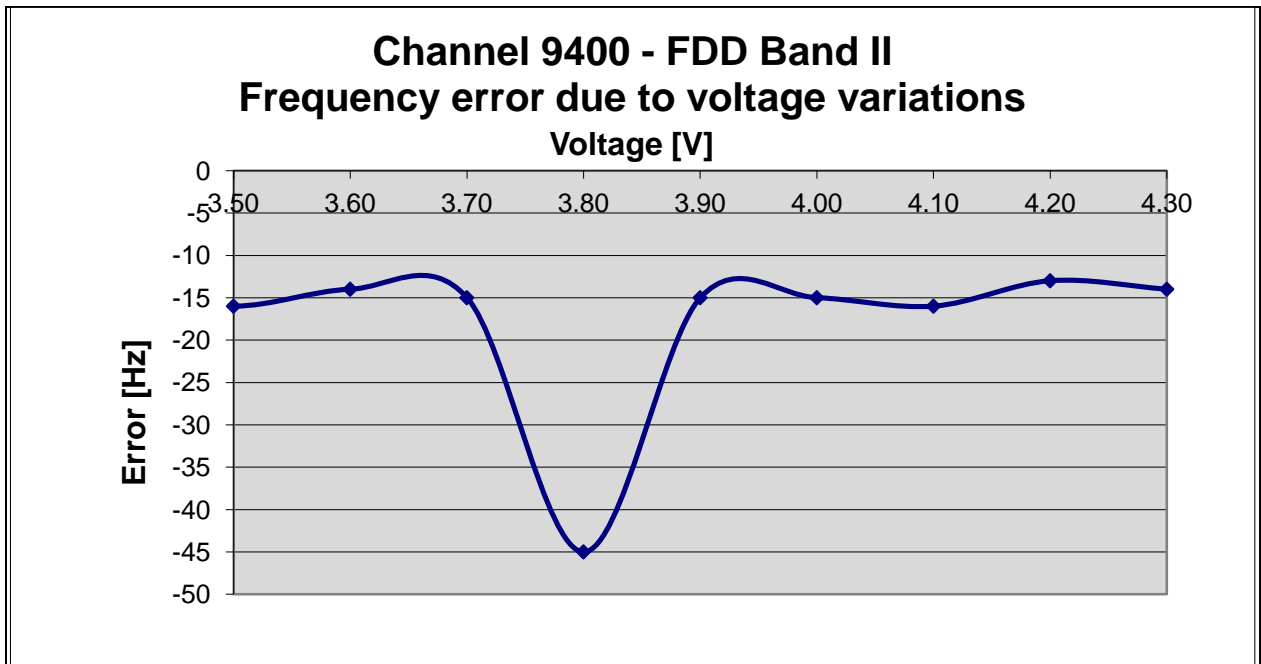


**5.8.12. Frequency shift of carrier against temperature at constant power supply voltage**

- 1.) determine the carrier frequency for the lowest, middle and highest channel at room temperature and nominal voltage [20°C]
- 2.) expose the mobile station to -30°C, wait sufficient time to have constant temperature.
- 3.) Perform the carrier frequencies measurements in 10°C increments from -30°C to +65°C. For about half hour at the specified temperature the mobile was powered-off. After powering-on, the measurements were made within 2 minute for the channel lower channel, in order to prevent self-warming of the mobile.


**5.8.13. FDD V Mode: Op. Mode 6, set-up 2**

Temperature	Maximum frequency error						Verdict Limit=±2.5ppm
	Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233	
	[Hz]			[ppm]			
-30	-43	-44	-10	-0.052	-0.053	-0.012	Passed
-20	-46	-13	-11	-0.056	-0.016	-0.013	
-10	-42	-12	-11	-0.051	-0.014	-0.013	
0	-44	-43	-10	-0.053	-0.051	-0.012	
10	-41	-40	-9	-0.050	-0.048	-0.011	
20	-42	-42	-11	-0.051	-0.050	-0.013	
30	-41	-43	-11	-0.050	-0.051	-0.013	
40	-9	-42	-10	-0.011	-0.050	-0.012	
50	-10	-45	-11	-0.012	-0.054	-0.013	
65	-9	-11	-42	-0.011	-0.013	-0.050	

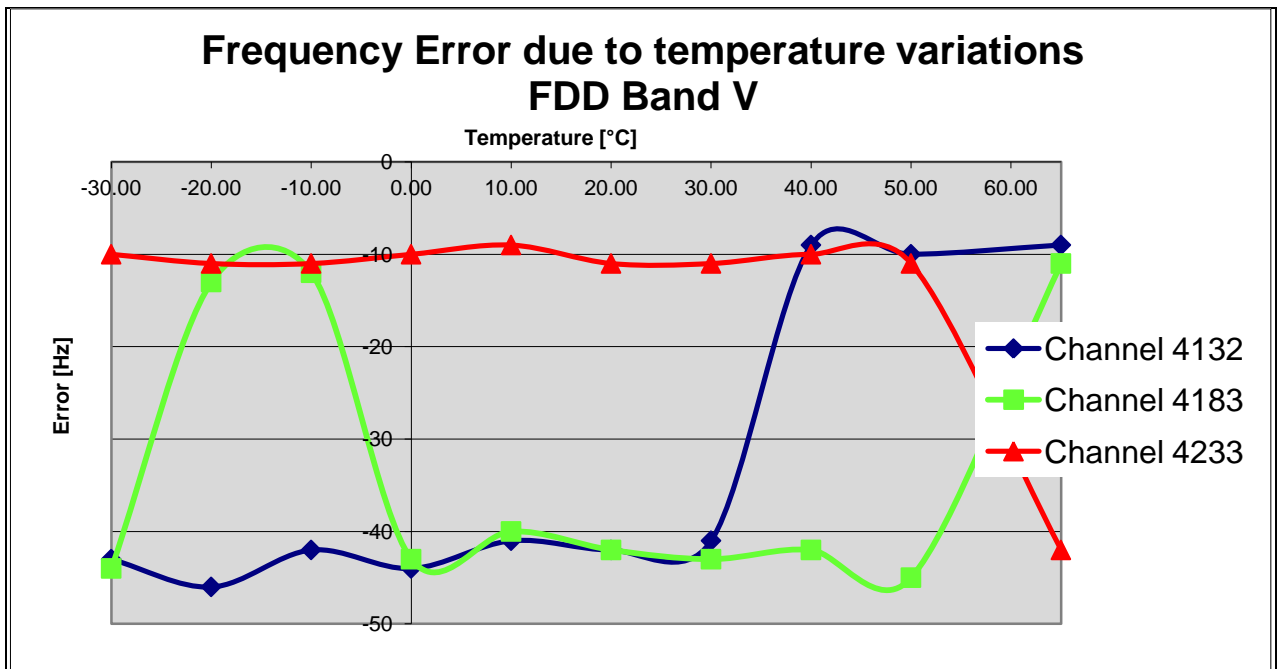

5.8.14. FDD II Mode: Op. Mode 5, set-up 2

Temperature	Maximum frequency error						Verdict Limit=±0.1ppm
	Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538	
	[Hz]			[ppm]			
-30	-19	45	-55	-0.010	0.024	-0.029	Passed
-20	-43	-44	-46	-0.023	-0.023	-0.024	
-10	-43	-41	-45	-0.023	-0.022	-0.024	
0	-42	-43	-43	-0.023	-0.023	-0.023	
10	-45	-42	-47	-0.024	-0.022	-0.025	
20	-48	-45	-48	-0.026	-0.024	-0.025	
30	-43	-47	-46	-0.023	-0.025	-0.024	
40	-41	-44	-45	-0.022	-0.023	-0.024	
50	-45	-49	-47	-0.024	-0.026	-0.025	
65	-19	-46	-21	-0.010	-0.024	-0.011	

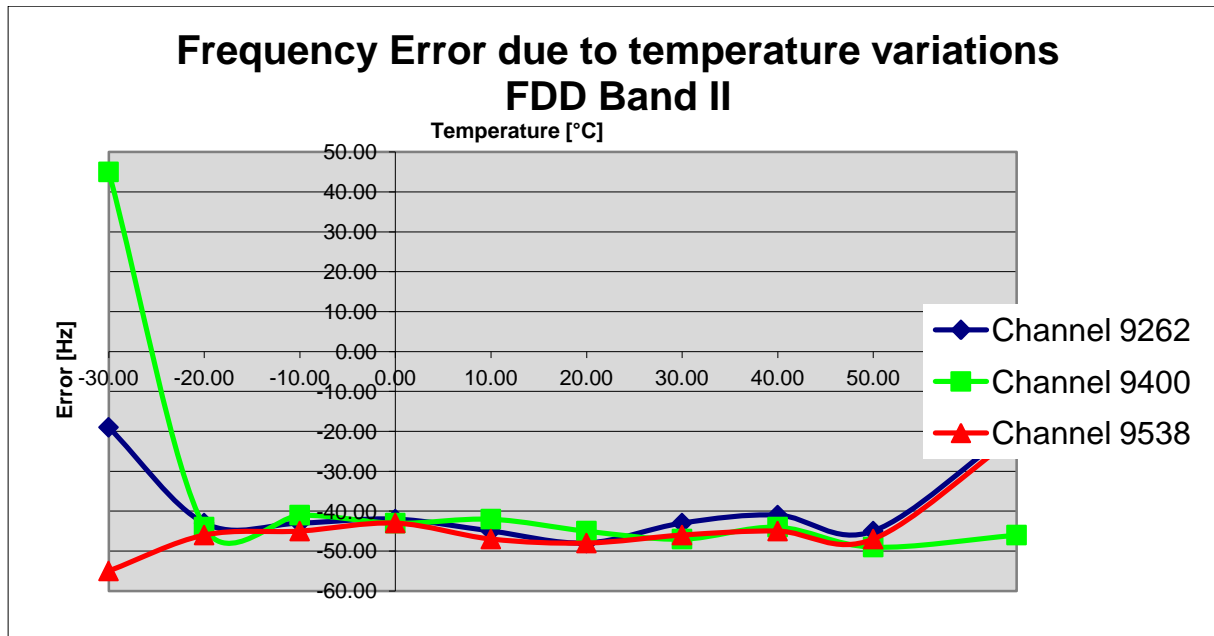

## 5.9. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Frequency range	Calculated uncertainty based on a confidence level of 95%	Remarks:
Power Output conducted	9 kHz .. 20 GHz	1.0 dB	--
Power Output radiated	30 MHz .. 4 GHz	3.17 dB	Substitution method
Conducted emissions on antenna ports	9 kHz .. 20 GHz	1.0 dB	--
Radiated emissions enclosure	150 kHz .. 30 MHz	5.0 dB	Magnetic field
	30 MHz .. 1 GHz	4.2 dB	E-Field
	1 GHz .. 20 GHz	3.17 dB	Substitution method
Occupied bandwidth	9 kHz .. 4 GHz	0.1272 ppm (Delta Marker )	Frequency error
		1.0 dB	Power
Emission bandwidth	9 kHz .. 4 GHz	0.1272 ppm (Delta Marker)	Frequency error
		1.0 dB	Power
Frequency stability	9 kHz .. 20 GHz	0.0636 ppm	--
Conducted emissions on AC-mains port (U <sub>CISPR</sub> )	9 kHz .. 150 kHz	4.0 dB	--
	150 kHz .. 30 MHz	3.6 dB	--

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV or AVG	Average detector
CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

## 7. Accreditation details of CETECOM’s laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DakS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	736496	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC, Federal Communications Commission Laboratory Division, USA (MRA US-EU 0003)
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
337 487 550 348 348	R-2665 R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

## 8. Instruments and Ancillary

### 8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 8.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
264	Spectrum Analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
383	Signal Generator	SME 03	842 828 /034	Firm.= 4.61
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software=GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 8.53
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 8.40
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
				WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr. 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
594	Wideband Radio Communication Tester	CMW500	101757	Firmware Base=2.0.20.9, LTE=2.0.20.8. CDMA= 2.0.10
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	

### 8.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	31.03.2013
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	24/12 M	-	31.03.2014
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	24/12 M	-	31.03.2014
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	31.03.2013
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	31.03.2013
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2013
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	31.03.2015
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	31.03.2015
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	31.03.2013
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.06.2013
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	-	-	RWTÜV	-	4	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	31.03.2015
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	31.03.2015
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	31.03.2013
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	12 M	-	31.03.2014
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	31.03.2015
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	31.03.2014
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	31.03.2014
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	31.03.2014
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	31.03.2013
264	Spectrum Analyzer	FSEK 30	826939/005	Rohde & Schwarz	12 M	-	31.03.2013
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	31.03.2014
266	peak power sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	31.03.2014
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.06.2013
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.06.2013

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	24/12 M	-	31.03.2014
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	31.03.2014
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	31.03.2014
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.11.2012
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	31.03.2014
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	31.03.2013
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	31.03.2014
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz	24 M	-	31.03.2013
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	31.03.2013
371	Bluetooth Tester	CBT32	100153	R&S	12 M	-	31.03.2013
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	24/12 M	-	31.03.2014
376	Horn Antenna 6 GHz	BBHA9120 E	BBHA 9120 E 179	Schwarzbeck	12 M	-	31.03.2013
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	31.03.2013
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	31.03.2013
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	31.03.2013
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	31.03.2013
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	31.10.2013
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	30.06.2013
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	30.06.2013
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	30.06.2013
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	31.03.2013
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	31.03.2014
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	24 M	-	31.03.2014
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	24 M	-	31.03.2014
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	31.03.2013
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.06.2013
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	30.09.2013
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	31.03.2013
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	30.06.2013
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	31.03.2013
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	31.03.2013
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	31.03.2013
548	Digital-Barometer	GBP 2300	without	Greisinger GmbH	36 M	-	30.06.2015
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.03.2015
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	30.06.2013
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	31.07.2013
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	30.03.2013
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	12 M	-	31.03.2013
594	Wideband Radio Communication Tester	CMW500	101757	Rohde & Schwarz	24 M	-	31.03.2014
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	12 M	-	31.03.2013
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Rohde & Schwarz	24 M	-	13.01.2013
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	31.03.2013
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	12.01.2013
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	12.01.2013
608	UltraLog-Antenna	HL 562	830547/009	Rohde & Schwarz	36/12 M	-	31.03.2014
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	31.03.2014
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	



Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	01.01.2013
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.05.2014
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
635	DFS Testbox	DFS Testbox	2012 V01	CETECOM SHA	-	-	
636	Wärmebildkamera	Ti32	Ti32-12060213, Tele	Fluke Corporation	24 M	-	31.07.2014
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	KogiLink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	24 M	-	31.03.2014

### 8.1.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No . 443)
	1d	System CTC-SAR-EMI (Ref.-No . 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No . 420)
	1 g	System CTC-FAR-EMS (Ref.-No . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration