


TEST REPORT

2.4-2.5GHz 2.85dBi/5.1-5.8GHz 2.17dBi DIPOLE FOR SMA PLUG RP with
SMA FEMALE RP BULKHEAD+1.13+MHF4 IPEX L=100mm

Part NO. : DA-2458-02-SMR Antenna Type: Dipole

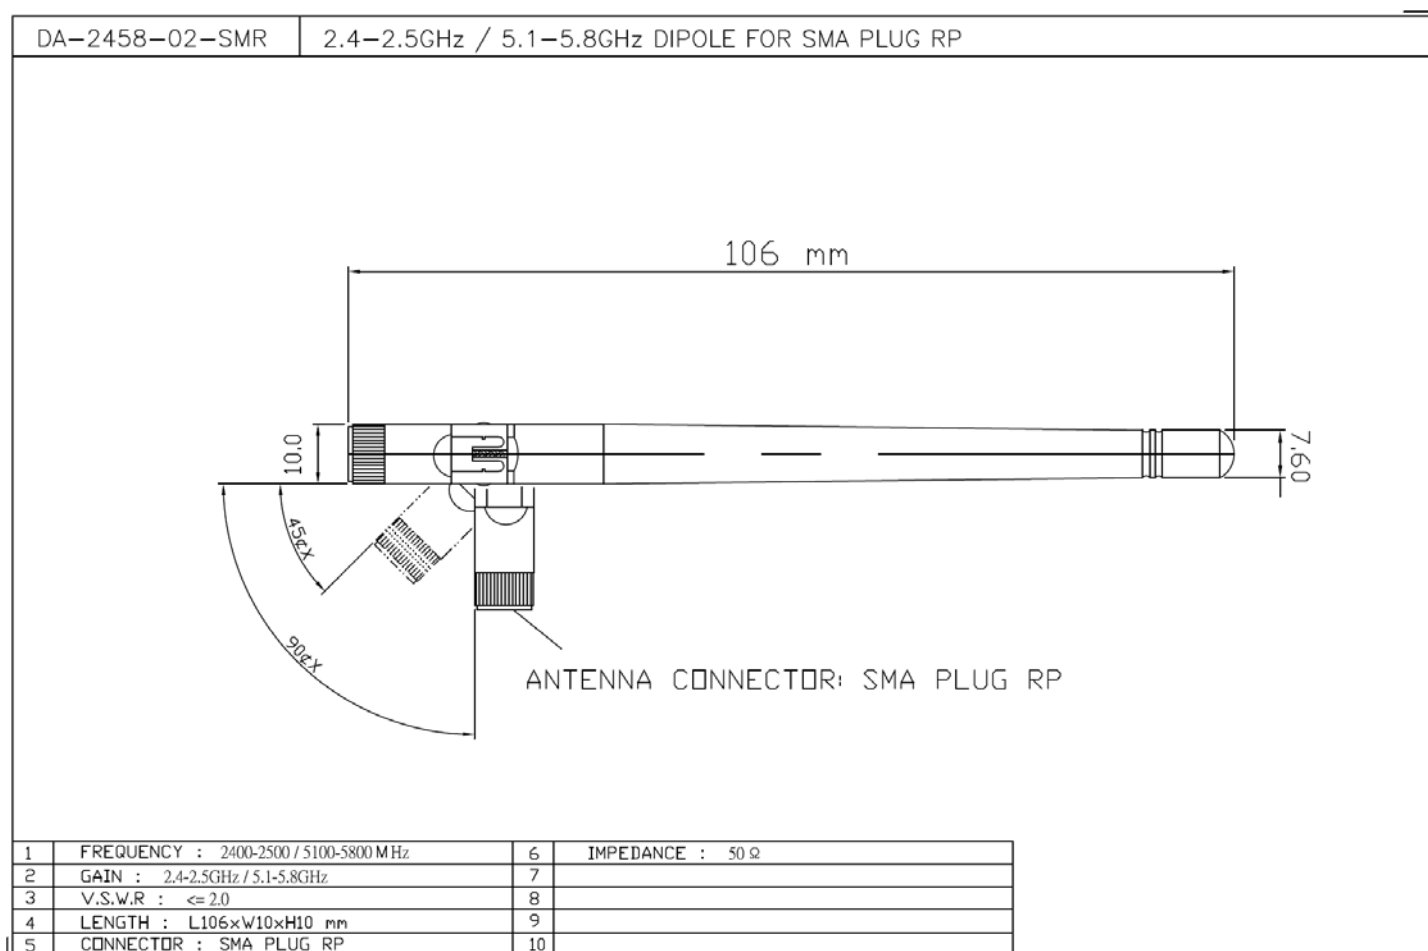


Cable Loss:

@2.4GHz: 0.5dB

@5GHz: 0.82dB

REV	DESCRIPTION	DRAWN	DATE

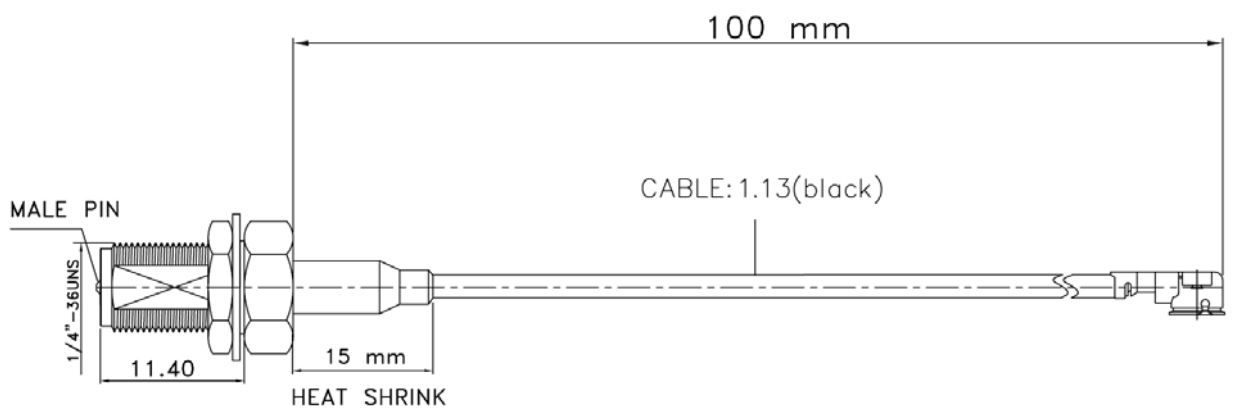

SMA FEMALE RP BULKHEAD


MHF4 IPEX



					UNLESS OTHERWISE SPECIFIED	* MAJOR DIMENSION			APPROVED	 CHANGHONG TECHNOLOGY CO., Ltd.	
3	MHF4 IPEX	1	BRASS	partial gold	1.REMOVE ALL BURRS 2.BREAK ALL CORNERS & EDGES TO 15 MAX. 3.CHAMFER 1ST & LAST THREADS 45° 4.DIAMETERS ON COMMON CENTERS. 5.TO BE CONCENTRIC WITHIN 0.1 OR 5.4. DIMENSIONS ARE AFTER PLATING.	UNLESS OTHERWISE NOTED TOLERANCES 0.5-6=±0.2 6-30=±0.4 30-120=±0.6 120-315=±1.0 ANGLES=1°			CHECKED	TITLE	
2	CABLE: 1.13	1		DRAWN					SMA FEMALE RP BKD+1.13+IPEX4		
1	SMA-02-73-RP-I-TGG	1	BRASS	GOLD					DRAWING NO.		
NO	Description	Q'ty	Material	Finish					0273113IPEX4-100		
					SCALE	5/1	UNIT	MM	DRAWN DATE	REV A	
									FILE NO.		

2.4-2.5GHz 2.85dBi/5.1-5.8GHz 2.17dBi DIPOLE FOR SMA PLUG RP with SMA FEMALE RP BULKHEAD+1.13+MHF4 IPEX L=100mm		
Fre/Gain(dBi)	E-co	H-co
2400MHz	-0.47	1.35
2450MHz	0.45	1.89
2500MHz	2.85	1.93
5150MHz	1.52	-0.21
5350MHz	0.36	-0.31
5470MHz	1.35	0.42



5725MHz	1.72	2.17
5850MHz	0.4	1.49

Radiation pattern :


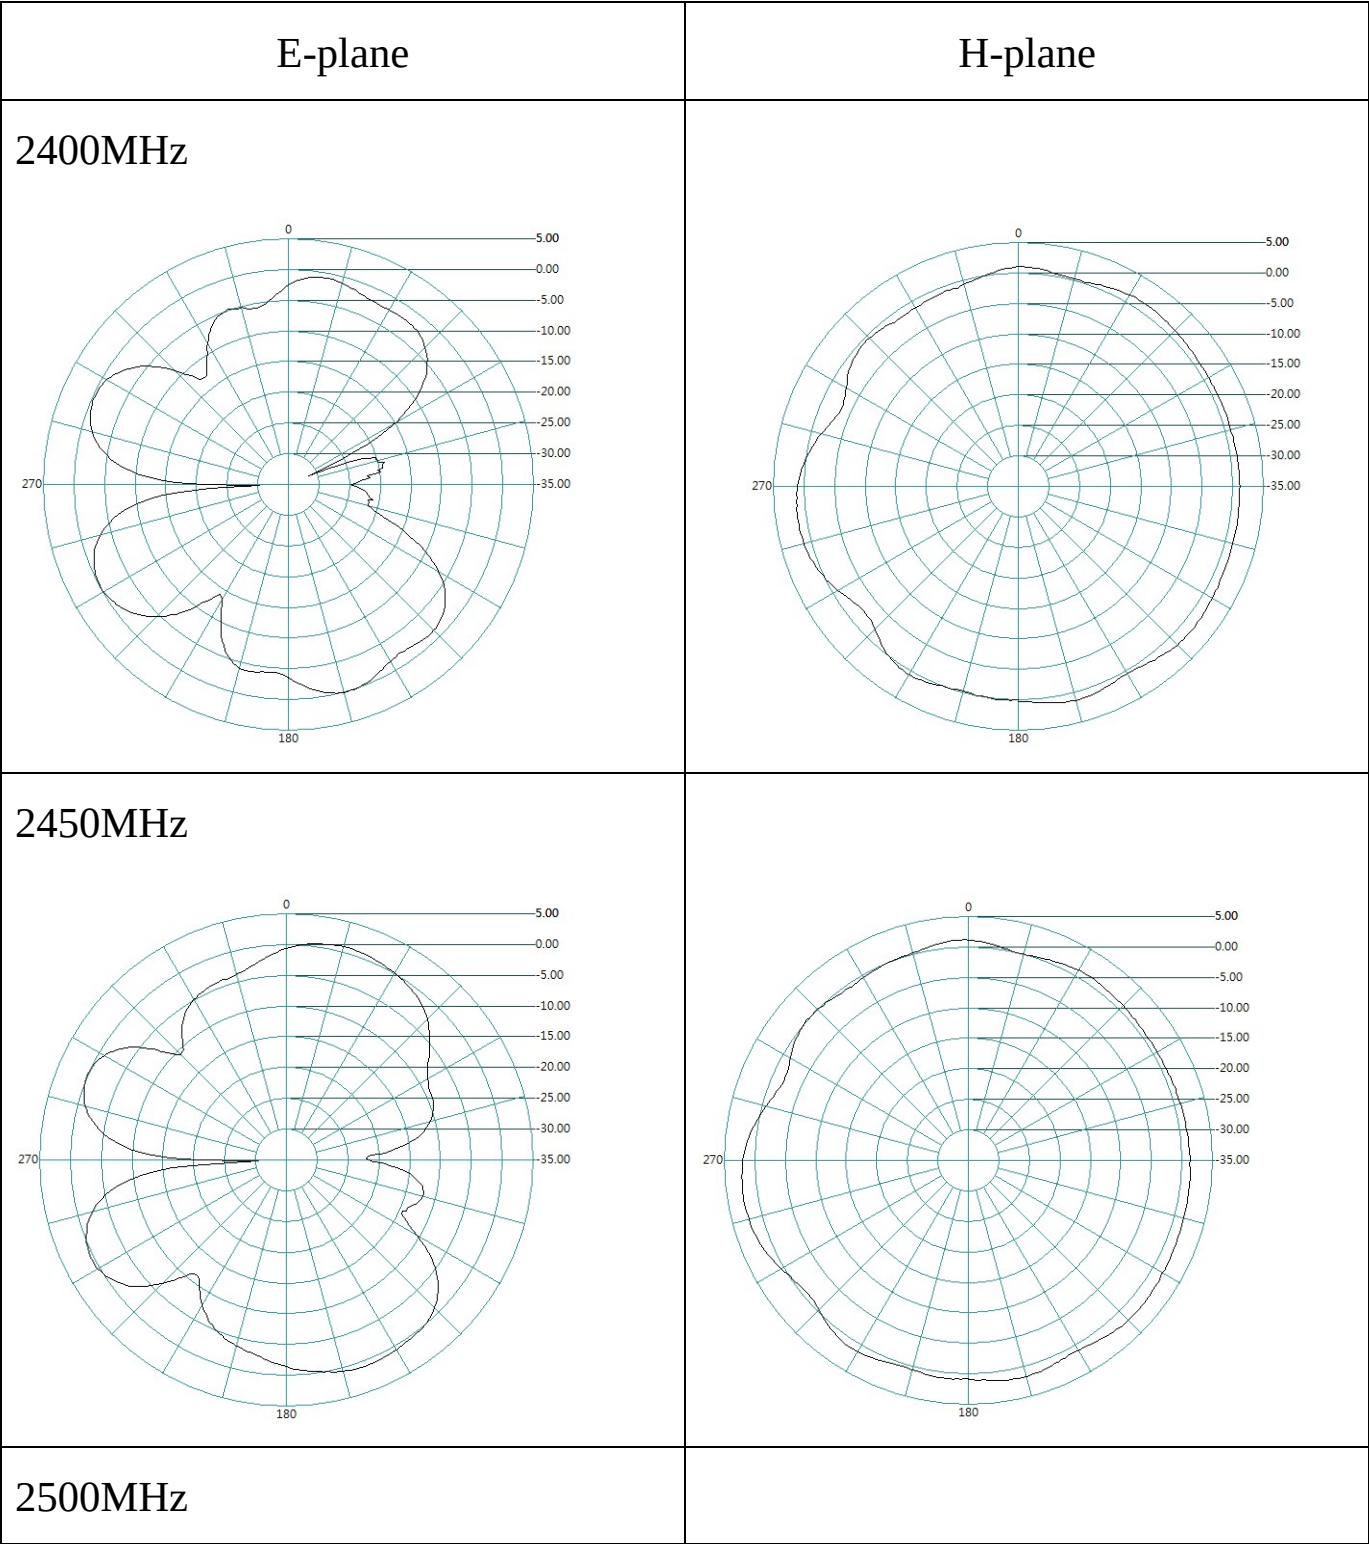


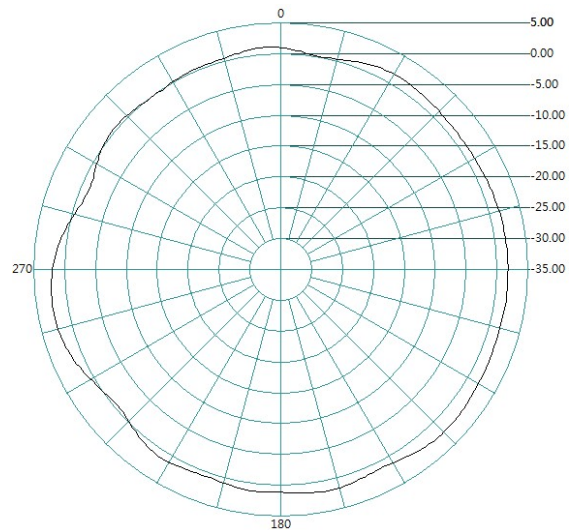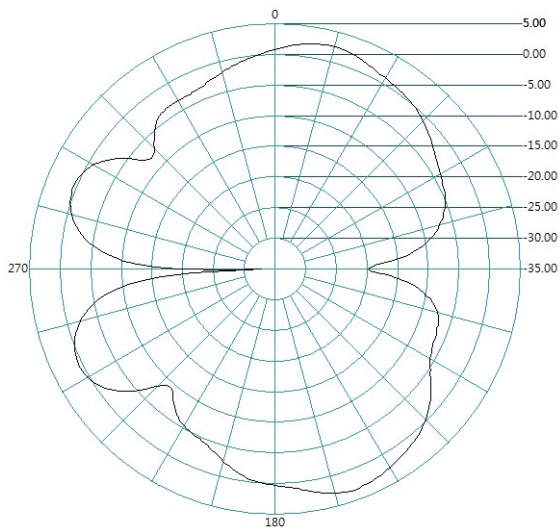



5150MHz

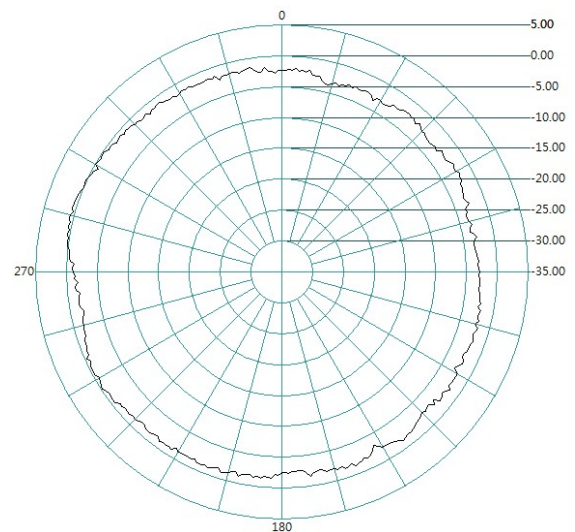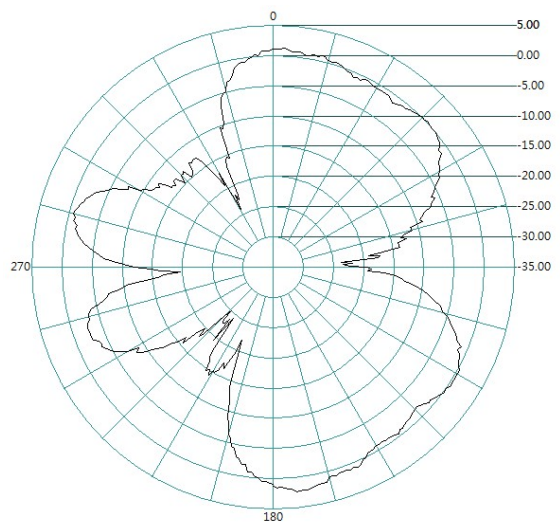



5350MHz

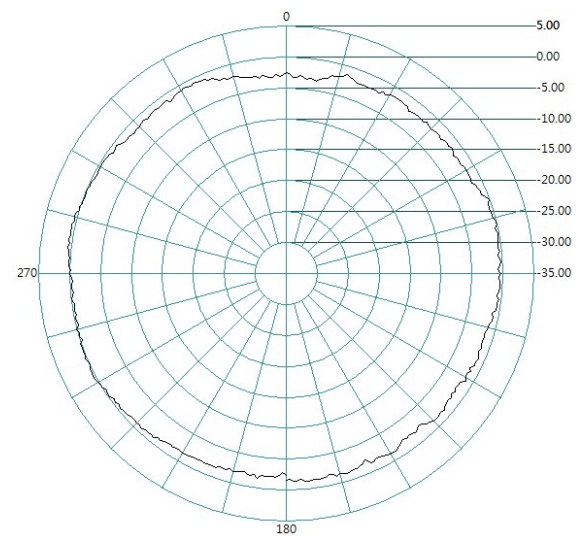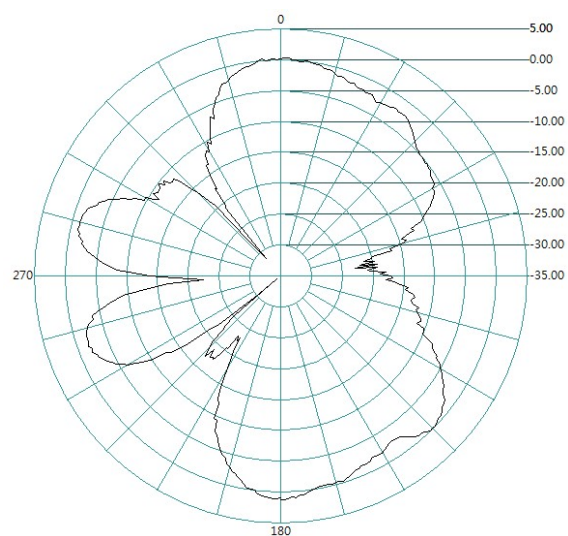

5470MHz

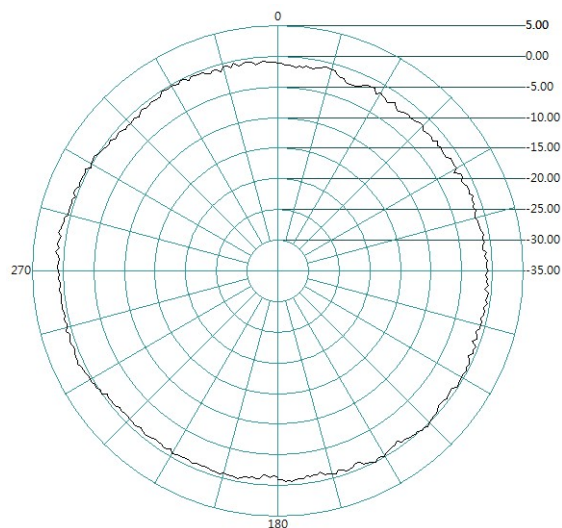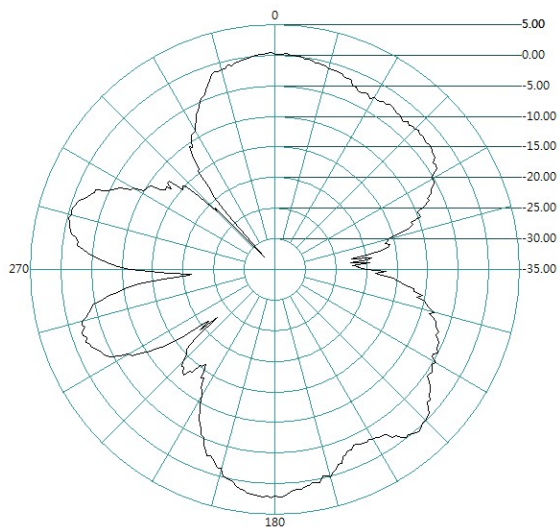

5725MHz

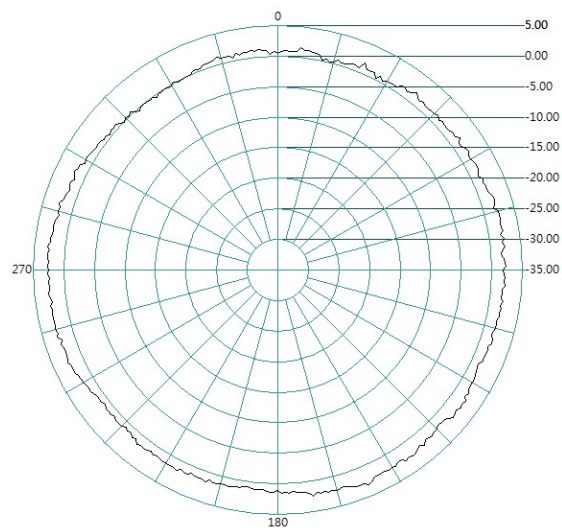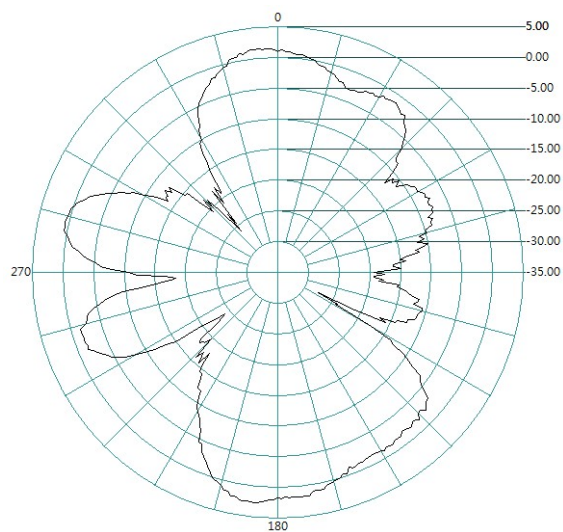

5850MHz

