


Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan
Apparatets stikprop skal tilsluttes en stikkontakt
med jord, som giver forbindelse til stikproppens jord.
Apparatet må tilkoples jordet stikkontakt
Apparaten skall anslutas till jordat uttag



CAUTION: CHASSIS SURFACE HOT
WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE
AVERTISSEMENT: RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR
ATTENTION: SUPERFICIE DE CHASSIS CHAUDE

WARNING:
FENDER AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING VERY HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE TEMPORARY OR PERMANENT HEARING DAMAGE. USE CARE WHEN SETTING AND ADJUSTING VOLUME LEVELS DURING USE.


CAUTION:
TO REDUCE THE RISK OF FIRE, REPLACE FUSE WITH SAME TYPE AND RATING

Model:
PASSPORT® CONFERENCE SERIES 2
FCC ID: XQWPC2PR844BK
IC: 8690A-PC2PR844BK
Homologación IFT:
RCPFEPA20-2429



PASSPORT® CONFERENCE
S E R I E S 2

ATTENTION:
UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE ET CALIBRE

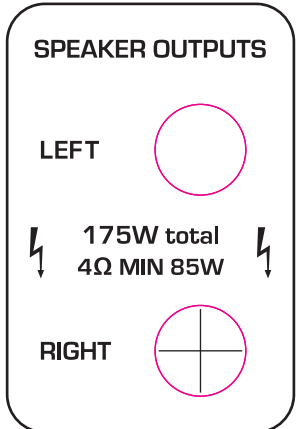

Use only with supplied
4 ohm speakers

PRODUCED BY:
FENDER MUSICAL INSTRUMENTS CORP.,
CORONA, CA, U.S.A.
MADE IN CHINA
DESIGNED AND ENGINEERED IN U.S.A.

WARNING: MAINTAIN 6" CLEARANCE FOR VENTILATION.

TYPE: PR 844
SERIAL NUMBER



100-120V~ 50/60Hz
220-240V~ 50/60Hz



ON




OFF

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES, OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

FUSE
T4A H
250V

INPUT POWER
225W

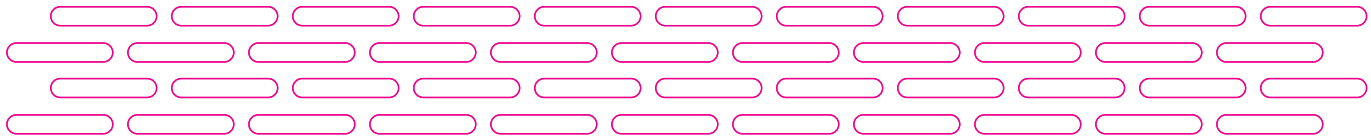

Conference 2 rear panel
P/N: 1405-9132+4
Scale: 100%
Color:

TEXT AND GRAPHICS TO BE: WHITE.
BACKGROUND TO BE: PANTONE PROCESS BLACK.

V01-20221208