




Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan
Apparatets stikprop skal tilsluttes en stikkontakt
med jord, som giver forbindelse til stikproppens jord.
Apparatet må tilkoples jordet stikkontakt
Apparaten skall anslutas till jordat uttag


WARNING:
FENDER AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING
VERY HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE
TEMPORARY OR PERMANENT HEARING DAMAGE. USE CARE
WHEN SETTING AND ADJUSTING VOLUME LEVELS DURING USE.

CAUTION: CHASSIS SURFACE HOT
WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC
SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE
AVERTISSEMENT: RISQUE DE CHOC ELECTRIQUE
- NE PAS OUVRIR
ATTENTION: SUPERFICIE DE CHASSIS CHAUDE


100-120V~ 50/60Hz 220-240V~ 50/60Hz



FUSE
T6.3AH
250V



**INPUT POWER
450W**

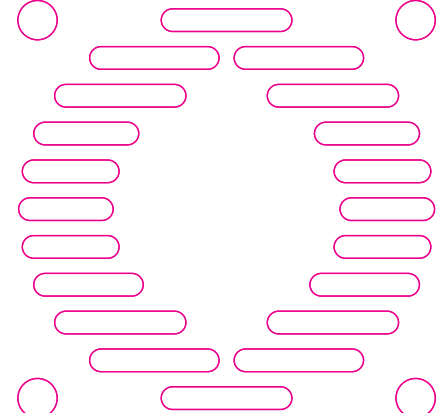

**PASSPORT® EVENT
S E R I E S 2**

PRODUCED BY:
**FENDER MUSICAL INSTRUMENTS CORP.,
CORONA, CA, U.S.A.
MADE IN CHINA
DESIGNED AND ENGINEERED IN U.S.A.**

CAUTION:
TO REDUCE THE RISK OF
FIRE, REPLACE FUSE WITH
SAME TYPE AND RATING


ATTENTION:
UTILISER UN FUSIBLE DE
RECHANGE DE MEME
TYPE ET CALIBRE

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO
THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL
INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE
RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

**UK
CA**

Use only with supplied
4 ohm speakers

SPEAKER OUTPUTS



LEFT

375W total
4Ω MIN 185W



RIGHT

Model:
PASSPORT® EVENT SERIES 2
FCC ID: XQWPE2PR845BK
IC: 8690A-PE2PR845BK

Bluetooth®

Homologación IFT:
RCPFEPA20-2429-A1

WARNING:
MAINTAIN 6" CLEARANCE
FOR VENTILATION.



**TYPE: PR 845
SERIAL NUMBER**



Event 2 rear panel
P/N: 1407-160B+3
Scale: 100%
Color:

TEXT AND GRAPHICS TO BE: WHITE.
BACKGROUND TO BE: PANTONE PROCESS BLACK.

V01-20221208