

Plot: 1#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 39.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 802.11g Low/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.11 W/kg

Body Front/WLAN 802.11g Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.43 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 1.70 W/kg

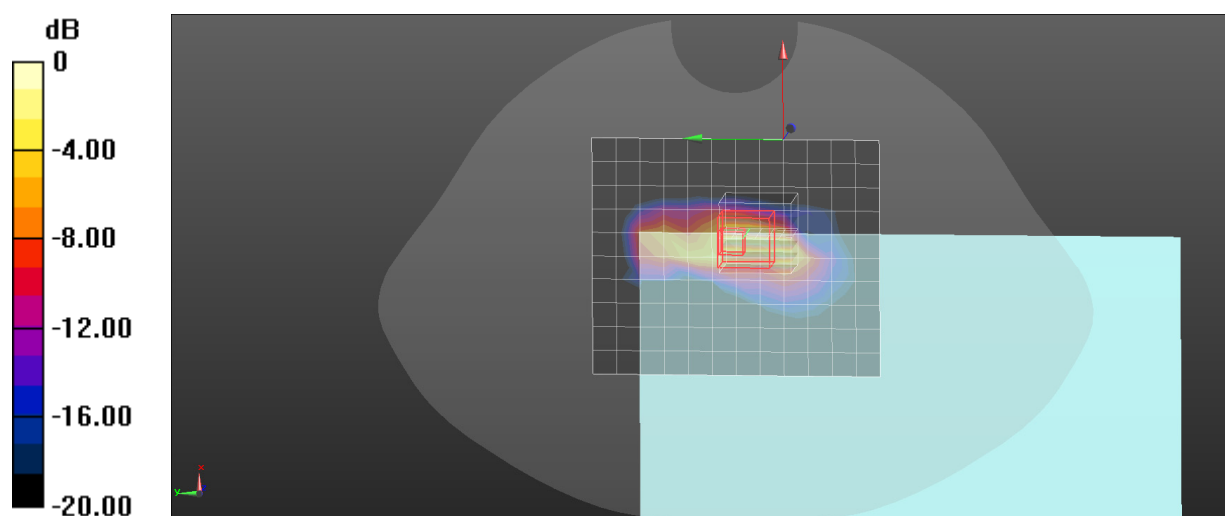

0 dB = 1.70 W/kg = 2.30 dBW/kg

Plot: 2#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 39.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11g Low/Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.70 W/kg

Body Back/WLAN 802.11g Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.422 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.78 W/kg

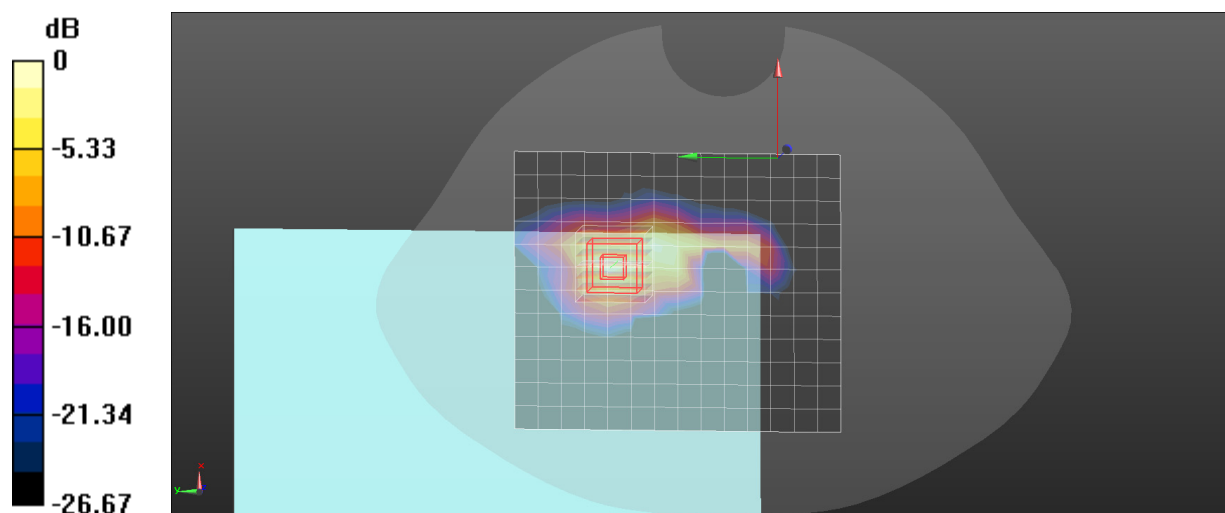

0 dB = 1.78 W/kg = 2.50 dBW/kg

Plot: 3#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.764$ S/m; $\epsilon_r = 39.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2437 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11g Mid/Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.875 W/kg

Body Back/WLAN 802.11g Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.341 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 0.937 W/kg

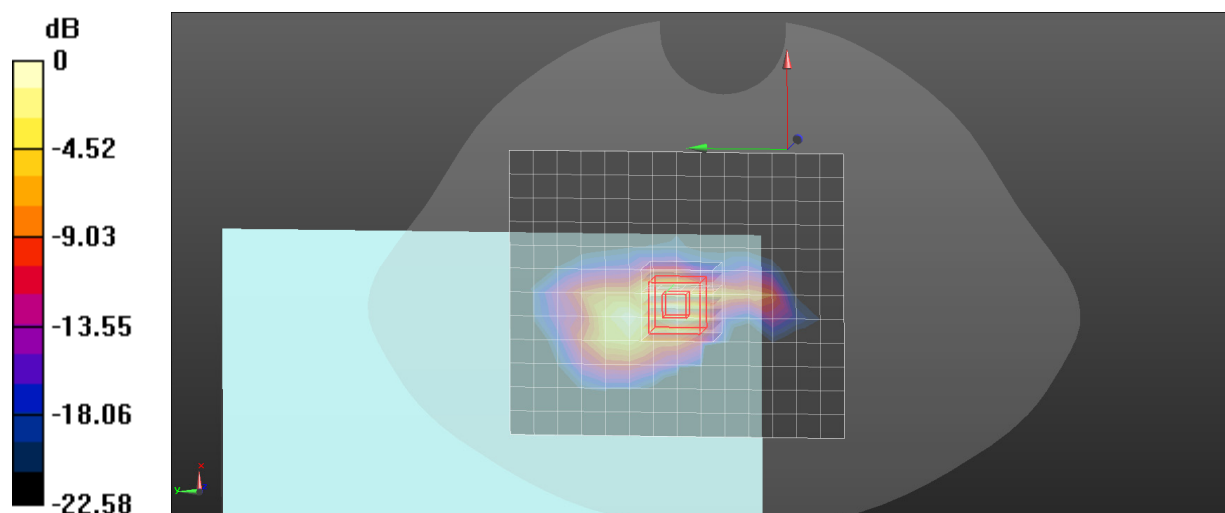

Plot: 4#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 39.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2462 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11g High/Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.36 W/kg

Body Back/WLAN 802.11g High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.998 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.2%

Maximum value of SAR (measured) = 1.64 W/kg

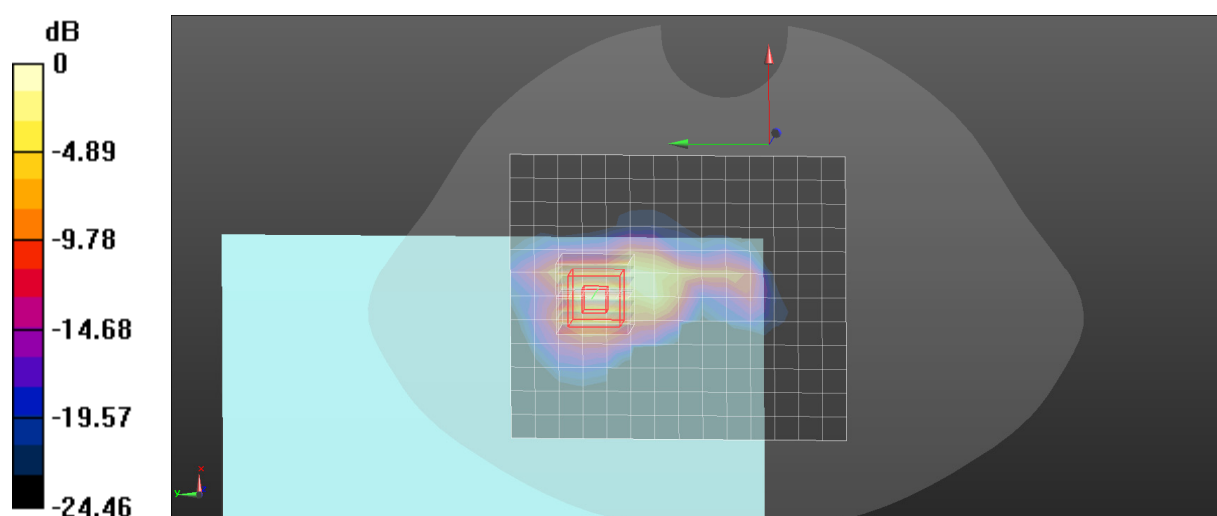

Plot: 5#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 39.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 802.11g Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.730 W/kg

Body Left/WLAN 802.11g Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.33 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 1.13 W/kg

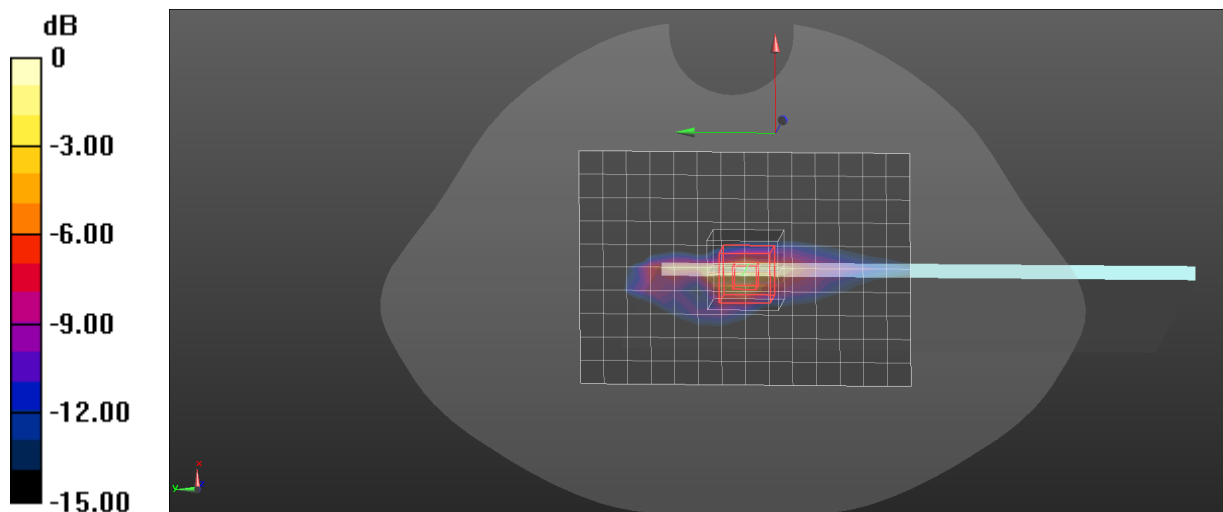

0 dB = 1.13 W/kg = 0.53 dBW/kg

Plot: 6#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 39.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 802.11g Low/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.205 W/kg

Body Bottom/WLAN 802.11g Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.477 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.277 W/kg

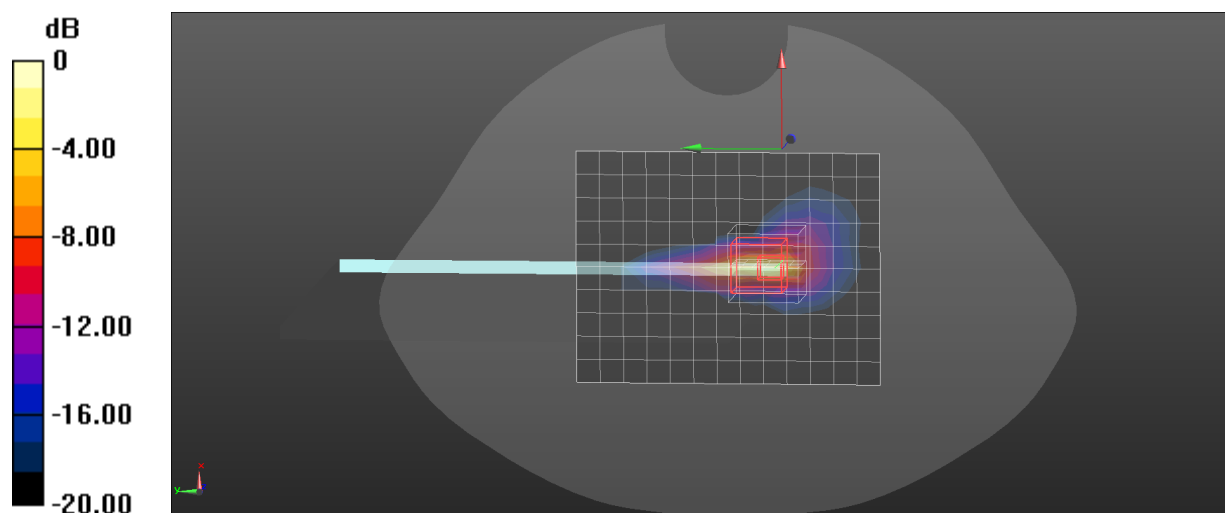

0 dB = 0.277 W/kg = -5.58 dBW/kg

Plot: 7#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5230 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.666$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5230 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.2G 802.11ac40 High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.01 W/kg

Body Front/WLAN 5.2G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.634 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 1.88 W/kg

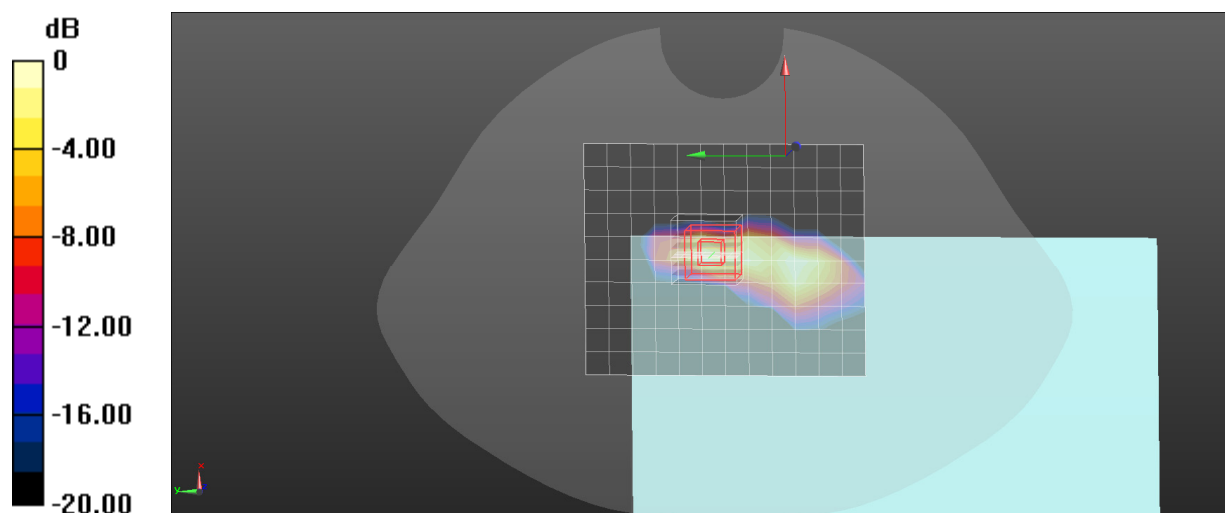

0 dB = 1.88 W/kg = 2.74 dBW/kg

Plot: 8#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5190 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.664$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5190 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11ac40 Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.96 W/kg

Body Back/WLAN 5.2G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.835 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.37 W/kg

SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 2.09 W/kg

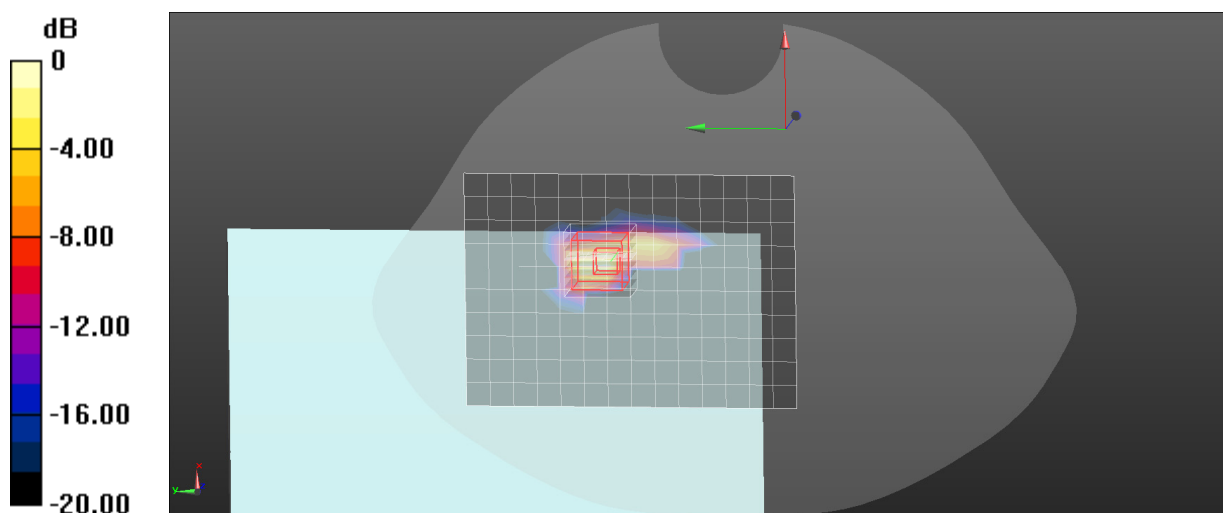

0 dB = 2.09 W/kg = 3.20 dBW/kg

Plot: 9#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5230 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.666$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5230 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11ac40 High/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.05 W/kg

Body Back/WLAN 5.2G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.160 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 2.18 W/kg

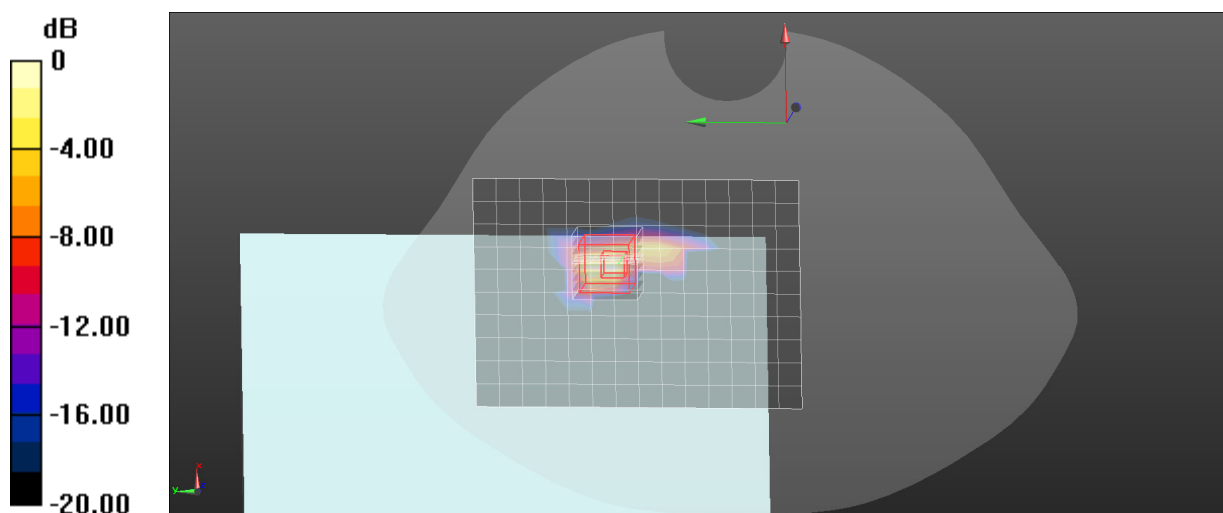

0 dB = 2.18 W/kg = 3.38 dBW/kg

Plot: 10#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5230 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.666$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5230 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 5.2G 802.11ac40 High/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.321 W/kg

Body Left/WLAN 5.2G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.757 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.431 W/kg

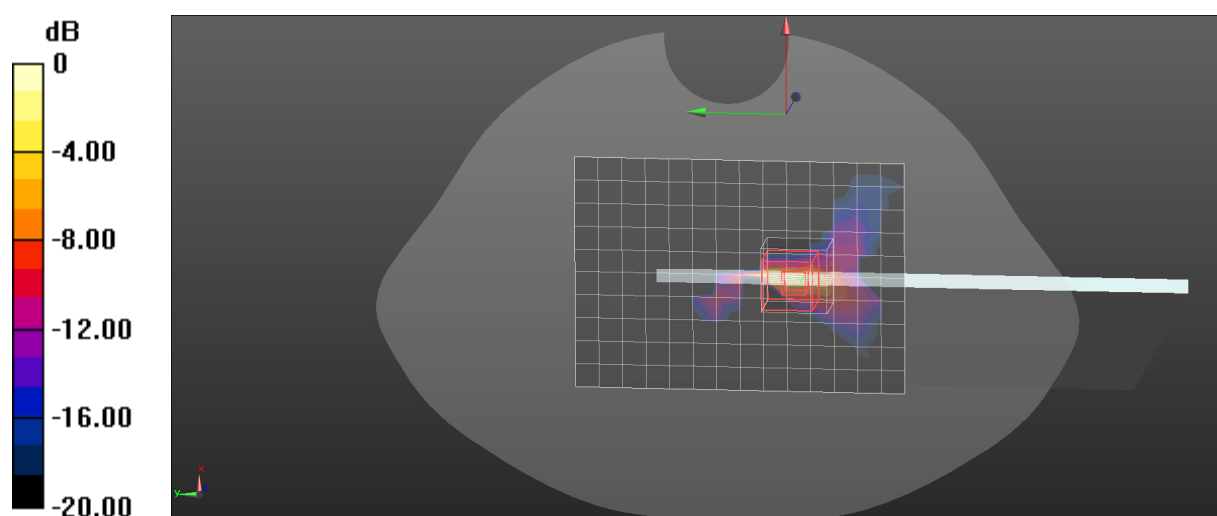

0 dB = 0.431 W/kg = -3.66 dBW/kg

Plot: 11#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5230 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.666$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5230 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.2G 802.11ac40 High/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.633 W/kg

Body Bottom/WLAN 5.2G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.466 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.03 W/kg

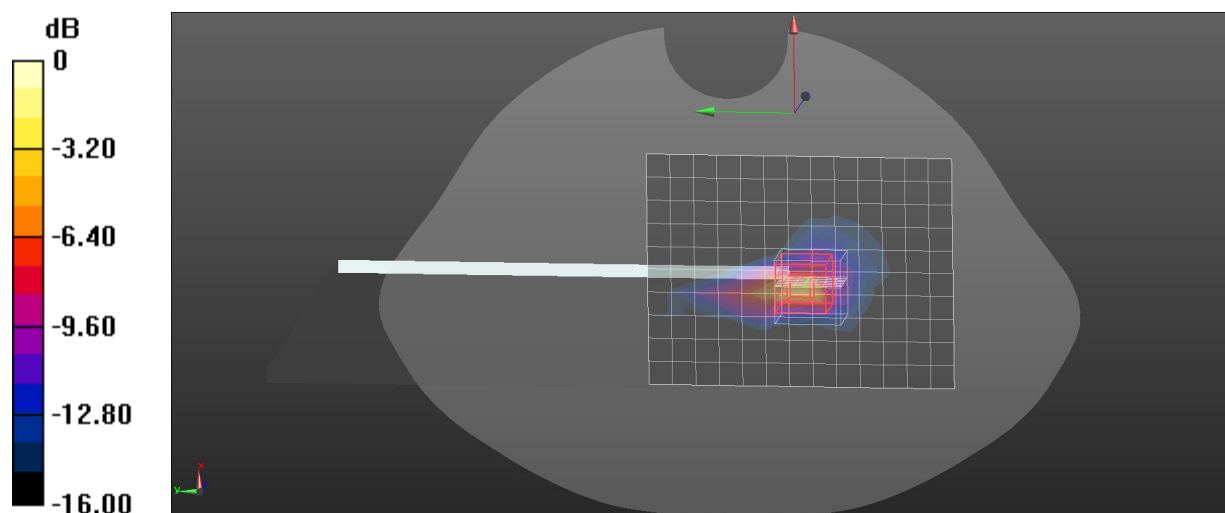

0 dB = 1.03 W/kg = 0.13 dBW/kg

Plot: 12#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5310 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.671$ S/m; $\epsilon_r = 34.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5310 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.3G 802.11ac40 High/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.83 W/kg

Body Front/WLAN 5.3G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.05 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 2.38 W/kg

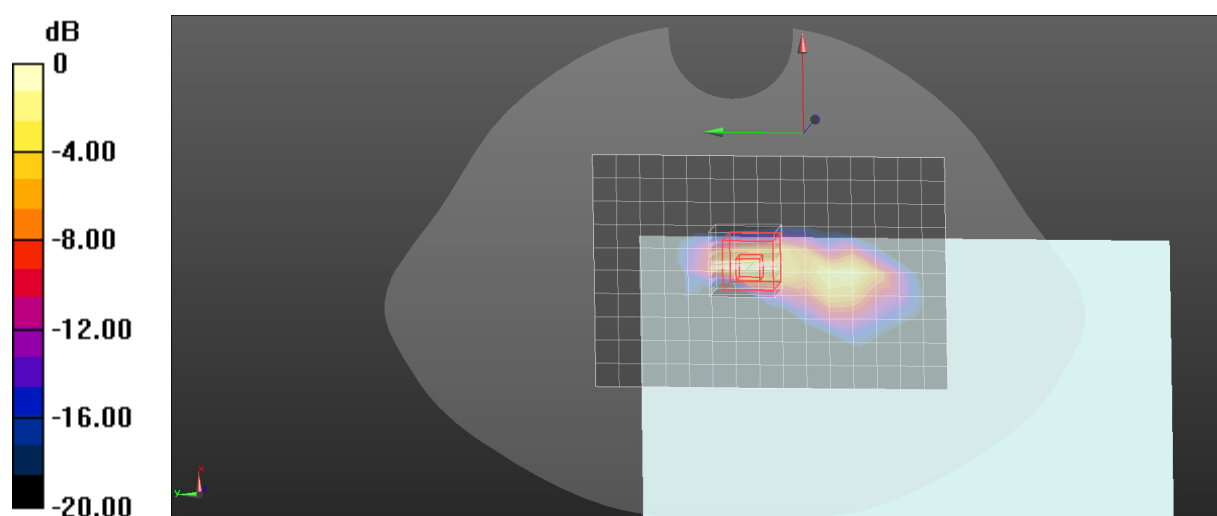

0 dB = 2.38 W/kg = 3.77 dBW/kg

Plot: 13#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5270 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.669$ S/m; $\epsilon_r = 34.563$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5270 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11ac40 Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.72 W/kg

Body Back/WLAN 5.3G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.388 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 2.01 W/kg

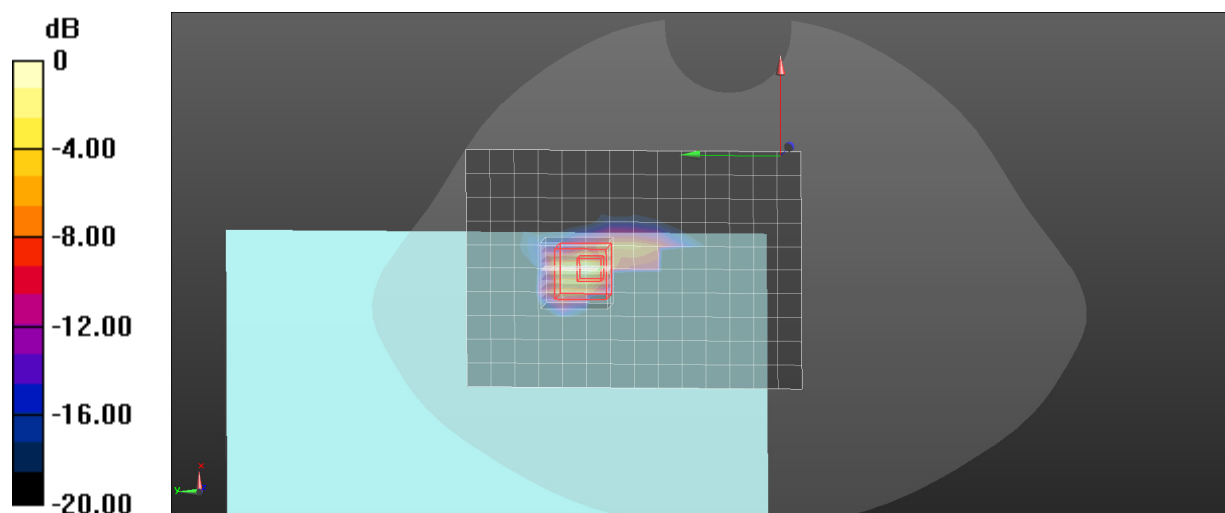

0 dB = 2.01 W/kg = 3.03 dBW/kg

Plot: 14#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5310 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.671$ S/m; $\epsilon_r = 34.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5310 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11ac40 High/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.36 W/kg

Body Back/WLAN 5.3G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9650 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 4.46 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.242 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 2.43 W/kg

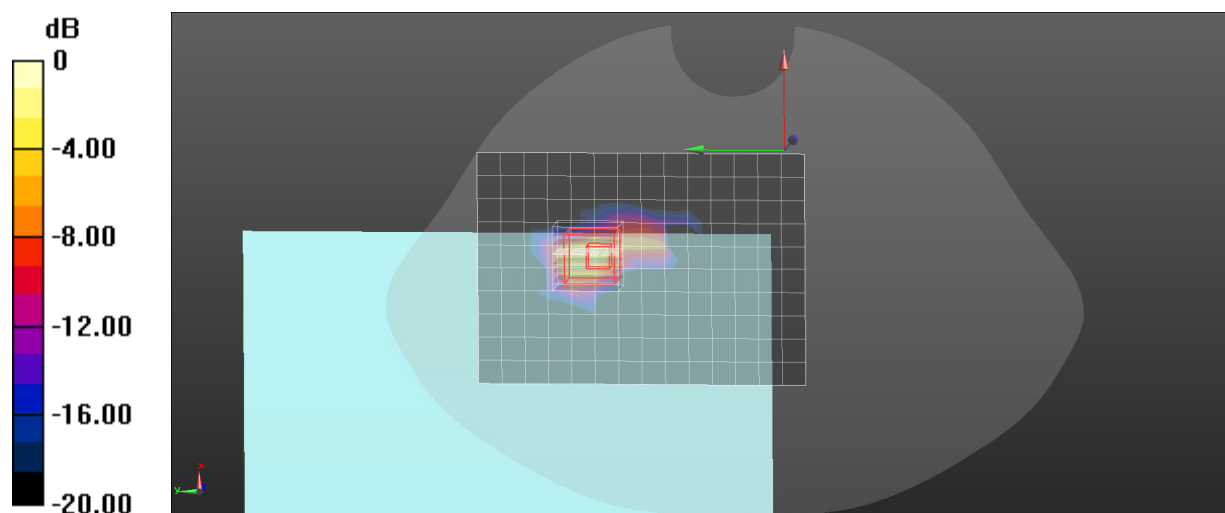

0 dB = 2.43 W/kg = 3.86 dBW/kg

Plot: 15#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5310 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.671$ S/m; $\epsilon_r = 34.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5310 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 5.3G 802.11ac40 High/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.309 W/kg

Body Left/WLAN 5.3G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.159 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 0.378 W/kg

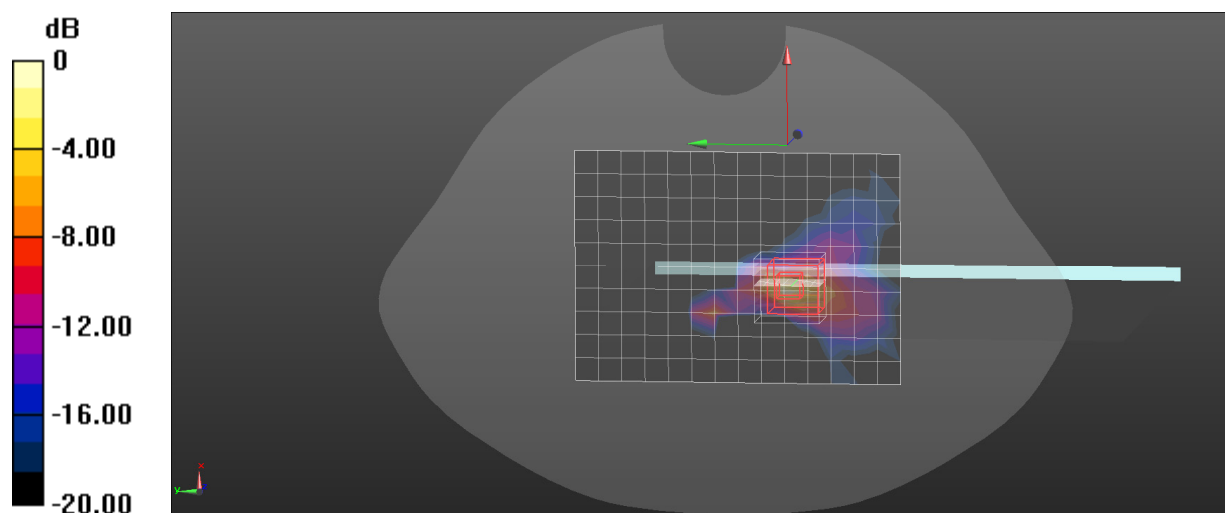

0 dB = 0.378 W/kg = -4.23 dBW/kg

Plot: 16#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5310 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.671$ S/m; $\epsilon_r = 34.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5310 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.3G 802.11ac High/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.639 W/kg

Body Bottom/WLAN 5.3G 802.11ac High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.150 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 1.10 W/kg

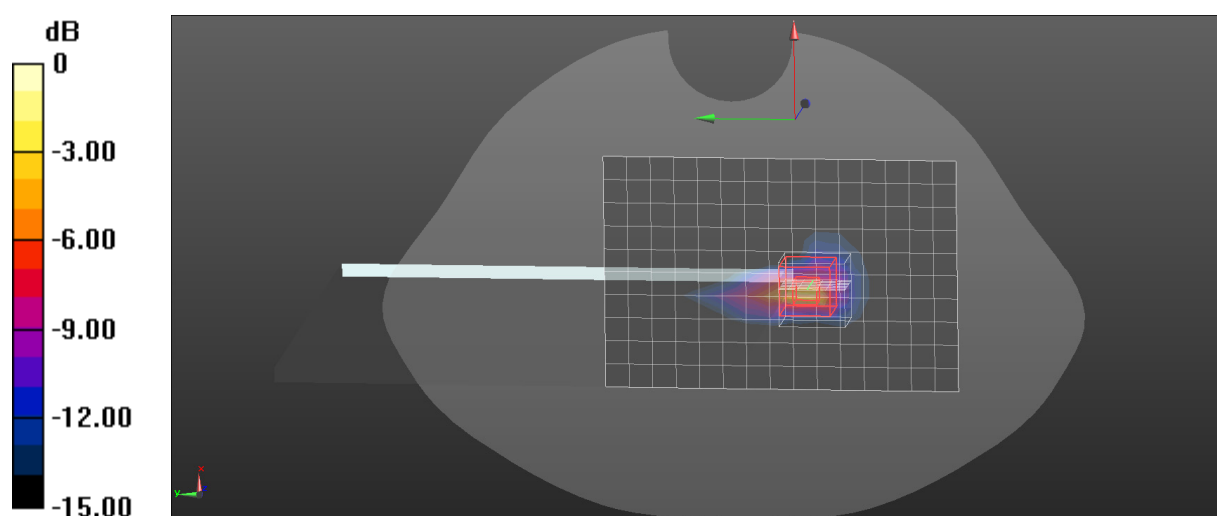

0 dB = 1.10 W/kg = 0.41 dBW/kg

Plot: 17#(Data:2026/08/13)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5510 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5510$ MHz; $\sigma = 4.957$ S/m; $\epsilon_r = 34.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5510 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.6G 802.11ac40 Low/Area Scan (12x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.42 W/kg

Body Front/WLAN 5.6G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.695 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 1.66 W/kg

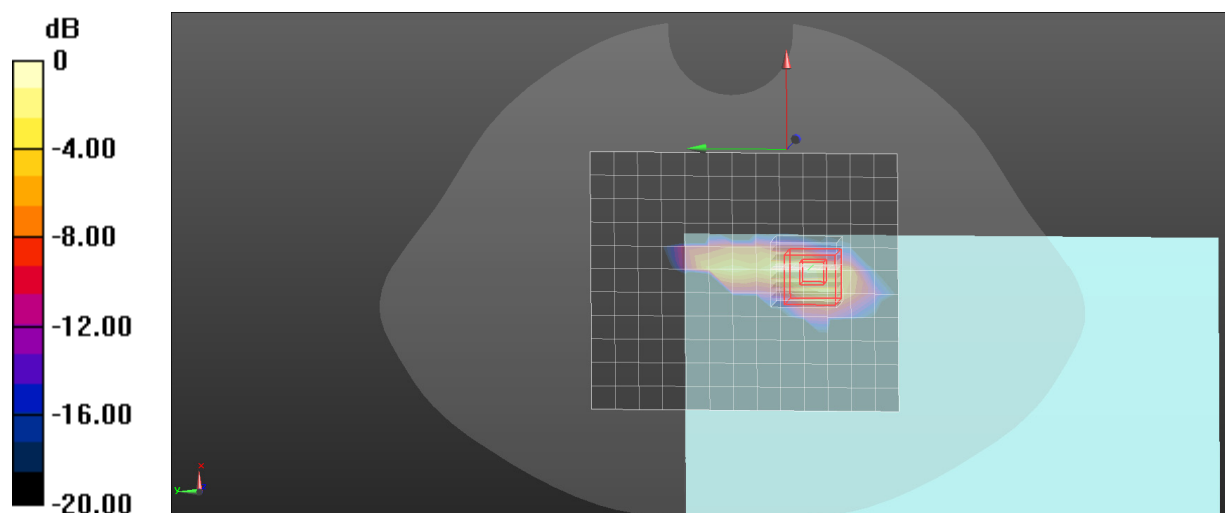

0 dB = 1.66 W/kg = 2.20 dBW/kg

Plot: 18#(Data:2026/08/13)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5510 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5510$ MHz; $\sigma = 4.957$ S/m; $\epsilon_r = 34.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5510 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11ac40 Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.39 W/kg

Body Back/WLAN 5.6G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.085 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 4.41 W/kg

SAR(1 g) = 0.725 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 2.01 W/kg

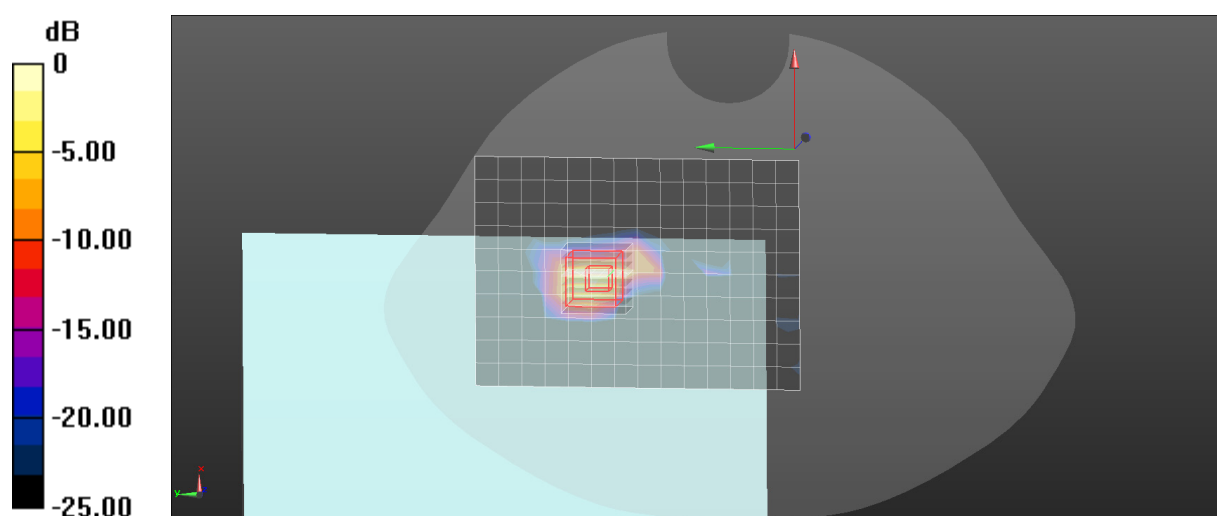

0 dB = 2.01 W/kg = 3.03 dBW/kg

Plot: 19#(Data:2026/08/13)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5590 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5590$ MHz; $\sigma = 4.963$ S/m; $\epsilon_r = 34.733$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5590 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11ac40 Mid/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.19 W/kg

Body Back/WLAN 5.6G 802.11ac40 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.508 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 2.02 W/kg

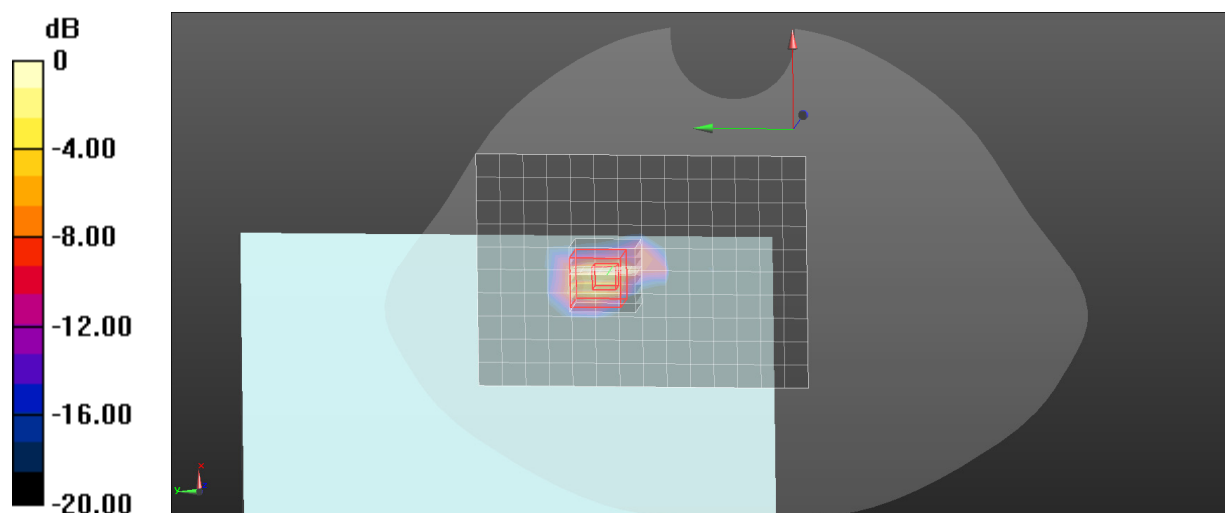

0 dB = 2.02 W/kg = 3.05 dBW/kg

Plot: 20#(Data:2026/08/13)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5670 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5670$ MHz; $\sigma = 4.969$ S/m; $\epsilon_r = 34.514$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5670 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11ac40 High/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.24 W/kg

Body Back/WLAN 5.6G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.754 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.76 W/kg

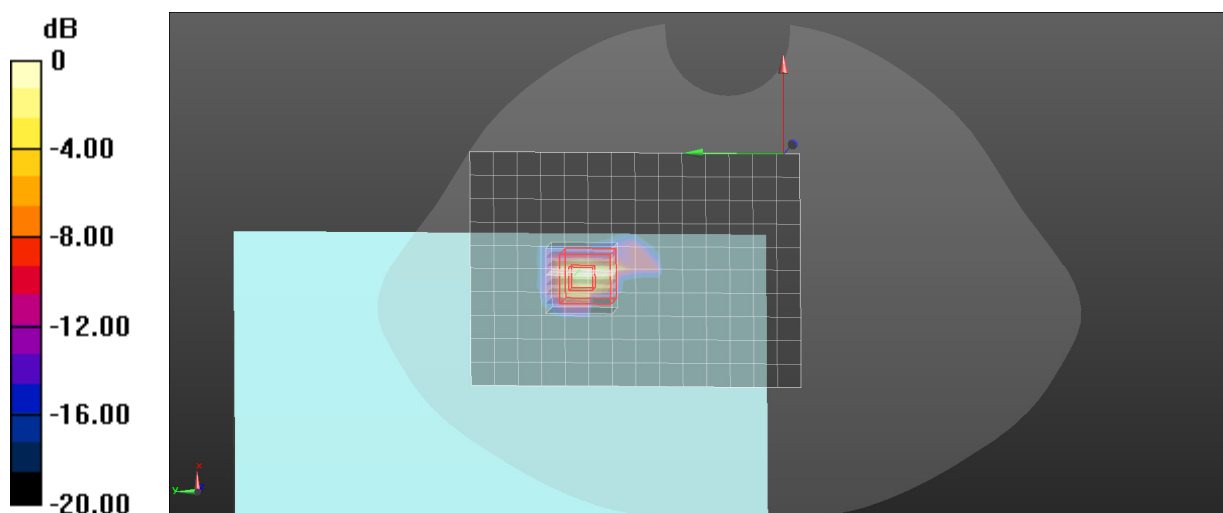

0 dB = 1.76 W/kg = 2.46 dBW/kg

Plot: 21#(Data:2026/08/13)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5510 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5510$ MHz; $\sigma = 4.957$ S/m; $\epsilon_r = 34.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5510 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 5.6G 802.11ac40 Low/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.282 W/kg

Body Left/WLAN 5.6G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.948 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.728 W/kg

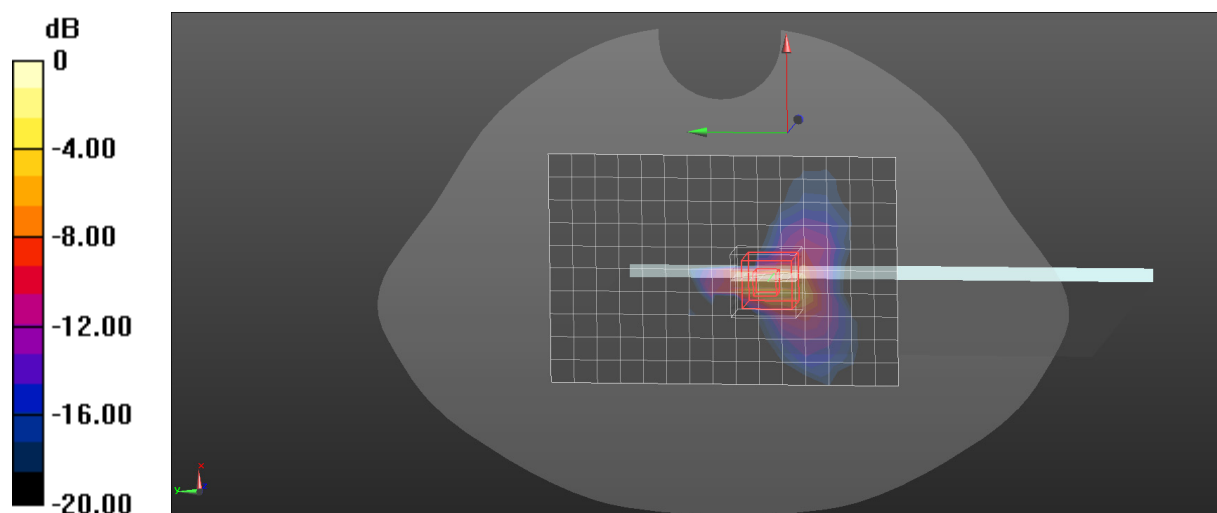

0 dB = 0.728 W/kg = -1.38 dBW/kg

Plot: 22#(Data:2026/08/13)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5510 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5510$ MHz; $\sigma = 4.957$ S/m; $\epsilon_r = 34.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5510 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.6G 802.11ac40 Low/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.00 W/kg

Body Bottom/WLAN 5.6G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.335 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 1.24 W/kg

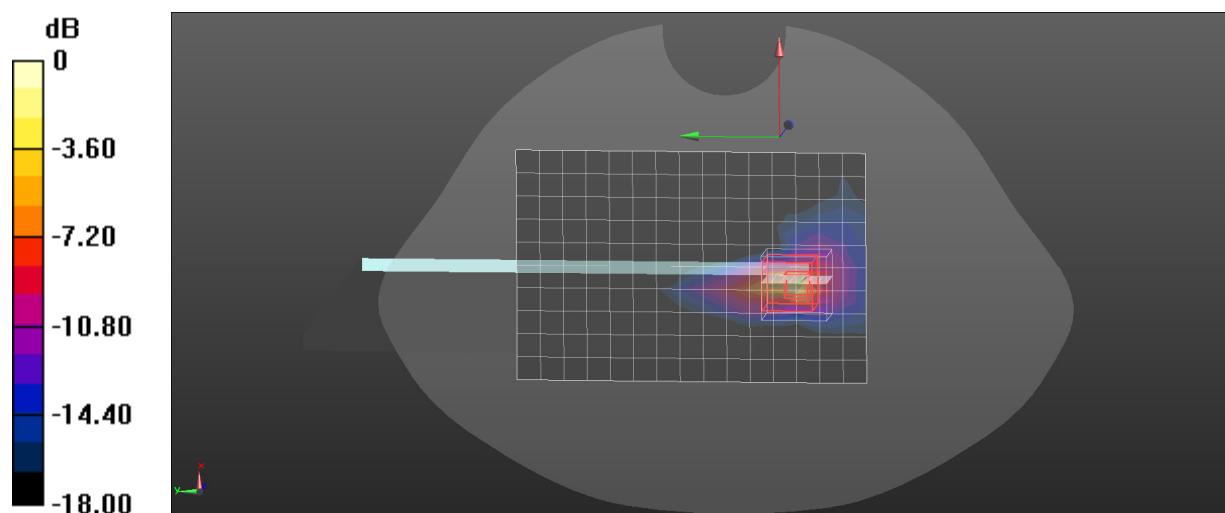

0 dB = 1.24 W/kg = 0.93 dBW/kg

Plot: 23#(Data:2026/08/14)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.367$ S/m; $\epsilon_r = 34.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5755 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.8G 802.11ac40 Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.17 W/kg

Body Front/WLAN 5.8G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.049 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 4.94 W/kg

SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 2.22 W/kg

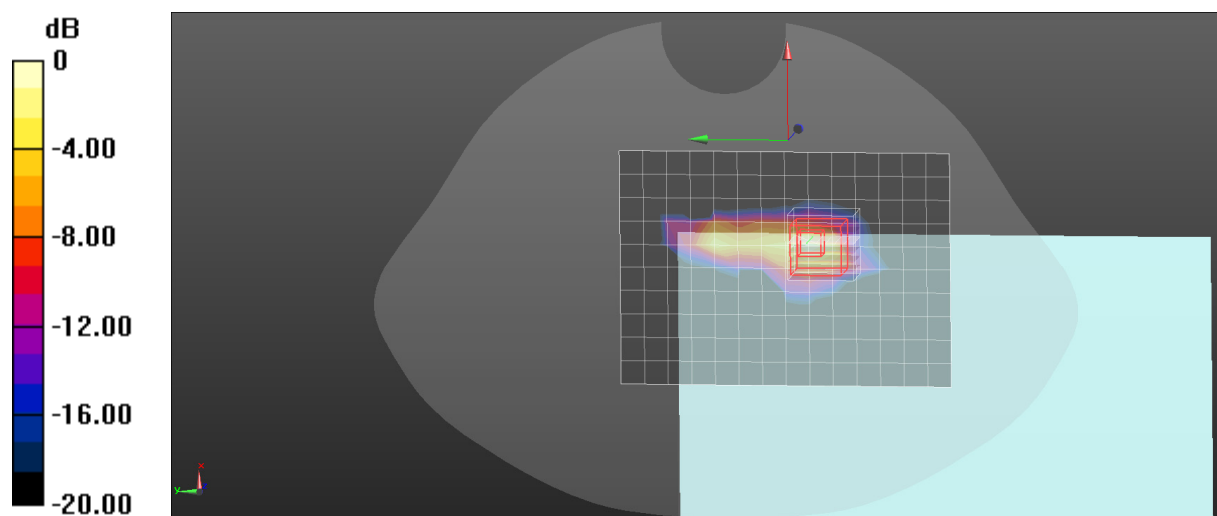

0 dB = 2.22 W/kg = 3.46 dBW/kg

Plot: 24#(Data:2026/08/14)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.367$ S/m; $\epsilon_r = 34.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5755 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11ac40 Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.02 W/kg

Body Back/WLAN 5.8G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.138 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 5.29 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 2.92 W/kg

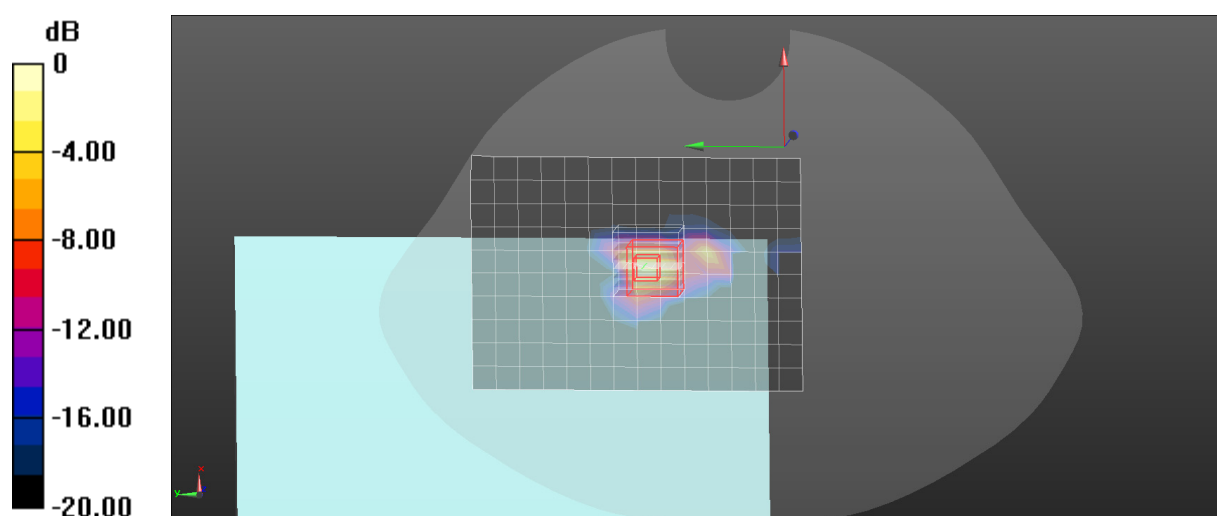

0 dB = 2.92 W/kg = 4.65 dBW/kg

Plot: 25#(Data:2026/08/14)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.396$ S/m; $\epsilon_r = 34.294$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5795 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11ac40 High/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.01 W/kg

Body Back/WLAN 5.8G 802.11ac40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.015 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 5.20 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 2.02 W/kg

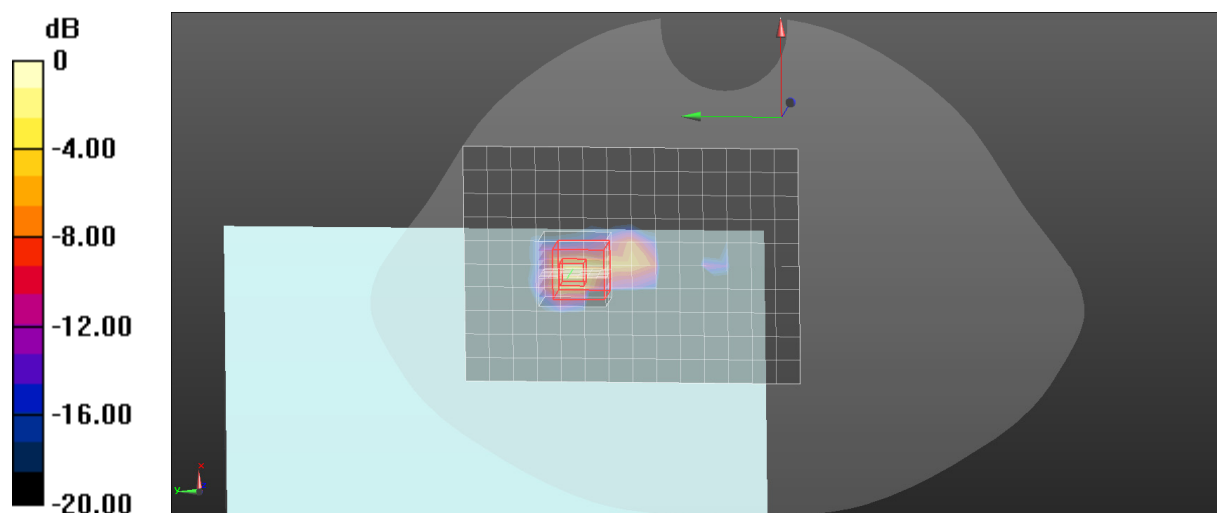

0 dB = 2.02 W/kg = 3.05 dBW/kg

Plot: 26#(Data:2026/08/14)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.367$ S/m; $\epsilon_r = 34.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5755 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/WLAN 5.8G 802.11ac40 Low/Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.324 W/kg

Body Left/WLAN 5.8G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.733 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 38.1%

Maximum value of SAR (measured) = 0.568 W/kg

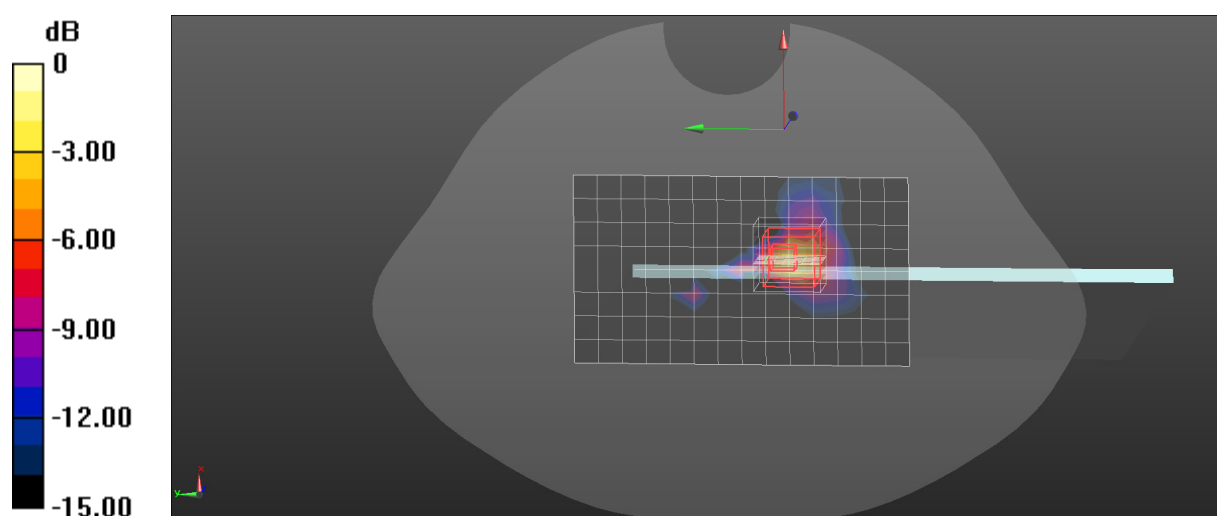

0 dB = 0.568 W/kg = -2.46 dBW/kg

Plot: 27#(Data:2026/08/14)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.367$ S/m; $\epsilon_r = 34.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5755 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.8G 802.11ac40 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.741 W/kg

Body Bottom/WLAN 5.8G 802.11ac40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.698 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 1.33 W/kg

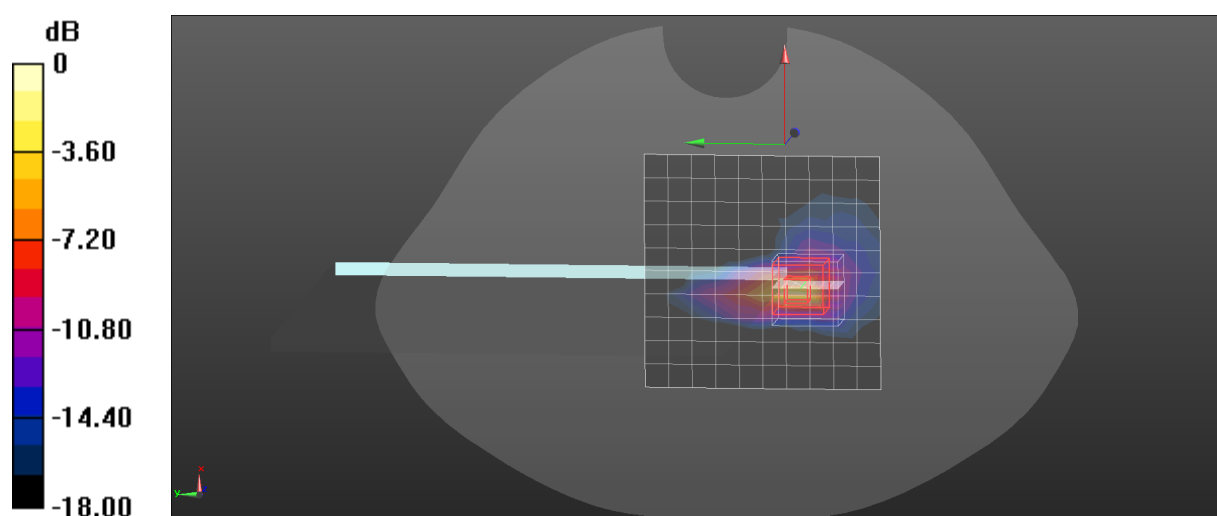

0 dB = 1.33 W/kg = 1.24 dBW/kg

Plot: 28#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 30A2-1

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2440 MHz;Duty Cycle: 1:1.461

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 39.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2440 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/BLE 1M(GFSK) Mid/Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.110 W/kg

Body Front/BLE 1M(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.058 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.103 W/kg

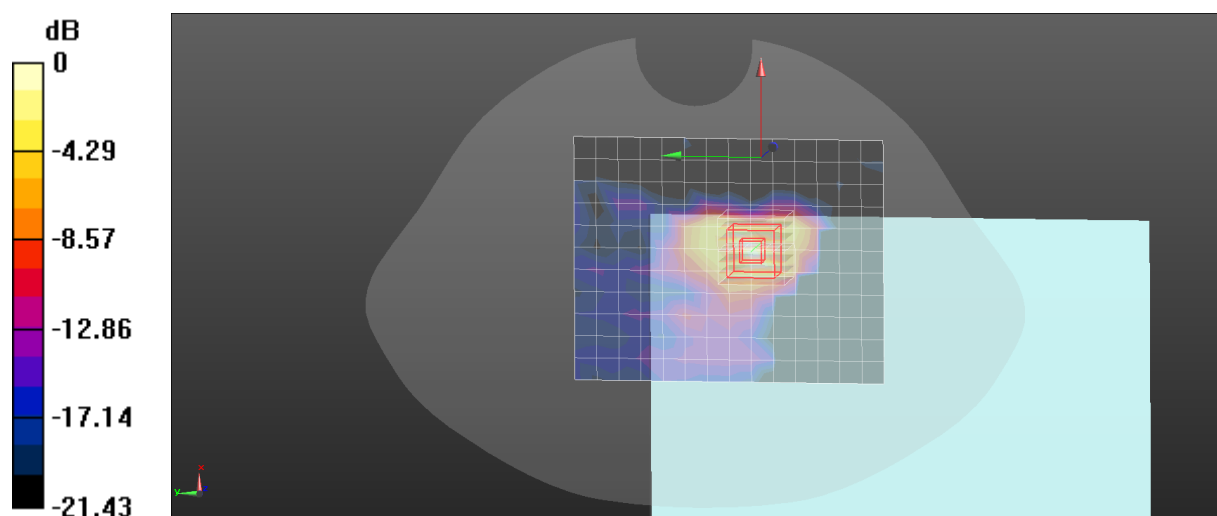

0 dB = 0.103 W/kg = -9.87 dBW/kg

Plot: 29#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2402 MHz;Duty Cycle: 1:1.461

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.706$ S/m; $\epsilon_r = 39.433$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2402 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/BLE 1M(GFSK) Low/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0630 W/kg

Body Back/BLE 1M(GFSK) Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.359 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.0634 W/kg

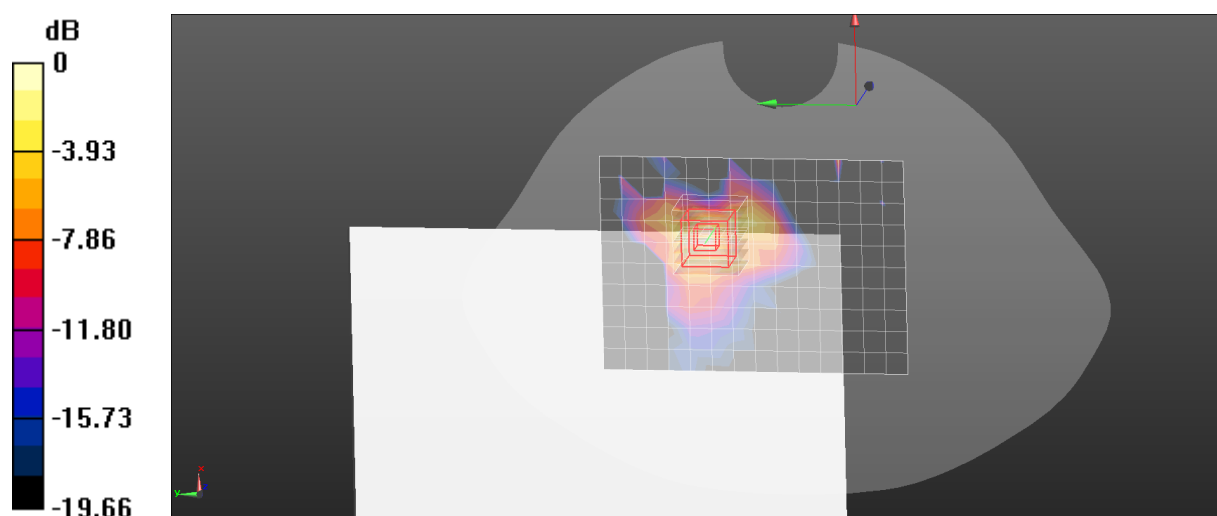

0 dB = 0.0634 W/kg = -11.98 dBW/kg

Plot: 30#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2440 MHz;Duty Cycle: 1:1.461

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 39.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2440 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/BLE 1M(GFSK) Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.120 W/kg

Body Back/BLE 1M(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.740 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 0.125 W/kg

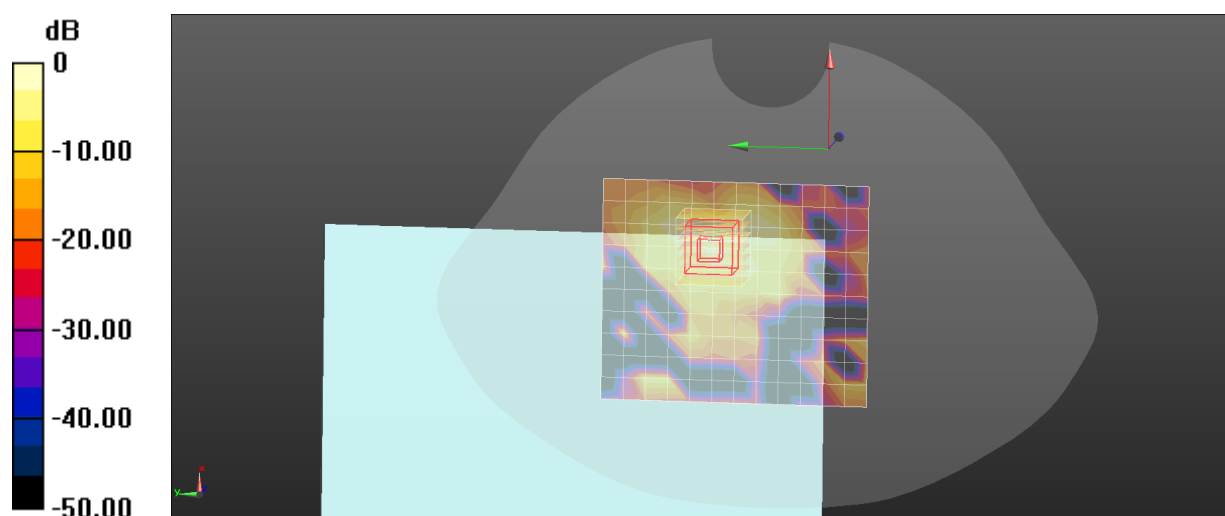

Plot: 31#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2480 MHz;Duty Cycle: 1:1.461

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2480 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/BLE 1M(GFSK) High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0639 W/kg

Body Back/BLE 1M(GFSK) High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.213 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.0740 W/kg

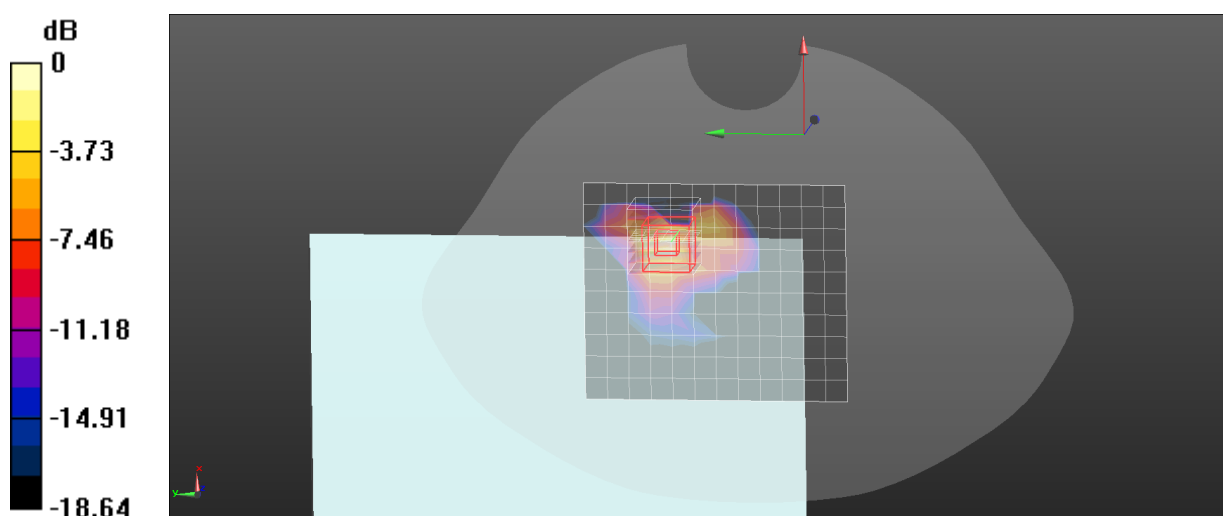

0 dB = 0.0740 W/kg = -11.31 dBW/kg

Plot: 32#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2440 MHz;Duty Cycle: 1:1.461

Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.769 \text{ S/m}$; $\epsilon_r = 39.358$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2440 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/BLE 1M(GFSK) Mid/Area Scan (11x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0469 W/kg

Body Left/BLE 1M(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.678 V/m ; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.013 W/kg ; SAR(10 g) = 0.00421 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 15 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.0415 W/kg

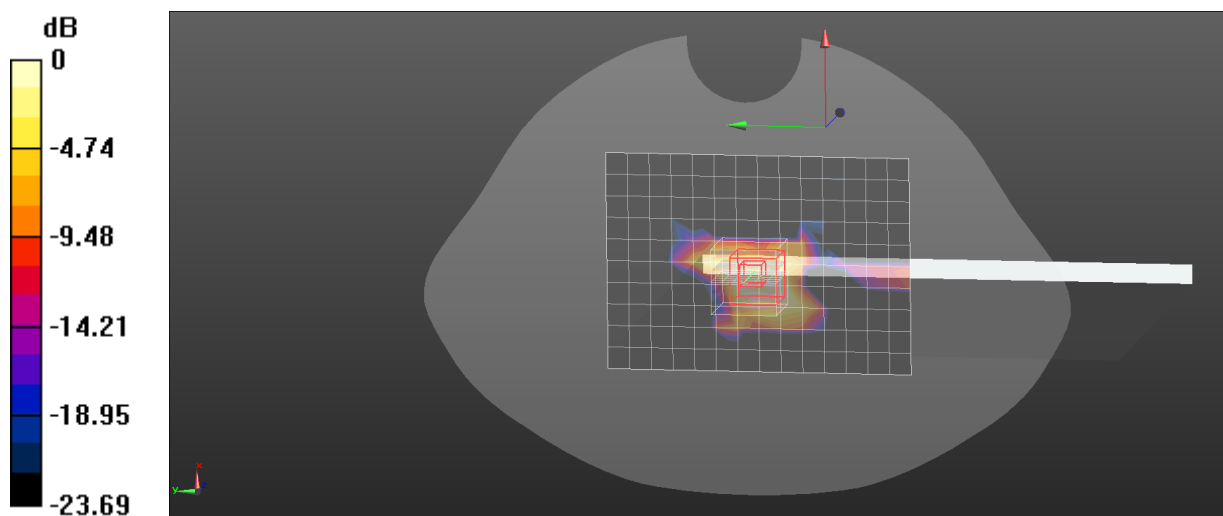

0 dB = 0.0415 W/kg = -13.82 dBW/kg

Plot: 33#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2440 MHz;Duty Cycle: 1:1.461

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 39.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2440 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/BLE 1M(GFSK) Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.00670 W/kg

Body Bottom/BLE 1M(GFSK) Mid/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 2.835 V/m; Power Drift = 0.10 dB

Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR = 0 W/kg

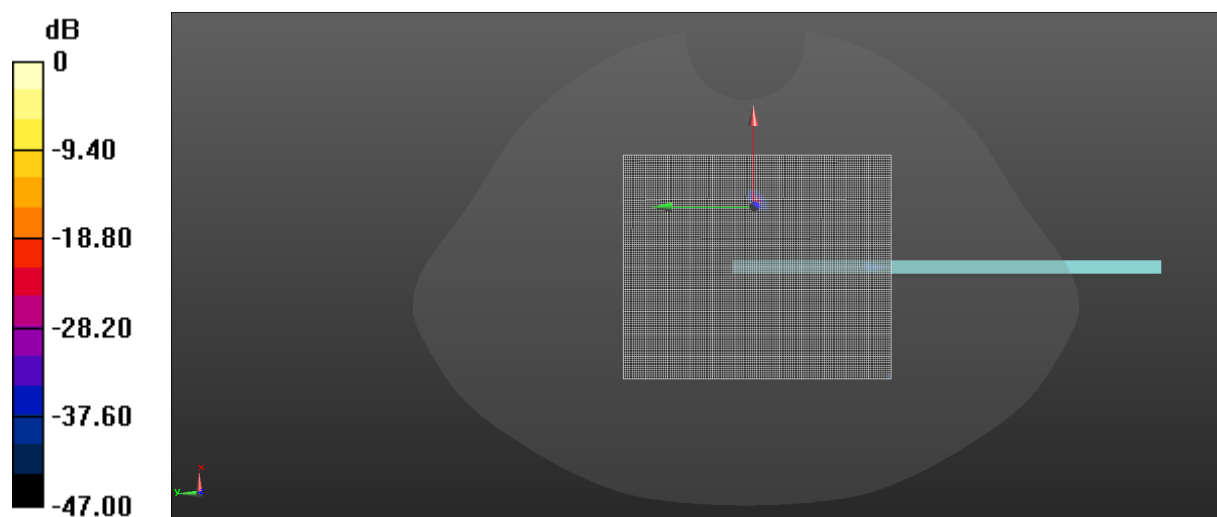

0 dB = 0 W/kg = -999.00 dBW/kg

Plot: 34#(Data:2026/08/09)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 39.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11g Low Repeated/Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.68 W/kg

Body Back/WLAN 802.11g Low Repeated/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.731 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

Maximum value of SAR (measured) = 1.76 W/kg

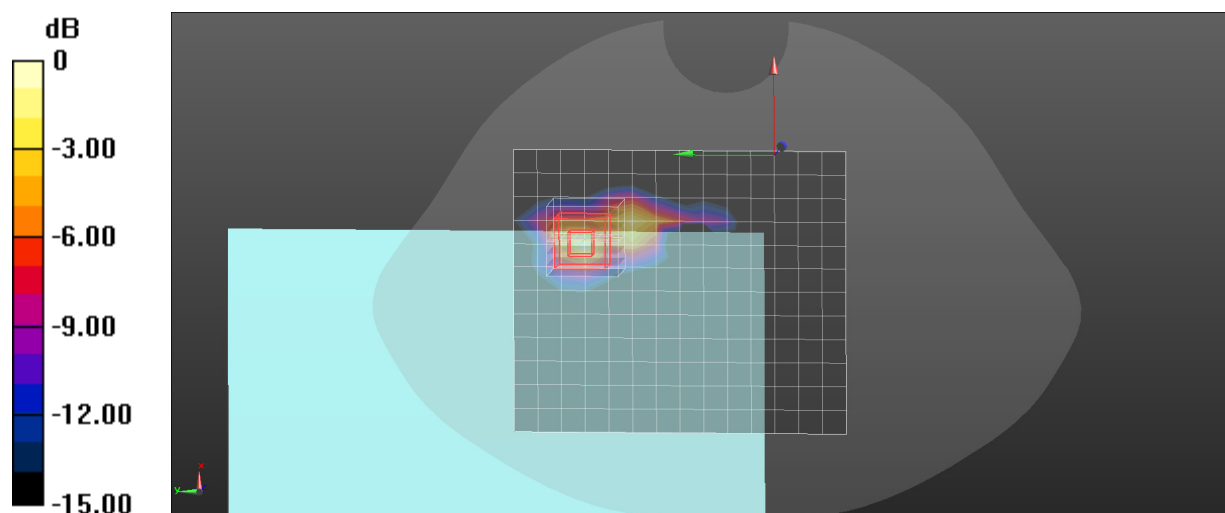

0 dB = 1.76 W/kg = 2.46 dBW/kg

Plot: 35#(Data:2026/08/12)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5310 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.671$ S/m; $\epsilon_r = 34.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5310 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11ac40 High Repeated/Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.60 W/kg

Body Back/WLAN 5.3G 802.11ac40 High Repeated/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.674 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 4.61 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 2.45 W/kg

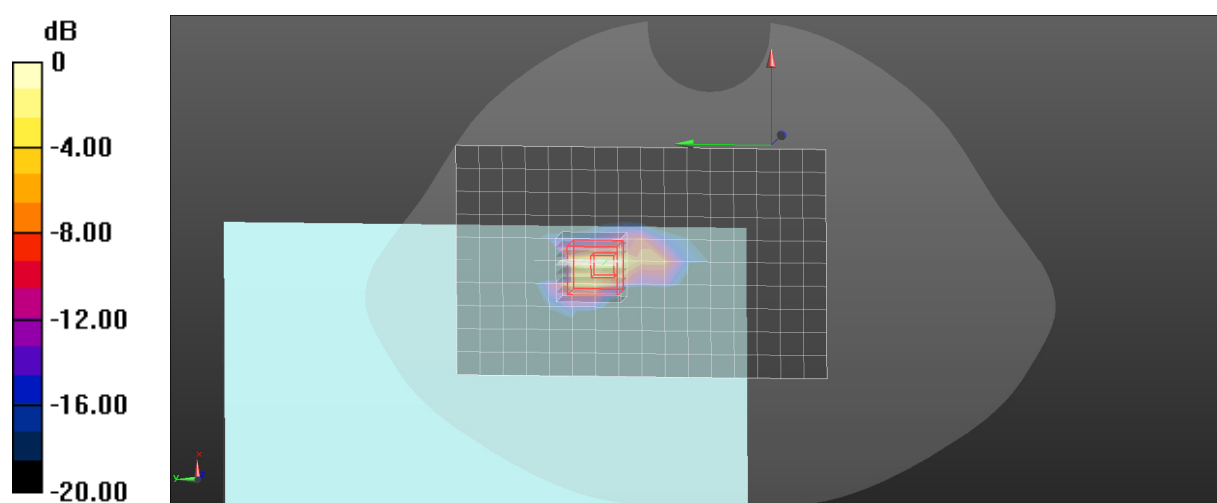

0 dB = 2.45 W/kg = 3.89 dBW/kg

Plot: 36#(Data:2026/08/14)

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Air6 C; Serial: 3OA2-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.004

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.367$ S/m; $\epsilon_r = 34.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5755 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11ac40 Low Repeated/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.74 W/kg

Body Back/WLAN 5.8G 802.11ac40 Low Repeated/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.359 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.97 W/kg

SAR(1 g) = 0.983 W/kg; SAR(10 g) = 0.246 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 2.74 W/kg

