

Plot: 1#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 38.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2437 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.250 W/kg

Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.04 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.2%

Maximum value of SAR (measured) = 0.310 W/kg

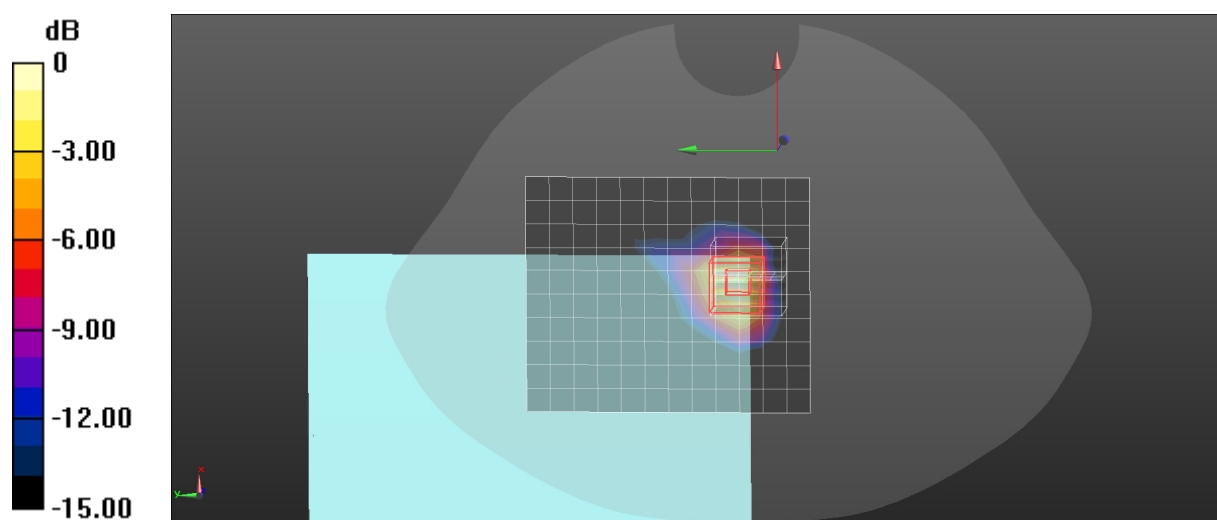

0 dB = 0.310 W/kg = -5.09 dBW/kg

Plot: 2#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.799$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Low/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.38 W/kg

Body Back/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.37 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 1.63 W/kg

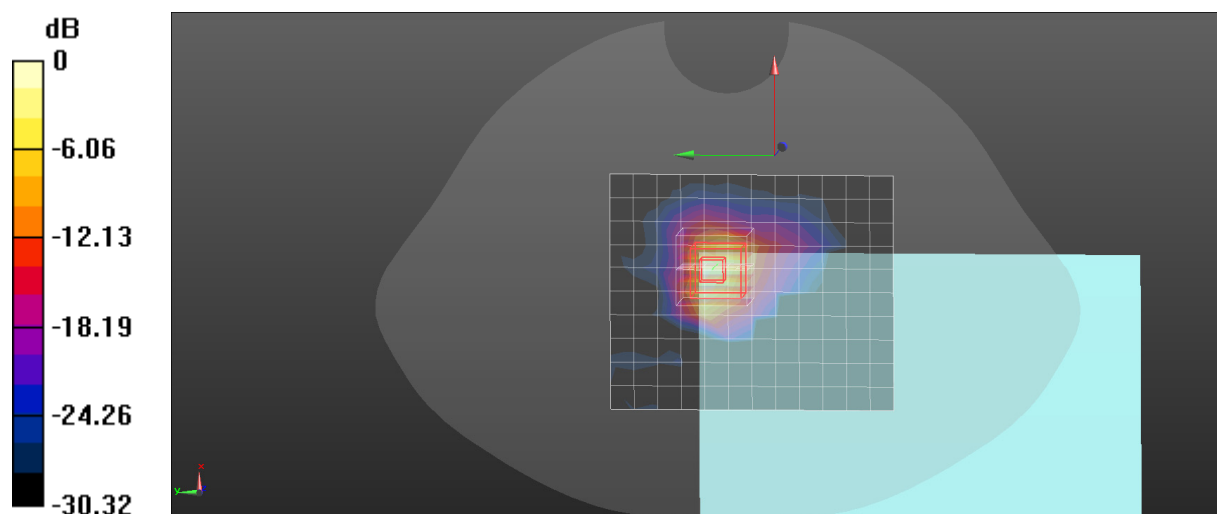

0 dB = 1.63 W/kg = 2.12 dBW/kg

Plot: 3#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 38.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2437 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.37 W/kg

Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.05 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 42.2%

Maximum value of SAR (measured) = 1.45 W/kg

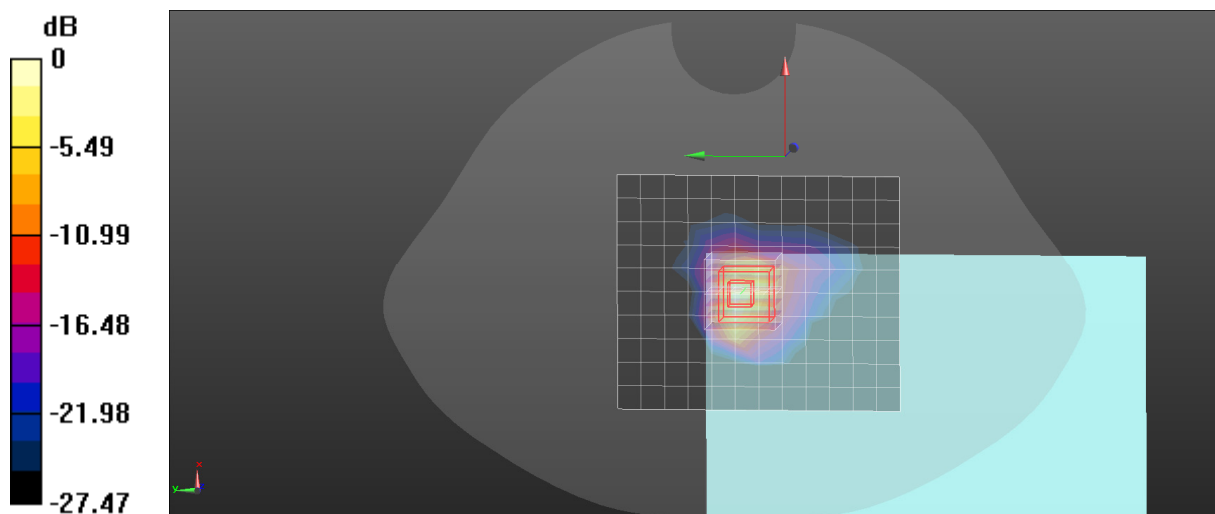

0 dB = 1.45 W/kg = 1.61 dBW/kg

Plot: 4#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 38.734$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2462 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.929 W/kg

Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.85 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 0.909 W/kg

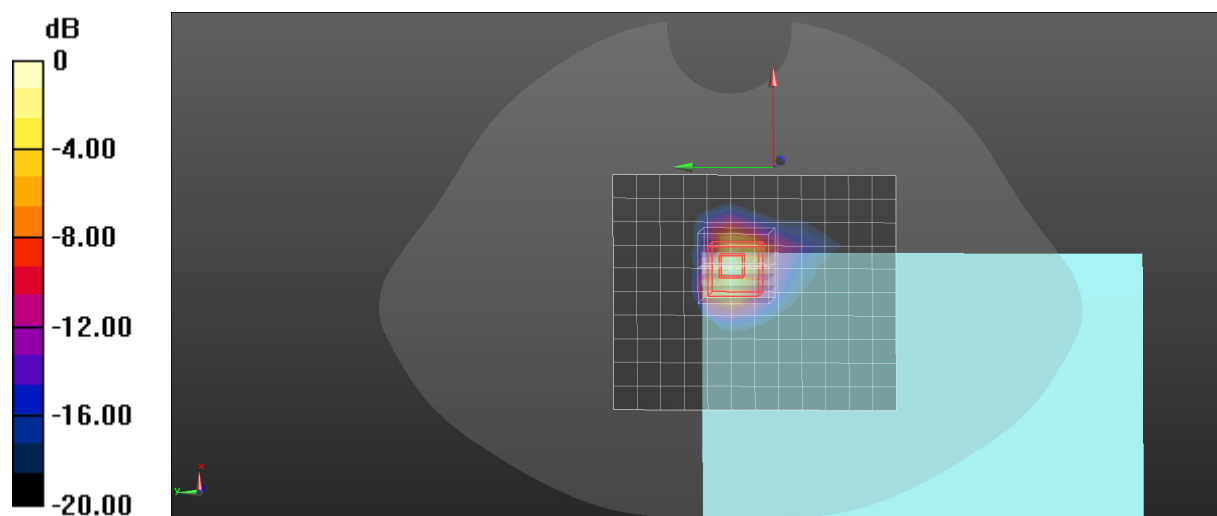

0 dB = 0.909 W/kg = -0.41 dBW/kg

Plot: 5#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 38.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2437 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 802.11b Mid/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0232 W/kg

Body Right/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.050 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00327 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.0208 W/kg

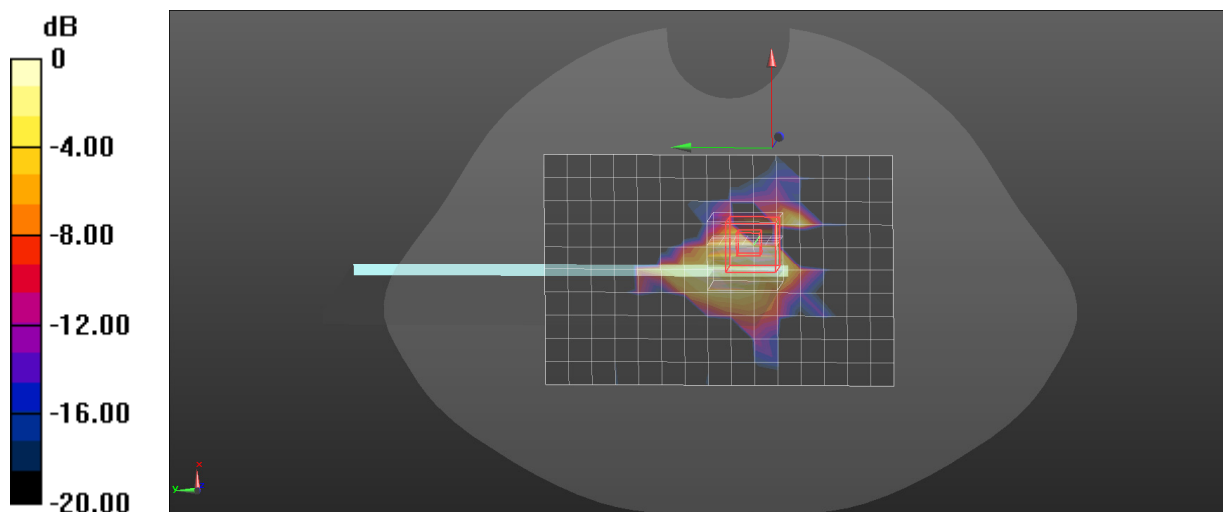

0 dB = 0.0208 W/kg = -16.82 dBW/kg

Plot: 6#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 38.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2437 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 802.11b Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0181 W/kg

Body Bottom/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9790 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.00516 W/kg; SAR(10 g) = 0.00143 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.0192 W/kg

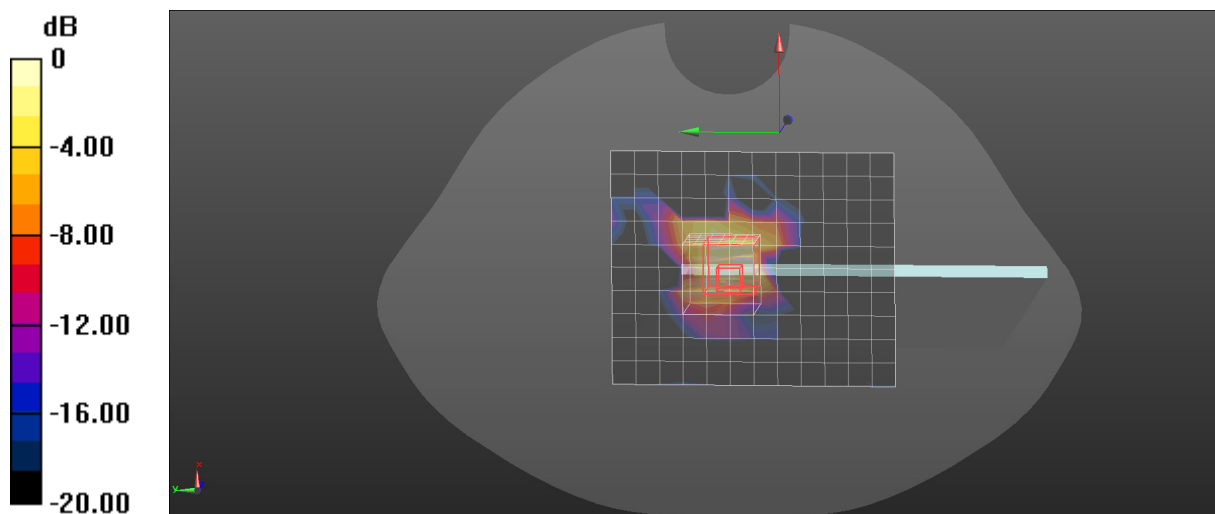

0 dB = 0.0192 W/kg = -17.17 dBW/kg

Plot: 7#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 36.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5200 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.2G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0834 W/kg

Body Front/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.537 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00882 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 39%

Maximum value of SAR (measured) = 0.104 W/kg

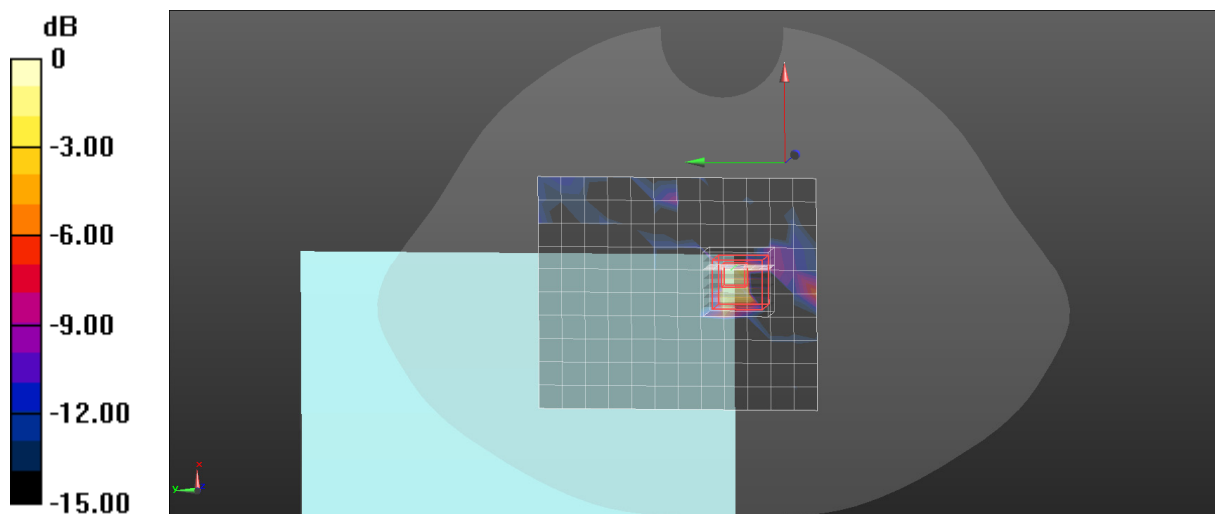

0 dB = 0.104 W/kg = -9.83 dBW/kg

Plot: 8#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.51$ S/m; $\epsilon_r = 37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5180 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11a Low/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.67 W/kg

Body Back/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.097 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 5.24 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 2.96 W/kg

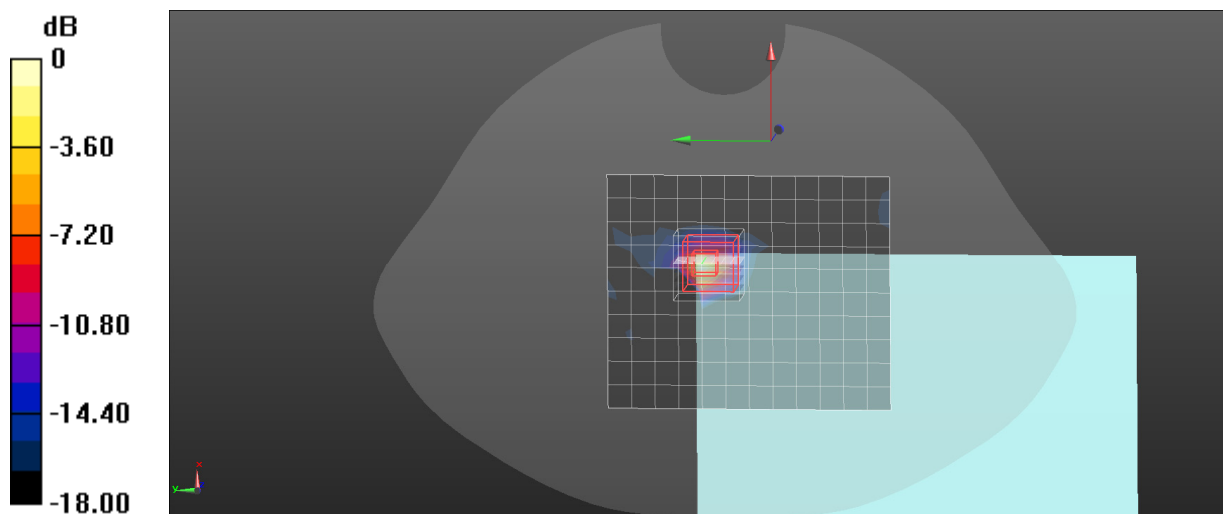

0 dB = 2.96 W/kg = 4.71 dBW/kg

Plot: 9#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 36.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5200 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.13 W/kg

Body Back/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.079 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 5.40 W/kg

SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 2.81 W/kg

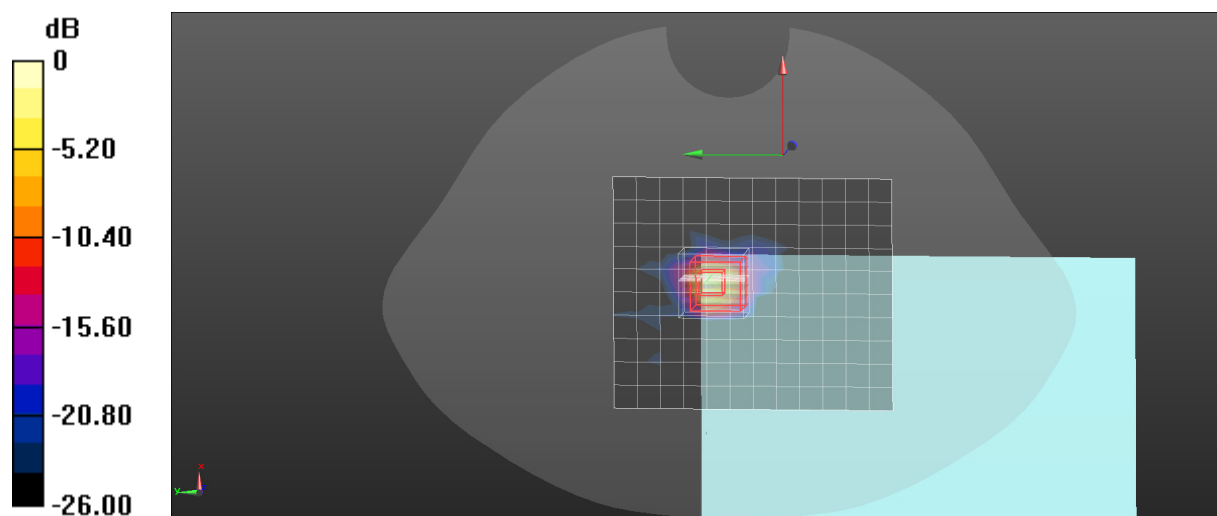

0 dB = 2.81 W/kg = 4.49 dBW/kg

Plot: 10#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.894$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5240 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.44 W/kg

Body Back/WLAN 5.2G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.745 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 6.32 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 3.20 W/kg

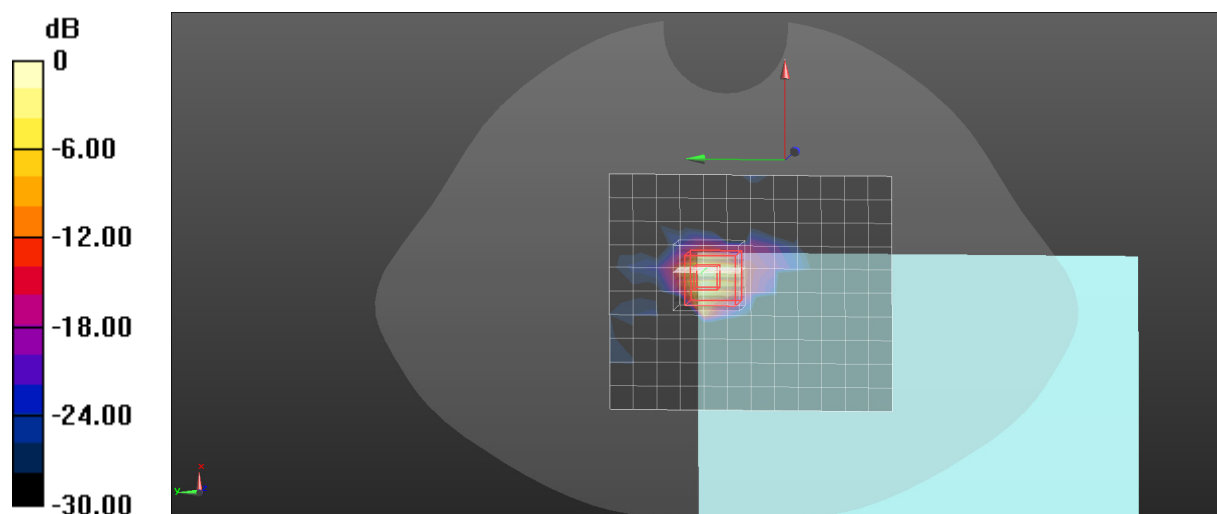

0 dB = 3.20 W/kg = 5.05 dBW/kg

Plot: 11#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 36.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5200 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 5.2G 802.11a Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0552 W/kg

Body Right/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.754 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 71.7%

Maximum value of SAR (measured) = 0.0608 W/kg

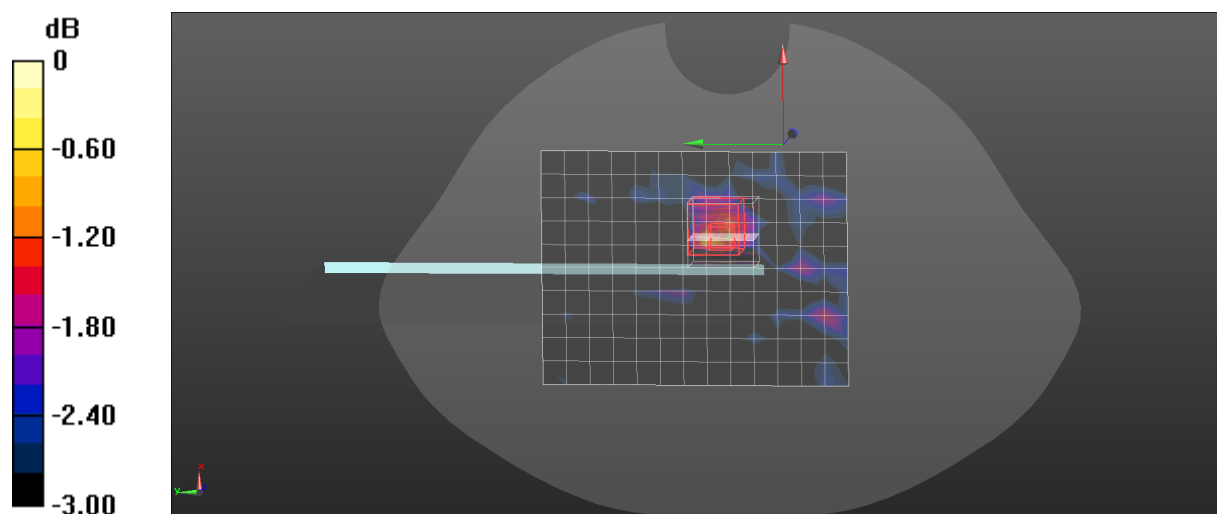

0 dB = 0.0608 W/kg = -12.16 dBW/kg

Plot: 12#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 36.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5200 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0696 W/kg

Body Bottom/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.786 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00637 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.0717 W/kg

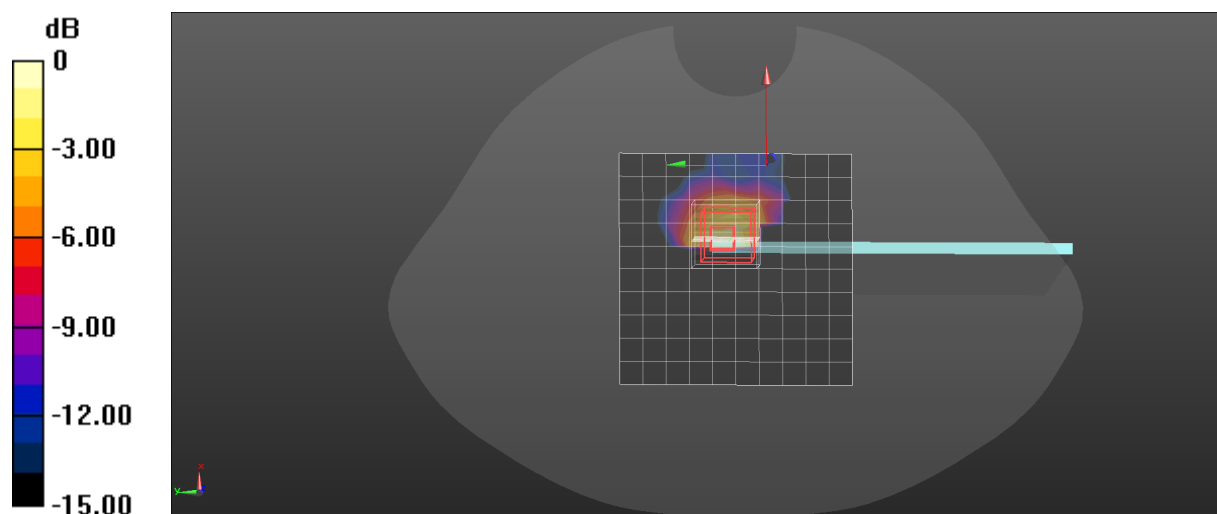

0 dB = 0.0717 W/kg = -11.44 dBW/kg

Plot: 13#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.823$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5280 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.3G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.114 W/kg

Body Front/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.753 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.00972 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 36.4%

Maximum value of SAR (measured) = 0.116 W/kg

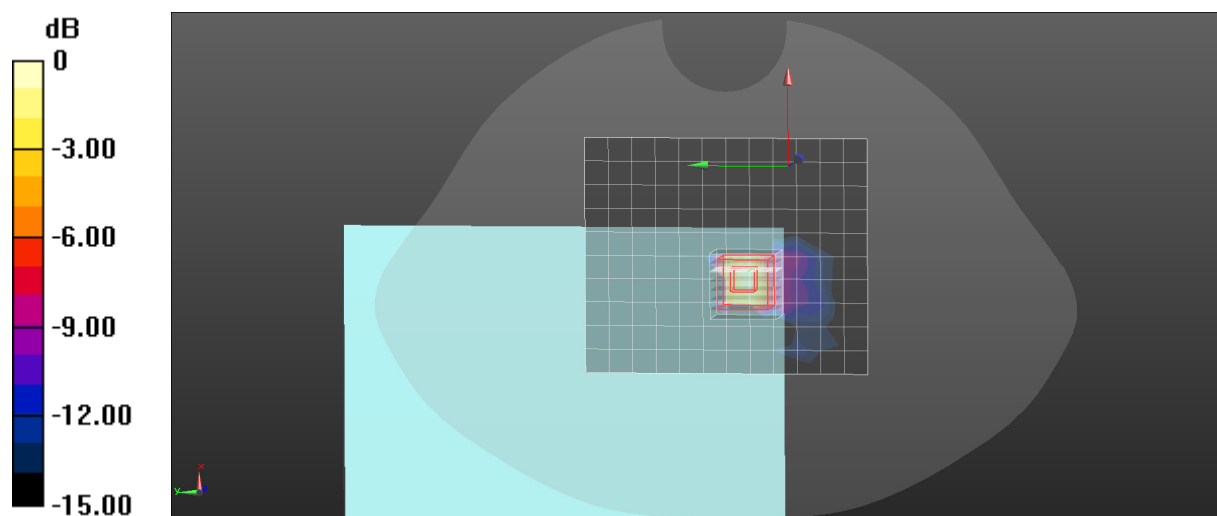

0 dB = 0.116 W/kg = -9.36 dBW/kg

Plot: 14#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.654$ S/m; $\epsilon_r = 36.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5260 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11a Low/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.98 W/kg

Body Back/WLAN 5.3G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.714 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 4.40 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 2.10 W/kg

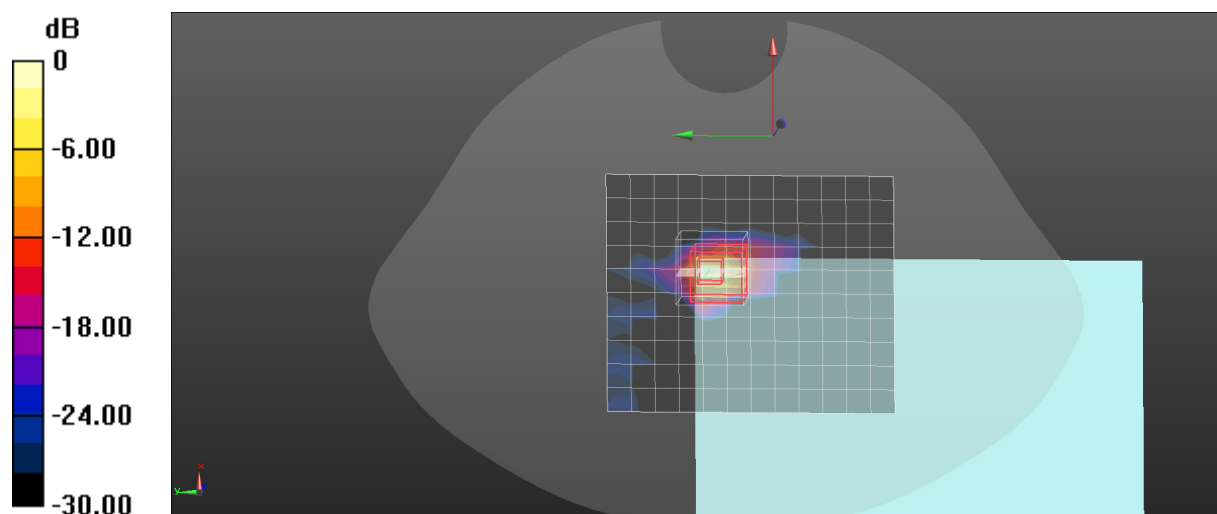

0 dB = 2.10 W/kg = 3.22 dBW/kg

Plot: 15#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.823$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5280 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.47 W/kg

Body Back/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.44 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 4.90 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 2.58 W/kg

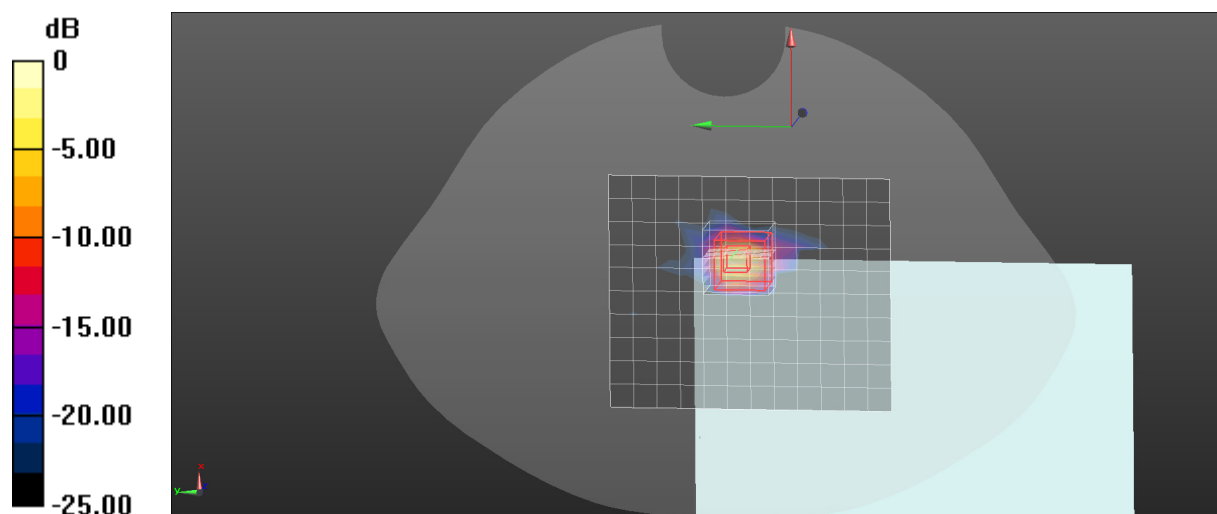

0 dB = 2.58 W/kg = 4.12 dBW/kg

Plot: 16#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.762 \text{ S/m}$; $\epsilon_r = 36.752$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5320 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11a High/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.80 W/kg

Body Back/WLAN 5.3G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 11.73 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 6.24 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 3.20 W/kg

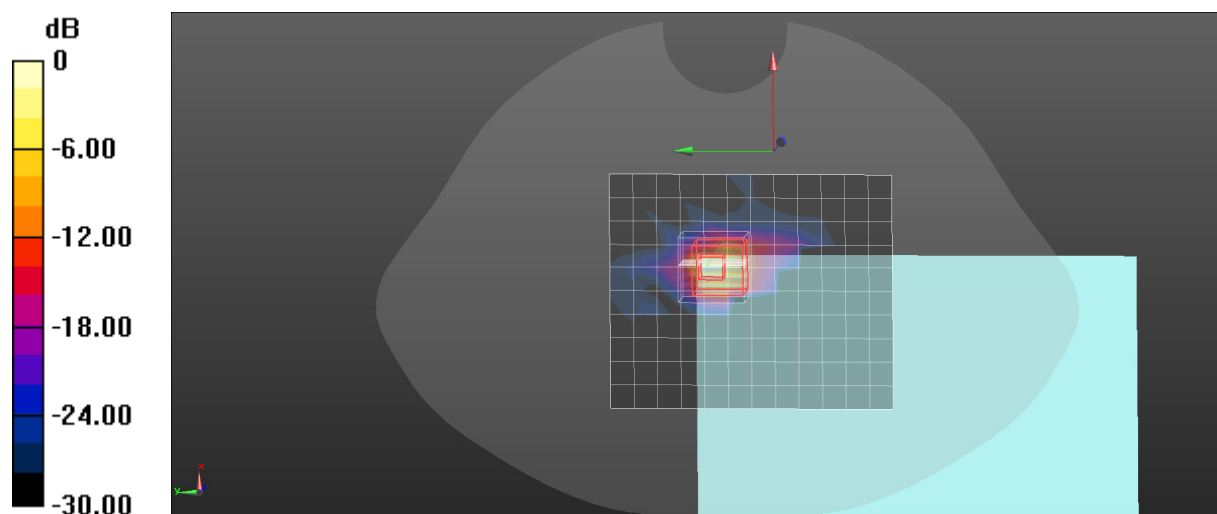

0 dB = 3.20 W/kg = 5.05 dBW/kg

Plot: 17#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.823$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5280 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 5.3G 802.11a Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.106 W/kg

Body Right/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.209 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.207 W/kg

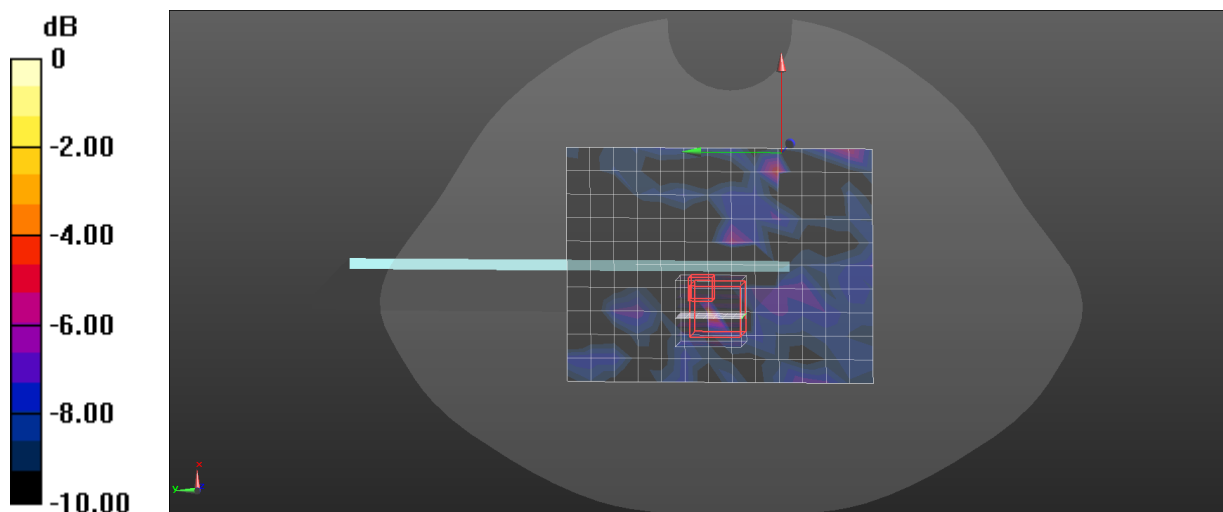

0 dB = 0.207 W/kg = -6.84 dBW/kg

Plot: 18#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.823$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5280 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.3G 802.11a Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.184 W/kg

Body Bottom/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.015 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.0061 W/kg; SAR(10 g) = 0.000931 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.836 W/kg

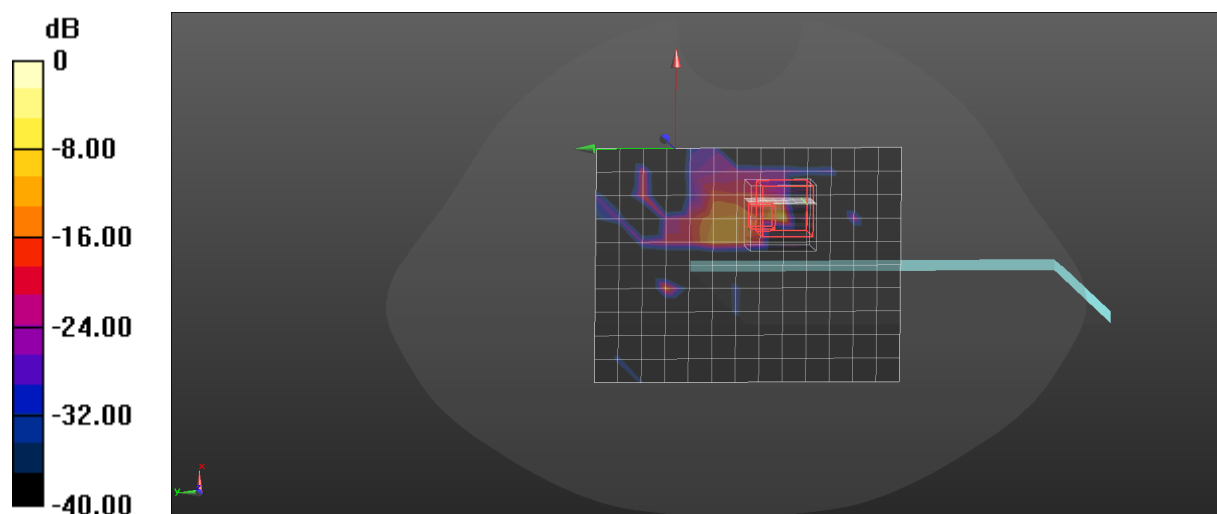

0 dB = 0.836 W/kg = -0.78 dBW/kg

Plot: 19#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5600 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.996$ S/m; $\epsilon_r = 36.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5600 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.6G 802.11a Mid/Area Scan (13x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0471 W/kg

Body Front/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7100 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00319 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.0523 W/kg

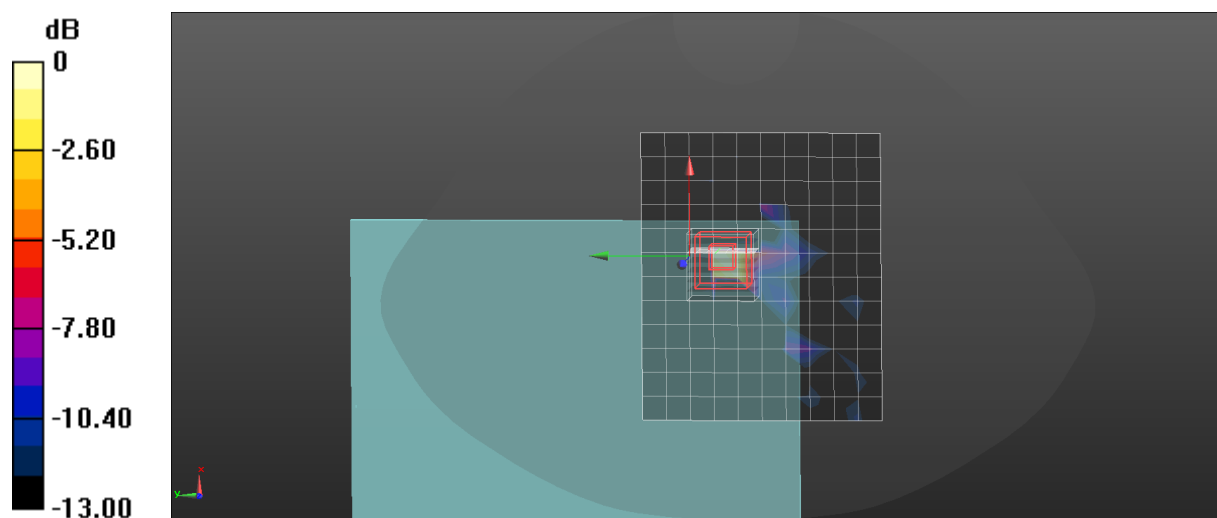

0 dB = 0.0523 W/kg = -12.81 dBW/kg

Plot: 20#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.885$ S/m; $\epsilon_r = 36.867$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5500 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11a Low/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.18 W/kg

Body Back/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.14 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 5.68 W/kg

SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 2.70 W/kg

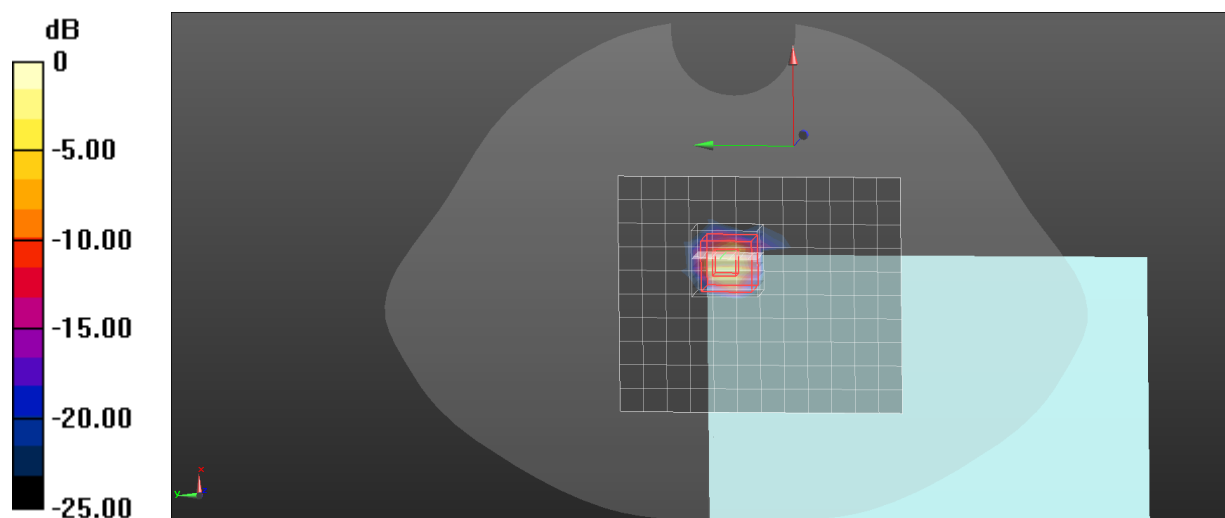

0 dB = 2.70 W/kg = 4.31 dBW/kg

Plot: 21#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5600 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.996$ S/m; $\epsilon_r = 36.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5600 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.53 W/kg

Body Back/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.889 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 4.63 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 2.34 W/kg

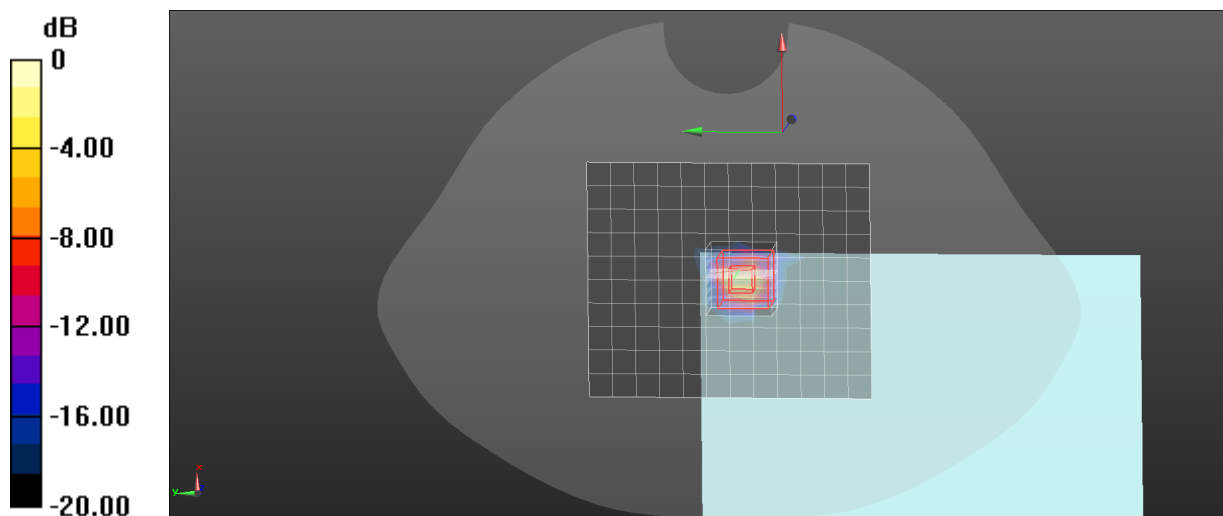

0 dB = 2.34 W/kg = 3.69 dBW/kg

Plot: 22#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5700 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.108$ S/m; $\epsilon_r = 36.287$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5700 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.02 W/kg

Body Back/WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.143 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 7.05 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 2.98 W/kg

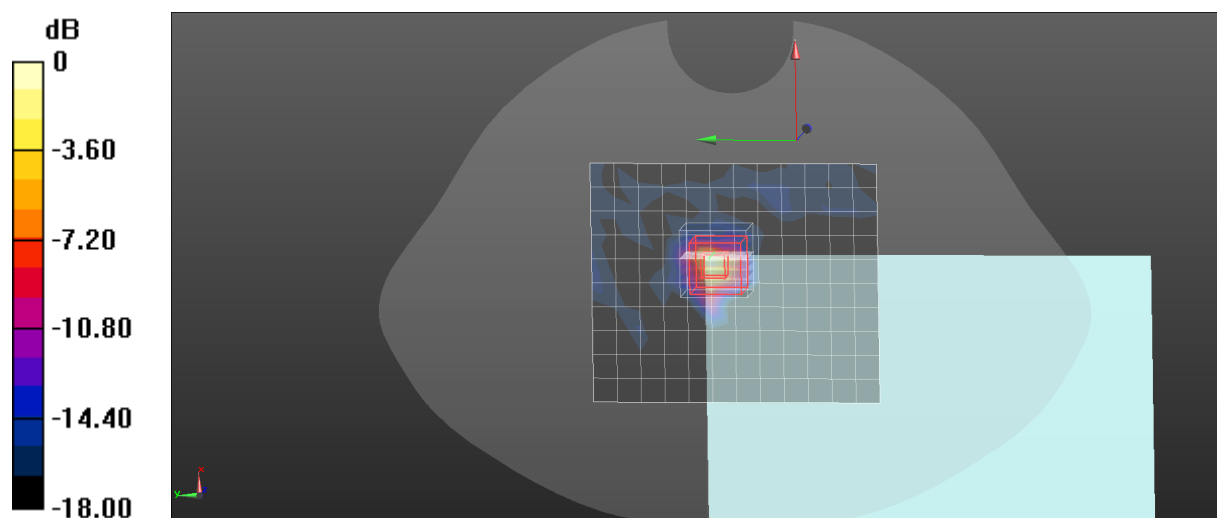

0 dB = 2.98 W/kg = 4.74 dBW/kg

Plot: 23#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5600 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.996$ S/m; $\epsilon_r = 36.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5600 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 5.6G 802.11a Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0224 W/kg

Body Right/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.919 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.00674 W/kg; SAR(10 g) = 0.00101 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.0425 W/kg

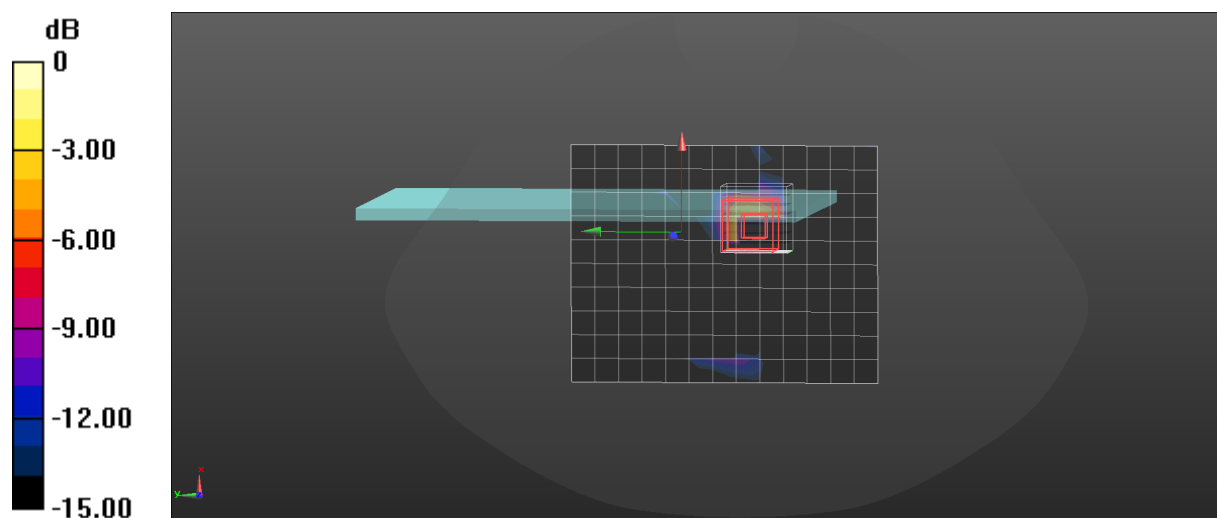

0 dB = 0.0425 W/kg = -13.72 dBW/kg

Plot: 24#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5600 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.996$ S/m; $\epsilon_r = 36.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5600 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.6G 802.11a Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0572 W/kg

Body Bottom/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.224 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00458 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.0687 W/kg

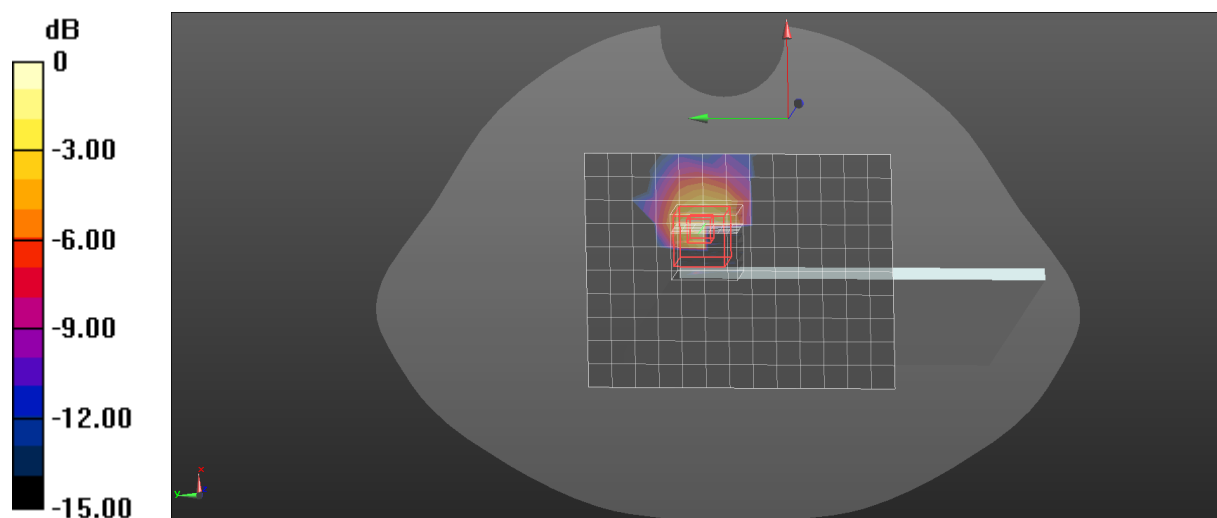

0 dB = 0.0687 W/kg = -11.63 dBW/kg

Plot: 25#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.332 \text{ S/m}$; $\epsilon_r = 35.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5785 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.133 W/kg

Body Front/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.667 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.021 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 14 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 79.6%

Maximum value of SAR (measured) = 0.116 W/kg

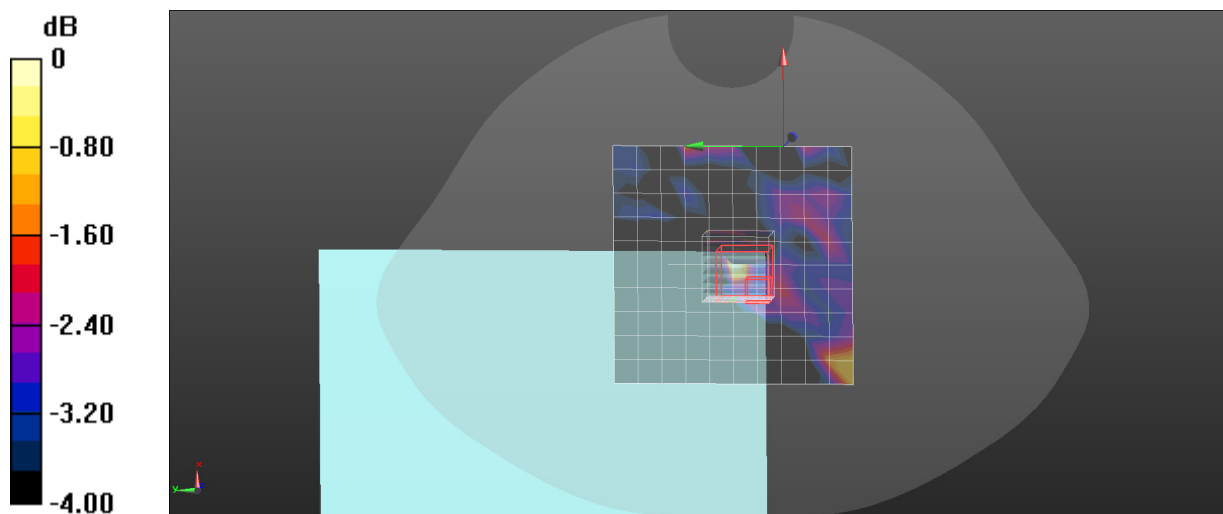

0 dB = 0.116 W/kg = -9.36 dBW/kg

Plot: 26#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.306 \text{ S/m}$; $\epsilon_r = 35.225$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5745 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a Low/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.72 W/kg

Body Back/WLAN 5.8G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.810 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 3.11 W/kg

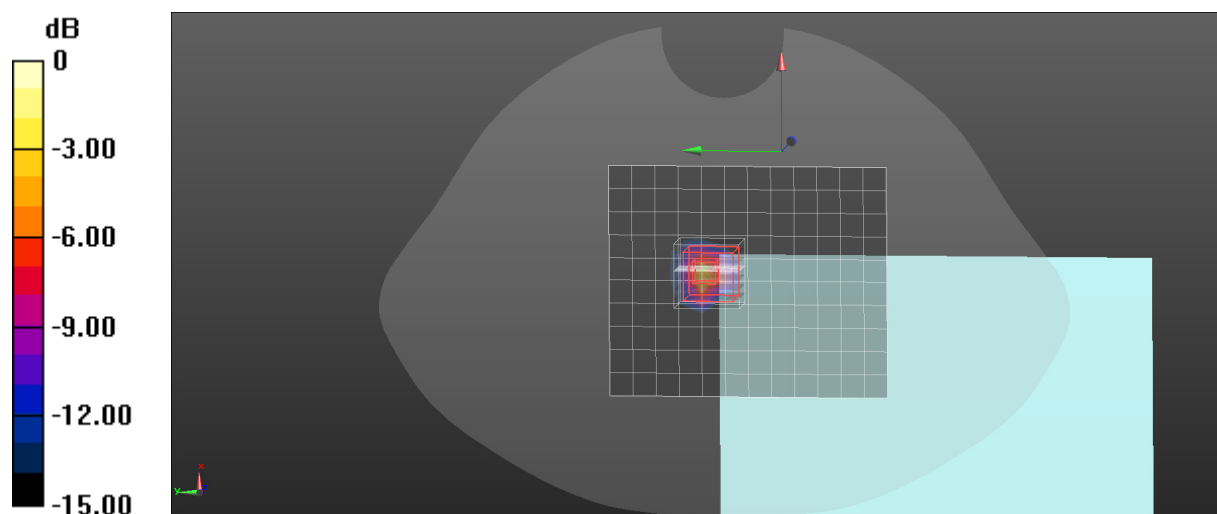

0 dB = 3.11 W/kg = 4.93 dBW/kg

Plot: 27#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.332$ S/m; $\epsilon_r = 35.186$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5785 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.12 W/kg

Body Back/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.966 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 6.35 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 2.88 W/kg

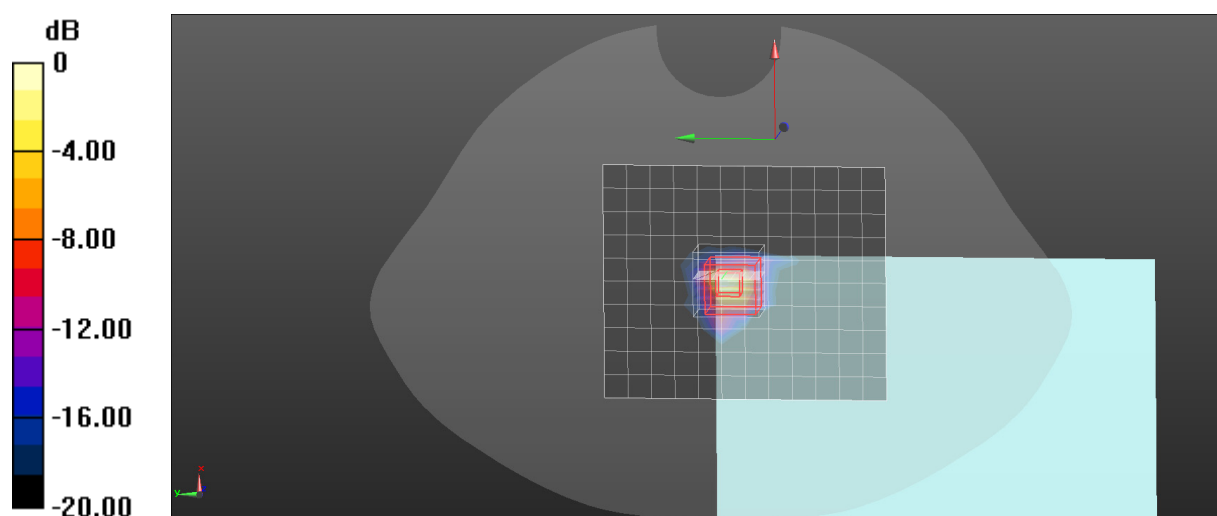

0 dB = 2.88 W/kg = 4.59 dBW/kg

Plot: 28#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.357$ S/m; $\epsilon_r = 35.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5825 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.63 W/kg

Body Back/WLAN 5.8G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.895 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 7.76 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 3.72 W/kg

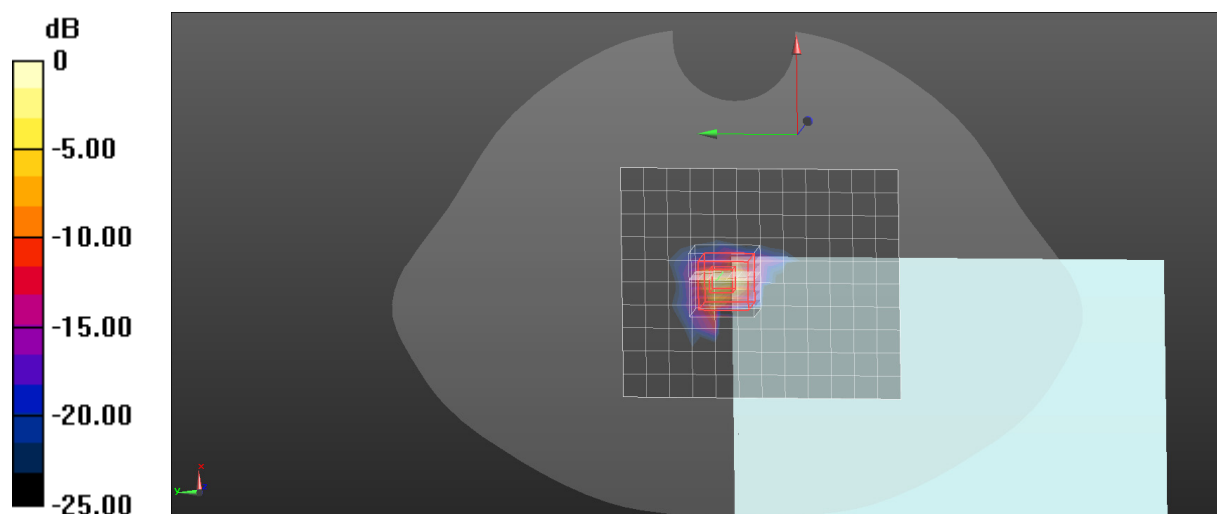

0 dB = 3.72 W/kg = 5.71 dBW/kg

Plot: 29#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.332 \text{ S/m}$; $\epsilon_r = 35.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5785 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Right/WLAN 5.8G 802.11a Mid/Area Scan (11x14x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0531 W/kg

Body Right/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.432 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00205 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 14 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.0707 W/kg

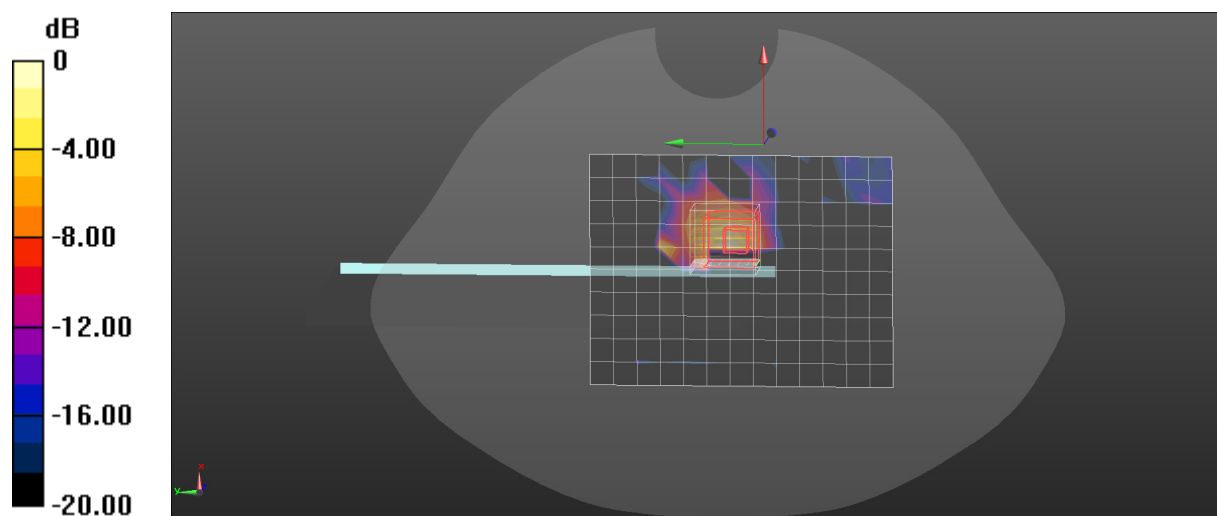

0 dB = 0.0707 W/kg = -11.51 dBW/kg

Plot: 30#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.332 \text{ S/m}$; $\epsilon_r = 35.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5785 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/WLAN 5.8G 802.11a Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.126 W/kg

Body Bottom/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.148 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 44%

Maximum value of SAR (measured) = 0.137 W/kg

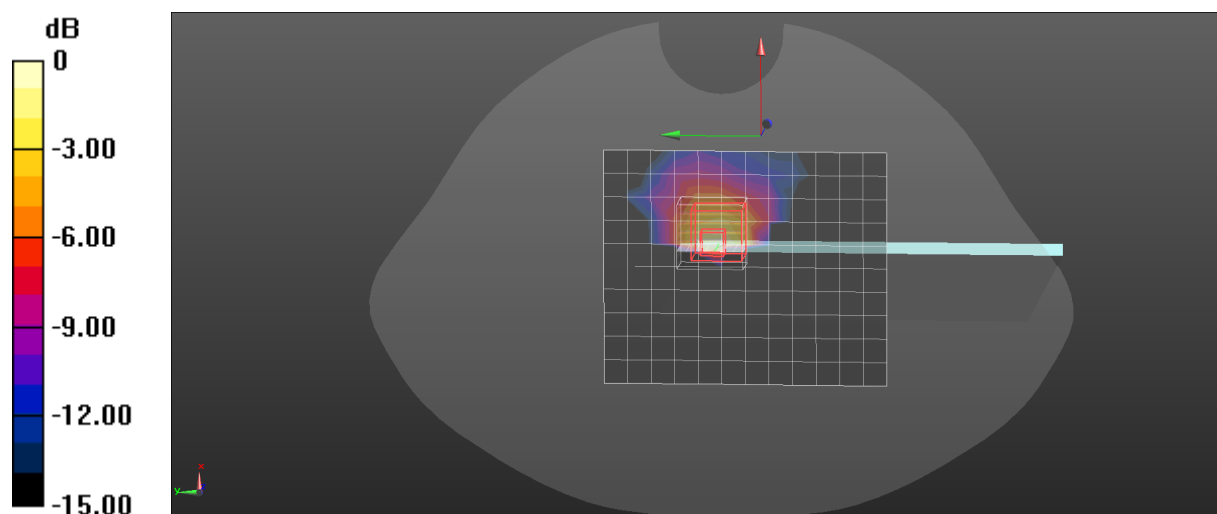

0 dB = 0.137 W/kg = -8.63 dBW/kg

Plot: 31#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.002

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.799$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Repeated WLAN 802.11b Low/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.40 W/kg

Body Back/Repeated WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.39 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.2%

Maximum value of SAR (measured) = 1.46 W/kg

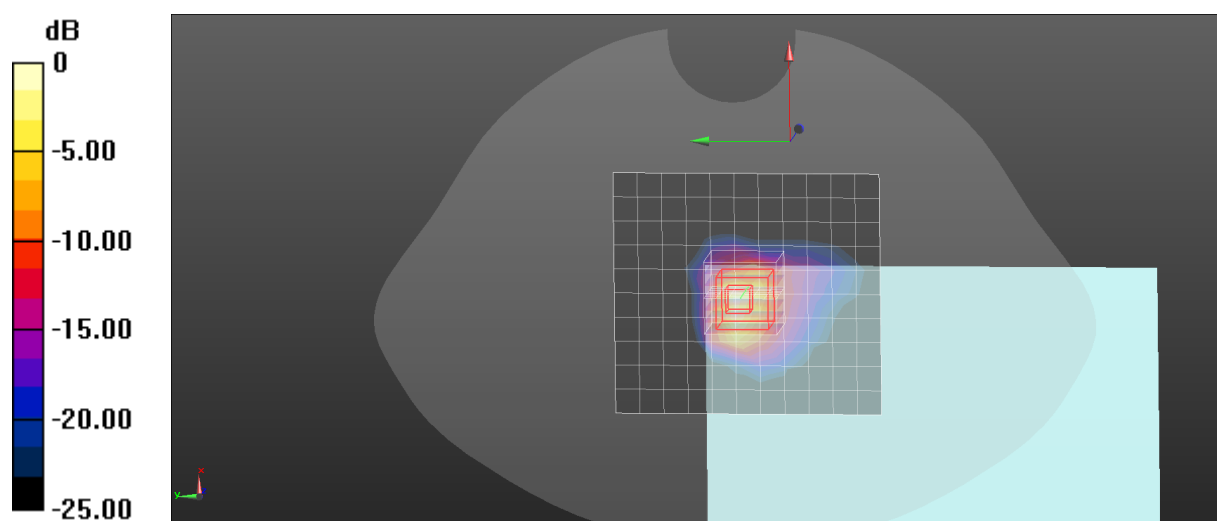

0 dB = 1.46 W/kg = 1.64 dBW/kg

Plot: 32#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.894$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5240 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Repeated WLAN 5.2G 802.11a High/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.87 W/kg

Body Back/Repeated WLAN 5.2G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 15.53 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 6.52 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.261 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 3.38 W/kg

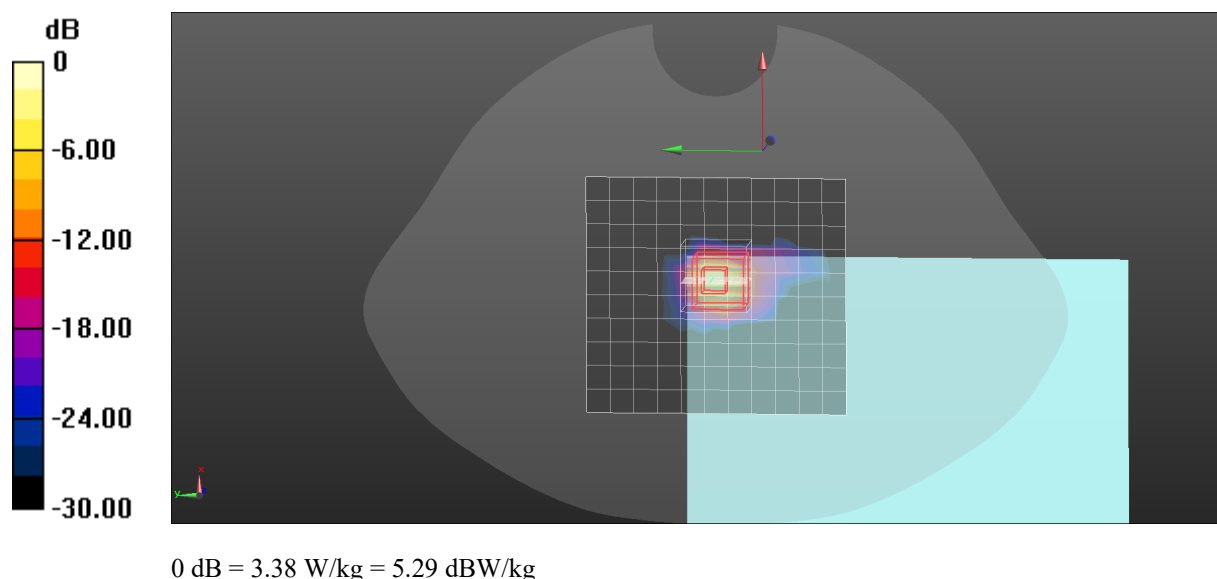

Plot: 33#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.762$ S/m; $\epsilon_r = 36.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.11, 5.11, 5.11) @ 5320 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Repeated WLAN 5.3G 802.11a High/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.13 W/kg

Body Back/Repeated WLAN 5.3G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.96 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 6.22 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 3.51 W/kg

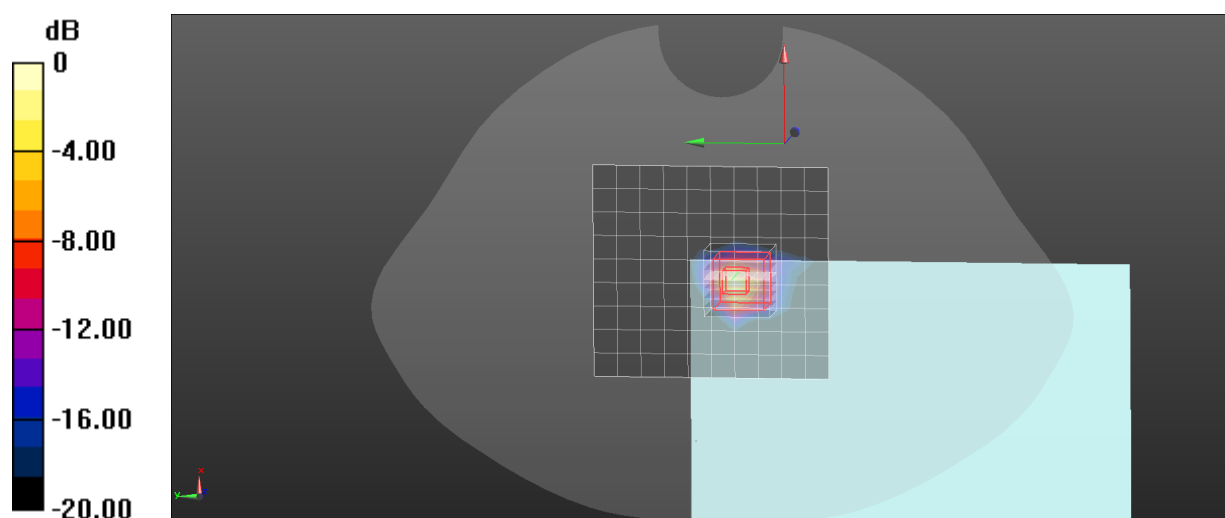

0 dB = 3.51 W/kg = 5.45 dBW/kg

Plot: 34#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5700 MHz; Duty Cycle: 1:1.010

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.108$ S/m; $\epsilon_r = 36.287$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.51, 4.51, 4.51) @ 5700 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Repeated WLAN 5.6G 802.11a High/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.06 W/kg

Body Back/Repeated WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.564 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 4.24 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 2.37 W/kg

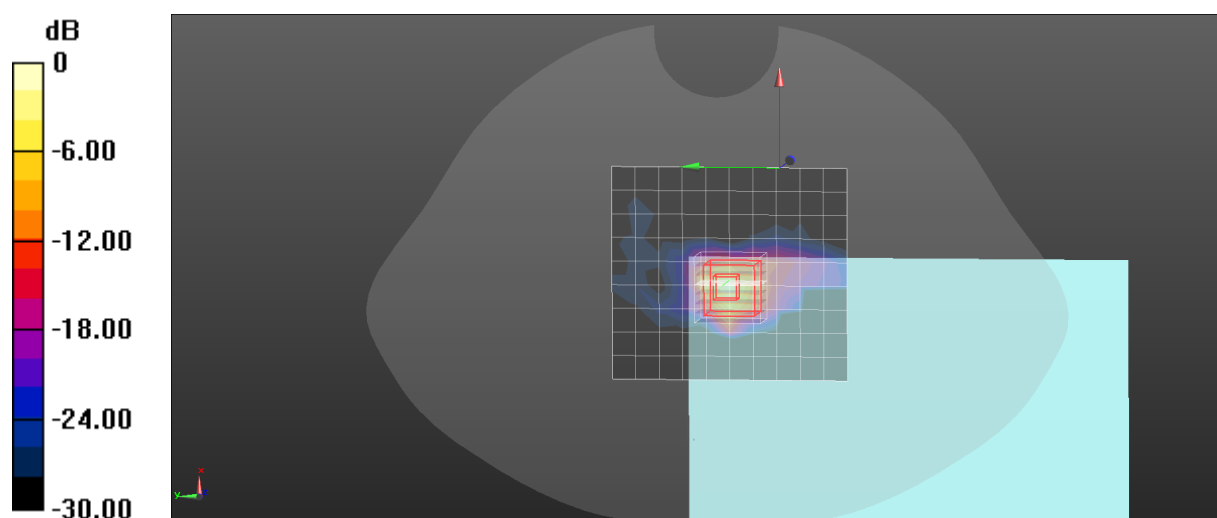

0 dB = 2.37 W/kg = 3.75 dBW/kg

Plot: 35#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.357$ S/m; $\epsilon_r = 35.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5825 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Repeated WLAN 5.8G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.17 W/kg

Body Back/Repeated WLAN 5.8G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.651 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 8.27 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 3.48 W/kg

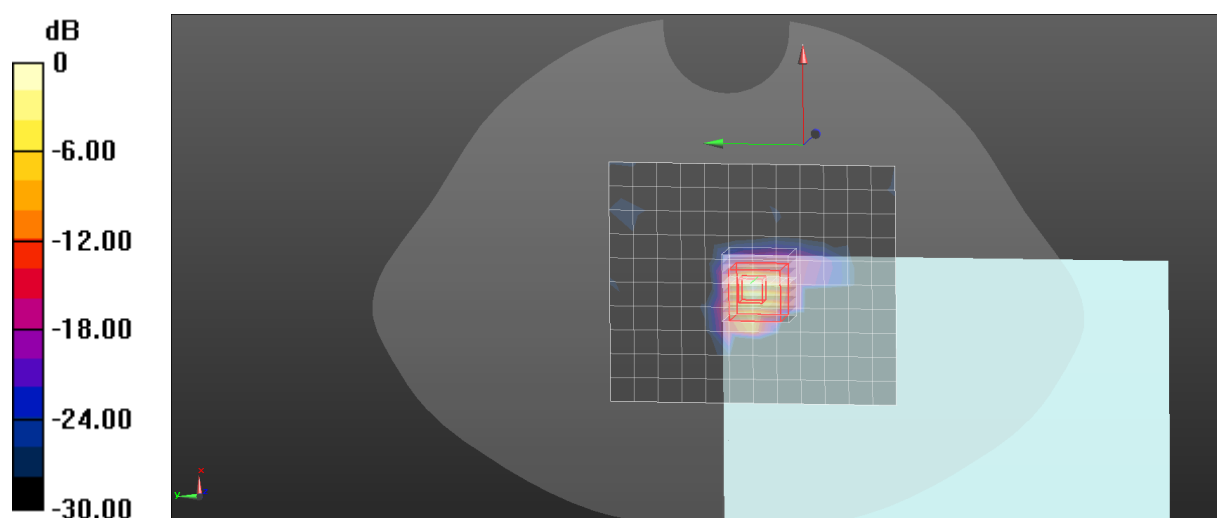

0 dB = 3.48 W/kg = 5.42 dBW/kg

Plot: 36#

DUT: E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader; Type: Note Mini C; Serial: 3PF3-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.010

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.357$ S/m; $\epsilon_r = 35.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(4.61, 4.61, 4.61) @ 5825 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Without Holder WLAN 5.8G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.32 W/kg

Body Back/Without Holder WLAN 5.8G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.376 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 8.27 W/kg

SAR(1 g) = 1.10 W/kg; SAR(10 g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 3.62 W/kg

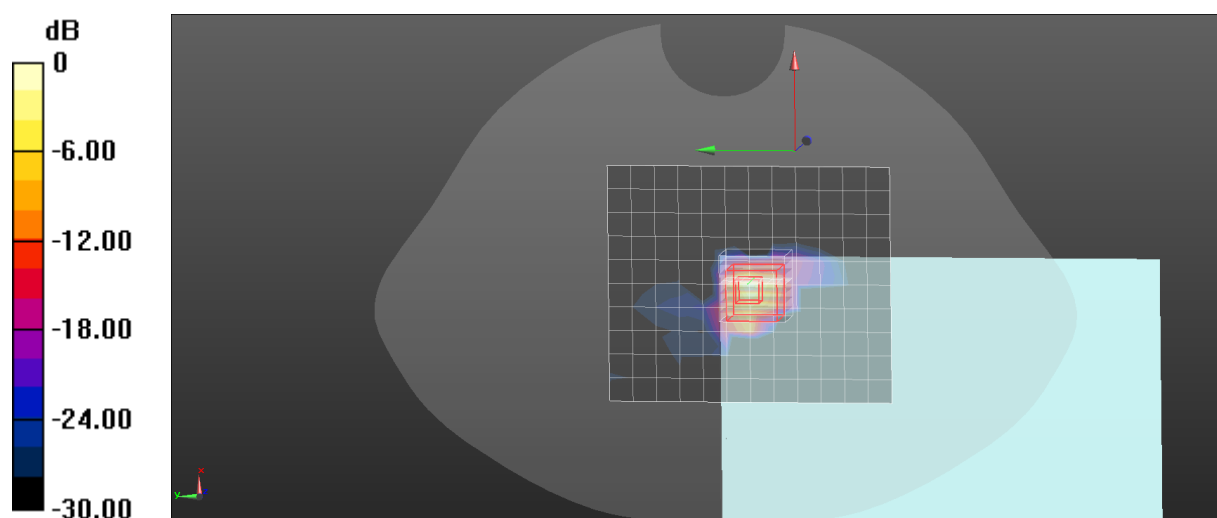

0 dB = 3.62 W/kg = 5.59 dBW/kg