TEST REPORT

Applicant Name:	ONYX INTERNATIONAL INC.
Address:	Room 101, Building 4, No. 202 Shiyu Road, Nansha District, Guangzhou City, Guangdong Province, China
Report Number:	2601V68095E-RF-00D
FCC ID:	XR3-NOTEMINIC

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type:	E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader
Model No.:	Note Mini C
Multiple Model(s) No.:	BOOX Note Mini C Plus, BOOX Note Mini C Pro, BOOX Note Mini C (Gen II), BOOX Note Mini, BOOX Note Mini (Gen II), BOOX Note Mini Plus, BOOX Note Mini Pro
Trade Mark:	BOOX
Date Received:	2026-07-22
Issue Date:	2026-09-24

Test Result:	Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

GaLa Liu

RF Engineer

Approved By:

Nancy Wang

RF Supervisor

Note: The information marked# is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY **3**

GENERAL INFORMATION **4**

Product Description for Equipment under Test (EUT) 4
Objective 4
Test Methodology 4
Measurement Uncertainty 5
Test Facility 5

SYSTEM TEST CONFIGURATION **6**

SUMMARY OF TEST RESULTS **12**

TEST EQUIPMENT LIST **13**

REQUIREMENTS AND TEST PROCEDURES **15**

AC Line Conducted Emissions 15
Undesirable Emission 17
Emission Bandwidth & 99% Occupied Bandwidth 21
Conducted Transmitter Output Power 23
Power Spectral Density 24
Duty Cycle 25

RF EXPOSURE EVALUATION **26**

ANTENNA REQUIREMENT **27**

TEST DATA AND RESULTS **28**

AC Line Conducted Emissions 28
Undesirable Emission 31
Emission Bandwidth 402
99% Occupied Bandwidth 418
Maximum Conducted Output Power 434
Power Spectral Density 438
Duty Cycle 454

EUT PHOTOGRAPHS **457**

TEST SETUP PHOTOGRAPHS **458**

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601V68095E-RF-00D	Original Report	2026-09-24

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	E Ink Tablet, ePaper Tablet, Color E ink Tablet, Color ePaper Tablet, Digital Paper, Color Digital Paper, Note-taking Tablet, E reader, Paper tablet, eBook reader
Tested Model	Note Mini C
Multiple Model(s)	BOOX Note Mini C Plus, BOOX Note Mini C Pro, BOOX Note Mini C (Gen II), BOOX Note Mini, BOOX Note Mini (Gen II), BOOX Note Mini Plus, BOOX Note Mini Pro
Frequency Range	5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80
Maximum Conducted Average Output Power	5150-5250MHz: 5.95dBm; 5250-5350MHz: 6.71dBm 5470-5725MHz: 6.33dBm; 5725-5850MHz: 6.75dBm
Modulation Technique	OFDM, OFDMA
Antenna Specification#	Band 1: -2.0dBi, Band 2: -1.96dBi, Band 3: -2.0dBi, Band 4: -1.5dBi (provided by the applicant)
Voltage Range	DC 5V from Type-c port or DC 3.8V from Battery
Sample serial number	3PF5-2 for AC Line Conducted Emissions and Radiated Emissions Test 3PF5-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The Multiple models are electrically identical with the test model except for model name and sales channels. Please refer to the declaration letter# for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020 + C63.10a-2024, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF Frequency		81.235Hz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Power Spectral Density		2.09dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
	18GHz - 40GHz	6.66dB(k=2, 95% level of confidence)
Temperature		±0.4℃
Humidity		±2%
Supply voltages		DC±0.4%;AC±1%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. The device support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80/ax hew20/ax hew40/ax hew80, the 802.11 n ht20/n ht40 were reduced since the identical parameters with 802.11ac vht20 and vht40.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20/ax20 mode: channel 36, 40, 48 were tested;
For 802.11ac40/ax40 mode: channel 38, 46 were tested;
For 802.11ac80/ax80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a/ac20/ax20 mode: channel 52, 60, 64 were tested;
For 802.11ac40/ax40 mode: channel 54, 62 were tested;
For 802.11ac80/ax80 mode, channel 58 was tested.

For 5470-5725MHz Band, 21 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	124	5620
102	5510	126	5630
104	5520	128	5640
106	5530	132	5660
108	5540	134	5670
110	5550	136	5680
112	5560	138	5690
116	5580	140	5700
118	5590	142	5710
120	5600	144	5720
122	5610	/	/

For 802.11a/ac20/ax20 mode: channel 100, 120, 140, 144 were tested;
For 802.11ac40/ax40 mode: channel 102, 118, 134, 142 were tested;
For 802.11ac80/ax80 mode, channel 106, 122, 138 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20/ax20 mode: channel 149, 157, 165 were tested;
For 802.11ac40/ax40 mode: channel 151, 159 were tested;
For 802.11ac80/ax80 mode, channel 155 was tested.

EUT Exercise Software

Exercise Software#	QRCT4			
5150-5250 MHz Band				
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level#
802.11a	Low	5180	6Mbps	11
	Middle	5200	6Mbps	11
	High	5240	6Mbps	11
802.11ac VHT20	Low	5180	MCS0	11
	Middle	5200	MCS0	11
	High	5240	MCS0	11
802.11ac VHT40	Low	5190	MCS0	11
	High	5230	MCS0	11
802.11ac VHT80	Middle	5210	MCS0	11
802.11ax HE20	Low	5180	MCS0	11
	Middle	5200	MCS0	11
	High	5240	MCS0	11
802.11ax HE40	Low	5190	MCS0	11
	High	5230	MCS0	11
802.11ax HE80	Middle	5210	MCS0	11

5250-5350 MHz Band				
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level#
802.11a	Low	5260	6Mbps	10
	Middle	5300	6Mbps	10
	High	5320	6Mbps	10
802.11ac VHT20	Low	5260	MCS0	10
	Middle	5300	MCS0	10
	High	5320	MCS0	10
802.11ac VHT40	Low	5270	MCS0	10
	High	5310	MCS0	10
802.11ac VHT80	Middle	5290	MCS0	10
802.11ax HE20	Low	5260	MCS0	10
	Middle	5300	MCS0	10
	High	5320	MCS0	10
802.11ax HE40	Low	5270	MCS0	10
	High	5310	MCS0	10
802.11ax HE80	Middle	5290	MCS0	10

5470-5725 MHz Band				
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level#
802.11a	Low	5500	6Mbps	9
	Middle	5600	6Mbps	9
	High	5700	6Mbps	9
	Cross	5720	6Mbps	9
802.11ac VHT20	Low	5500	MCS0	9
	Middle	5600	MCS0	9
	High	5700	MCS0	9
	Cross	5720	MCS0	9
802.11ac VHT40	Low	5510	MCS0	9
	Middle	5590	MCS0	9
	High	5670	MCS0	9
	Cross	5710	MCS0	9
802.11ac VHT80	Middle	5610	MCS0	9
	Cross	5690	MCS0	9
802.11ax HE20	Low	5500	MCS0	9
	Middle	5600	MCS0	9
	High	5700	MCS0	9
	Cross	5720	MCS0	9
802.11ax HE40	Low	5510	MCS0	9
	Middle	5590	MCS0	9
	High	5670	MCS0	9
	Cross	5710	MCS0	9
802.11ax HE80	Low	5530	MCS0	9
	High	5610	MCS0	9
	Cross	5690	MCS0	9

5725-5850 MHz Band				
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level#
802.11a	Low	5745	6Mbps	9
	Middle	5785	6Mbps	9
	High	5825	6Mbps	9
802.11ac VHT20	Low	5745	MCS0	9
	Middle	5785	MCS0	9
	High	5825	MCS0	9
802.11ac VHT40	Low	5755	MCS0	9
	High	5795	MCS0	9
802.11ac VHT80	Middle	5775	MCS0	9
802.11ax HE20	Low	5745	MCS0	9
	Middle	5785	MCS0	9
	High	5825	MCS0	9
802.11ax HE40	Low	5755	MCS0	9
	High	5795	MCS0	9
802.11ax HE80	Middle	5775	MCS0	9

Note1: The worst-case data rates are determined to be as above for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.
Note2: For 802.11ax modes, the device not support partial RU mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OUPU	Receptacle	PDU-OP1606K	6971041358020
Shen Zhen HuaJin Electronics Co.,LTD	Adapter	YZD12-0502000A	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-Detachable AC Cable	1.2	Receptacle	LISN/AC Mains
Unshielded Detachable USB Cable	1.0	Adapter	EUT

Block Diagram of Test Setup


For AC Line Conducted Emissions:

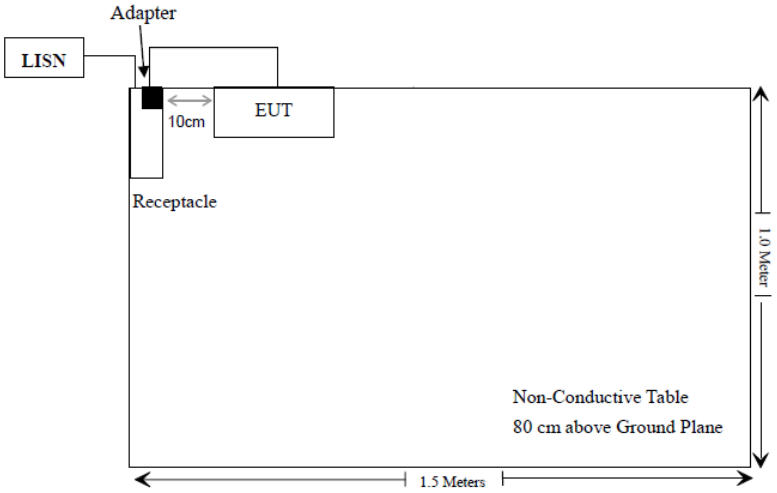

For Radiated Emissions below 1GHz:

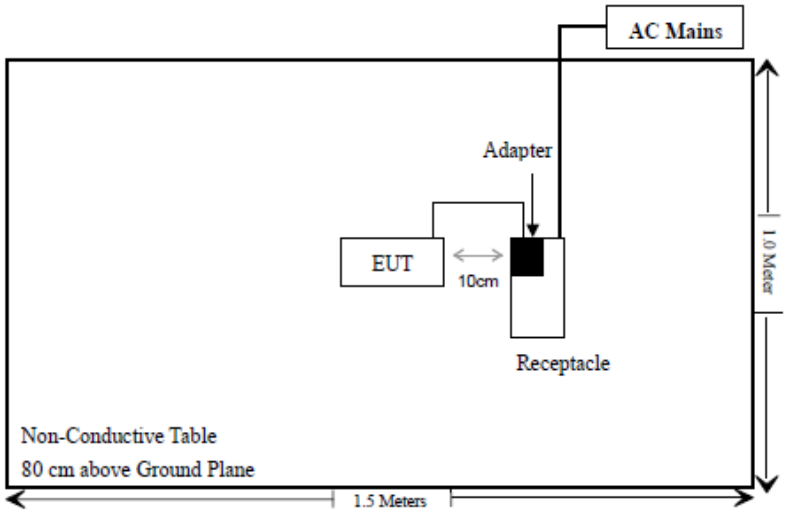

For Radiated Emissions above 1GHz:

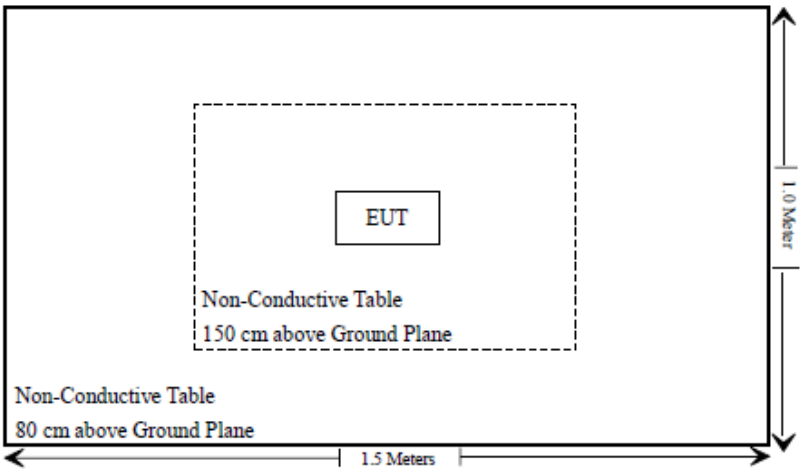

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*
C63.10 §12.2	Duty Cycle	/

Compliant*: Please refer to the DFS report 2601V68095E-RF-00E.
Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 4.75 dBm≤27dBm (500mW).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2026/08/04	2027/08/03
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2026/08/04	2027/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2026/06/26	2029/06/25
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2026/07/03	2029/07/02
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2026/08/04	2027/08/03
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2026/07/15	2027/07/14
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2026/06/23	2027/06/22
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2026/06/23	2027/06/22

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2026/07/06	2029/07/05
Unknown	Chamber B Cable	Cable B6	Cable B6	2026/07/06	2027/07/05
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2026/08/26	2027/08/25
JD	JD Auto Test software	NA	1.0.0.3769	NCR	NCR
ANRITSU	Microwave peak power sensor	MA24418A	12622	2026/08/05	2027/08/04
Unknown	10dB Attenuator	Unknown	F-03-EM224	2026/06/24	2027/06/23

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC §15.207

EUT Setup

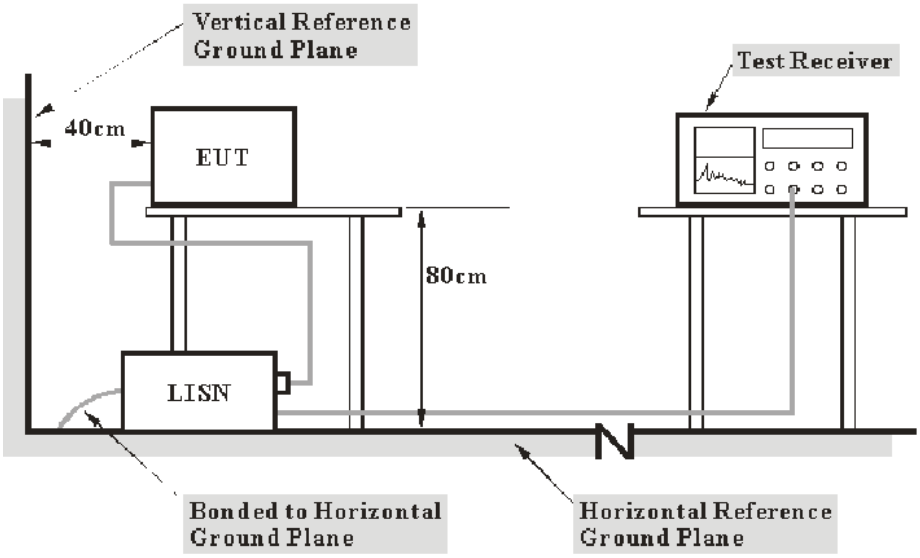

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

Factor = LISN VDF + Cable Loss

The "**Over limit**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

Over Limit = Level – Limit
Level = Read Level + Factor

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard


FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(4) For transmitters operating in the 5.725-5.85 GHz band:
(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup


9 kHz-30MHz:

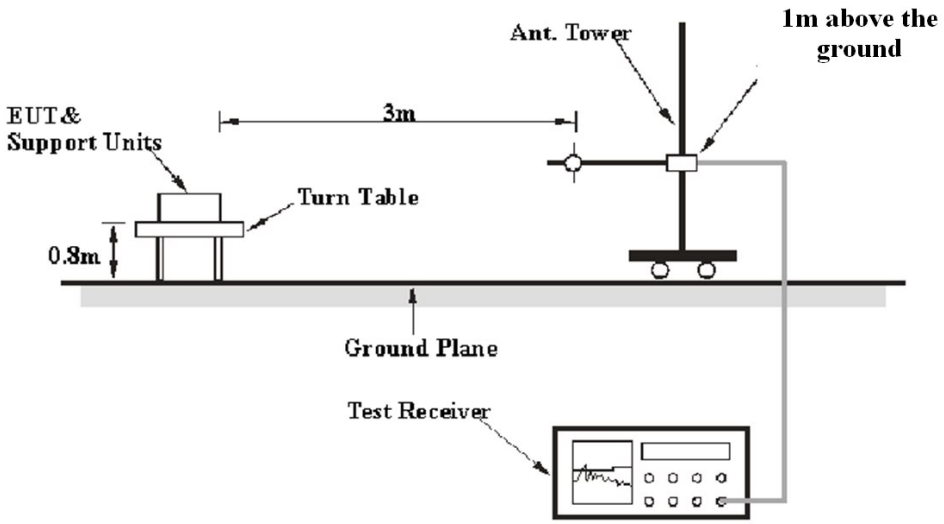

30MHz-1GHz:

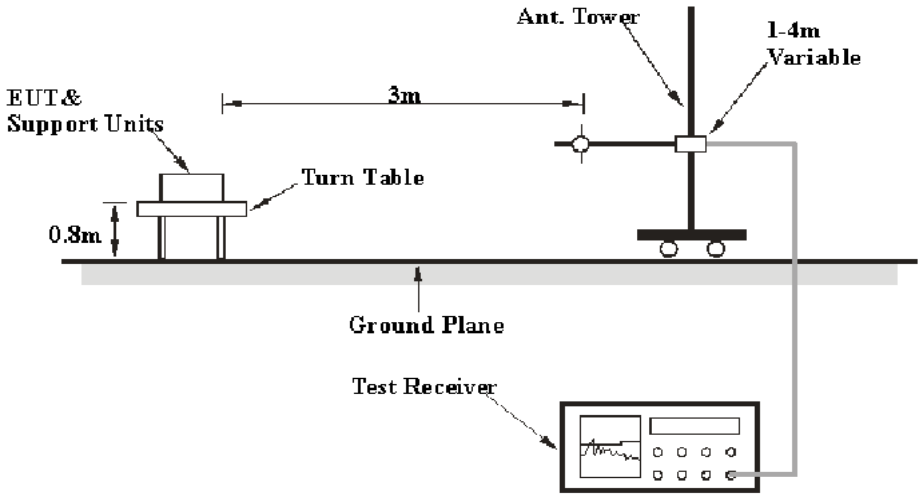

Above 1 GHz:

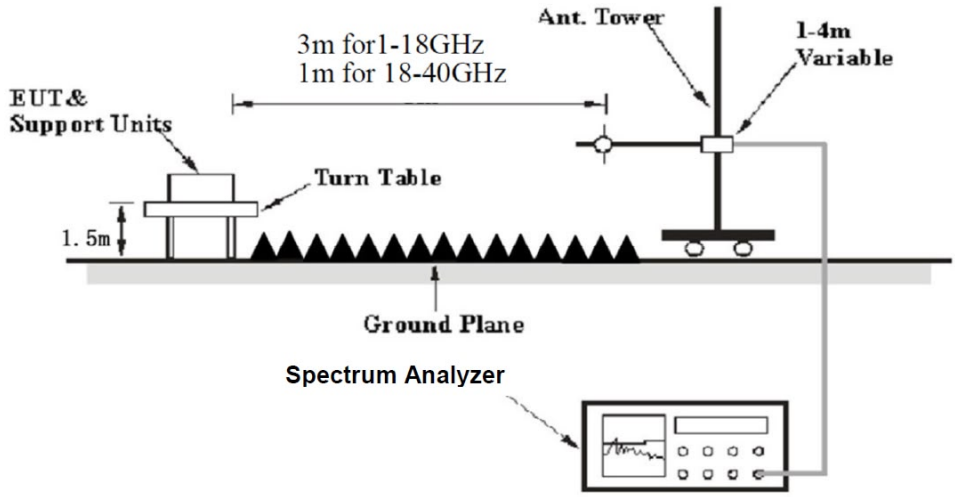

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	120 kHz	500 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	>1/Ton, not less than 1kHz	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\mathrm{SpecLimit}} = E_{\mathrm{Meas}} + 20\log\left(\frac{d_{\mathrm{Meas}}}{d_{\mathrm{SpecLimit}}}\right)$$

where

$E_{\mathrm{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dBμV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBμV/m
d_{Meas}	is the measurement distance, in m
$d_{\mathrm{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is 20*log(1/3)= -9.5 dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The "**Over Limit/Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit = Level – Limit; Margin = Limit–Corrected Amplitude
Level / Corrected Amplitude = Read Level + Factor

Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) ≥ 3 × RBW.
c) Detector = Peak.
d) Trace mode = max-hold.
e) Sweep = No faster than coupled (auto) time.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:

a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
b) Set the VBW > RBW.
c) Detector = peak.
d) Trace mode = max-hold.
e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.

c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.6.2.


d) Step a) through step c) might require iteration to adjust within the specified range.

e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.

f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

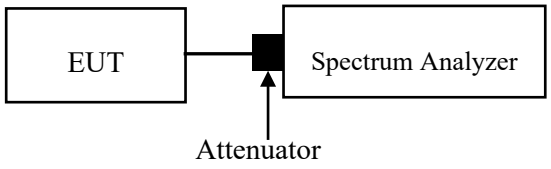

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

a. Place the EUT on a bench and set it in transmitting mode.
b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

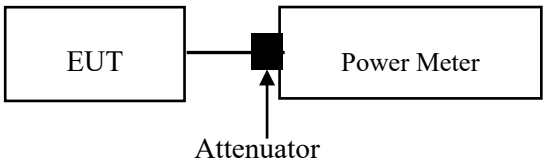

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss
Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Power Spectral Density


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

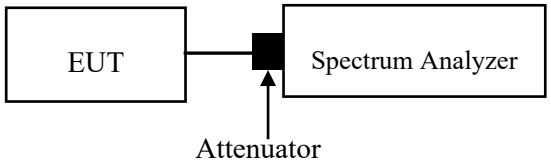

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss
Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Duty Cycle

Test Procedure


According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.

b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

1) Set the center frequency of the instrument to the center frequency of the transmission.
2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value.
3) Set VBW ≥ RBW. Set detector = peak or average.
4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7 μs.)

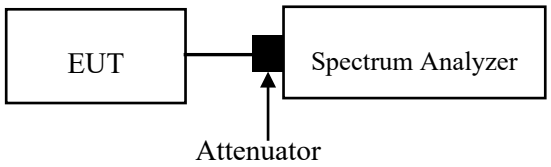

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

RF EXPOSURE EVALUATION

Applicable Standard

FCC§1.1310 and §2.1093

Test Result

Compliant, please refer to the SAR report: 2601V68095E-SA.

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain#	Impedance	Frequency Range
FPC	-2.0dBi	50Ω	5150-5250MHz
FPC	-1.96dBi	50Ω	5250-5350MHz
FPC	-2.0dBi	50Ω	5470-5725MHz
FPC	-1.5dBi	50Ω	5725-5850MHz


Result: Compliant

TEST DATA AND RESULTS

AC Line Conducted Emissions

Temperature (°C)	25	**Relative Humidity (%)**	52
ATM Pressure (kPa)	101.0	**Test engineer**	Macy Shi
Test date	2026.09.07		
EUT operation mode	Transmitting (Maximum output power mode, Band4 802.11ac40 High Channel)		


AC 120V 60 Hz, Line

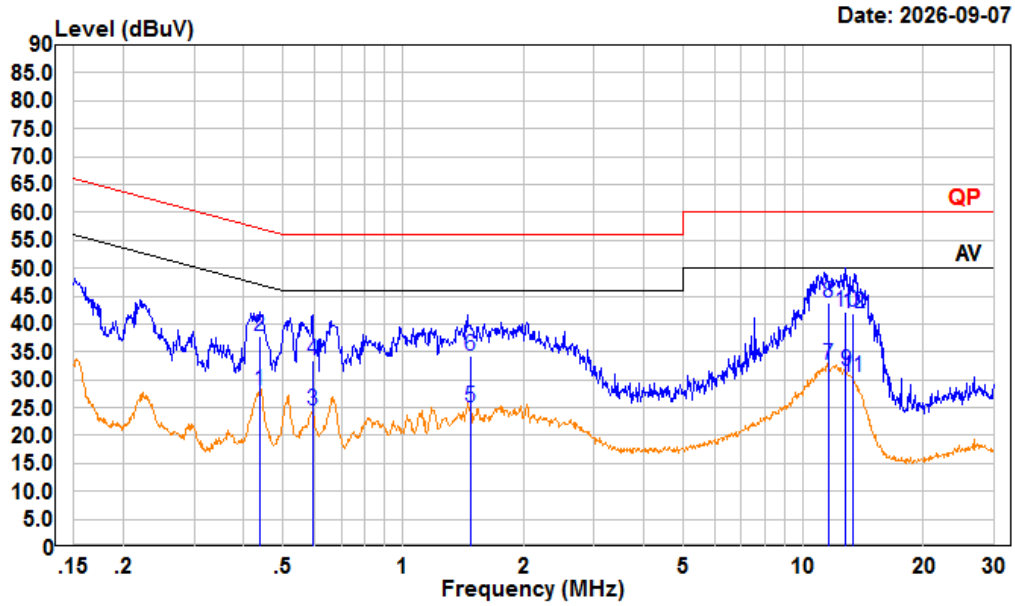

Condition: Line
Project : 2601V68095E-RF
tester : Macy.shi Note:5G WIFI Transmitting
Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.438	8.33	28.06	9.70	10.03	47.11	-19.05	Average
2	0.438	18.17	37.90	9.70	10.03	57.11	-19.21	QP
3	0.594	4.67	24.41	9.70	10.04	46.00	-21.59	Average
4	0.594	13.59	33.33	9.70	10.04	56.00	-22.67	QP
5	1.470	4.91	25.02	9.90	10.21	46.00	-20.98	Average
6	1.470	14.09	34.20	9.90	10.21	56.00	-21.80	QP
7	11.551	12.38	32.63	9.90	10.35	50.00	-17.37	Average
8	11.551	23.52	43.77	9.90	10.35	60.00	-16.23	QP
9	12.801	11.30	31.56	9.90	10.36	50.00	-18.44	Average
10	12.801	21.91	42.17	9.90	10.36	60.00	-17.83	QP
11	13.300	10.31	30.57	9.90	10.36	50.00	-19.43	Average
12	13.300	21.72	41.98	9.90	10.36	60.00	-18.02	QP

AC 120V 60 Hz, Neutral

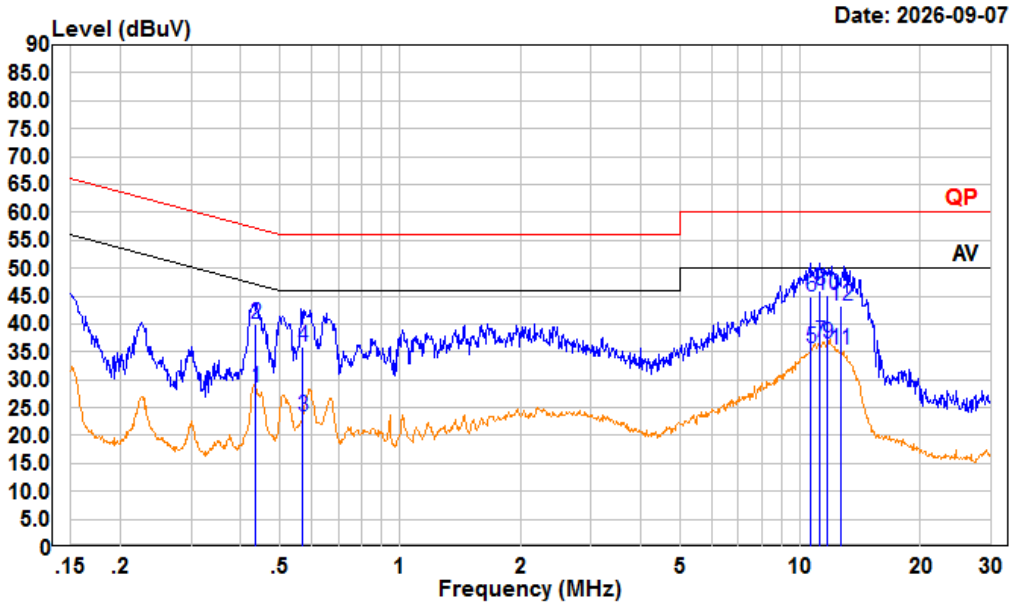

Condition: neutral
Project : 2601V68095E-RF
tester : Macy.shi Note:5G WIFI Transmitting
Setting : RBW:9kHz


	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.436	9.00	28.63	9.60	10.03	47.14	-18.51	Average
2	0.436	20.31	39.94	9.60	10.03	57.14	-17.20	QP
3	0.571	3.80	23.44	9.60	10.04	46.00	-22.56	Average
4	0.571	16.15	35.79	9.60	10.04	56.00	-20.21	QP
5	10.655	15.50	35.54	9.70	10.34	50.00	-14.46	Average
6	10.655	24.81	44.85	9.70	10.34	60.00	-15.15	QP
7	11.214	16.68	36.72	9.70	10.34	50.00	-13.28	Average
8	11.214	25.95	45.99	9.70	10.34	60.00	-14.01	QP
9	11.732	16.48	36.53	9.70	10.35	50.00	-13.47	Average
10	11.732	25.06	45.11	9.70	10.35	60.00	-14.89	QP
11	12.618	15.23	35.29	9.70	10.36	50.00	-14.71	Average
12	12.618	23.09	43.15	9.70	10.36	60.00	-16.85	QP

Undesirable Emission

Temperature (℃)	23.5-24	**Relative Humidity (%)**	51-53
ATM Pressure (kPa):	101.0-101.2	**Test engineer:**	Anson Su &Zenos Qiao
Test date:	2026.08.06-2026.08.15		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, Band4 802.11ac40 High Channel) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.		

Below 1GHz:


9kHz-150kHz

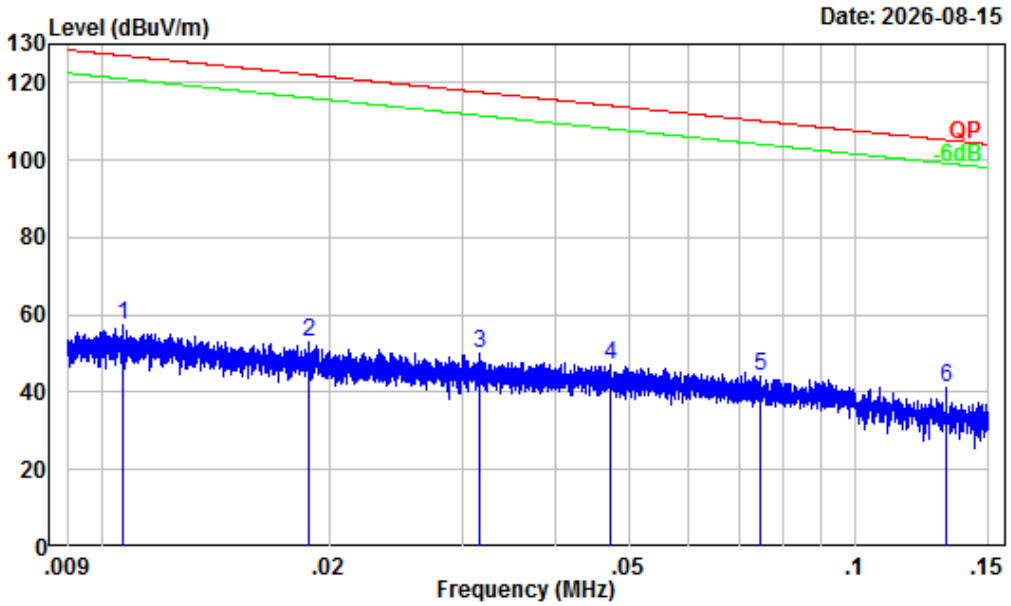

Site : Chamber A
Condition : 3m
Project Number : 2601V68095E-RF
Test Mode : 5G WIFI Band4 Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.18	24.99	57.17	127.06	-69.89	Peak
2	0.019	30.62	22.32	52.94	122.10	-69.16	Peak
3	0.032	28.31	21.72	50.03	117.56	-67.53	Peak
4	0.047	26.69	20.55	47.24	114.13	-66.89	Peak
5	0.075	23.94	20.11	44.05	110.15	-66.10	Peak
6	0.132	20.13	20.96	41.09	105.21	-64.12	Peak


150kHz-30MHz

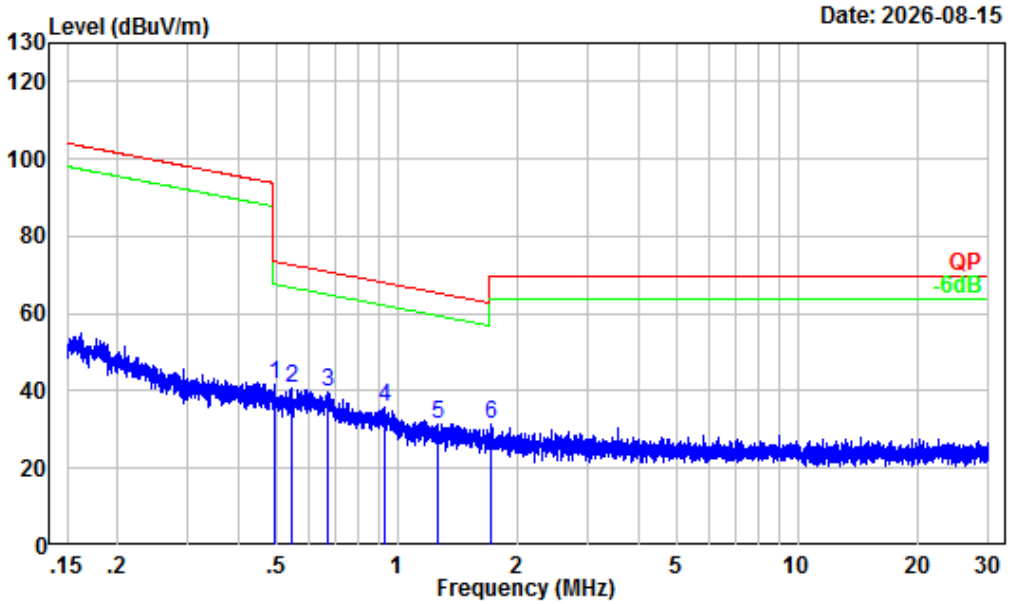

Site : Chamber A
Condition : 3m
Project Number : 2601V68095E-RF
Test Mode : 5G WIFI Band4 Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.493	6.52	34.99	41.51	73.74	-32.23	Peak
2	0.545	5.85	34.88	40.73	72.86	-32.13	Peak
3	0.670	4.30	35.59	39.89	71.02	-31.13	Peak
4	0.930	1.72	34.29	36.01	68.12	-32.11	Peak
5	1.261	0.47	30.84	31.31	65.41	-34.10	Peak
6	1.716	-0.81	32.30	31.49	69.54	-38.05	Peak


30MHz-1GHz_Horizontal

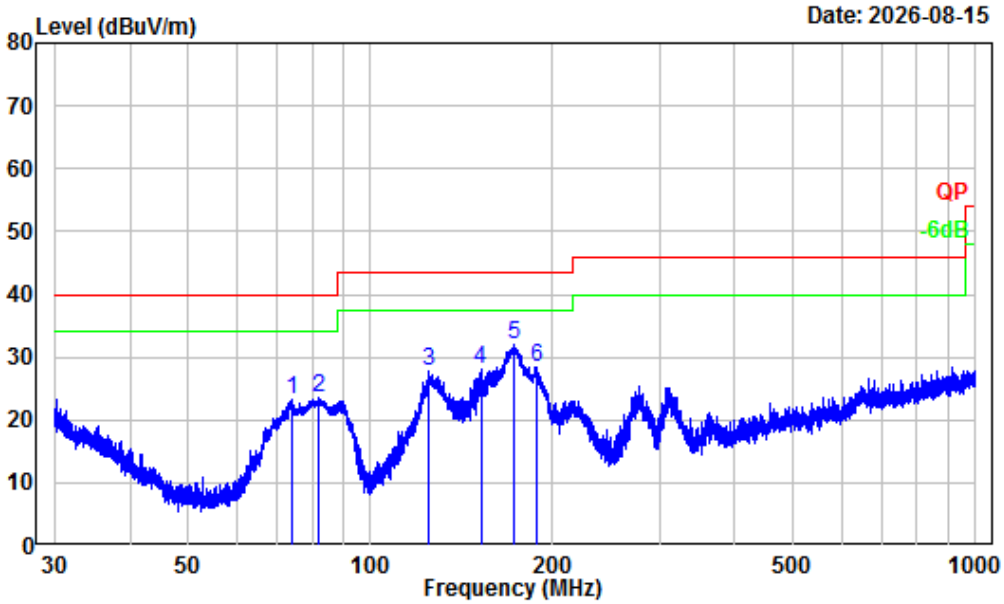

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601V68095E-RF
Test Mode : 5G WIFI Band4 Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	74.07	-17.38	40.49	23.11	40.00	-16.89	Peak
2	82.14	-18.06	41.48	23.42	40.00	-16.58	Peak
3	124.95	-10.84	38.51	27.67	43.50	-15.83	Peak
4	152.13	-12.16	40.16	28.00	43.50	-15.50	Peak
5	172.83	-12.85	44.89	32.04	43.50	-11.46	Peak
6	187.84	-13.26	41.75	28.49	43.50	-15.01	Peak

30MHz-1GHz_Vertical

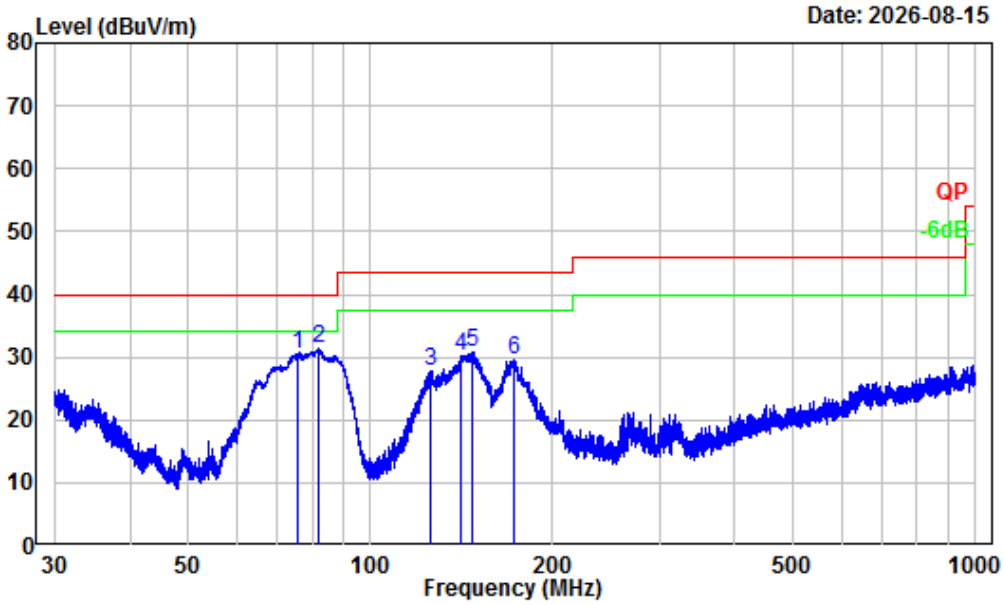

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601V68095E-RF
Test Mode : 5G WIFI Band4 Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	75.74	-17.73	48.30	30.57	40.00	-9.43	Peak
2	81.93	-18.10	49.43	31.33	40.00	-8.67	Peak
3	125.94	-10.73	38.61	27.88	43.50	-15.62	Peak
4	141.02	-11.45	41.74	30.29	43.50	-13.21	Peak
5	147.15	-11.84	42.77	30.93	43.50	-12.57	Peak
6	172.98	-12.79	42.48	29.69	43.50	-13.81	Peak

Above 1GHz:

5150-5250 MHz

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11a							
Low Channel							
10360	54.16	PK	H	1.59	55.75	68.2	-12.45
10360	54.71	PK	V	1.59	56.3	68.2	-11.9
Middle Channel							
10400	54.52	PK	H	1.63	56.15	68.2	-12.05
10400	55.05	PK	V	1.63	56.68	68.2	-11.52
High Channel							
10480	54.89	PK	H	1.44	56.33	68.2	-11.87
10480	55.43	PK	V	1.44	56.87	68.2	-11.33
802.11ac20							
Low Channel							
10360	54.04	PK	H	1.59	55.63	68.2	-12.57
10360	54.57	PK	V	1.59	56.16	68.2	-12.04
Middle Channel							
10400	54.39	PK	H	1.63	56.02	68.2	-12.18
10400	54.92	PK	V	1.63	56.55	68.2	-11.65
High Channel							
10480	54.76	PK	H	1.44	56.2	68.2	-12
10480	55.28	PK	V	1.44	56.72	68.2	-11.48
802.11ac40							
Low Channel							
10380	53.81	PK	H	1.61	55.42	68.2	-12.78
10380	54.35	PK	V	1.61	55.96	68.2	-12.24
High Channel							
10460	54.32	PK	H	1.49	55.81	68.2	-12.39
10460	54.84	PK	V	1.49	56.33	68.2	-11.87
802.11ac80							
Middle Channel							
10420	53.48	PK	H	1.58	55.06	68.2	-13.14
10420	54.02	PK	V	1.58	55.6	68.2	-12.6

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax20							
Low Channel							
10360	53.91	PK	H	1.59	55.5	68.2	-12.7
10360	54.43	PK	V	1.59	56.02	68.2	-12.18
Middle Channel							
10400	54.24	PK	H	1.63	55.87	68.2	-12.33
10400	54.78	PK	V	1.63	56.41	68.2	-11.79
High Channel							
10480	54.62	PK	H	1.44	56.06	68.2	-12.14
10480	55.15	PK	V	1.44	56.59	68.2	-11.61
802.11ax40							
Low Channel							
10380	53.67	PK	H	1.61	55.28	68.2	-12.92
10380	54.21	PK	V	1.61	55.82	68.2	-12.38
High Channel							
10460	54.16	PK	H	1.49	55.65	68.2	-12.55
10460	54.69	PK	V	1.49	56.18	68.2	-12.02
802.11ax80							
Middle Channel							
10420	53.37	PK	H	1.58	54.95	68.2	-13.25
10420	53.89	PK	V	1.58	55.47	68.2	-12.73

5250-5350MHz

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11a							
Low Channel							
10520	53.61	PK	H	1.42	55.03	68.2	-13.17
10520	54.14	PK	V	1.42	55.56	68.2	-12.64
Middle Channel							
10600	53.93	PK	H	1.54	55.47	68.2	-12.73
10600	40.12	AV	H	1.54	41.66	54	-12.34
10600	54.45	PK	V	1.54	55.99	68.2	-12.21
10600	40.58	AV	V	1.54	42.12	54	-11.88
High Channel							
10640	54.24	PK	H	1.8	56.04	74	-17.96
10640	40.37	AV	H	1.8	42.17	54	-11.83
10640	54.78	PK	V	1.8	56.58	74	-17.42
10640	40.65	AV	V	1.8	42.45	54	-11.55
802.11ac20							
Low Channel							
10520	53.48	PK	H	1.42	54.9	68.2	-13.3
10520	54.02	PK	V	1.42	55.44	68.2	-12.76
Middle Channel							
10600	53.79	PK	H	1.54	55.33	68.2	-12.87
10600	40.05	AV	H	1.54	41.59	54	-12.41
10600	54.31	PK	V	1.54	55.85	68.2	-12.35
10600	40.22	AV	V	1.54	41.76	54	-12.24
High Channel							
10640	54.11	PK	H	1.8	55.91	74	-18.09
10640	40.32	AV	H	1.8	42.12	54	-11.88
10640	54.64	PK	V	1.8	56.44	74	-17.56
10640	40.57	AV	V	1.8	42.37	54	-11.63
802.11ac40							
Low Channel							
10540	53.49	PK	H	1.44	54.93	68.2	-13.27
10540	54.01	PK	V	1.44	55.45	68.2	-12.75
High Channel							
10620	53.84	PK	H	1.67	55.51	74	-18.49
10620	39.56	AV	H	1.67	41.23	54	-12.77
10620	54.37	PK	V	1.67	56.04	74	-17.96
10620	39.82	AV	V	1.67	41.49	54	-12.51
802.11ac80							
Middle Channel							
10580	53.39	PK	H	1.5	54.89	68.2	-13.31
10580	53.94	PK	V	1.5	55.44	68.2	-12.76

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax20							
Low Channel							
10520	53.37	PK	H	1.42	54.79	68.2	-13.41
10520	53.89	PK	V	1.42	55.31	68.2	-12.89
Middle Channel							
10600	53.65	PK	H	1.54	55.19	68.2	-13.01
10600	39.97	AV	H	1.54	41.51	54	-12.49
10600	54.18	PK	V	1.54	55.72	68.2	-12.48
10600	40.22	AV	V	1.54	41.76	54	-12.24
High Channel							
10640	54.02	PK	H	1.8	55.82	74	-18.18
10640	40.21	AV	H	1.8	42.01	54	-11.99
10640	54.53	PK	V	1.8	56.33	74	-17.67
10640	40.48	AV	V	1.8	42.28	54	-11.72
802.11ax40							
Low Channel							
10540	53.35	PK	H	1.44	54.79	68.2	-13.41
10540	53.88	PK	V	1.44	55.32	68.2	-12.88
High Channel							
10620	53.69	PK	H	1.67	55.36	74	-18.64
10620	39.51	AV	H	1.67	41.18	54	-12.82
10620	54.24	PK	V	1.67	55.91	74	-18.09
10620	39.75	AV	V	1.67	41.42	54	-12.58
802.11ax80							
Middle Channel							
10580	53.27	PK	H	1.5	54.77	68.2	-13.43
10580	53.81	PK	V	1.5	55.31	68.2	-12.89

5470-5725MHz

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11a							
Low Channel							
11000	55.16	PK	H	3.33	58.49	74	-15.51
11000	41.21	AV	H	3.33	44.54	54	-9.46
11000	55.72	PK	V	3.33	59.05	74	-14.95
11000	41.46	AV	V	3.33	44.79	54	-9.21
Middle Channel							
11200	54.02	PK	H	2.29	56.31	74	-17.69
11200	40.38	AV	H	2.29	42.67	54	-11.33
11200	54.57	PK	V	2.29	56.86	74	-17.14
11200	40.64	AV	V	2.29	42.93	54	-11.07
High Channel							
11400	53.85	PK	H	2.46	56.31	74	-17.69
11400	40.23	AV	H	2.46	42.69	54	-11.31
11400	54.39	PK	V	2.46	56.85	74	-17.15
11400	40.48	AV	V	2.46	42.94	54	-11.06
Cross Channel							
11440	53.68	PK	H	2.26	55.94	74	-18.06
11440	40.07	AV	H	2.26	42.33	54	-11.67
11440	54.21	PK	V	2.26	56.47	74	-17.53
11440	40.33	AV	V	2.26	42.59	54	-11.41

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ac20							
Low Channel							
11000	55.05	PK	H	3.33	58.38	74	-15.62
11000	41.14	AV	H	3.33	44.47	54	-9.53
11000	55.6	PK	V	3.33	58.93	74	-15.07
11000	41.38	AV	V	3.33	44.71	54	-9.29
Middle Channel							
11200	53.93	PK	H	2.29	56.22	74	-17.78
11200	40.32	AV	H	2.29	42.61	54	-11.39
11200	54.46	PK	V	2.29	56.75	74	-17.25
11200	40.55	AV	V	2.29	42.84	54	-11.16
High Channel							
11400	53.74	PK	H	2.46	56.2	74	-17.8
11400	40.16	AV	H	2.46	42.62	54	-11.38
11400	54.27	PK	V	2.46	56.73	74	-17.27
11400	40.4	AV	V	2.46	42.86	54	-11.14
Cross Channel							
11440	53.56	PK	H	2.26	55.82	74	-18.18
11440	40.01	AV	H	2.26	42.27	54	-11.73
11440	54.09	PK	V	2.26	56.35	74	-17.65
11440	40.24	AV	V	2.26	42.5	54	-11.5

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ac40							
Low Channel							
11020	54.39	PK	H	3.28	57.67	74	-16.33
11020	40.41	AV	H	3.28	43.69	54	-10.31
11020	54.94	PK	V	3.28	58.22	74	-15.78
11020	40.67	AV	V	3.28	43.95	54	-10.05
Middle Channel							
11180	54.27	PK	H	2.28	56.55	74	-17.45
11180	40.36	AV	H	2.28	42.64	54	-11.36
11180	54.81	PK	V	2.28	57.09	74	-16.91
11180	40.62	AV	V	2.28	42.9	54	-11.1
High Channel							
11340	54.52	PK	H	2.09	56.61	74	-17.39
11340	40.53	AV	H	2.09	42.62	54	-11.38
11340	55.06	PK	V	2.09	57.15	74	-16.85
11340	40.75	AV	V	2.09	42.84	54	-11.16
Cross Channel							
11420	54.03	PK	H	2.36	56.39	74	-17.61
11420	40.25	AV	H	2.36	42.61	54	-11.39
11420	54.57	PK	V	2.36	56.93	74	-17.07
11420	40.48	AV	V	2.36	42.84	54	-11.16
802.11ac80							
Low Channel							
11060	53.25	PK	H	3.09	56.34	74	-17.66
11060	39.59	AV	H	3.09	42.68	54	-11.32
11060	53.78	PK	V	3.09	56.87	74	-17.13
11060	39.83	AV	V	3.09	42.92	54	-11.08
High Channel							
11220	53.01	PK	H	2.2	55.21	74	-18.79
11220	39.45	AV	H	2.2	41.65	54	-12.35
11220	53.54	PK	V	2.2	55.74	74	-18.26
11220	39.69	AV	V	2.2	41.89	54	-12.11
Cross Channel							
11380	53.69	PK	H	2.33	56.02	74	-17.98
11380	39.91	AV	H	2.33	42.24	54	-11.76
11380	54.23	PK	V	2.33	56.56	74	-17.44
11380	40.14	AV	V	2.33	42.47	54	-11.53

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax20							
Low Channel							
11000	54.94	PK	H	3.33	58.27	74	-15.73
11000	41.07	AV	H	3.33	44.4	54	-9.6
11000	55.49	PK	V	3.33	58.82	74	-15.18
11000	41.31	AV	V	3.33	44.64	54	-9.36
Middle Channel							
11200	53.81	PK	H	2.29	56.1	74	-17.9
11200	40.23	AV	H	2.29	42.52	54	-11.48
11200	54.34	PK	V	2.29	56.63	74	-17.37
11200	40.47	AV	V	2.29	42.76	54	-11.24
High Channel							
11400	53.63	PK	H	2.46	56.09	74	-17.91
11400	40.08	AV	H	2.46	42.54	54	-11.46
11400	54.15	PK	V	2.46	56.61	74	-17.39
11400	40.32	AV	V	2.46	42.78	54	-11.22
Cross Channel							
11440	53.45	PK	H	2.26	55.71	74	-18.29
11440	39.92	AV	H	2.26	42.18	54	-11.82
11440	53.97	PK	V	2.26	56.23	74	-17.77
11440	40.16	AV	V	2.26	42.42	54	-11.58

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax40							
Low Channel							
11020	54.24	PK	H	3.28	57.52	74	-16.48
11020	40.36	AV	H	3.28	43.64	54	-10.36
11020	54.78	PK	V	3.28	58.06	74	-15.94
11020	40.59	AV	V	3.28	43.87	54	-10.13
Middle Channel							
11180	54.13	PK	H	2.28	56.41	74	-17.59
11180	40.31	AV	H	2.28	42.59	54	-11.41
11180	54.67	PK	V	2.28	56.95	74	-17.05
11180	40.54	AV	V	2.28	42.82	54	-11.18
High Channel							
11340	54.4	PK	H	2.09	56.49	74	-17.51
11340	40.42	AV	H	2.09	42.51	54	-11.49
11340	54.93	PK	V	2.09	57.02	74	-16.98
11340	40.66	AV	V	2.09	42.75	54	-11.25
Cross Channel							
11420	53.91	PK	H	2.36	56.27	74	-17.73
11420	40.17	AV	H	2.36	42.53	54	-11.47
11420	54.45	PK	V	2.36	56.81	74	-17.19
11420	40.4	AV	V	2.36	42.76	54	-11.24

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax80							
Low Channel							
11060	53.12	PK	H	3.09	56.21	74	-17.79
11060	39.51	AV	H	3.09	42.6	54	-11.4
11060	53.65	PK	V	3.09	56.74	74	-17.26
11060	39.74	AV	V	3.09	42.83	54	-11.17
High Channel							
11220	52.89	PK	H	2.2	55.09	74	-18.91
11220	39.27	AV	H	2.2	41.47	54	-12.53
11220	53.42	PK	V	2.2	55.62	74	-18.38
11220	39.51	AV	V	2.2	41.71	54	-12.29
Cross Channel							
11380	53.56	PK	H	2.33	55.89	74	-18.11
11380	39.83	AV	H	2.33	42.16	54	-11.84
11380	54.09	PK	V	2.33	56.42	74	-17.58
11380	40.05	AV	V	2.33	42.38	54	-11.62

5725-5850MHz

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11a							
Low Channel							
11490	53.25	PK	H	2.32	55.57	74	-18.43
11490	39.69	AV	H	2.32	42.01	54	-11.99
11490	53.78	PK	V	2.32	56.1	74	-17.9
11490	39.94	AV	V	2.32	42.26	54	-11.74
Middle Channel							
11570	53.49	PK	H	2.58	56.07	74	-17.93
11570	39.93	AV	H	2.58	42.51	54	-11.49
11570	54.02	PK	V	2.58	56.6	74	-17.4
11570	40.16	AV	V	2.58	42.74	54	-11.26
High Channel							
11650	54.01	PK	H	2.58	56.59	74	-17.41
11650	40.14	AV	H	2.58	42.72	54	-11.28
11650	54.55	PK	V	2.58	57.13	74	-16.87
11650	40.37	AV	V	2.58	42.95	54	-11.05
802.11ac20							
Low Channel							
11490	53.14	PK	H	2.32	55.46	74	-18.54
11490	39.62	AV	H	2.32	41.94	54	-12.06
11490	53.67	PK	V	2.32	55.99	74	-18.01
11490	39.85	AV	V	2.32	42.17	54	-11.83
Middle Channel							
11570	53.38	PK	H	2.58	55.96	74	-18.04
11570	39.85	AV	H	2.58	42.43	54	-11.57
11570	53.9	PK	V	2.58	56.48	74	-17.52
11570	40.07	AV	V	2.58	42.65	54	-11.35
High Channel							
11650	53.89	PK	H	2.58	56.47	74	-17.53
11650	40.06	AV	H	2.58	42.64	54	-11.36
11650	54.43	PK	V	2.58	57.01	74	-16.99
11650	40.28	AV	V	2.58	42.86	54	-11.14

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ac40							
Low Channel							
11510	53.53	PK	H	2.41	55.94	74	-18.06
11510	39.71	AV	H	2.41	42.12	54	-11.88
11510	54.08	PK	V	2.41	56.49	74	-17.51
11510	39.95	AV	V	2.41	42.36	54	-11.64
High Channel							
11590	53.09	PK	H	2.51	55.6	74	-18.4
11590	39.32	AV	H	2.51	41.83	54	-12.17
11590	53.63	PK	V	2.51	56.14	74	-17.86
11590	39.56	AV	V	2.51	42.07	54	-11.93
802.11ac80							
Middle Channel							
11550	53.26	PK	H	2.64	55.9	74	-18.1
11550	39.48	AV	H	2.64	42.12	54	-11.88
11550	53.81	PK	V	2.64	56.45	74	-17.55
11550	39.72	AV	V	2.64	42.36	54	-11.64

Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax20							
Low Channel							
11490	53.01	PK	H	2.32	55.33	74	-18.67
11490	39.54	AV	H	2.32	41.86	54	-12.14
11490	53.55	PK	V	2.32	55.87	74	-18.13
11490	39.76	AV	V	2.32	42.08	54	-11.92
Middle Channel							
11570	53.26	PK	H	2.58	55.84	74	-18.16
11570	39.74	AV	H	2.58	42.32	54	-11.68
11570	53.79	PK	V	2.58	56.37	74	-17.63
11570	39.98	AV	V	2.58	42.56	54	-11.44
High Channel							
11650	53.77	PK	H	2.58	56.35	74	-17.65
11650	39.96	AV	H	2.58	42.54	54	-11.46
11650	54.31	PK	V	2.58	56.89	74	-17.11
11650	40.19	AV	V	2.58	42.77	54	-11.23


Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
802.11ax40							
Low Channel							
11510	53.42	PK	H	2.41	55.83	74	-18.17
11510	39.63	AV	H	2.41	42.04	54	-11.96
11510	53.95	PK	V	2.41	56.36	74	-17.64
11510	39.86	AV	V	2.41	42.27	54	-11.73
High Channel							
11590	52.98	PK	H	2.51	55.49	74	-18.51
11590	39.24	AV	H	2.51	41.75	54	-12.25
11590	53.51	PK	V	2.51	56.02	74	-17.98
11590	39.47	AV	V	2.51	41.98	54	-12.02
802.11ax80							
Middle Channel							
11550	53.15	PK	H	2.64	55.79	74	-18.21
11550	39.34	AV	H	2.64	41.98	54	-12.02
11550	53.69	PK	V	2.64	56.33	74	-17.67
11550	39.58	AV	V	2.64	42.22	54	-11.78

Note:
Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Factor + Reading
Margin = Corrected. Amplitude - Limit
The other spurious emission which is in the noise floor level was not recorded.

Test plots:

1-18GHz (Listed with the worst case test plot)


1-7GHz_Horizontal_11A_5240

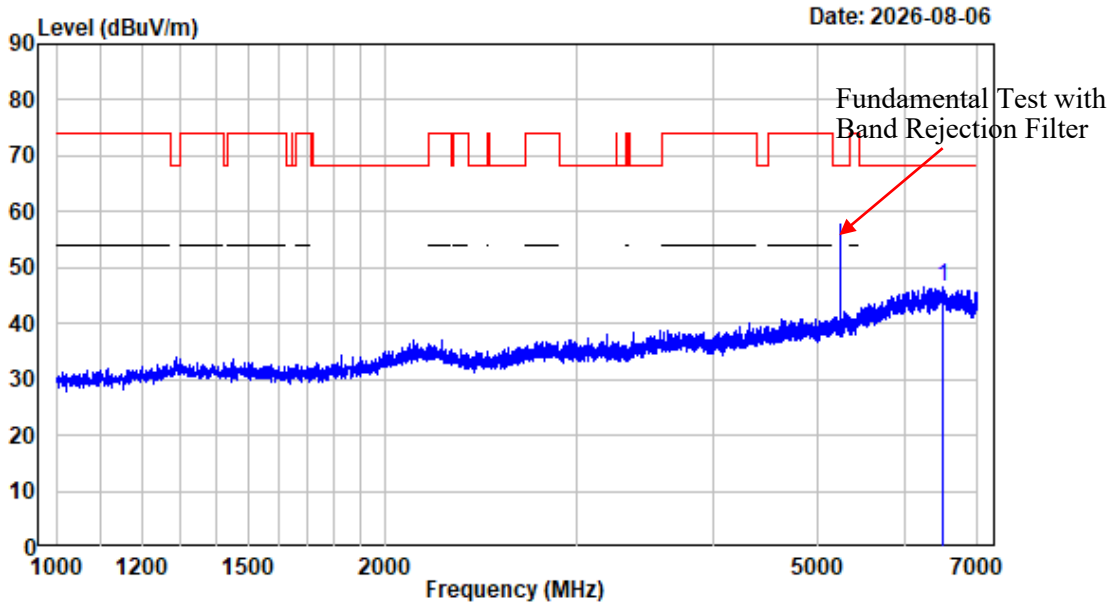

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6495.250	-1.70	48.23	46.53	68.20	-21.67	Peak


1-7GHz_Vertical_11A_5240

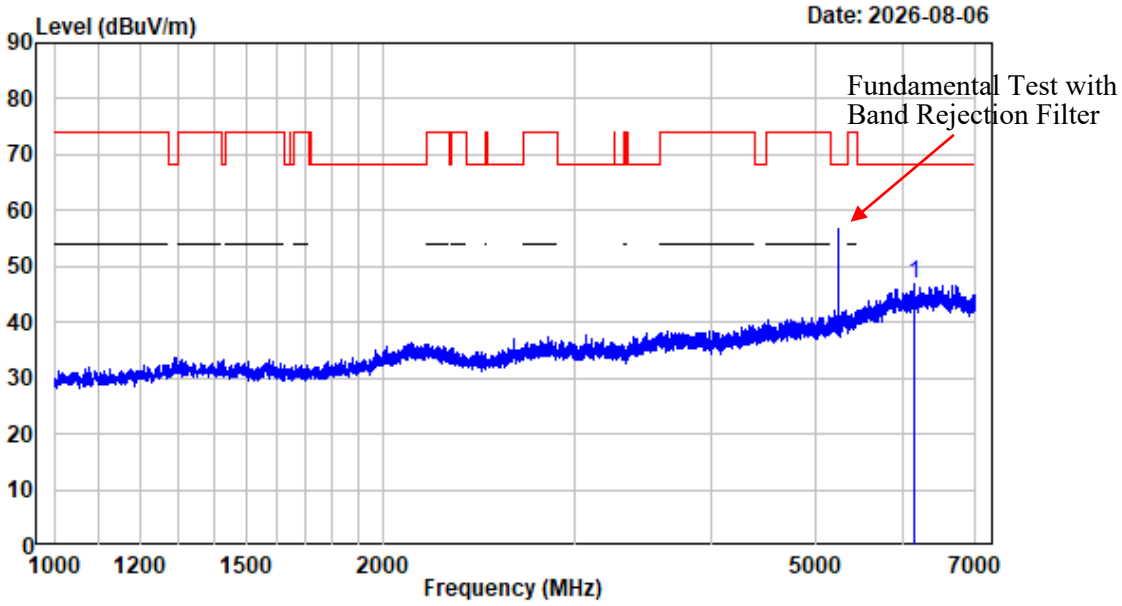

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6142.000	-2.26	49.06	46.80	68.20	-21.40	Peak


7-18GHz_Horizontal_Peak_11A_5240

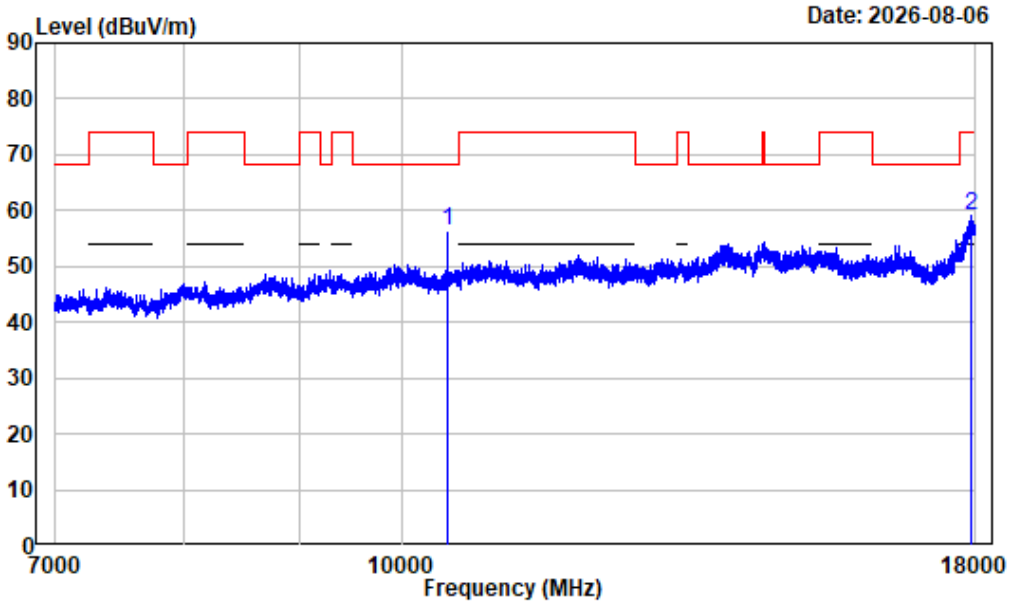

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	1.44	54.89	56.33	68.20	-11.87	Peak
2	17932.630	9.75	49.21	58.96	74.00	-15.04	Peak


7-18GHz_Horizontal_Average_11A_5240

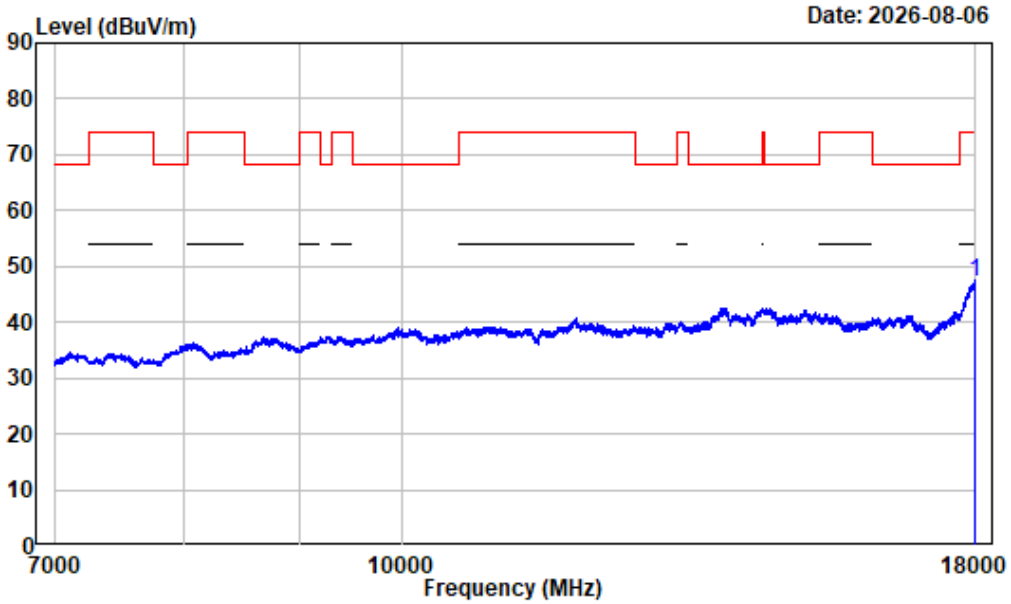

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17990.380	10.63	36.54	47.17	54.00	-6.83	Average


7-18GHz_Vertical_Peak_11A_5240

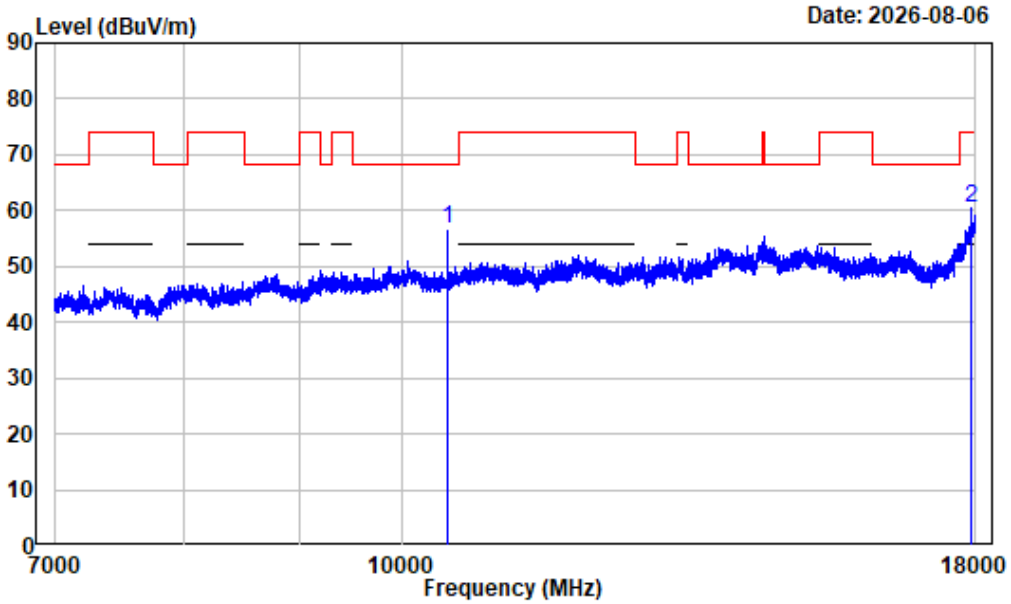

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	1.44	55.43	56.87	68.20	-11.33	Peak
2	17934.000	9.75	50.78	60.53	74.00	-13.47	Peak


7-18GHz_Vertical_Average_11A_5240

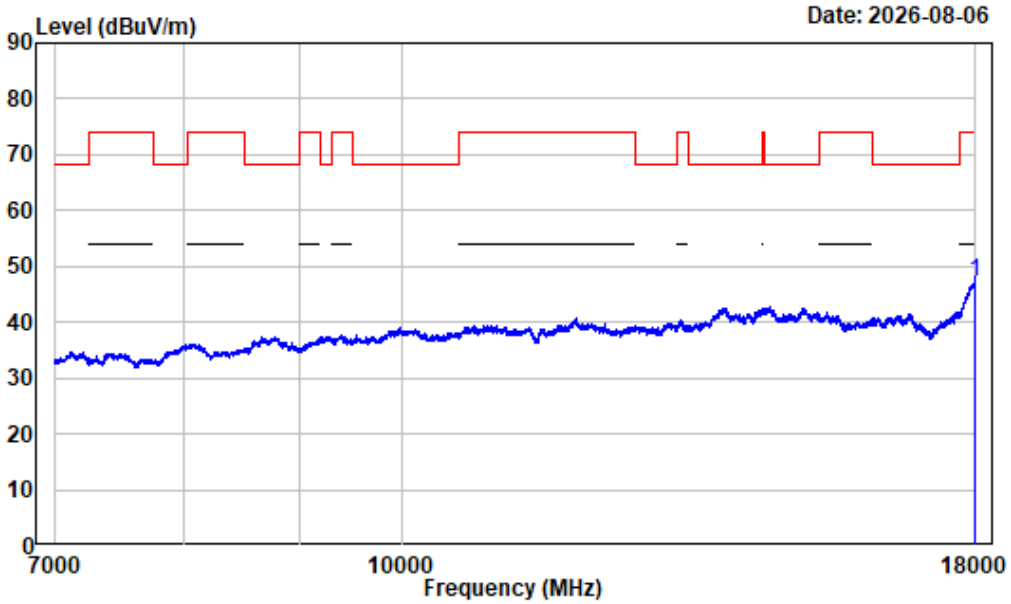

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17997.250	10.75	36.35	47.10	54.00	-6.90	Average


1-7GHz_Horizontal_11AC20_5240

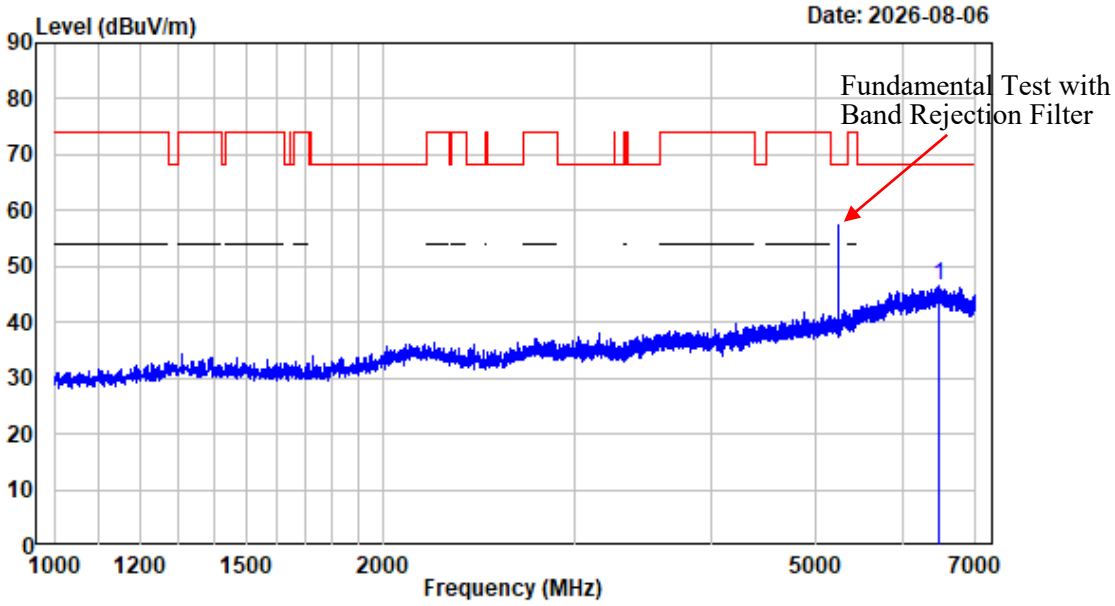

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6477.250	-1.89	48.26	46.37	68.20	-21.83	Peak


1-7GHz_Vertical_11AC20_5240

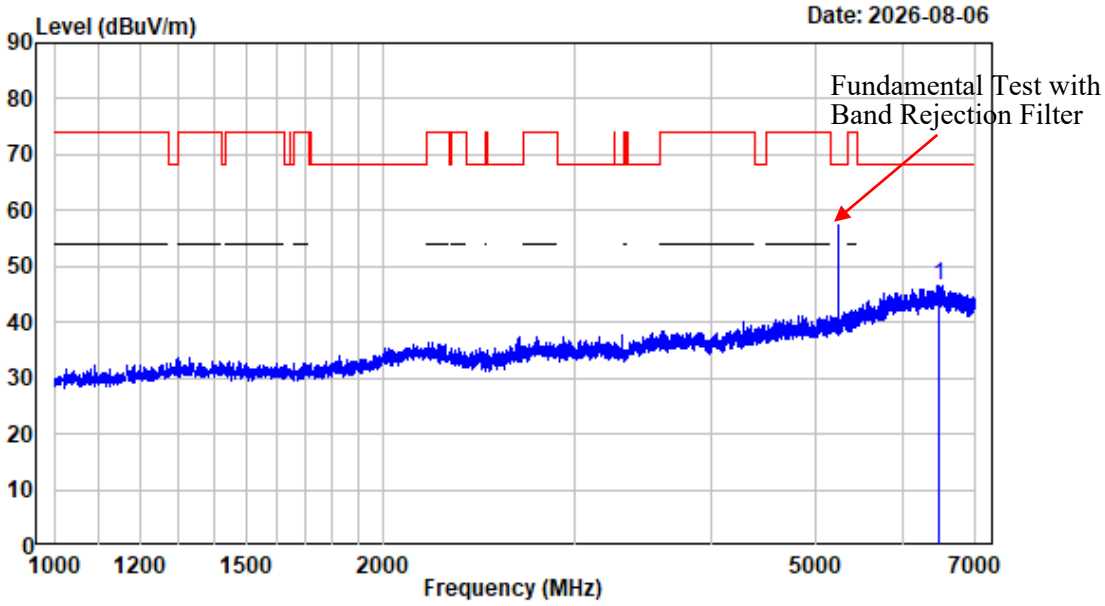

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6469.750	-1.96	48.64	46.68	68.20	-21.52	Peak


7-18GHz_Horizontal_Peak_11AC20_5240

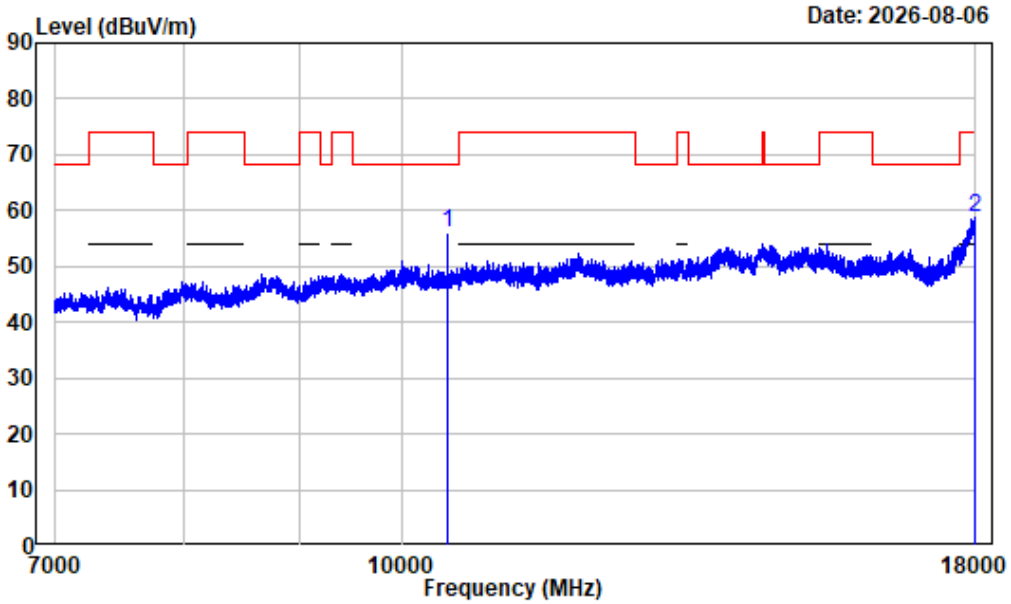

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	1.44	54.76	56.20	68.20	-12.00	Peak
2	17976.630	10.38	48.45	58.83	74.00	-15.17	Peak


7-18GHz_Horizontal_Average_11AC20_5240

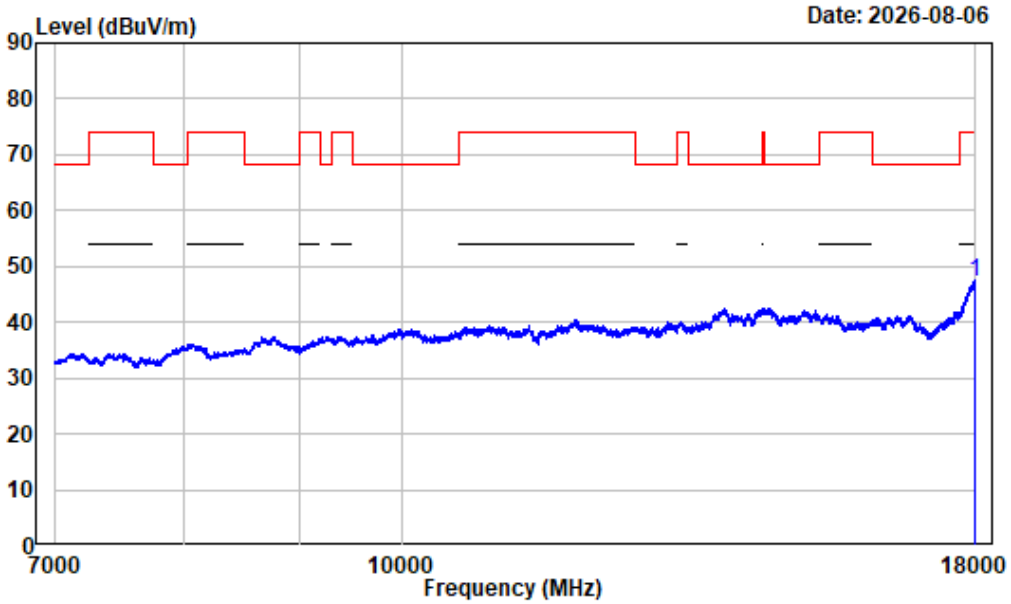

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17995.880	10.73	36.42	47.15	54.00	-6.85	Average


7-18GHz_Vertical_Peak_11AC20_5240

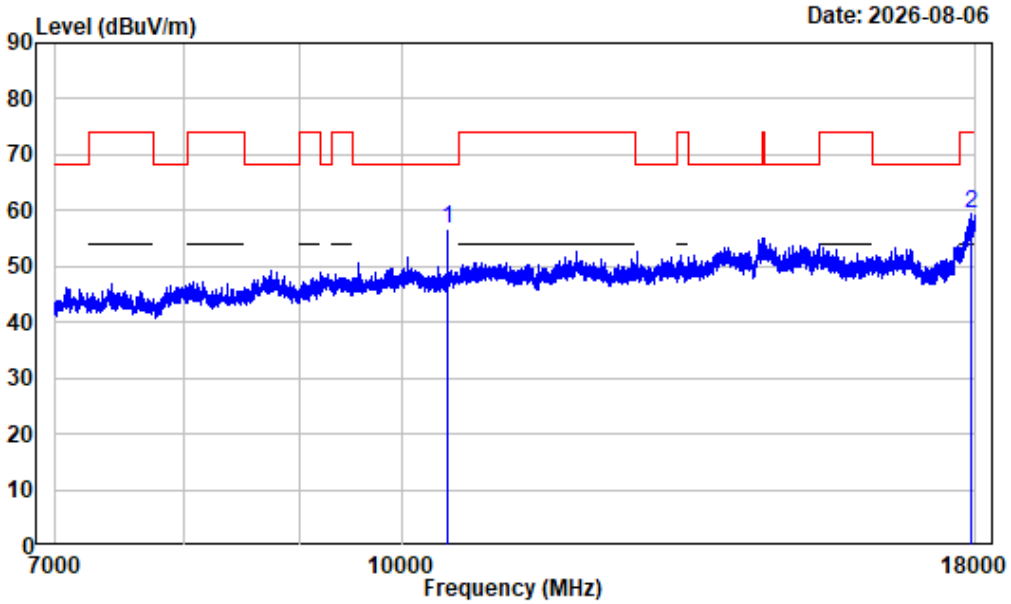

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	1.44	55.28	56.72	68.20	-11.48	Peak
2	17929.880	9.72	49.56	59.28	74.00	-14.72	Peak


7-18GHz_Vertical_Average_11AC20_5240

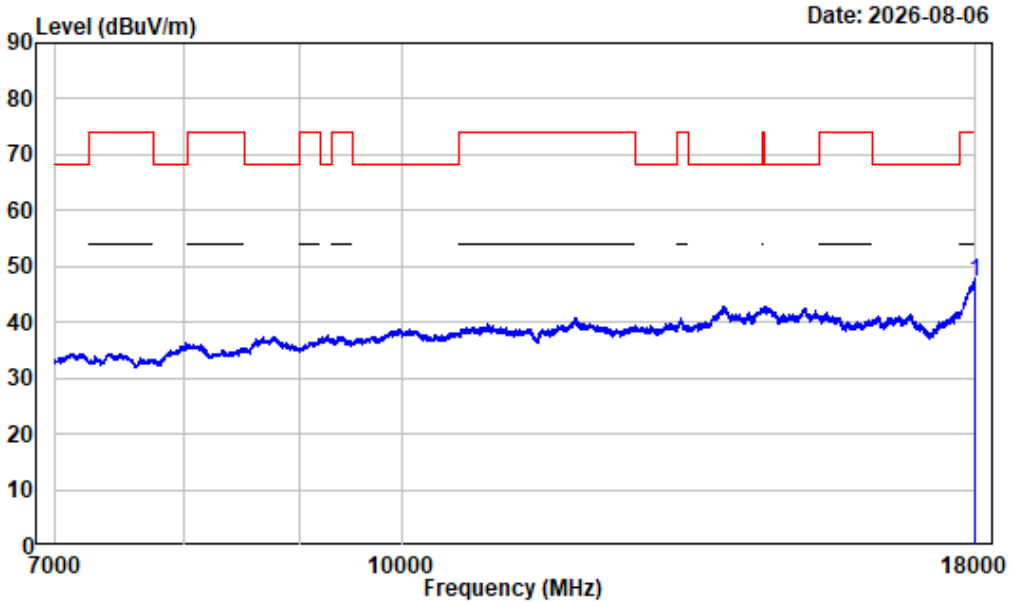

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	10.70	36.39	47.09	54.00	-6.91	Average


1-7GHz_Horizontal_11AC40_5230

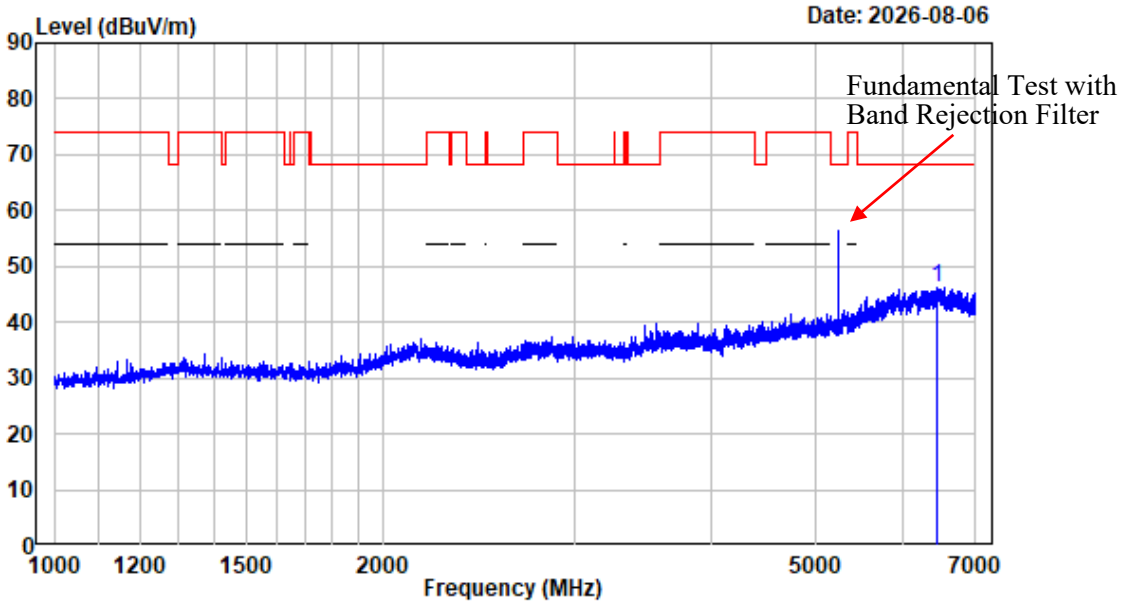

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6450.250	-2.19	48.45	46.26	68.20	-21.94	Peak


1-7GHz_Vertical_11AC40_5230

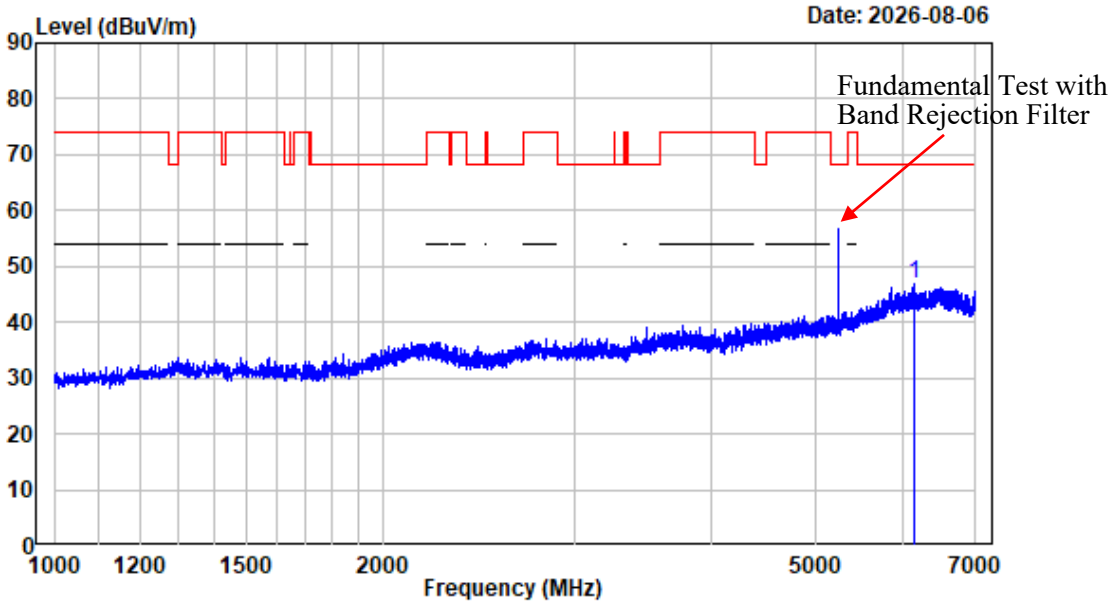

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6157.750	-2.28	49.04	46.76	68.20	-21.44	Peak


7-18GHz_Horizontal_Peak_11AC40_5230

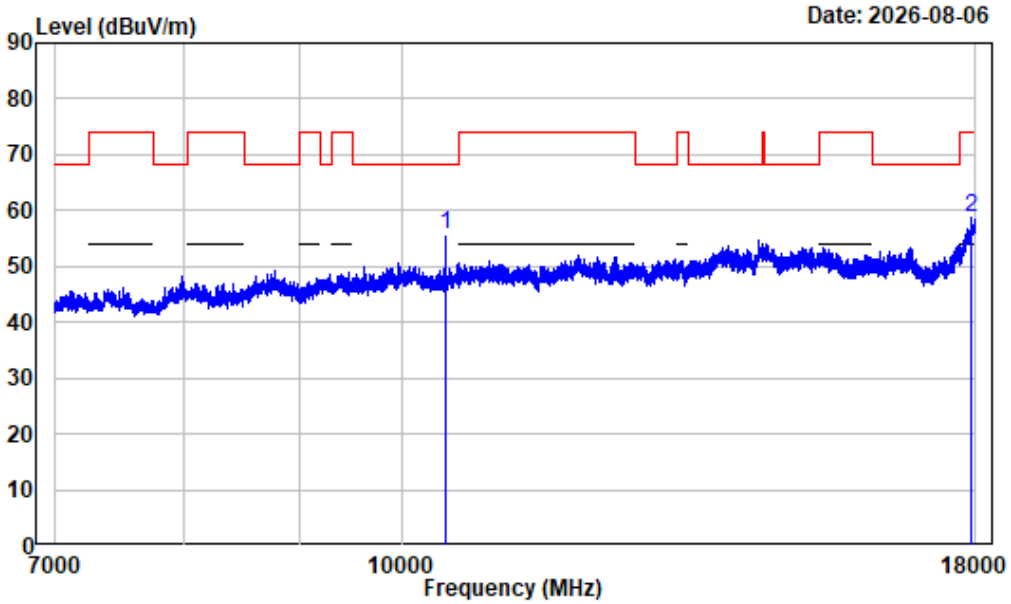

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	1.49	54.32	55.81	68.20	-12.39	Peak
2	17916.130	9.58	49.07	58.65	74.00	-15.35	Peak


7-18GHz_Horizontal_Average_11AC40_5230

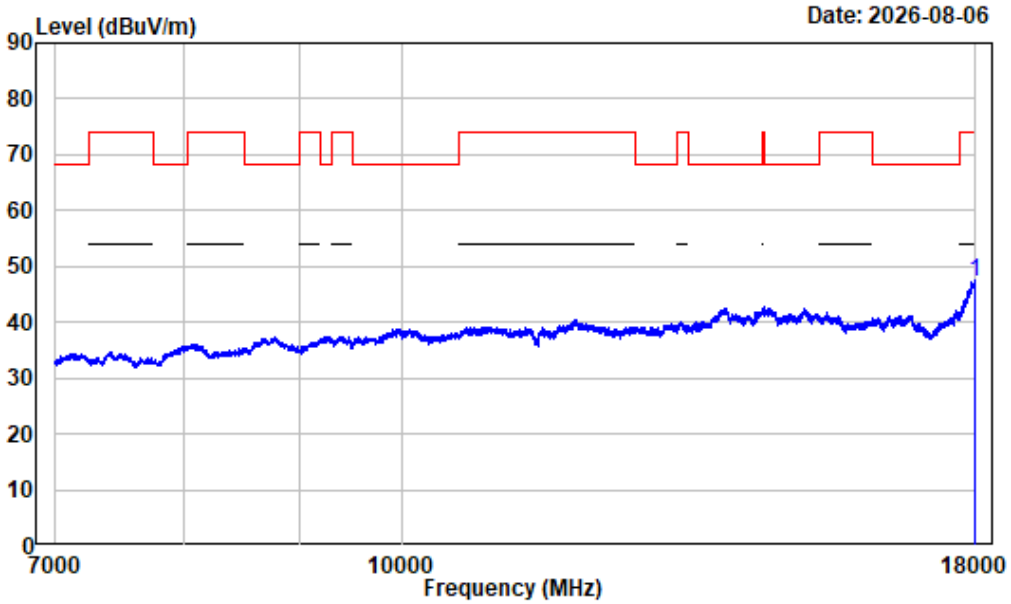

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17995.880	10.73	36.42	47.15	54.00	-6.85	Average


7-18GHz_Vertical_Peak_11AC40_5230

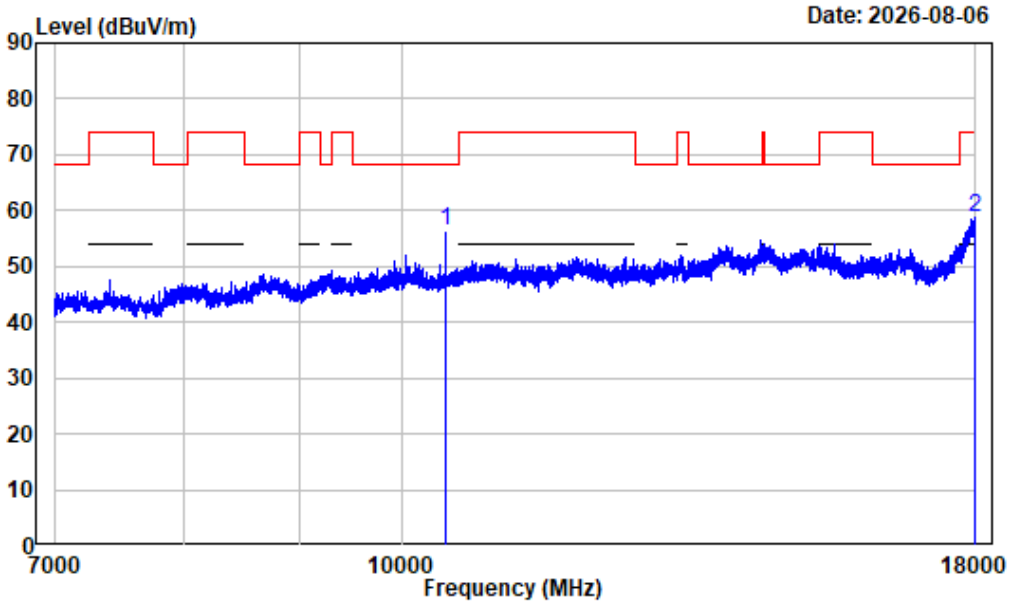

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	1.49	54.84	56.33	68.20	-11.87	Peak
2	17995.880	10.73	48.18	58.91	74.00	-15.09	Peak


7-18GHz_Vertical_Average_11AC40_5230

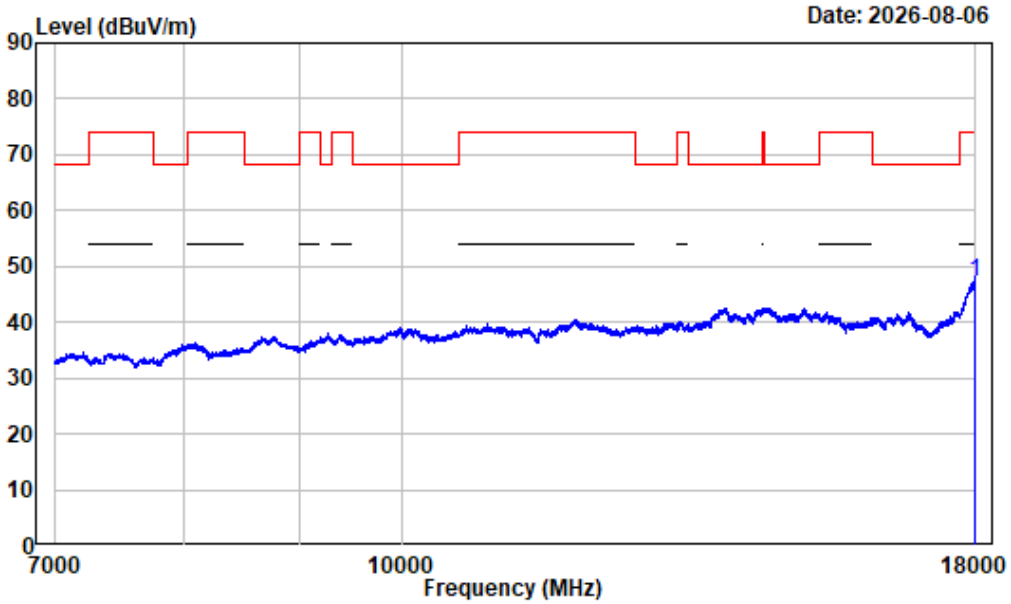

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17991.750	10.65	36.48	47.13	54.00	-6.87	Average


1-7GHz_Horizontal_11AC80_5210

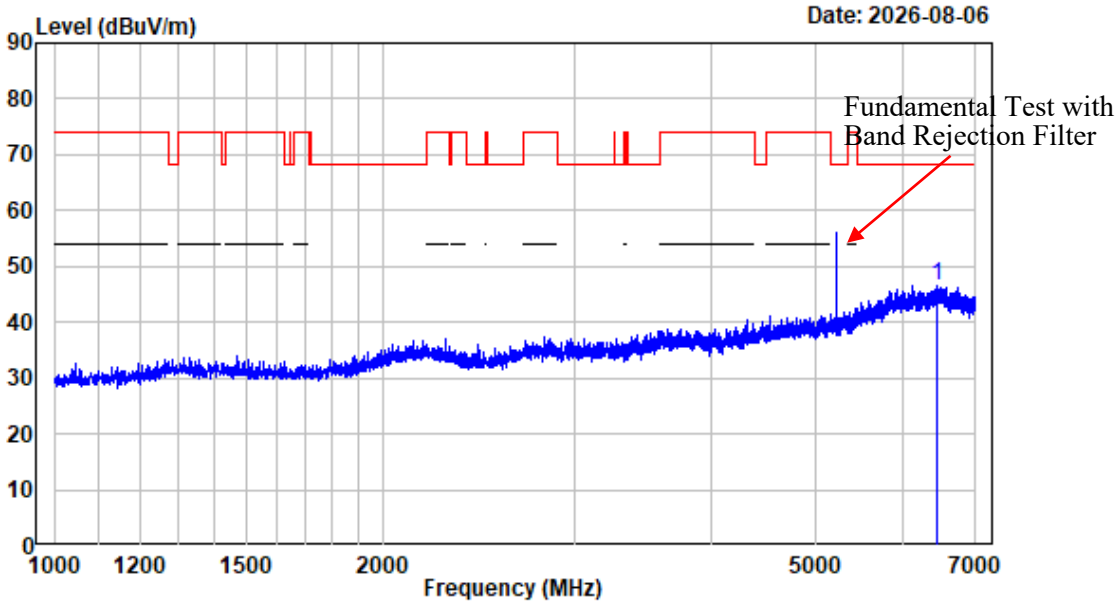

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6460.750	-2.07	48.58	46.51	68.20	-21.69	Peak


1-7GHz_Vertical_11AC80_5210

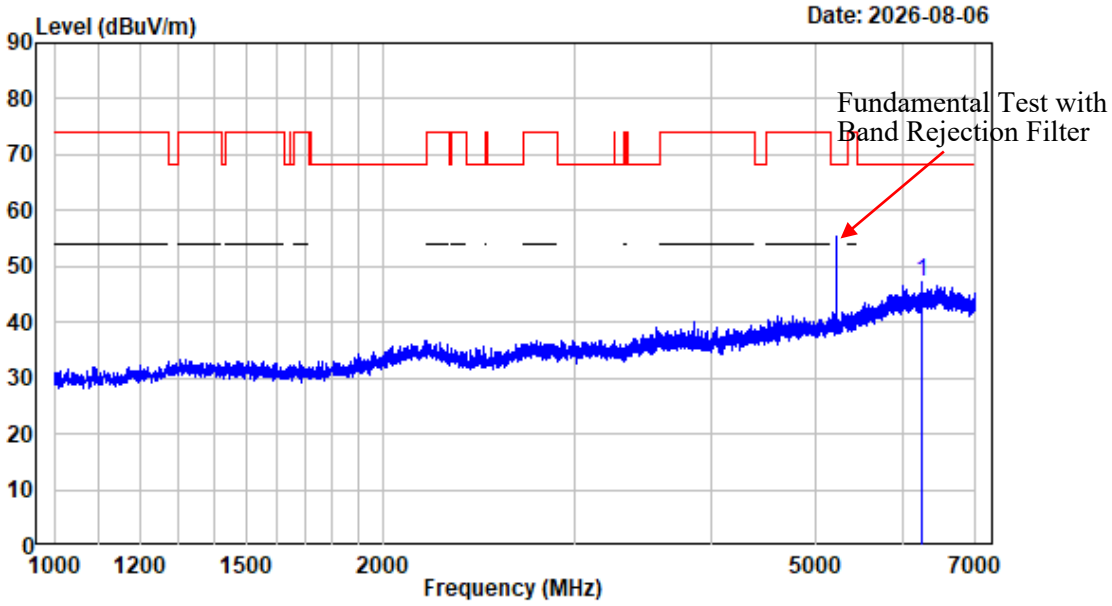

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6250.750	-2.34	49.41	47.07	68.20	-21.13	Peak


7-18GHz_Horizontal_Peak_11AC80_5210

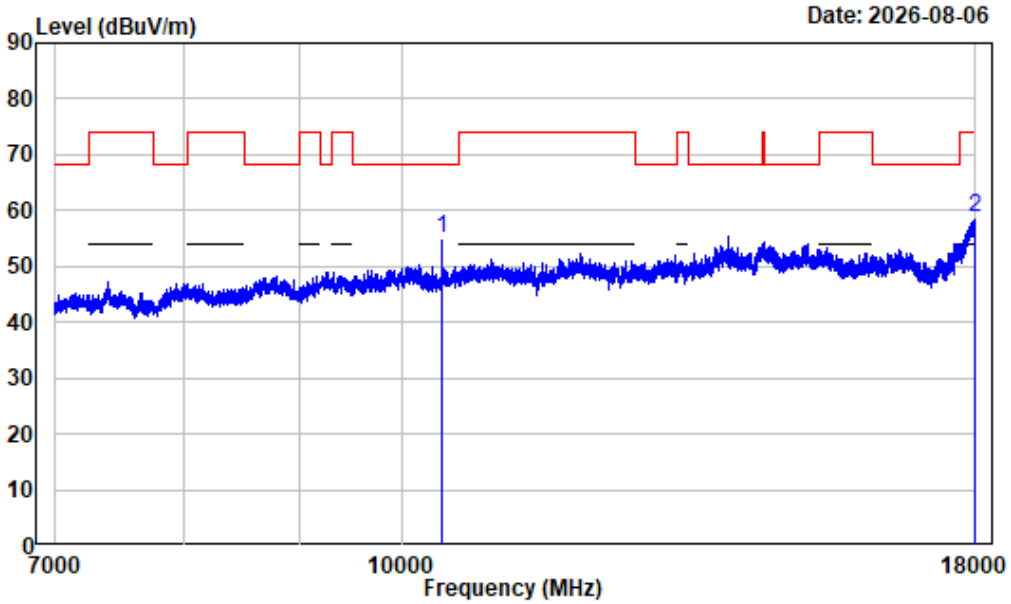

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	1.58	53.48	55.06	68.20	-13.14	Peak
2	17998.630	10.80	47.95	58.75	74.00	-15.25	Peak


7-18GHz_Horizontal_Average_11AC80_5210

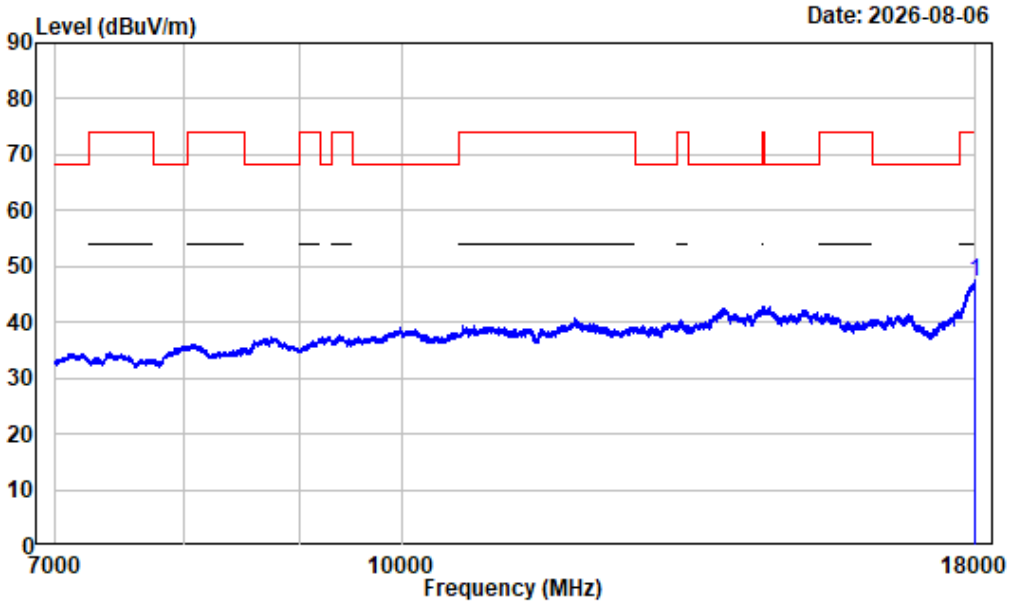

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17975.250	10.35	36.80	47.15	54.00	-6.85	Average


7-18GHz_Vertical_Peak_11AC80_5210

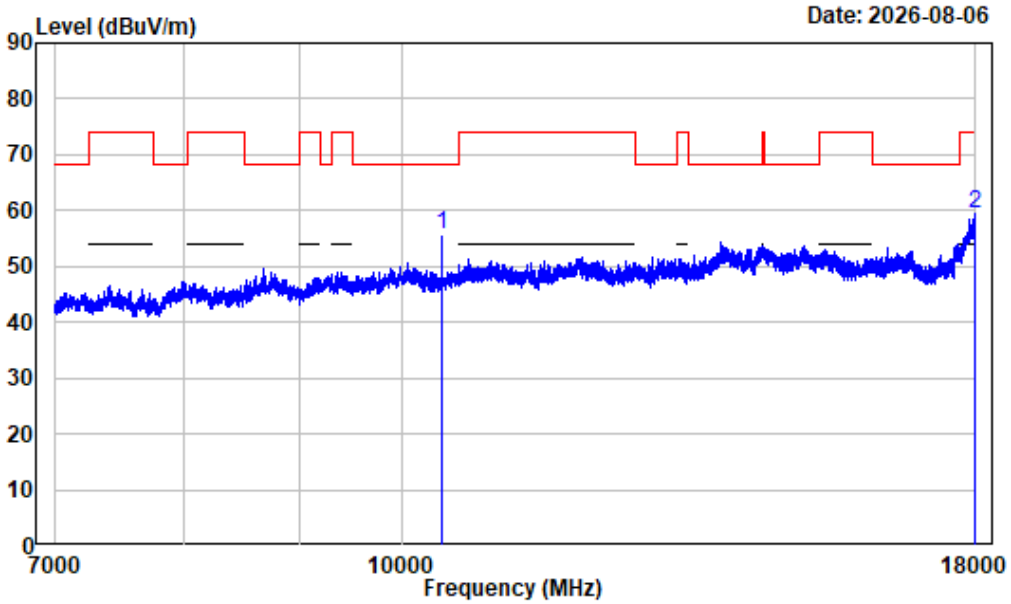

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	1.58	54.02	55.60	68.20	-12.60	Peak
2	17986.250	10.55	48.76	59.31	74.00	-14.69	Peak


7-18GHz_Vertical_Average_11AC80_5210

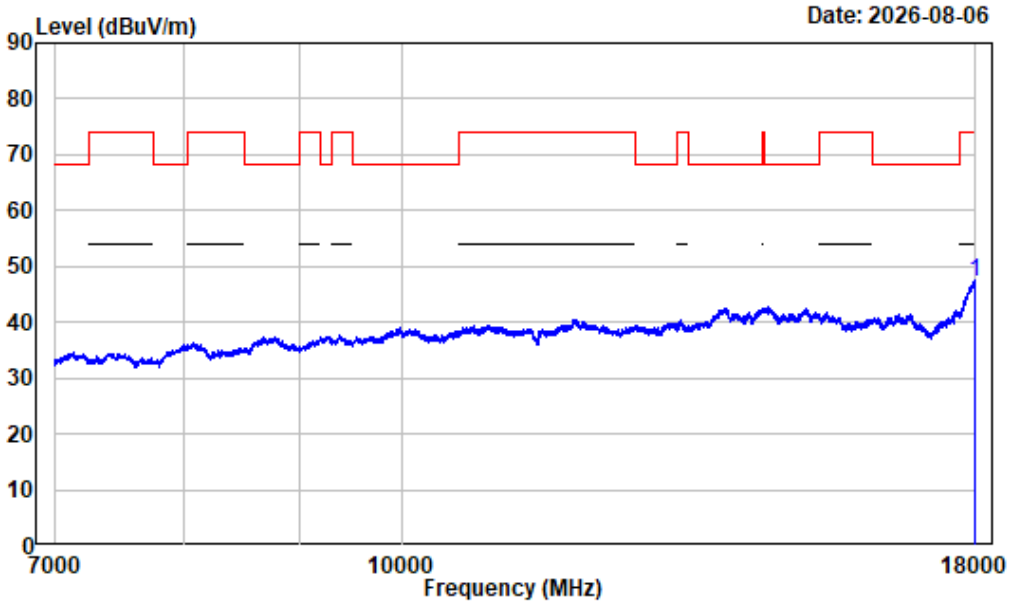

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17998.250	10.80	36.28	47.08	54.00	-6.92	Average


1-7GHz_Horizontal_11AX20_5240

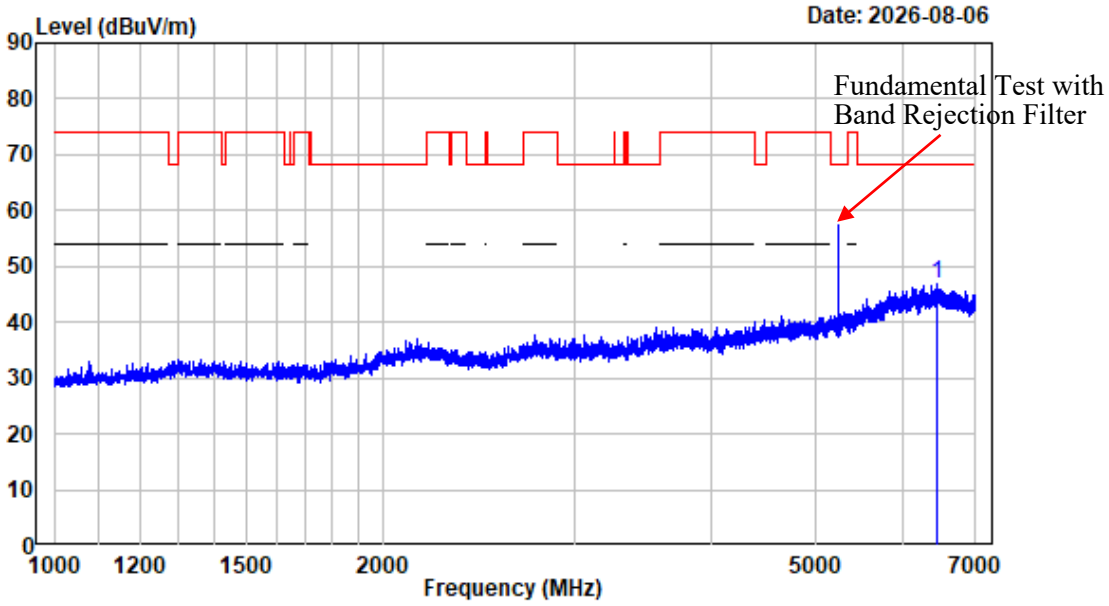

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6460.000	-2.08	48.83	46.75	68.20	-21.45	Peak


1-7GHz_Vertical_11AX20_5240

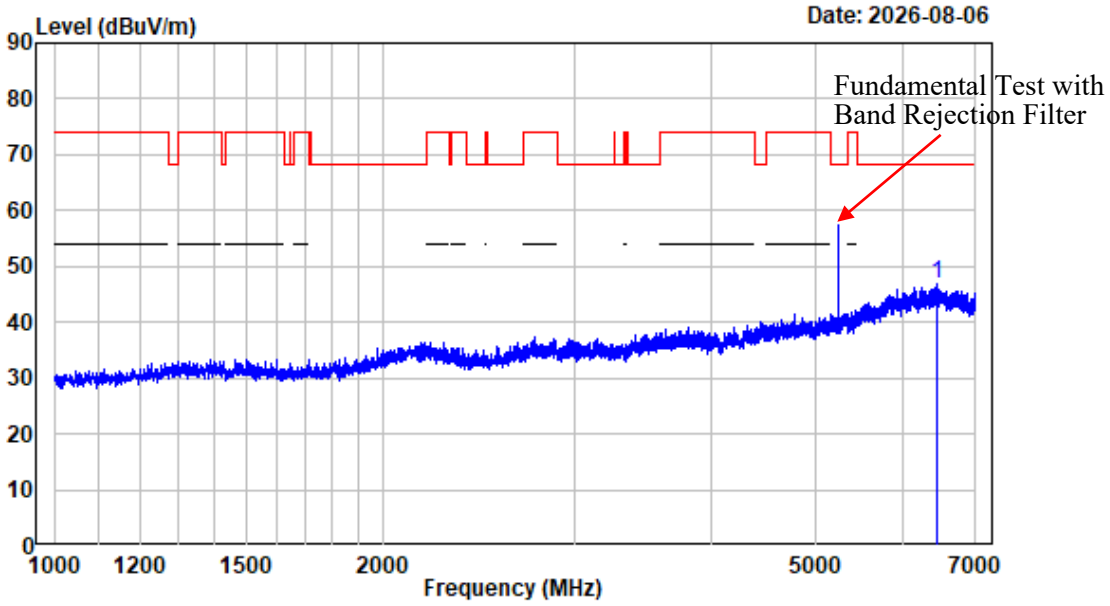

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6462.250	-2.05	48.84	46.79	68.20	-21.41	Peak


7-18GHz_Horizontal_Peak_11AX20_5240

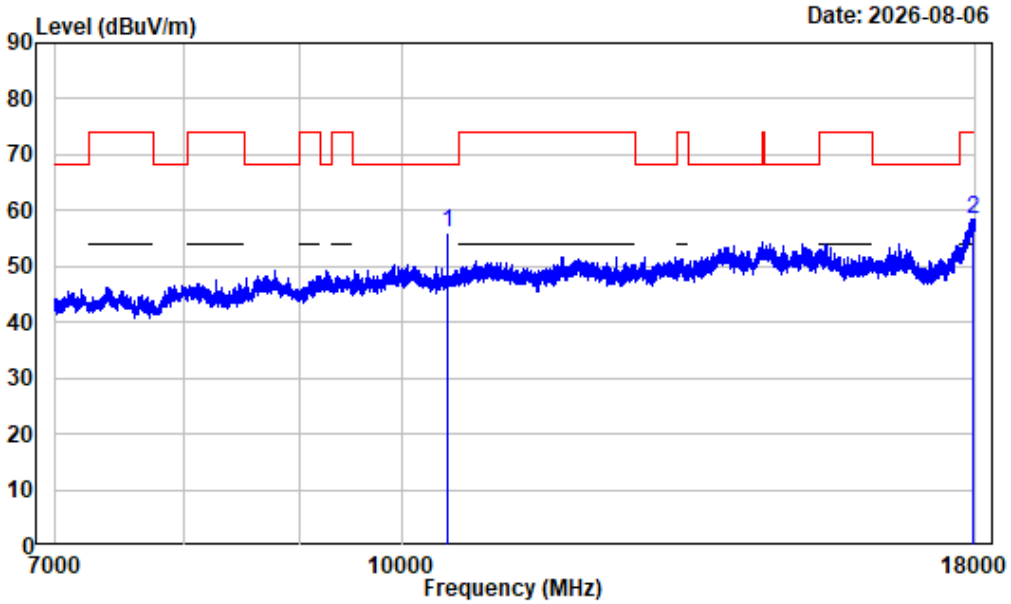

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	1.44	54.62	56.06	68.20	-12.14	Peak
2	17964.250	10.16	48.26	58.42	74.00	-15.58	Peak


7-18GHz_Horizontal_Average_11AX20_5240

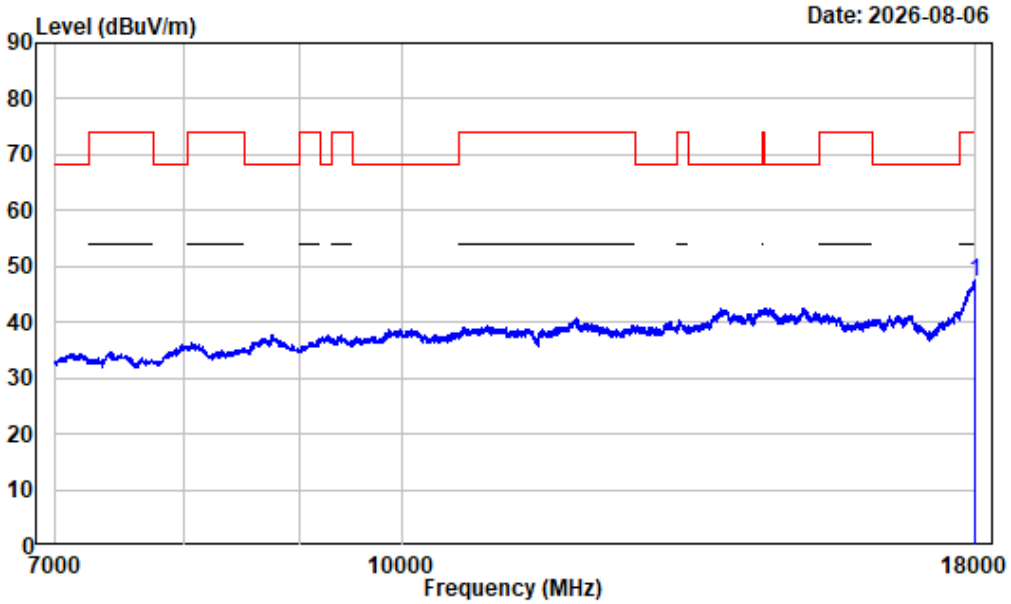

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	10.70	36.44	47.14	54.00	-6.86	Average


7-18GHz_Vertical_Peak_11AX20_5240

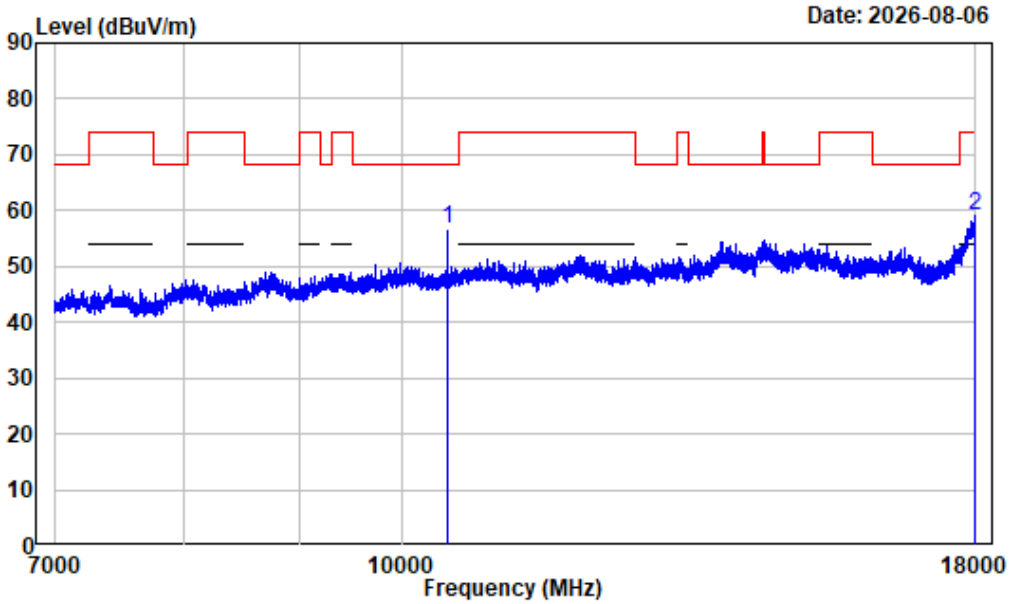

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	1.44	55.15	56.59	68.20	-11.61	Peak
2	17998.630	10.78	48.29	59.07	74.00	-14.93	Peak


7-18GHz_Vertical_Average_11AX20_5240

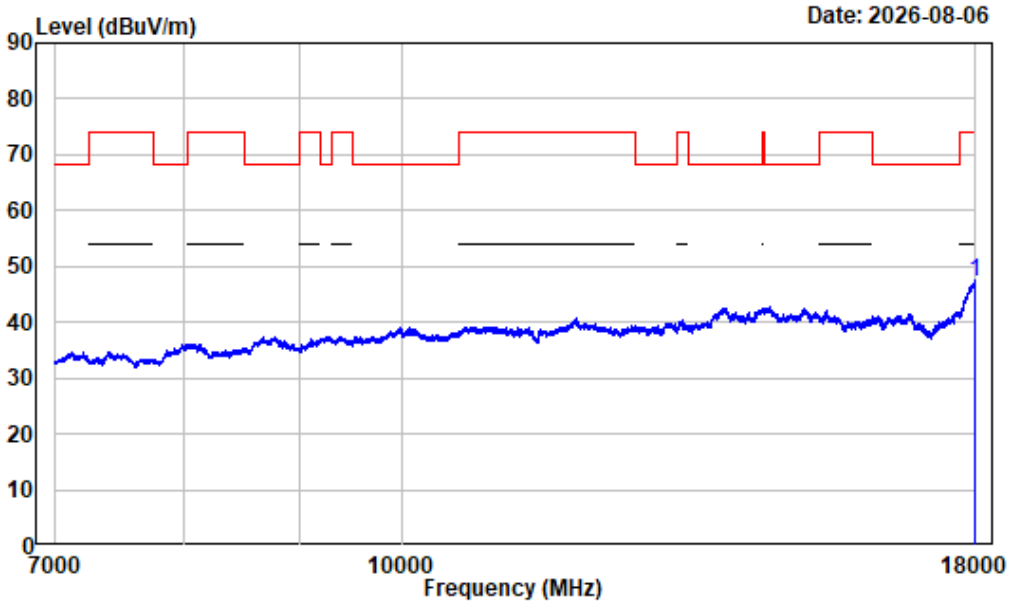

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17993.130	10.68	36.48	47.16	54.00	-6.84	Average


1-7GHz_Horizontal_11AX40_5230

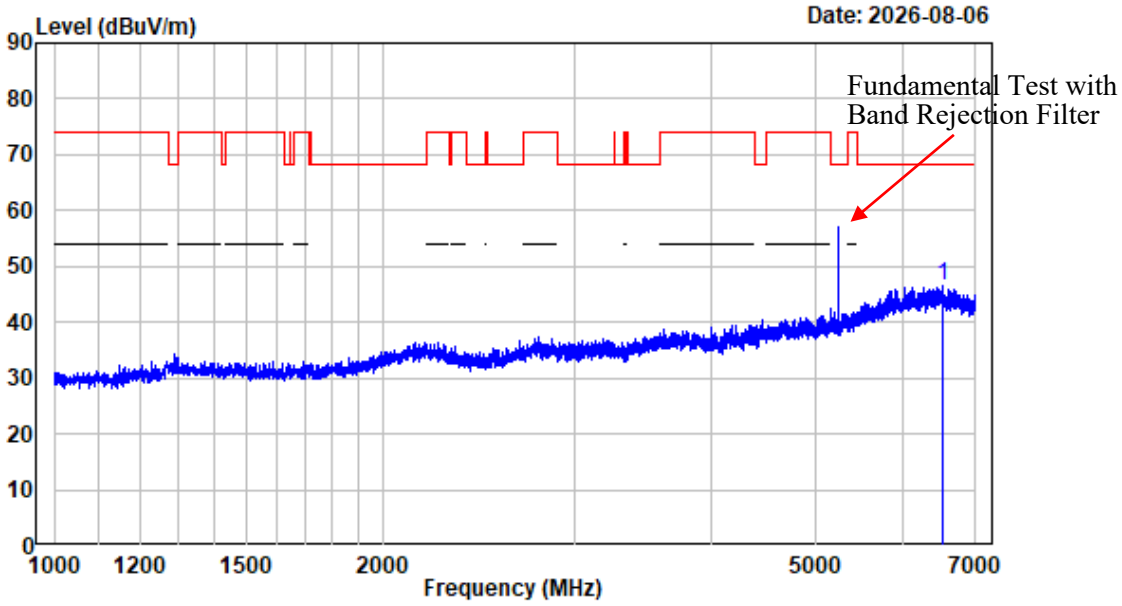

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6521.500	-1.75	48.38	46.63	68.20	-21.57	Peak


1-7GHz_Vertical_11AX40_5230

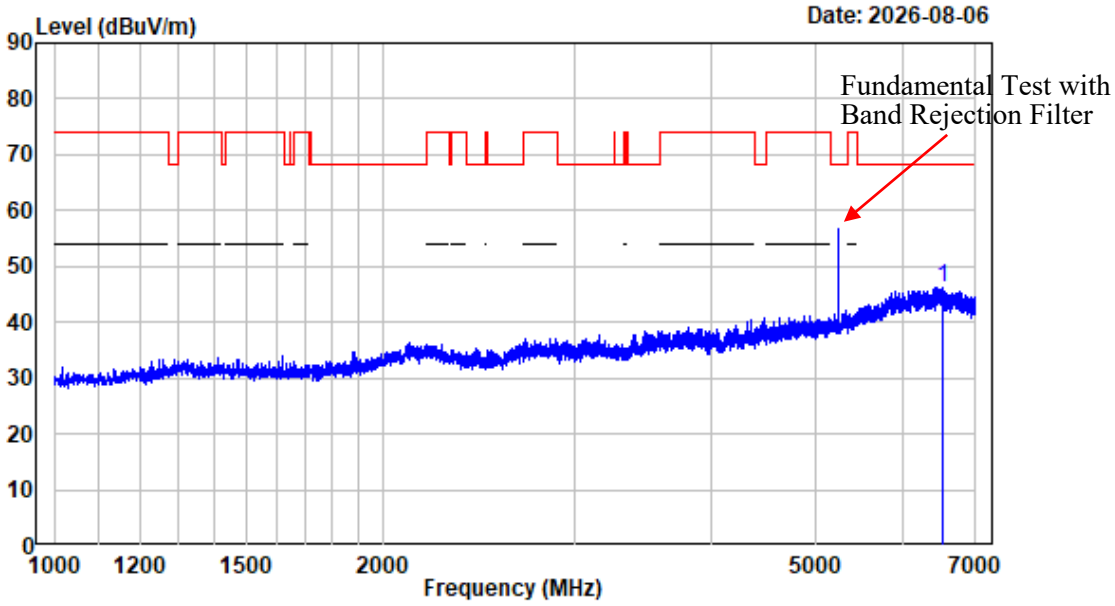

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6521.500	-1.75	48.07	46.32	68.20	-21.88	Peak


7-18GHz_Horizontal_Peak_11AX40_5230

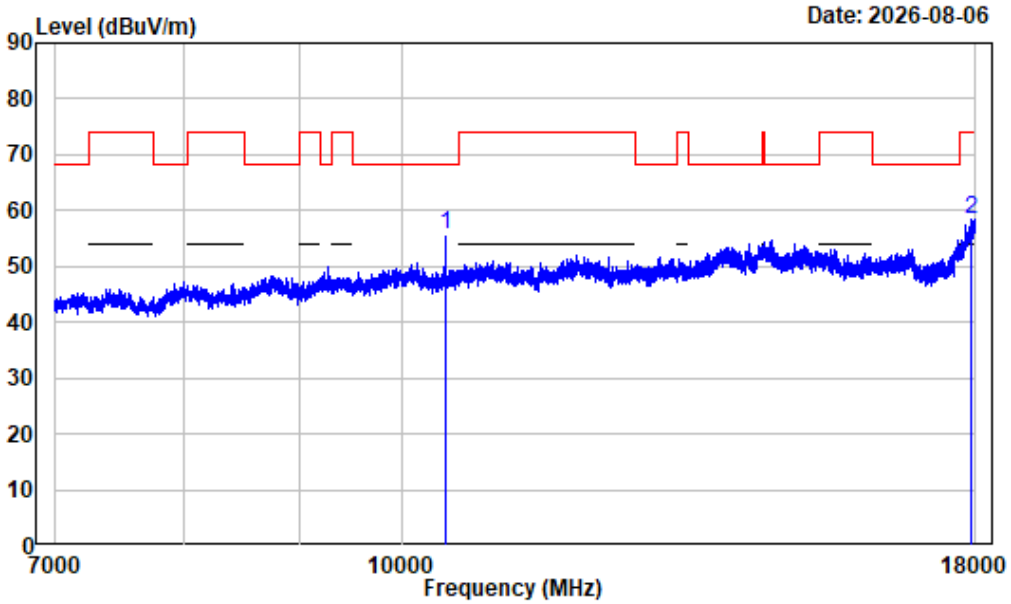

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	1.49	54.16	55.65	68.20	-12.55	Peak
2	17917.500	9.60	48.94	58.54	74.00	-15.46	Peak


7-18GHz_Horizontal_Average_11AX40_5230

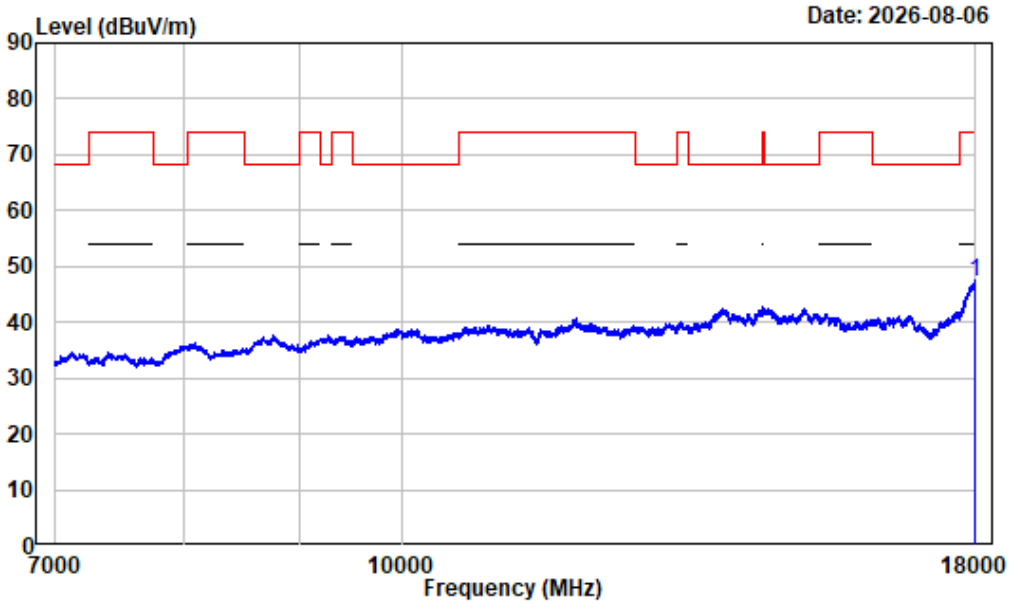

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	10.70	36.47	47.17	54.00	-6.83	Average


7-18GHz_Vertical_Peak_11AX40_5230

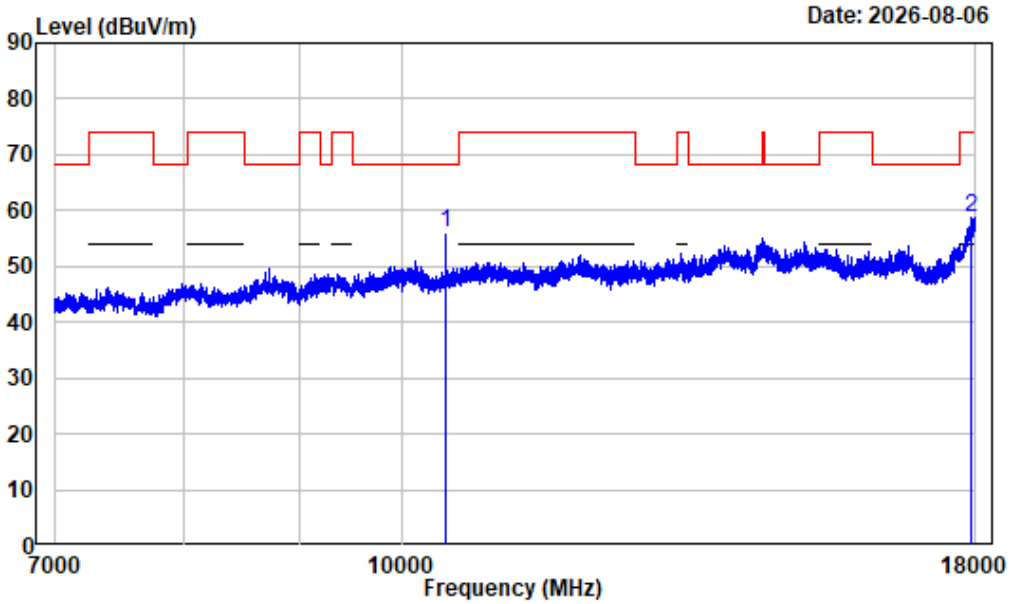

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	1.49	54.69	56.18	68.20	-12.02	Peak
2	17929.880	9.72	49.12	58.84	74.00	-15.16	Peak


7-18GHz_Vertical_Average_11AX40_5230

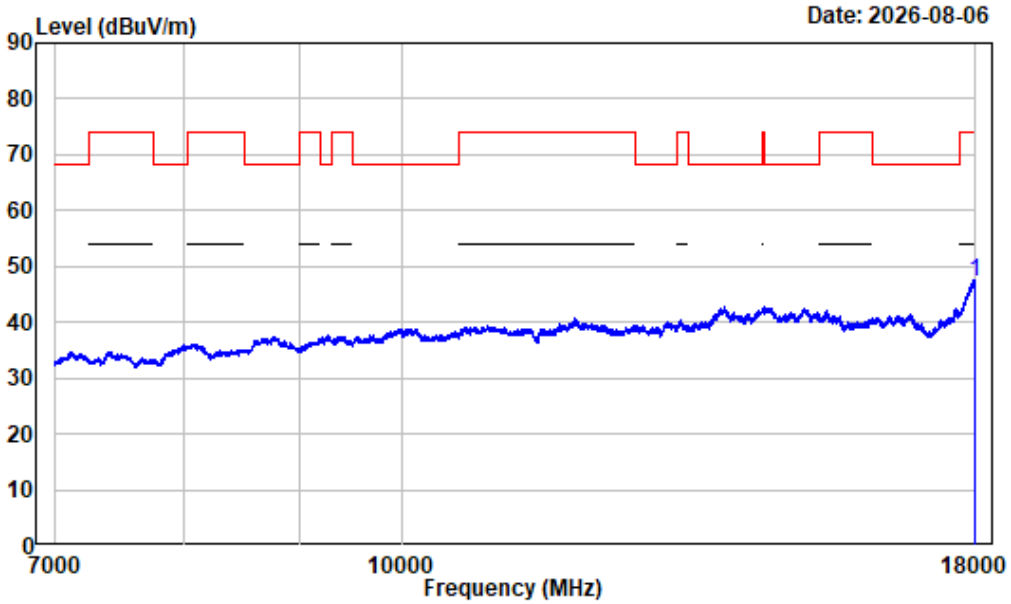

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17997.250	10.75	36.41	47.16	54.00	-6.84	Average


1-7GHz_Horizontal_11AX80_5210

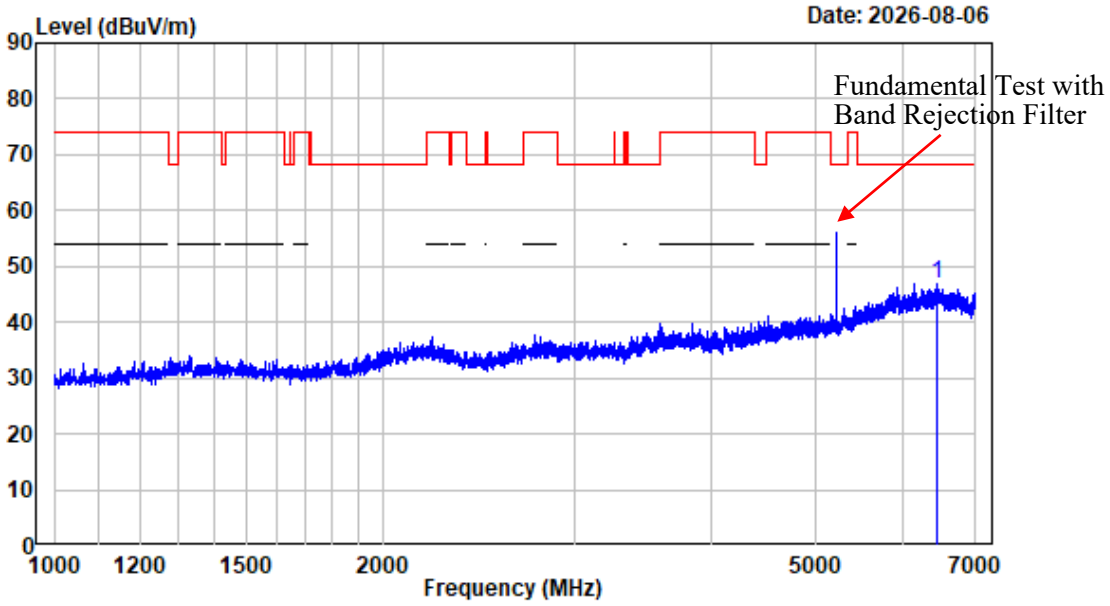

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6462.250	-2.05	49.02	46.97	68.20	-21.23	Peak


1-7GHz_Vertical_11AX80_5210

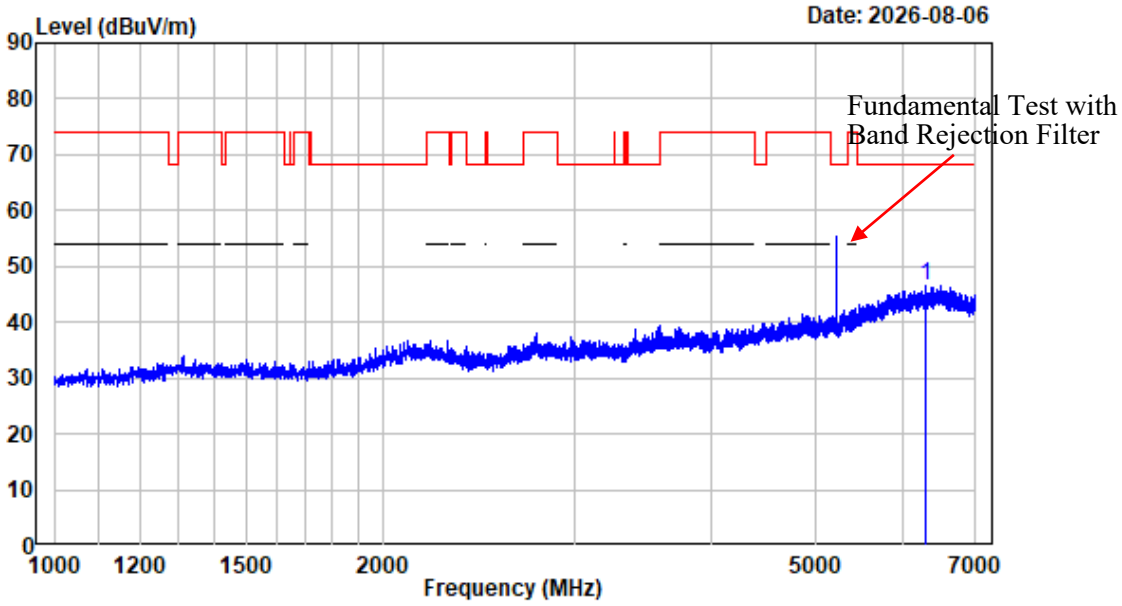

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6291.250	-2.50	48.99	46.49	68.20	-21.71	Peak


7-18GHz_Horizontal_Peak_11AX80_5210

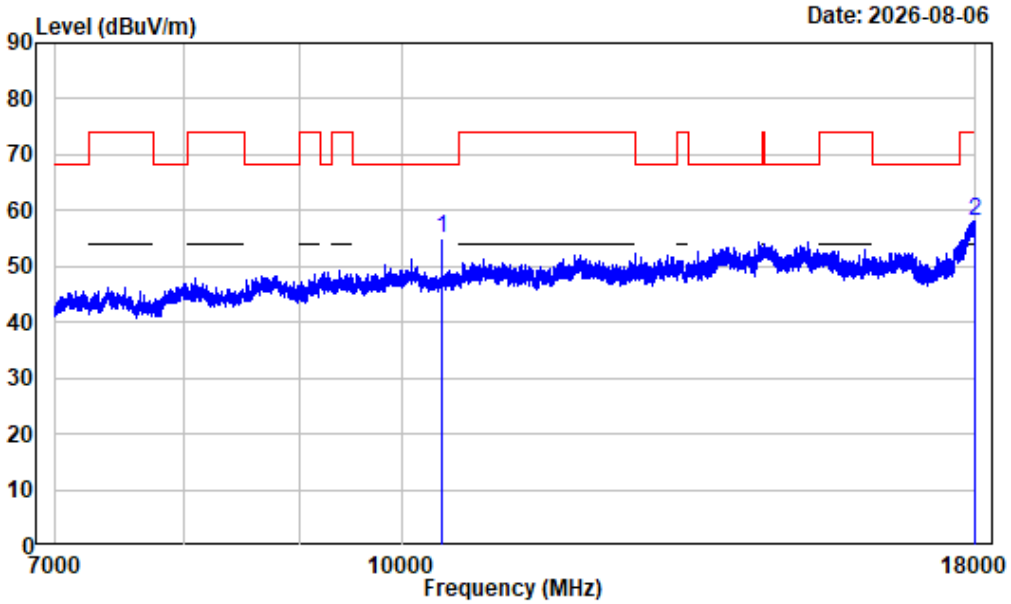

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	1.58	53.37	54.95	68.20	-13.25	Peak
2	17998.630	10.80	47.31	58.11	74.00	-15.89	Peak


7-18GHz_Horizontal_Average_11AX80_5210

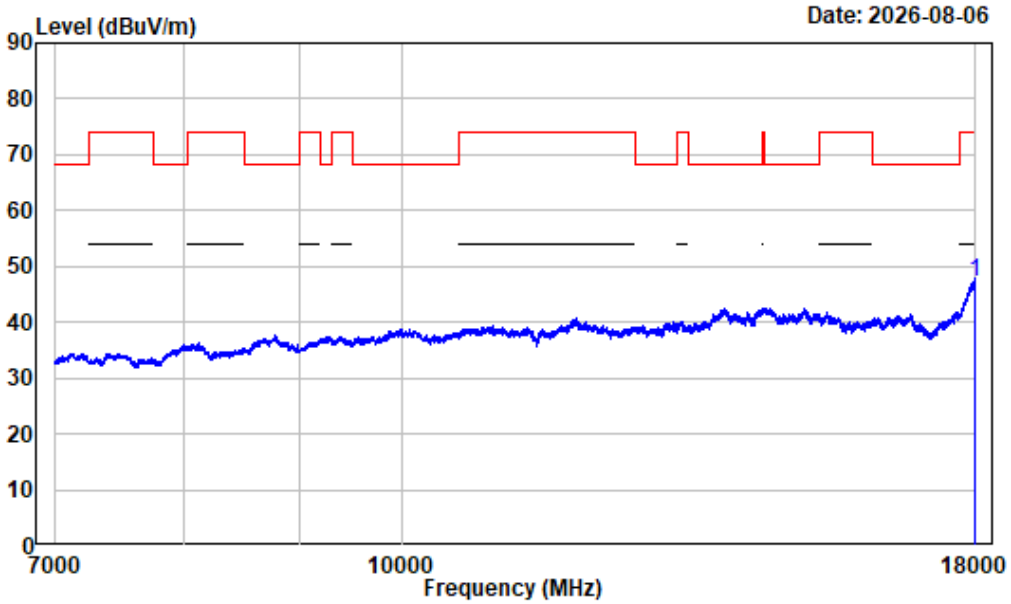

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	10.70	36.46	47.16	54.00	-6.84	Average


7-18GHz_Vertical_Peak_11AX80_5210

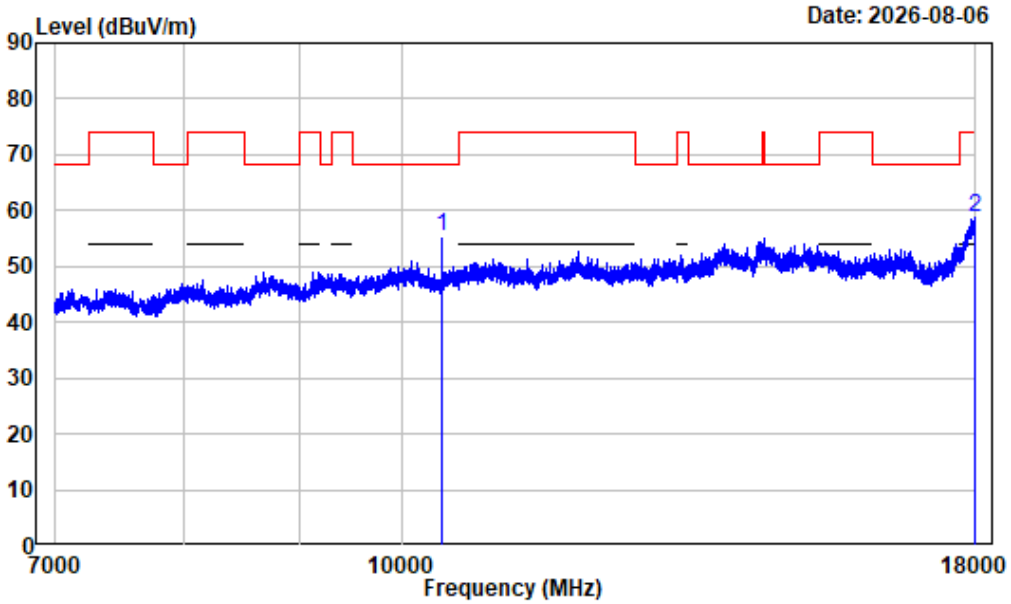

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	1.58	53.89	55.47	68.20	-12.73	Peak
2	17993.130	10.68	47.96	58.64	74.00	-15.36	Peak


7-18GHz_Vertical_Average_11AX80_5210

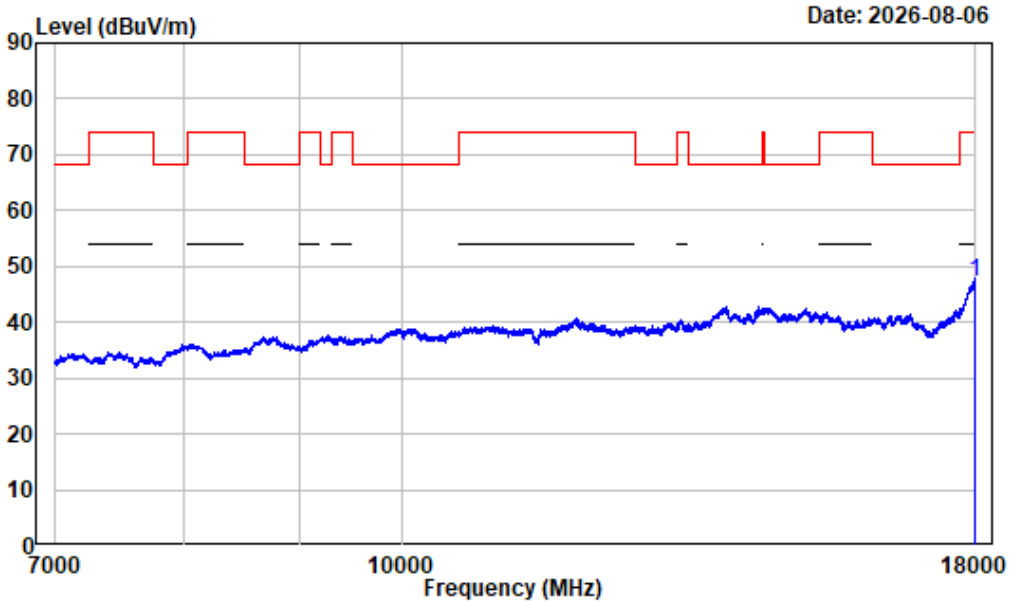

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	10.70	36.44	47.14	54.00	-6.86	Average


1-7GHz_Horizontal_11A_5320

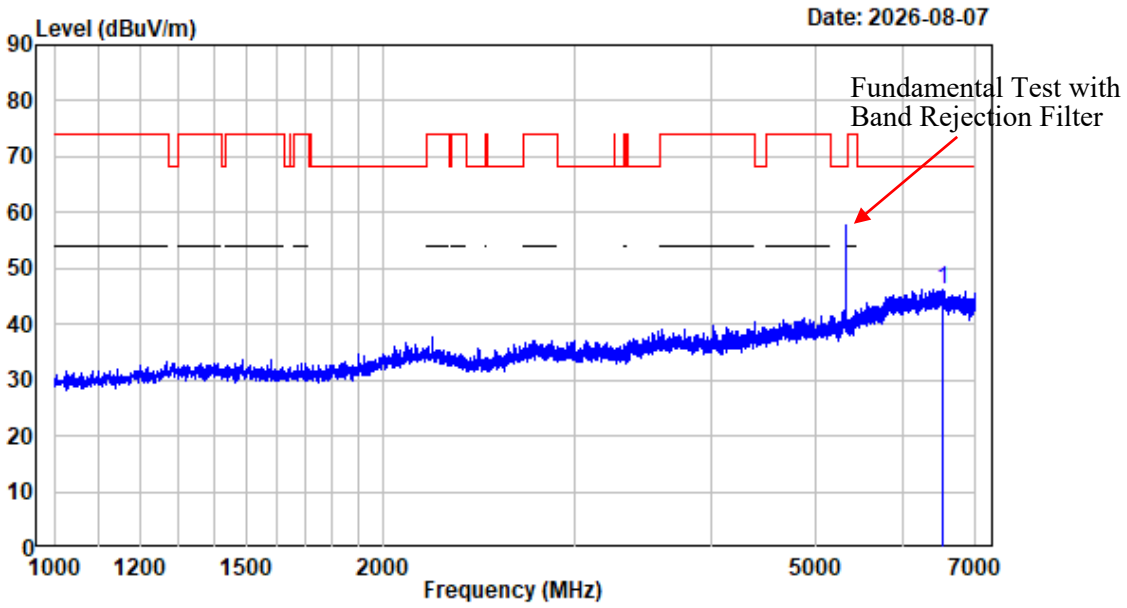

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6525.250	-1.76	48.04	46.28	68.20	-21.92	Peak


1-7GHz_Vertical_11A_5320

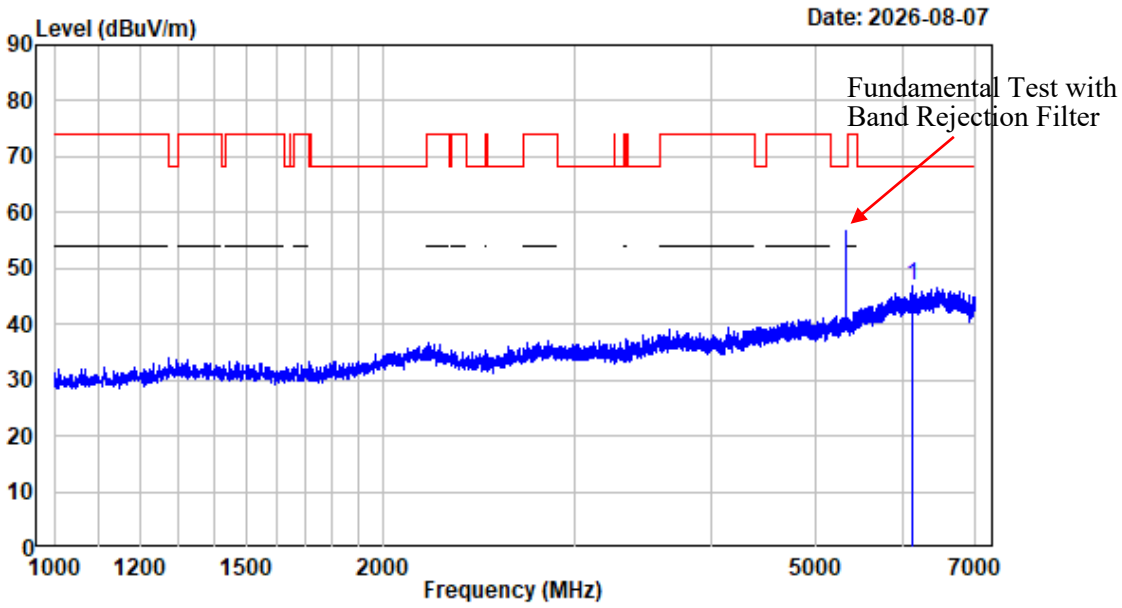

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6136.000	-2.33	49.05	46.72	68.20	-21.48	Peak


7-18GHz_Horizontal_Peak_11A_5320

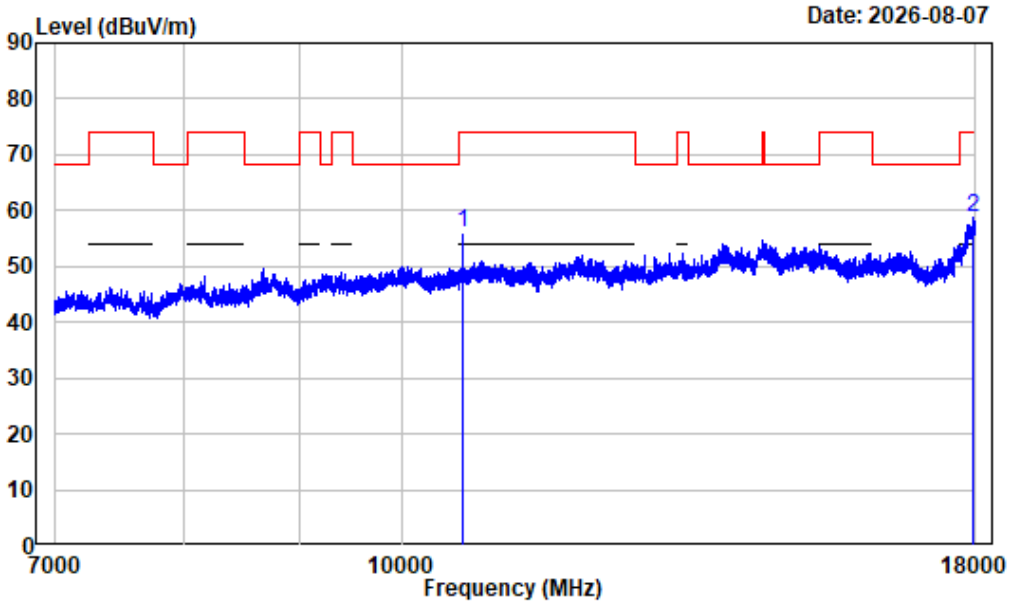

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	54.24	56.04	74.00	-17.96	Peak
2	17971.130	10.28	48.63	58.91	74.00	-15.09	Peak


7-18GHz_Horizontal_Average_11A_5320

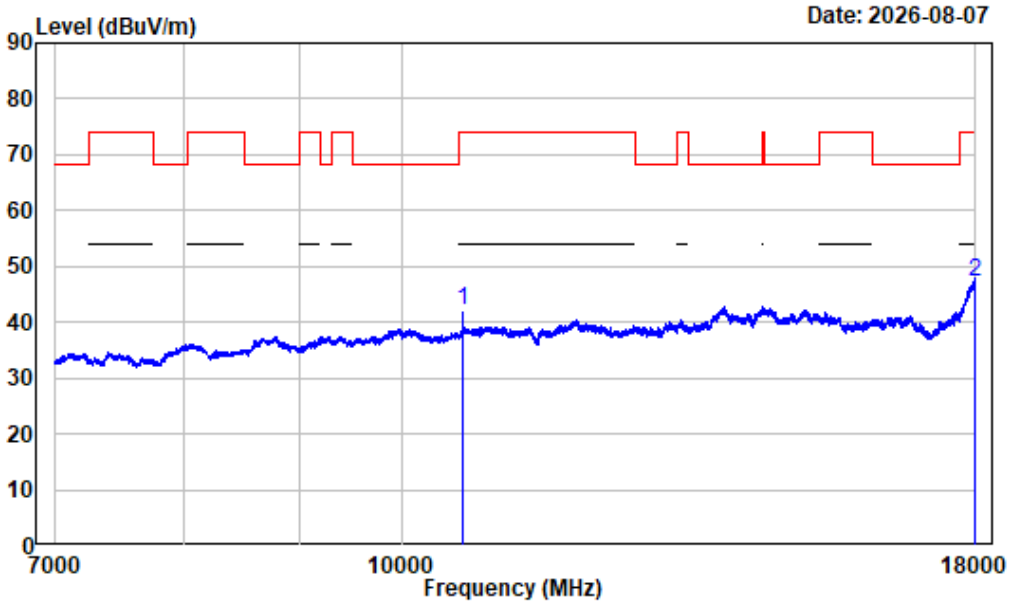

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	40.37	42.17	54.00	-11.83	Average
2	17998.630	10.78	36.36	47.14	54.00	-6.86	Average


7-18GHz_Vertical_Peak_11A_5320

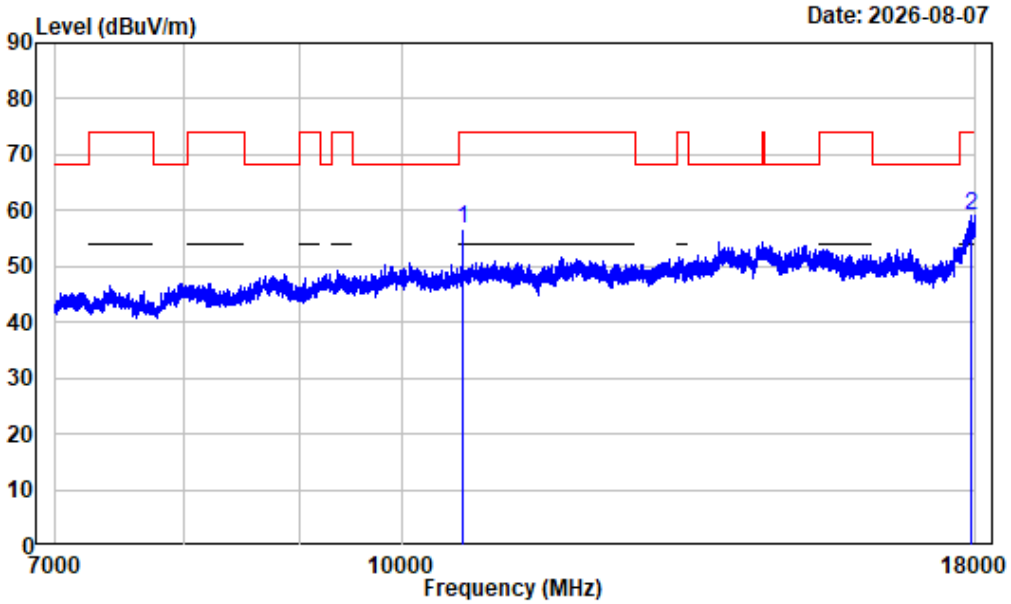

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	54.78	56.58	74.00	-17.42	Peak
2	17906.500	9.50	49.59	59.09	74.00	-14.91	Peak


7-18GHz_Vertical_Average_11A_5320

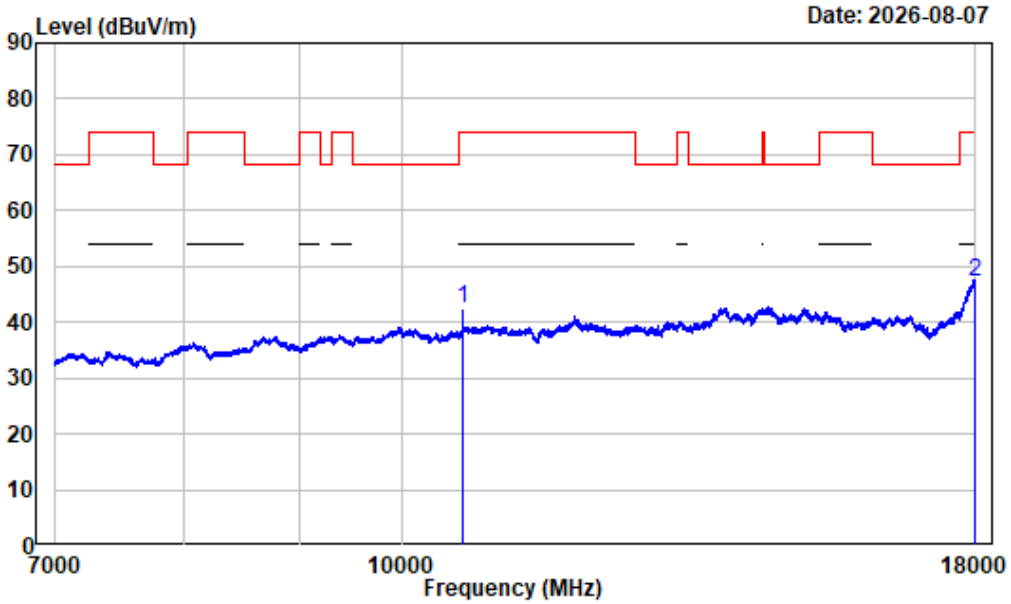

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	40.65	42.45	54.00	-11.55	Average
2	17995.880	10.73	36.42	47.15	54.00	-6.85	Average


1-7GHz_Horizontal_11AC20_5320

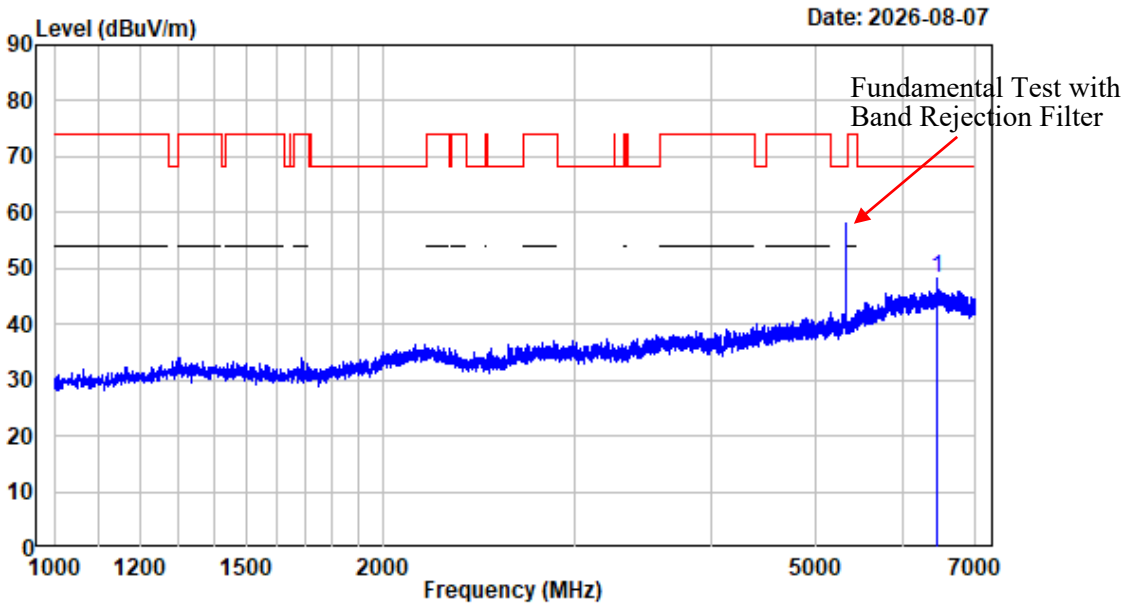

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6461.500	-2.06	50.45	48.39	68.20	-19.81	Peak


1-7GHz_Vertical_11AC20_5320

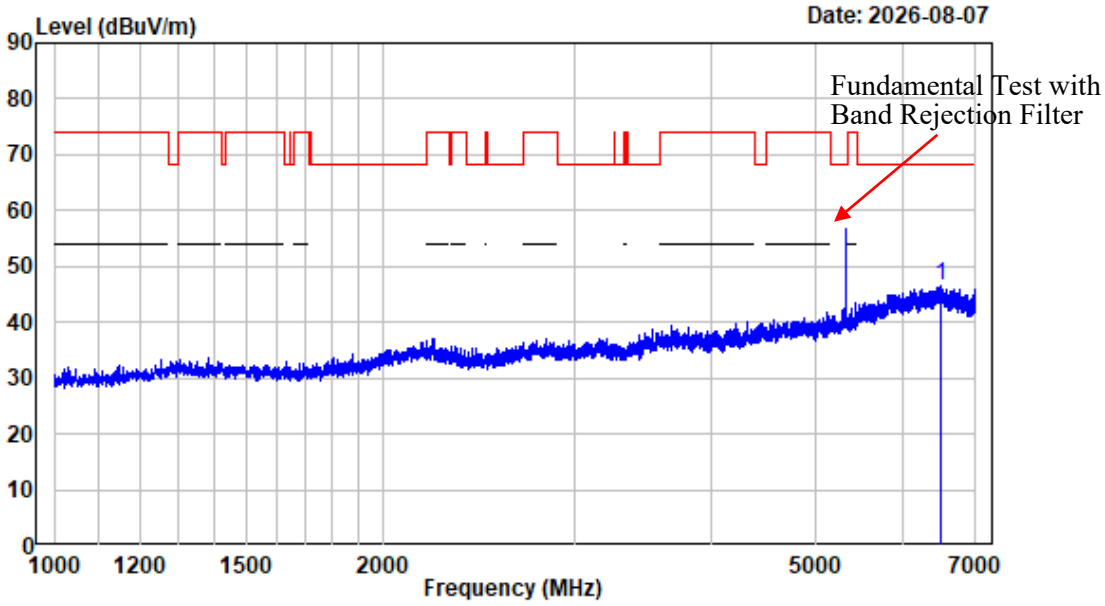

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6517.750	-1.73	48.29	46.56	68.20	-21.64	Peak


7-18GHz_Horizontal_Peak_11AC20_5320

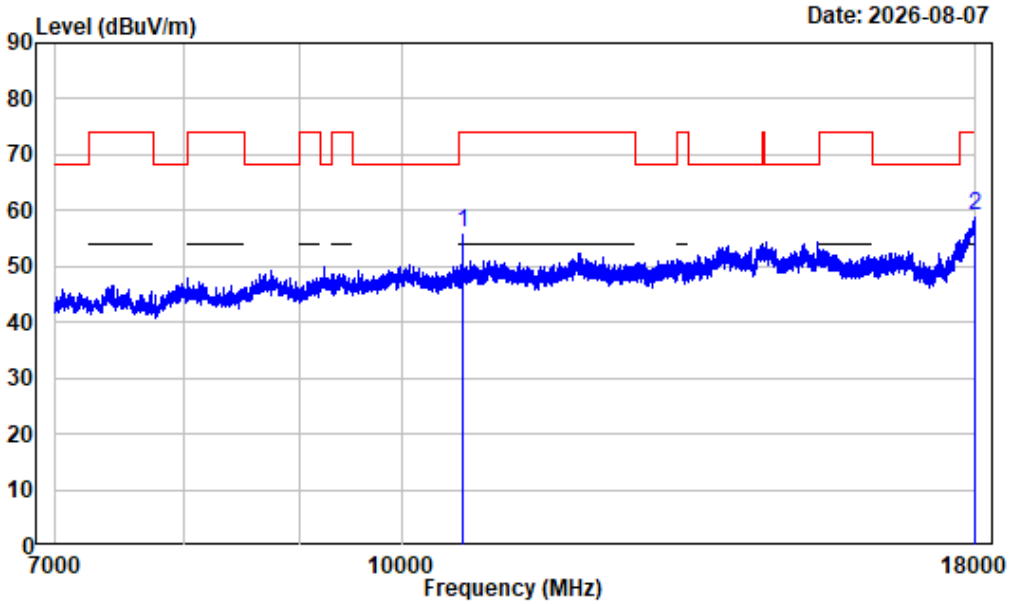

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	54.11	55.91	74.00	-18.09	Peak
2	17998.630	10.80	48.15	58.95	74.00	-15.05	Peak


7-18GHz_Horizontal_Average_11AC20_5320

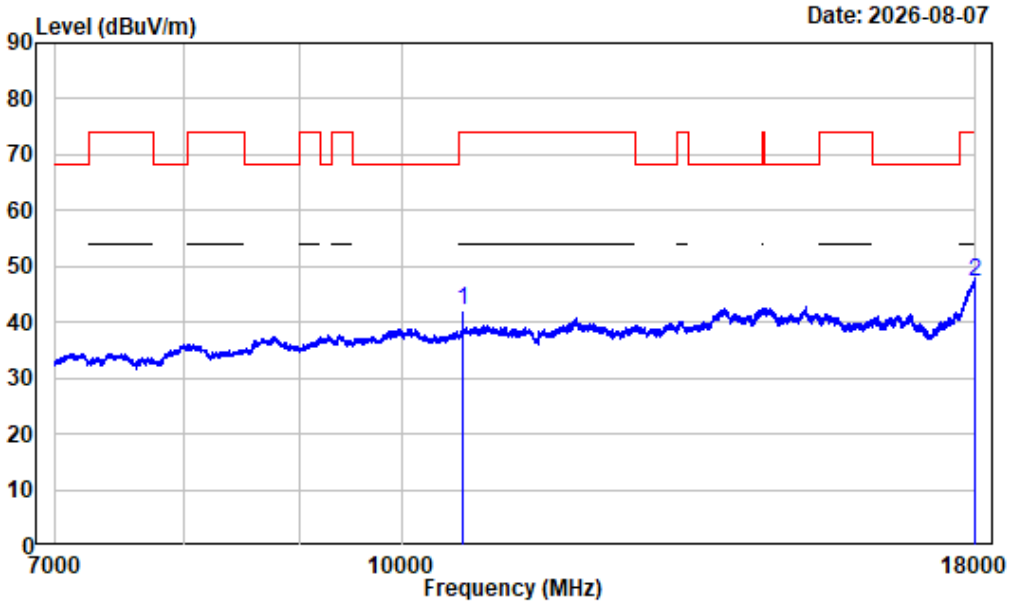

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	40.32	42.12	54.00	-11.88	Average
2	17995.880	10.73	36.34	47.07	54.00	-6.93	Average


7-18GHz_Vertical_Peak_11AC20_5320

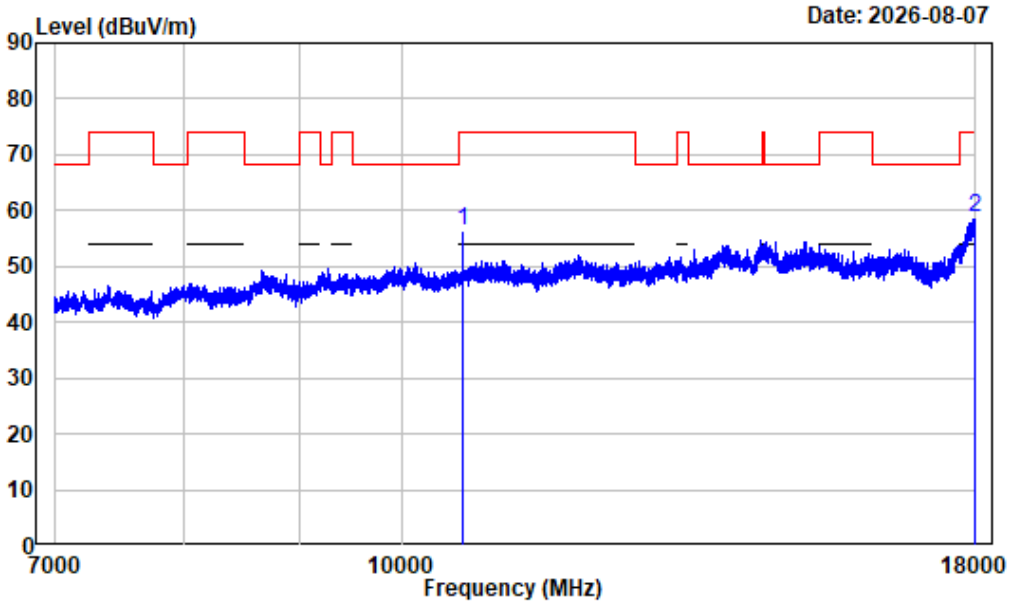

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	54.64	56.44	74.00	-17.56	Peak
2	17998.450	10.80	48.10	58.90	74.00	-15.10	Peak


7-18GHz_Vertical_Average_11AC20_5320

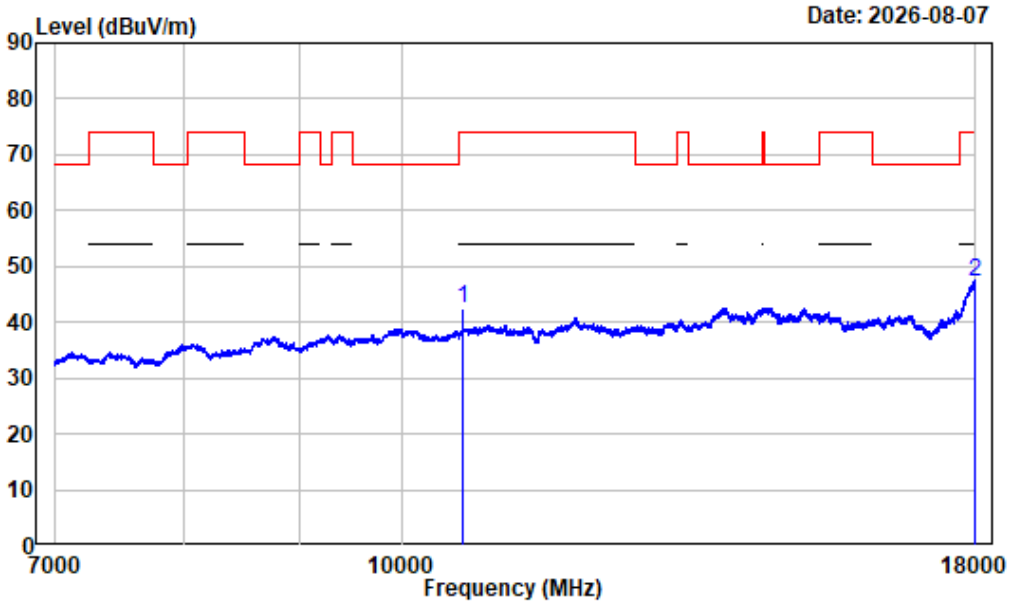

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	40.57	42.37	54.00	-11.63	Average
2	17998.630	10.80	36.30	47.10	54.00	-6.90	Average


1-7GHz_Horizontal_11AC40_5310

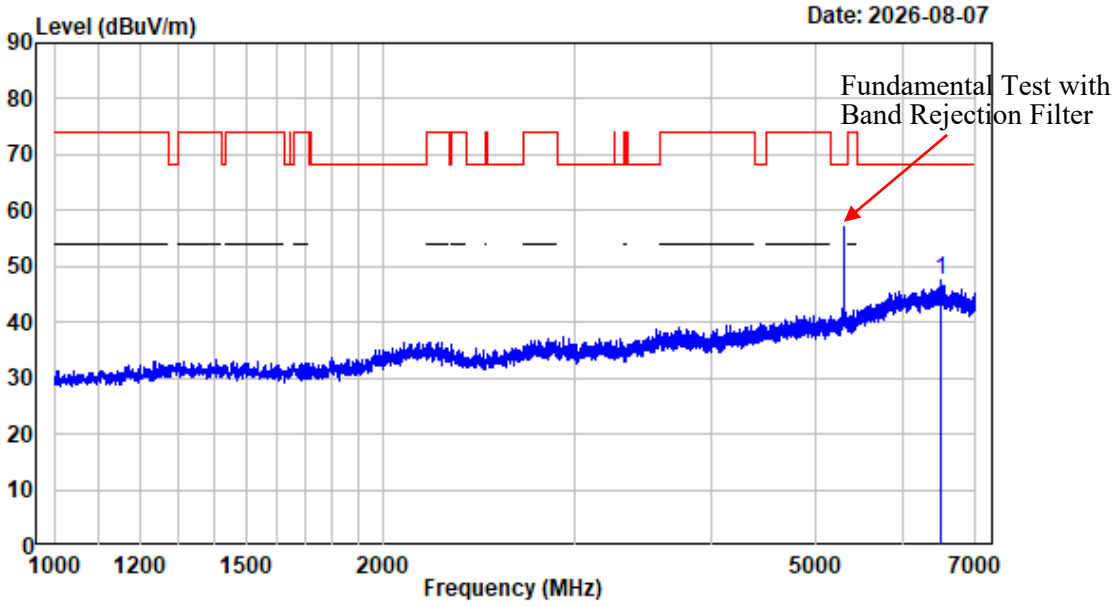

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6508.750	-1.68	49.31	47.63	68.20	-20.57	Peak


1-7GHz_Vertical_11AC40_5310

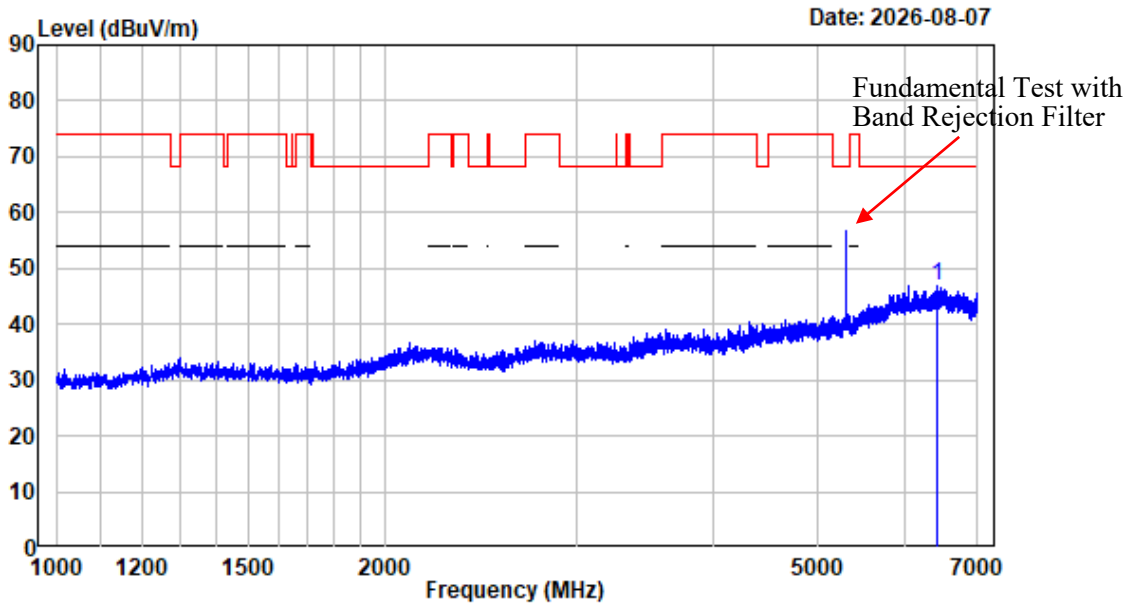

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6426.250	-2.19	49.17	46.98	68.20	-21.22	Peak


7-18GHz_Horizontal_Peak_11AC40_5310

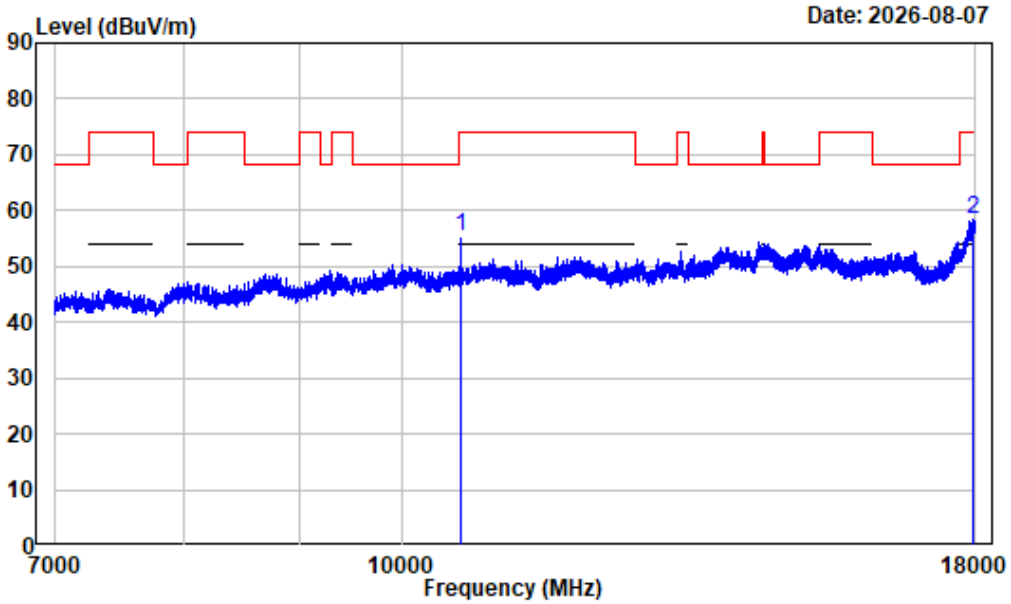

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	53.84	55.51	74.00	-18.49	Peak
2	17957.380	10.03	48.37	58.40	74.00	-15.60	Peak


7-18GHz_Horizontal_Average_11AC40_5310

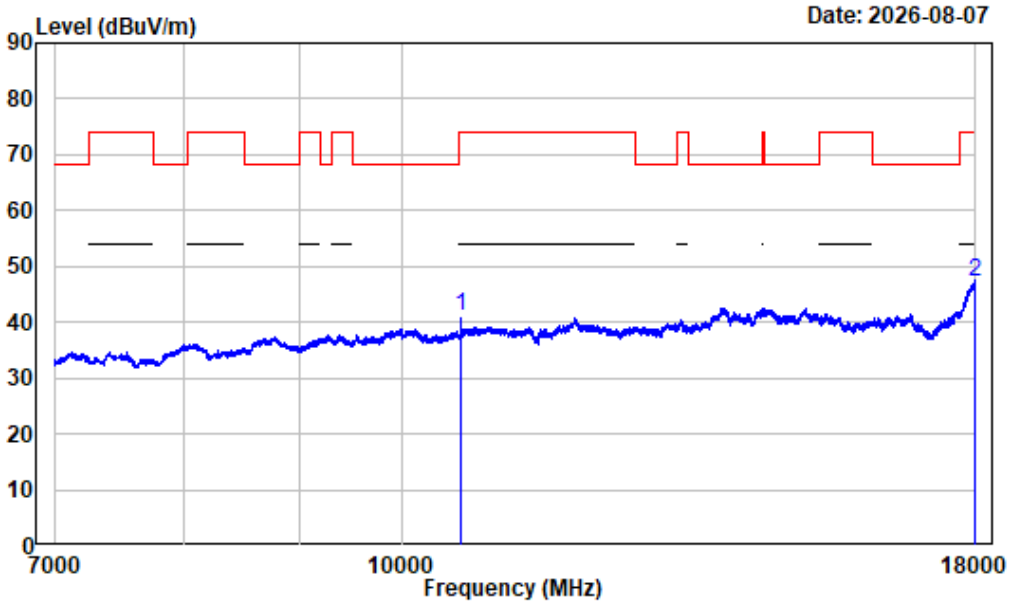

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	39.56	41.23	54.00	-12.77	Average
2	17990.380	10.63	36.46	47.09	54.00	-6.91	Average


7-18GHz_Vertical_Peak_11AC40_5310

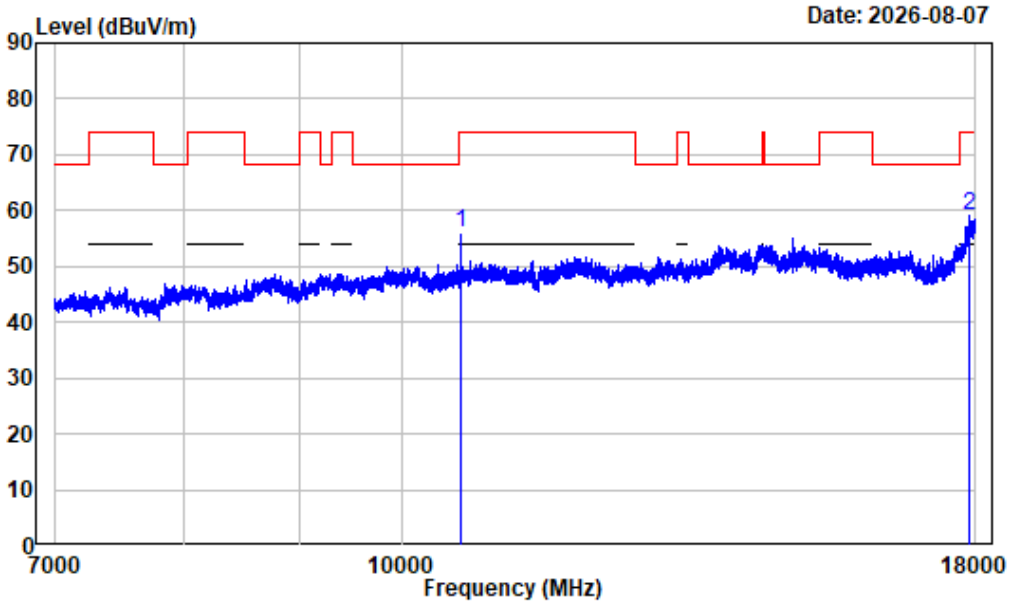

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	54.37	56.04	74.00	-17.96	Peak
2	17872.130	8.80	50.19	58.99	74.00	-15.01	Peak


7-18GHz_Vertical_Average_11AC40_5310

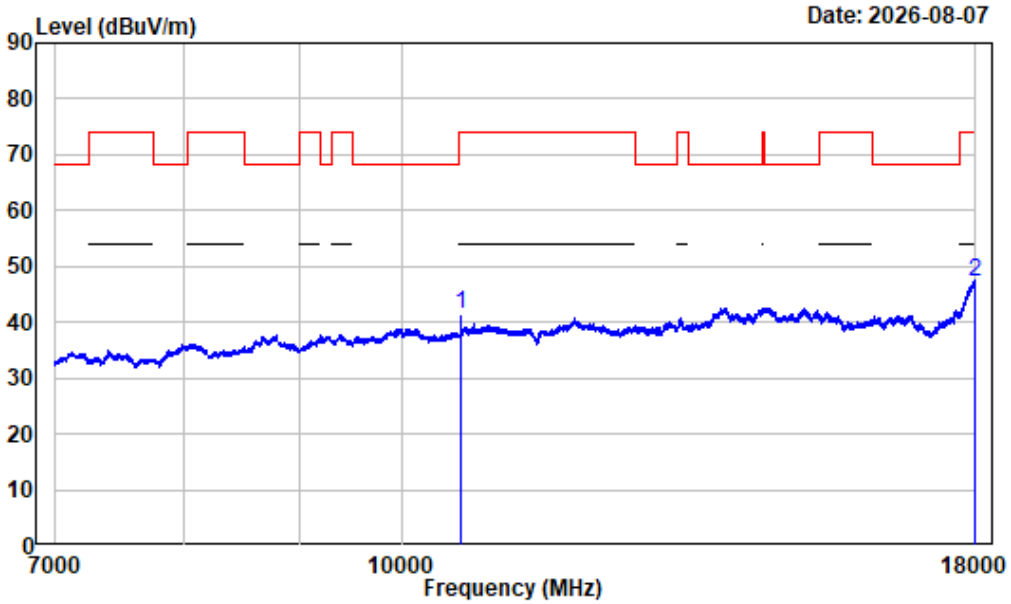

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	39.82	41.49	54.00	-12.51	Average
2	17987.630	10.58	36.50	47.08	54.00	-6.92	Average


1-7GHz_Horizontal_11AC80_5290

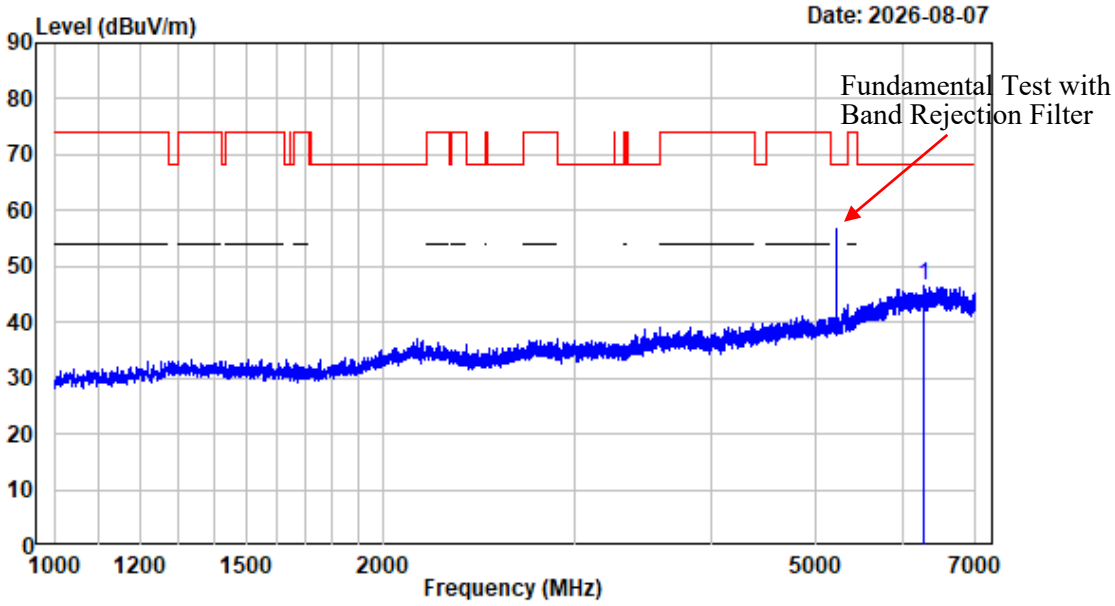

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6269.500	-2.40	49.05	46.65	68.20	-21.55	Peak


1-7GHz_Vertical_11AC80_5290

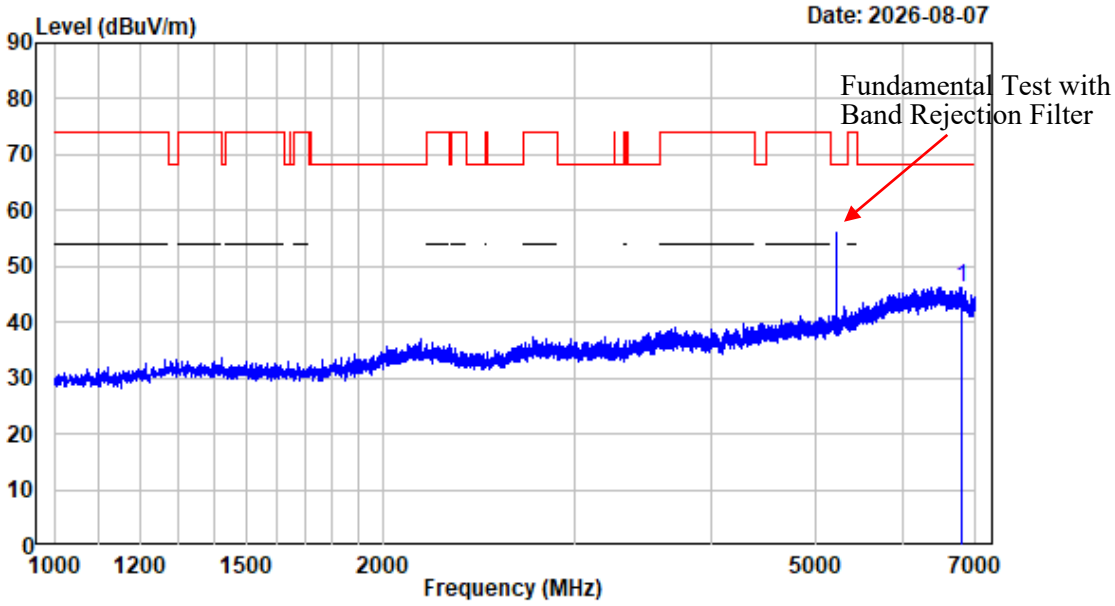

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6799.750	-2.70	48.99	46.29	68.20	-21.91	Peak


7-18GHz_Horizontal_Peak_11AC80_5290

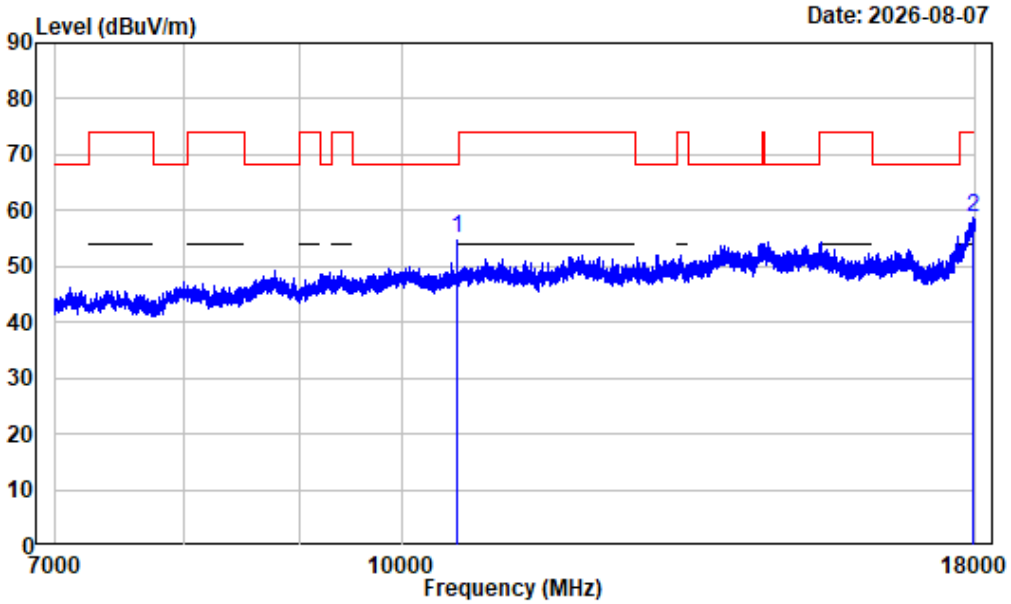

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	1.50	53.39	54.89	68.20	-13.31	Peak
2	17962.880	10.13	48.66	58.79	74.00	-15.21	Peak


7-18GHz_Horizontal_Average_11AC80_5290

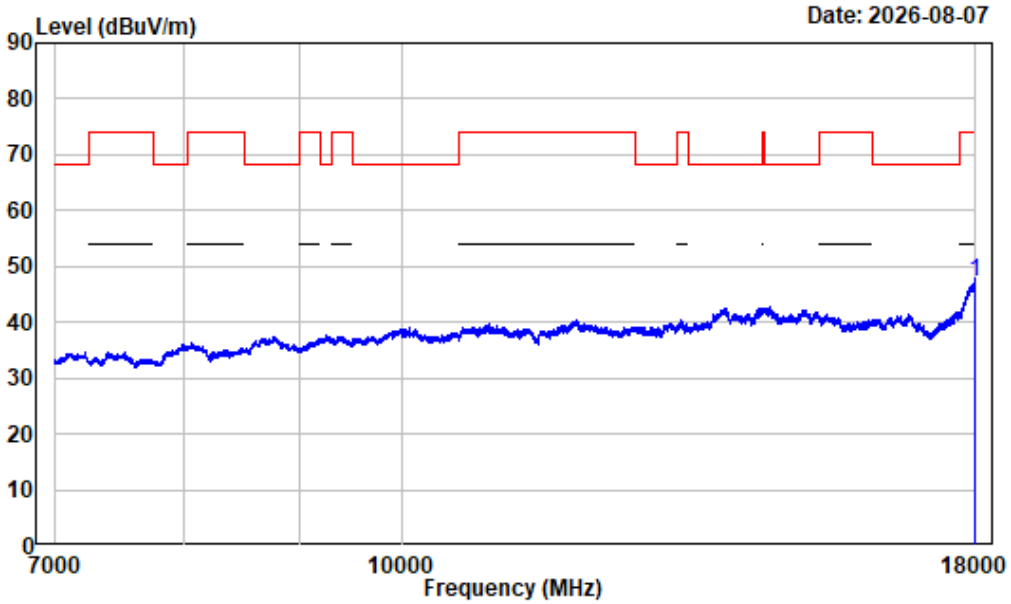

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17995.880	10.73	36.35	47.08	54.00	-6.92	Average


7-18GHz_Vertical_Peak_11AC80_5290

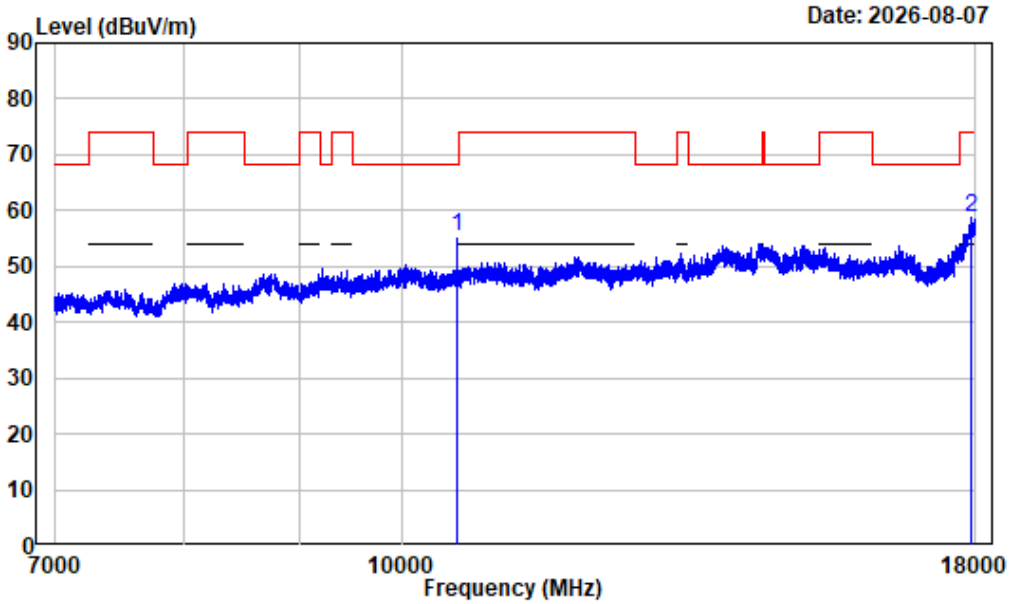

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	1.50	53.94	55.44	68.20	-12.76	Peak
2	17928.500	9.70	49.03	58.73	74.00	-15.27	Peak


7-18GHz_Vertical_Average_11AC80_5290

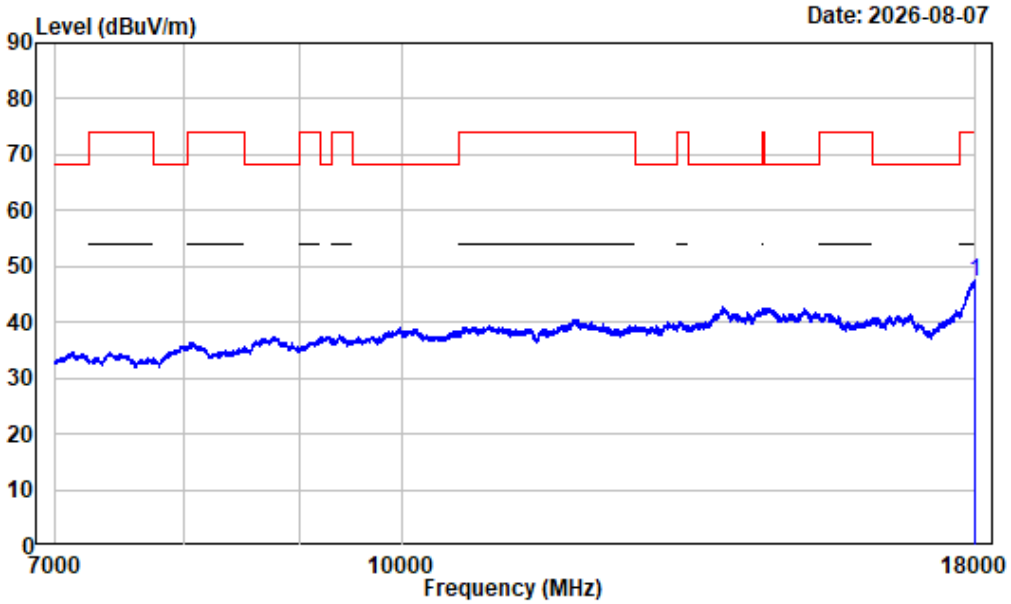

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17993.130	10.68	36.41	47.09	54.00	-6.91	Average


1-7GHz_Horizontal_11AX20_5320

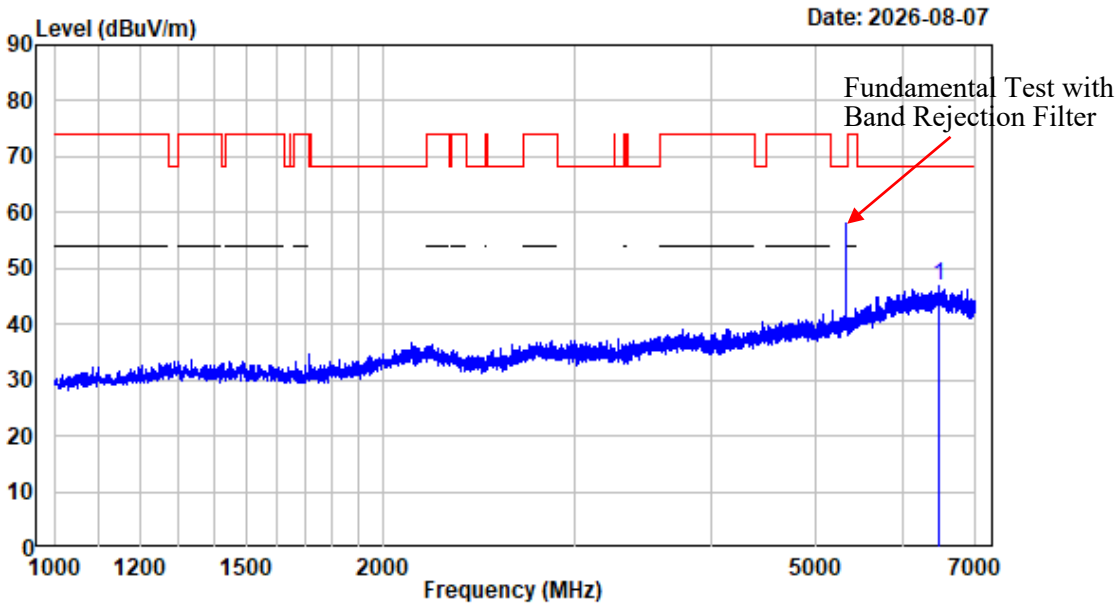

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6481.000	-1.84	48.58	46.74	68.20	-21.46	Peak


1-7GHz_Vertical_11AX20_5320

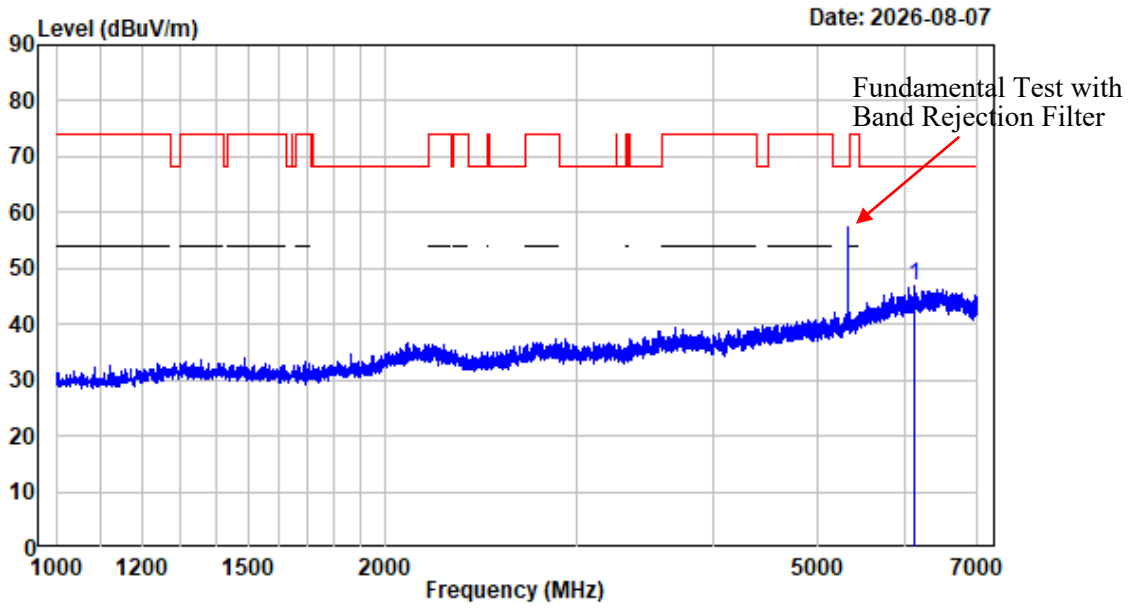

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6136.750	-2.33	49.04	46.71	68.20	-21.49	Peak


7-18GHz_Horizontal_Peak_11AX20_5320

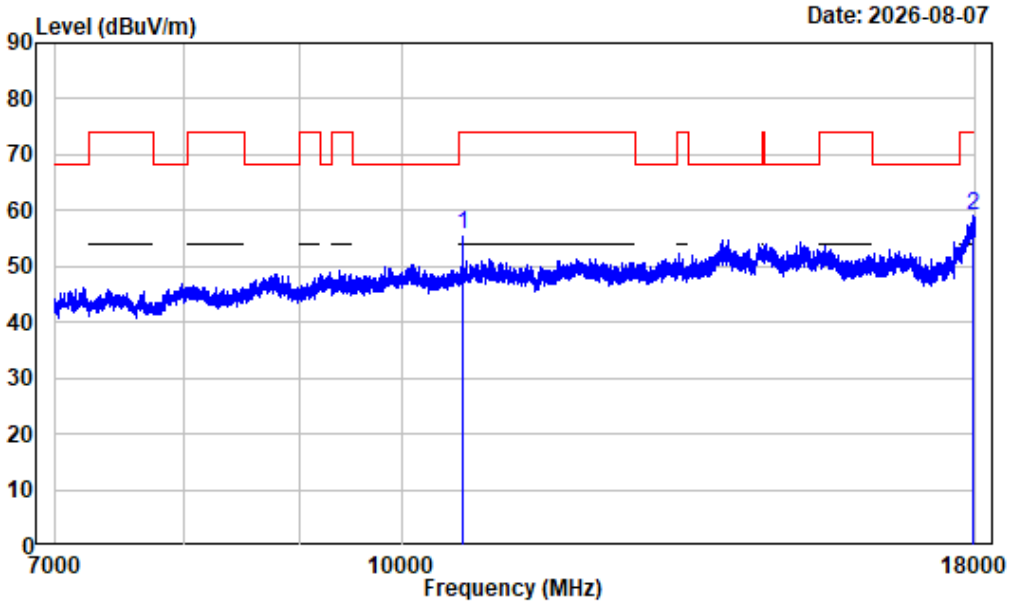

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	54.02	55.82	74.00	-18.18	Peak
2	17971.130	10.28	48.77	59.05	74.00	-14.95	Peak


7-18GHz_Horizontal_Average_11AX20_5320

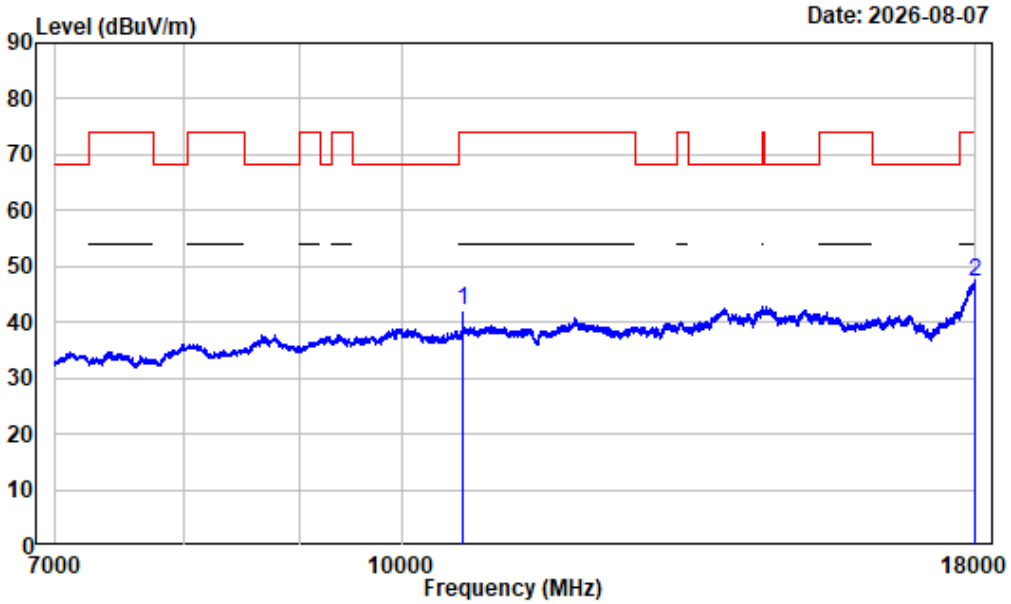

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	40.21	42.01	54.00	-11.99	Average
2	17993.130	10.68	36.41	47.09	54.00	-6.91	Average


7-18GHz_Vertical_Peak_11AX20_5320

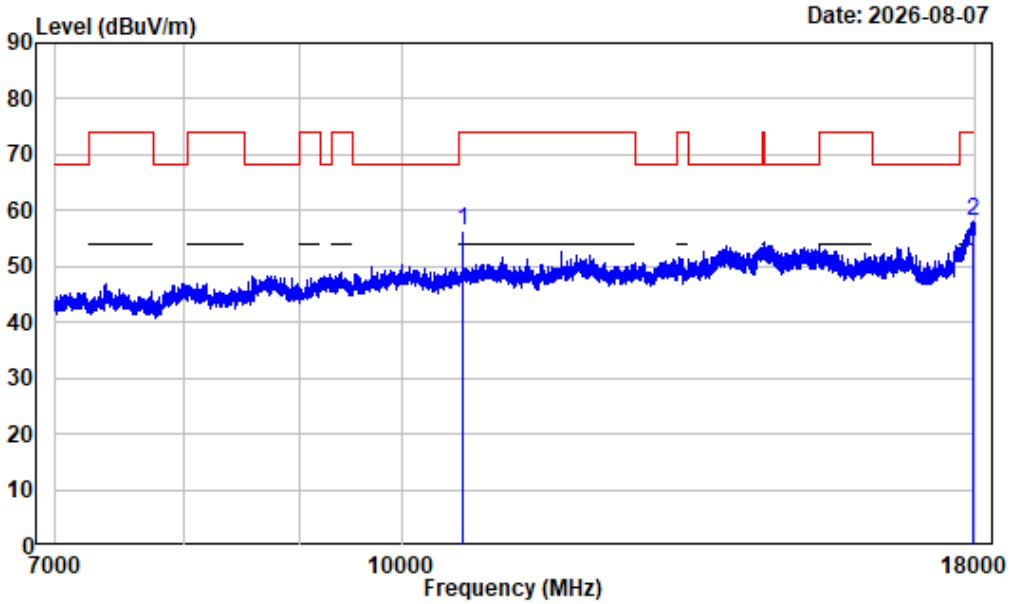

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	54.53	56.33	74.00	-17.67	Peak
2	17956.000	10.01	48.08	58.09	74.00	-15.91	Peak


7-18GHz_Vertical_Average_11AX20_5320

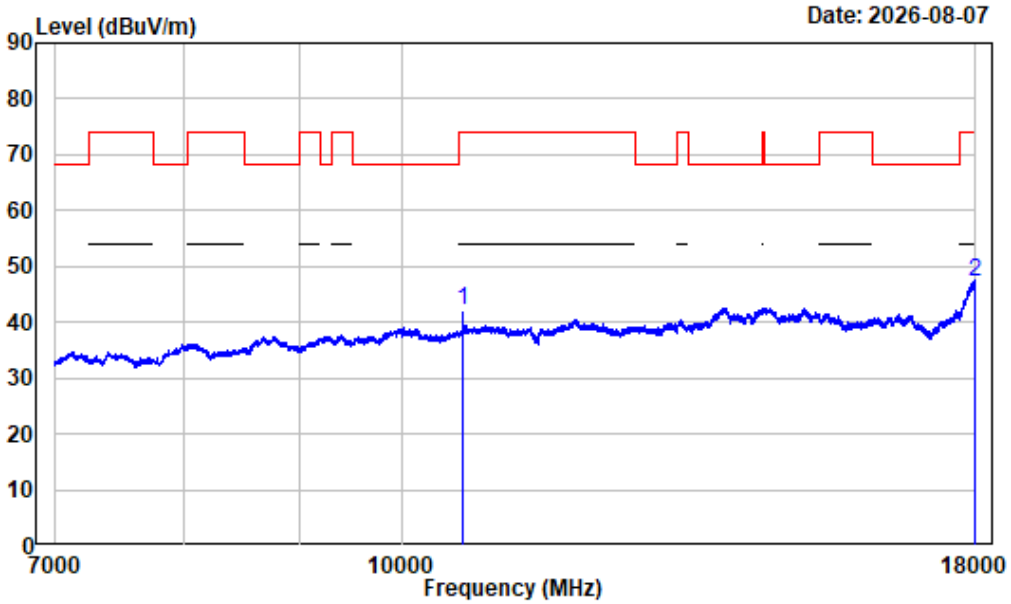

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	1.80	40.48	42.28	54.00	-11.72	Average
2	17997.250	10.75	36.39	47.14	54.00	-6.86	Average


1-7GHz_Horizontal_11AX40_5310

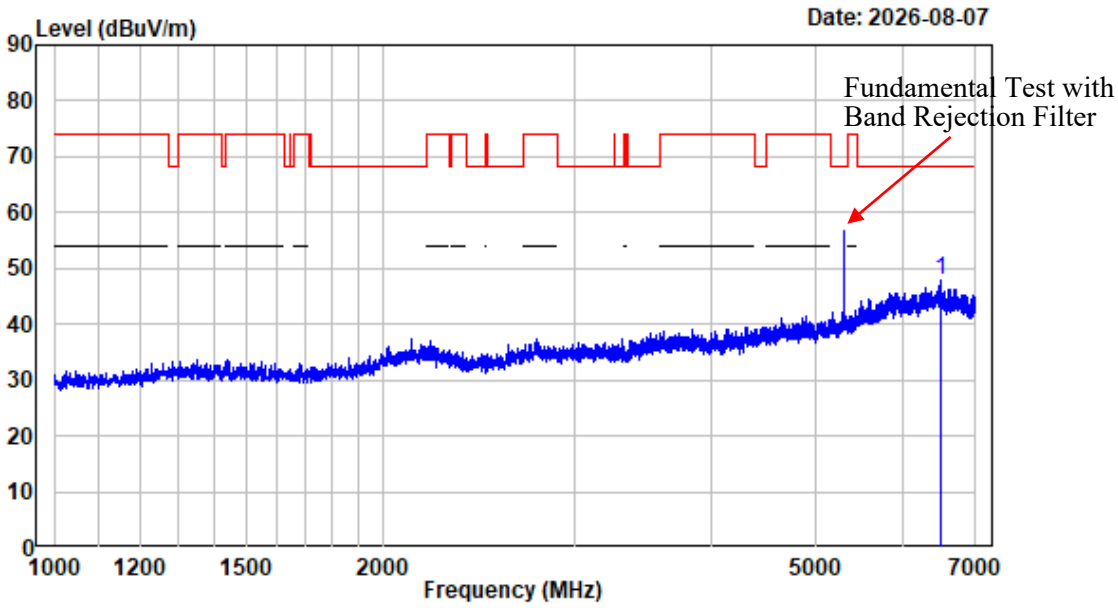

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6500.500	-1.64	49.36	47.72	68.20	-20.48	Peak


1-7GHz_Vertical_11AX40_5310

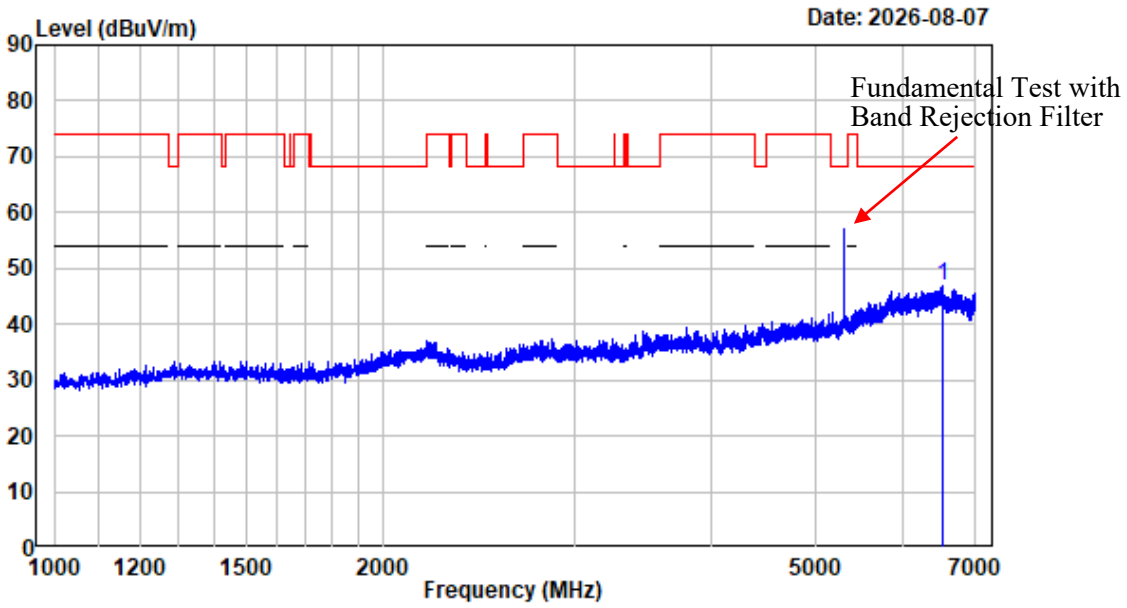

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6535.000	-1.81	48.66	46.85	68.20	-21.35	Peak


7-18GHz_Horizontal_Peak_11AX40_5310

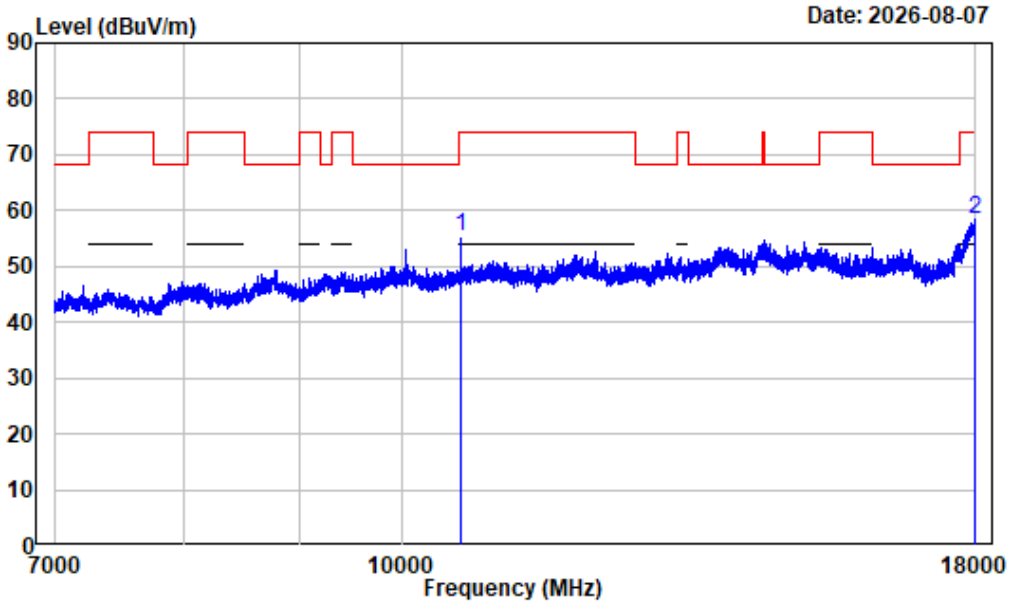

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	53.69	55.36	74.00	-18.64	Peak
2	17986.250	10.55	47.97	58.52	74.00	-15.48	Peak


7-18GHz_Horizontal_Average_11AX40_5310

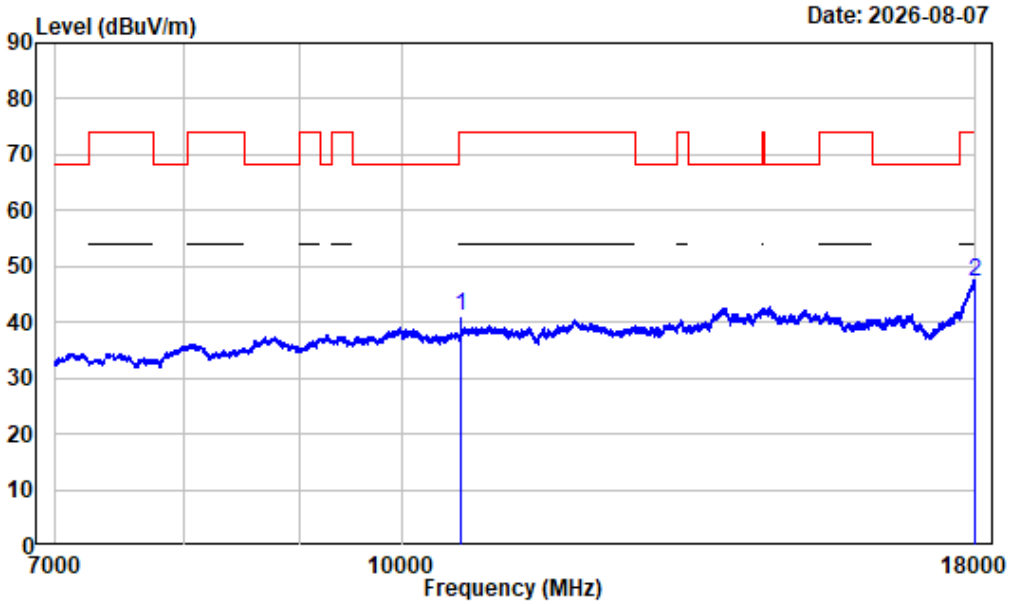

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	39.51	41.18	54.00	-12.82	Average
2	17998.630	10.78	36.34	47.12	54.00	-6.88	Average


7-18GHz_Vertical_Peak_11AX40_5310

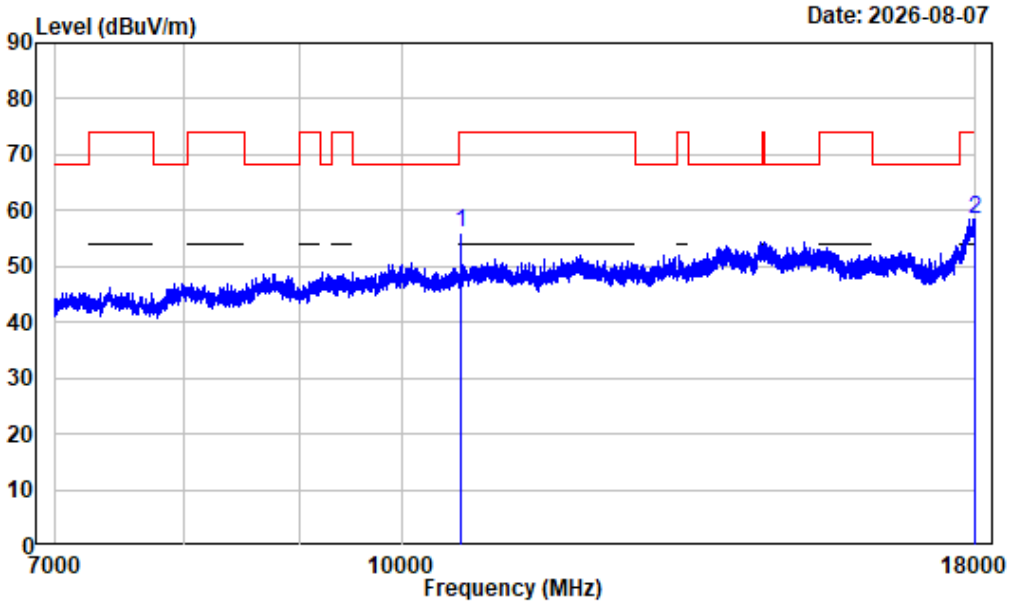

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	54.24	55.91	74.00	-18.09	Peak
2	17997.250	10.75	47.82	58.57	74.00	-15.43	Peak


7-18GHz_Vertical_Average_11AX40_5310

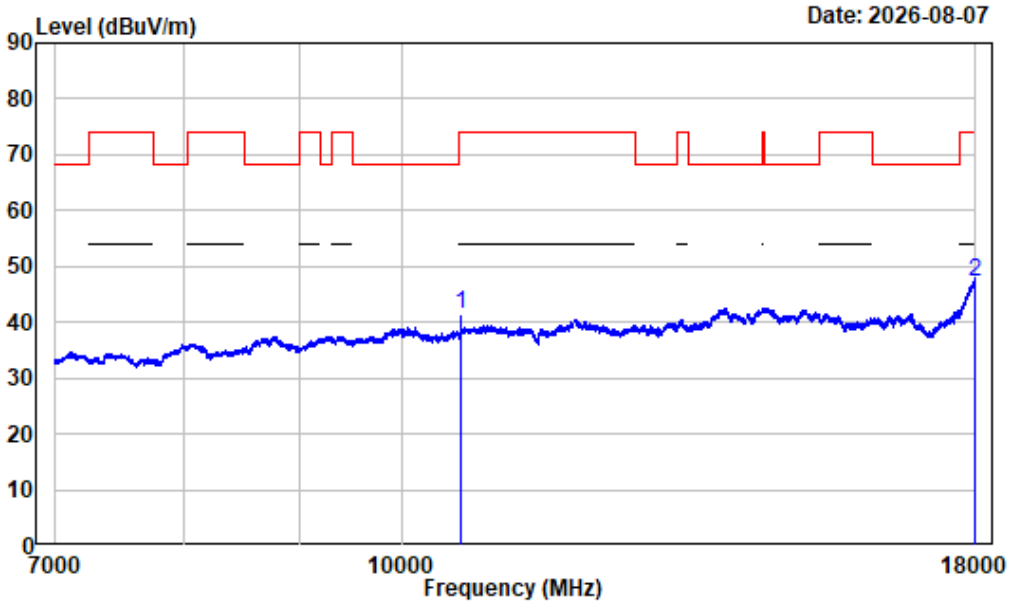

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	1.67	39.75	41.42	54.00	-12.58	Average
2	17994.500	10.70	36.43	47.13	54.00	-6.87	Average


1-7GHz_Horizontal_11AX80_5290

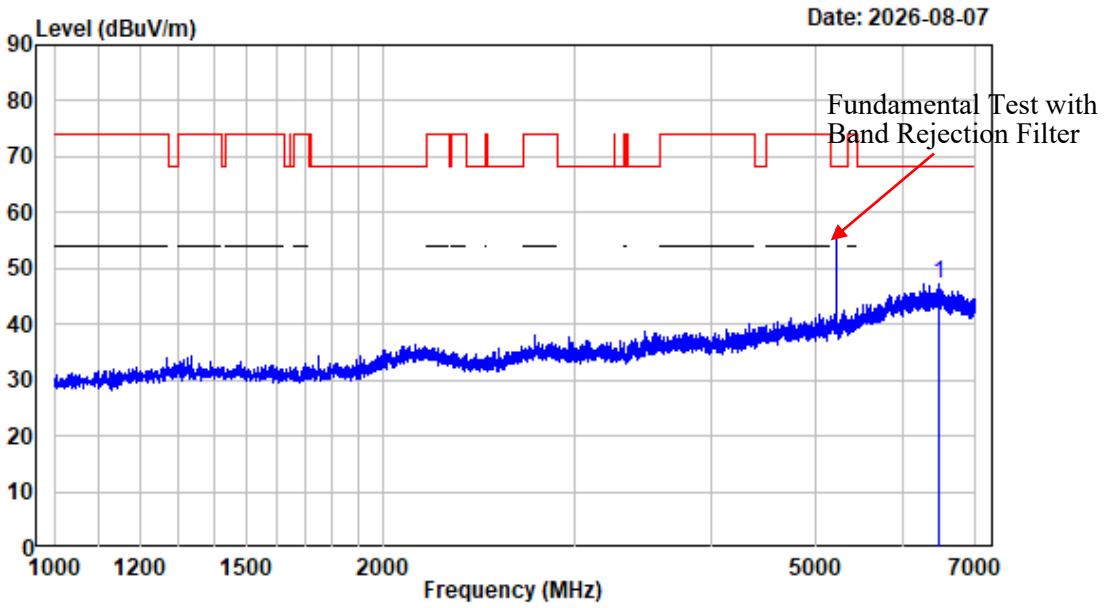

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6484.750	-1.81	49.10	47.29	68.20	-20.91	Peak


1-7GHz_Vertical_11AX80_5290

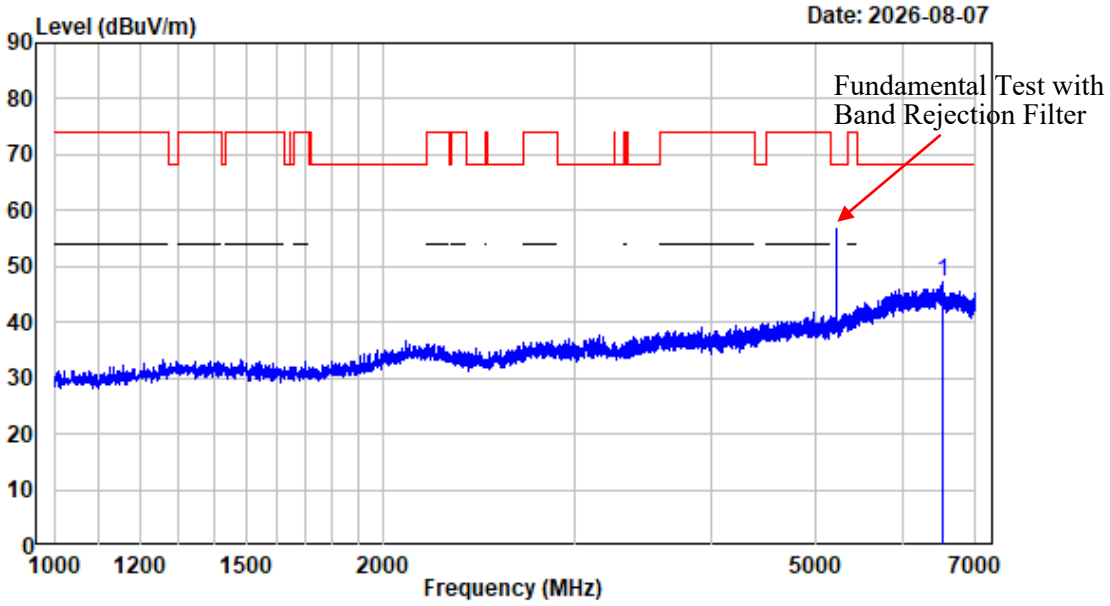

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.500	-1.79	48.83	47.04	68.20	-21.16	Peak


7-18GHz_Horizontal_Peak_11AX80_5290

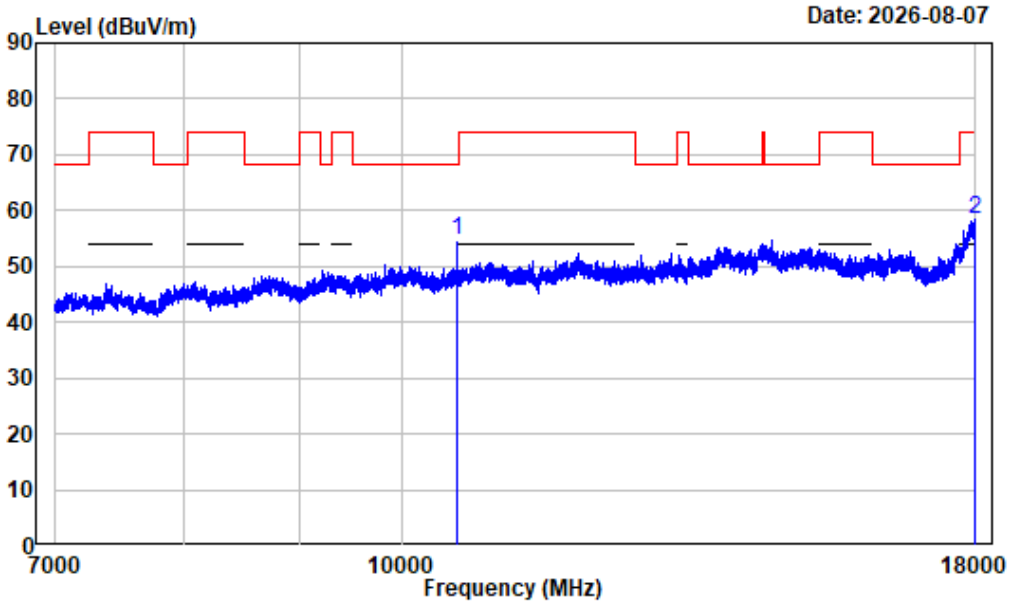

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	1.50	53.27	54.77	68.20	-13.43	Peak
2	17998.250	10.80	47.50	58.30	74.00	-15.70	Peak


7-18GHz_Horizontal_Average_11AX80_5290

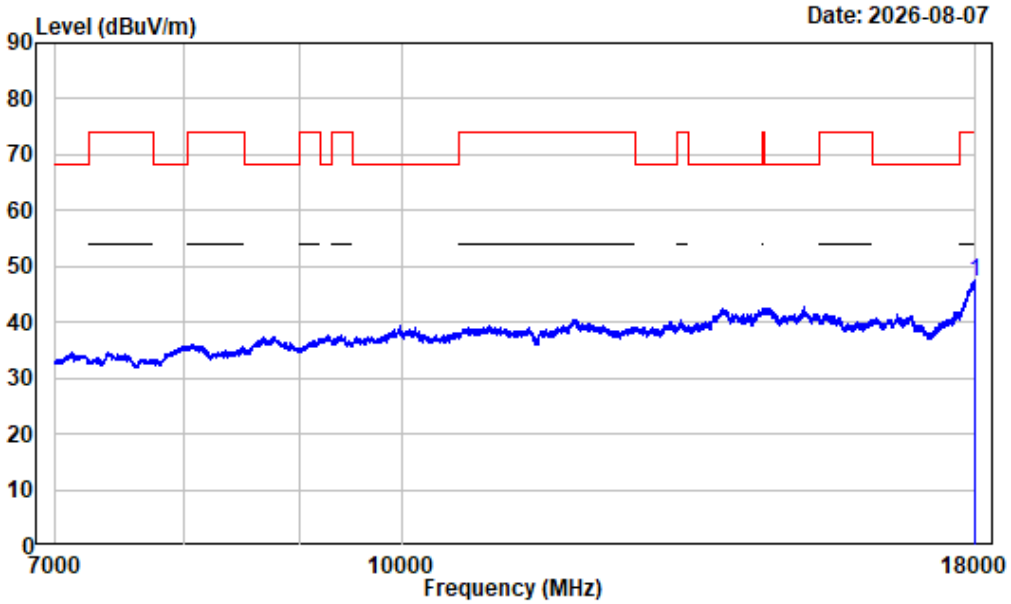

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17980.750	10.45	36.62	47.07	54.00	-6.93	Average


7-18GHz_Vertical_Peak_11AX80_5290

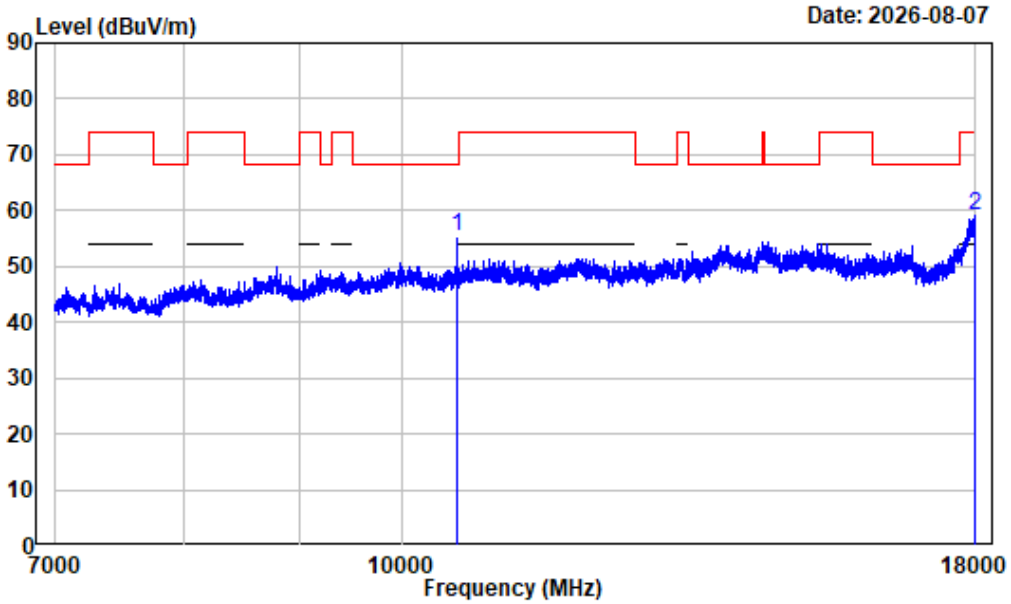

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	1.50	53.81	55.31	68.20	-12.89	Peak
2	17995.880	10.73	48.27	59.00	74.00	-15.00	Peak


7-18GHz_Vertical_Average_11AX80_5290

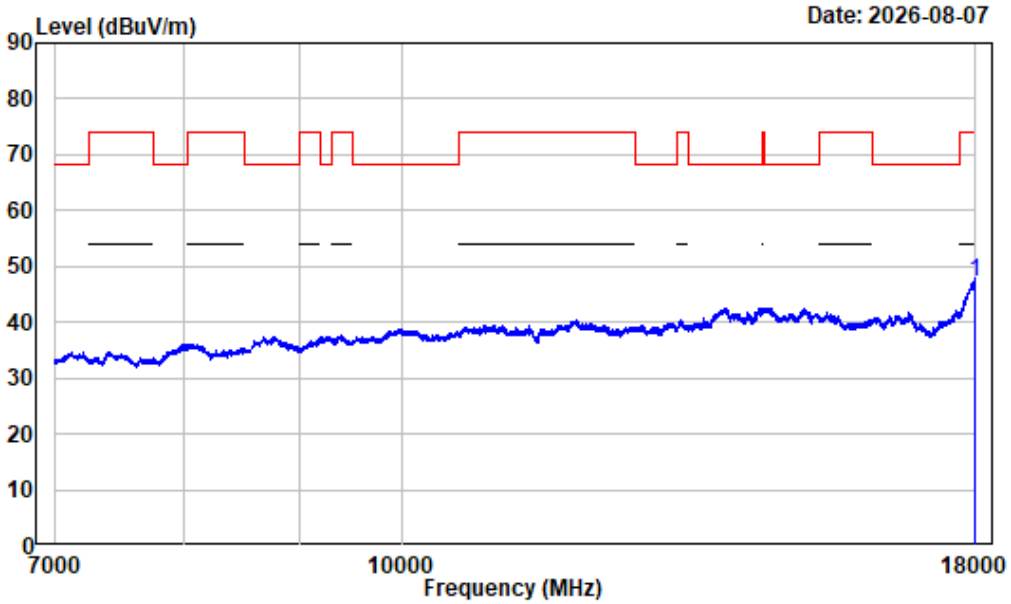

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17998.630	10.78	36.31	47.09	54.00	-6.91	Average


1-7GHz_Horizontal_11A_5500

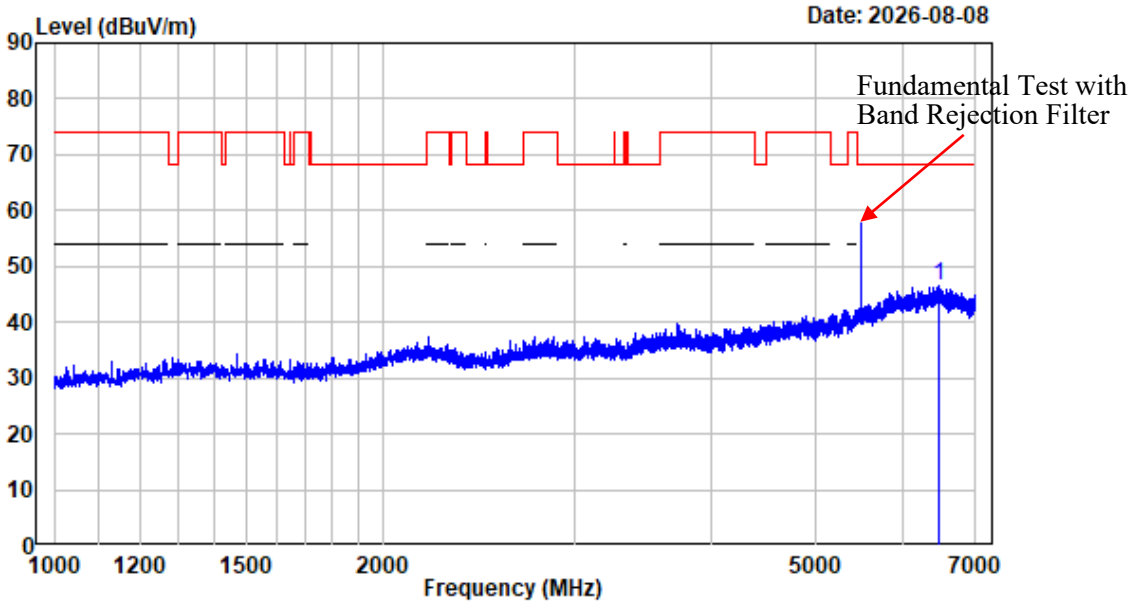

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6468.250	-1.98	48.34	46.36	68.20	-21.84	Peak


1-7GHz_Vertical_11A_5500

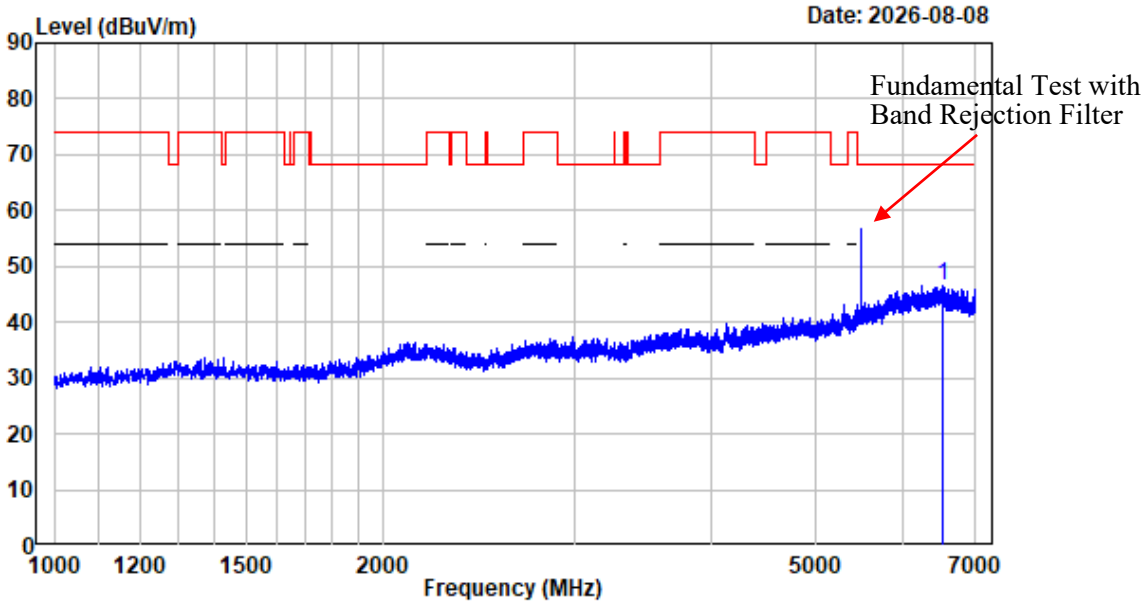

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6528.250	-1.78	48.38	46.60	68.20	-21.60	Peak


7-18GHz_Horizontal_Peak_11A_5500

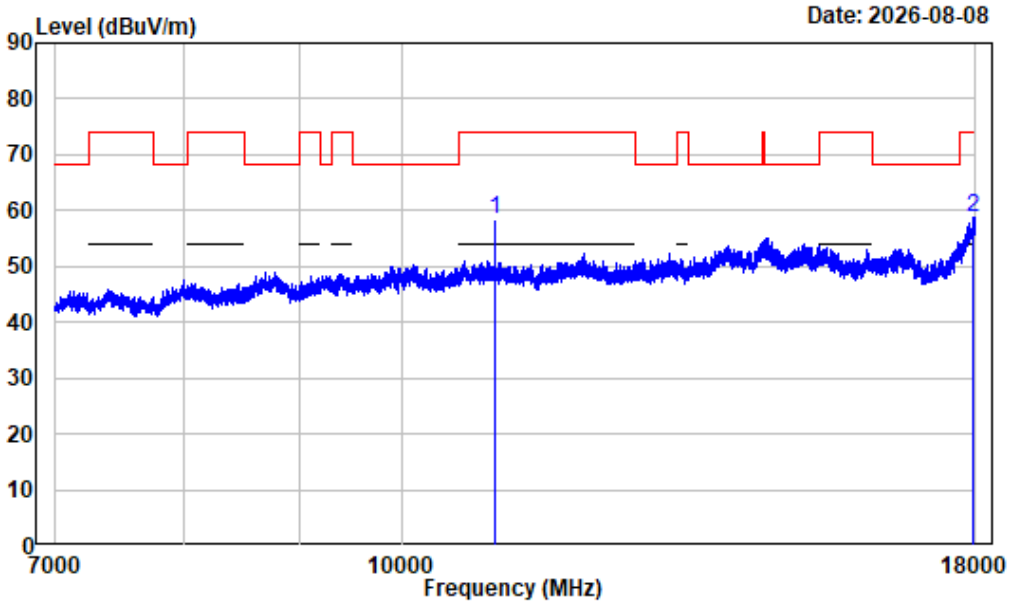

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	55.16	58.49	74.00	-15.51	Peak
2	17942.250	9.83	49.03	58.86	74.00	-15.14	Peak


7-18GHz_Horizontal_Average_11A_5500

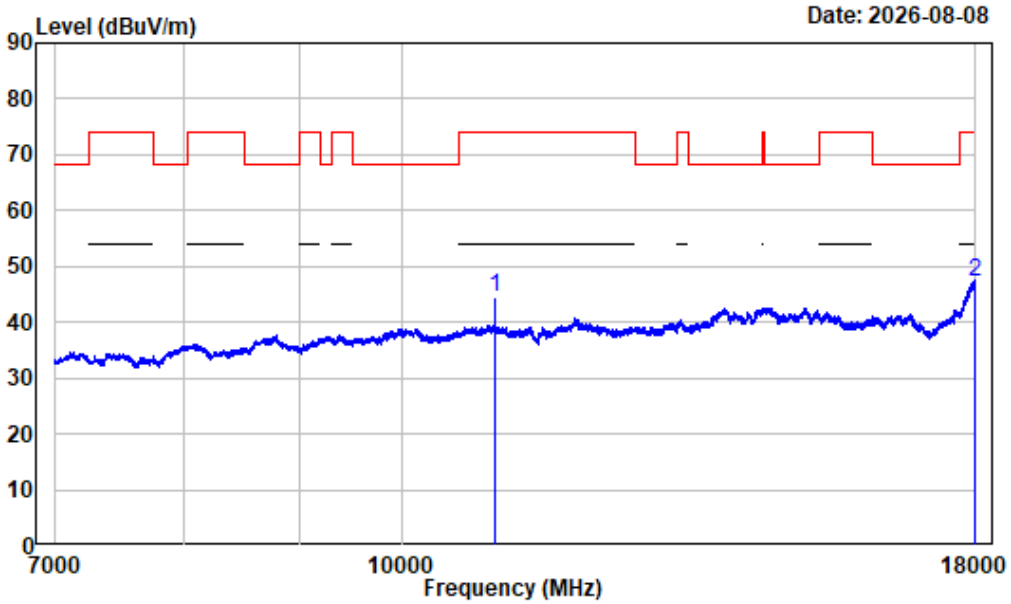

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	41.21	44.54	54.00	-9.46	Average
2	17998.630	10.78	36.37	47.15	54.00	-6.85	Average


7-18GHz_Vertical_Peak_11A_5500

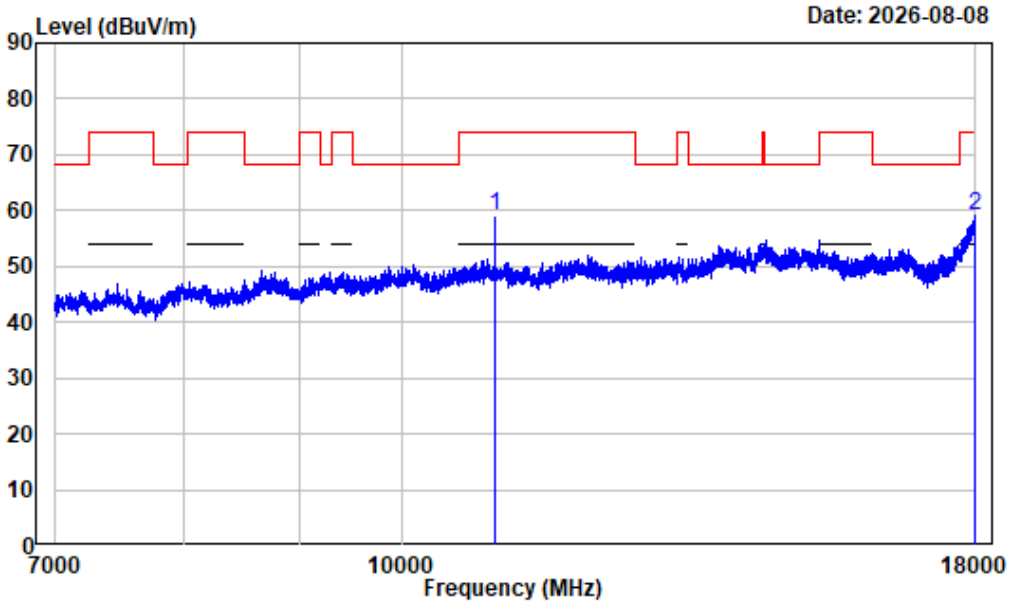

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	55.72	59.05	74.00	-14.95	Peak
2	17986.250	10.55	48.64	59.19	74.00	-14.81	Peak


7-18GHz_Vertical_Average_11A_5500

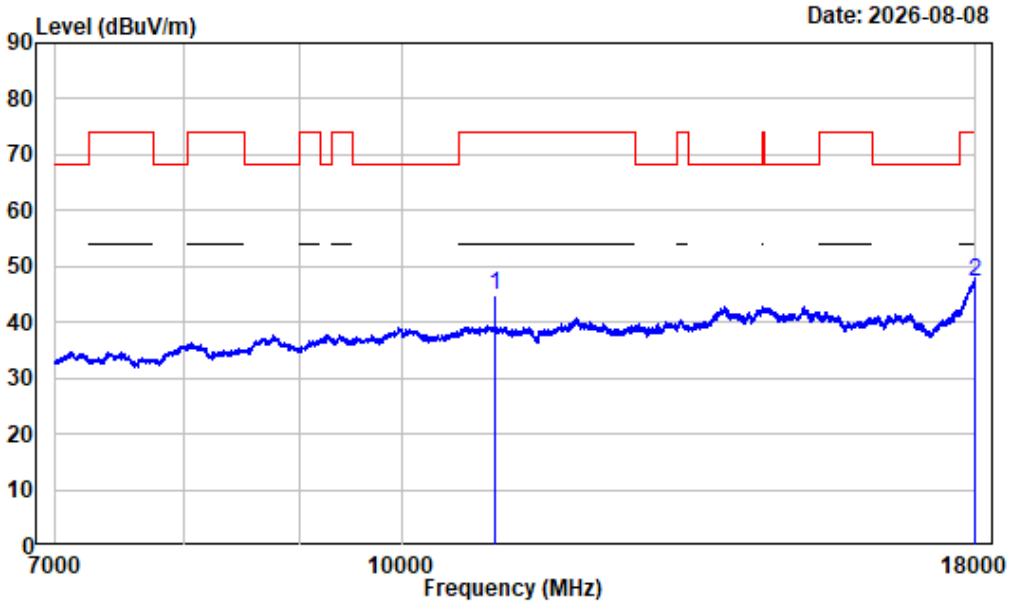

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	41.46	44.79	54.00	-9.21	Average
2	17994.500	10.70	36.42	47.12	54.00	-6.88	Average


1-7GHz_Horizontal_11AC20_5500

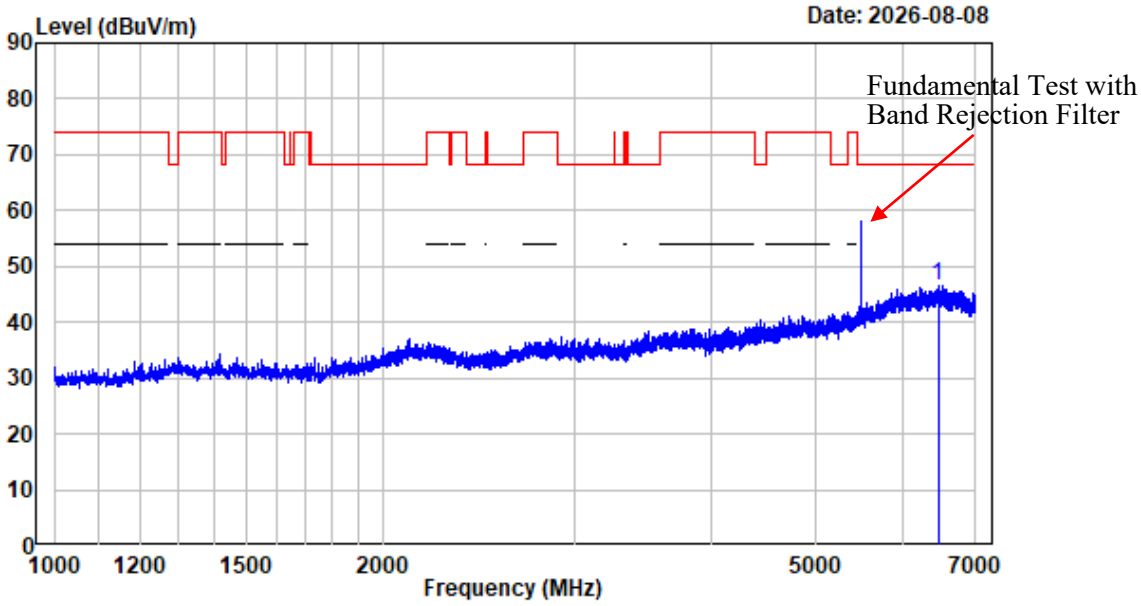

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6466.750	-2.01	48.64	46.63	68.20	-21.57	Peak


1-7GHz_Vertical_11AC20_5500

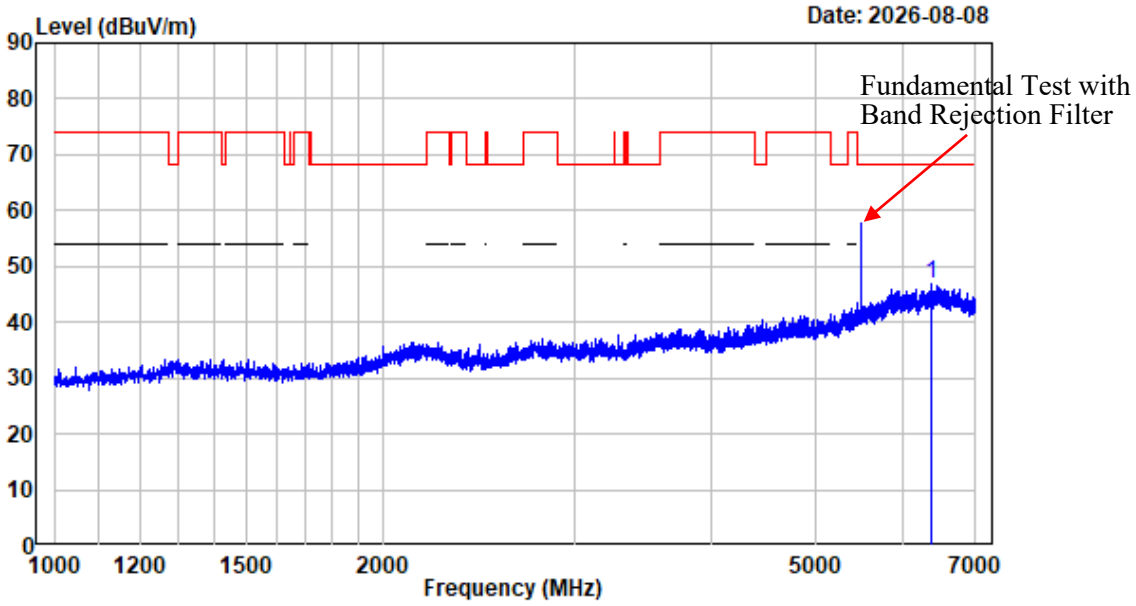

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6387.250	-2.20	49.19	46.99	68.20	-21.21	Peak


7-18GHz_Horizontal_Peak_11AC20_5500

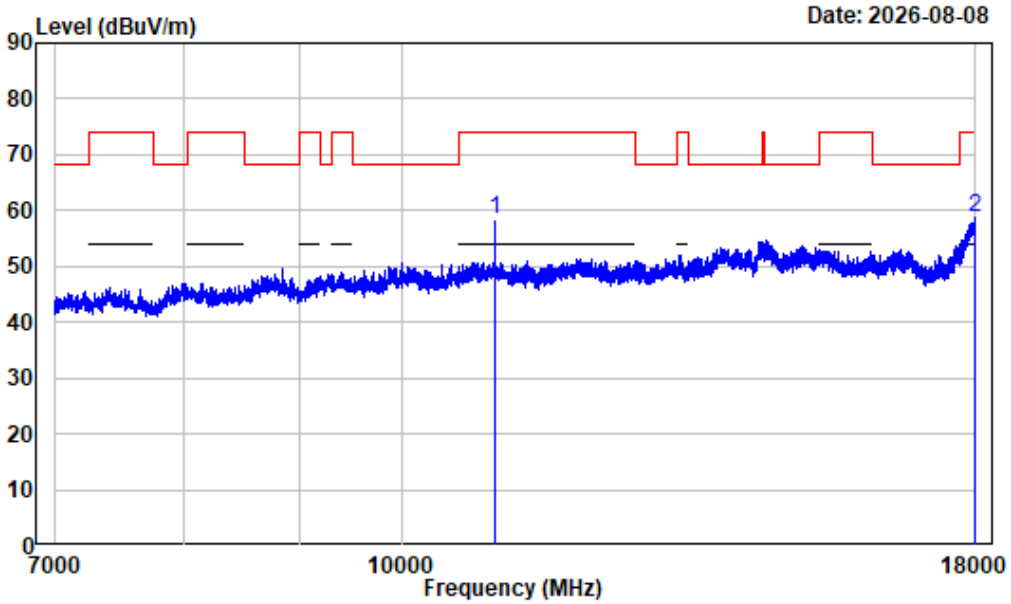

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	55.05	58.38	74.00	-15.62	Peak
2	17984.880	10.53	48.14	58.67	74.00	-15.33	Peak


7-18GHz_Horizontal_Average_11AC20_5500

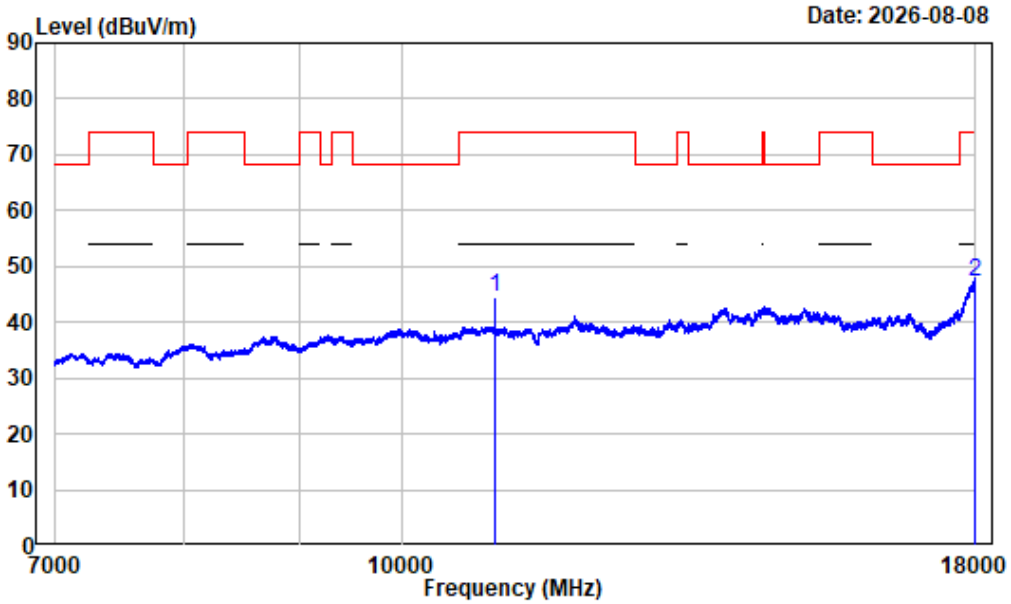

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	41.14	44.47	54.00	-9.53	Average
2	17997.250	10.75	36.36	47.11	54.00	-6.89	Average


7-18GHz_Vertical_Peak_11AC20_5500

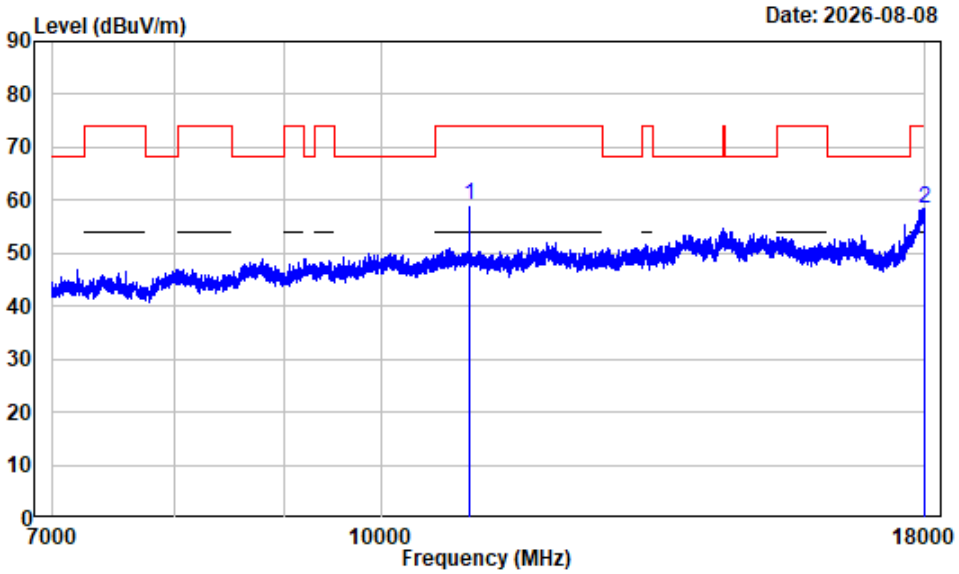

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	55.60	58.93	74.00	-15.07	Peak
2	17989.000	10.60	47.86	58.46	74.00	-15.54	Peak


7-18GHz_Vertical_Average_11AC20_5500

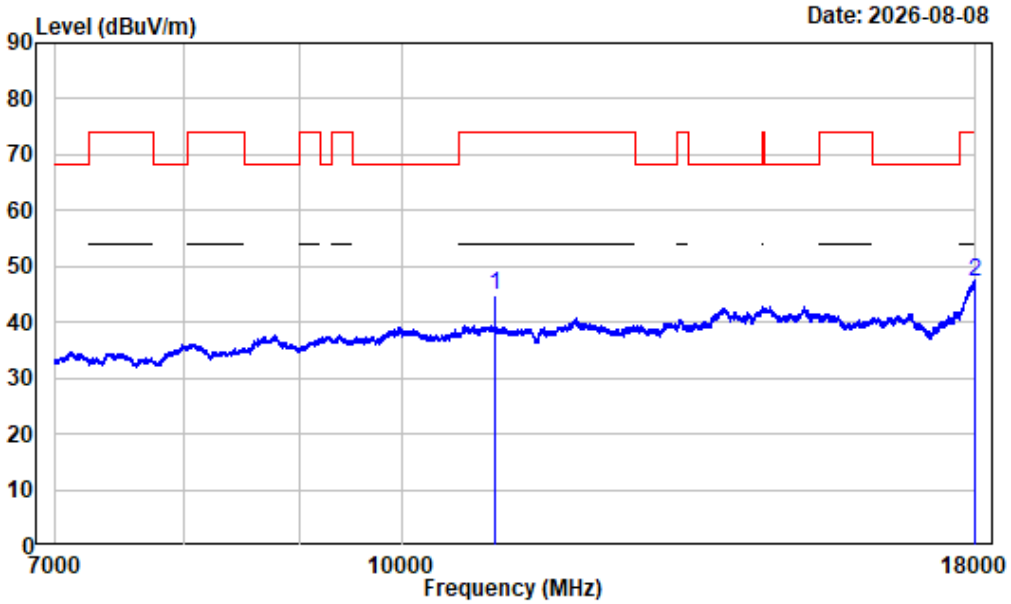

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	41.38	44.71	54.00	-9.29	Average
2	17998.630	10.80	36.33	47.13	54.00	-6.87	Average


1-7GHz_Horizontal_11AC40_5510

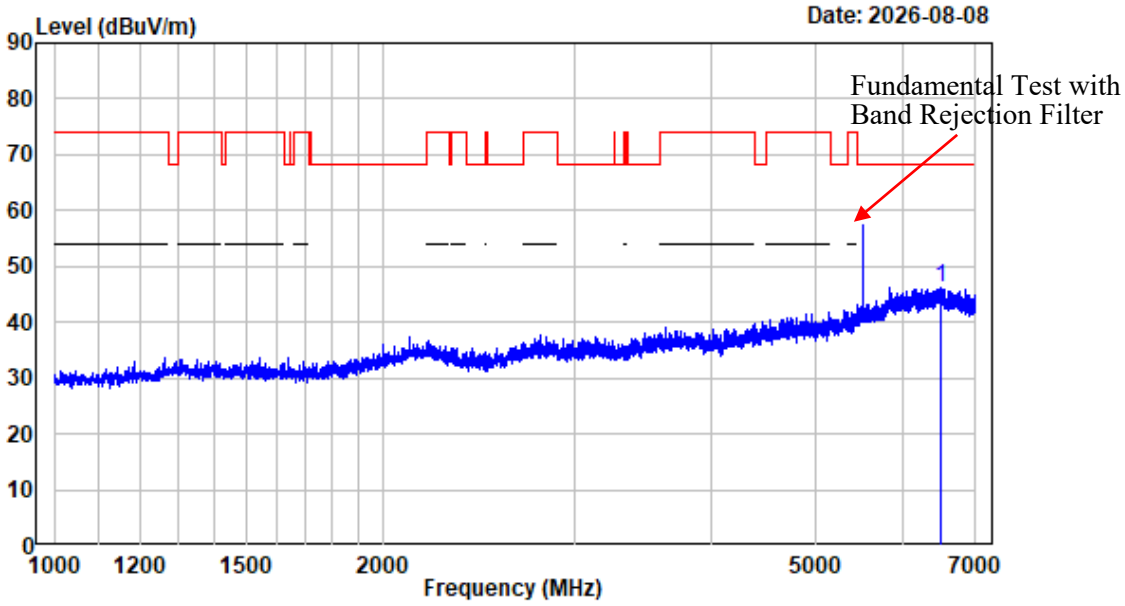

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6501.250	-1.64	47.74	46.10	68.20	-22.10	Peak


1-7GHz_Vertical_11AC40_5510

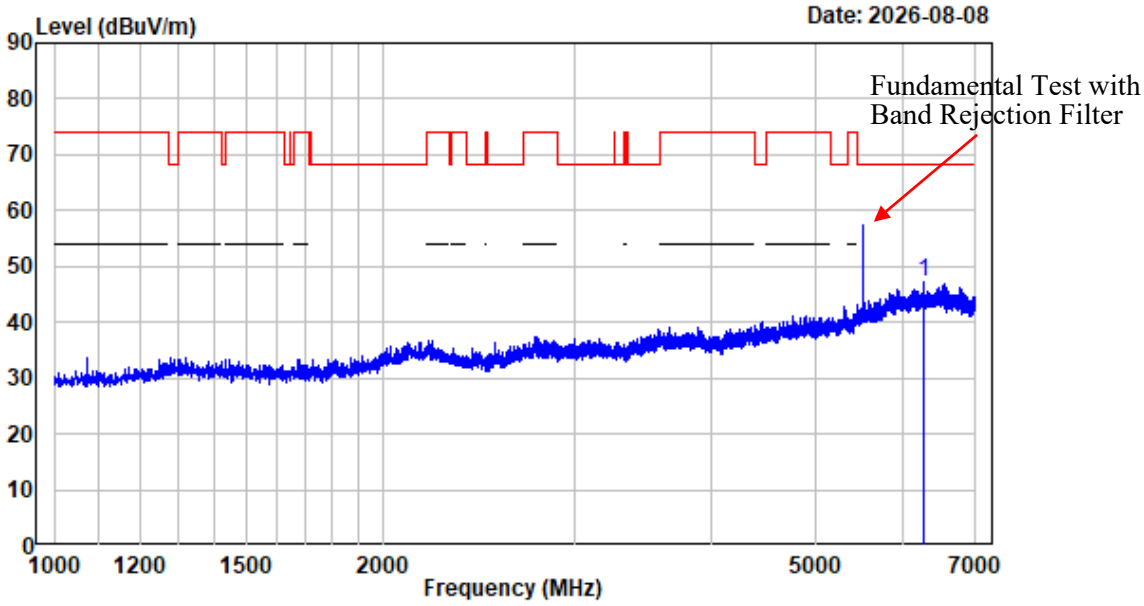

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6278.500	-2.44	49.57	47.13	68.20	-21.07	Peak


7-18GHz_Horizontal_Peak_11AC40_5510

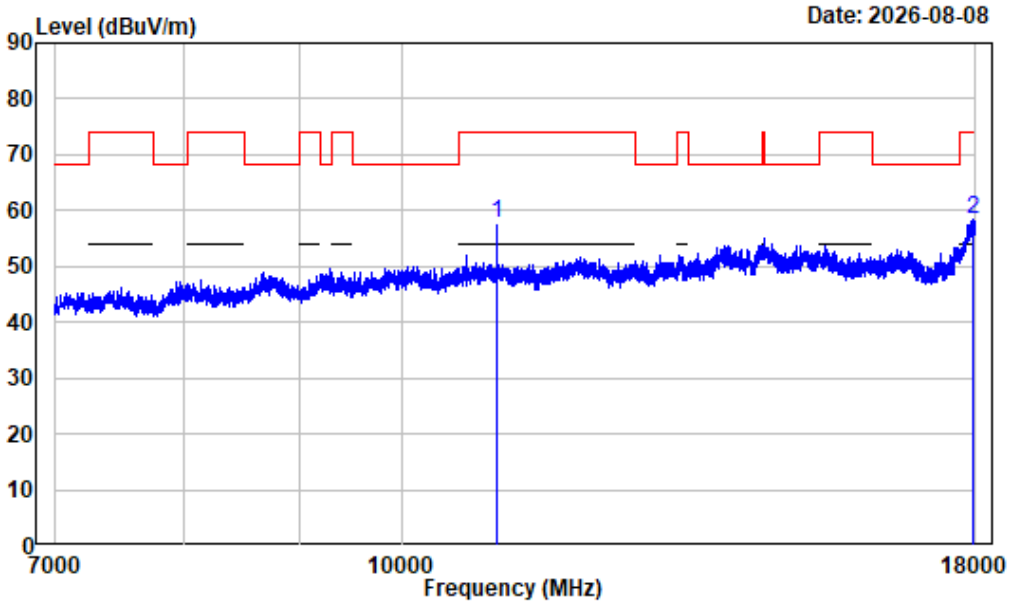

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	54.39	57.67	74.00	-16.33	Peak
2	17965.630	10.18	48.08	58.26	74.00	-15.74	Peak


7-18GHz_Horizontal_Average_11AC40_5510

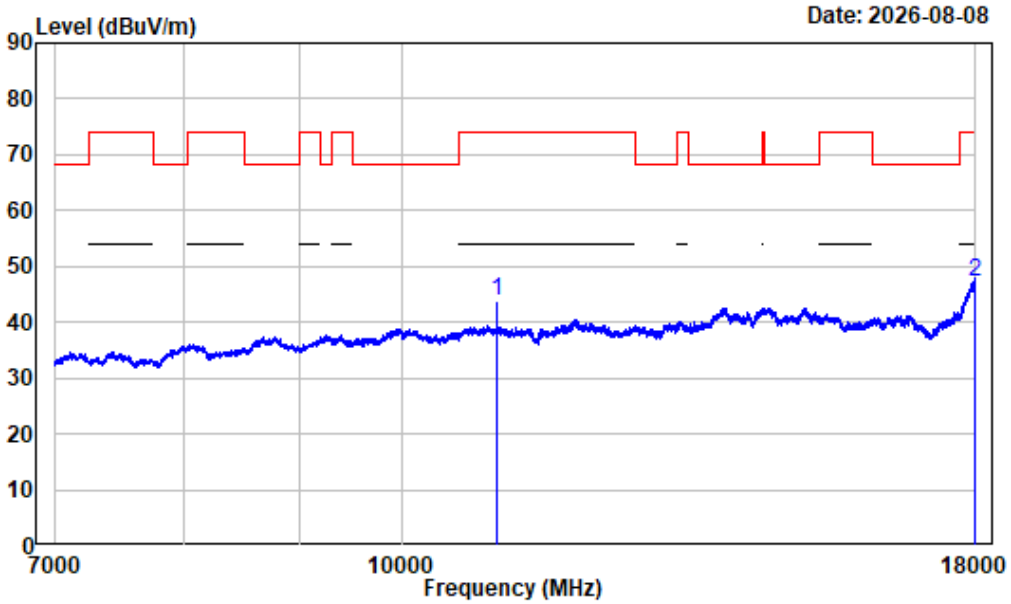

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	40.41	43.69	54.00	-10.31	Average
2	17998.630	10.78	36.35	47.13	54.00	-6.87	Average


7-18GHz_Vertical_Peak_11AC40_5510

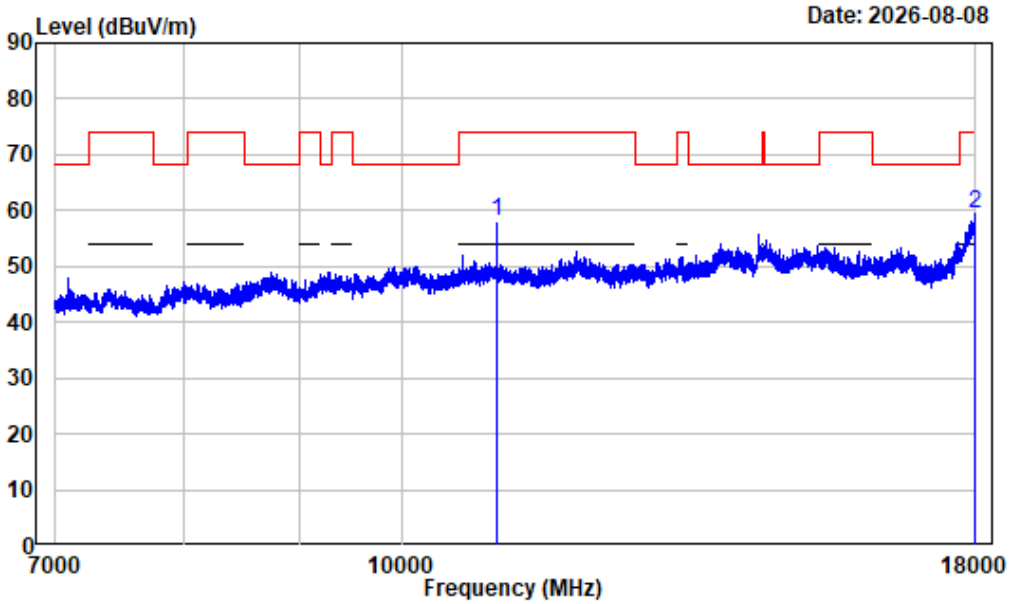

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	54.94	58.22	74.00	-15.78	Peak
2	17980.750	10.45	48.93	59.38	74.00	-14.62	Peak


7-18GHz_Vertical_Average_11AC40_5510

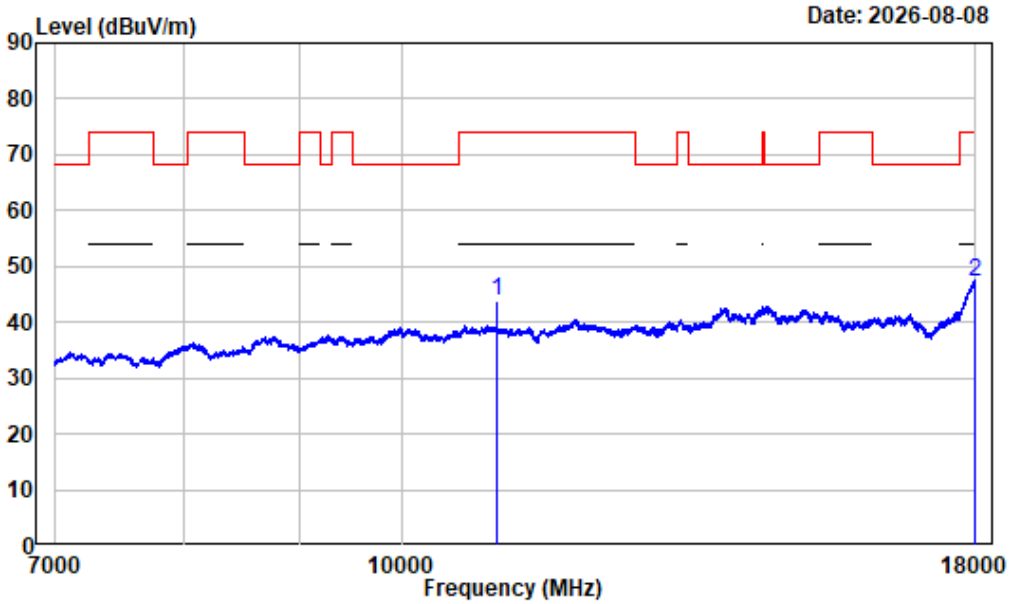

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	40.67	43.95	54.00	-10.05	Average
2	17994.500	10.70	36.41	47.11	54.00	-6.89	Average


1-7GHz_Horizontal_11AC80_5530

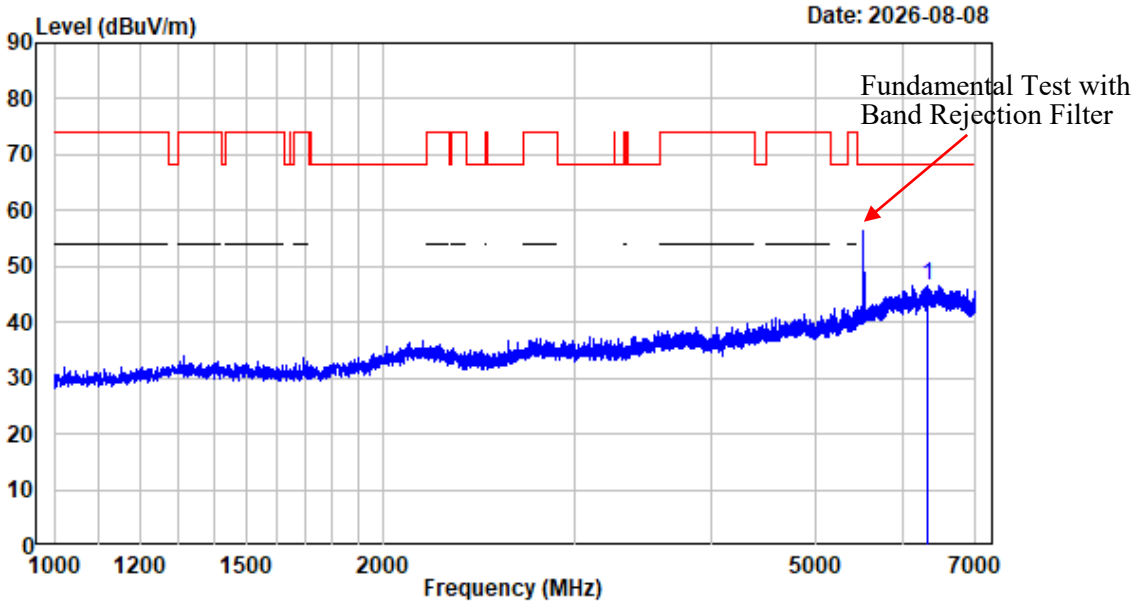

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6316.000	-2.43	49.10	46.67	68.20	-21.53	Peak


1-7GHz_Vertical_11AC80_5530

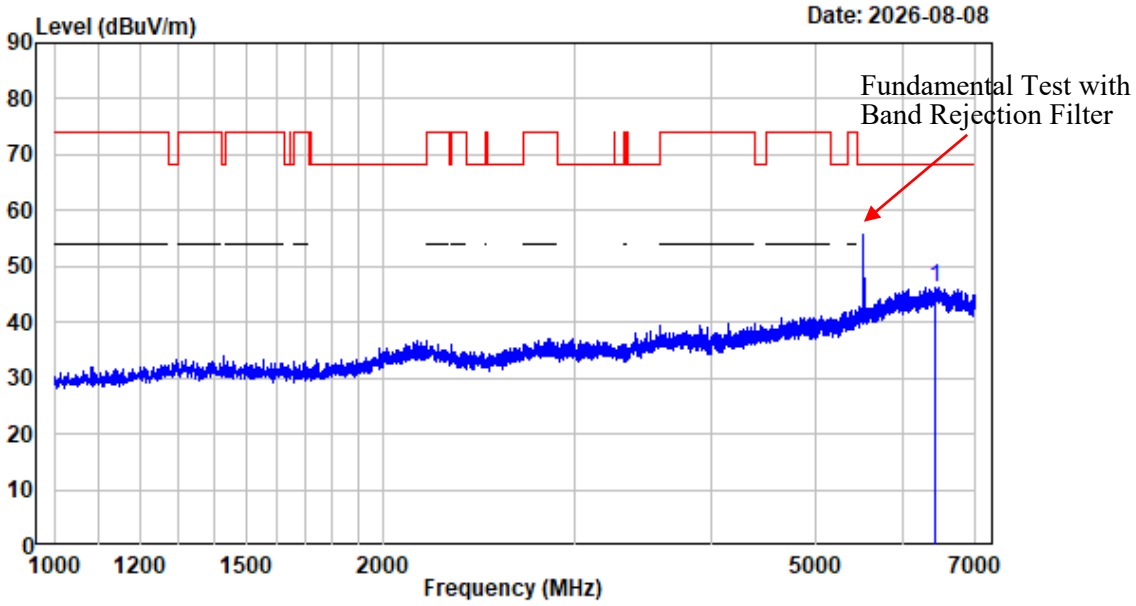

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6439.750	-2.19	48.53	46.34	68.20	-21.86	Peak


7-18GHz_Horizontal_Peak_11AC80_5530

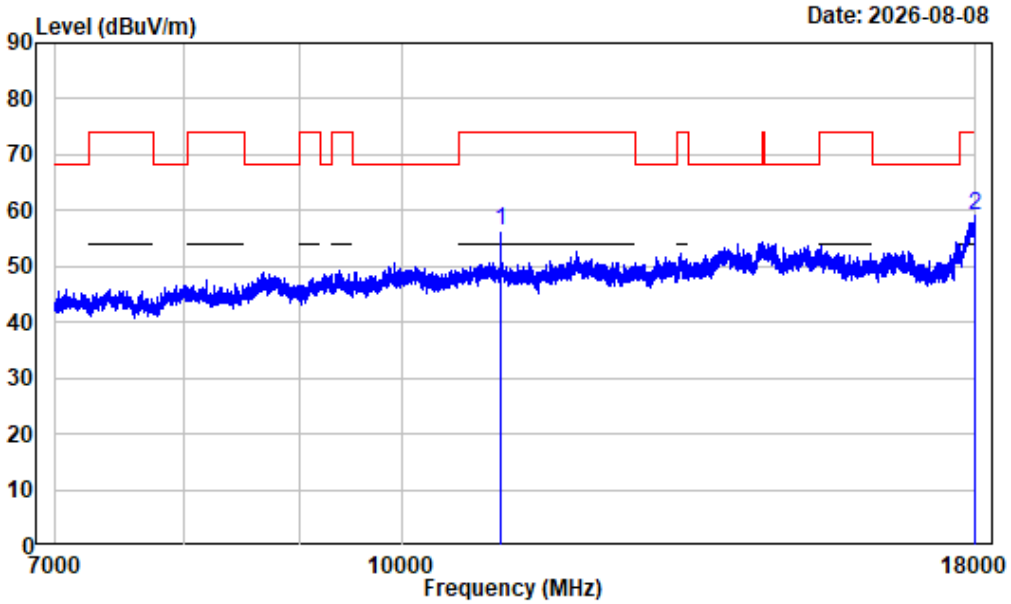

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	53.25	56.34	74.00	-17.66	Peak
2	17995.880	10.73	48.45	59.18	74.00	-14.82	Peak


7-18GHz_Horizontal_Average_11AC80_5530

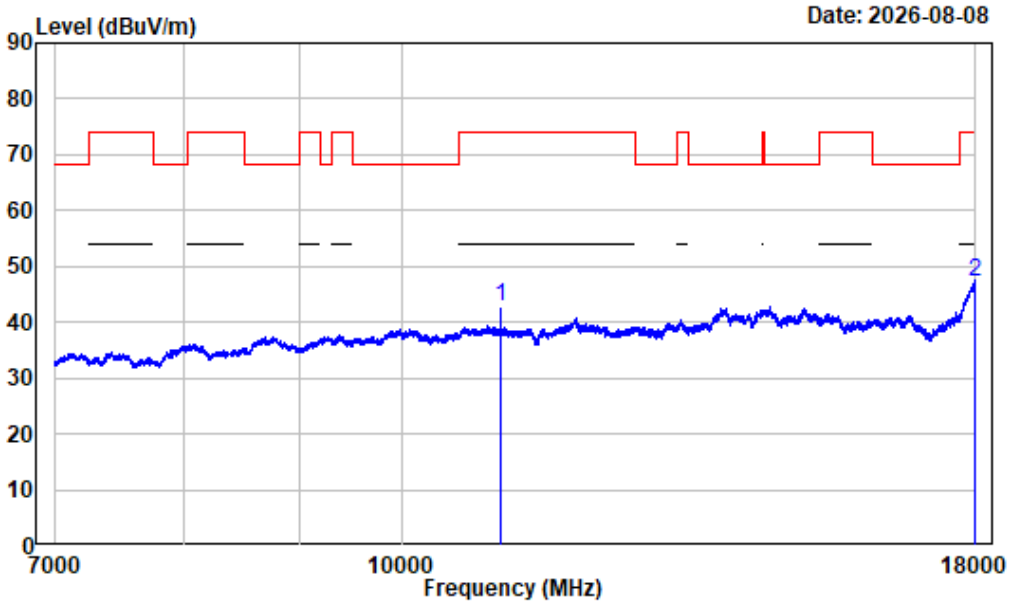

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	39.59	42.68	54.00	-11.32	Average
2	17998.630	10.80	36.32	47.12	54.00	-6.88	Average


7-18GHz_Vertical_Peak_11AC80_5530

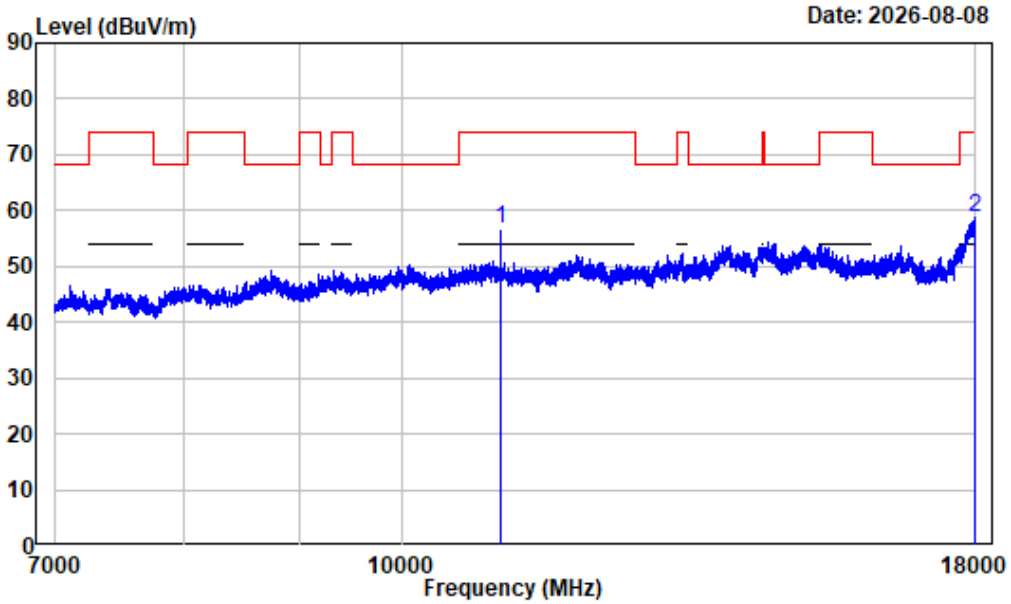

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	53.78	56.87	74.00	-17.13	Peak
2	17983.500	10.50	48.22	58.72	74.00	-15.28	Peak


7-18GHz_Vertical_Average_11AC80_5530

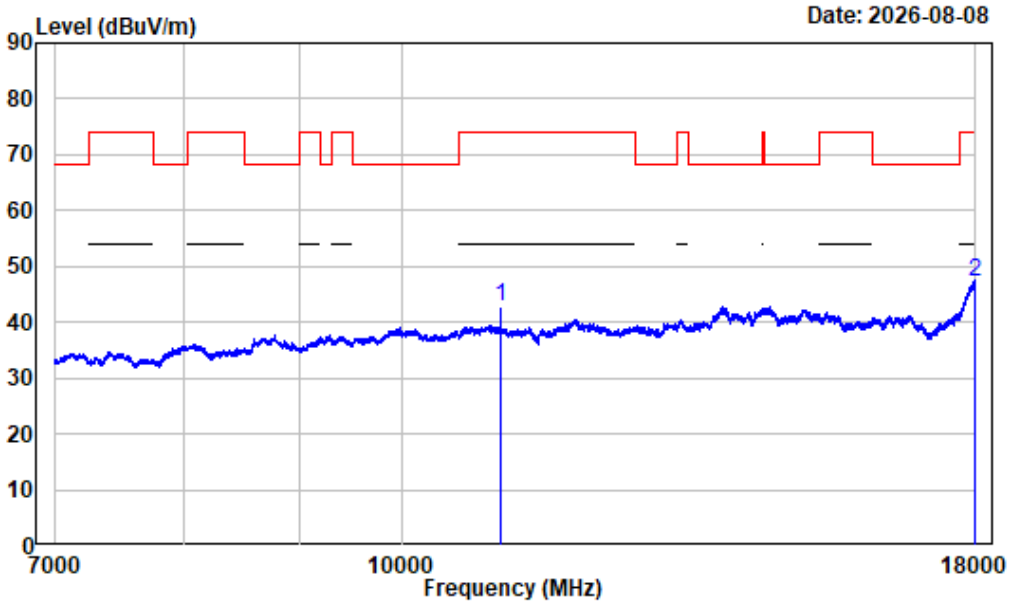

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	39.83	42.92	54.00	-11.08	Average
2	17998.250	10.80	36.34	47.14	54.00	-6.86	Average


1-7GHz_Horizontal_11AX20_5500

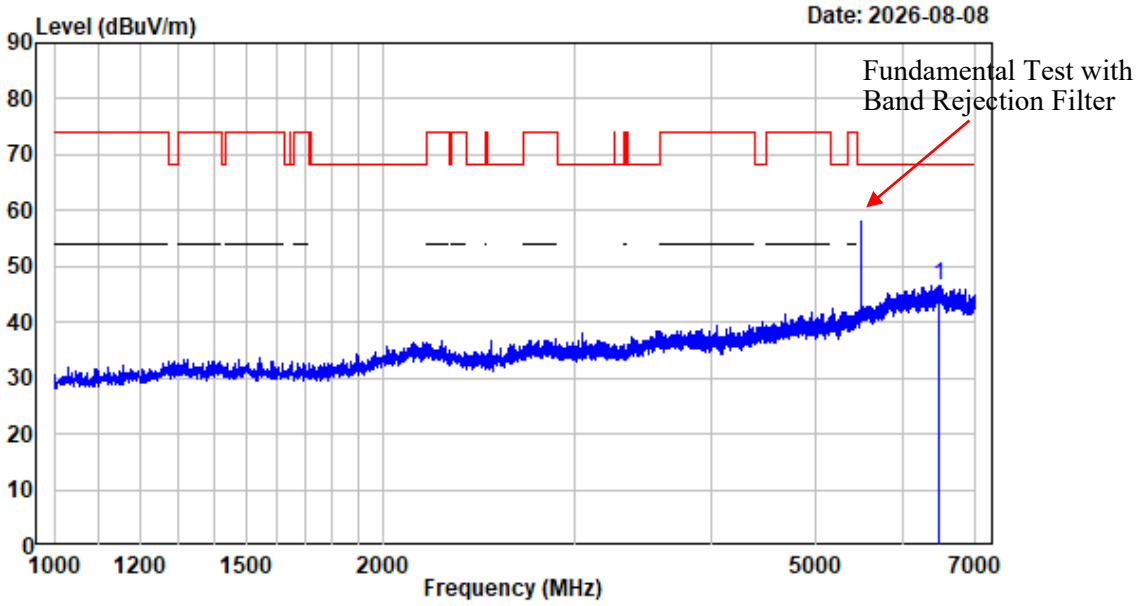

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6487.000	-1.79	48.40	46.61	68.20	-21.59	Peak


1-7GHz_Vertical_11AX20_5500

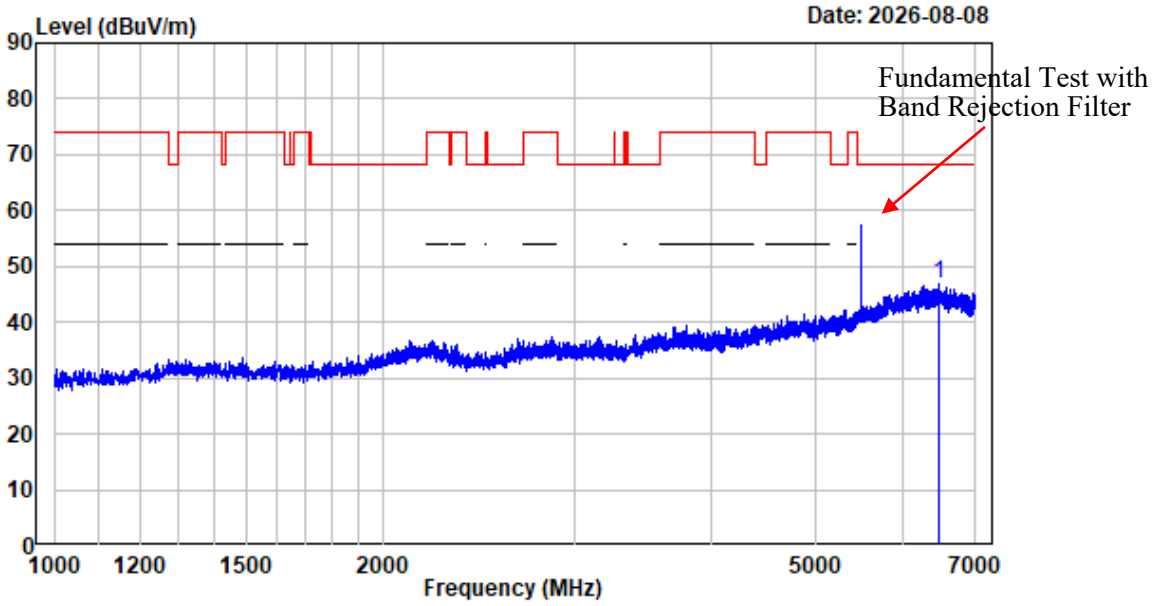

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6473.500	-1.93	48.74	46.81	68.20	-21.39	Peak


7-18GHz_Horizontal_Peak_11AX20_5500

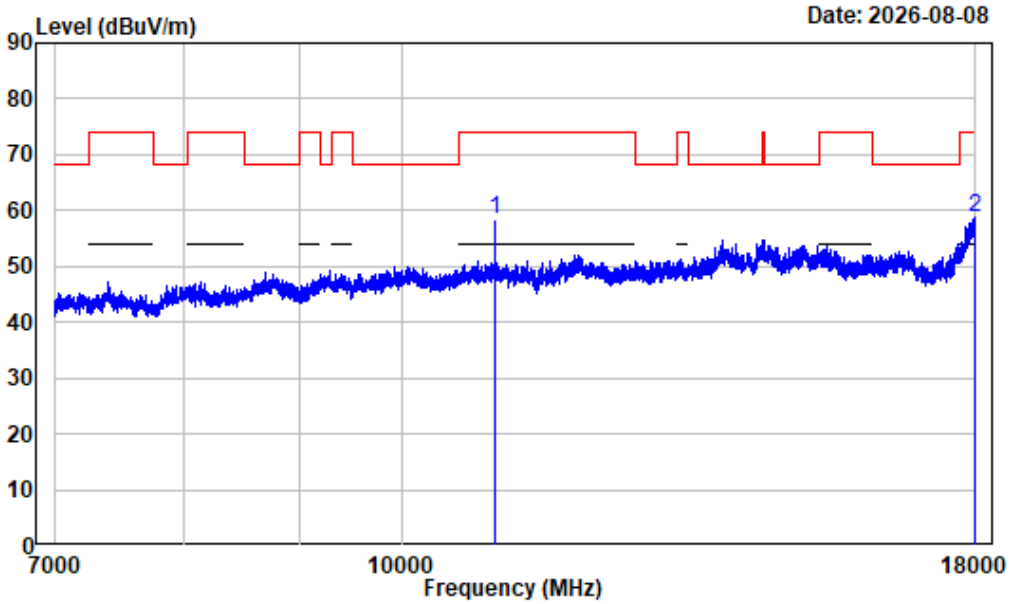

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	54.94	58.27	74.00	-15.73	Peak
2	17994.500	10.70	48.07	58.77	74.00	-15.23	Peak


7-18GHz_Horizontal_Average_11AX20_5500

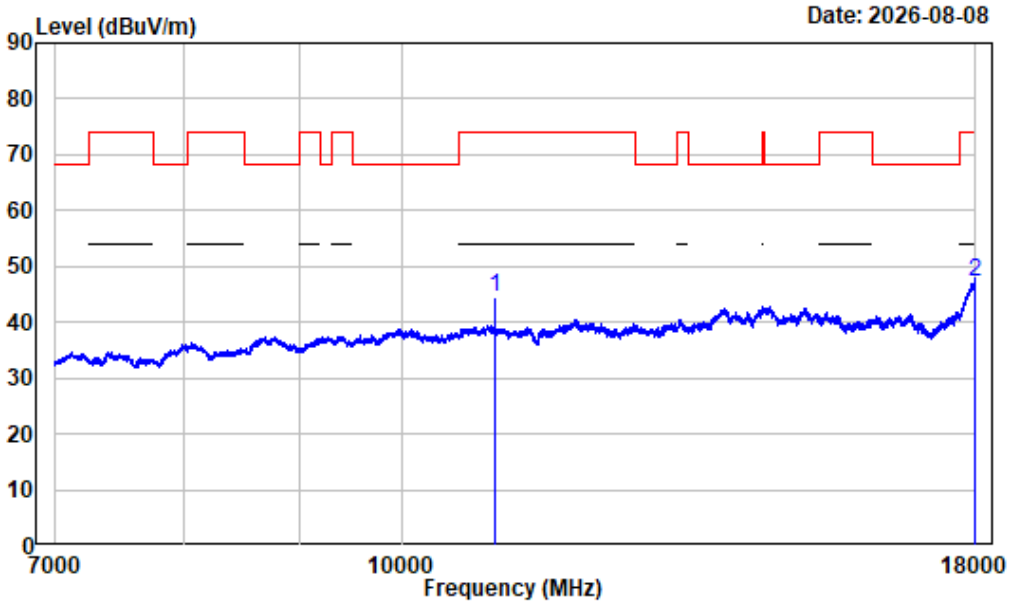

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	41.07	44.40	54.00	-9.60	Average
2	17990.380	10.63	36.50	47.13	54.00	-6.87	Average


7-18GHz_Vertical_Peak_11AX20_5500

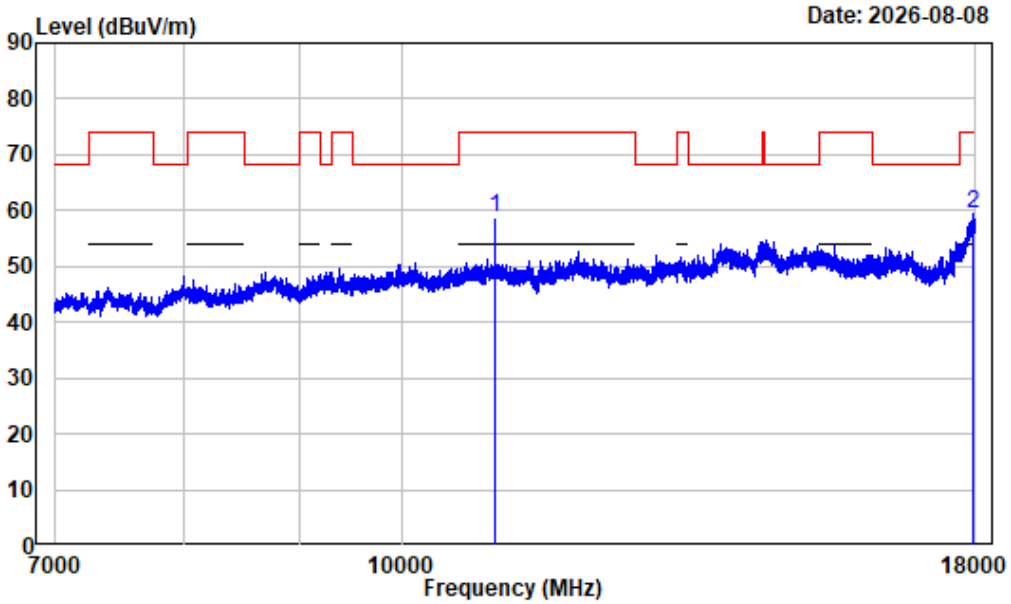

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	55.49	58.82	74.00	-15.18	Peak
2	17962.880	10.13	49.28	59.41	74.00	-14.59	Peak


7-18GHz_Vertical_Average_11AX20_5500

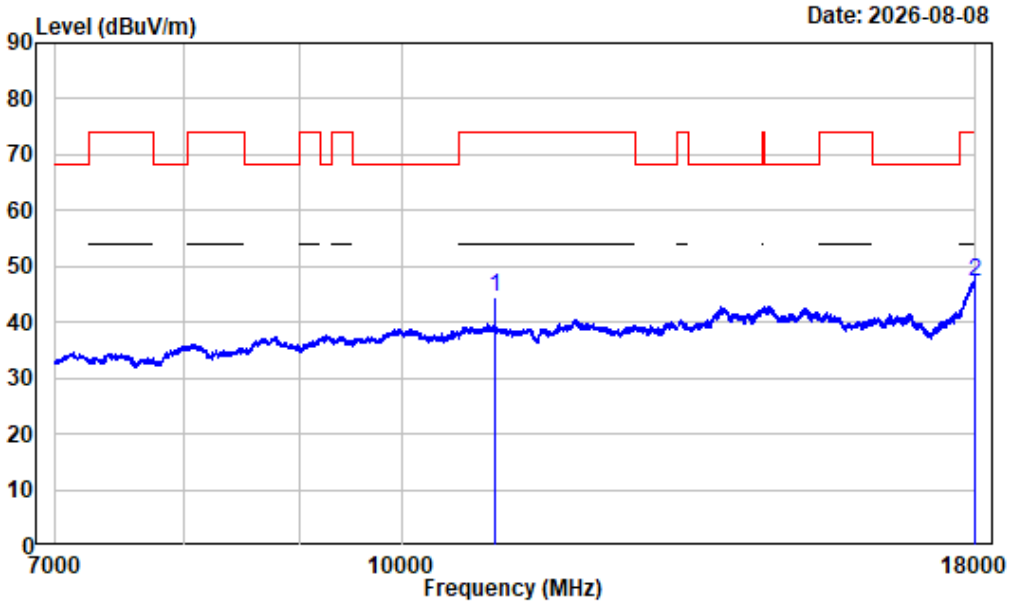

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	3.33	41.31	44.64	54.00	-9.36	Average
2	17990.380	10.63	36.53	47.16	54.00	-6.84	Average


1-7GHz_Horizontal_11AX40_5510

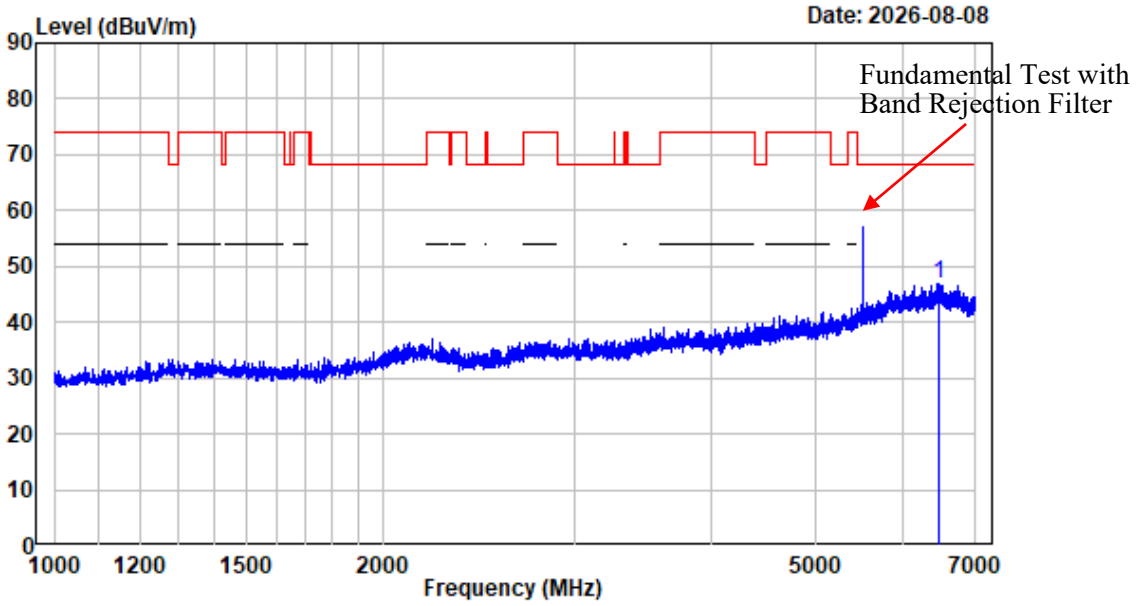

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6478.000	-1.87	48.62	46.75	68.20	-21.45	Peak


1-7GHz_Vertical_11AX40_5510

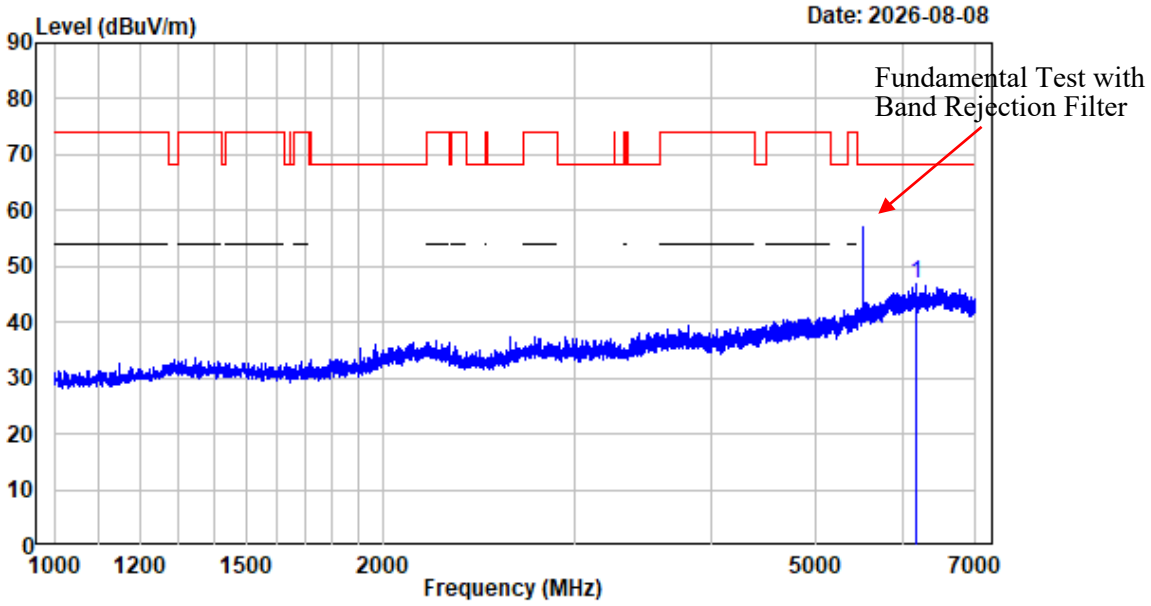

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6167.500	-2.45	49.42	46.97	68.20	-21.23	Peak


7-18GHz_Horizontal_Peak_11AX40_5510

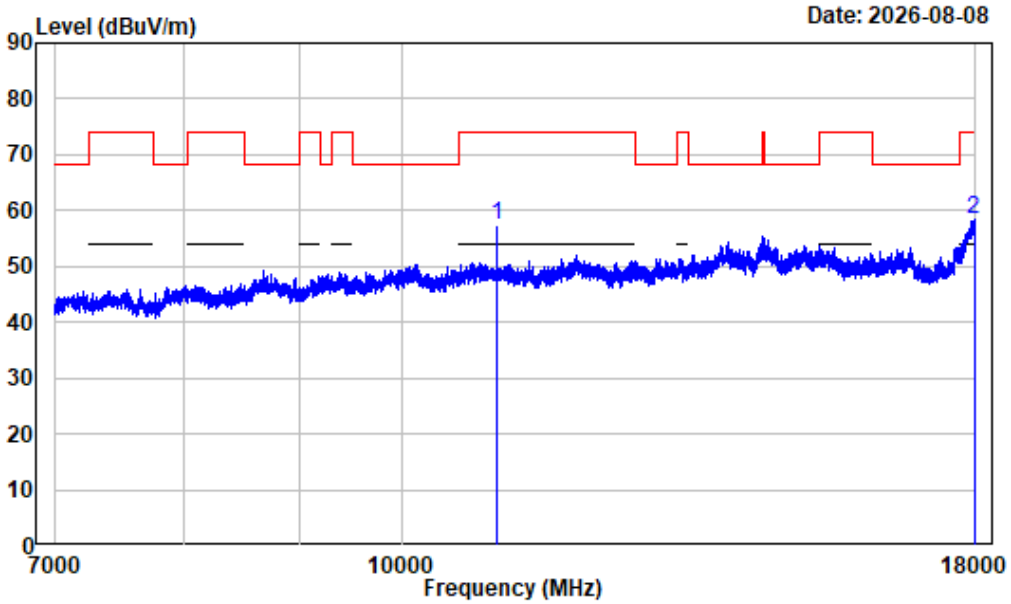

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	54.24	57.52	74.00	-16.48	Peak
2	17972.500	10.31	48.14	58.45	74.00	-15.55	Peak


7-18GHz_Horizontal_Average_11AX40_5510

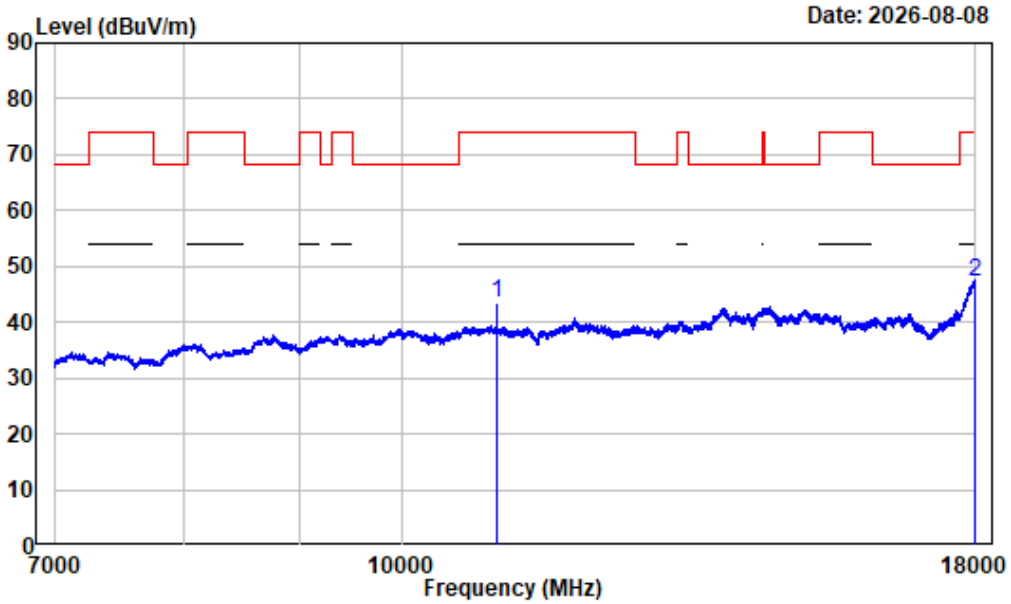

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	40.36	43.64	54.00	-10.36	Average
2	17991.750	10.65	36.46	47.11	54.00	-6.89	Average


7-18GHz_Vertical_Peak_11AX40_5510

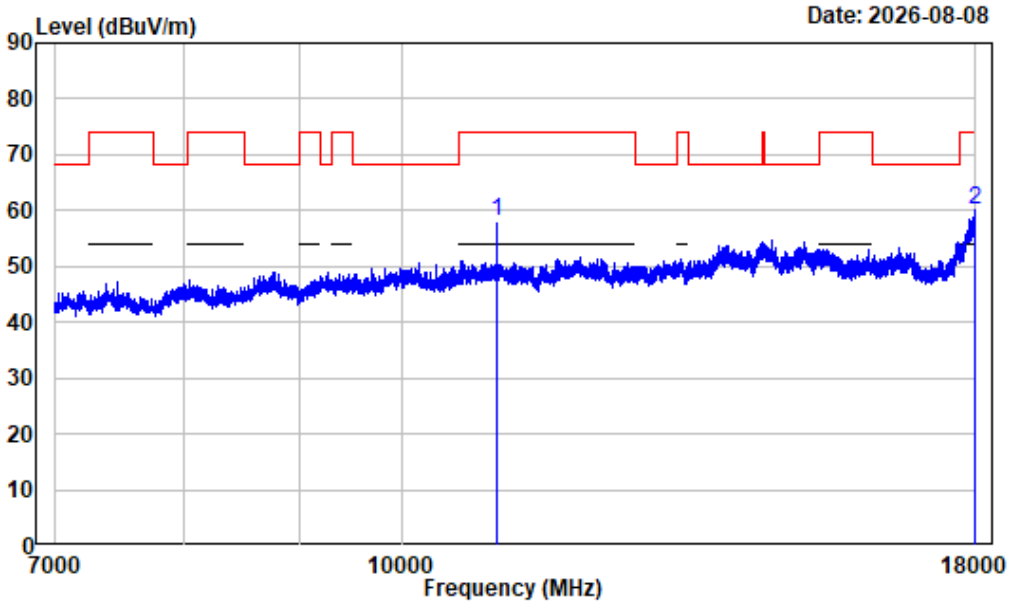

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	54.78	58.06	74.00	-15.94	Peak
2	17984.880	10.53	49.75	60.28	74.00	-13.72	Peak


7-18GHz_Vertical_Average_11AX40_5510

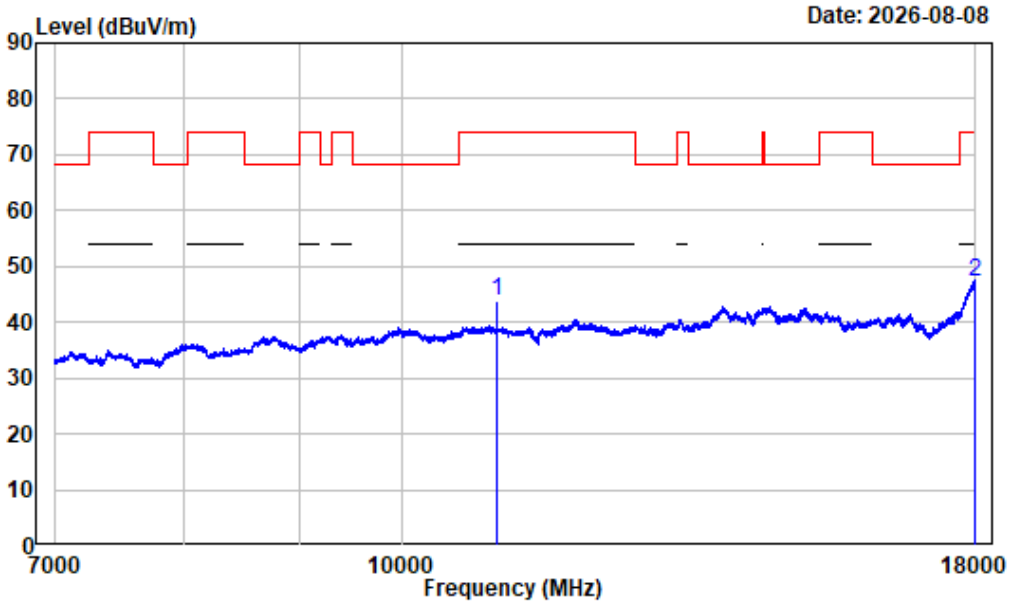

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	3.28	40.59	43.87	54.00	-10.13	Average
2	17991.750	10.65	36.47	47.12	54.00	-6.88	Average


1-7GHz_Horizontal_11AX80_5530

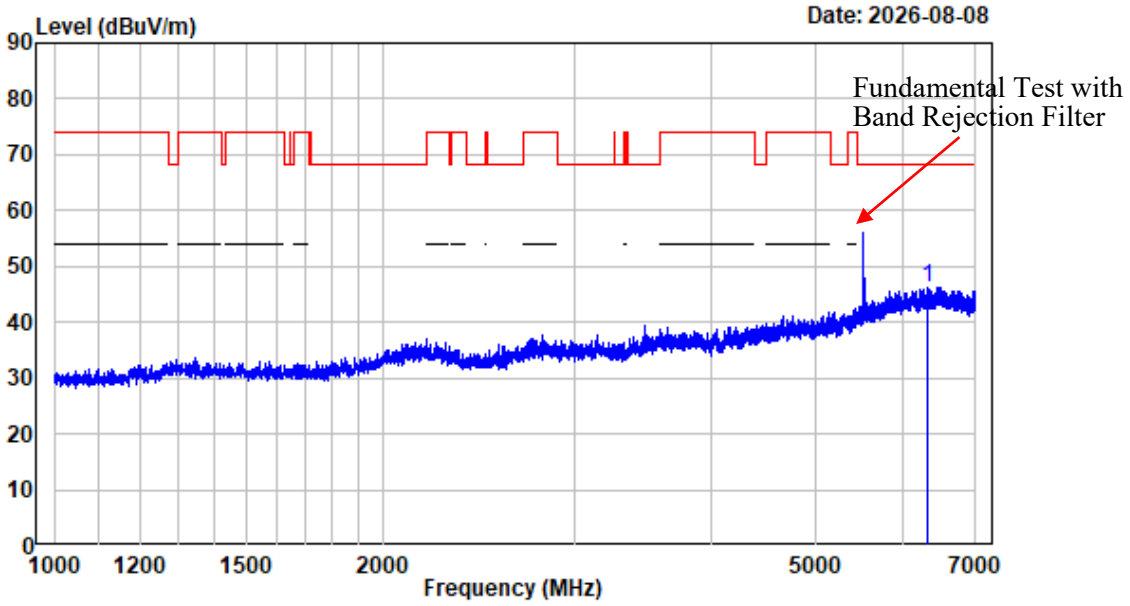

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6331.000	-2.34	48.54	46.20	68.20	-22.00	Peak


1-7GHz_Vertical_11AX80_5530

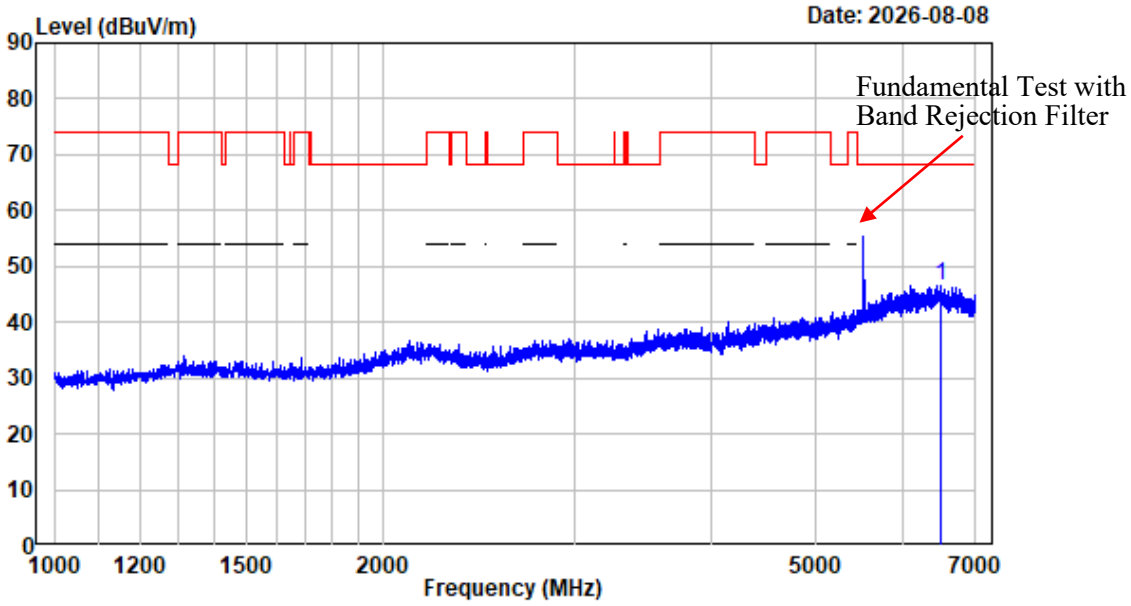

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6495.250	-1.70	48.25	46.55	68.20	-21.65	Peak


7-18GHz_Horizontal_Peak_11AX80_5530

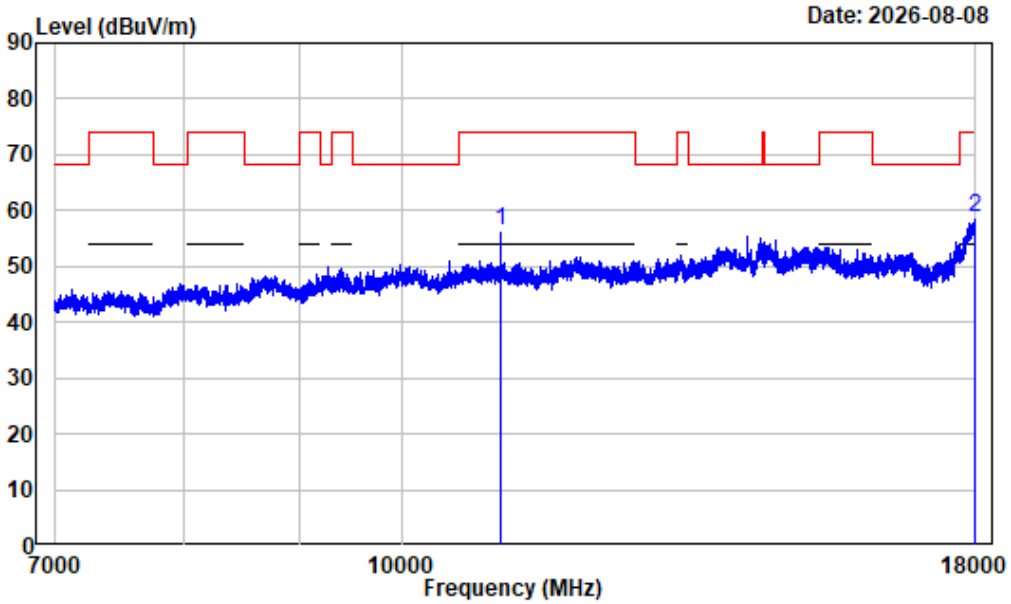

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	53.12	56.21	74.00	-17.79	Peak
2	17998.630	10.80	48.04	58.84	74.00	-15.16	Peak


7-18GHz_Horizontal_Average_11AX80_5530

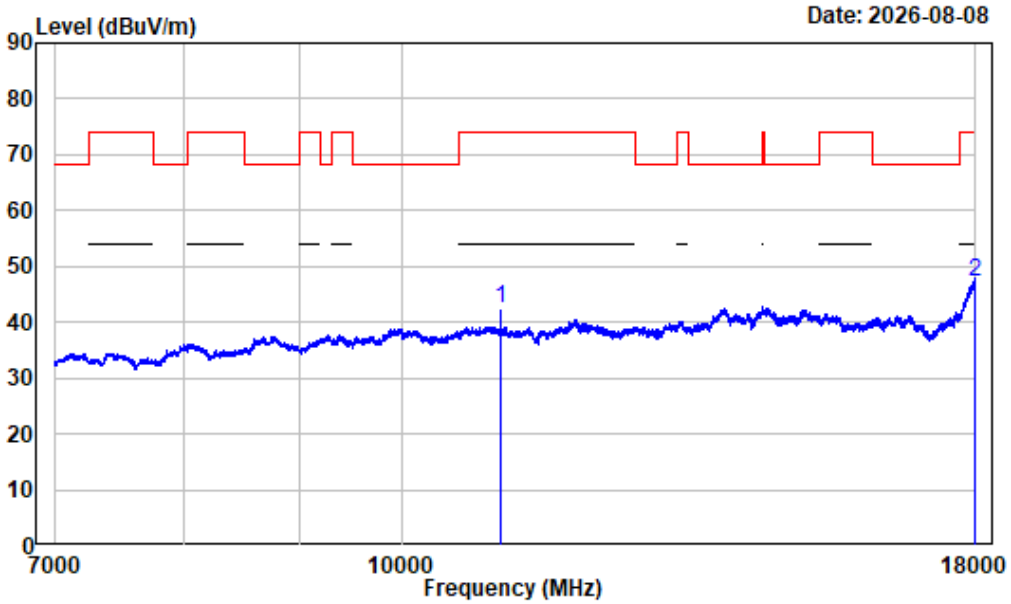

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	39.51	42.60	54.00	-11.40	Average
2	17998.630	10.78	36.33	47.11	54.00	-6.89	Average


7-18GHz_Vertical_Peak_11AX80_5530

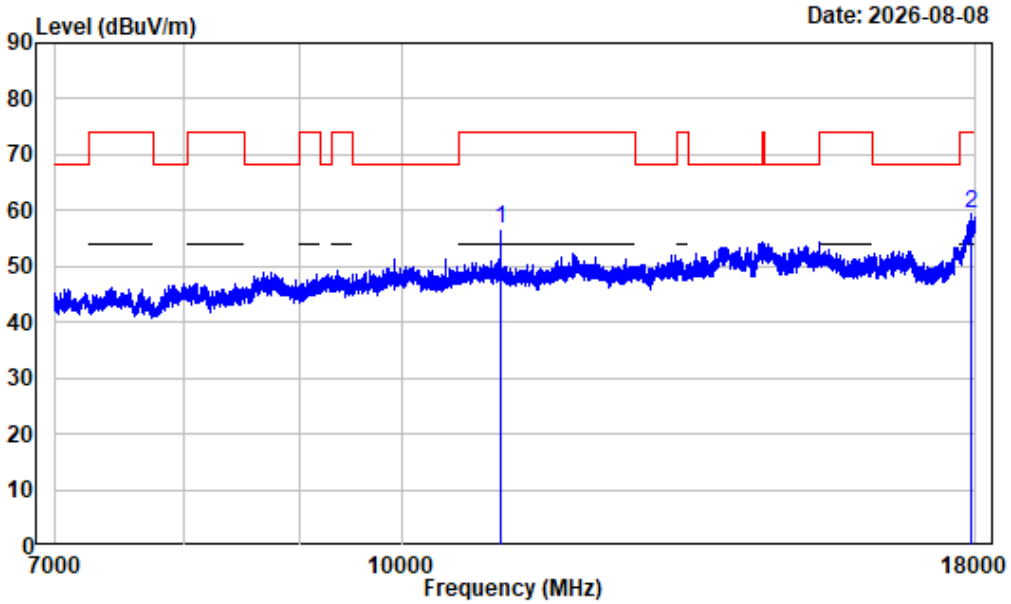

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	53.65	56.74	74.00	-17.26	Peak
2	17923.000	9.65	49.81	59.46	74.00	-14.54	Peak


7-18GHz_Vertical_Average_11AX80_5530

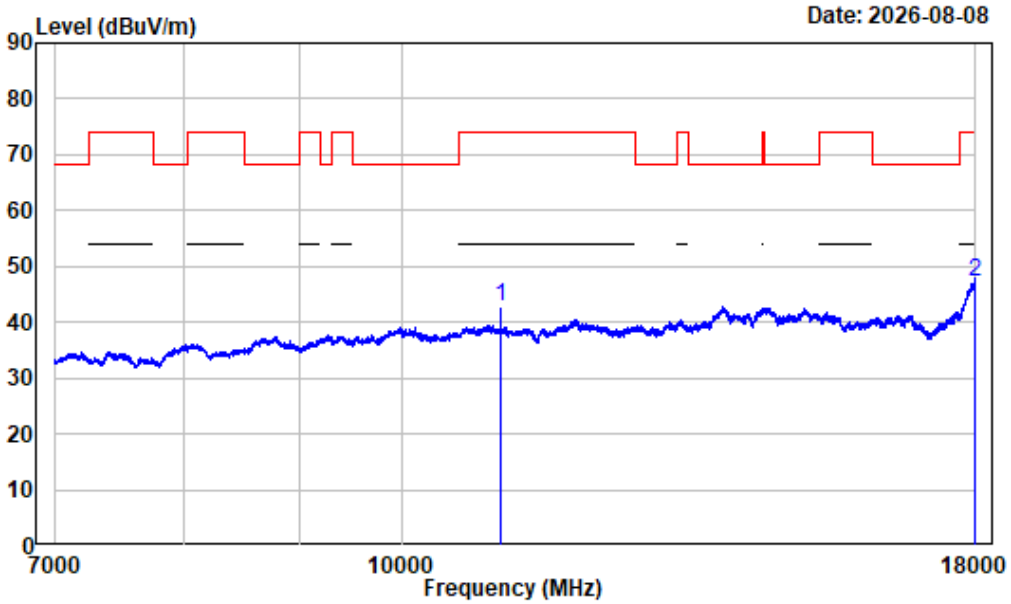

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	3.09	39.74	42.83	54.00	-11.17	Average
2	17994.500	10.70	36.43	47.13	54.00	-6.87	Average


1-7GHz_Horizontal_11A_5825

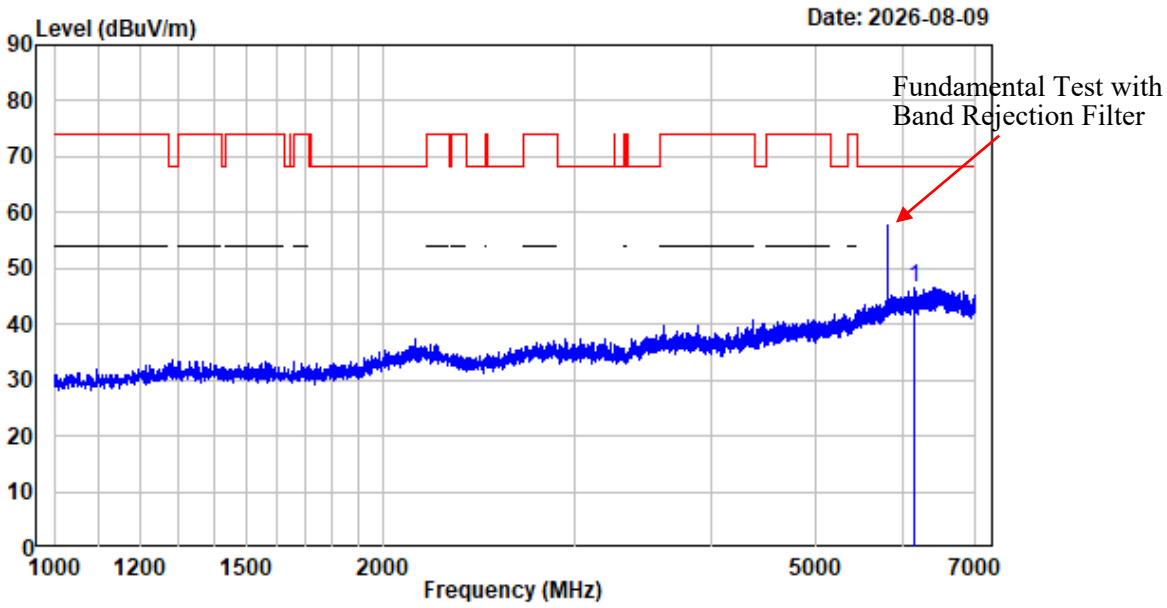

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6151.750	-2.19	48.80	46.61	68.20	-21.59	Peak


1-7GHz_Vertical_11A_5825

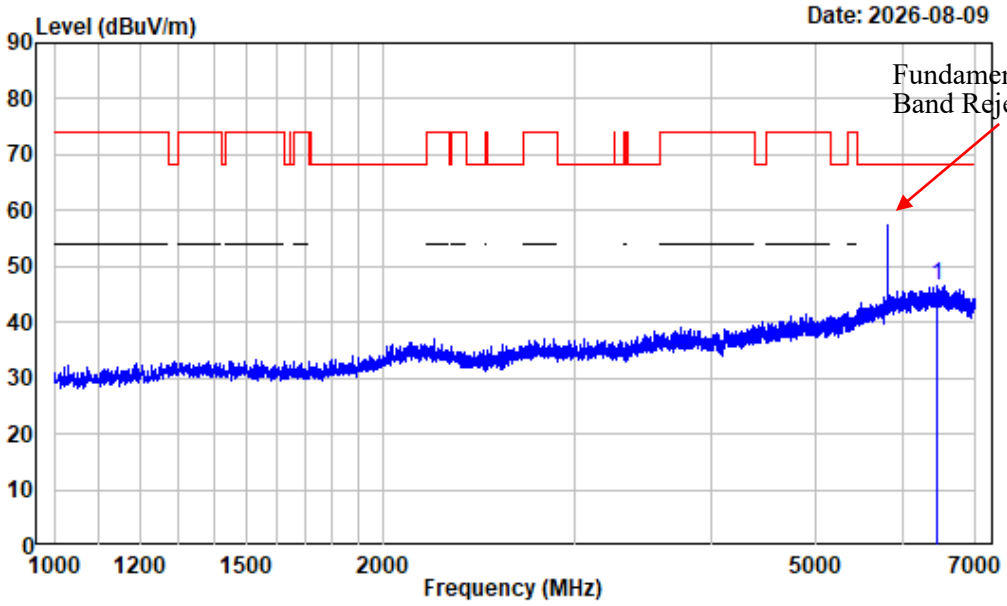

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6447.250	-2.18	48.70	46.52	68.20	-21.68	Peak


7-18GHz_Horizontal_Peak_11A_5825

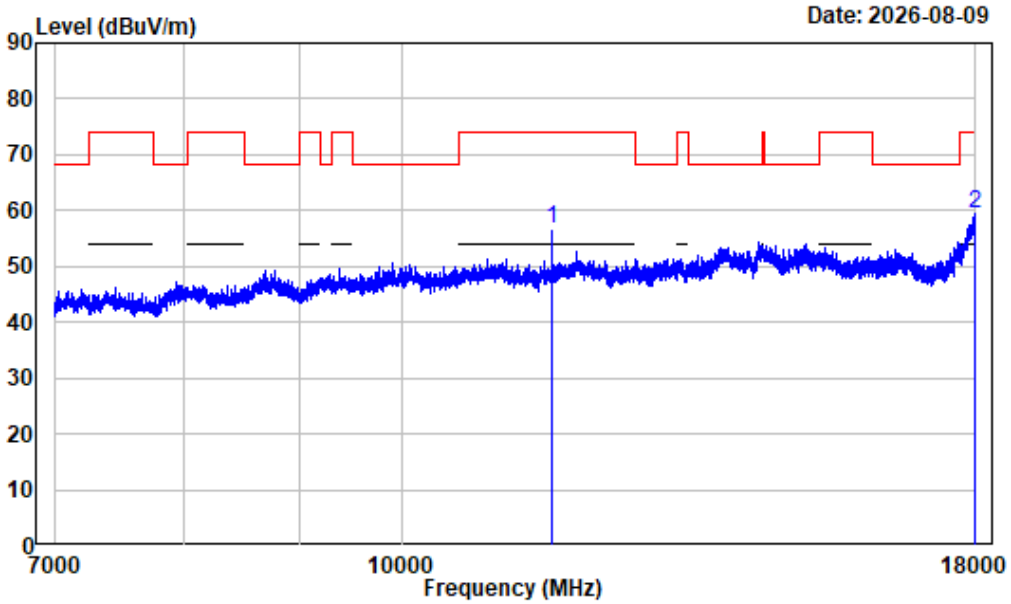

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	54.01	56.59	74.00	-17.41	Peak
2	17993.130	10.68	48.68	59.36	74.00	-14.64	Peak


7-18GHz_Horizontal_Average_11A_5825

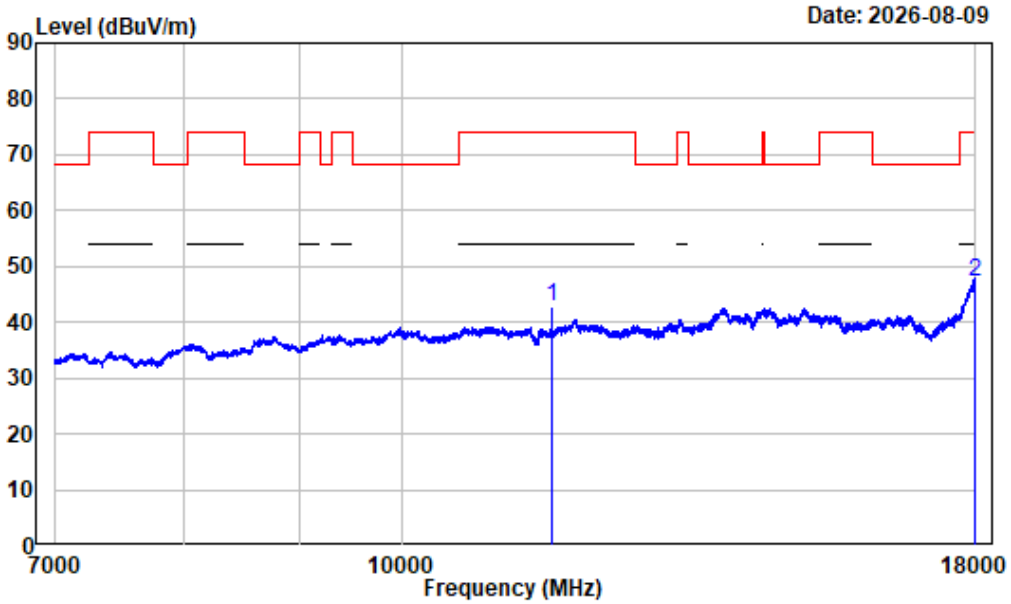

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	40.14	42.72	54.00	-11.28	Average
2	17994.500	10.70	36.42	47.12	54.00	-6.88	Average


7-18GHz_Vertical_Peak_11A_5825

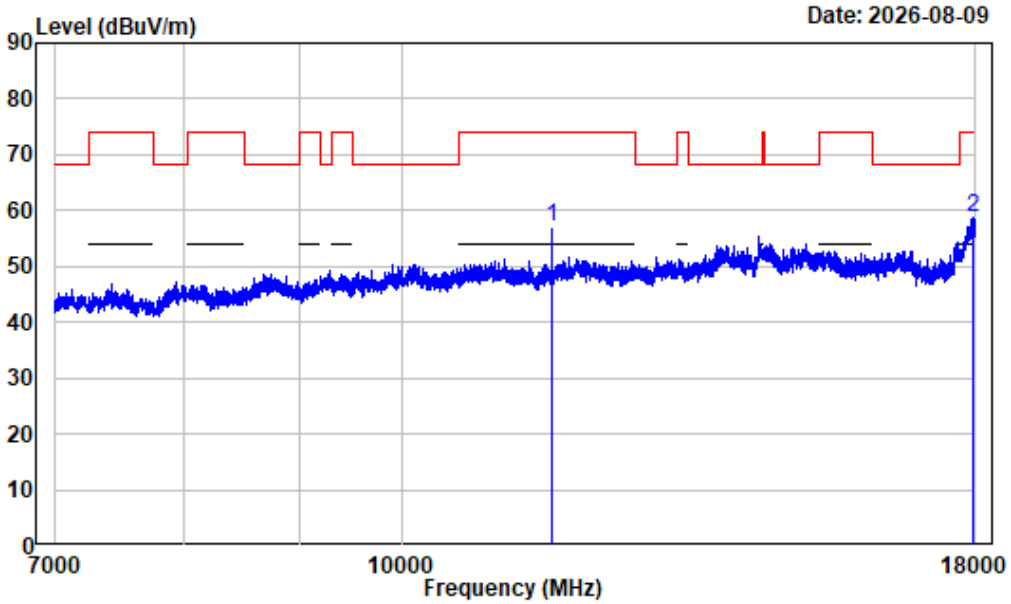

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	54.55	57.13	74.00	-16.87	Peak
2	17957.380	10.03	48.58	58.61	74.00	-15.39	Peak


7-18GHz_Vertical_Average_11A_5825

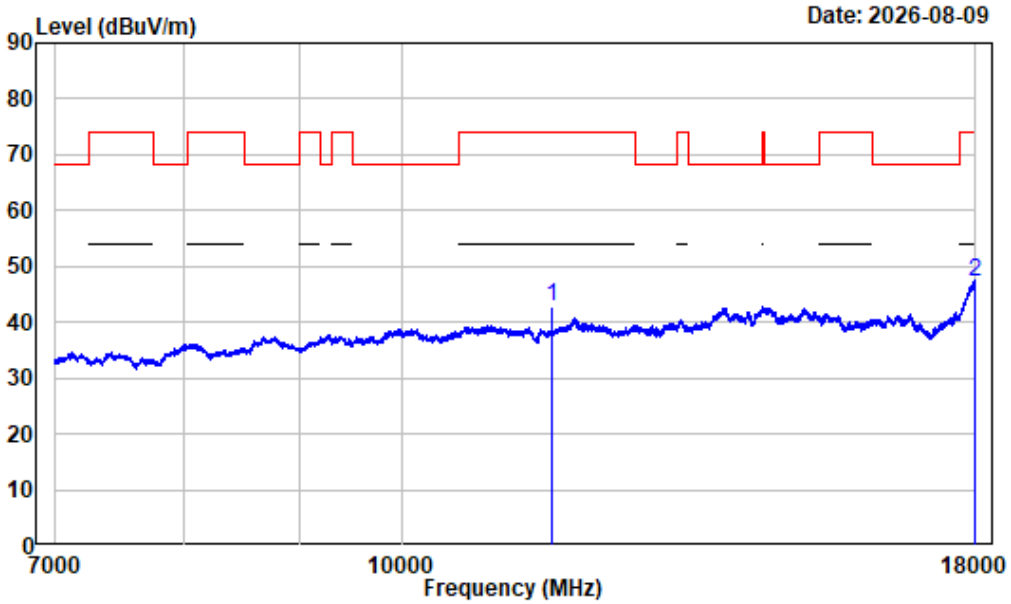

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	40.37	42.95	54.00	-11.05	Average
2	17997.250	10.75	36.41	47.16	54.00	-6.84	Average


1-7GHz_Horizontal_11AC20_5825

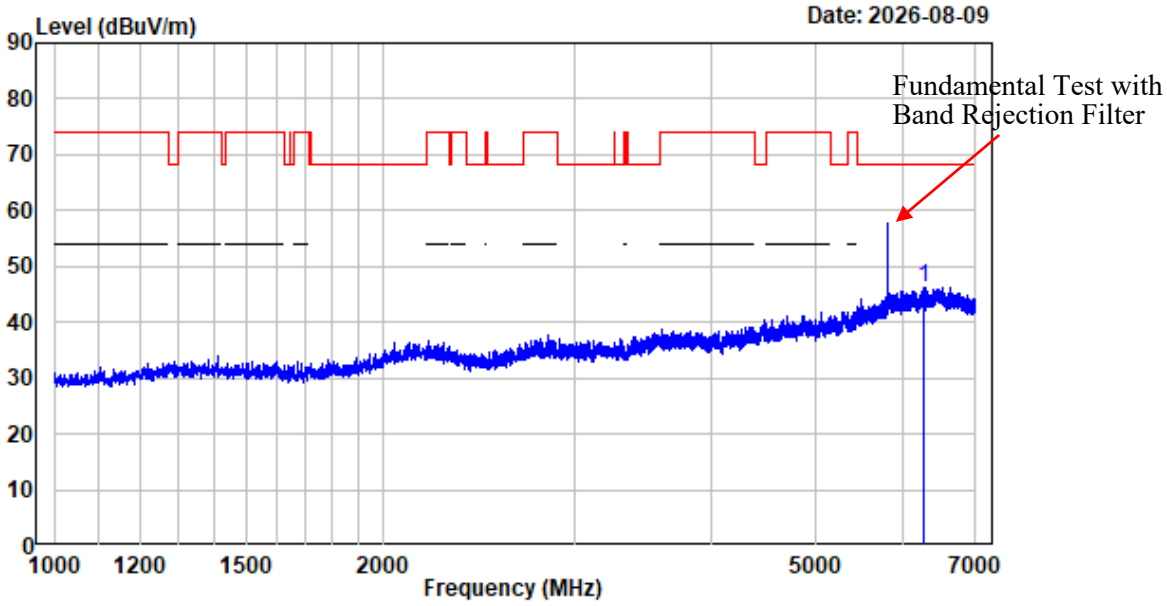

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6276.250	-2.43	48.62	46.19	68.20	-22.01	Peak


1-7GHz_Vertical_11AC20_5825

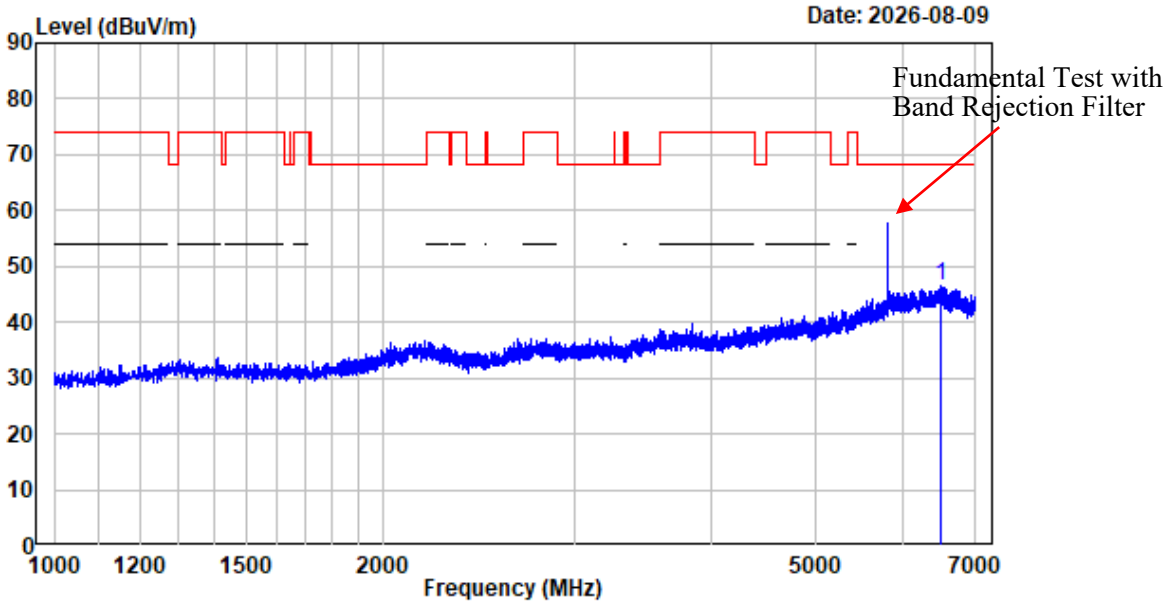

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6517.750	-1.73	48.17	46.44	68.20	-21.76	Peak


7-18GHz_Horizontal_Peak_11AC20_5825

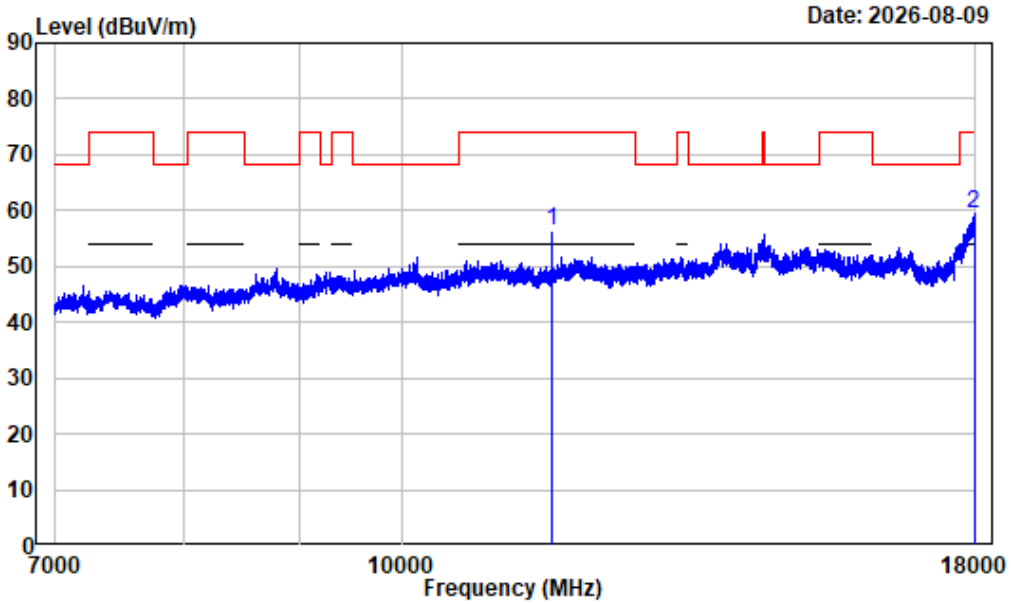

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	53.89	56.47	74.00	-17.53	Peak
2	17973.880	10.33	49.27	59.60	74.00	-14.40	Peak


7-18GHz_Horizontal_Average_11AC20_5825

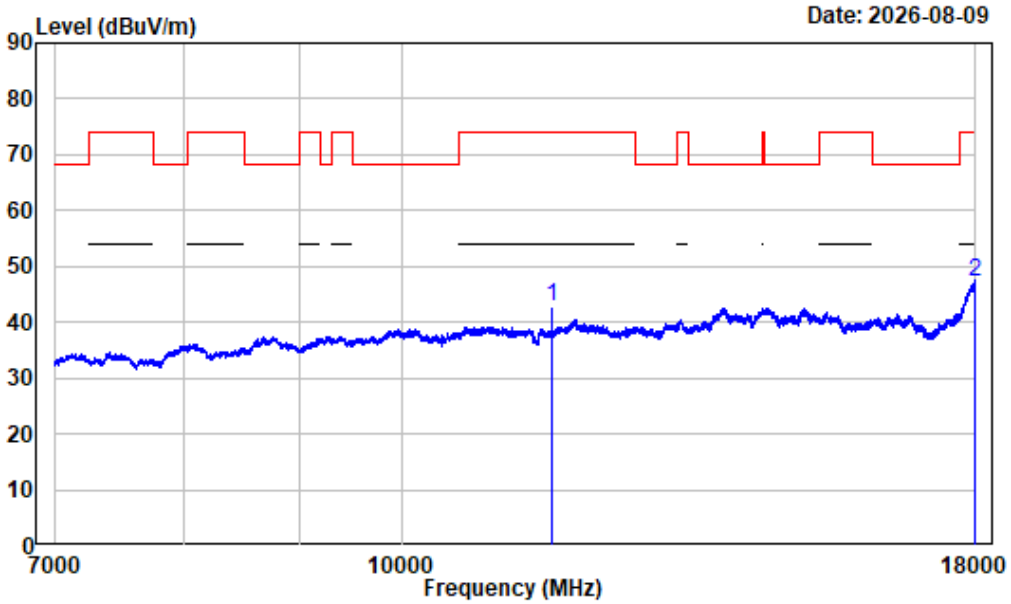

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	40.06	42.64	54.00	-11.36	Average
2	17997.250	10.75	36.38	47.13	54.00	-6.87	Average


7-18GHz_Vertical_Peak_11AC20_5825

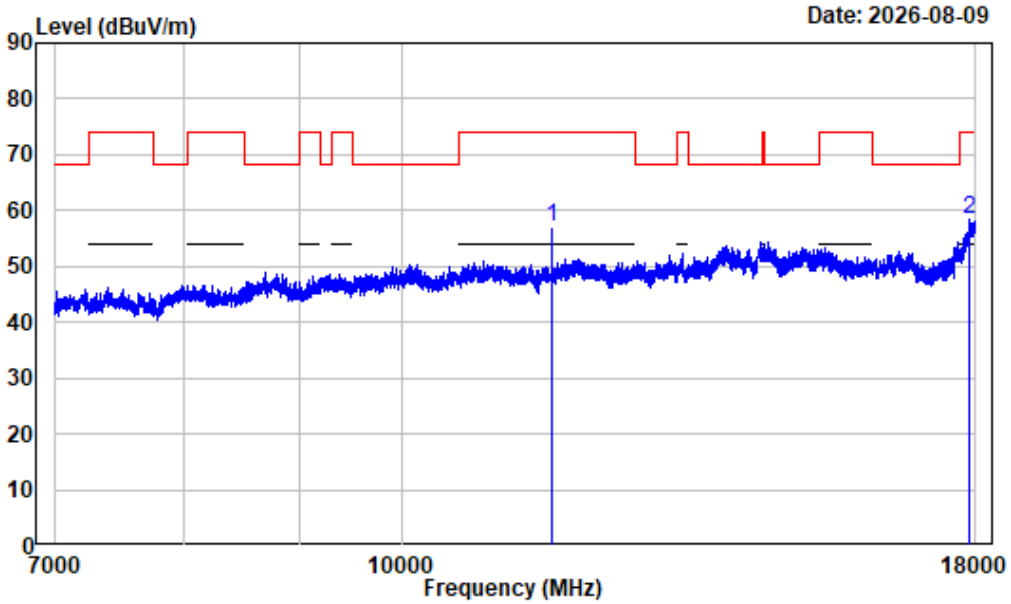

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	54.43	57.01	74.00	-16.99	Peak
2	17902.380	9.46	49.02	58.48	74.00	-15.52	Peak


7-18GHz_Vertical_Average_11AC20_5825

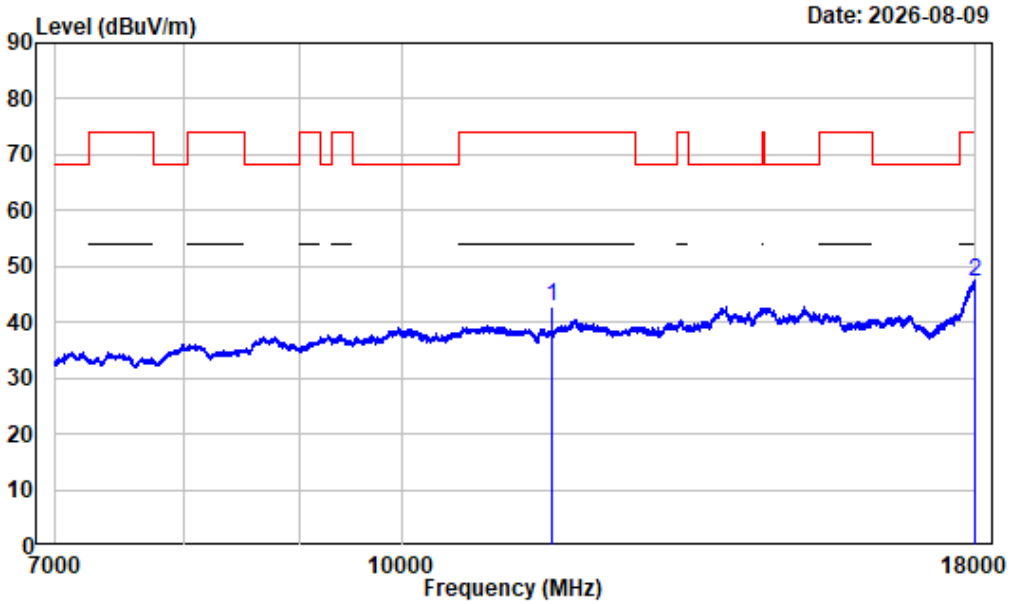

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	40.28	42.86	54.00	-11.14	Average
2	17998.250	10.80	36.31	47.11	54.00	-6.89	Average


1-7GHz_Horizontal_11AC40_5755

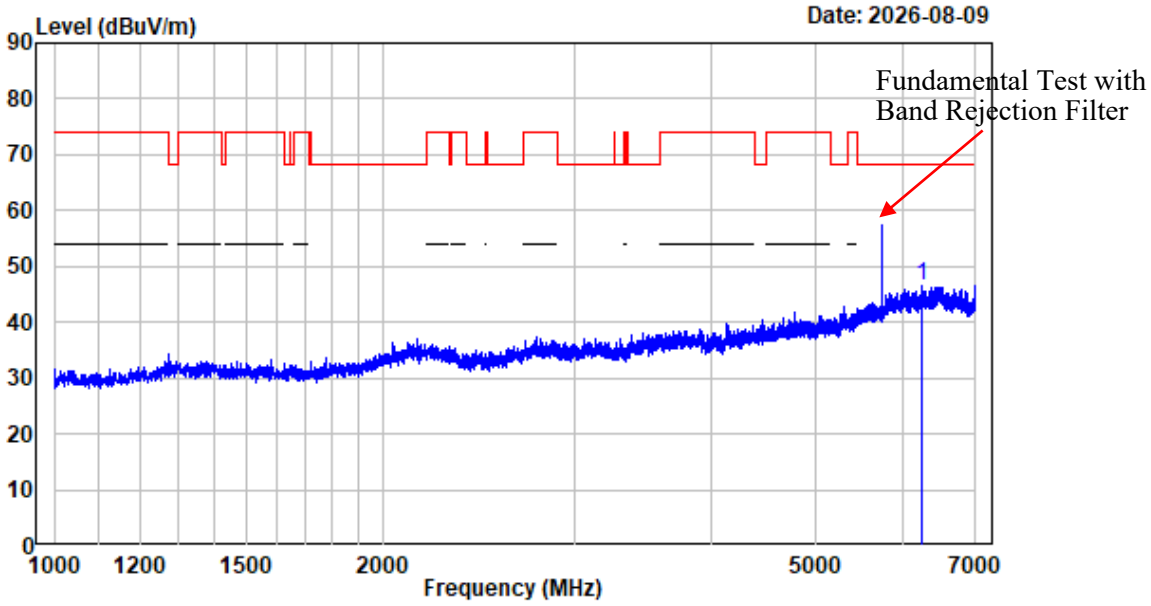

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6257.500	-2.36	48.91	46.55	68.20	-21.65	Peak


1-7GHz_Vertical_11AC40_5755

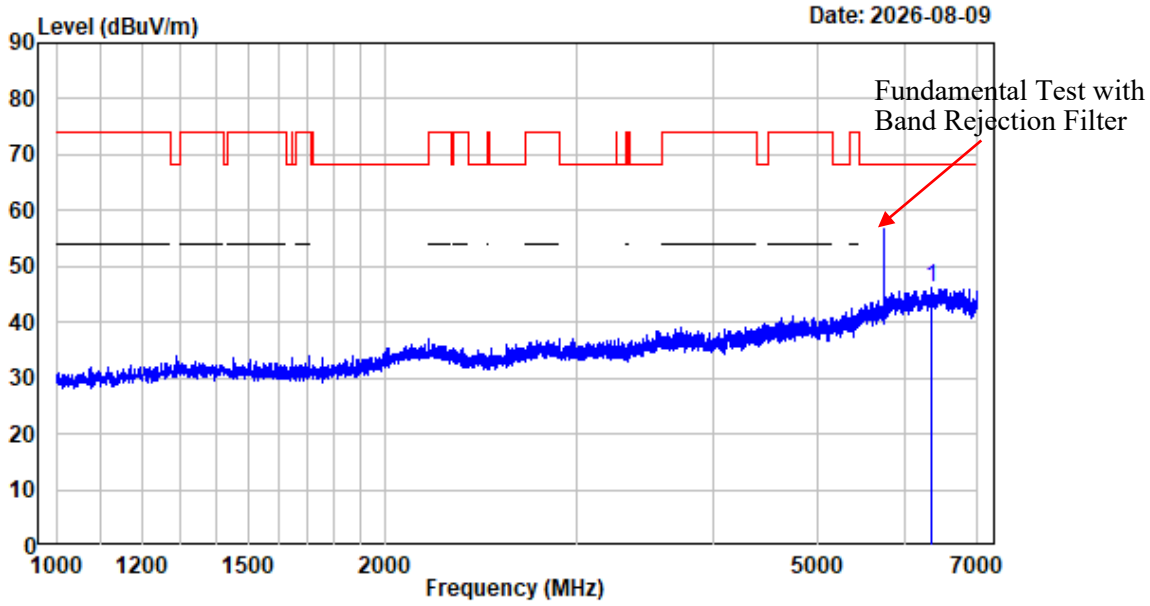

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6343.000	-2.24	48.45	46.21	68.20	-21.99	Peak


7-18GHz_Horizontal_Peak_11AC40_5755

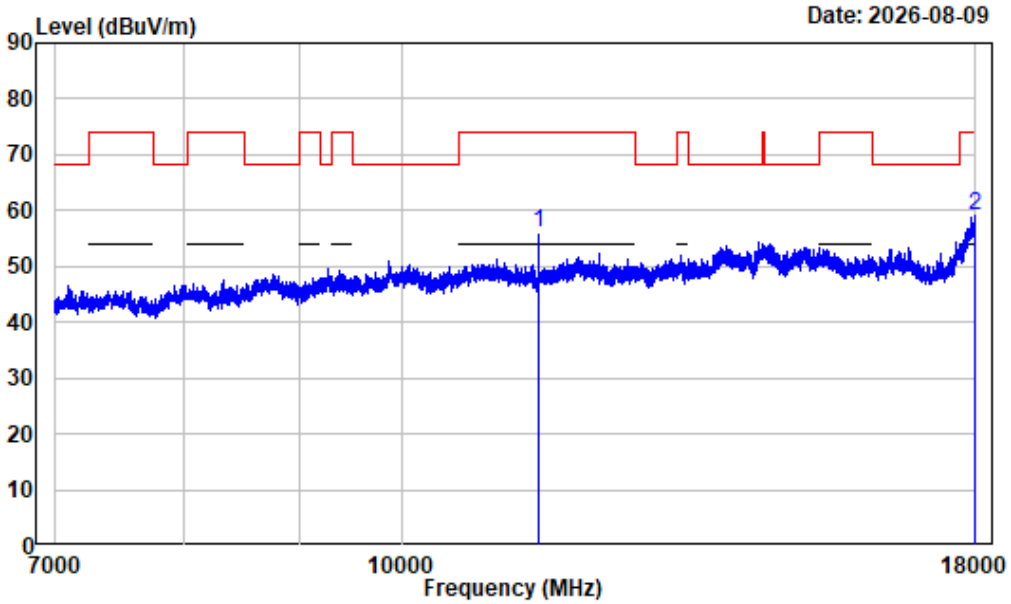

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	53.53	55.94	74.00	-18.06	Peak
2	17979.380	10.43	48.82	59.25	74.00	-14.75	Peak


7-18GHz_Horizontal_Average_11AC40_5755

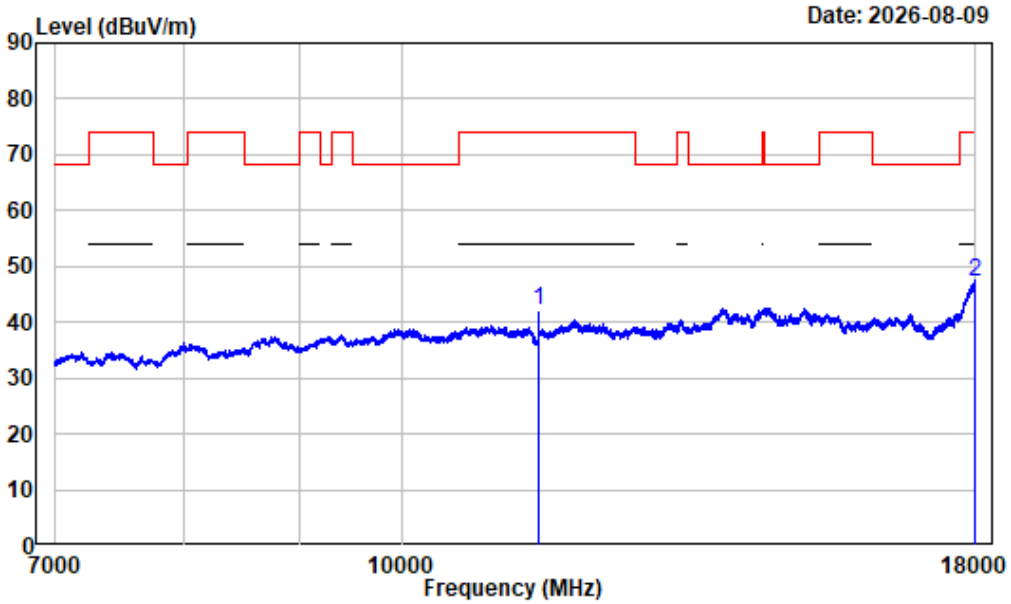

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	39.71	42.12	54.00	-11.88	Average
2	17984.880	10.53	36.62	47.15	54.00	-6.85	Average


7-18GHz_Vertical_Peak_11AC40_5755

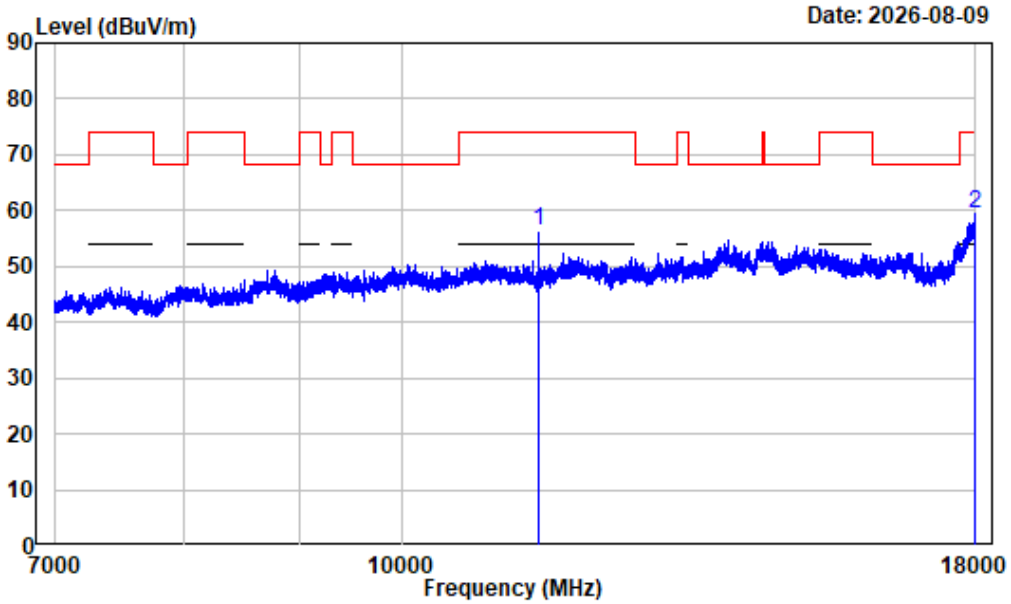

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	54.08	56.49	74.00	-17.51	Peak
2	17993.130	10.68	48.64	59.32	74.00	-14.68	Peak


7-18GHz_Vertical_Average_11AC40_5755

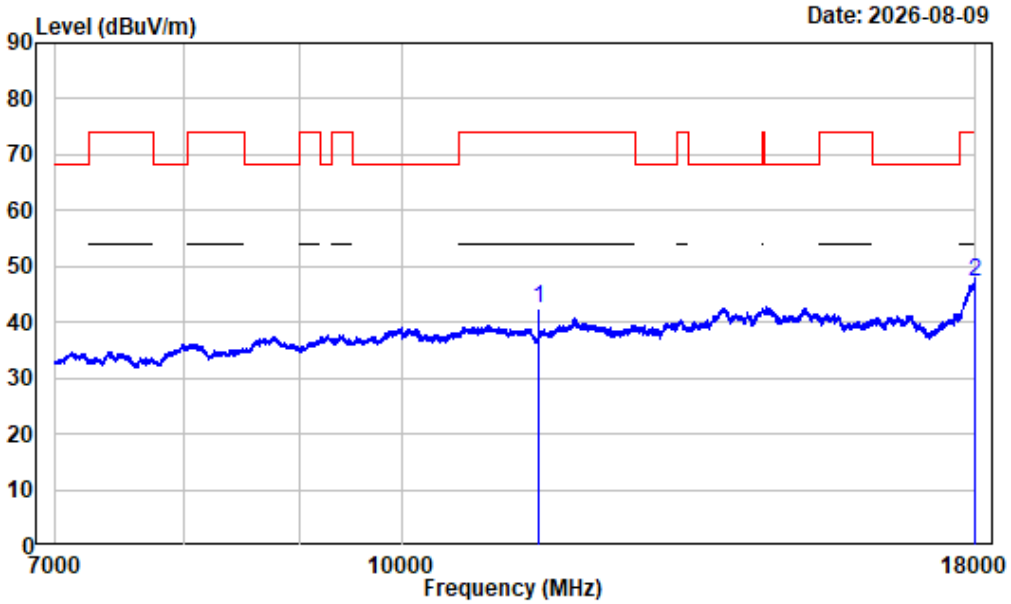

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	39.95	42.36	54.00	-11.64	Average
2	17993.130	10.68	36.46	47.14	54.00	-6.86	Average


1-7GHz_Horizontal_11AC80_5775

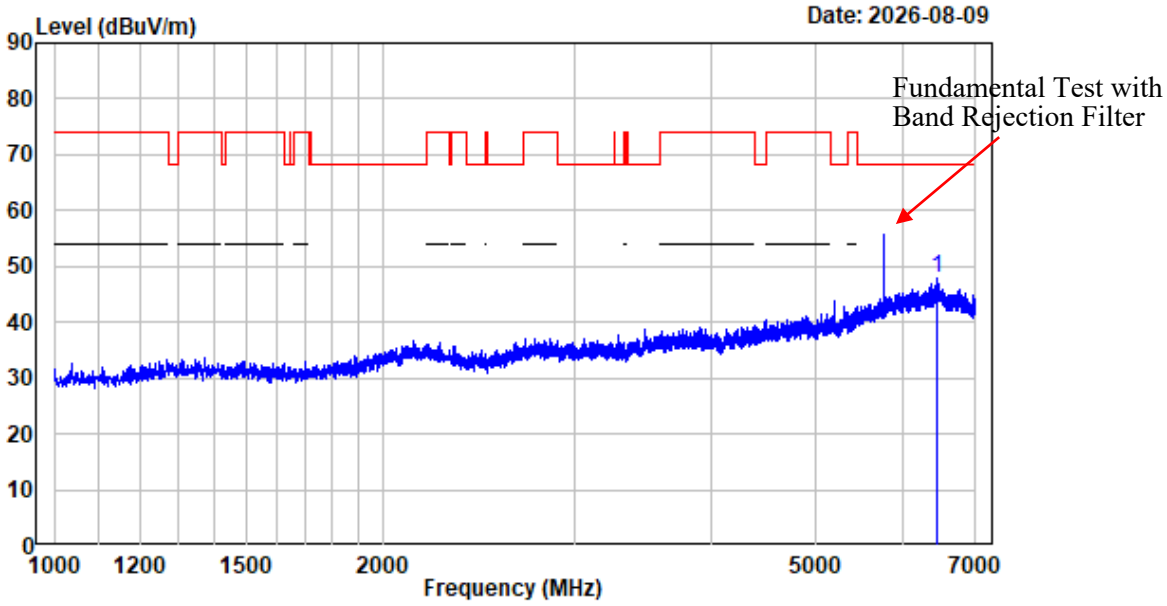

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6442.000	-2.19	50.15	47.96	68.20	-20.24	Peak


1-7GHz_Vertical_11AC80_5775

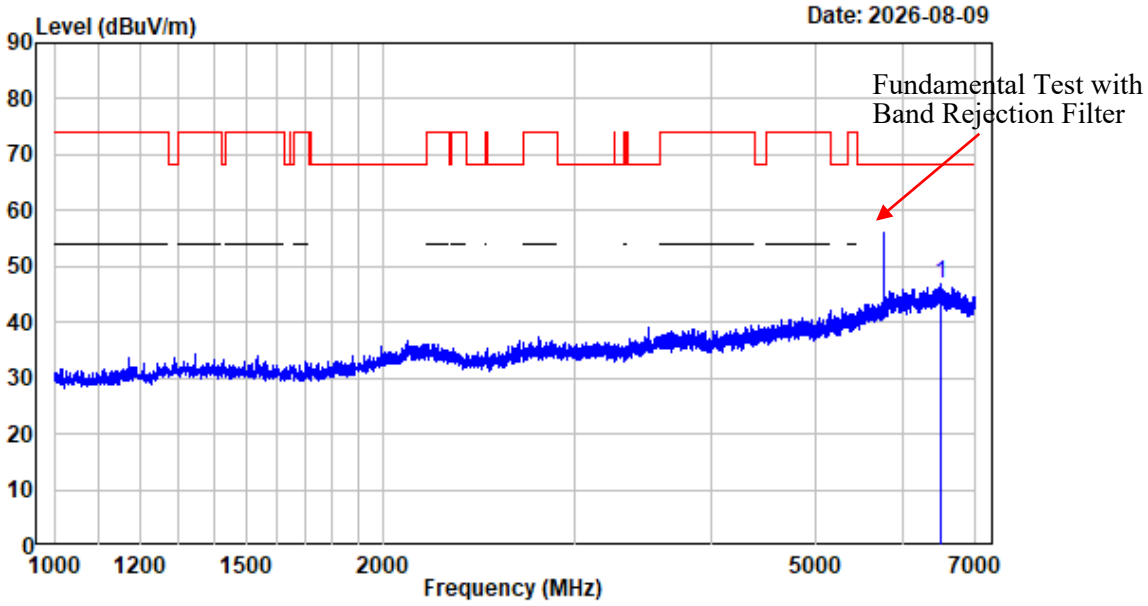

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6508.750	-1.68	48.43	46.75	68.20	-21.45	Peak


7-18GHz_Horizontal_Peak_11AC80_5775

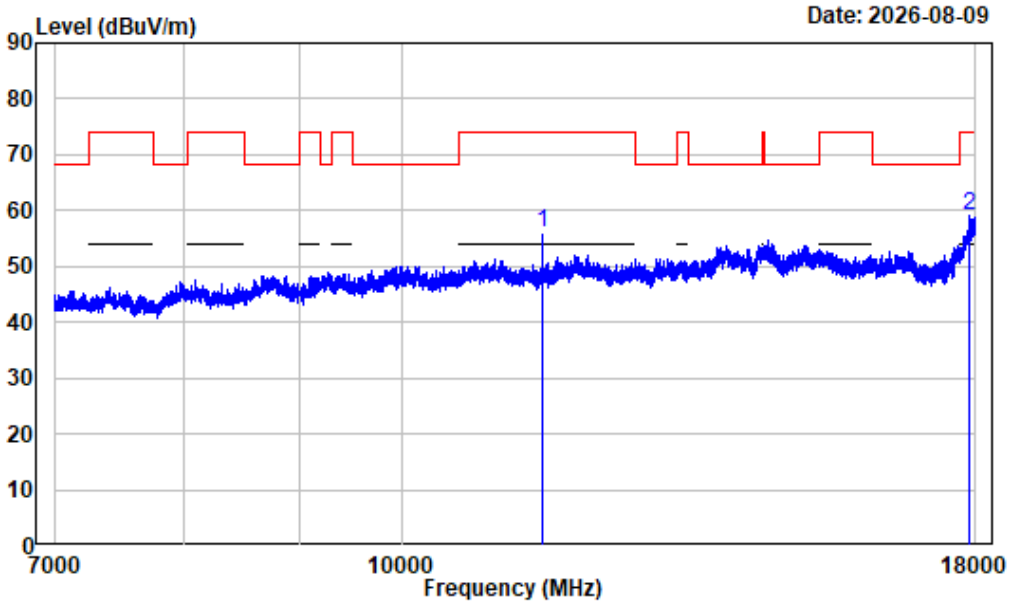

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	53.26	55.90	74.00	-18.10	Peak
2	17901.000	9.45	49.80	59.25	74.00	-14.75	Peak


7-18GHz_Horizontal_Average_11AC80_5775

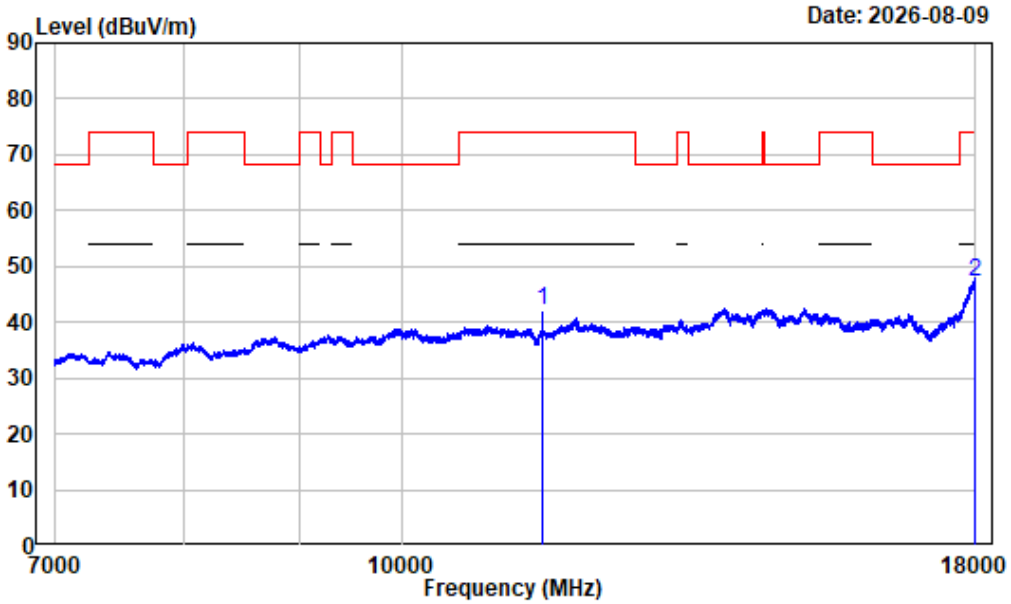

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	39.48	42.12	54.00	-11.88	Average
2	17998.630	10.78	36.33	47.11	54.00	-6.89	Average


7-18GHz_Vertical_Peak_11AC80_5775

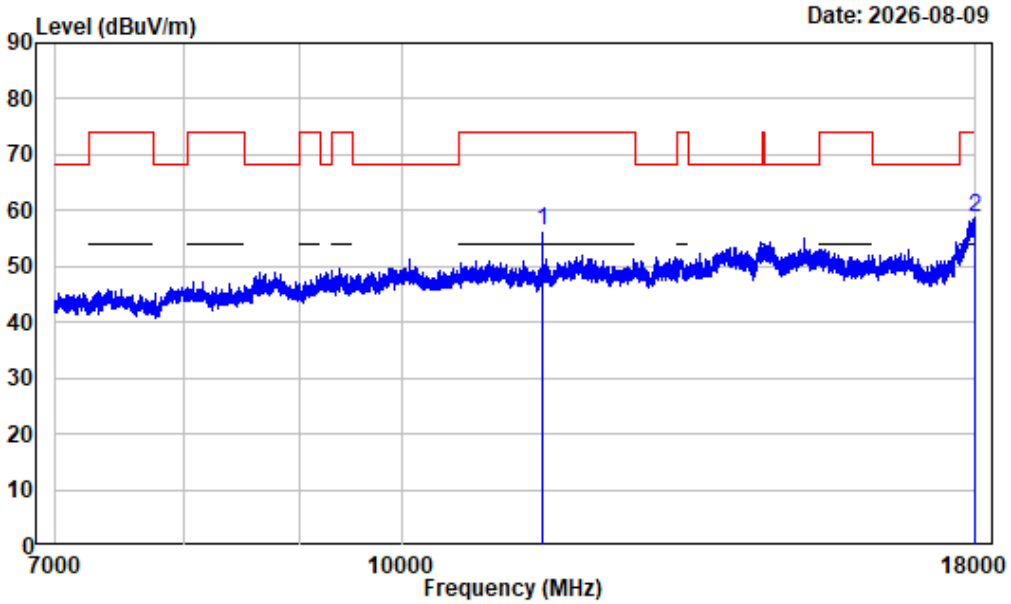

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	53.81	56.45	74.00	-17.55	Peak
2	17975.250	10.35	48.56	58.91	74.00	-15.09	Peak


7-18GHz_Vertical_Average_11AC80_5775

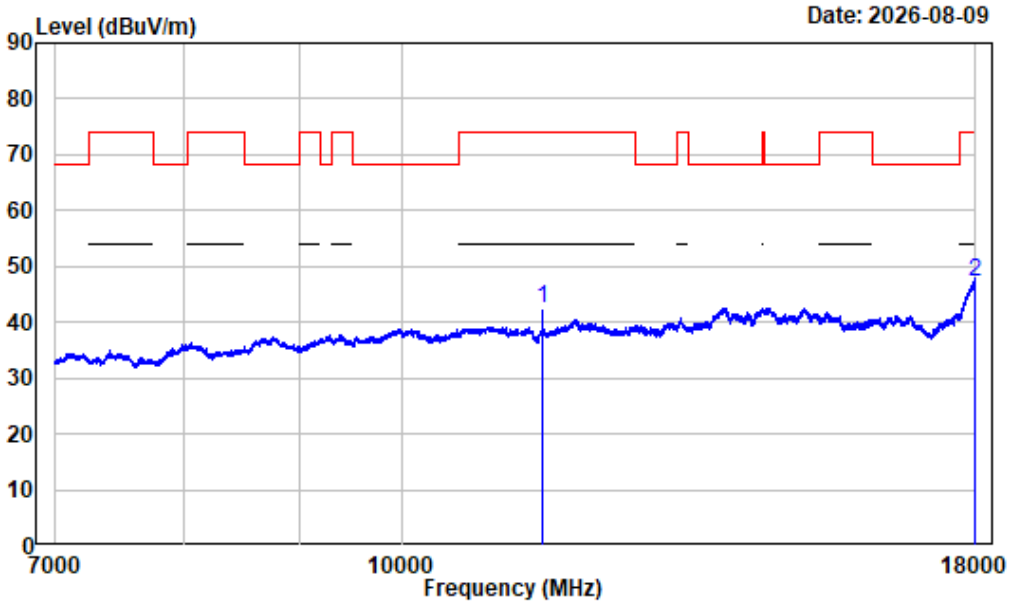

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	39.72	42.36	54.00	-11.64	Average
2	17995.880	10.73	36.39	47.12	54.00	-6.88	Average


1-7GHz_Horizontal_11AX20_5825

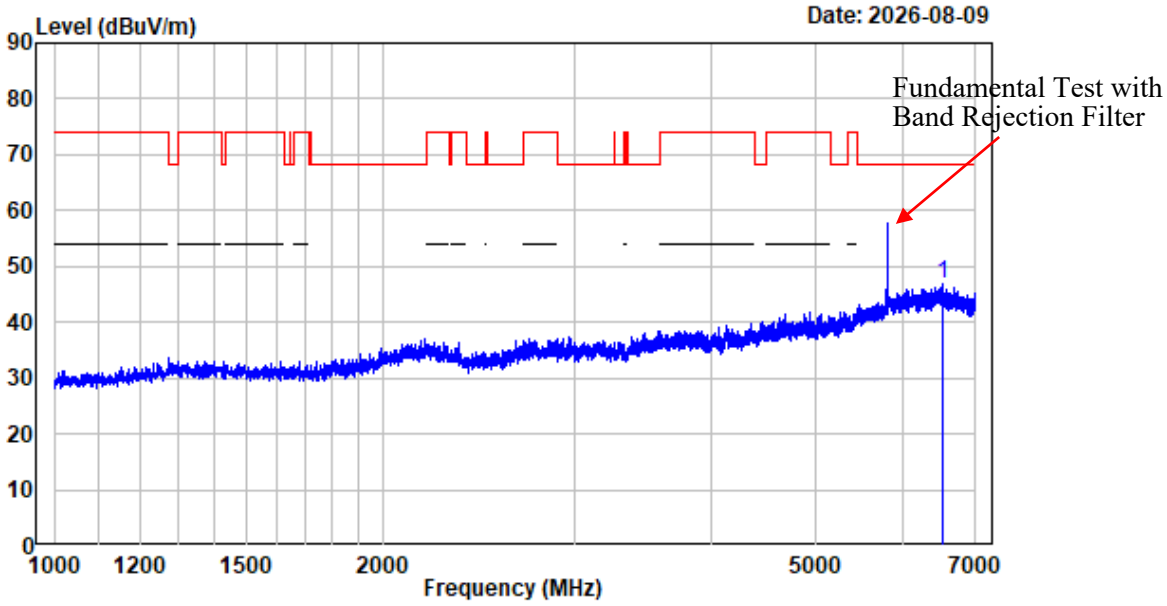

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6538.000	-1.83	48.53	46.70	68.20	-21.50	Peak


1-7GHz_Vertical_11AX20_5825

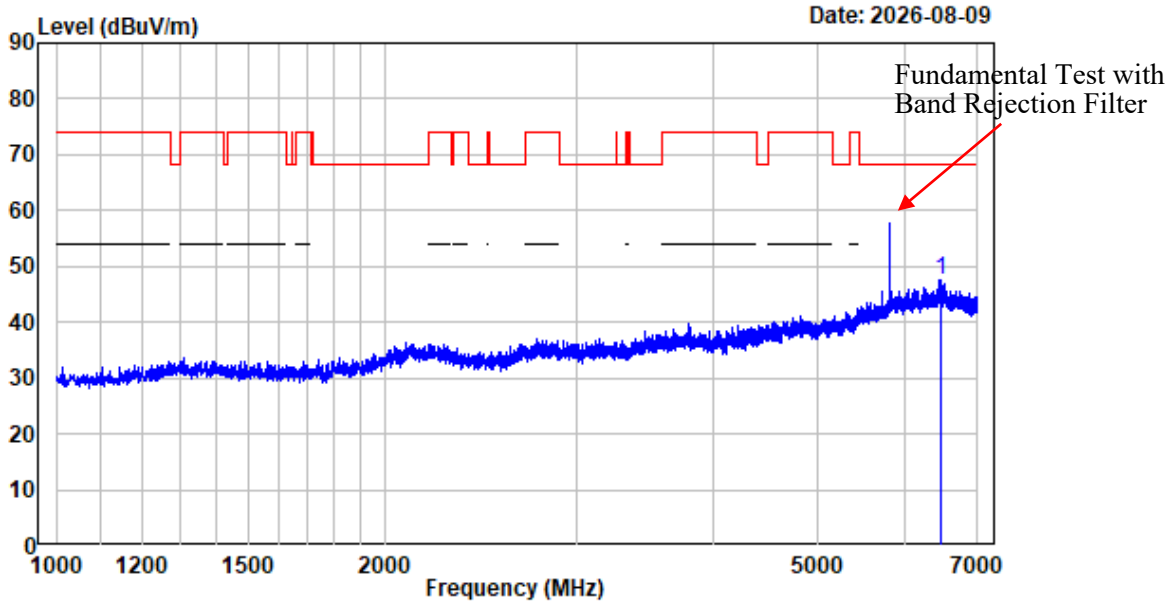

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6468.250	-1.98	49.59	47.61	68.20	-20.59	Peak


7-18GHz_Horizontal_Peak_11AX20_5825

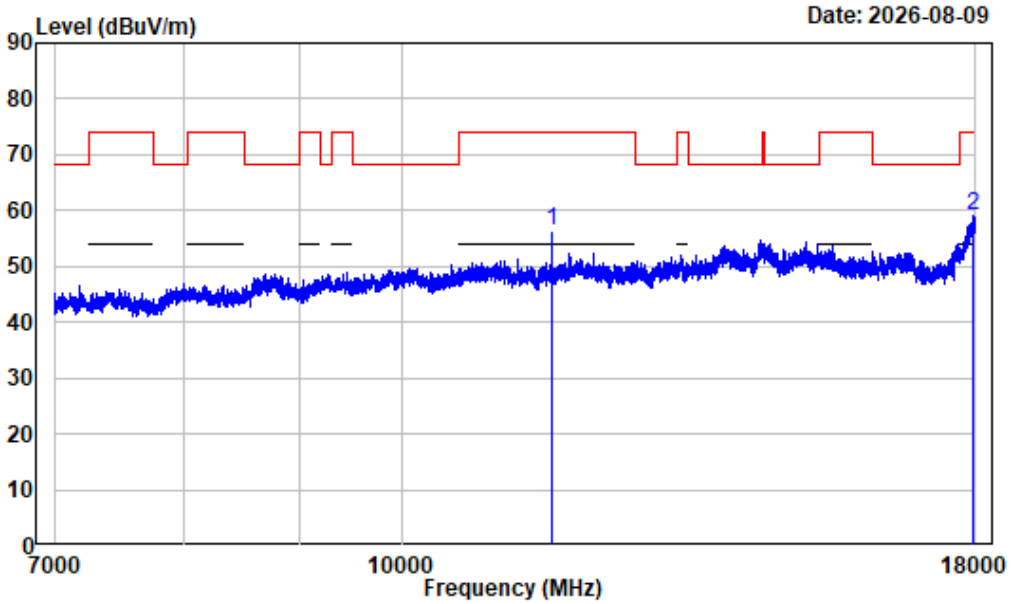

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	53.77	56.35	74.00	-17.65	Peak
2	17962.880	10.13	49.09	59.22	74.00	-14.78	Peak


7-18GHz_Horizontal_Average_11AX20_5825

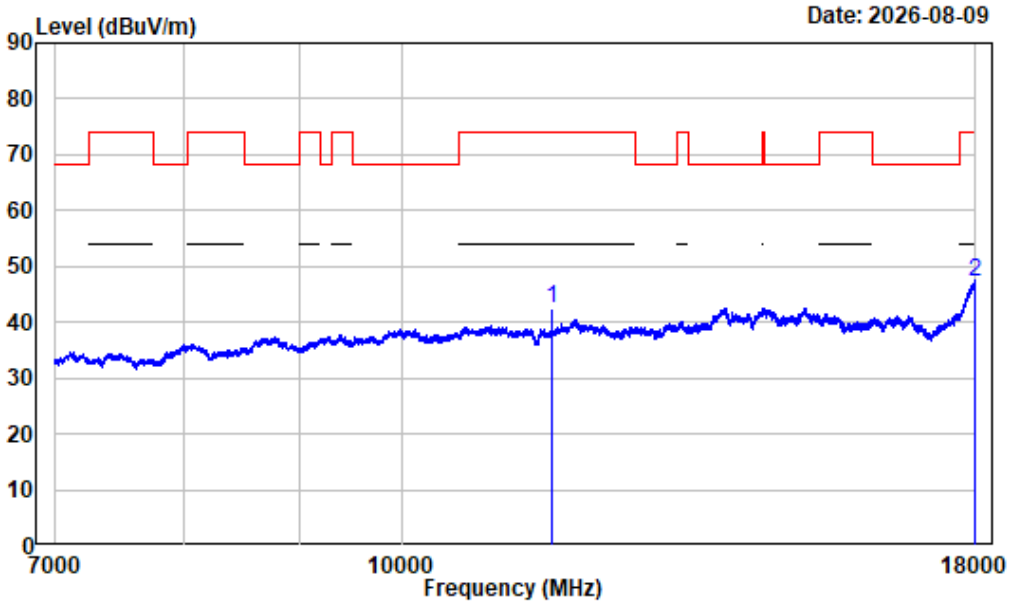

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	39.96	42.54	54.00	-11.46	Average
2	17991.750	10.65	36.47	47.12	54.00	-6.88	Average


7-18GHz_Vertical_Peak_11AX20_5825

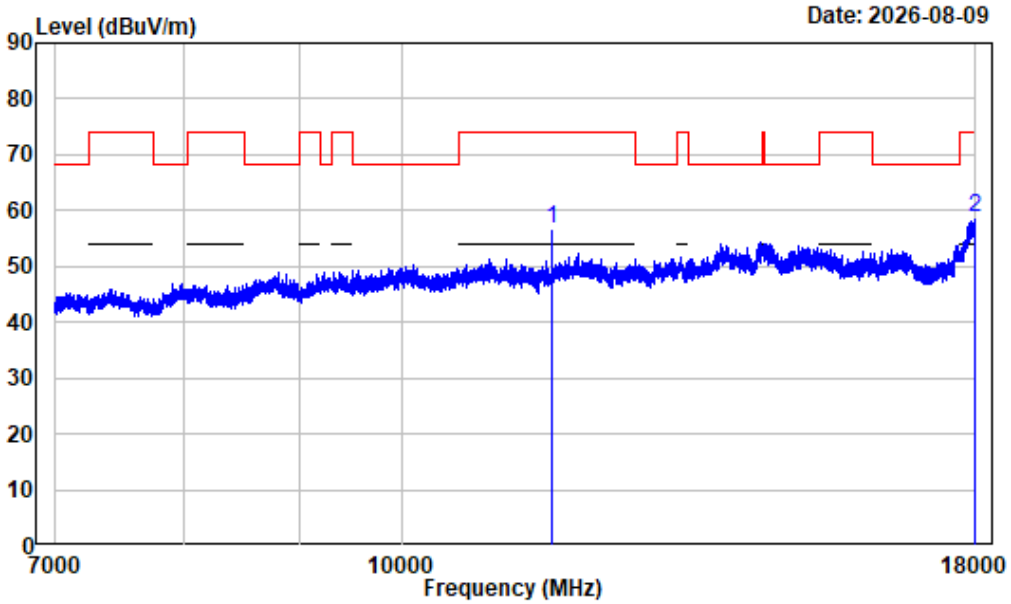

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	54.31	56.89	74.00	-17.11	Peak
2	17998.630	10.80	47.90	58.70	74.00	-15.30	Peak


7-18GHz_Vertical_Average_11AX20_5825

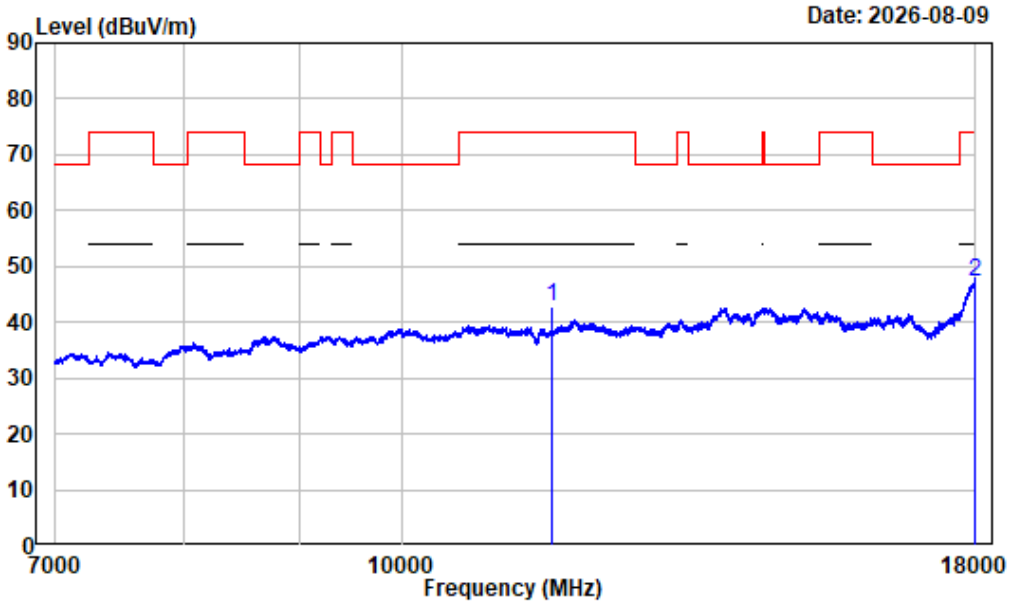

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	2.58	40.19	42.77	54.00	-11.23	Average
2	17997.250	10.75	36.42	47.17	54.00	-6.83	Average


1-7GHz_Horizontal_11AX40_5755

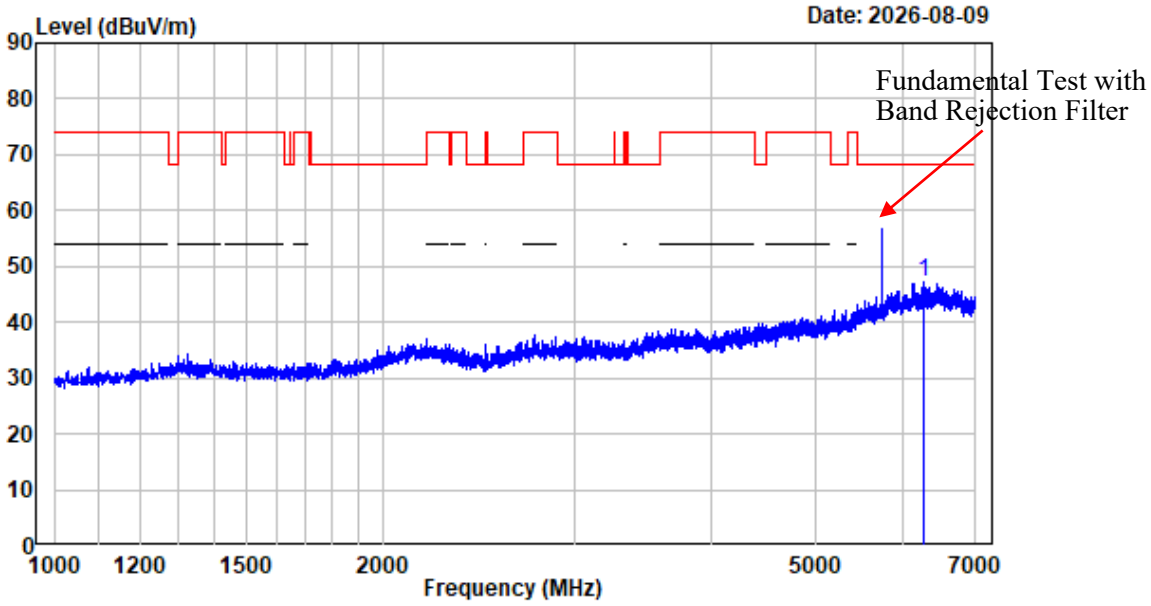

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6265.750	-2.40	49.69	47.29	68.20	-20.91	Peak


1-7GHz_Vertical_11AX40_5755

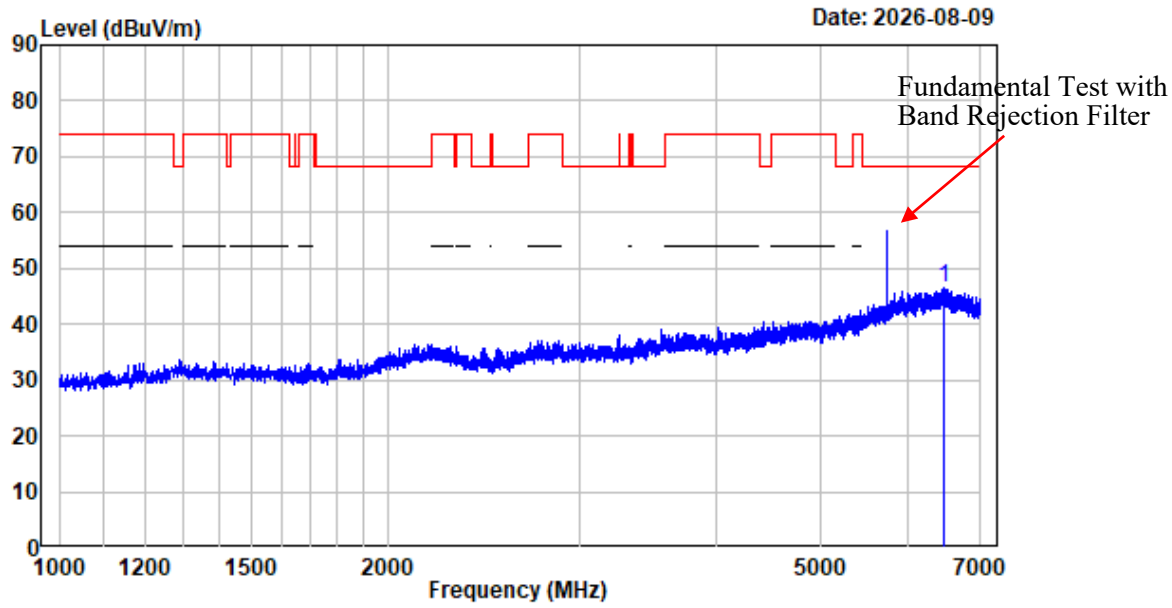

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6482.500	-1.83	48.44	46.61	68.20	-21.59	Peak


7-18GHz_Horizontal_Peak_11AX40_5755

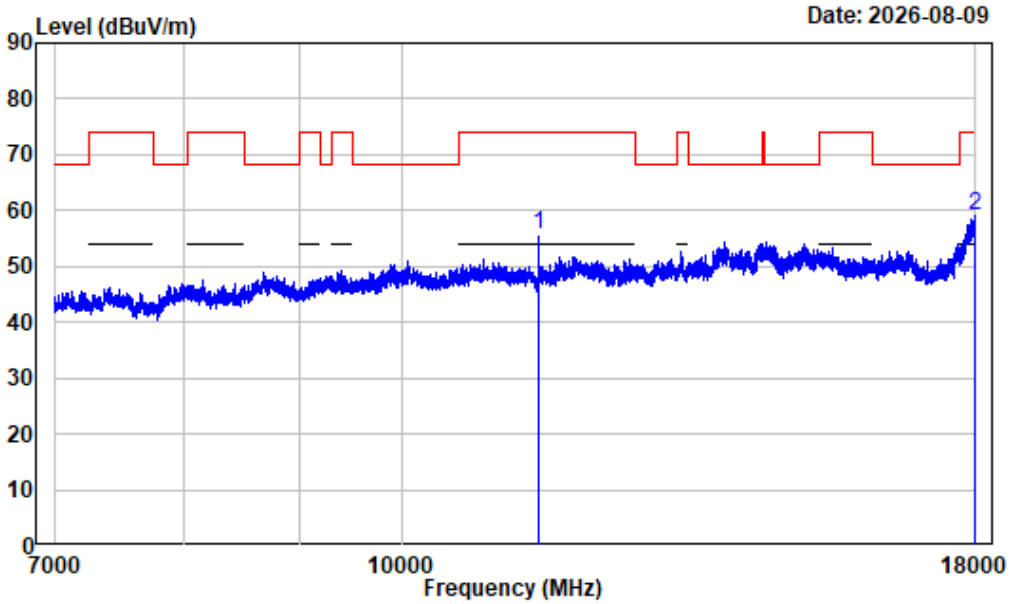

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	53.42	55.83	74.00	-18.17	Peak
2	17989.000	10.60	48.64	59.24	74.00	-14.76	Peak


7-18GHz_Horizontal_Average_11AX40_5755

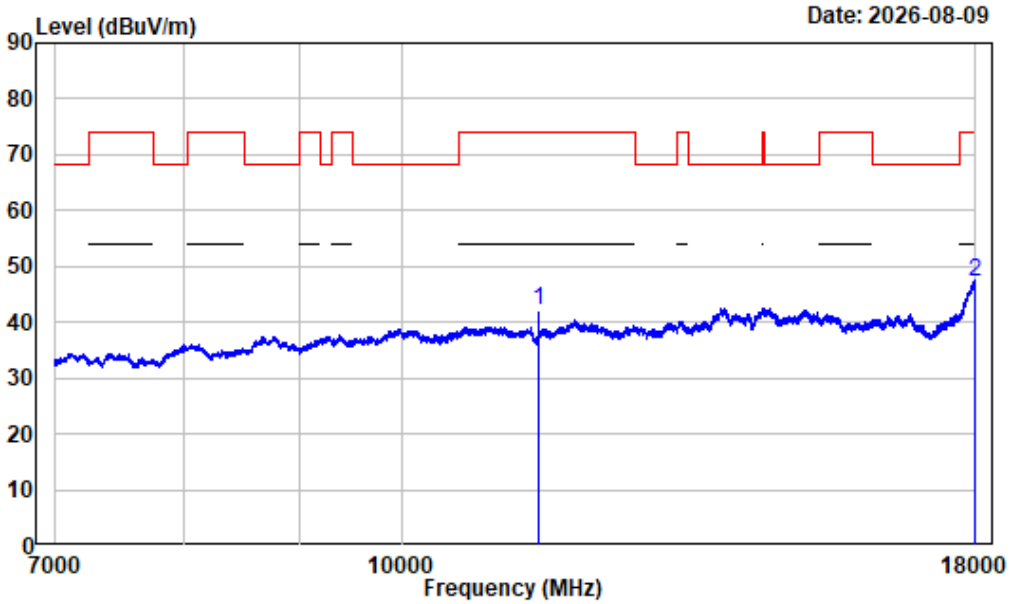

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	39.63	42.04	54.00	-11.96	Average
2	17998.630	10.78	36.36	47.14	54.00	-6.86	Average


7-18GHz_Vertical_Peak_11AX40_5755

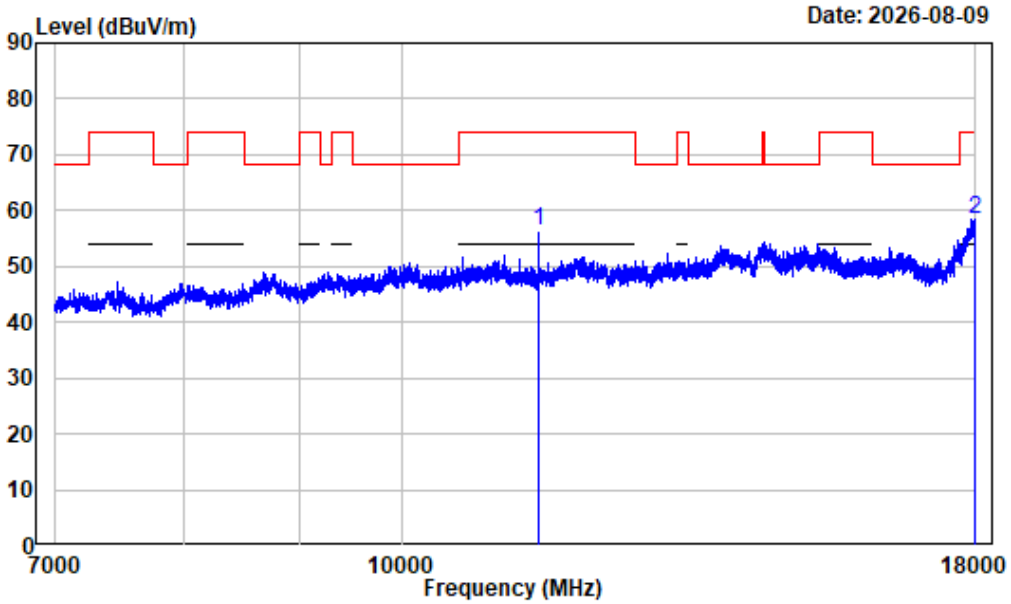

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	53.95	56.36	74.00	-17.64	Peak
2	17979.380	10.43	48.13	58.56	74.00	-15.44	Peak


7-18GHz_Vertical_Average_11AX40_5755

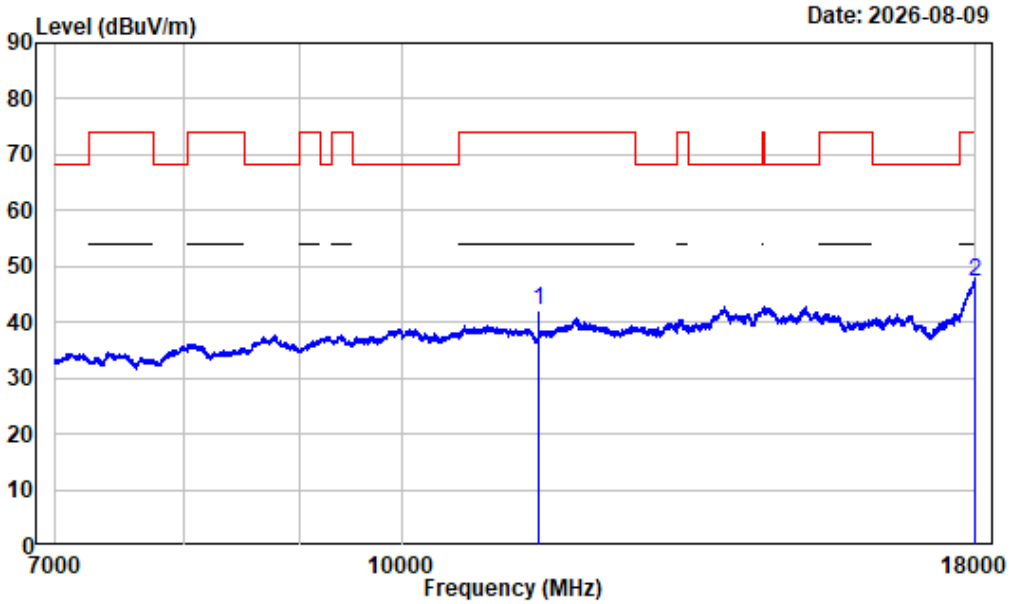

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	2.41	39.86	42.27	54.00	-11.73	Average
2	17997.250	10.75	36.40	47.15	54.00	-6.85	Average


1-7GHz_Horizontal_11AX80_5775

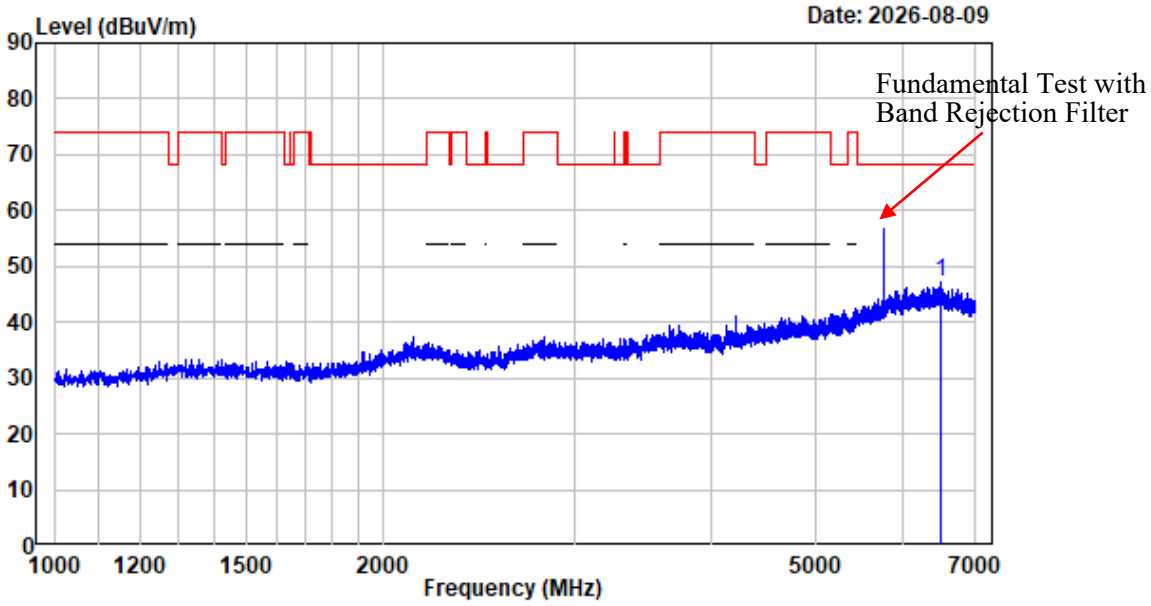

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6516.250	-1.72	48.92	47.20	68.20	-21.00	Peak


1-7GHz_Vertical_11AX80_5775

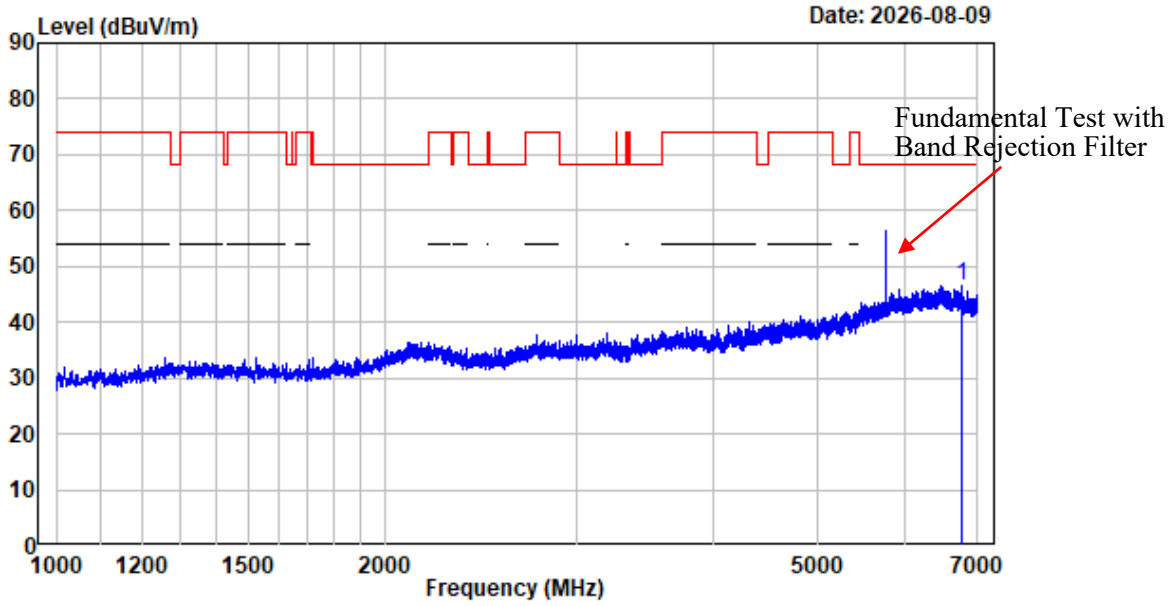

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6773.500	-2.52	48.95	46.43	68.20	-21.77	Peak


7-18GHz_Horizontal_Peak_11AX80_5775

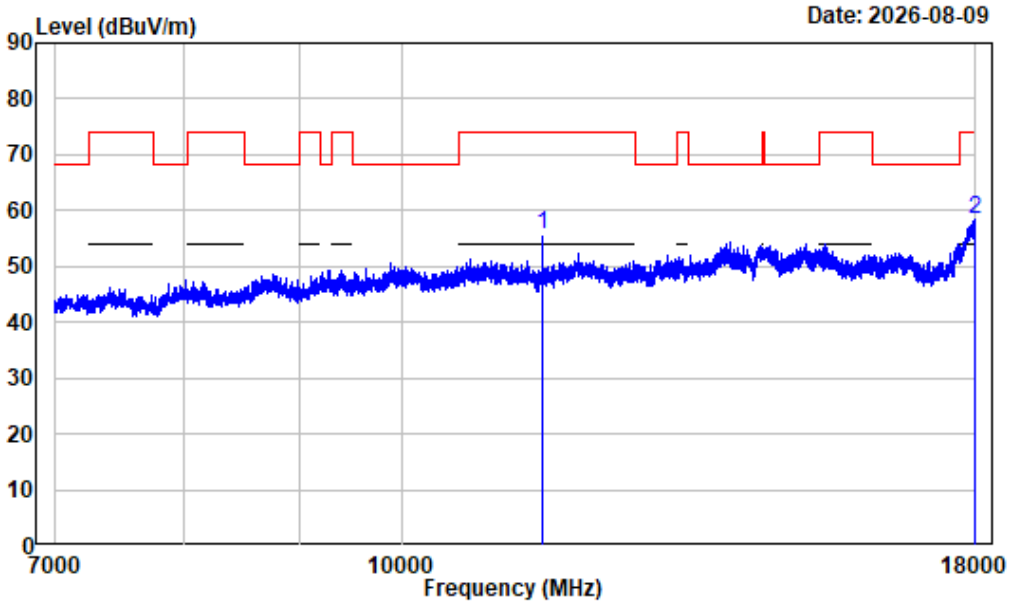

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	53.15	55.79	74.00	-18.21	Peak
2	17983.500	10.50	47.99	58.49	74.00	-15.51	Peak


7-18GHz_Horizontal_Average_11AX80_5775

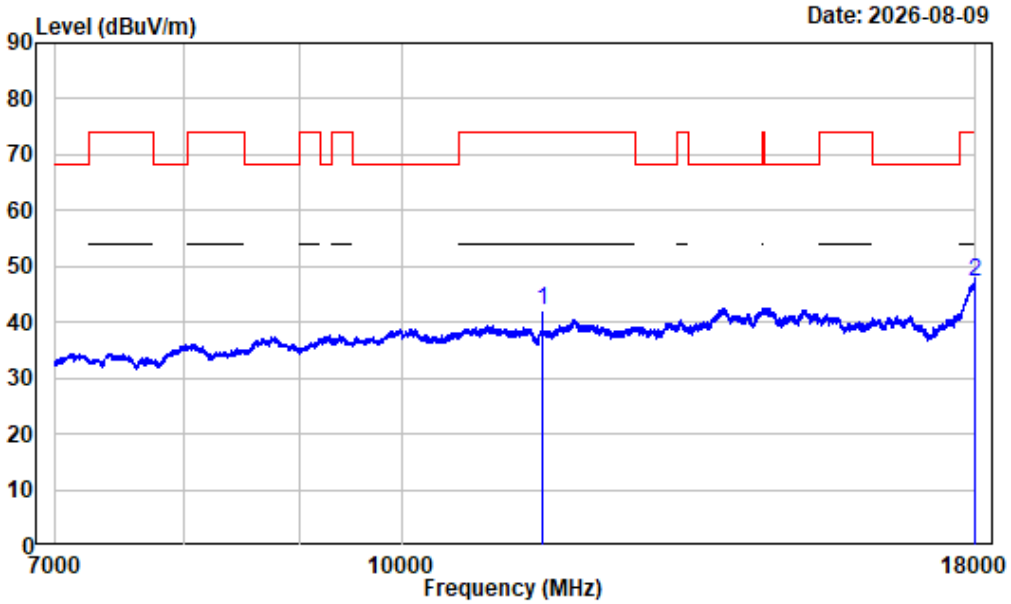

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	39.34	41.98	54.00	-12.02	Average
2	17993.130	10.68	36.44	47.12	54.00	-6.88	Average


7-18GHz_Vertical_Peak_11AX80_5775

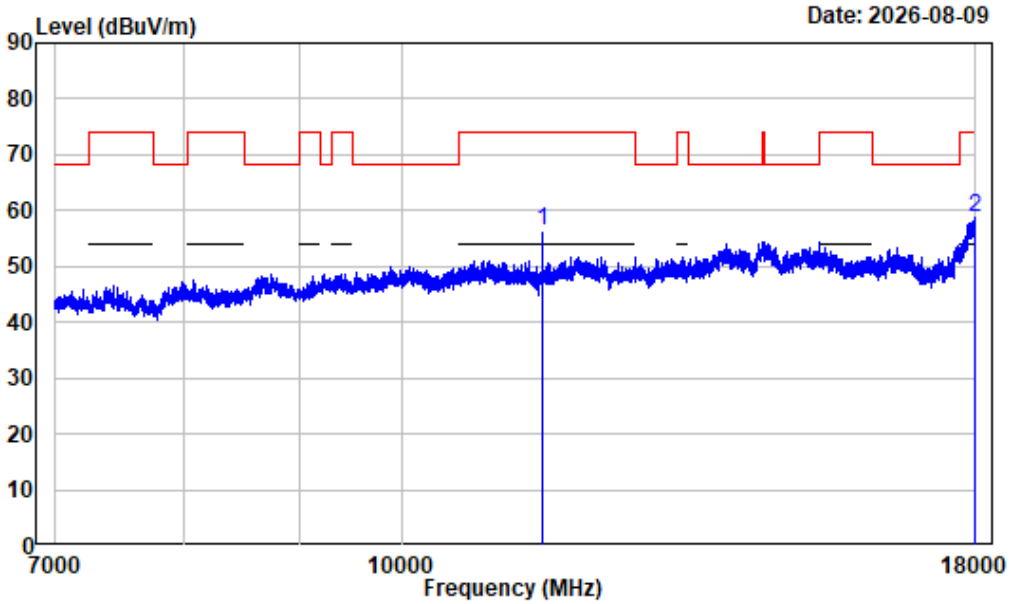

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	53.69	56.33	74.00	-17.67	Peak
2	17976.630	10.38	48.49	58.87	74.00	-15.13	Peak

7-18GHz_Vertical_Average_11AX80_5775

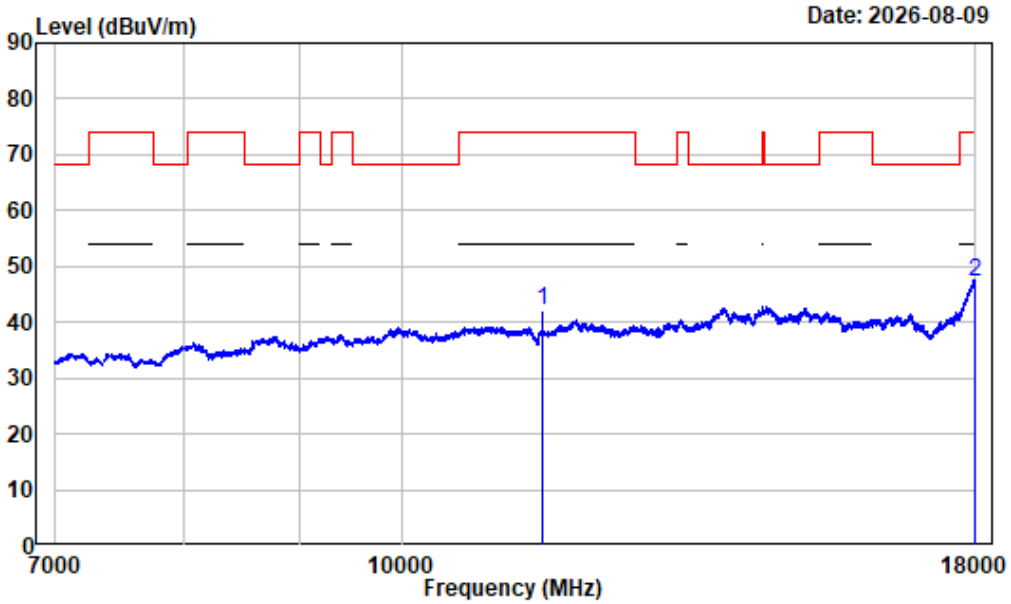


Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	2.64	39.58	42.22	54.00	-11.78	Average
2	17991.750	10.65	36.49	47.14	54.00	-6.86	Average

18-40GHz (Only Listed with the worst harmonic margin test plot)


18-40GHz_Horizontal_11A_5500

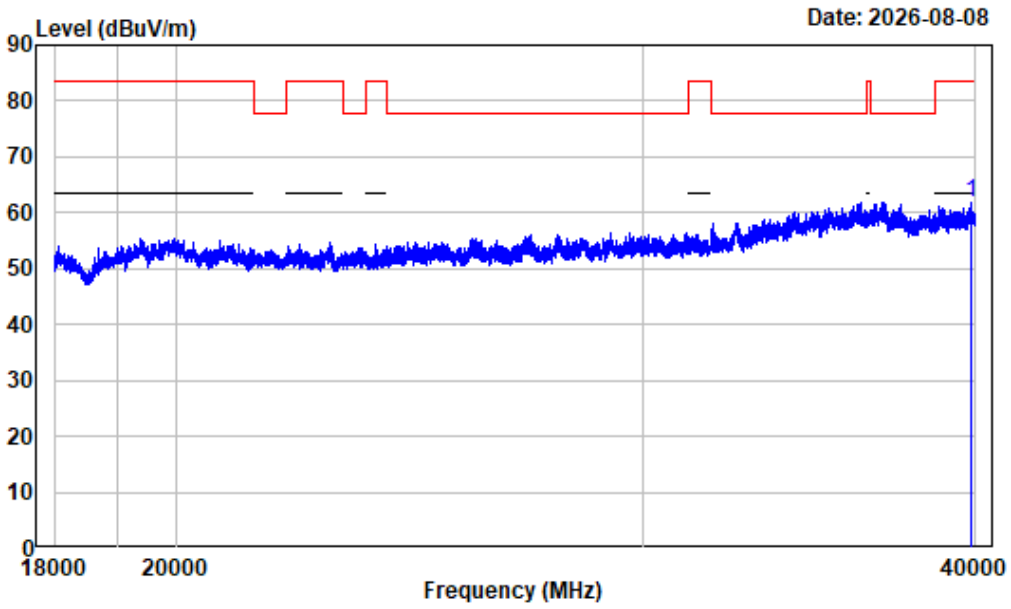

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39824.000	23.81	38.12	61.93	83.50	-21.57	Peak

18-40GHz_Vertical_11A_5500

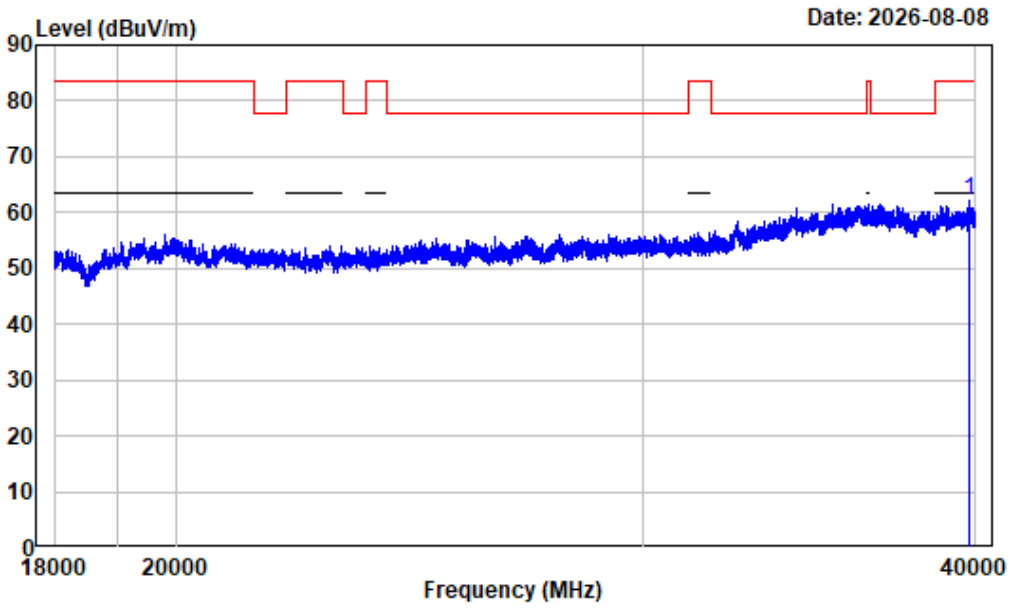


Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39793.750	23.82	38.36	62.18	83.50	-21.32	Peak

Band Edge


Left Band edge Horizontal Peak 802.11a 5180MHz

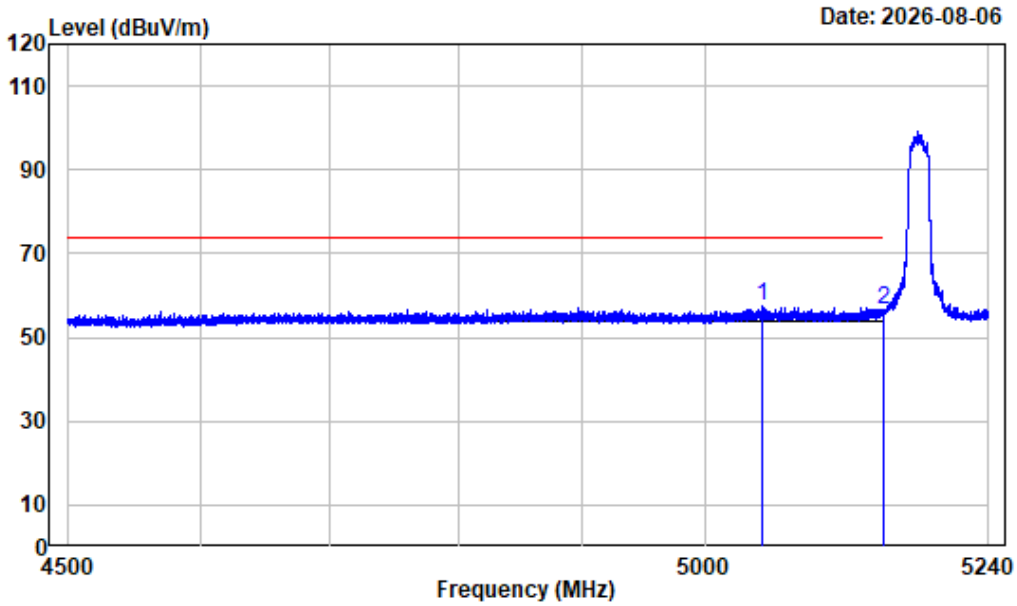

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5048.340	-8.00	65.32	57.32	74.00	-16.68	Peak
2	5150.000	-7.96	64.45	56.49	74.00	-17.51	Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz

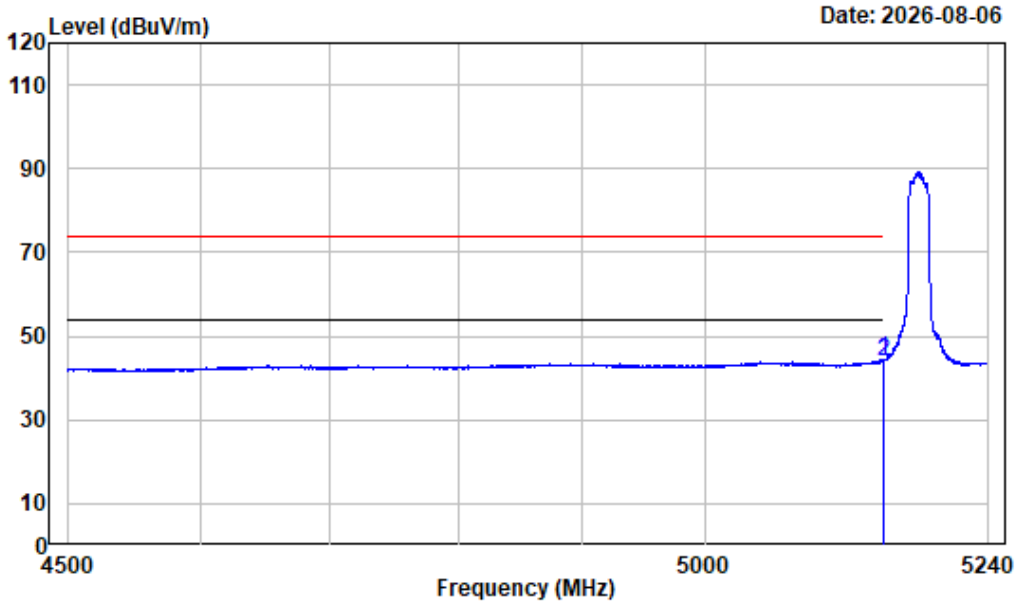

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.535	-7.96	52.55	44.59	54.00	-9.41	Average
2	5150.000	-7.96	52.03	44.07	54.00	-9.93	Average


Left Band edge_Vertical_Peak_802.11a_5180MHz

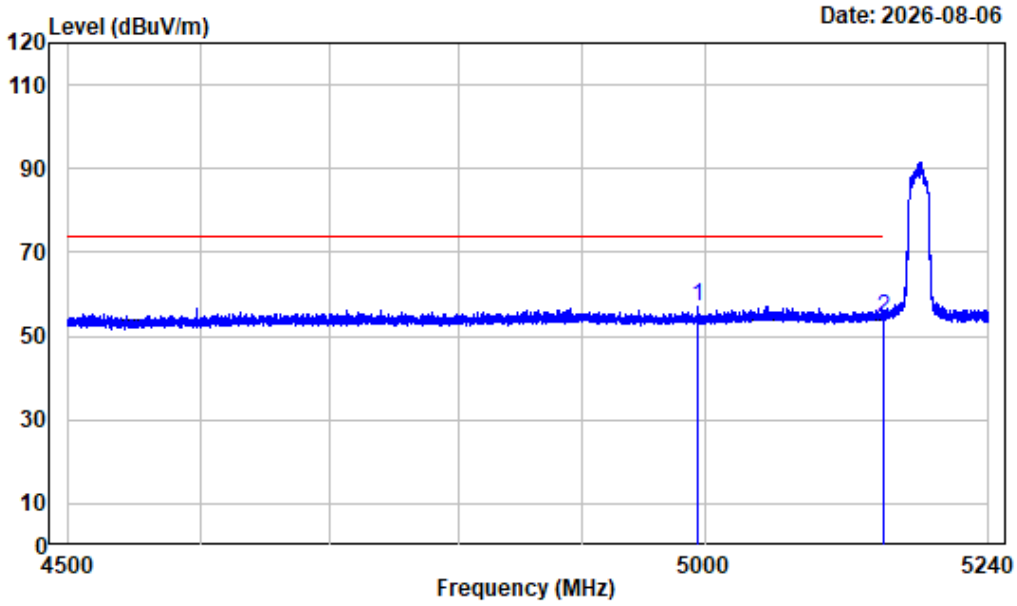

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4993.487	-8.58	65.59	57.01	74.00	-16.99	Peak
2	5150.000	-7.96	62.41	54.45	74.00	-19.55	Peak


Left Band edge_Vertical_Average_802.11a_5180MHz

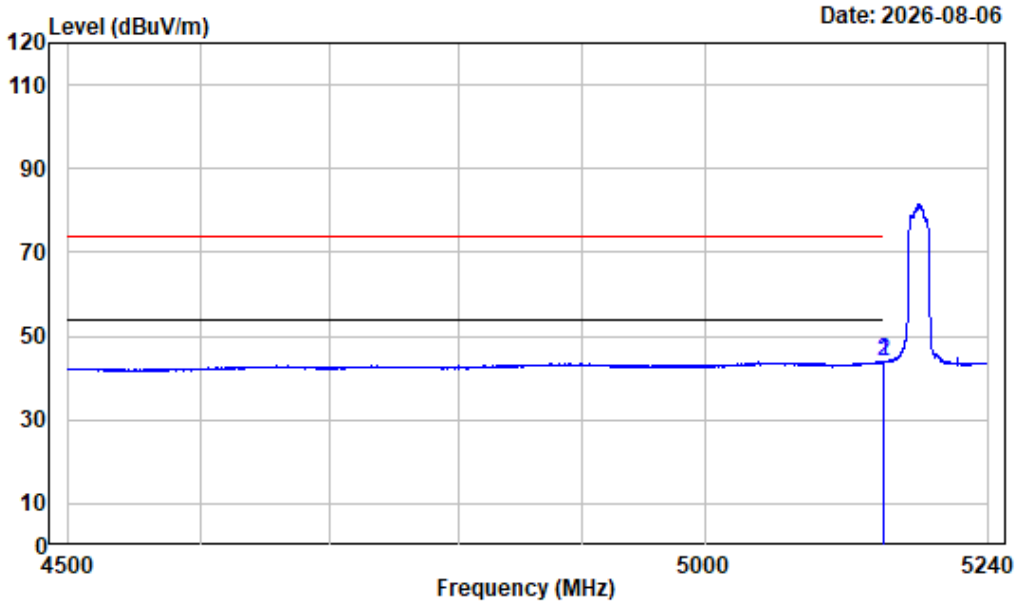

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.535	-7.96	51.95	43.99	54.00	-10.01	Average
2	5150.000	-7.96	51.74	43.78	54.00	-10.22	Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz

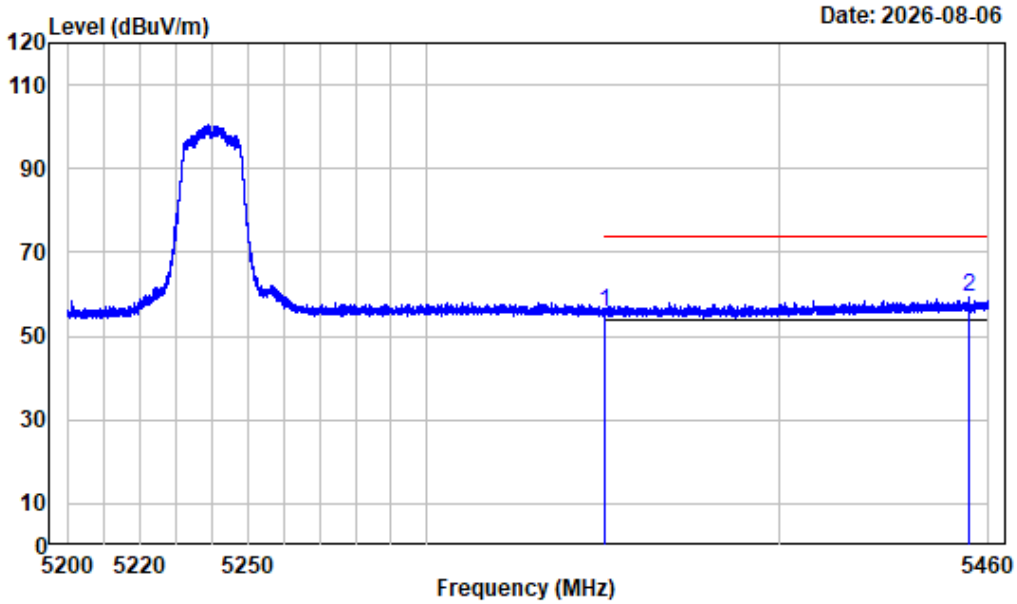

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.26	55.60	74.00	-18.40	Peak
2	5454.475	-6.85	66.08	59.23	74.00	-14.77	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz

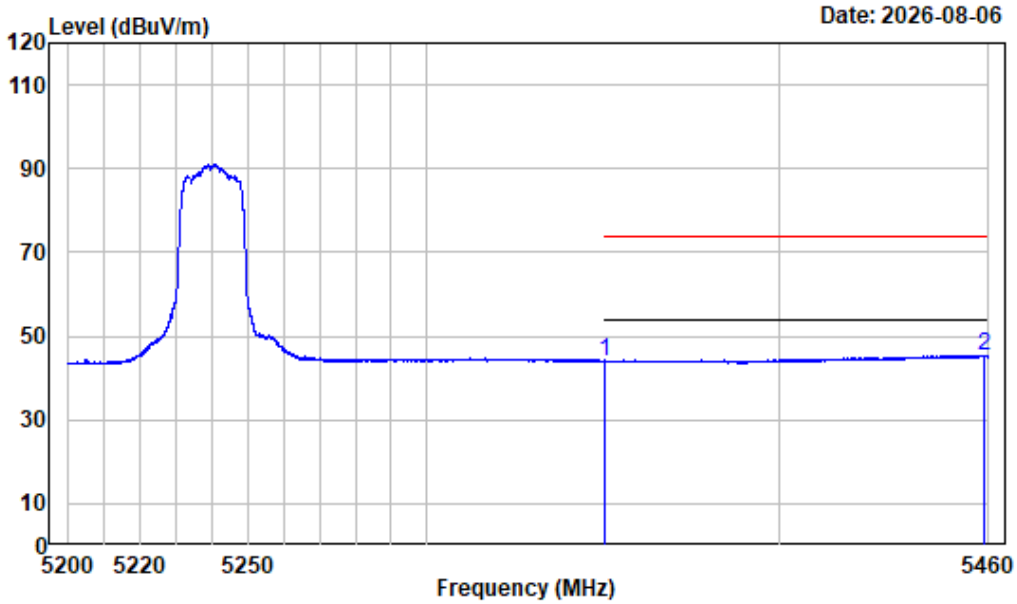

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.66	44.00	54.00	-10.00	Average
2	5458.895	-6.85	52.23	45.38	54.00	-8.62	Average


Right Band edge_Vertical_Peak_802.11a_5240MHz

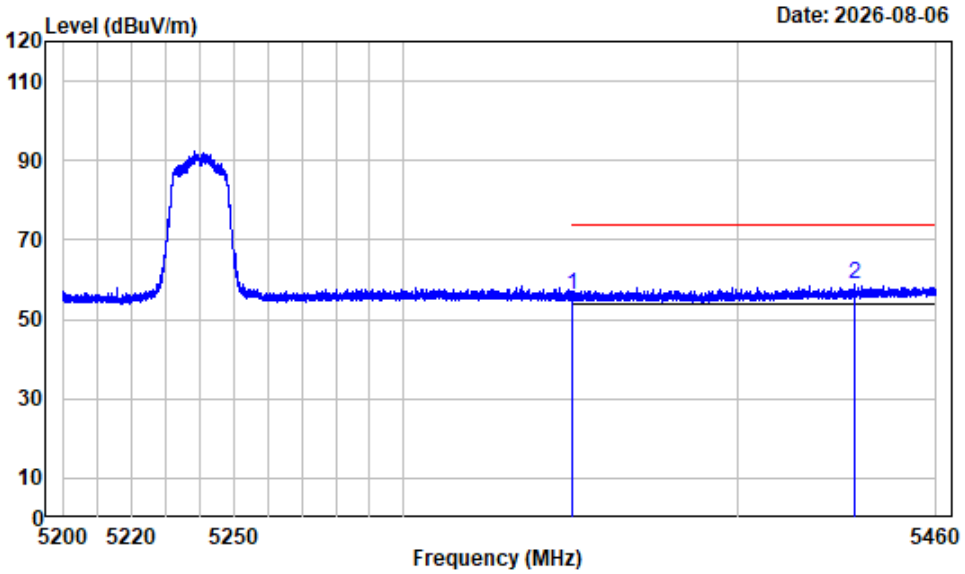

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.92	56.26	74.00	-17.74	Peak
2	5435.040	-7.05	65.85	58.80	74.00	-15.20	Peak


Right Band edge_Vertical_Average_802.11a_5240MHz

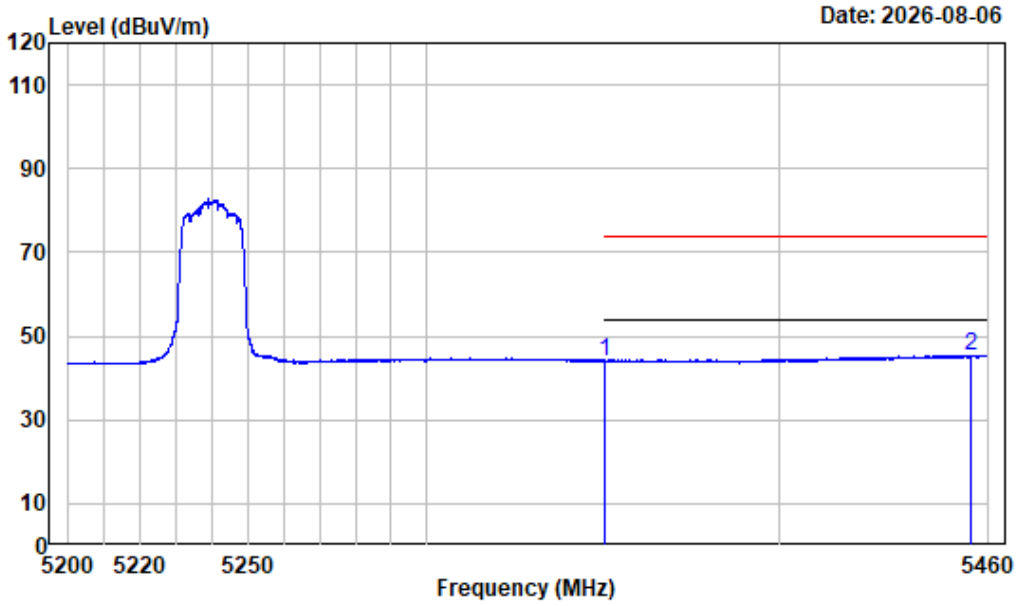

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.66	44.00	54.00	-10.00	Average
2	5454.800	-6.85	52.26	45.41	54.00	-8.59	Average


Left Band edge_Horizontal_Peak_802.11ac-vht20_5180MHz

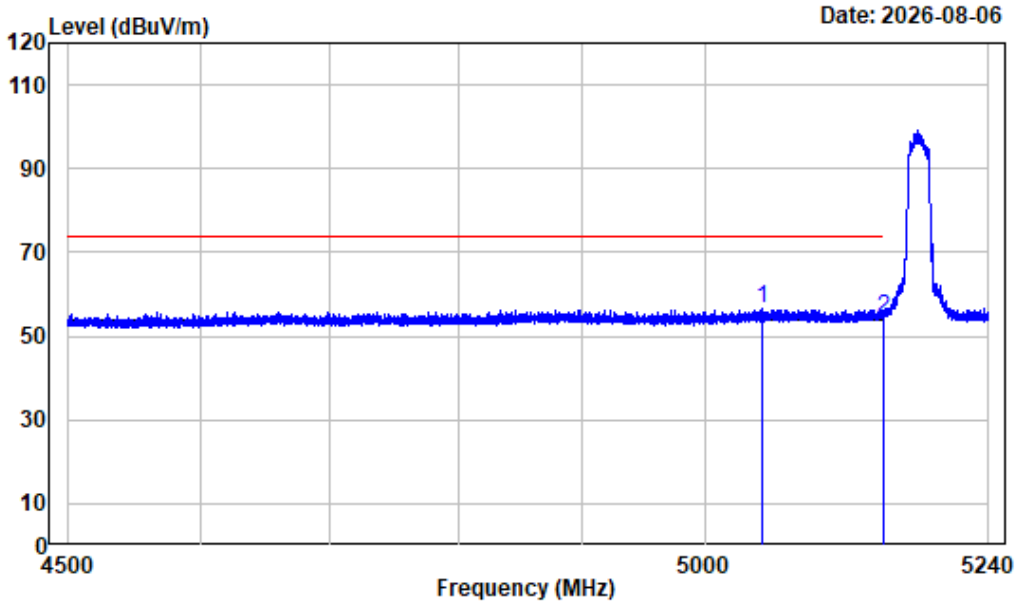

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5047.877	-8.01	64.73	56.72	74.00	-17.28	Peak
2	5150.000	-7.96	62.47	54.51	74.00	-19.49	Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5180MHz

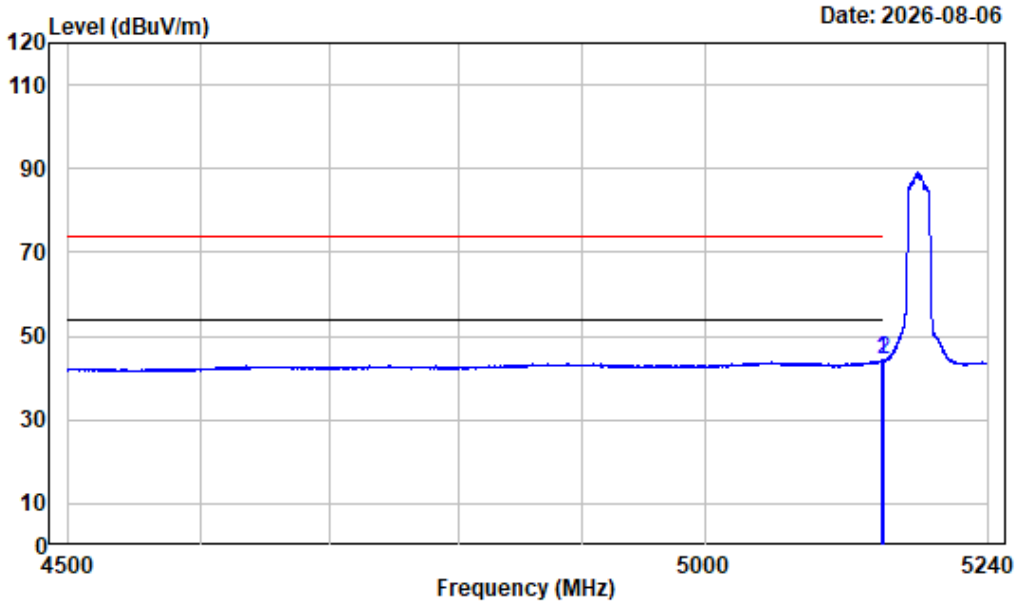

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.240	-7.97	52.26	44.29	54.00	-9.71	Average
2	5150.000	-7.96	52.13	44.17	54.00	-9.83	Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5180MHz

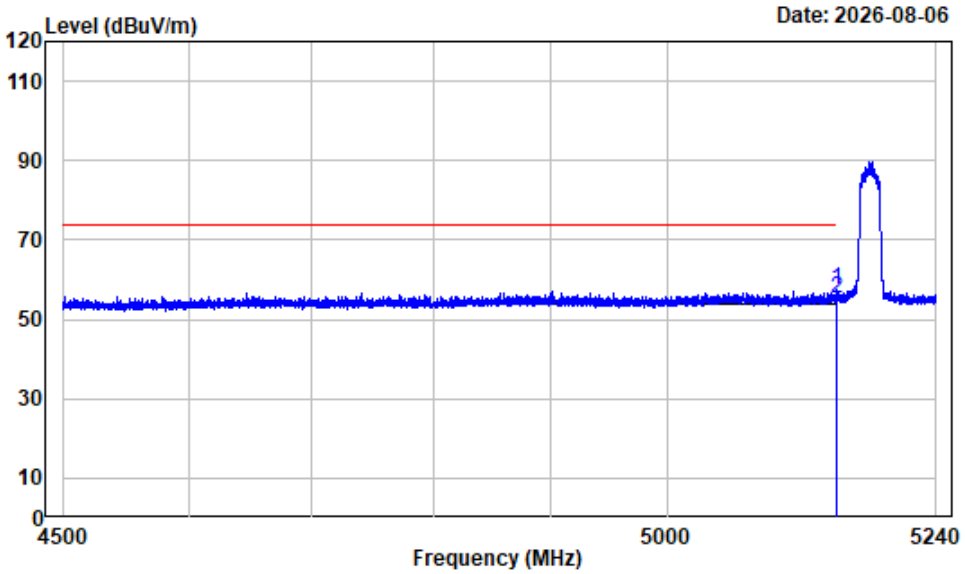

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.905	-7.96	65.52	57.56	74.00	-16.44	Peak
2	5150.000	-7.96	63.40	55.44	74.00	-18.56	Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5180MHz

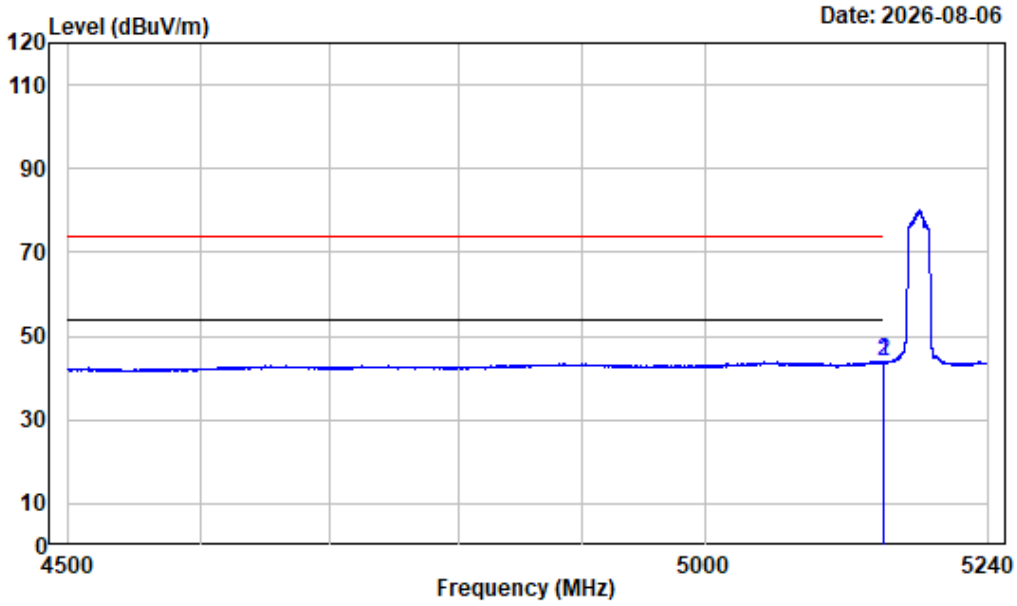

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.627	-7.96	51.97	44.01	54.00	-9.99	Average
2	5150.000	-7.96	51.66	43.70	54.00	-10.30	Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5240MHz

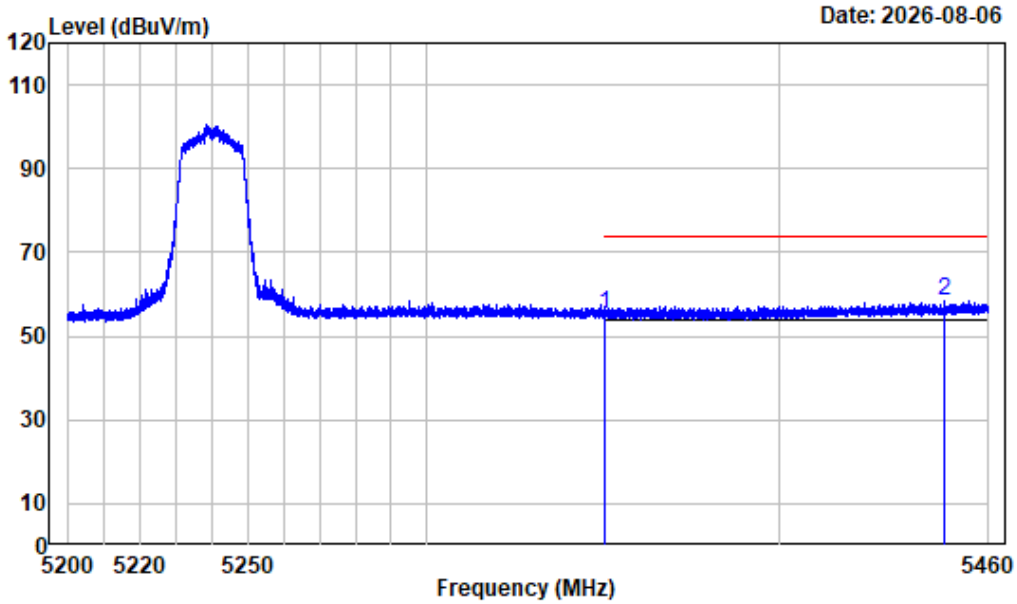

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.86	55.20	74.00	-18.80	Peak
2	5447.228	-6.89	65.22	58.33	74.00	-15.67	Peak


Right Band edge_Horizontal_Average_802.11ac-vht20_5240MHz

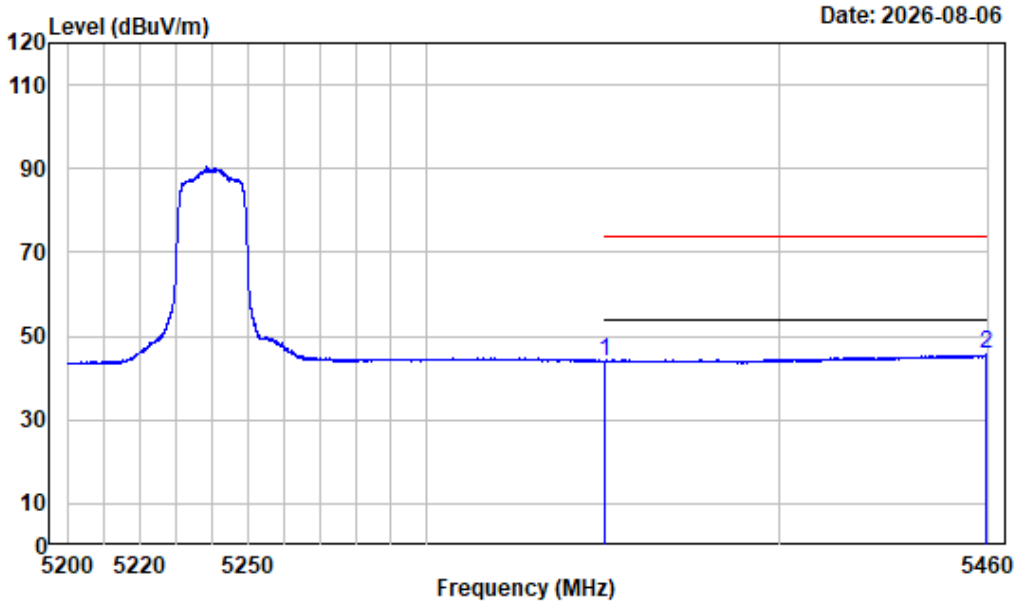

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.55	43.89	54.00	-10.11	Average
2	5459.123	-6.84	52.47	45.63	54.00	-8.37	Average


Right Band edge_Vertical_Peak_802.11ac-vht20_5240MHz

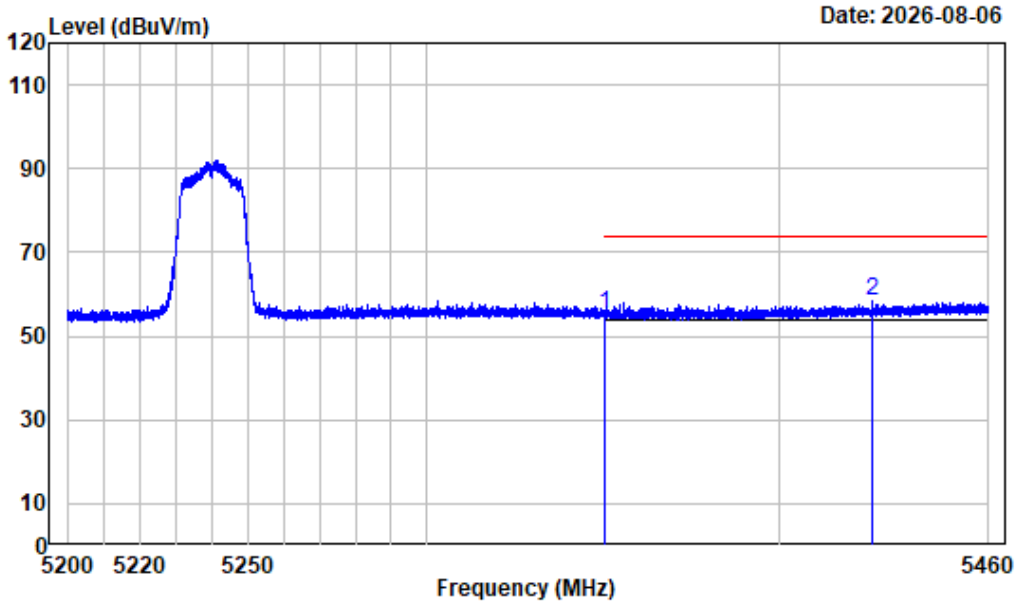

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.04	55.38	74.00	-18.62	Peak
2	5426.362	-7.15	65.38	58.23	74.00	-15.77	Peak


Right Band edge_Vertical_Average_802.11ac-vht20_5240MHz

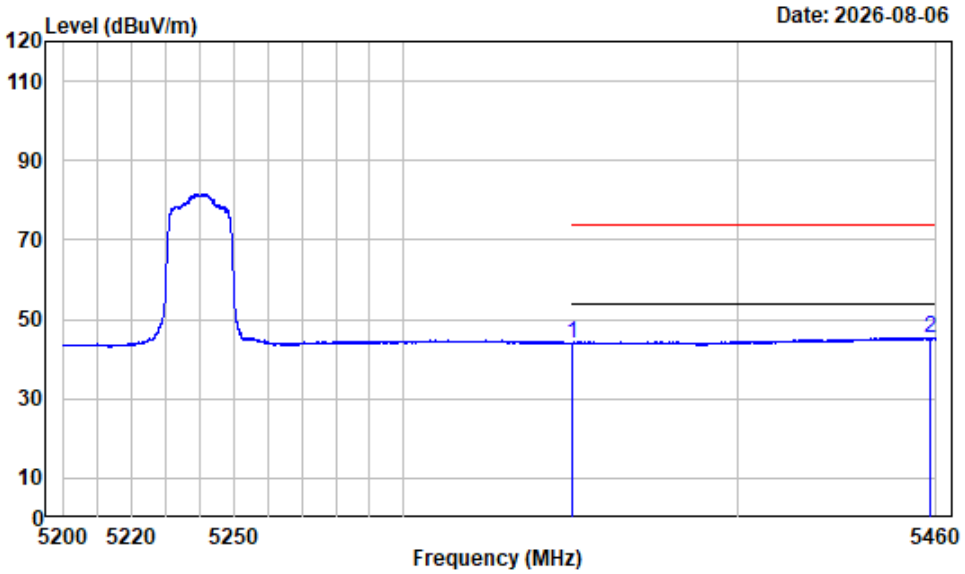

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.59	43.93	54.00	-10.07	Average
2	5457.953	-6.85	52.26	45.41	54.00	-8.59	Average


Left Band edge_Horizontal_Peak_802.11ac-vht40_5190MHz

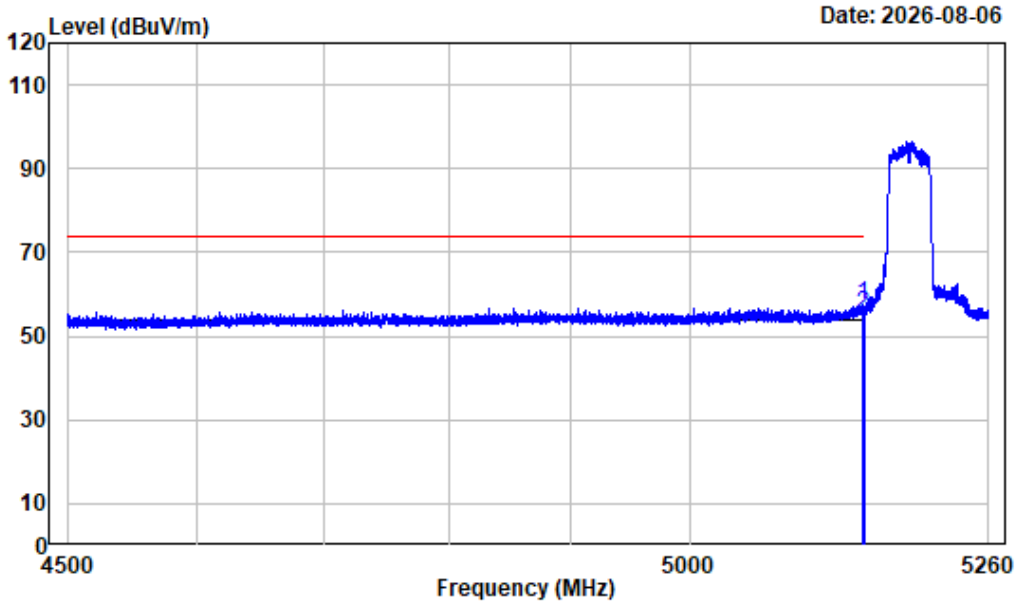

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.610	-7.96	65.67	57.71	74.00	-16.29	Peak
2	5150.000	-7.96	63.29	55.33	74.00	-18.67	Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5190MHz

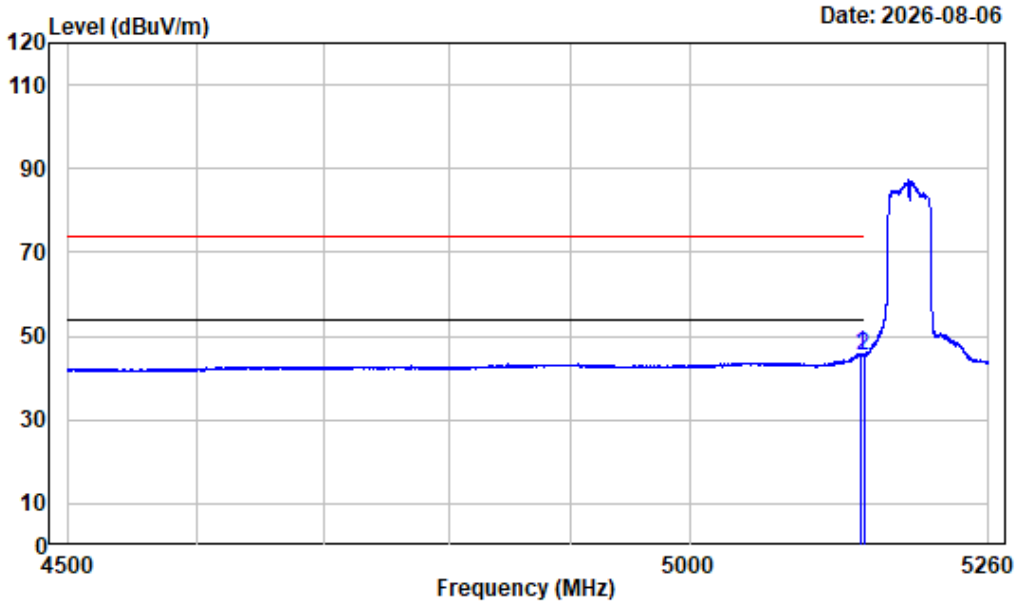

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.950	-7.97	53.70	45.73	54.00	-8.27	Average
2	5150.000	-7.96	53.22	45.26	54.00	-8.74	Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5190MHz

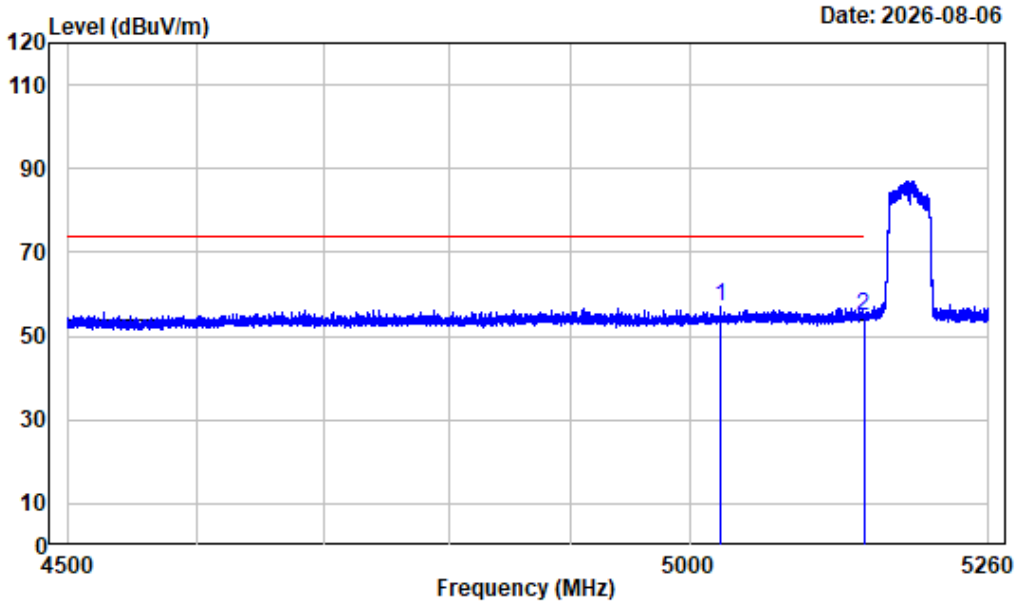

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5026.870	-8.25	65.39	57.14	74.00	-16.86	Peak
2	5150.000	-7.96	62.59	54.63	74.00	-19.37	Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5190MHz

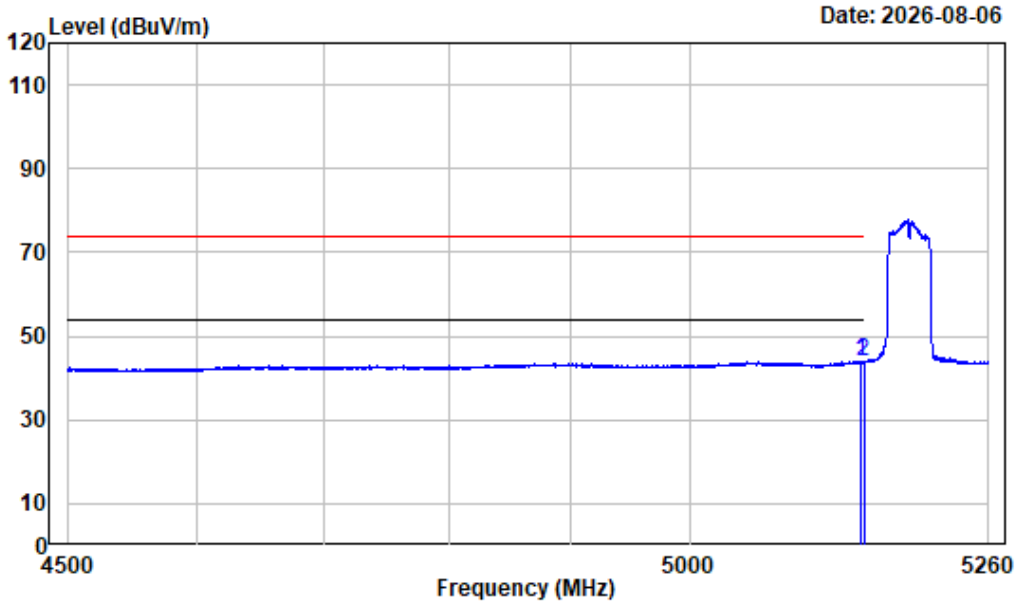

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.520	-7.97	52.03	44.06	54.00	-9.94	Average
2	5150.000	-7.96	51.94	43.98	54.00	-10.02	Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5230MHz

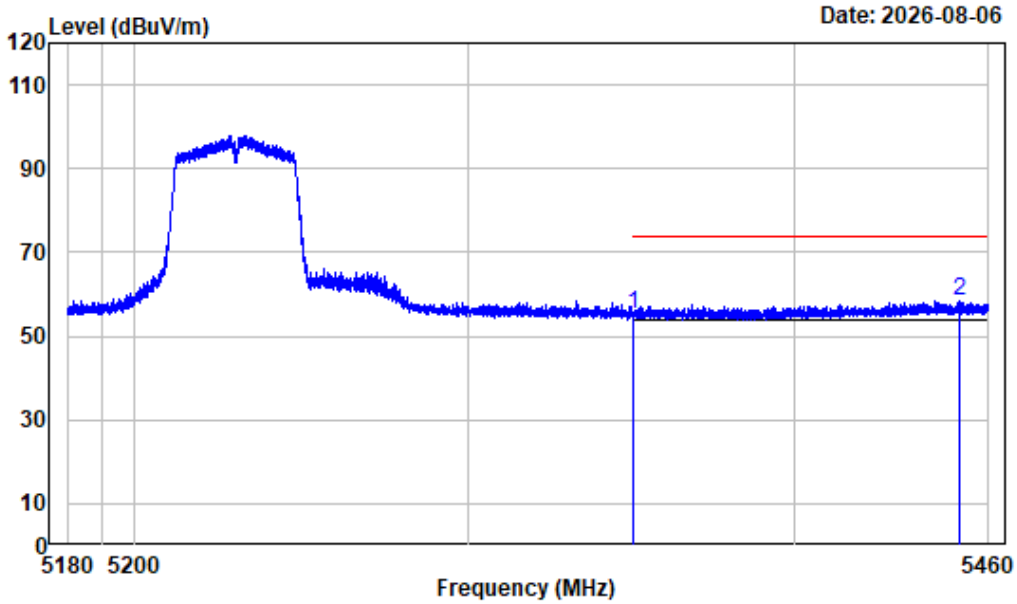

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.83	55.17	74.00	-18.83	Peak
2	5451.040	-6.86	65.24	58.38	74.00	-15.62	Peak


Right Band edge_Horizontal_Average_802.11ac-vht40_5230MHz

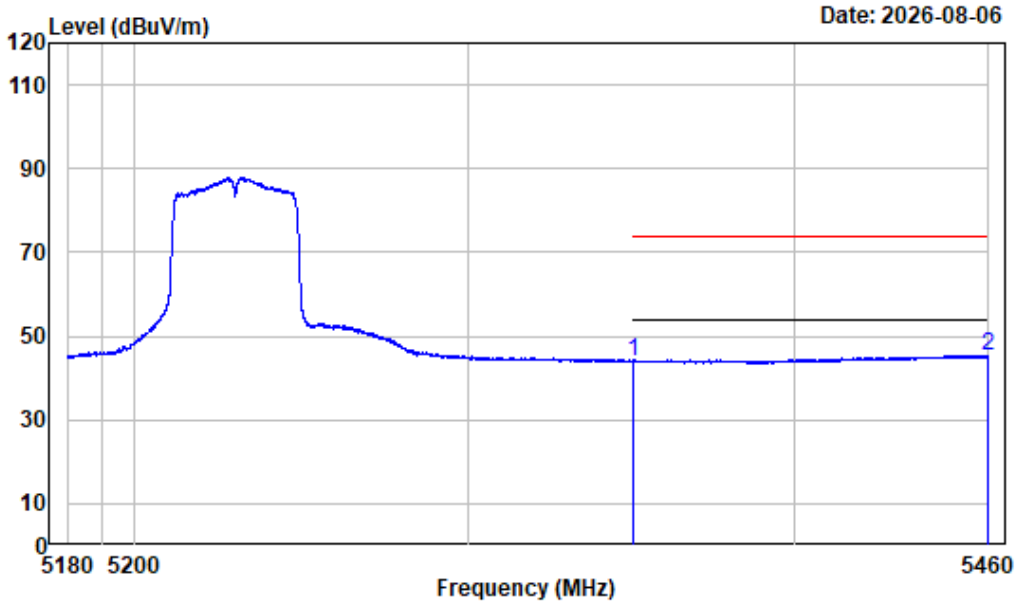

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.52	43.86	54.00	-10.14	Average
2	5459.580	-6.84	52.22	45.38	54.00	-8.62	Average


Right Band edge_Vertical_Peak_802.11ac-vht40_5230MHz

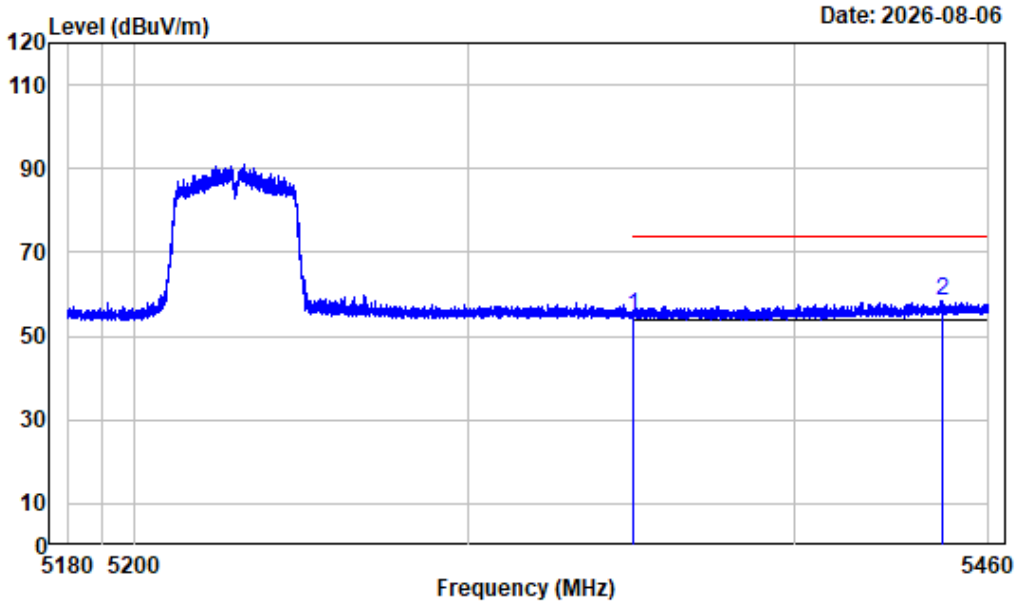

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.60	54.94	74.00	-19.06	Peak
2	5445.930	-6.90	65.15	58.25	74.00	-15.75	Peak


Right Band edge_Vertical_Average_802.11ac-vht40_5230MHz

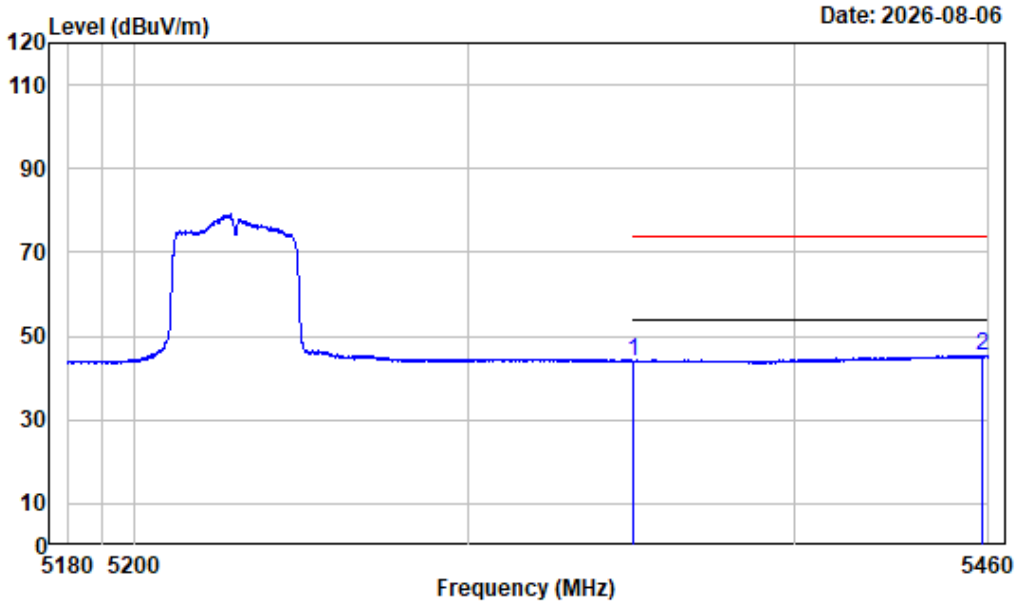

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.47	43.81	54.00	-10.19	Average
2	5457.900	-6.85	52.24	45.39	54.00	-8.61	Average


Left Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

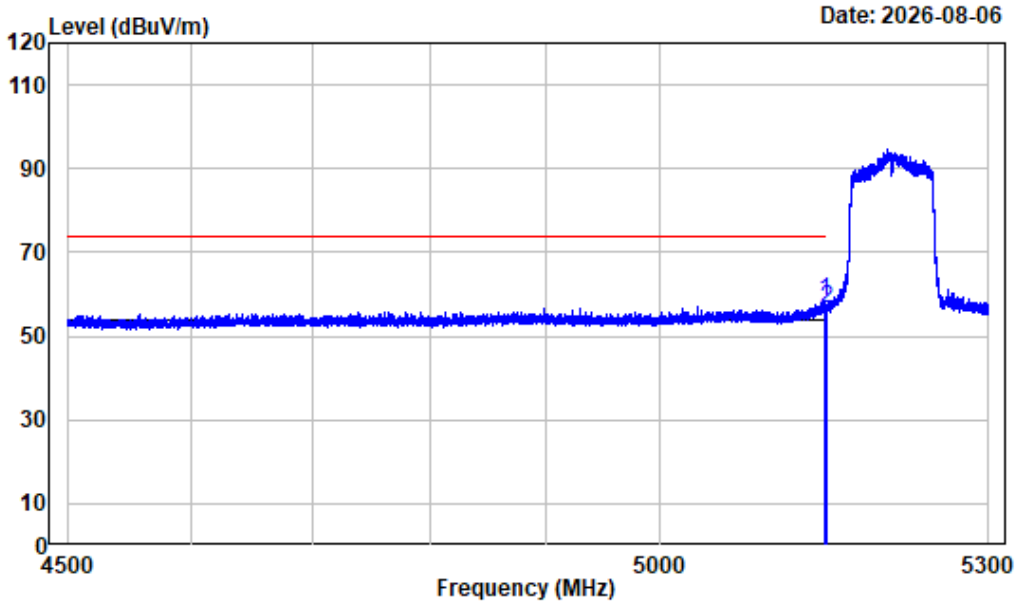

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.900	-7.97	66.33	58.36	74.00	-15.64	Peak
2	5150.000	-7.96	64.57	56.61	74.00	-17.39	Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

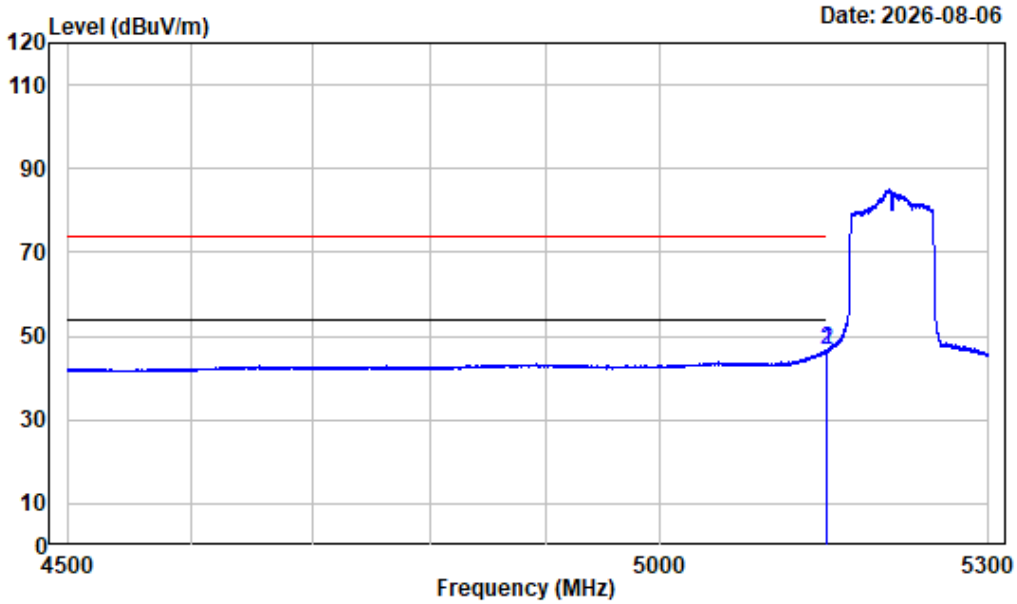

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.992	-7.96	54.55	46.59	54.00	-7.41	Average
2	5150.000	-7.96	54.50	46.54	54.00	-7.46	Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

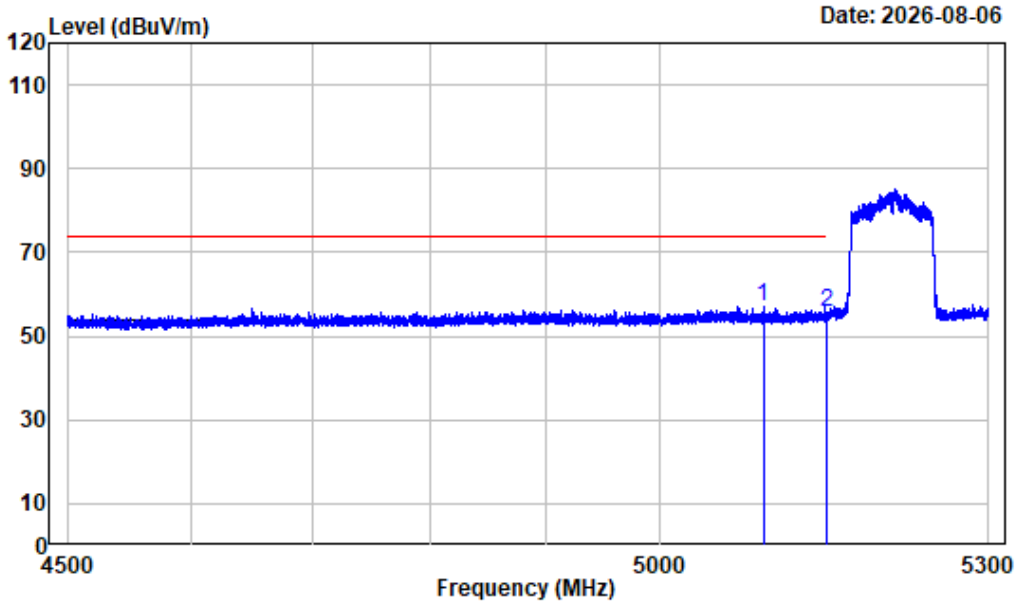

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5092.100	-8.15	65.37	57.22	74.00	-16.78	Peak
2	5150.000	-7.96	63.76	55.80	74.00	-18.20	Peak


Left Band edge_Vertical_Average_802.11ac_vht80 5210MHz

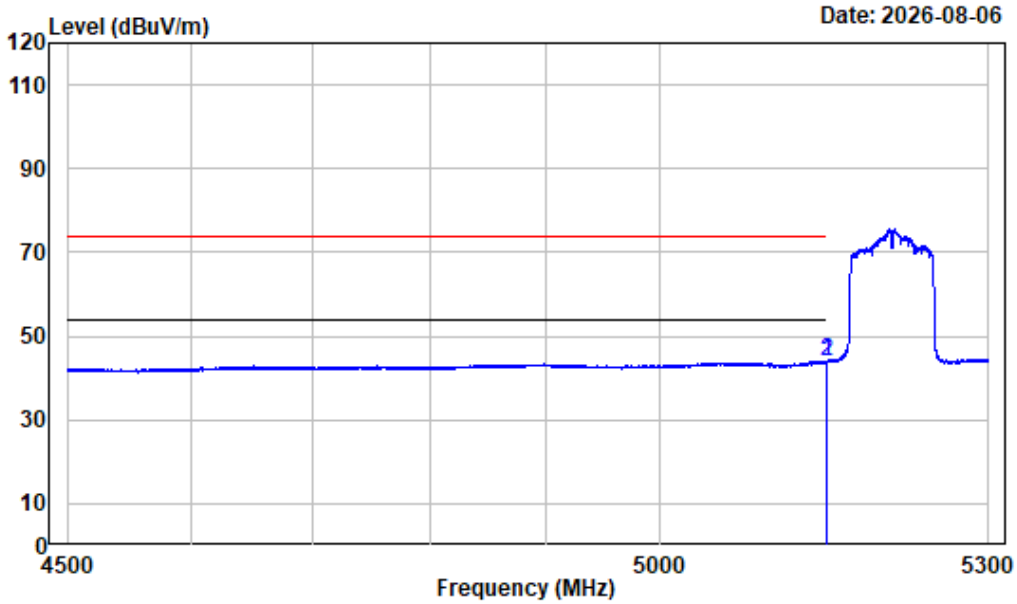

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.100	-7.96	52.11	44.15	54.00	-9.85	Average
2	5150.000	-7.96	51.75	43.79	54.00	-10.21	Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

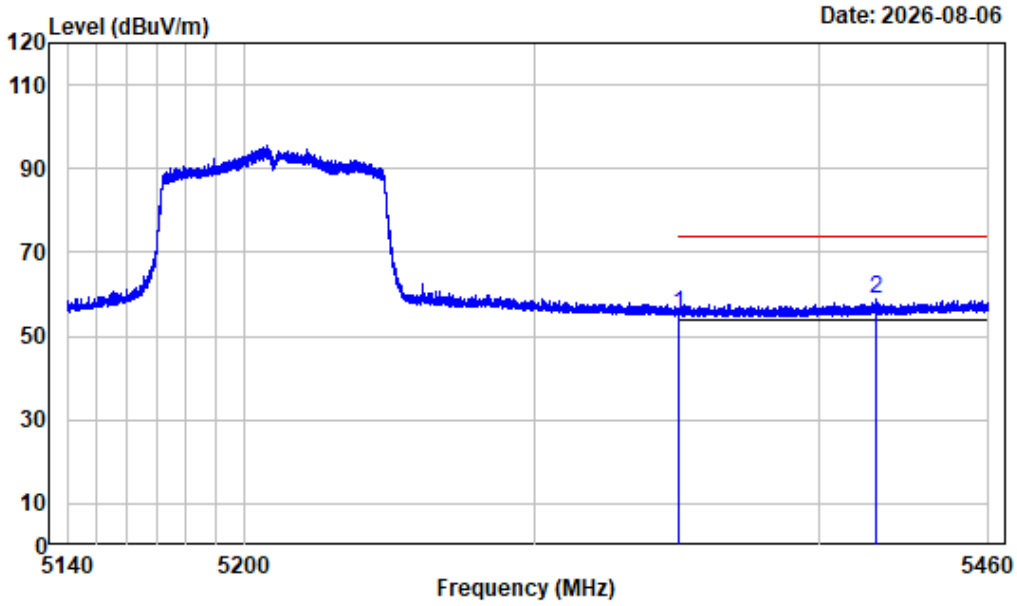

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.77	55.11	74.00	-18.89	Peak
2	5420.080	-7.24	66.19	58.95	74.00	-15.05	Peak


Right Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

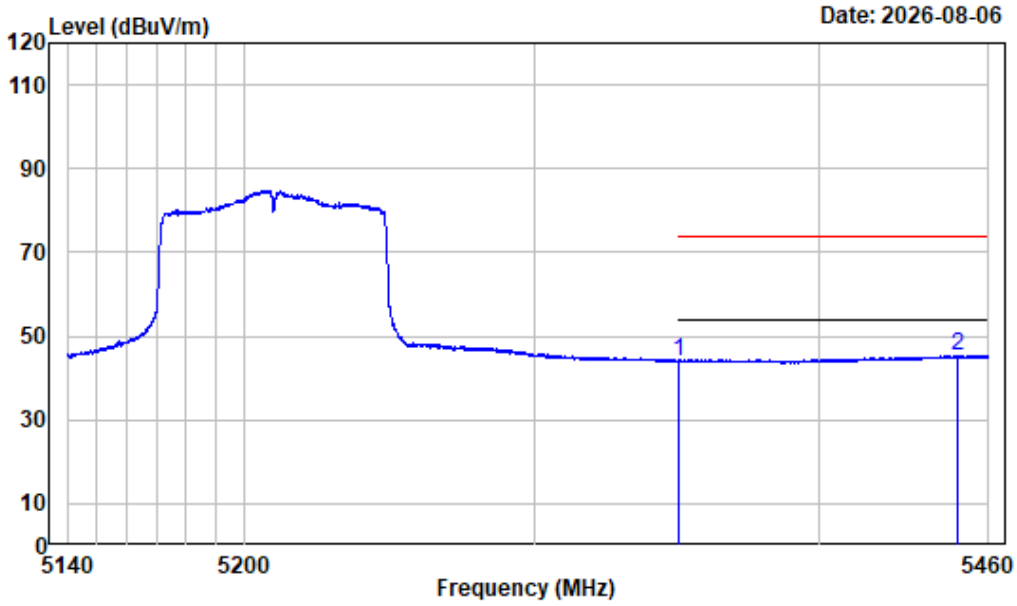

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.63	43.97	54.00	-10.03	Average
2	5448.800	-6.88	52.31	45.43	54.00	-8.57	Average


Right Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

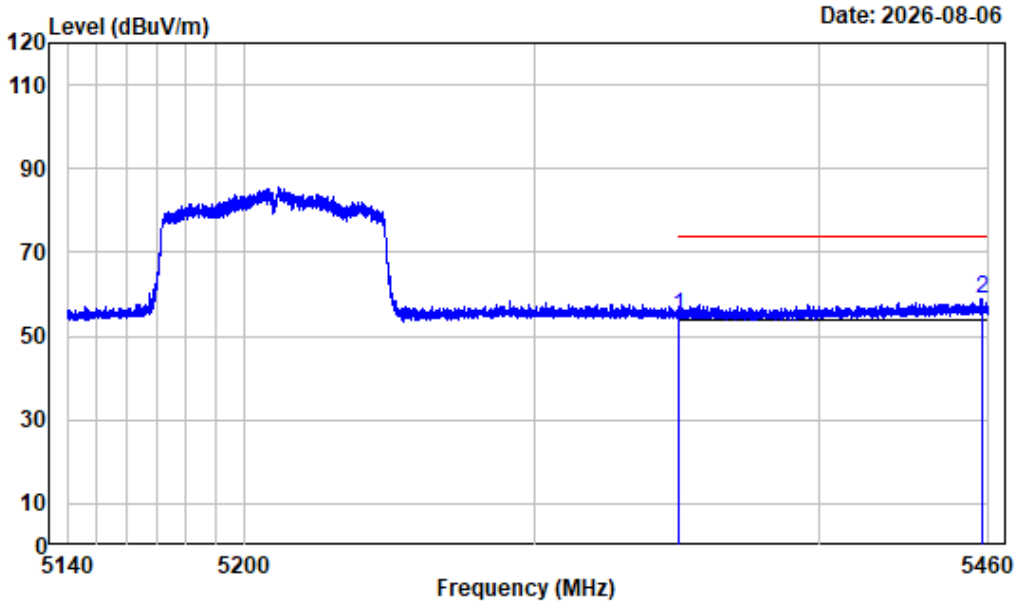

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.56	54.90	74.00	-19.10	Peak
2	5457.680	-6.85	65.68	58.83	74.00	-15.17	Peak


Right Band edge_Vertical_Average_802.11ac-vht80_5210MHz

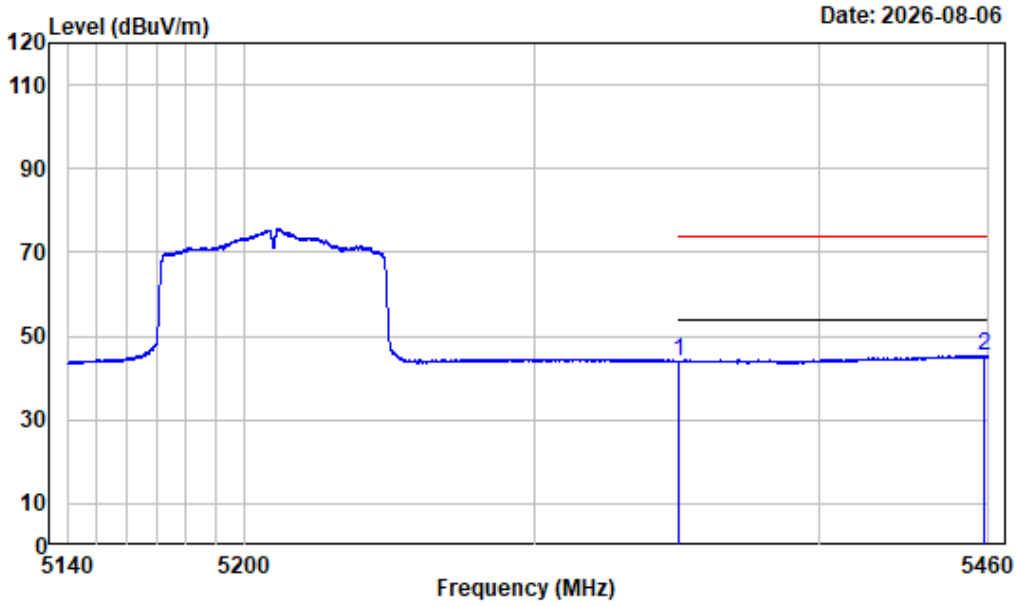

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.62	43.96	54.00	-10.04	Average
2	5458.480	-6.85	52.15	45.30	54.00	-8.70	Average


Left Band edge_Horizontal_Peak_802.11ax-hew20_5180MHz

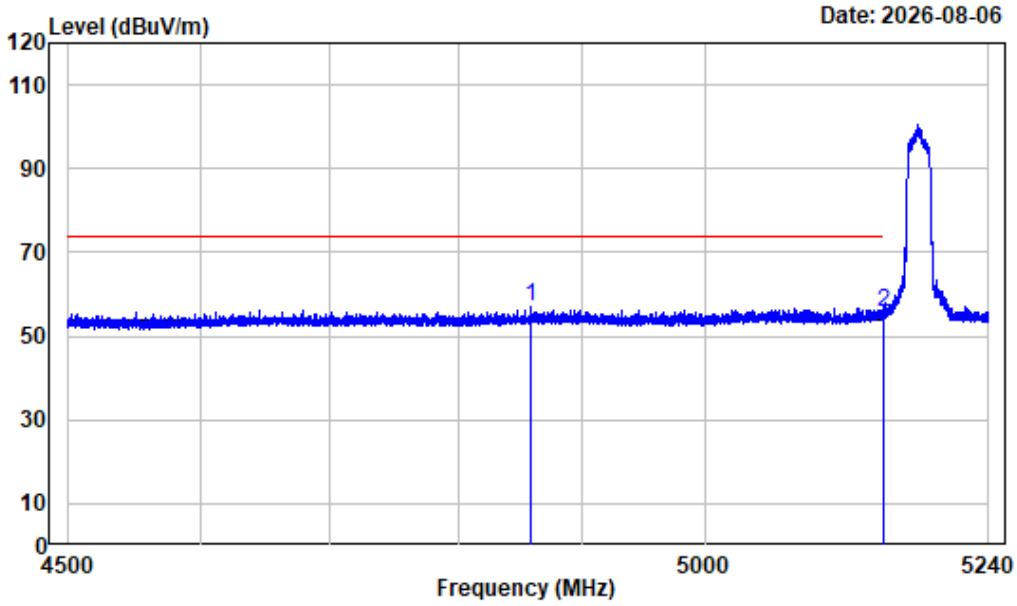

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4857.975	-8.52	65.53	57.01	74.00	-16.99	Peak
2	5150.000	-7.96	63.76	55.80	74.00	-18.20	Peak


Left Band edge_Horizontal_Average_802.11ax-hew20_5180MHz

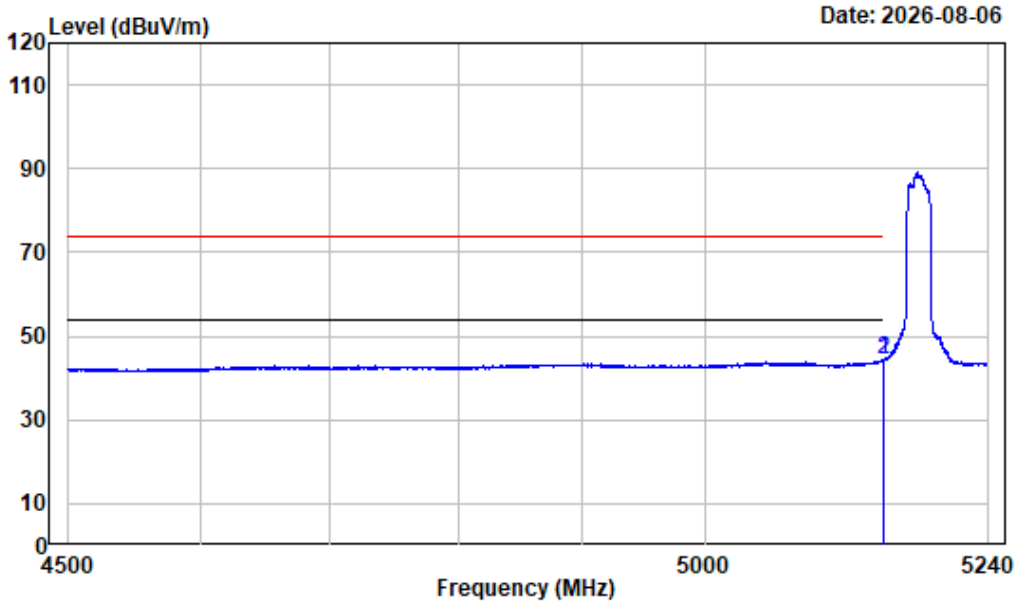

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.998	-7.96	52.42	44.46	54.00	-9.54	Average
2	5150.000	-7.96	52.36	44.40	54.00	-9.60	Average


Left Band edge_Vertical_Peak_802.11ax-hew20_5180MHz

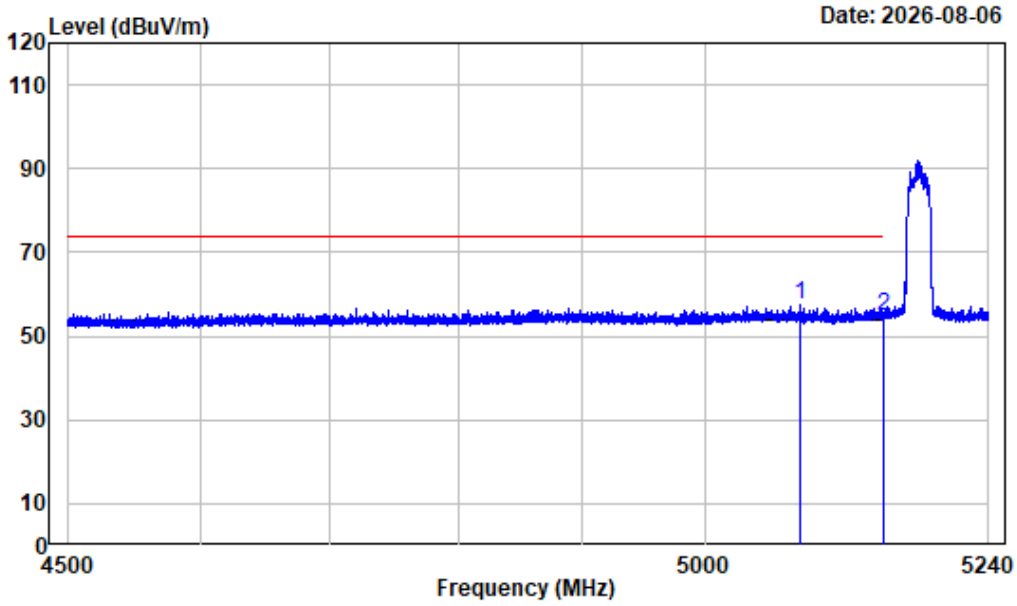

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5079.235	-8.09	65.41	57.32	74.00	-16.68	Peak
2	5150.000	-7.96	62.91	54.95	74.00	-19.05	Peak


Left Band edge_Vertical_Average_802.11ax-hew20_5180MHz

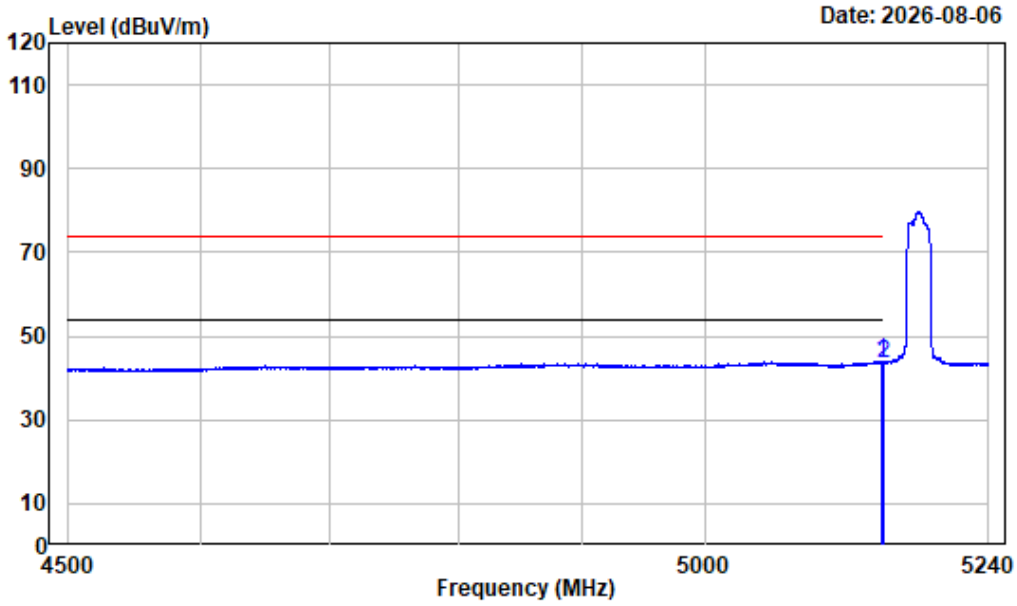

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.795	-7.96	51.91	43.95	54.00	-10.05	Average
2	5150.000	-7.96	51.65	43.69	54.00	-10.31	Average


Right Band edge_Horizontal_Peak_802.11ax-hew20_5240MHz

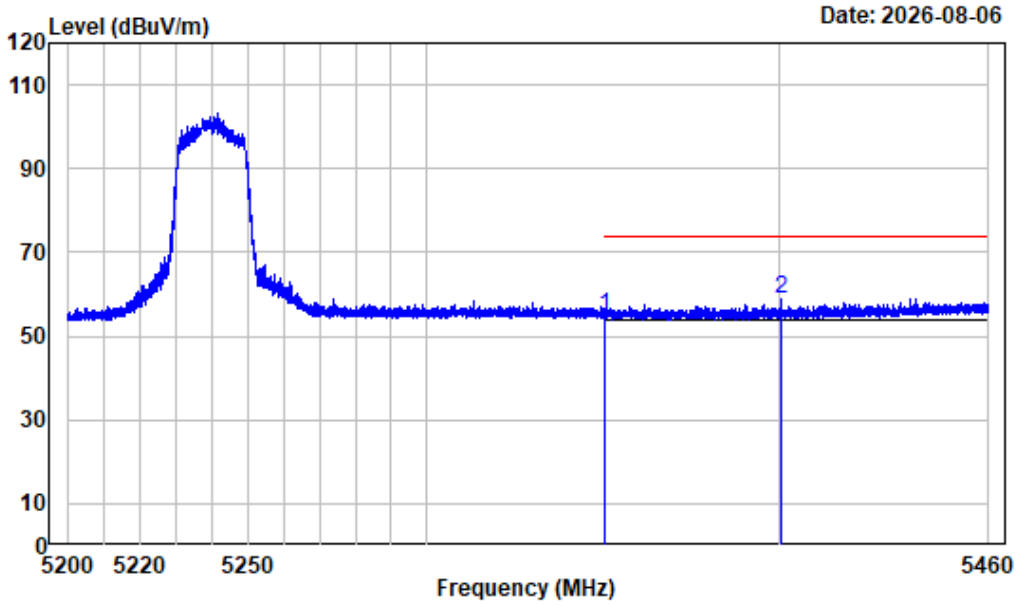

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.24	54.58	74.00	-19.42	Peak
2	5400.493	-7.48	66.29	58.81	74.00	-15.19	Peak


Right Band edge_Horizontal_Average_802.11ax-hew20_5240MHz

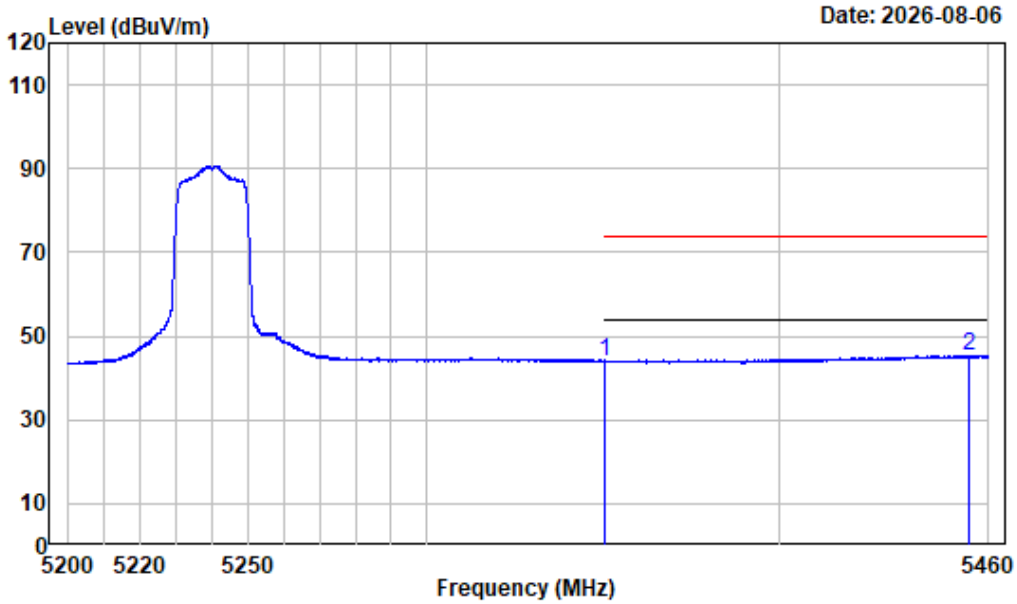

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.65	43.99	54.00	-10.01	Average
2	5454.475	-6.85	52.21	45.36	54.00	-8.64	Average


Right Band edge_Vertical_Peak_802.11ax-hew20_5240MHz

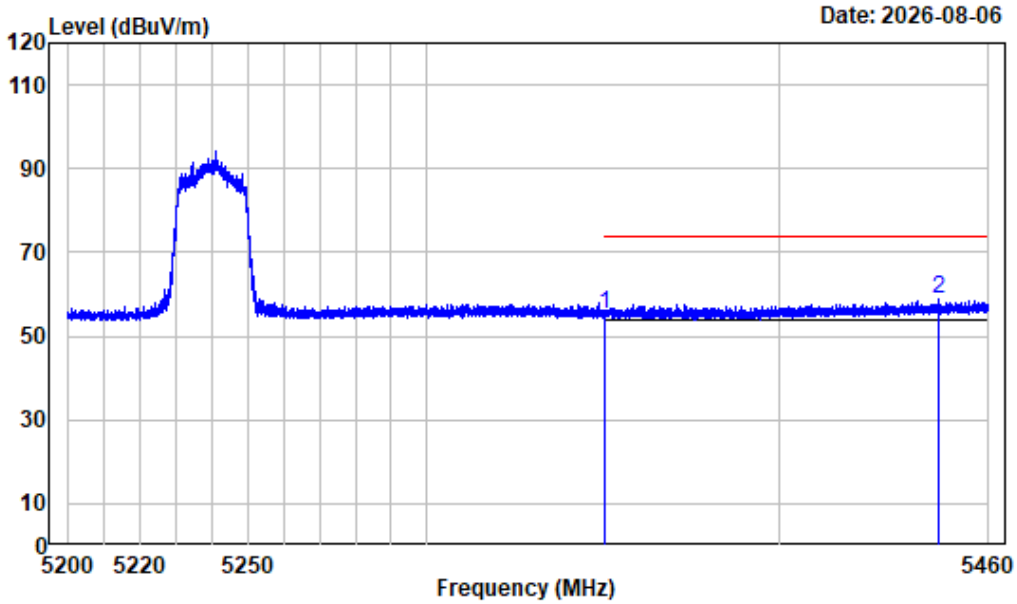

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.91	55.25	74.00	-18.75	Peak
2	5445.700	-6.91	65.79	58.88	74.00	-15.12	Peak


Right Band edge_Vertical_Average_802.11ax-hew20_5240MHz

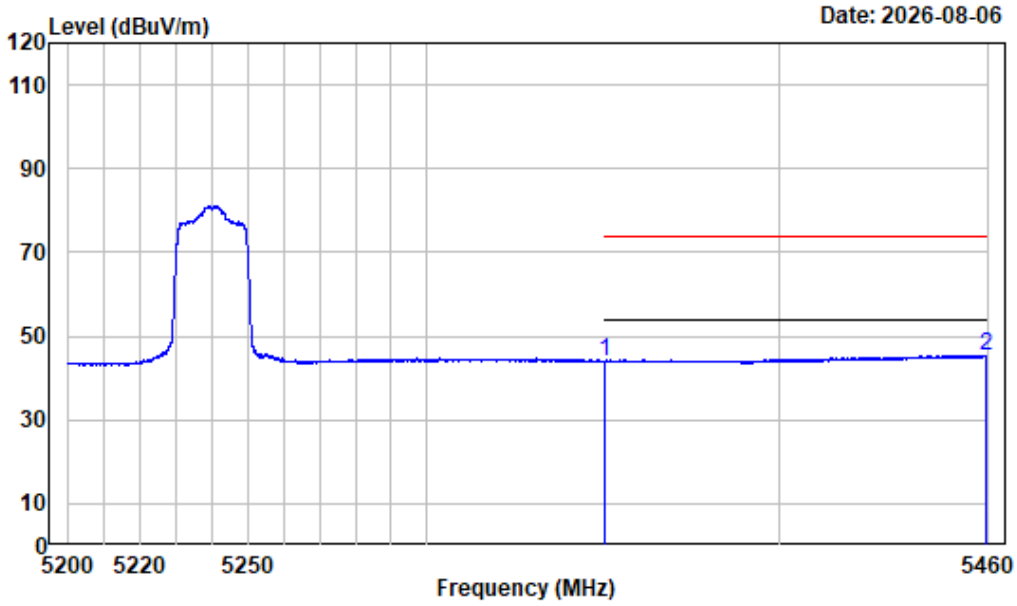

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.71	44.05	54.00	-9.95	Average
2	5459.415	-6.84	52.26	45.42	54.00	-8.58	Average


Left Band edge_Horizontal_Peak_802.11ax-hew40_5190MHz

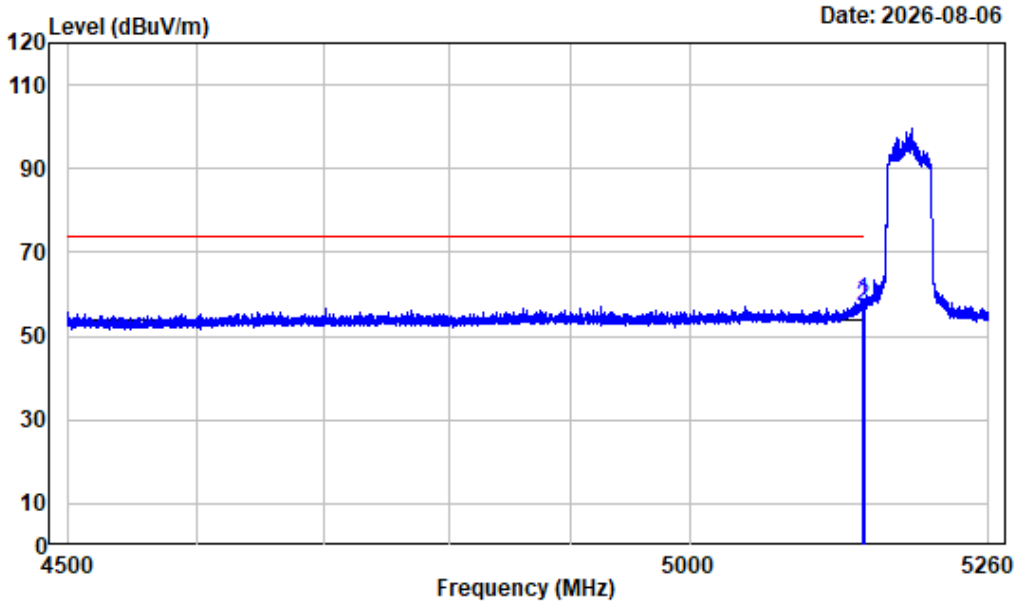

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.515	-7.96	66.45	58.49	74.00	-15.51	Peak
2	5150.000	-7.96	64.81	56.85	74.00	-17.15	Peak


Left Band edge_Horizontal_Average_802.11ax-hew40_5190MHz

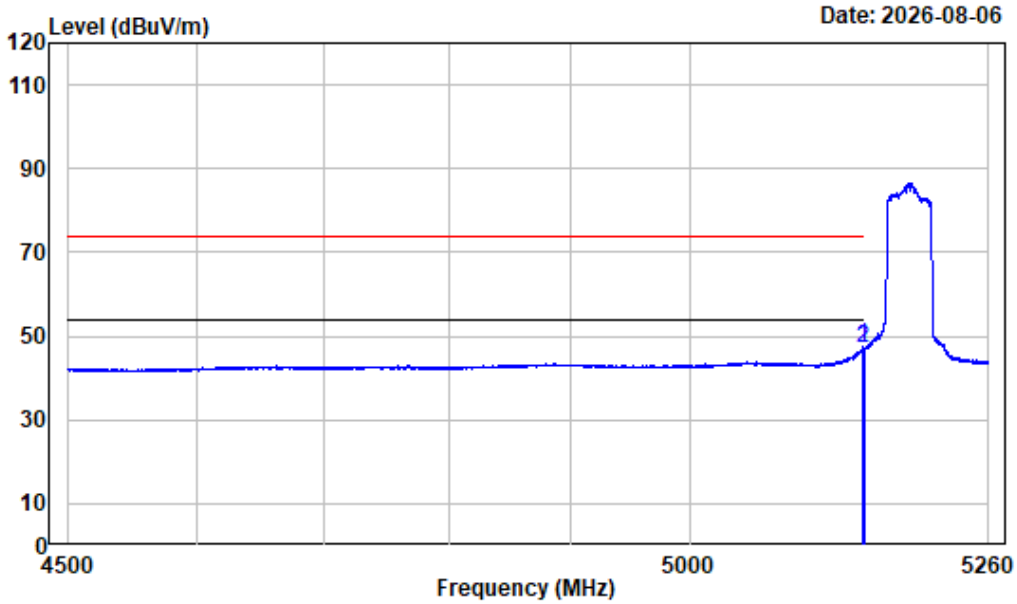

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.705	-7.96	55.40	47.44	54.00	-6.56	Average
2	5150.000	-7.96	55.03	47.07	54.00	-6.93	Average


Left Band edge_Vertical_Peak_802.11ax-hew40_5190MHz

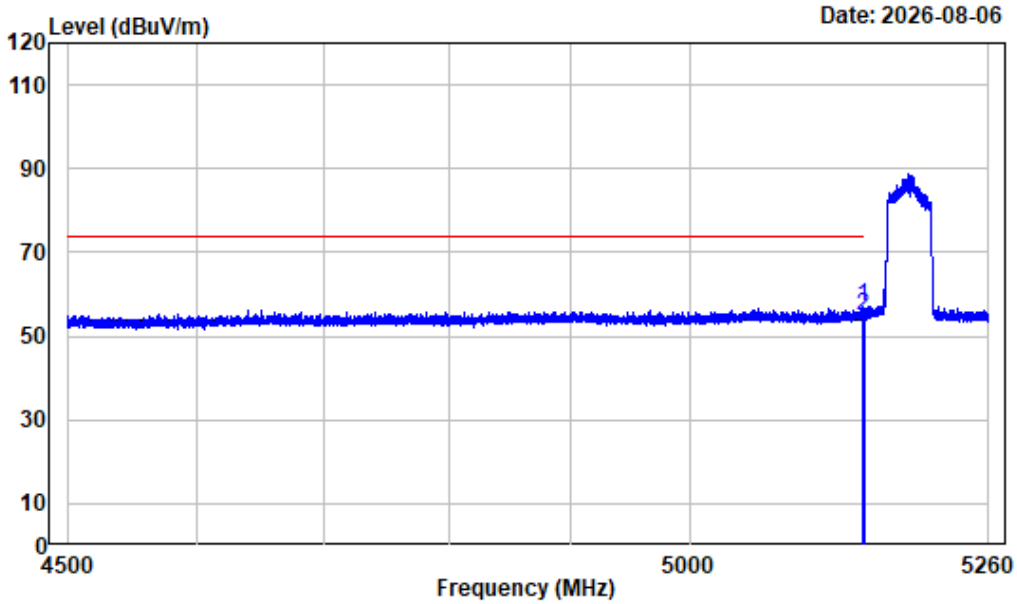

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.610	-7.96	65.13	57.17	74.00	-16.83	Peak
2	5150.000	-7.96	62.97	55.01	74.00	-18.99	Peak


Left Band edge_Vertical_Average_802.11ax-hew40_5190MHz

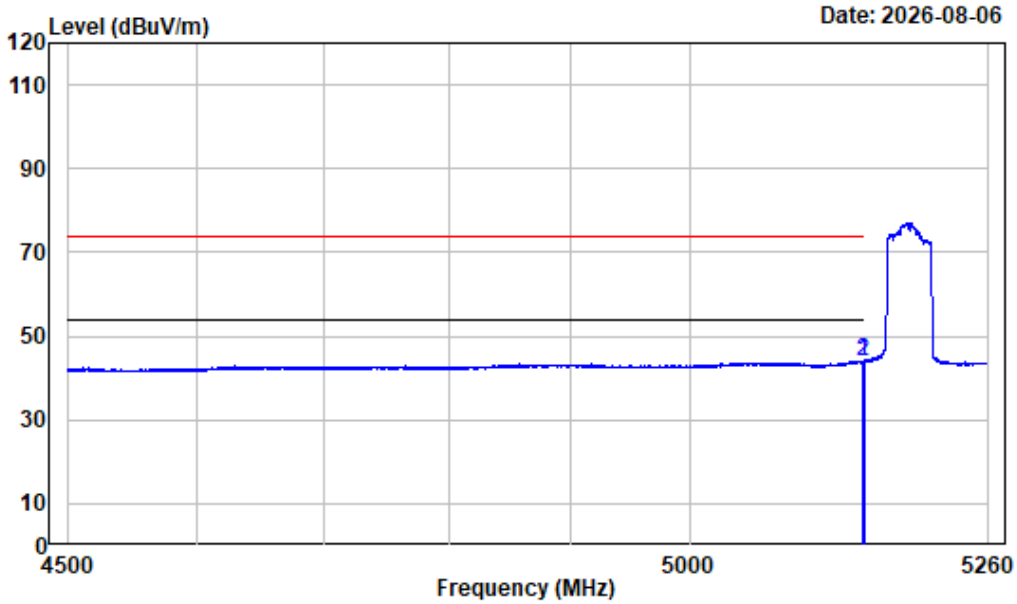

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.470	-7.96	52.05	44.09	54.00	-9.91	Average
2	5150.000	-7.96	51.93	43.97	54.00	-10.03	Average


Right Band edge_Horizontal_Peak_802.11ax-hew40_5230MHz

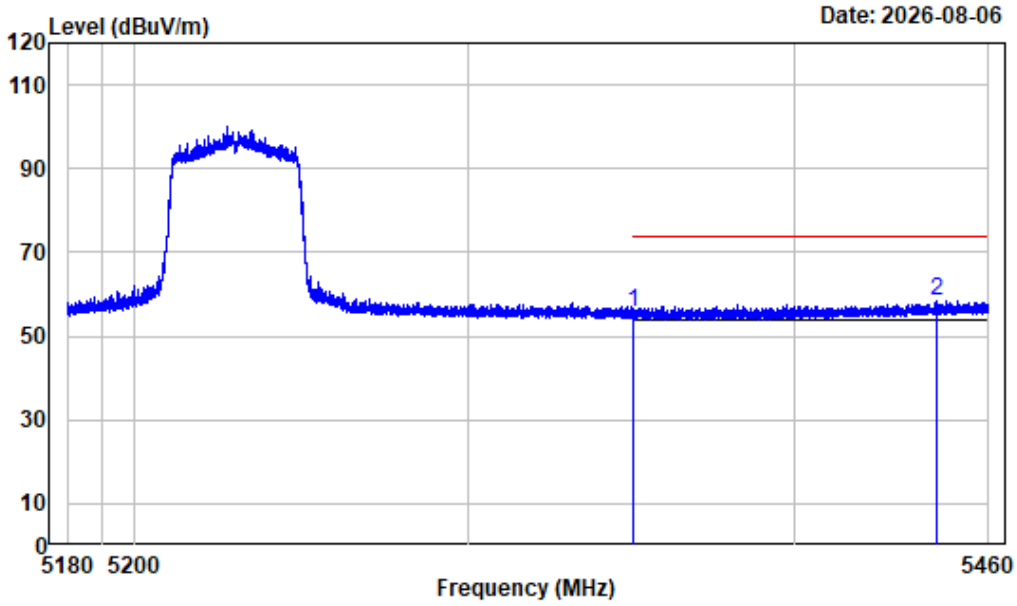

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.34	55.68	74.00	-18.32	Peak
2	5443.830	-6.94	65.39	58.45	74.00	-15.55	Peak


Right Band edge_Horizontal_Average_802.11ax-hew40_5230MHz

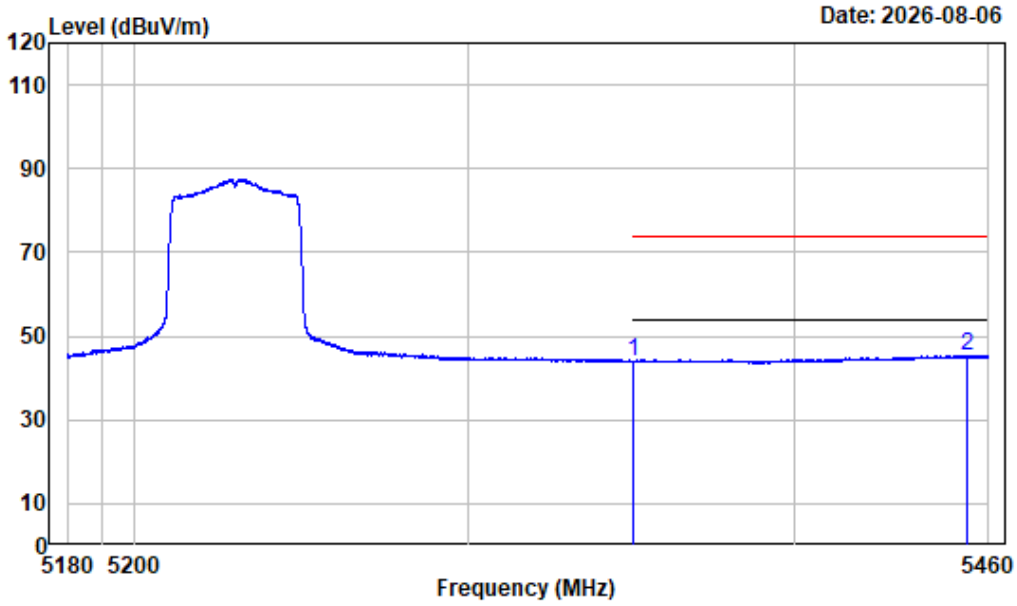

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.71	44.05	54.00	-9.95	Average
2	5453.175	-6.85	52.14	45.29	54.00	-8.71	Average


Right Band edge_Vertical_Peak_802.11ax-hew40_5230MHz

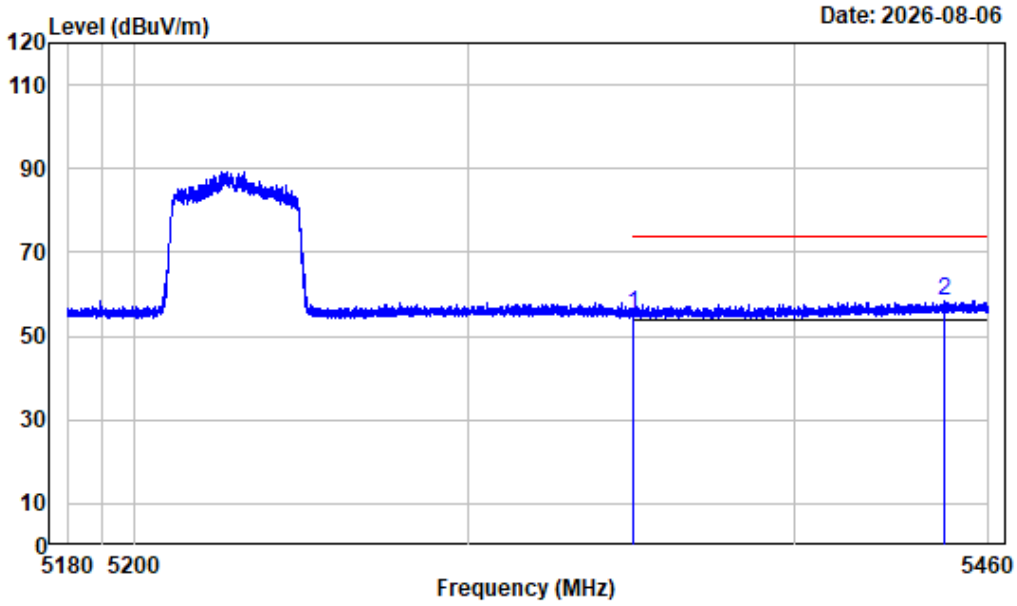

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.99	55.33	74.00	-18.67	Peak
2	5446.420	-6.90	65.32	58.42	74.00	-15.58	Peak


Right Band edge_Vertical_Average_802.11ax-hew40_5230MHz

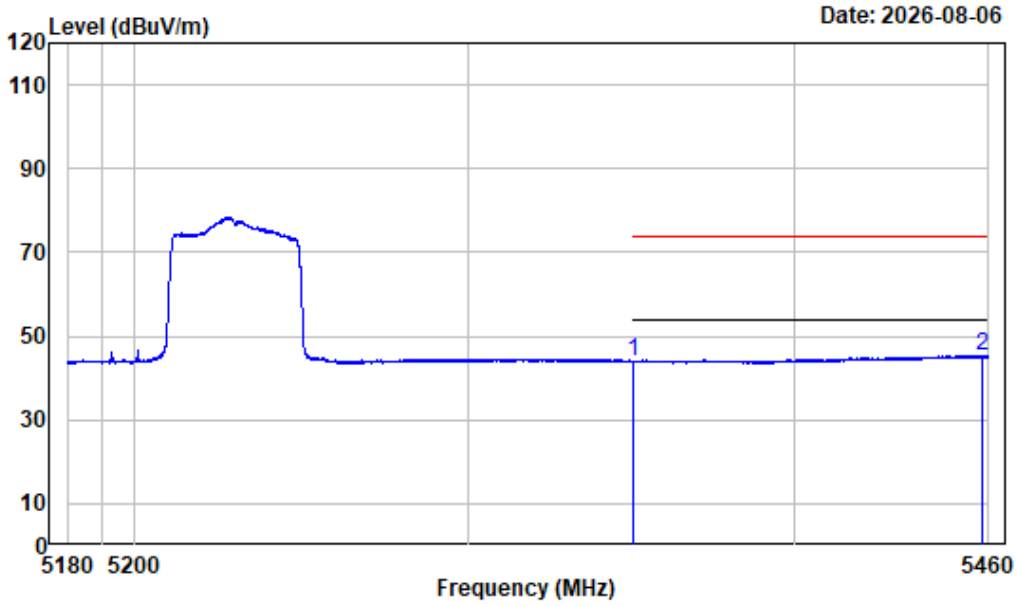

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.65	43.99	54.00	-10.01	Average
2	5457.830	-6.85	52.19	45.34	54.00	-8.66	Average


Left Band edge_Horizontal_Peak_802.11ax-hew80_5210MHz

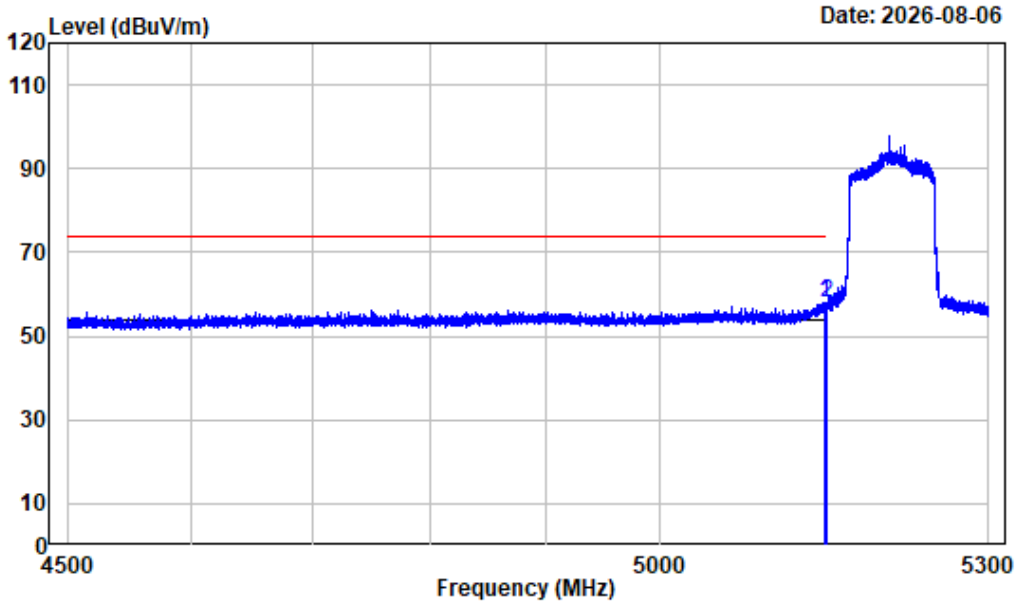

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.100	-7.97	66.14	58.17	74.00	-15.83	Peak
2	5150.000	-7.96	65.92	57.96	74.00	-16.04	Peak


Left Band edge_Horizontal_Average_802.11ax-hew80_5210MHz

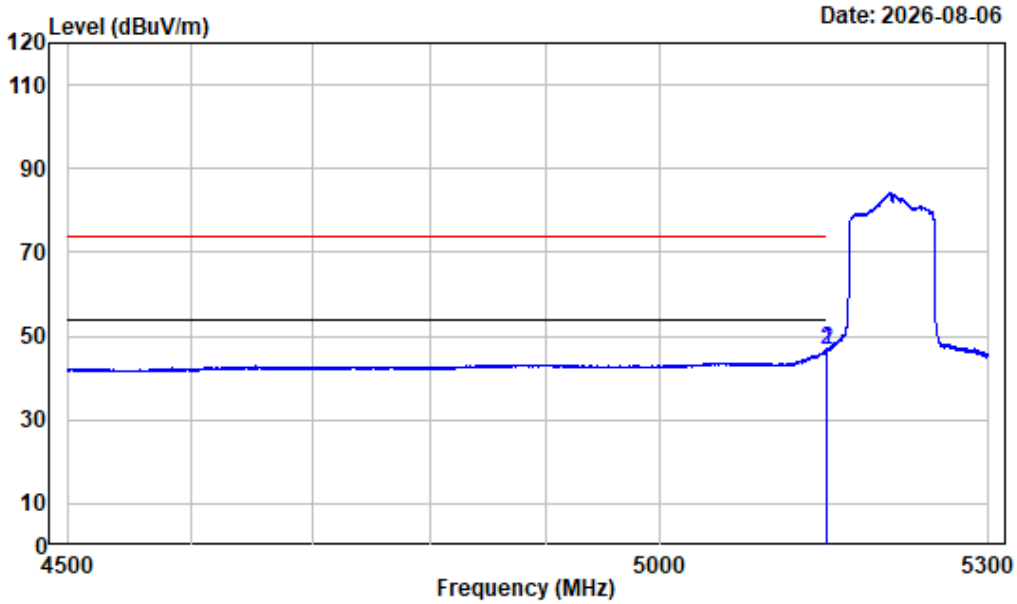

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.500	-7.96	54.68	46.72	54.00	-7.28	Average
2	5150.000	-7.96	54.42	46.46	54.00	-7.54	Average


Left Band edge_Vertical_Peak_802.11ax-hew80_5210MHz

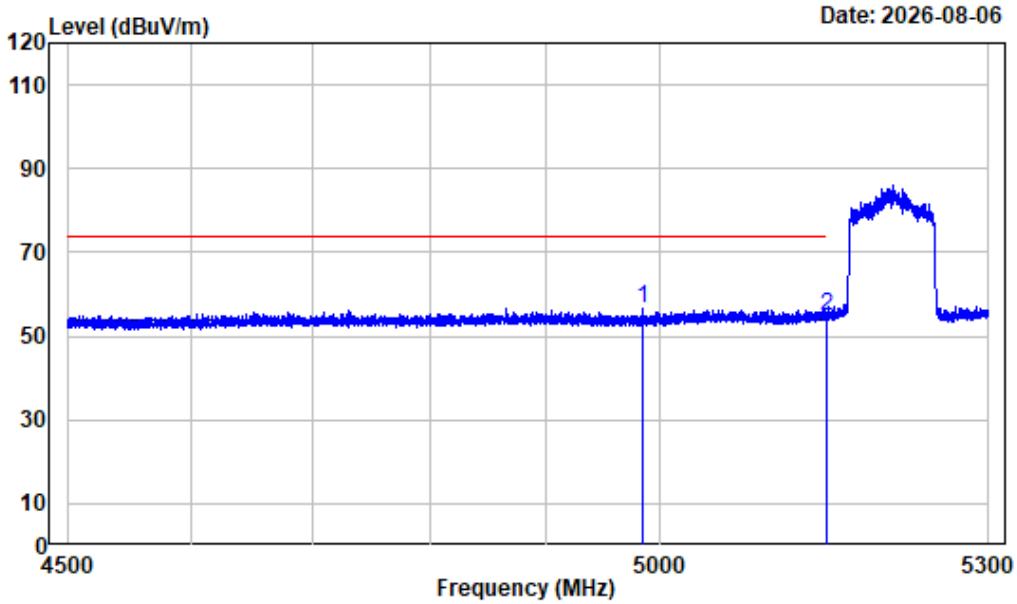

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4983.800	-8.60	65.42	56.82	74.00	-17.18	Peak
2	5150.000	-7.96	62.83	54.87	74.00	-19.13	Peak


Left Band edge_Vertical_Average_802.11ax_vht80 5210MHz

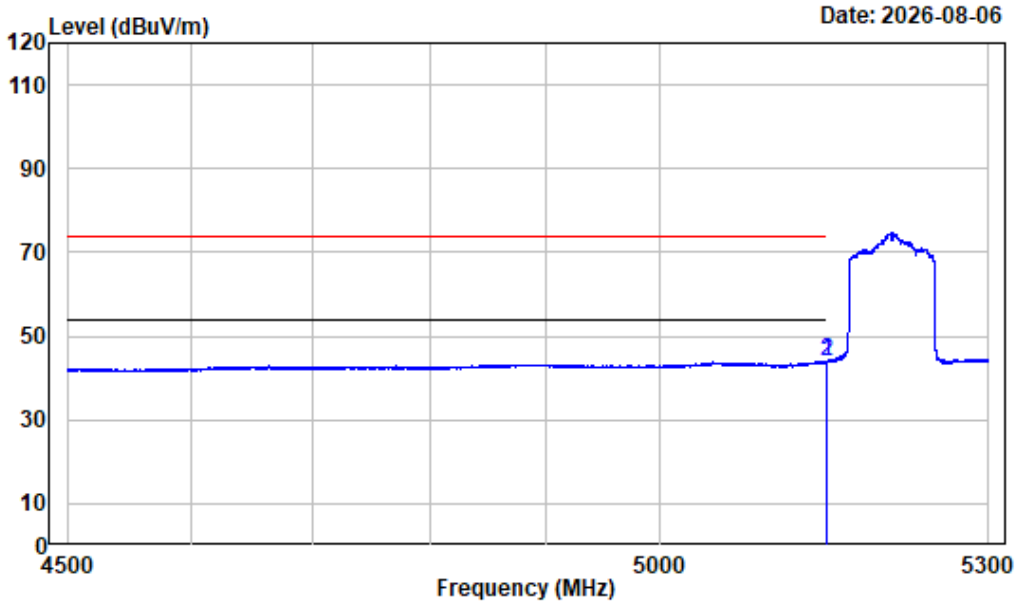

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.900	-7.96	52.10	44.14	54.00	-9.86	Average
2	5150.000	-7.96	52.02	44.06	54.00	-9.94	Average


Right Band edge_Horizontal_Peak_802.11ax-hew80_5210MHz

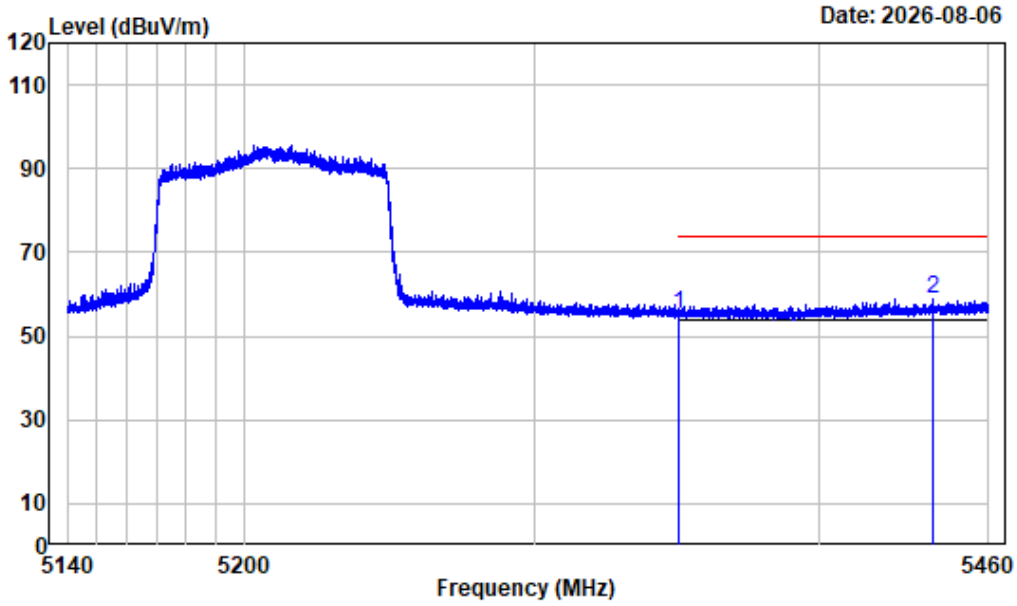

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.11	55.45	74.00	-18.55	Peak
2	5440.160	-6.98	65.76	58.78	74.00	-15.22	Peak


Right Band edge_Horizontal_Average_802.11ax-hew80_5210MHz

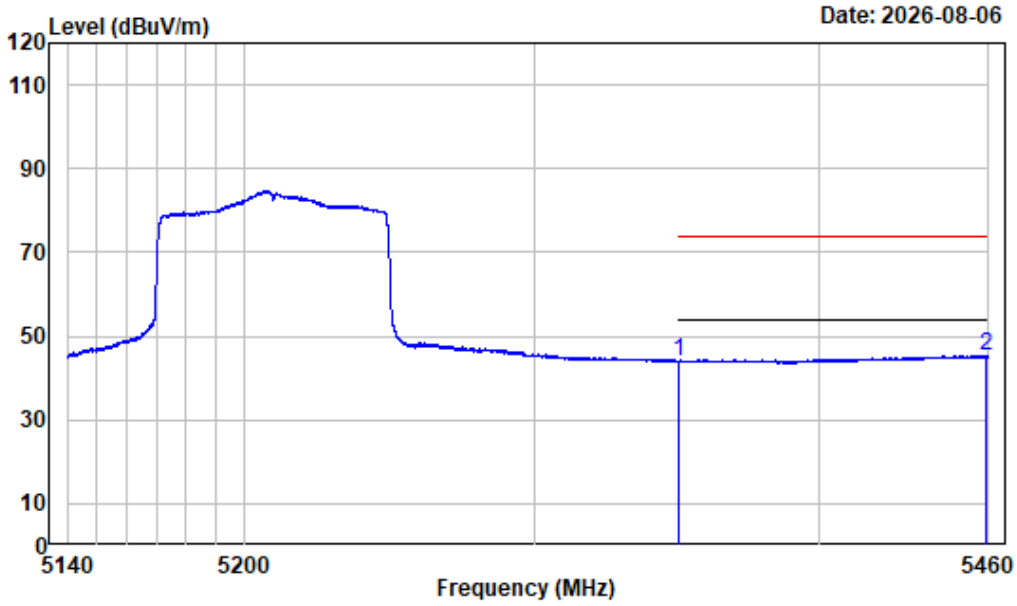

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.57	43.91	54.00	-10.09	Average
2	5459.240	-6.84	52.21	45.37	54.00	-8.63	Average


Right Band edge_Vertical_Peak_802.11ax-hew80_5210MHz

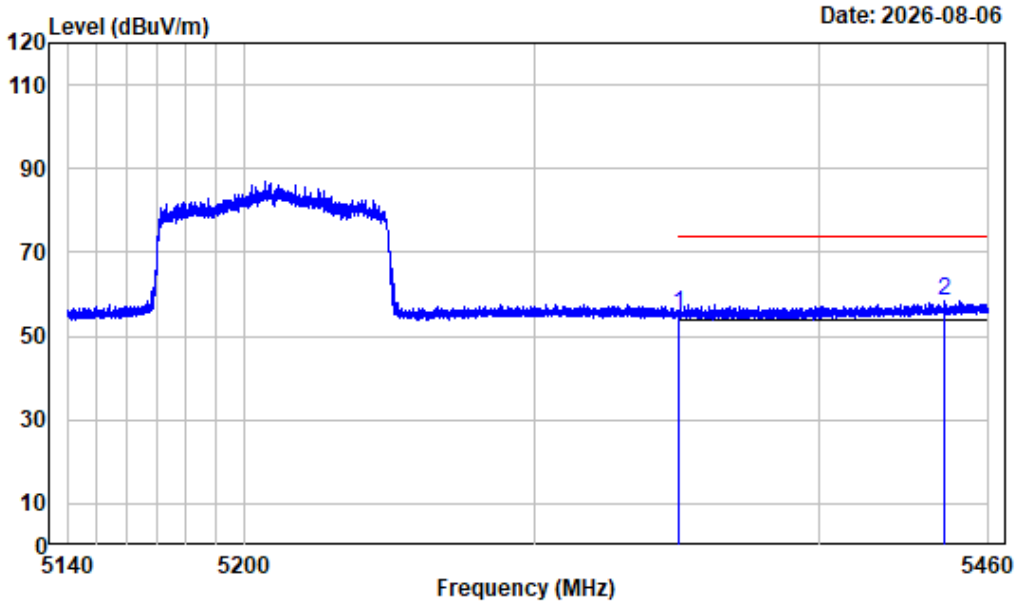

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.95	55.29	74.00	-18.71	Peak
2	5444.240	-6.92	65.30	58.38	74.00	-15.62	Peak


Right Band edge_Vertical_Average_802.11ax-hew80_5210MHz

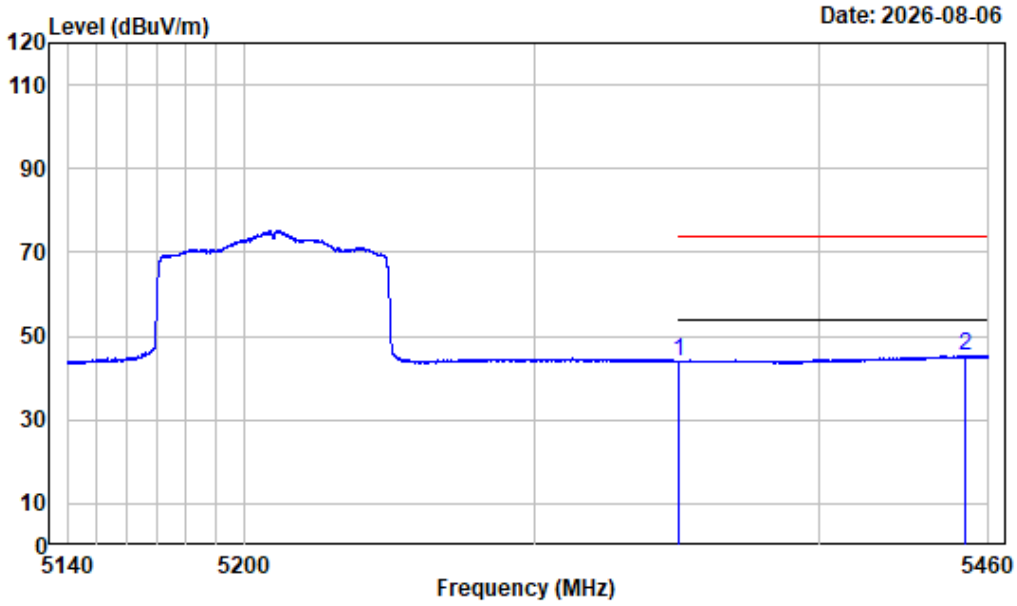

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.57	43.91	54.00	-10.09	Average
2	5451.520	-6.85	52.23	45.38	54.00	-8.62	Average


Left Band edge_Horizontal_Peak_802.11a_5260MHz

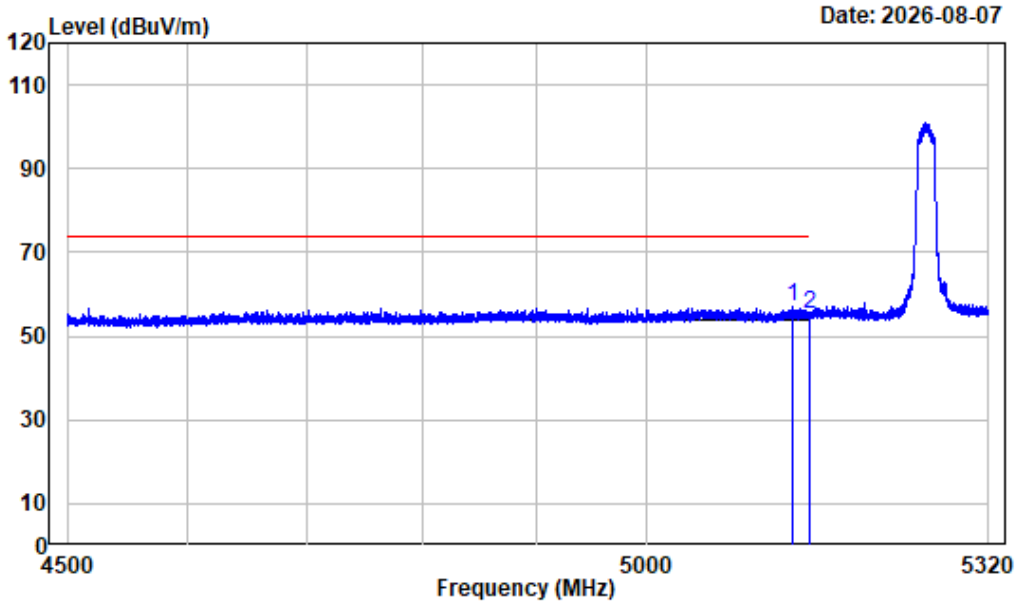

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5134.373	-8.03	65.11	57.08	74.00	-16.92	Peak
2	5150.000	-7.96	63.03	55.07	74.00	-18.93	Peak


Left Band edge_Horizontal_Average_802.11a_5260MHz

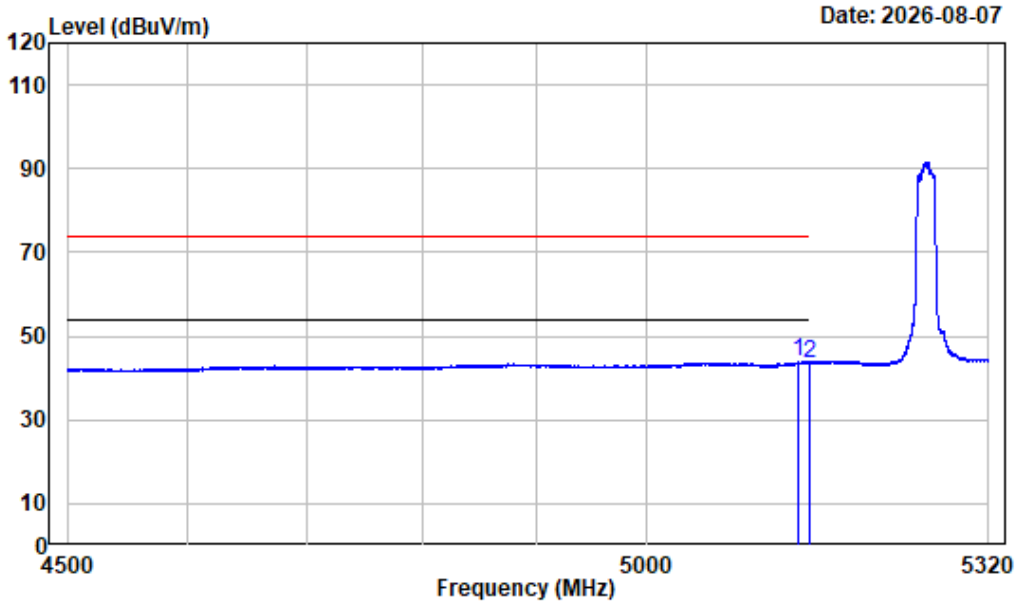

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5139.395	-8.01	51.94	43.93	54.00	-10.07	Average
2	5150.000	-7.96	51.62	43.66	54.00	-10.34	Average


Left Band edge_Vertical_Peak_802.11a_5260MHz

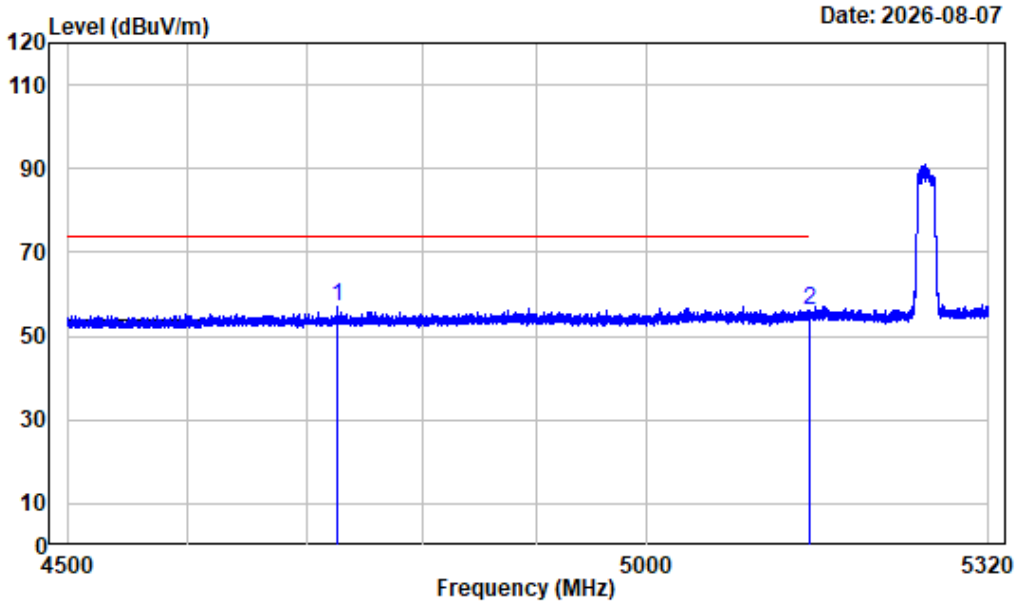

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4726.935	-8.72	65.84	57.12	74.00	-16.88	Peak
2	5150.000	-7.96	63.95	55.99	74.00	-18.01	Peak


Left Band edge_Vertical_Average_802.11a_5260MHz

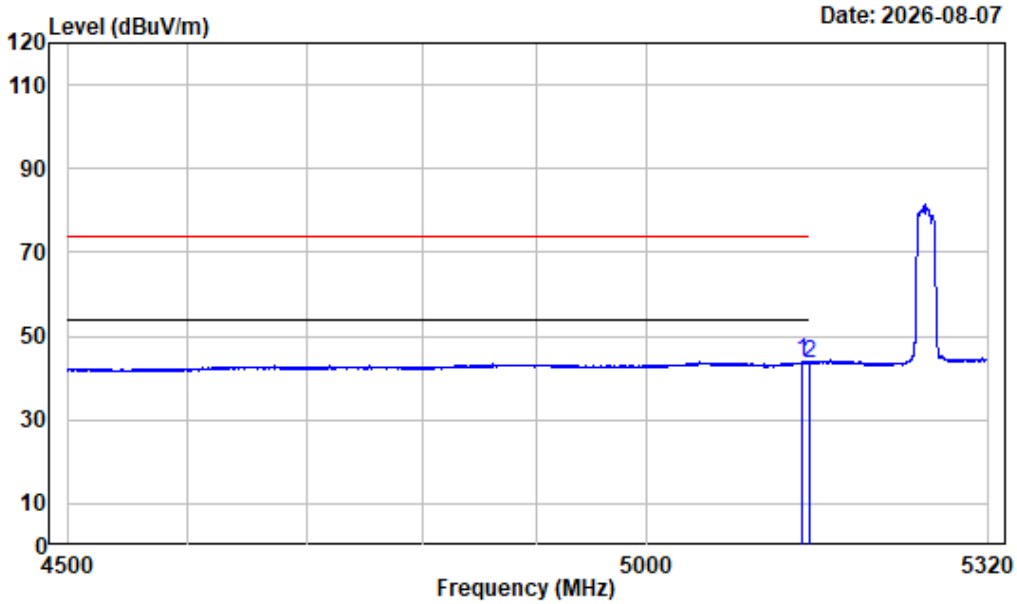

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5142.880	-7.99	52.06	44.07	54.00	-9.93	Average
2	5150.000	-7.96	51.57	43.61	54.00	-10.39	Average


Right Band edge_Horizontal_Peak_802.11a_5320MHz

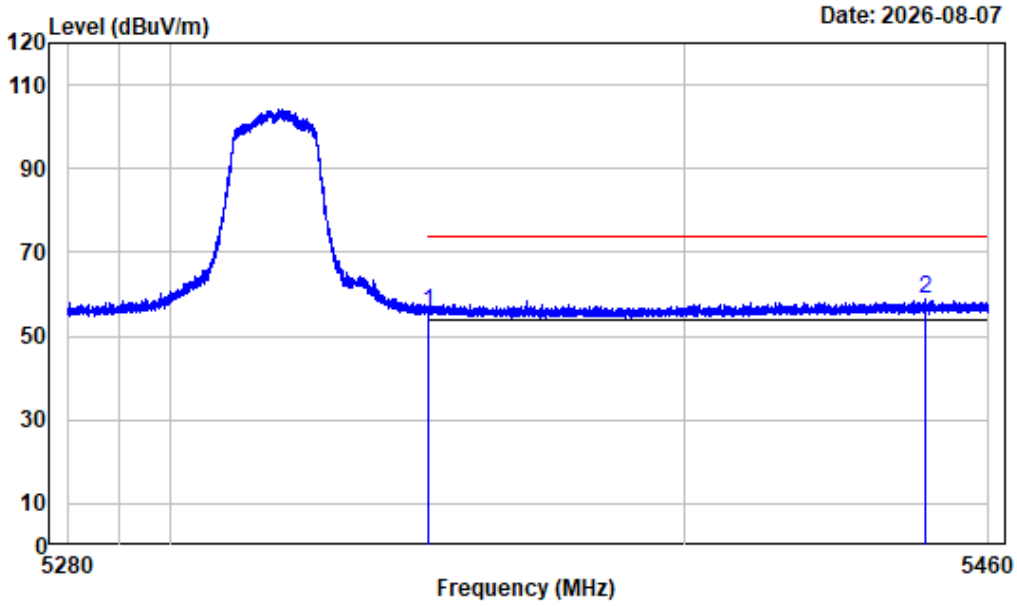

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.25	55.59	74.00	-18.41	Peak
2	5447.603	-6.88	65.92	59.04	74.00	-14.96	Peak


Right Band edge_Horizontal_Average_802.11a_5320MHz

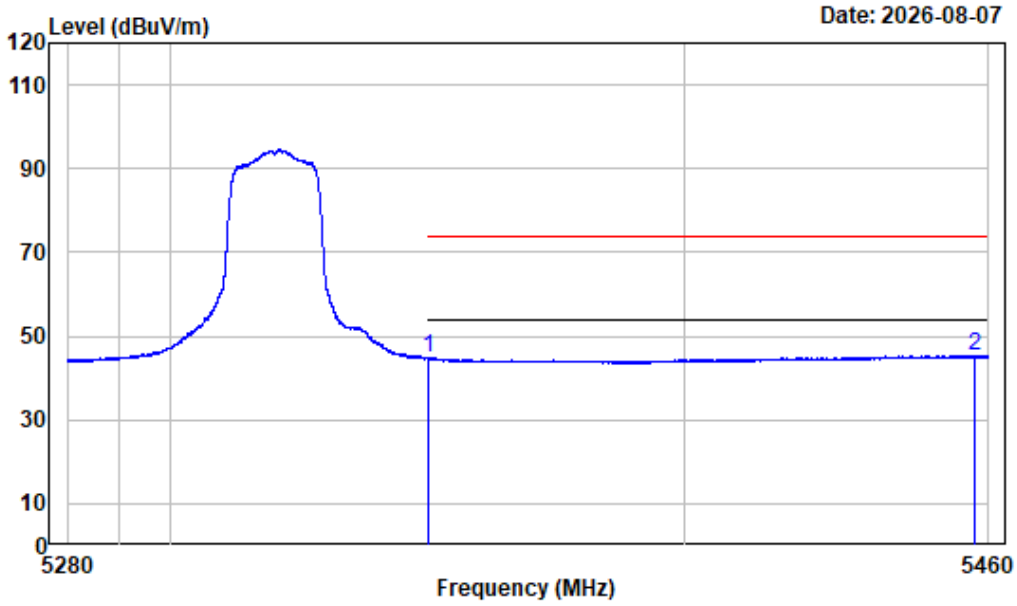

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	52.32	44.66	54.00	-9.34	Average
2	5457.188	-6.85	52.22	45.37	54.00	-8.63	Average


Right Band edge_Vertical_Peak_802.11a_5320MHz

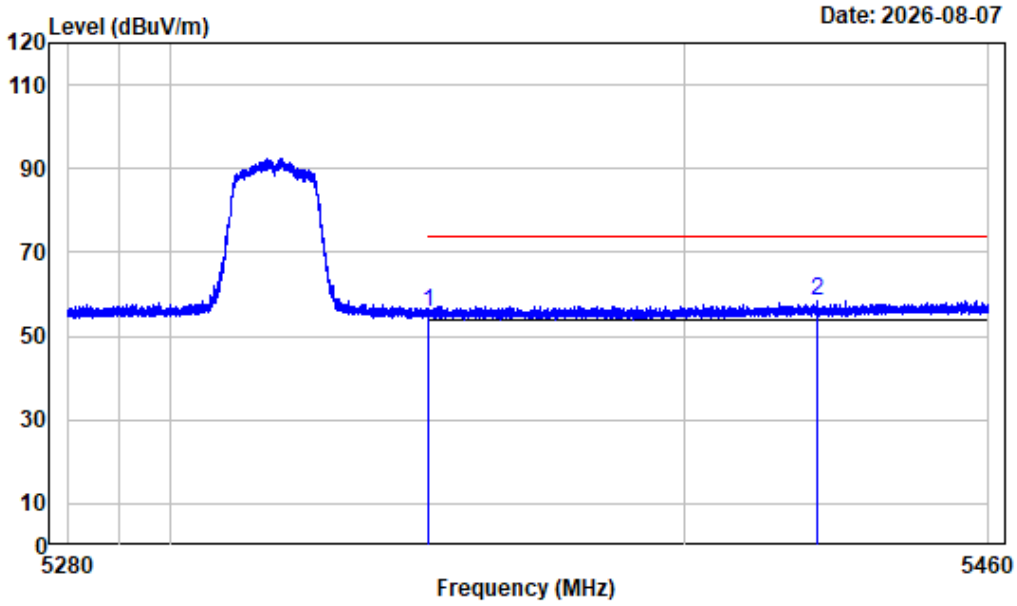

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.43	55.77	74.00	-18.23	Peak
2	5426.115	-7.15	65.78	58.63	74.00	-15.37	Peak


Right Band edge_Vertical_Average_802.11a_5320MHz

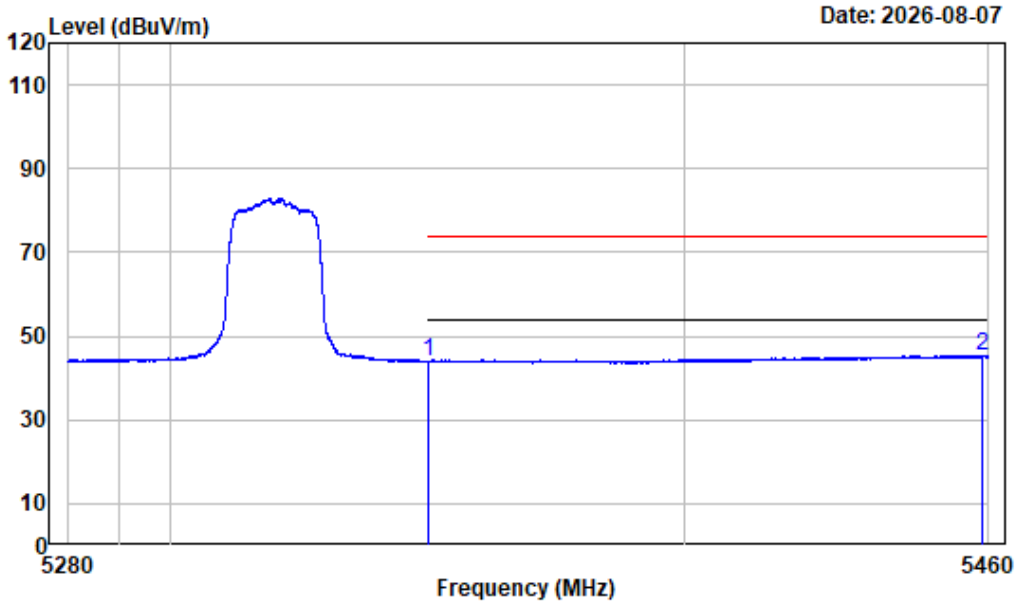

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.60	43.94	54.00	-10.06	Average
2	5458.740	-6.85	52.11	45.26	54.00	-8.74	Average


Left Band edge_Horizontal_Peak_802.11ac-vht20_5260MHz

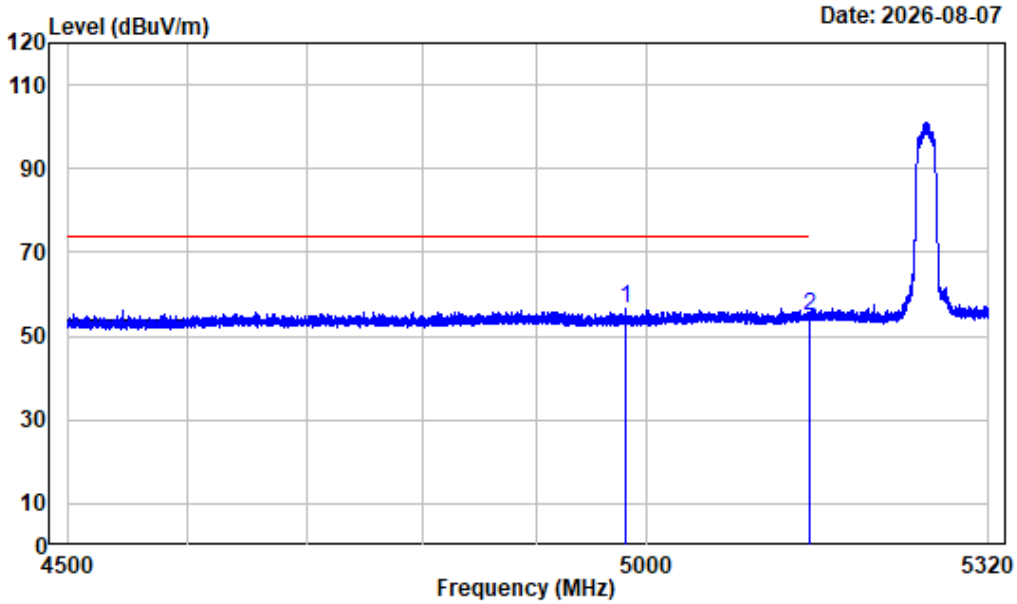

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4981.033	-8.60	65.27	56.67	74.00	-17.33	Peak
2	5150.000	-7.96	62.88	54.92	74.00	-19.08	Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5260MHz

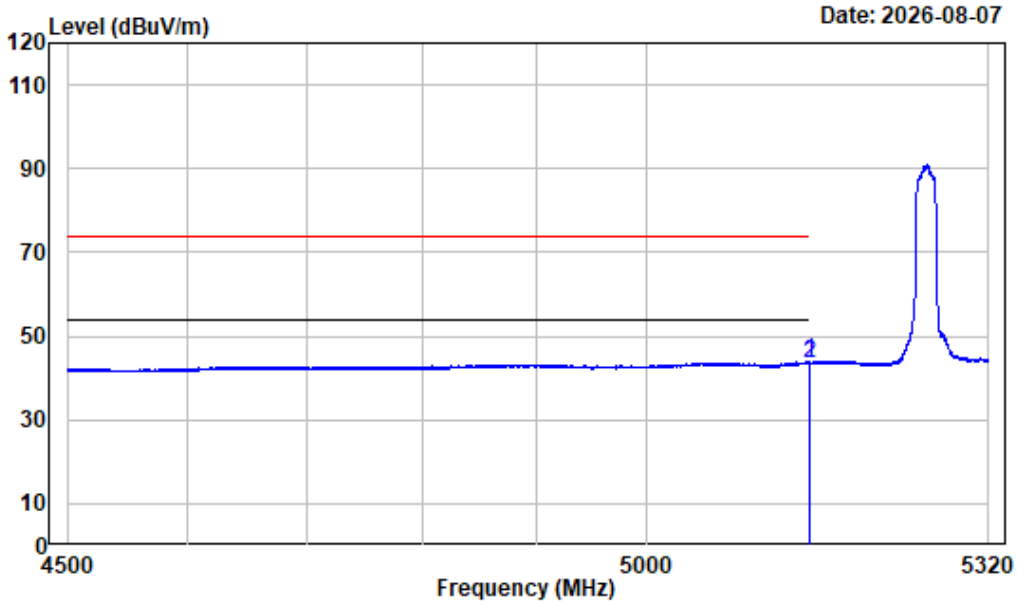

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.337	-7.97	51.84	43.87	54.00	-10.13	Average
2	5150.000	-7.96	51.47	43.51	54.00	-10.49	Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5260MHz

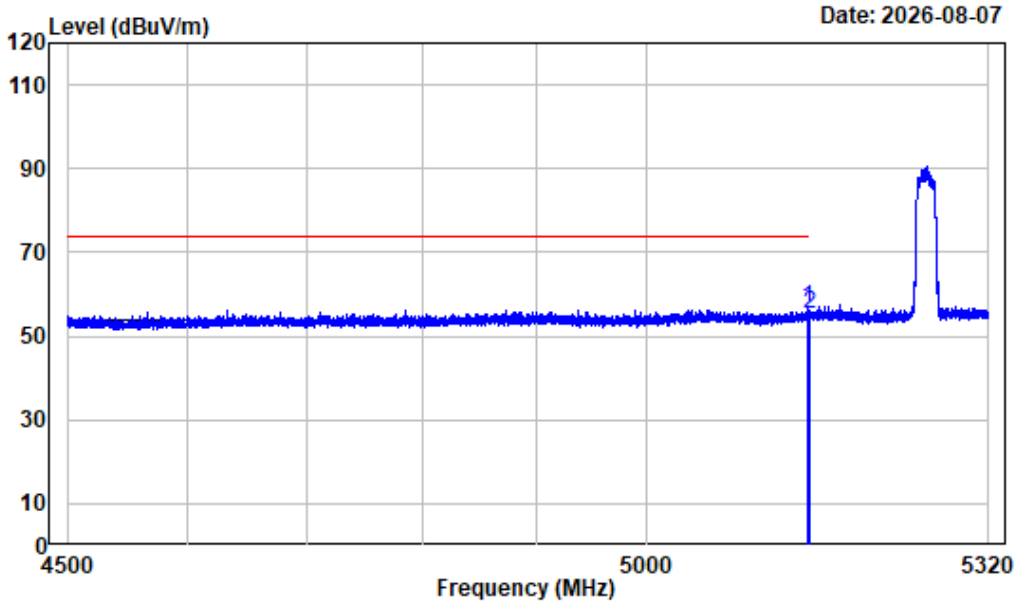

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.390	-7.96	64.56	56.60	74.00	-17.40	Peak
2	5150.000	-7.96	63.00	55.04	74.00	-18.96	Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5260MHz

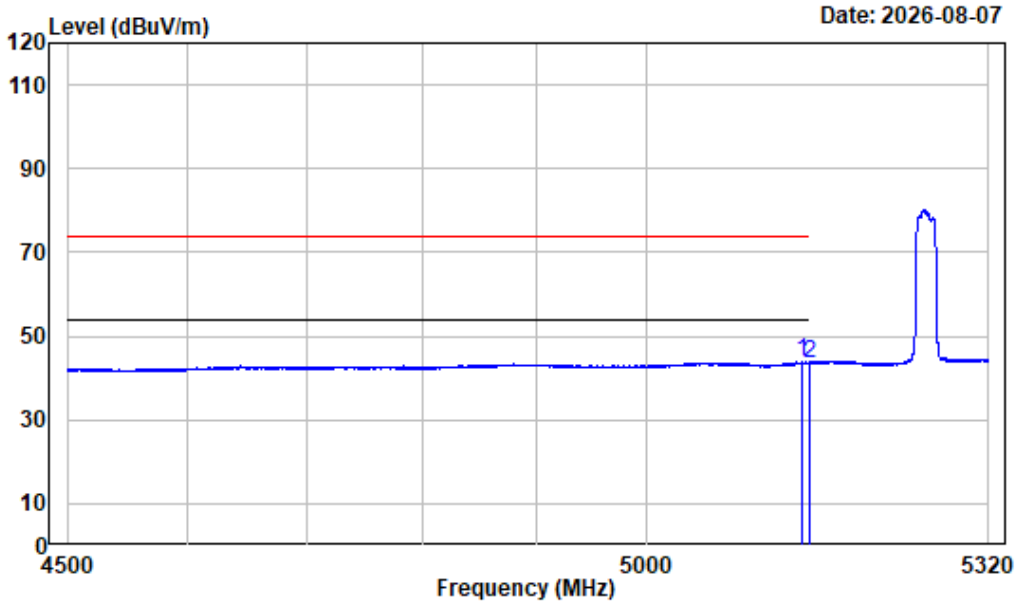

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.495	-7.99	51.79	43.80	54.00	-10.20	Average
2	5150.000	-7.96	51.63	43.67	54.00	-10.33	Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5320MHz

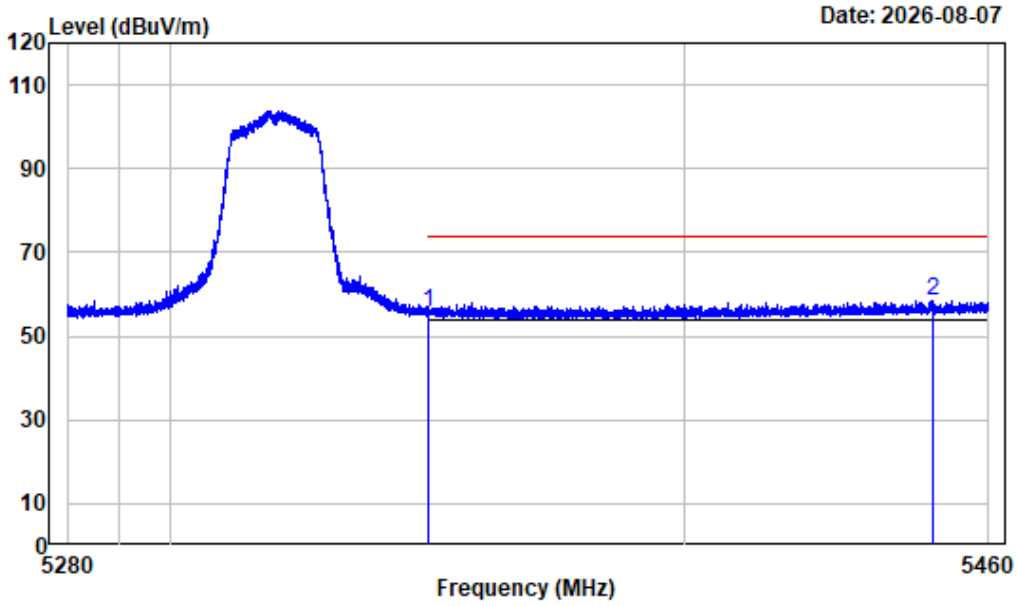

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.15	55.49	74.00	-18.51	Peak
2	5449.020	-6.88	65.29	58.41	74.00	-15.59	Peak


Right Band edge_Horizontal_Average_802.11ac-vht20_5320MHz

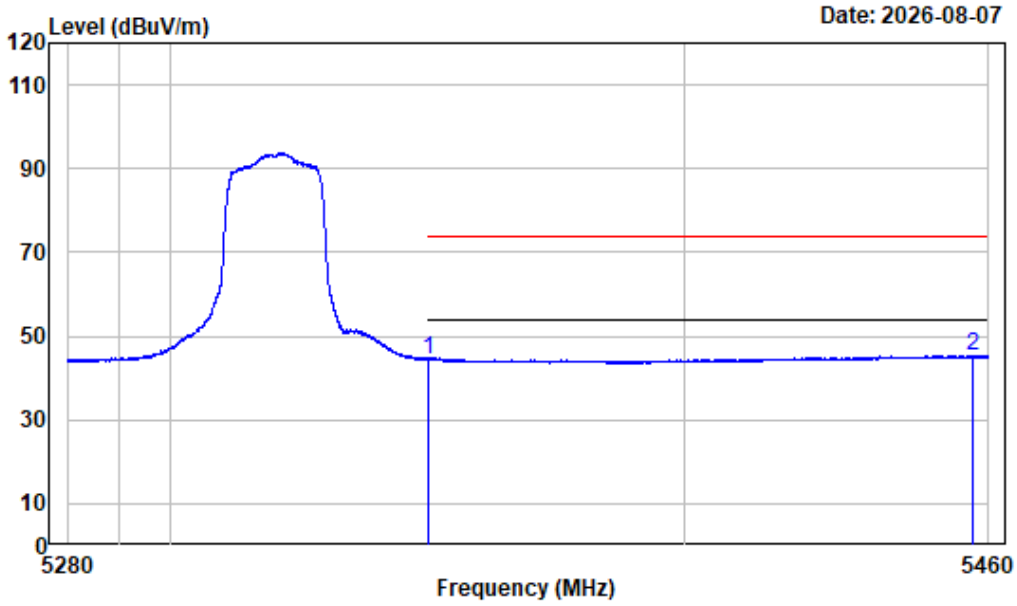

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	52.07	44.41	54.00	-9.59	Average
2	5456.917	-6.85	52.18	45.33	54.00	-8.67	Average


Right Band edge_Vertical_Peak_802.11ac-vht20_5320MHz

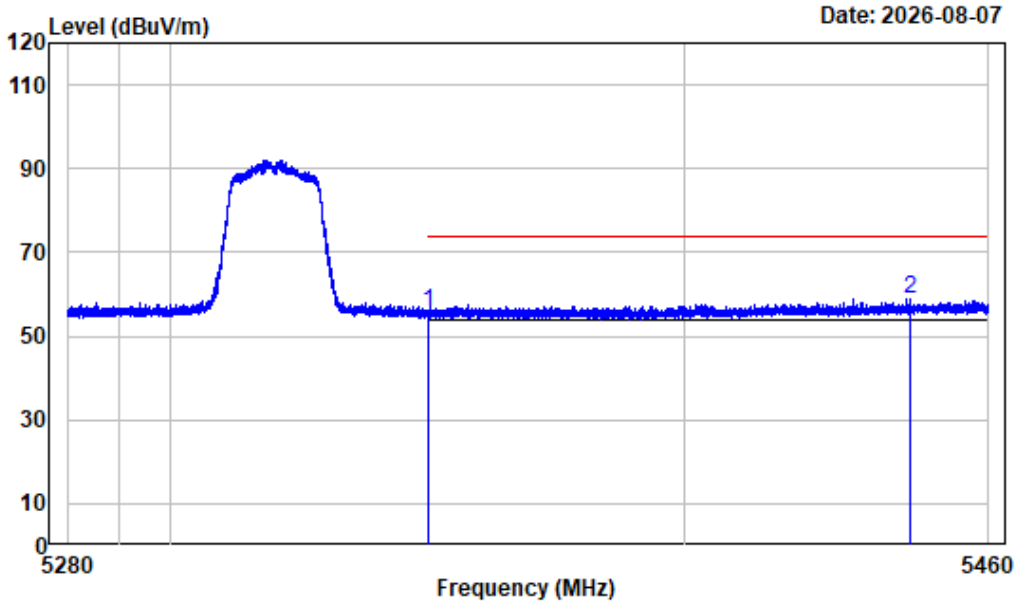

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.39	55.73	74.00	-18.27	Peak
2	5444.565	-6.92	65.86	58.94	74.00	-15.06	Peak


Right Band edge_Vertical_Average_802.11ac-vht20_5320MHz

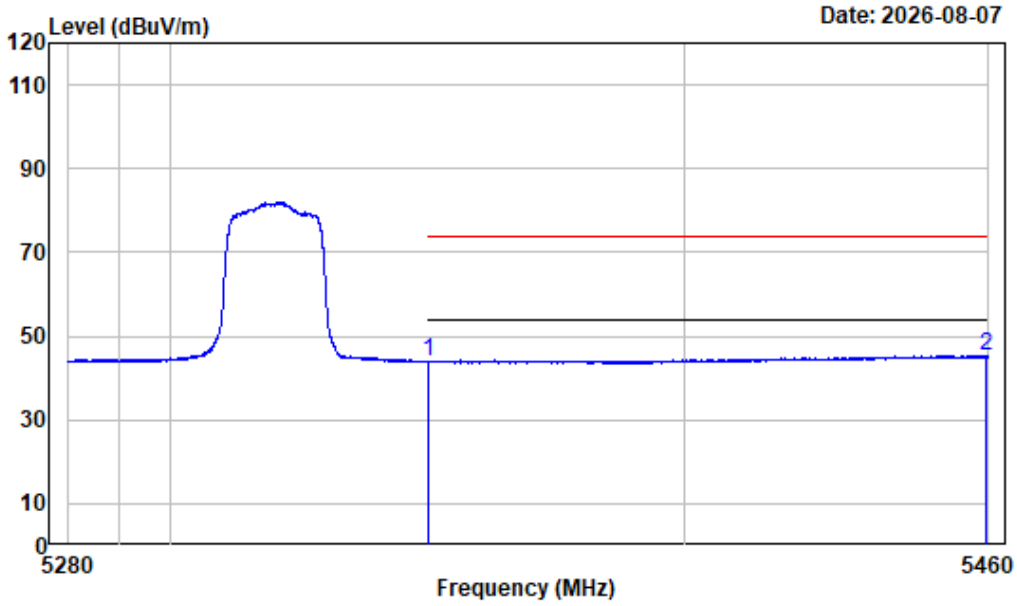

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.72	44.06	54.00	-9.94	Average
2	5459.393	-6.84	52.18	45.34	54.00	-8.66	Average


Left Band edge_Horizontal_Peak_802.11ac-vht40_5270MHz

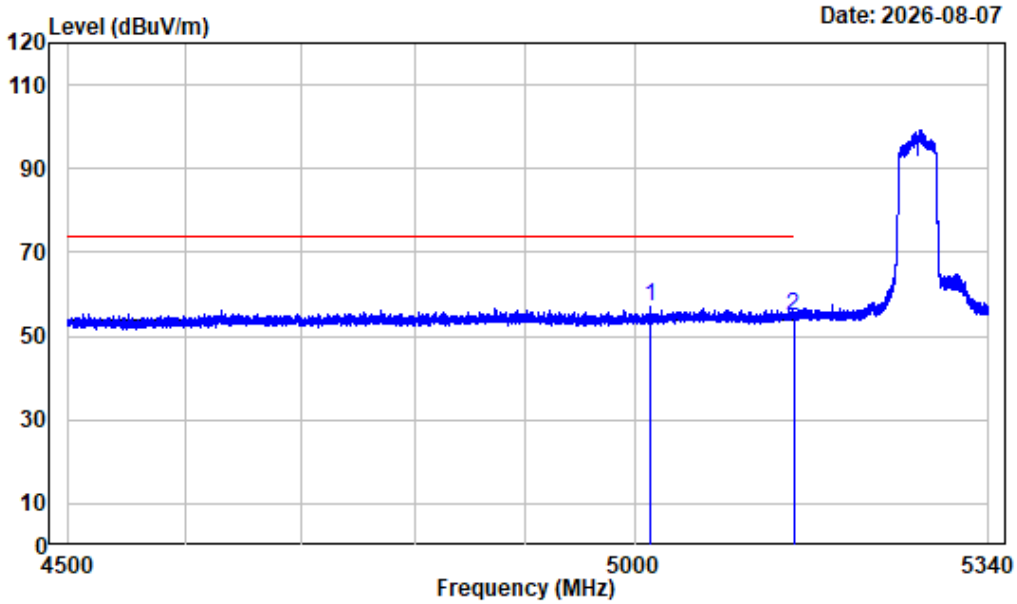

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5014.080	-8.40	65.25	56.85	74.00	-17.15	Peak
2	5150.000	-7.96	62.55	54.59	74.00	-19.41	Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5270MHz

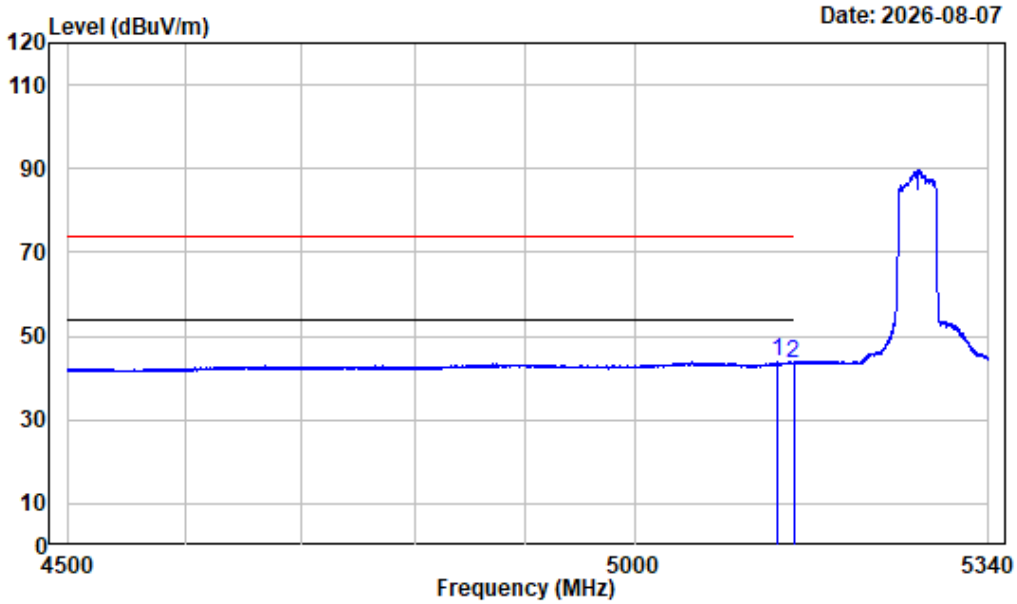

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5134.725	-8.03	51.83	43.80	54.00	-10.20	Average
2	5150.000	-7.96	51.48	43.52	54.00	-10.48	Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5270MHz

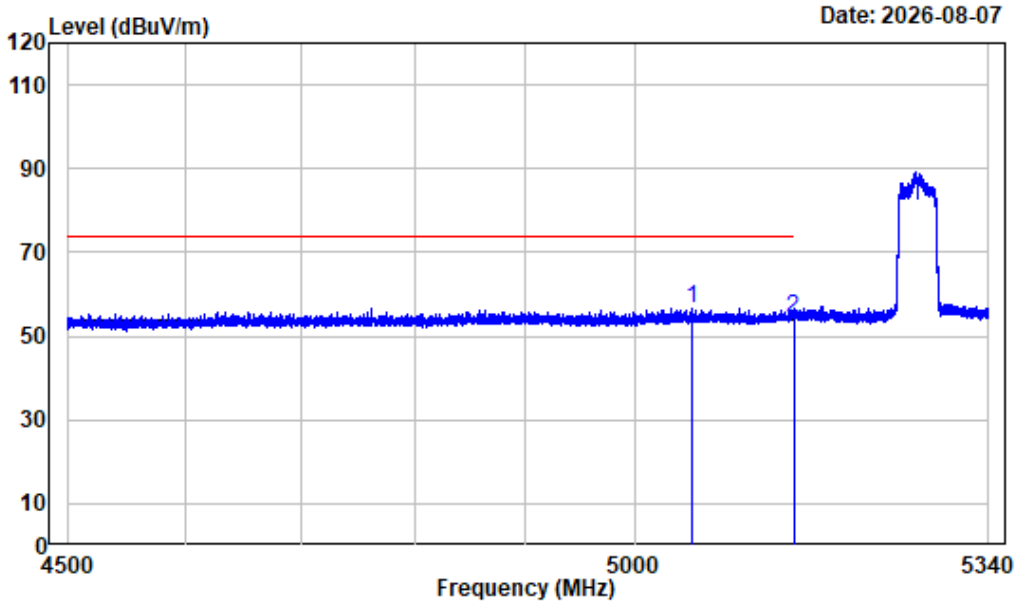

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5053.875	-8.00	64.78	56.78	74.00	-17.22	Peak
2	5150.000	-7.96	62.35	54.39	74.00	-19.61	Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5270MHz

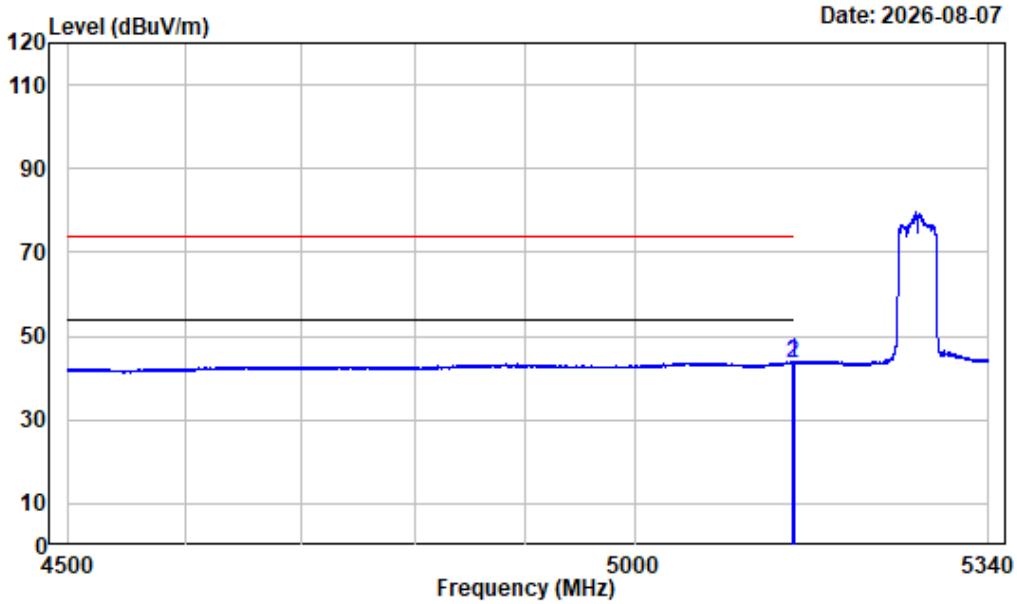

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.270	-7.97	51.87	43.90	54.00	-10.10	Average
2	5150.000	-7.96	51.55	43.59	54.00	-10.41	Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5310MHz

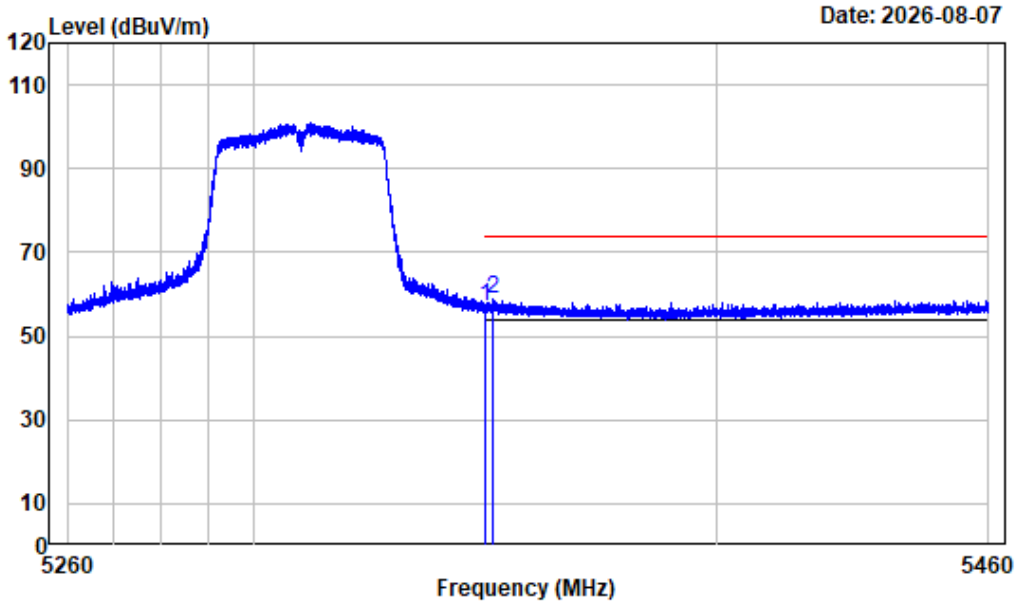

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	64.67	57.01	74.00	-16.99	Peak
2	5351.650	-7.66	66.40	58.74	74.00	-15.26	Peak


Right Band edge_Horizontal_Average_802.11ac-vht40_5310MHz

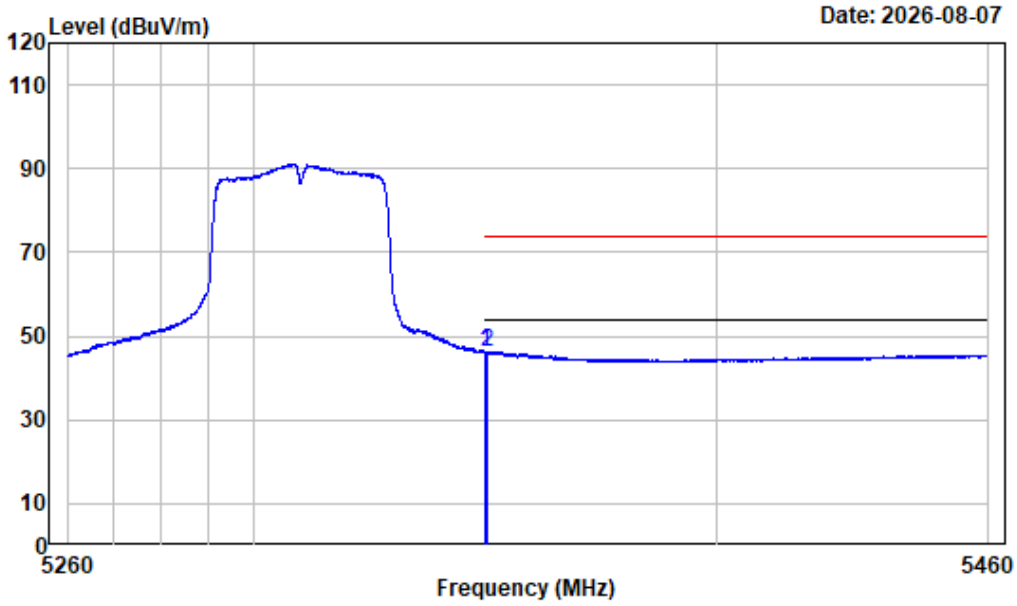

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	54.04	46.38	54.00	-7.62	Average
2	5350.125	-7.66	54.05	46.39	54.00	-7.61	Average


Right Band edge_Vertical_Peak_802.11ac-vht40_5310MHz

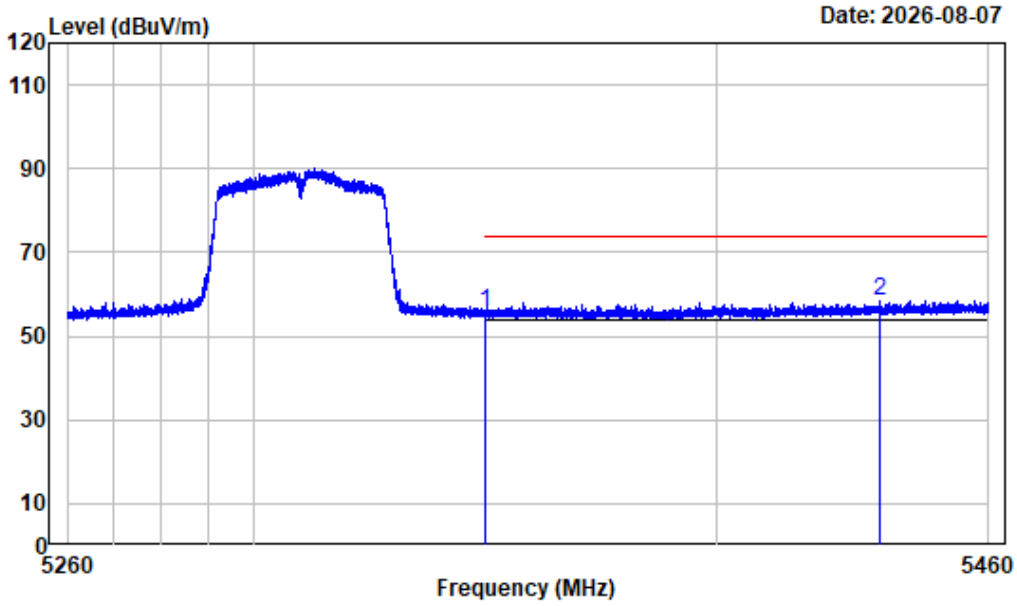

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.29	55.63	74.00	-18.37	Peak
2	5436.175	-7.03	65.63	58.60	74.00	-15.40	Peak


Right Band edge_Vertical_Average_802.11ac-vht40_5310MHz

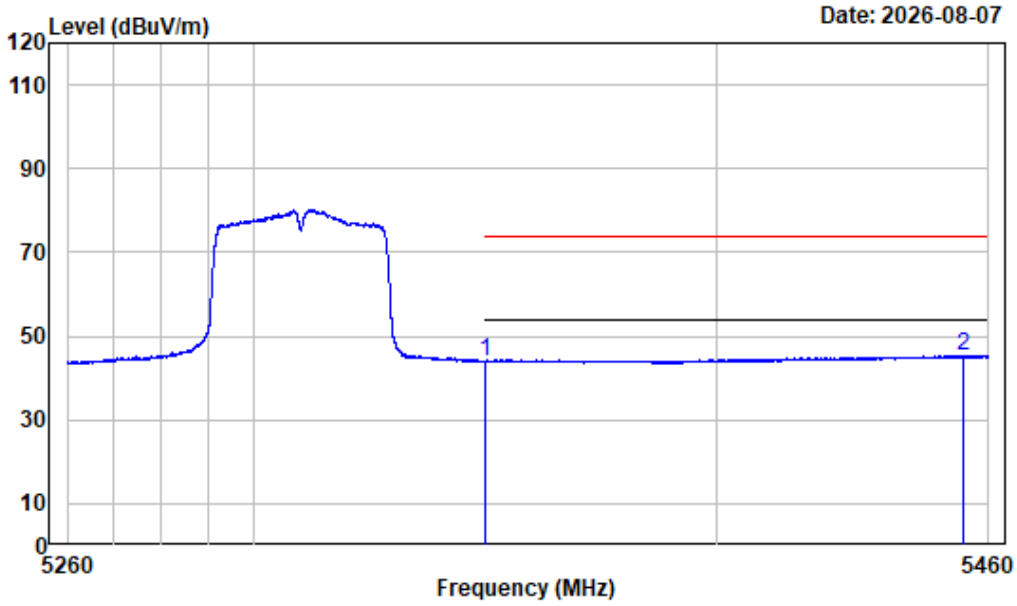

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.70	44.04	54.00	-9.96	Average
2	5454.550	-6.85	52.16	45.31	54.00	-8.69	Average


Left Band edge_Horizontal_Peak_802.11ac-vht80_5290MHz

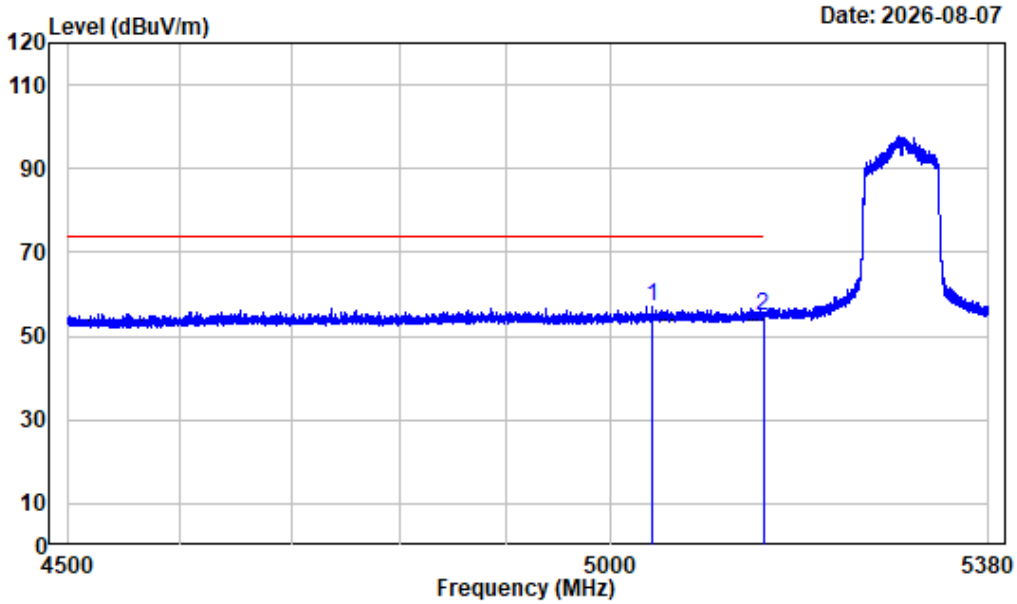

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5041.090	-8.08	64.98	56.90	74.00	-17.10	Peak
2	5150.000	-7.96	62.88	54.92	74.00	-19.08	Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5290MHz

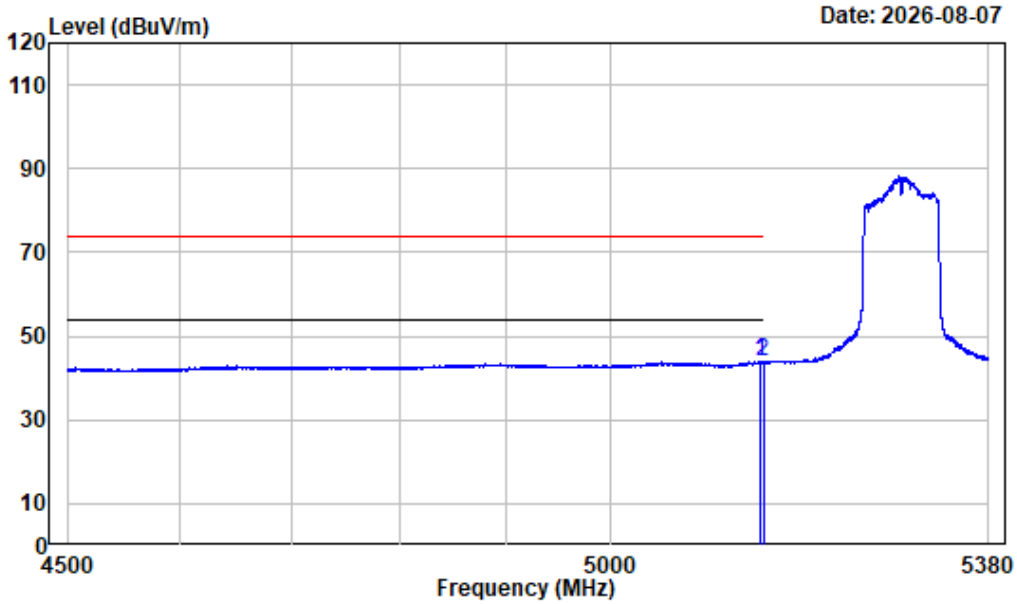

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.010	-7.97	51.82	43.85	54.00	-10.15	Average
2	5150.000	-7.96	51.79	43.83	54.00	-10.17	Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5290MHz

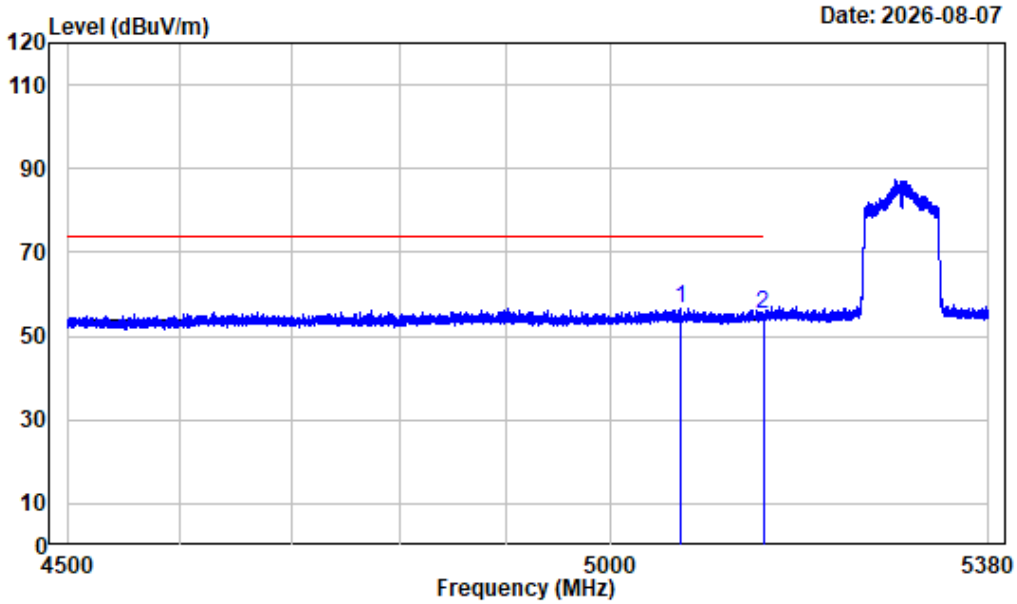

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5068.810	-8.05	64.61	56.56	74.00	-17.44	Peak
2	5150.000	-7.96	63.02	55.06	74.00	-18.94	Peak


Left Band edge_Vertical_Average_802.11ac-vht80_5290MHz

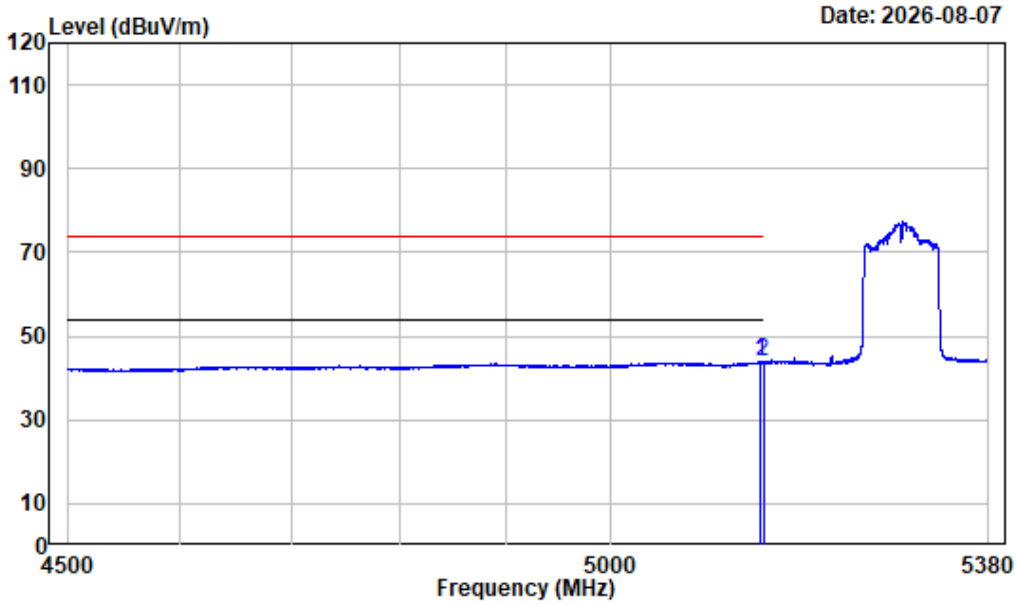

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.570	-7.97	51.91	43.94	54.00	-10.06	Average
2	5150.000	-7.96	51.85	43.89	54.00	-10.11	Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5290MHz

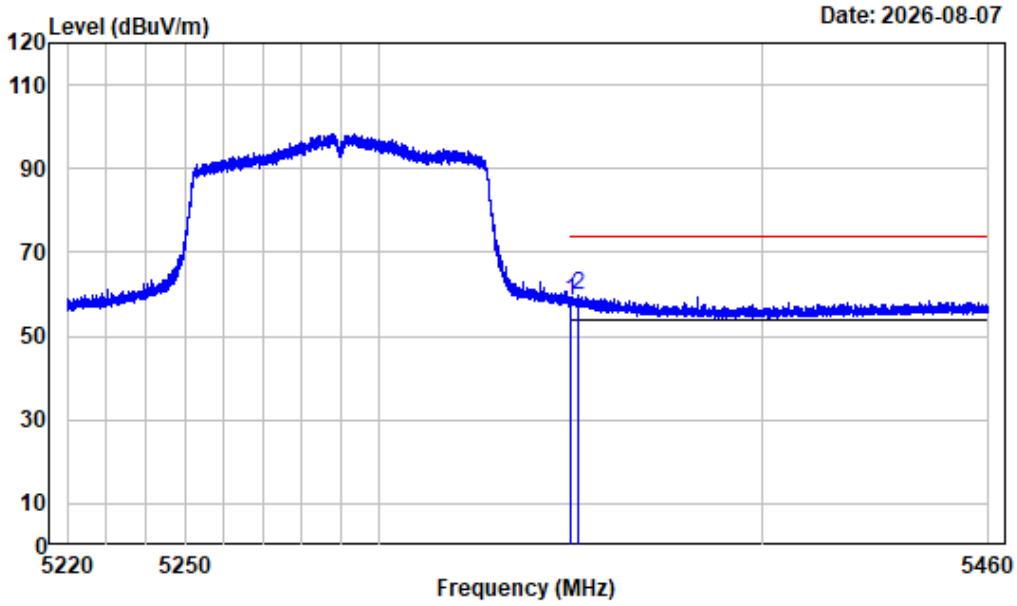

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	65.94	58.28	74.00	-15.72	Peak
2	5351.700	-7.66	67.53	59.87	74.00	-14.13	Peak


Right Band edge_Horizontal_Average_802.11ac-vht80_5290MHz

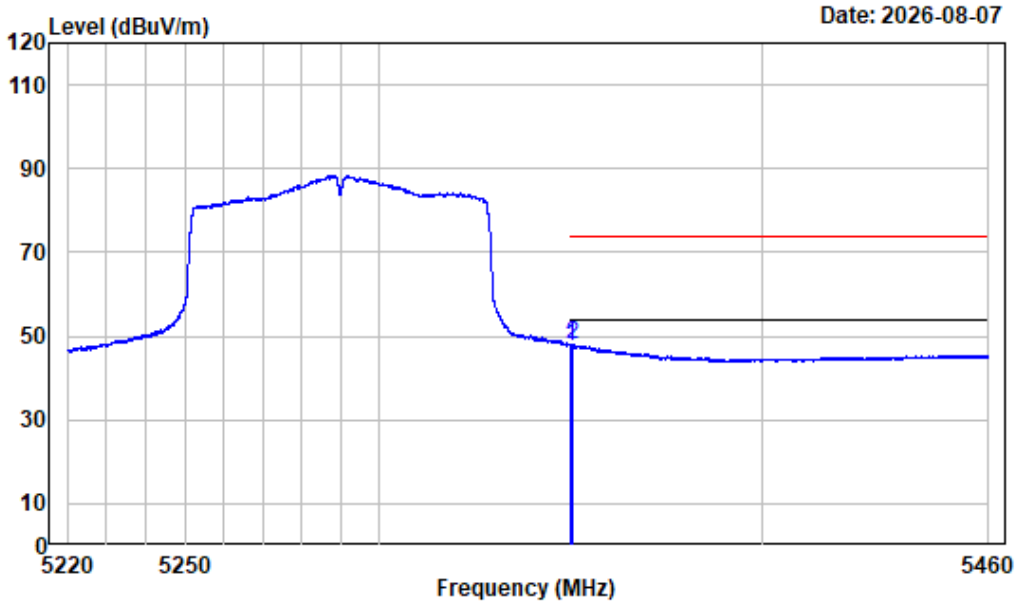

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	55.43	47.77	54.00	-6.23	Average
2	5350.200	-7.66	55.88	48.22	54.00	-5.78	Average


Right Band edge_Vertical_Peak_802.11ac-vht80_5290MHz

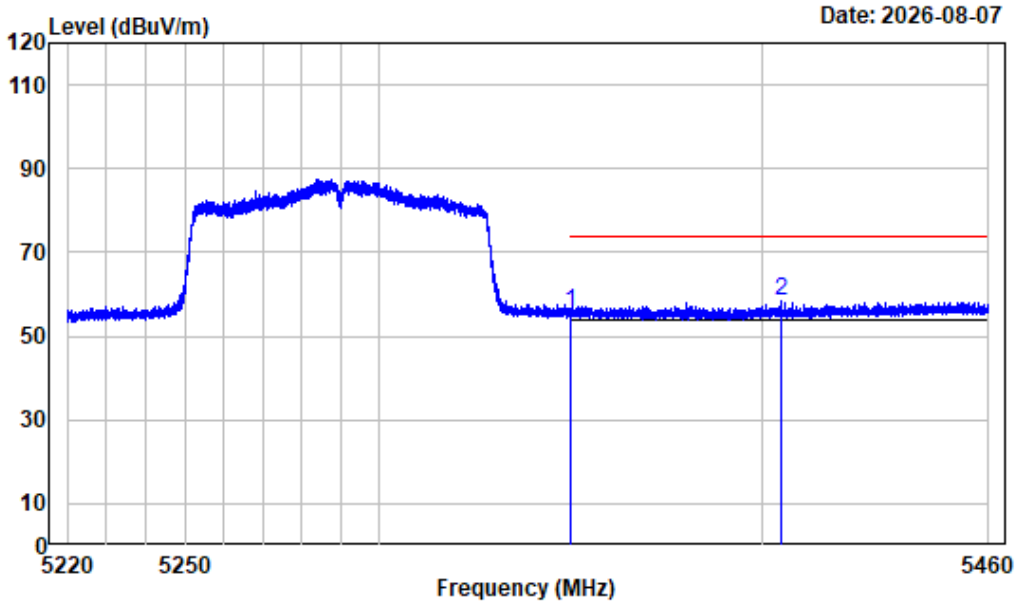

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.16	55.50	74.00	-18.50	Peak
2	5405.250	-7.42	65.69	58.27	74.00	-15.73	Peak


Right Band edge_Vertical_Average_802.11ac-vht80_5290MHz

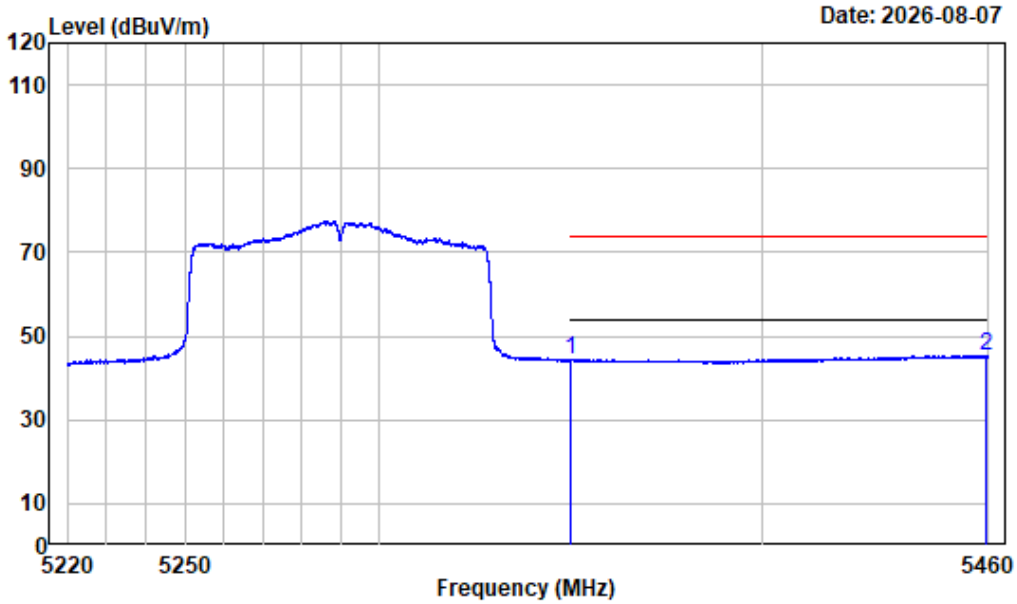

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.91	44.25	54.00	-9.75	Average
2	5459.460	-6.84	52.19	45.35	54.00	-8.65	Average


Left Band edge_Horizontal_Peak_802.11ax-hew20_5260MHz

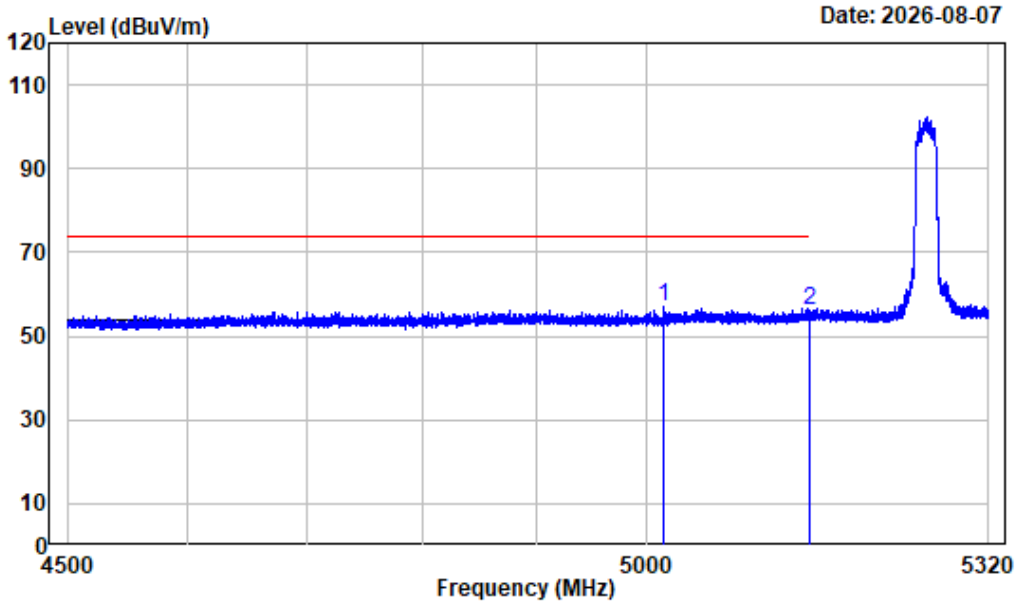

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5014.345	-8.40	65.26	56.86	74.00	-17.14	Peak
2	5150.000	-7.96	64.06	56.10	74.00	-17.90	Peak


Left Band edge_Horizontal_Average_802.11ax-hew20_5260MHz

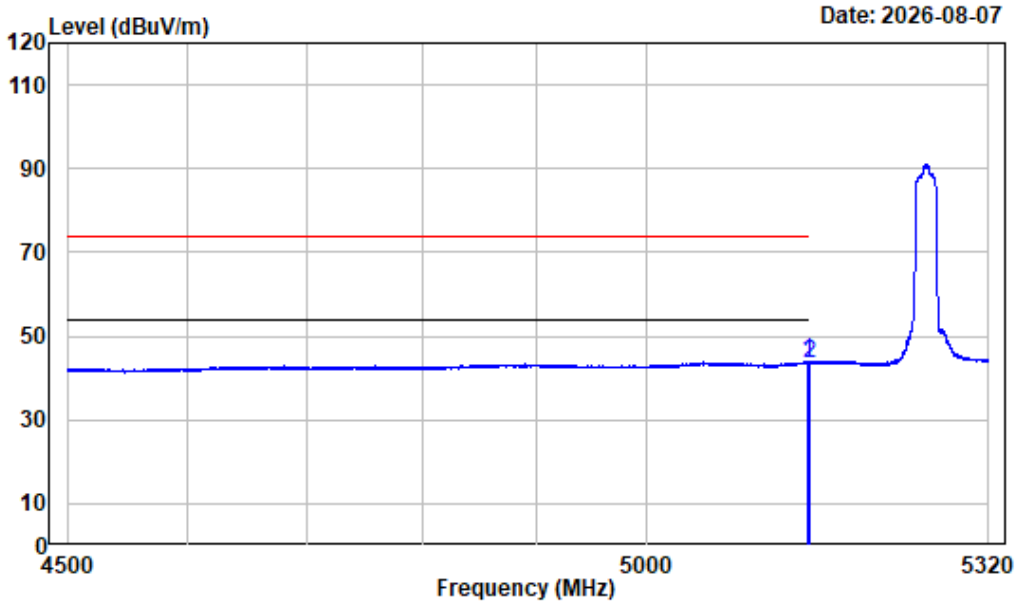

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.518	-7.96	51.98	44.02	54.00	-9.98	Average
2	5150.000	-7.96	51.60	43.64	54.00	-10.36	Average


Left Band edge_Vertical_Peak_802.11ax-hew20_5260MHz

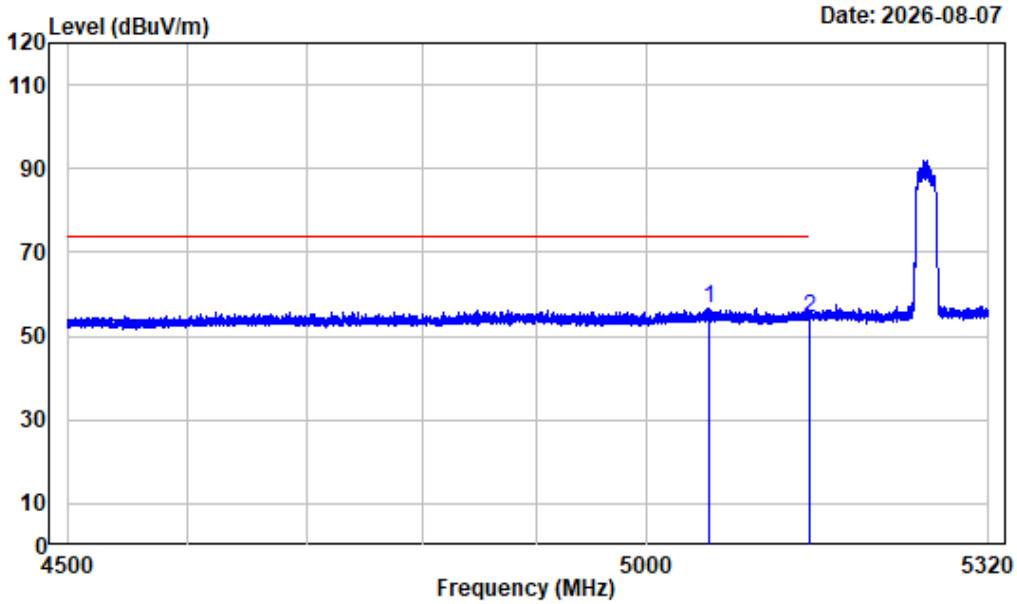

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5056.370	-8.00	64.63	56.63	74.00	-17.37	Peak
2	5150.000	-7.96	62.35	54.39	74.00	-19.61	Peak


Left Band edge_Vertical_Average_802.11ax-hew20_5260MHz

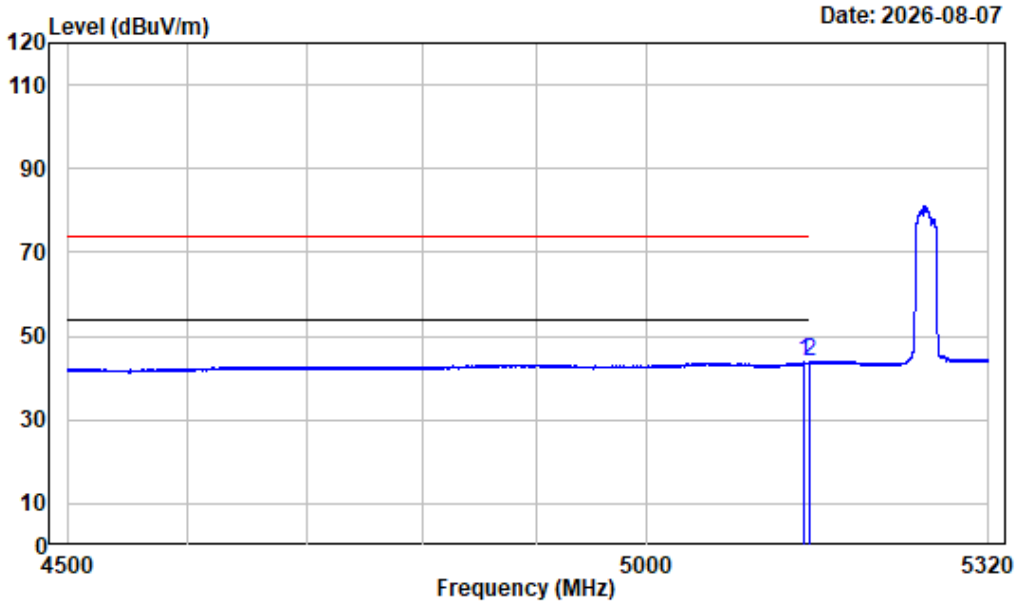

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.033	-7.98	51.80	43.82	54.00	-10.18	Average
2	5150.000	-7.96	51.67	43.71	54.00	-10.29	Average


Right Band edge_Horizontal_Peak_802.11ax-hew20_5320MHz

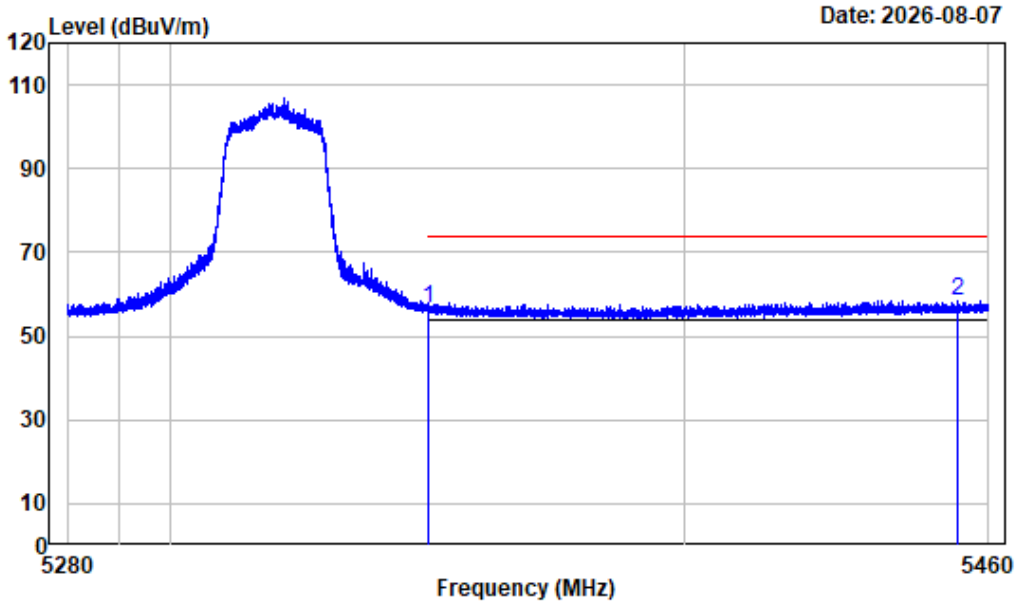

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	64.11	56.45	74.00	-17.55	Peak
2	5453.768	-6.85	65.39	58.54	74.00	-15.46	Peak


Right Band edge_Horizontal_Average_802.11ax-hew20_5320MHz

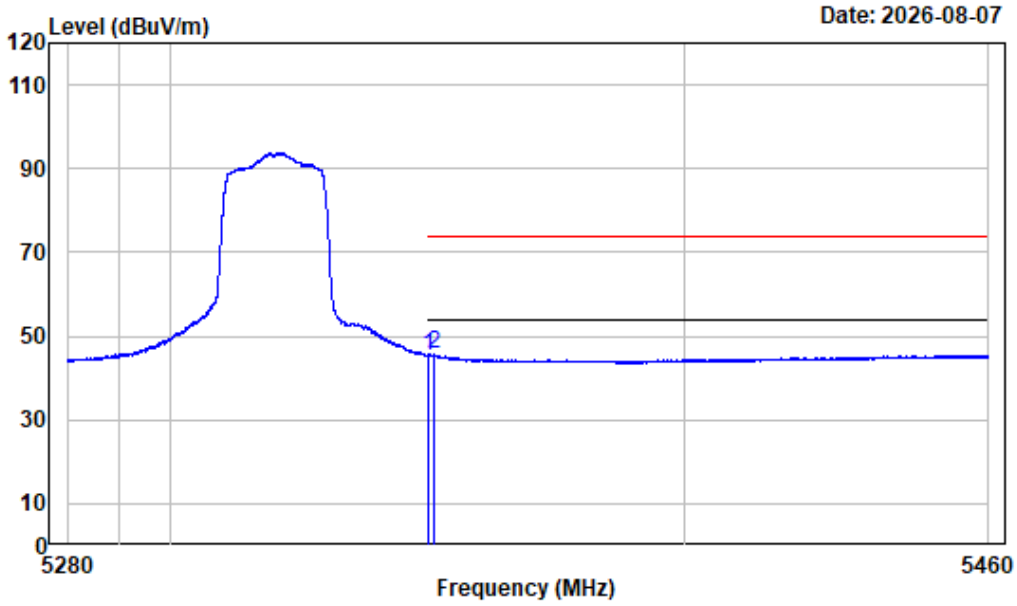

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	52.98	45.32	54.00	-8.68	Average
2	5350.987	-7.65	53.27	45.62	54.00	-8.38	Average


Right Band edge_Vertical_Peak_802.11ax-hew20_5320MHz

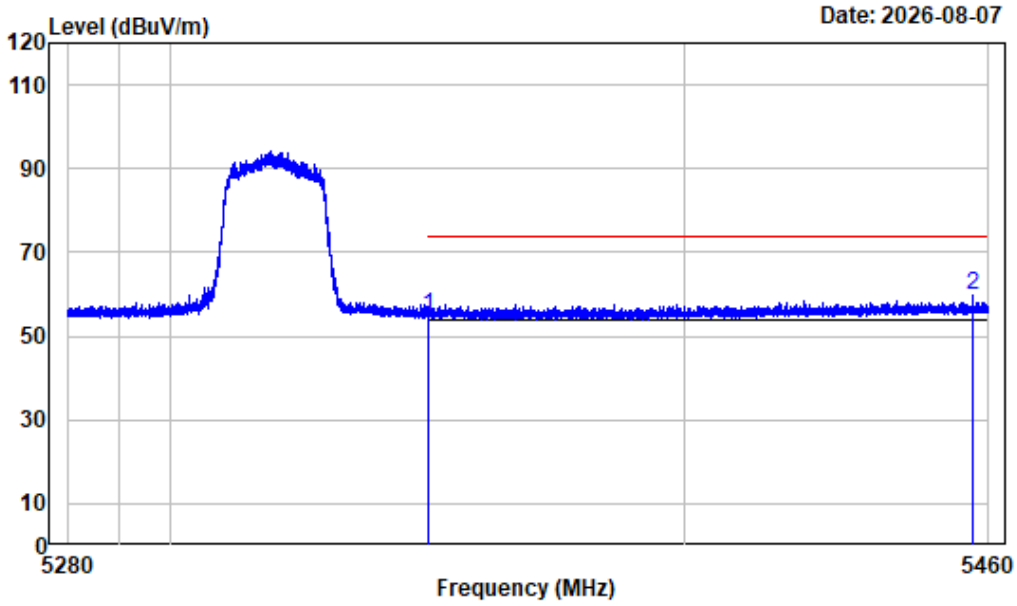

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	62.62	54.96	74.00	-19.04	Peak
2	5456.985	-6.85	66.46	59.61	74.00	-14.39	Peak


Right Band edge_Vertical_Average_802.11ax-hew20_5320MHz

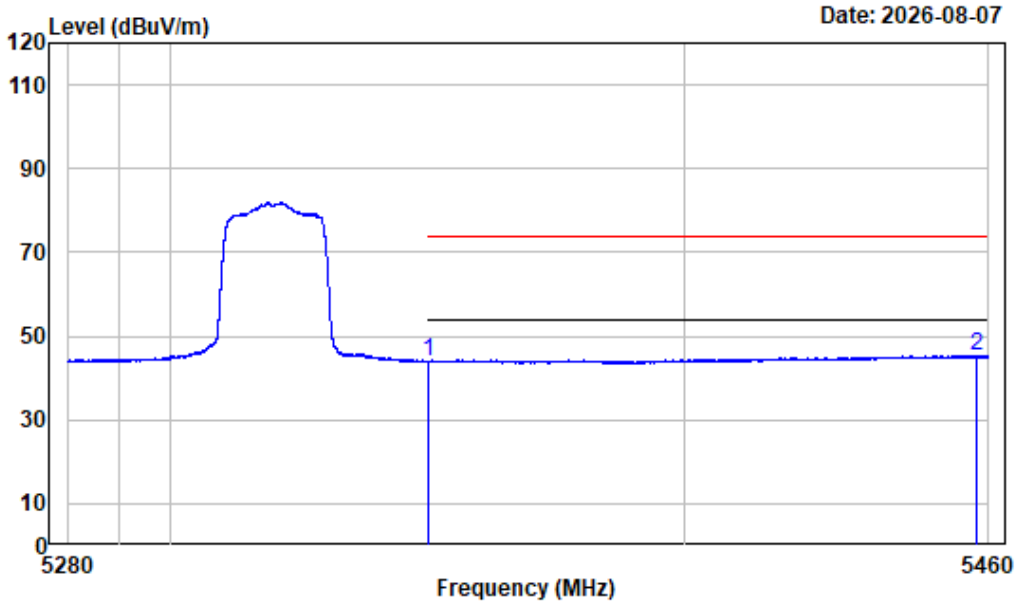

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.53	43.87	54.00	-10.13	Average
2	5457.525	-6.85	52.16	45.31	54.00	-8.69	Average


Left Band edge_Horizontal_Peak_802.11ax-hew40_5270MHz

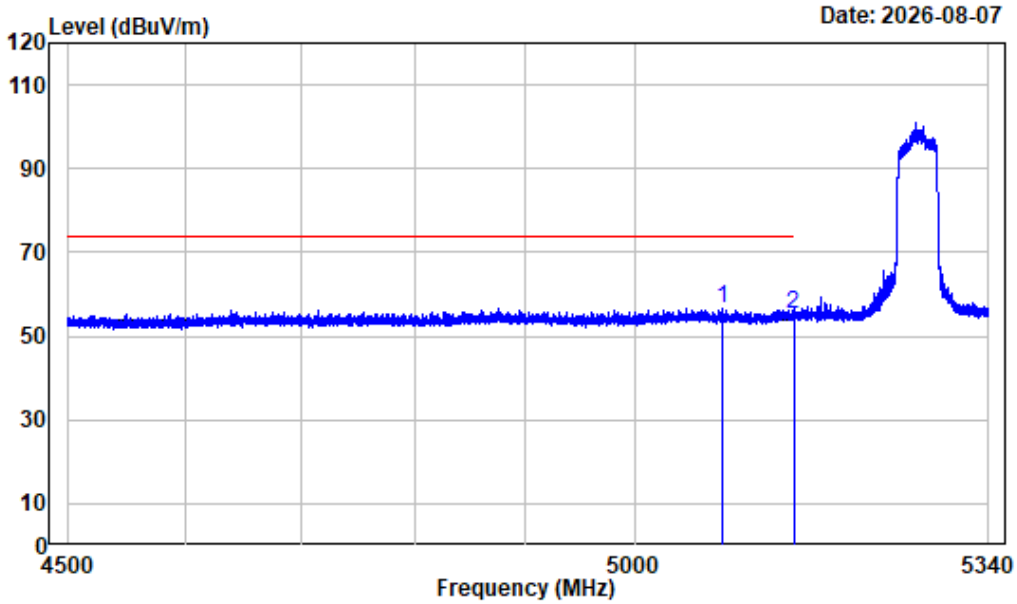

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5082.960	-8.11	64.70	56.59	74.00	-17.41	Peak
2	5150.000	-7.96	63.04	55.08	74.00	-18.92	Peak


Left Band edge_Horizontal_Average_802.11ax-hew40_5270MHz

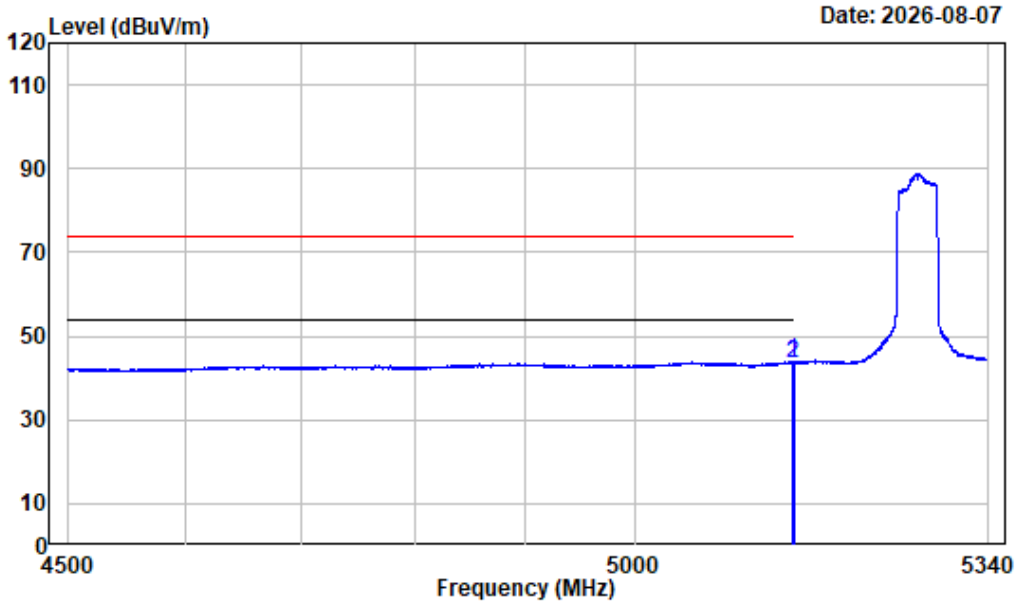

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.635	-7.96	51.81	43.85	54.00	-10.15	Average
2	5150.000	-7.96	51.64	43.68	54.00	-10.32	Average


Left Band edge_Vertical_Peak_802.11ax-hew40_5270MHz

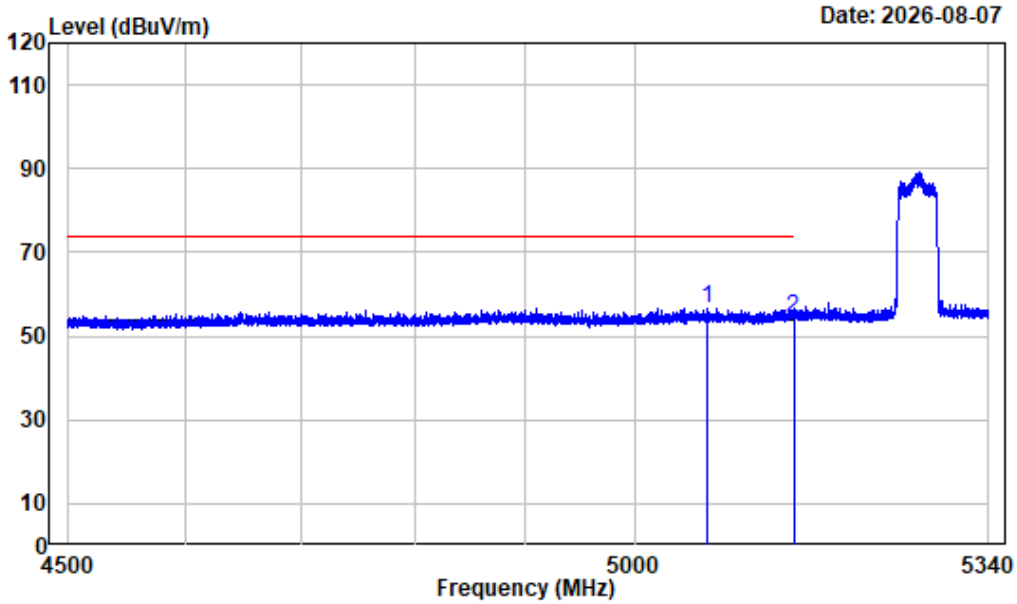

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5068.680	-8.06	64.85	56.79	74.00	-17.21	Peak
2	5150.000	-7.96	62.13	54.17	74.00	-19.83	Peak


Left Band edge_Vertical_Average_802.11ax-hew40_5270MHz

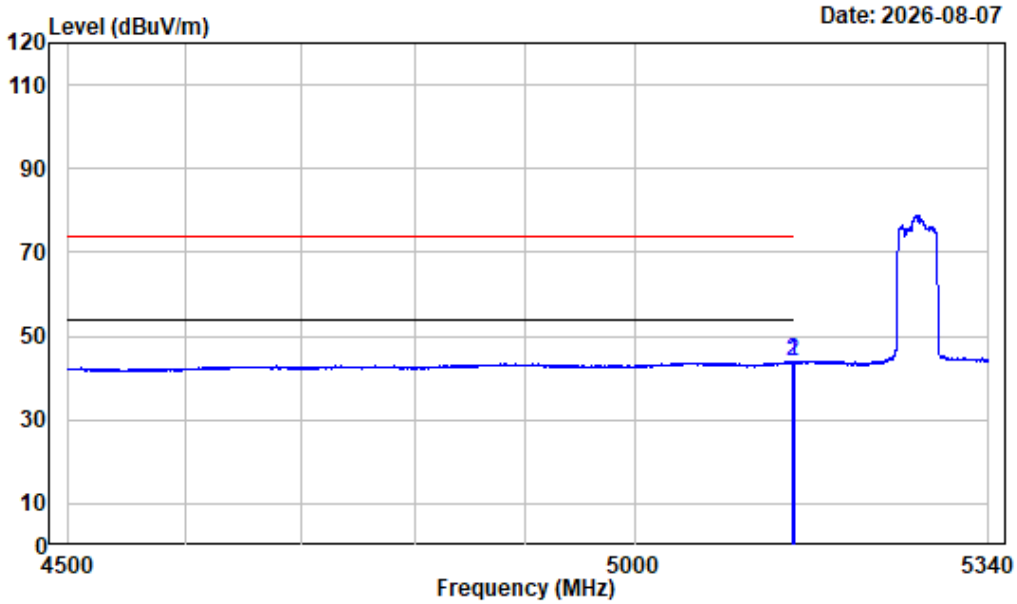

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.375	-7.96	51.85	43.89	54.00	-10.11	Average
2	5150.000	-7.96	51.68	43.72	54.00	-10.28	Average


Right Band edge_Horizontal_Peak_802.11ax-hew40_5310MHz

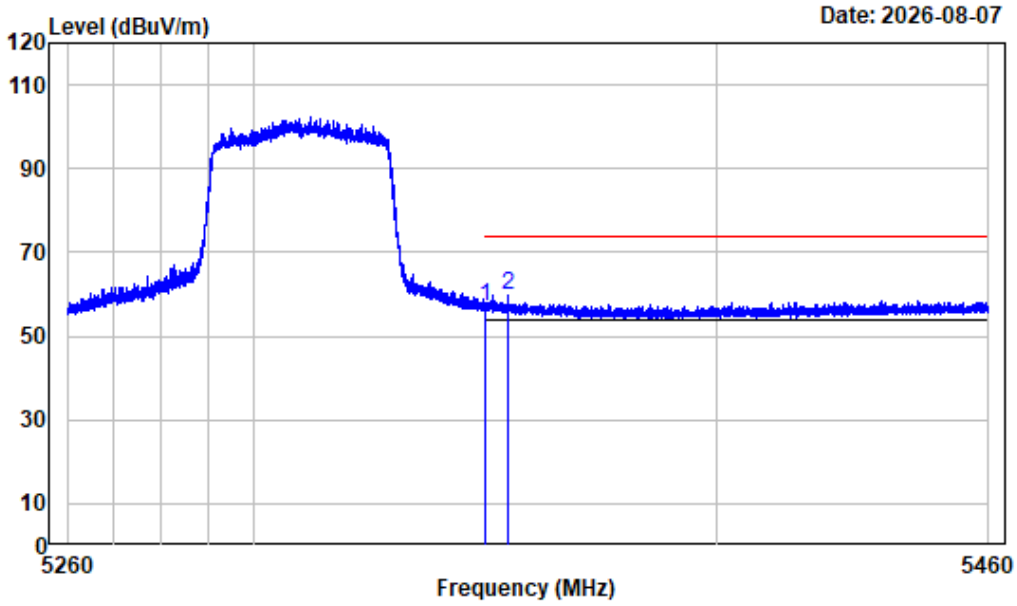

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	64.49	56.83	74.00	-17.17	Peak
2	5354.725	-7.64	67.40	59.76	74.00	-14.24	Peak


Right Band edge_Horizontal_Average_802.11ax-hew40_5310MHz

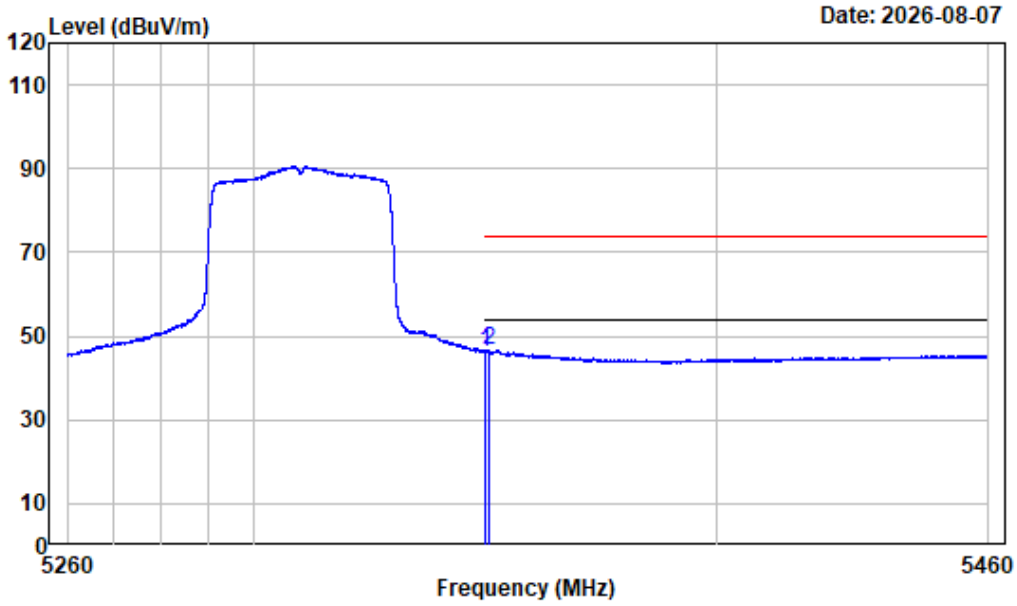

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	54.04	46.38	54.00	-7.62	Average
2	5350.450	-7.66	54.24	46.58	54.00	-7.42	Average


Right Band edge_Vertical_Peak_802.11ax-hew40_5310MHz

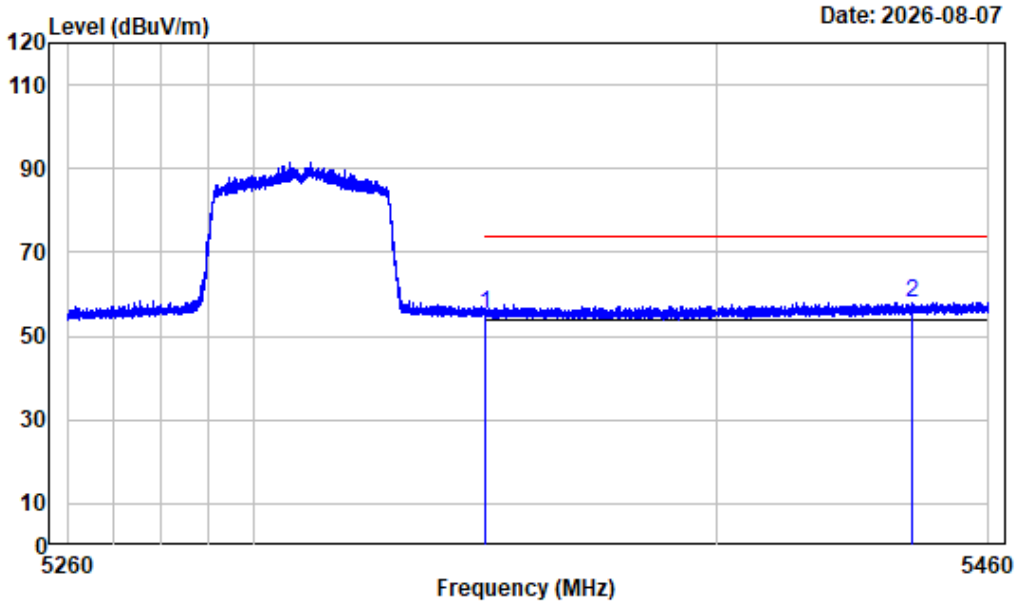

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	63.12	55.46	74.00	-18.54	Peak
2	5443.300	-6.94	65.12	58.18	74.00	-15.82	Peak


Right Band edge_Vertical_Average_802.11ax-hew40_5310MHz

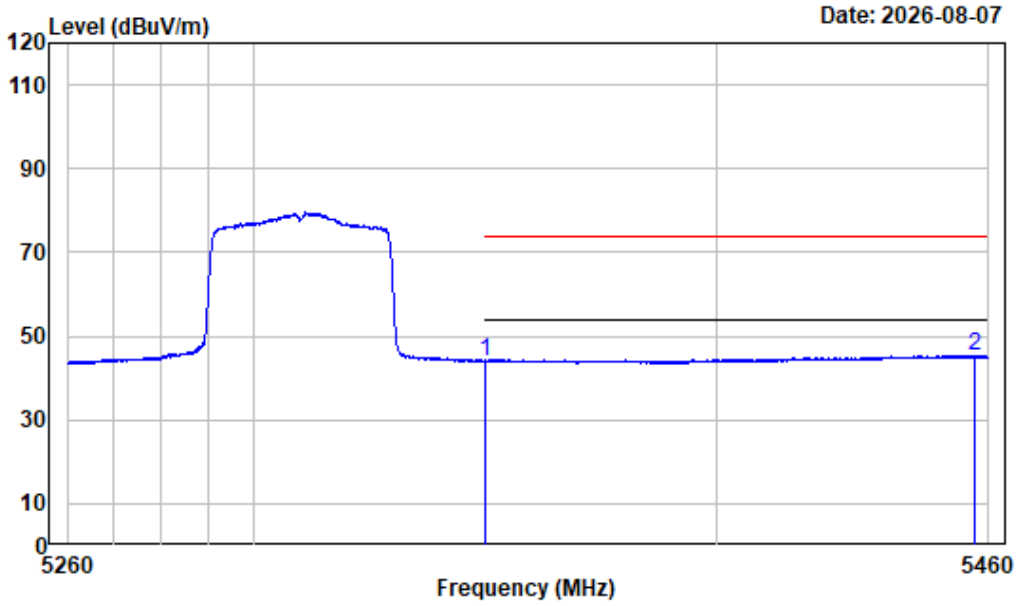

Condition : Vertical
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-7.66	51.78	44.12	54.00	-9.88	Average
2	5457.125	-6.85	52.31	45.46	54.00	-8.54	Average

Left Band edge_Horizontal_Peak_802.11ax-hew80_5290MHz

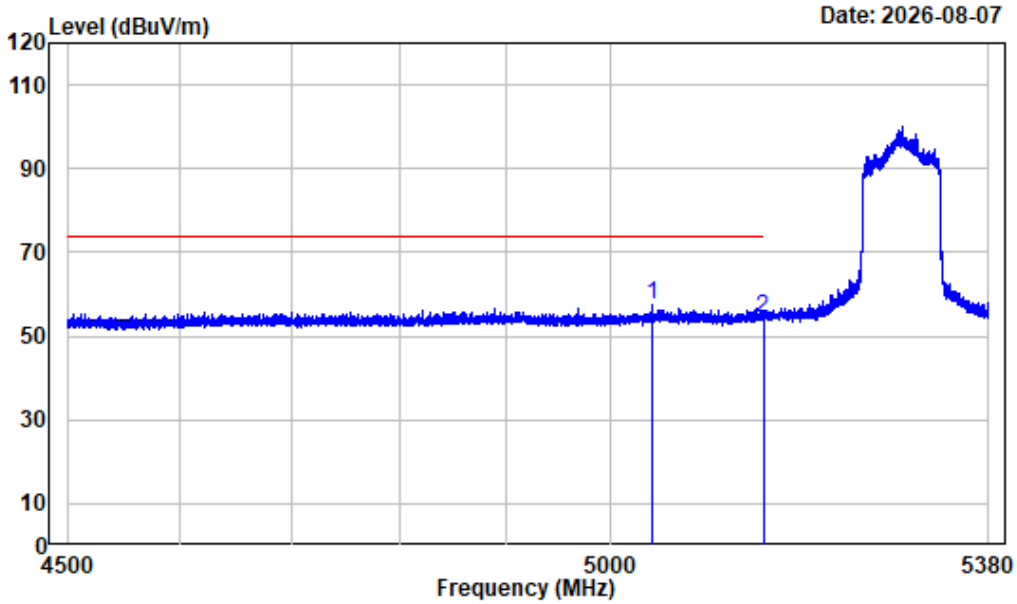

Condition : Horizontal
Project No. : 2601V68095E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5040.760	-8.10	65.65	57.55	74.00	-16.45	Peak
2	5150.000	-7.96	62.24	54.28	74.00	-19.72	Peak