

#01_NFC_Back_0mm_13.56MHz

Communication System: NFC; Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_4~250_220617 Medium parameters used : $f = 13.56$ MHz; $\sigma = 0.728$ S/m; $\epsilon_r = 53.767$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration


- Probe: EX3DV4 - SN3925; ConvF(18.24, 18.24, 18.24) @ 13.56 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2021/11/22
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Are Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = n.a Power Drift = n.a

Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

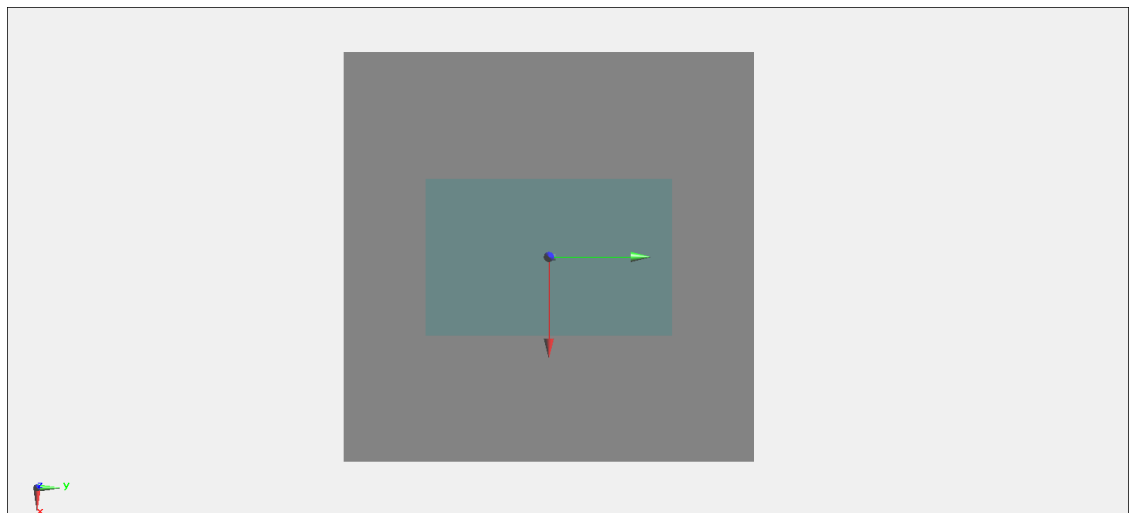

0 dB = 0 W/kg = -999.00 dBW/kg

#02_Bluetooth_LE-1Mbps_Back_0mm_Ch0

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.201

Medium: HSL_2450_220617 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 38.98$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3925; ConvF(8.2, 8.2, 8.2) @ 2402 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2021/11/22
- Phantom: SAM_Left; Type: QD 000 P40 CD; Serial: TP:1685
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.187 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.591 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

