

Test Site:
FCC Test Site No.: 96997



BUREAU
VERITAS

ECL-EMC Test Report No.: 16-010

Equipment under test: **ION-U H 7P/80-85P/17EP/19P**
1700MHz Path

FCC ID: **XS5-UH7817E19P**

Type of test: **FCC 47 CFR Part 27 Subpart C: 2016**
Miscellaneous Wireless Communication Services

Measurement Procedures: 47 CFR Parts 2 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
Part 27:2016 (*Miscellaneous Wireless Communication Services*),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*

Test result: **Passed**

Date of issue:	15.02.16			Signature:
Issue-No.:	01	Author:	 Tom Zahlmann Test engineer	Digitally signed by Tom Zahlmann DN: cn=Tom Zahlmann, o=Bureau Veritas CPS, ou=ECL, email=tom.zahlmann@de.bureauveritas.com, c=DE Date: 2016.02.15 16:18:20 +01'00'
Date of delivery:	25.01.16	Checked:	 Werner Haas Test engineer	Digital unterschrieben von Werner Haas DN: cn=Werner Haas, o=Bureau Veritas CPS, ou=ECL, email=werner.haas@de.bureauveritas.com, c=DE Datum: 2016.02.15 16:25:35 +01'00'
Test dates:	15.12.15 – 25.01.16			
Pages:	58			



Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0

Fax: +49 (0)9099 69 140

Test Location: Bureau Veritas Consumer Products Services
Germany GmbH
European Compliance Laboratory (ECL)
Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

General:

The purpose of this report is to show compliance to the FCC regulations for devices operating under Part N°27 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	5
2	EQUIPMENT UNDER TEST (E.U.T.)	6
2.1	DESCRIPTION	6
2.1.1	DOWNLINK	6
2.1.2	UPLINK	6
2.1.3	DESCRIPTION OF EUT	7
2.1.4	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	8
2.1.5	DOWNLINK SYSTEM GAIN AND OUTPUT POWER.....	8
3	TEST SITE (ANDREW BUCHDORF)	9
3.1	TEST ENVIRONMENT	9
3.2	TEST EQUIPMENT	9
3.3	INPUT AND OUTPUT LOSSES	10
3.4	MEASUREMENT UNCERTAINTY	10
4	TEST SITE (BUREAU VERITAS CONSUMER PRODUCTS SERVICES)	10
5	RF POWER OUT: §27.50, §2.1046	11
5.1	LIMIT.....	11
5.2	TEST METHOD	11
5.3	TEST RESULTS	12
5.3.1	DOWNLINK.....	12
5.3.1.1	CDMA	14
5.3.1.2	W-CDMA.....	14
5.3.1.3	LTE	15
5.3.2	UPLINK	15
5.4	SUMMARY TEST RESULT.....	15
6	OCCUPIED BANDWIDTH: §2.1049	16
6.1	LIMIT.....	16
6.2	TEST METHOD	16
6.3	TEST RESULTS	17
6.3.1	DOWNLINK.....	17
6.3.1.1	CDMA	18
6.3.1.2	W-CDMA.....	19
6.3.1.3	LTE	20
6.3.2	26dB BANDWIDTH.....	21
6.3.2.1	CDMA	21
6.3.2.2	W-CDMA.....	22
6.3.2.3	LTE	23
6.3.3	UPLINK	24
6.4	SUMMARY TEST RESULT.....	24
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §27.53, §2.1051.....	25
7.1	LIMIT.....	25



7.2	TEST METHOD	25
7.3	TEST RESULTS	26
7.3.1	DOWNLINK	26
7.3.1.1	CDMA	27
7.3.1.2	W-CDMA	27
7.3.1.3	LTE	28
7.3.2	UPLINK	28
7.4	SUMMARY TEST RESULT	28
8	INTERMODULATION: §27.53, §2.1051	29
8.1	LIMIT	29
8.2	TEST METHOD	29
8.3	TEST RESULTS	30
8.3.1	DOWNLINK	30
8.3.1.1	CDMA	31
8.3.1.2	WCDMA	32
8.3.1.3	LTE	33
8.3.2	UPLINK	34
8.4	SUMMARY TEST RESULT	34
9	OUT OF BAND REJECTION	35
9.1	LIMIT	35
9.2	TEST METHOD	35
9.3	TEST RESULTS	35
9.3.1	DOWNLINK	36
9.3.2	UPLINK	36
9.4	SUMMARY TEST RESULT	36
10	FIELD STRENGTH OF SPURIOUS EMISSIONS: §27.53, §2.1053	37
10.1	METHOD OF MEASUREMENT	42
10.2	LIMIT	43
10.3	RECEIVER SETTINGS	43
10.4	CLIMATIC VALUES IN THE LAB	43
10.5	TEST RESULTS	44
10.5.1	30 MHz TO 1 GHz DOWNLINK (BOTTOM – MIDDLE – TOP)	44
10.5.2	30 MHz TO 1 GHz DOWNLINK (MIDDLE OF BOTH PATHS)	46
10.5.3	1 GHz – 18 GHz DOWNLINK (BOTTOM – MIDDLE – TOP)	48
10.5.4	1 GHz – 18 GHz DOWNLINK (MIDDLE OF BOTH PATHS)	51
10.5.5	18 GHz – 26 GHz DOWNLINK (BOTTOM – MIDDLE – TOP)	54
10.5.6	18 GHz – 26 GHz DOWNLINK (MIDDLE OF BOTH PATHS)	56
11	HISTORY	58



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	27.50(d)	2.1046	1640 Watts/MHz	Complies
Occupied Bandwidth	KDB 935210 D02 v02r01 D.3(j)	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	27.53(h)	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	27.53(m)	2.1053 TIA/EA-603	-13dBm E.I.R.P	Complies
Intermodulation	KDB 935210 D02 v02r01 D.3(i)	KDB 935210 D02 v02r01 D.3(i)	KDB 935210 D02 v02r01 D.3(i)	Complies
Frequency Stability	27.54	2.1055	Must stay in band	NA
Out of Band Rejection	KDB 935210 D02 v02	KDB 935210 D03 v02	KDB 935210 D03 v02	Complies

Frequency stability is given by: The system gets an electrical analog signal from the BSS which is converted into an analog optical signal, transmitted by the optical links and then reconverted in the Remote Unit into an analog electrical signal. During this process happens no frequency change/modification, so input and output have same frequency what can be seen under clause "Occupied Bandwidth".

2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	ION-U H 7P/80-85P/17EP/19P-Vac-M2	
Andrew Ident. Number	7698400-0003	
Serial no.(SN)	11	
Revision	00	
Software version and ID	1.69.0	
Type of modulation and Designator	CDMA (F9W)	☒
	W-CDMA (F9W)	☒
	LTE (G7D)	☒
Frequency Translation	F1-F1	☒
	F1-F2	☐
	N/A	☐
Band Selection	Software	☐
	Duplexer	☒
	Full band	☐

2.1.1 Downlink

Pass band	2110 MHz – 2180 MHz
Max. composite output power based on one carrier per path (rated)	43 dBm = 20W
MIMO max. composite output power based on one carrier per path (rated)	46.0 dBm = 40 W
System Gain*	10 dB @ Pout BTS of 33 dBm

*see 2.1.5

2.1.2 Uplink

Pass band	1710 MHz – 1780 MHz
Maximum rated output power	n. a.
System Gain*	n.a.

*see 2.1.5

Note: The EUT does not transmit over the air in the uplink direction.



2.1.3 Description of EUT

CommScope's ION-U H 7P/80-85P/17EP/19P-Vac-M2 is a multi-band, multi-operator Remote Unit. It is used in conjunction with a Master Unit in the ION optical distribution system. This system transports up to four frequency bands simultaneously, providing a cost-effective solution for distributing capacity from one or more base stations. In single use the ION-U H 7P/80-85P/17EP/19P-Vac-M2 is a SISO system. In combination with a ION-U EU H 7P/80-85P/17EP/19P-Vac-M2 and or ION-U EU H 23/23-Vac-M2 the ION-U system can use for MIMO application in all RF paths.

This Test Report describes only the approval of the 1700/2100 MHz Path.

The ION-U H 7P/80-85P/17EP/19P-Vac-M2 Repeater system consists of one 700 MHz path, one 800-850 MHz path, one 1700/2100 MHz path and one 1900 MHz path with the intended use of simultaneous transmission.

The antenna(s) used with device must be fixed-mounted on permanent structures.

2.1.4 Block diagram of measurement reference points

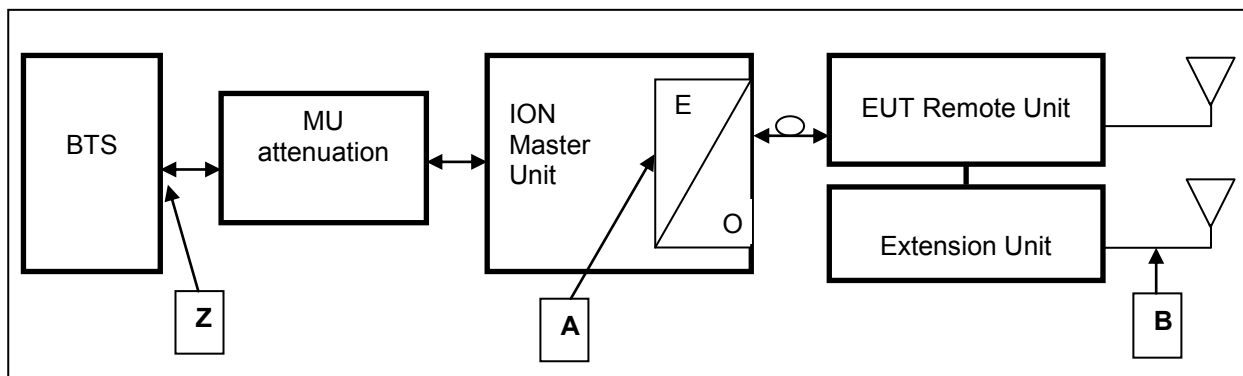


figure 2.1.4-#1 Block diagram of measurement reference points

Remote Unit (RU) is the EUT

O/E Optitcal/Electrical converter
MU Master Unit

Reference point A	MU	UL output,	DL input
Reference point B	Remote Unit	DL output,	UL input
Reference point Z	BTS	DL output,	UL input

Since a signal generator does not supply a good output signal with +33 or +43dBm, for the downlink measurement the MU Attenuation is not used.

That means for downlink measurements the signal generator is connected to measurement point A at the master optical / electrical converter and the analyzer to the measurement point B at the RU.

2.1.5 Downlink System Gain and Output Power

System optimized for BTS power (fixed value)	MU Attenuation (manual leveling)	Maximum rated input power at the MU OTRX (fixed value)	RU Gain (fixed value)	Maximum rated output power at RU Antenna port (fixed value)
Z		A	A to B	B
+33 dBm	55 dB	-22 dBm	+65 dB	+43.0 dBm @ 1 carrier
System Gain Z to B	+10 dB			
+43 dBm	65 dB	-22 dBm	+65 dB	+43.0 dBm @ 1 carrier
System Gain Z to B	+0 dB			

table 2.1.5-#1 Equipment under test (E.U.T.) Description Downlink System Gain and Output Power



3 Test site (Andrew Buchdorf)

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
9300	Network Analyzer	ZNB 20	R&S	101490	6/2016
9236	Spectrum Analyzer	FSV 30	R&S	101345	8/2016
8990	Generator	SMJ 100A	R&S		08/2016
9069	Generator	SMBV100A	R&S		06/2016
8667	Power Meter	E4418B	Agilent		04/2016
8668	Power Sensor	E9300B	Agilent		04/2016
7538	RF-Cable N/N	Testpro 4.2 DC-18GHz	Radial		CIU
7158	RF-Cable N/N	Testpro 4.2 DC-18GHz	Radial		CIU
-----	RF-Cable N/SMA	Testpro 4.2 DC-18GHz	Radial		CIU
-----	RF-Cable N/SMA	Testpro 4.2 DC-18GHz	Radial		CIU
7470	Notch filter	WRCTG2110	Wainwright Instruments	4	CIU
7406	Switch-Matrix		Andrew		CIU

CIU = Calibrate in use



3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k=2$. The true value is located in the corresponding interval with a probability of 95 %.

4 Test site (Bureau Veritas Consumer Products Services)

FCC Test site: 96997

See relevant dates under section 10 of this test report.

5 RF Power Out: §27.50, §2.1046

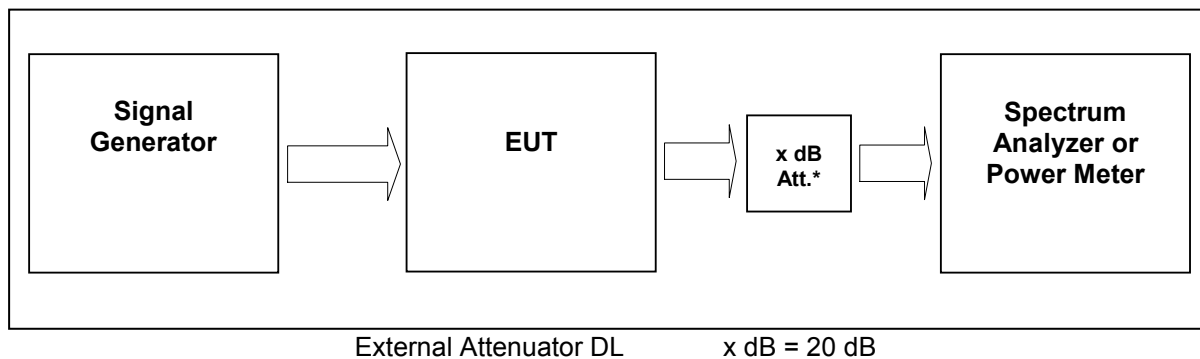


figure 5-#1 Test setup: RF Power Out: §27.50, §2.1046

Measurement uncertainty	± 0,38 dB
Test equipment used	9300, 9069, 9236, 8990, 8667, 8668, 7406

5.1 Limit

Minimum standard:

Para. No.27.50(d)

(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

- (i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;
- (ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

5.2 Test method

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations

5.3 Test results

Detector RMS.

Test signal CDMA

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0

16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA

Signal waveform according to Test Model 1 of standard specification 3GPP TS25.141. Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.

Test signal LTE:

Signal waveform according to Test Model 1.1, E-TM1.1, clause 6.1.1.1-1, table 6.1.1.1-1 of standard specification 3GPP TS 36.141 V9.3.0 (2010-03).

5.3.1 Downlink

Modulation	Measured at	Path	RBW VBW Span	RF Power (dBm)	RF Power (W)	MIMO* RF Power (W)	Plot -
CDMA	Middle	2145 MHz	3MHz 10MHz 15MHz	43,0	20	40	5.3.1.1 #1
WCDMA	Middle	2145 MHz	10MHz 10MHz 50MHz	43,0	20	40	5.3.1.2 #1
LTE	Middle	2145 MHz	3MHz 10MHz 50MHz	43,0	20	40	5.3.1.3 #1
Maximum output power = 43.0 dBm = 20 W							
Limit Maximum output power (erp) = 1000 W							

table 5.3.1-#1 RF Power Out: §27.50, §2.1046 Test results Downlink

SISO:

The max RF Power out is 43 dBm, so the maximum antenna gain (x) can be calculated as follow:

Limit = 1000W (erp) = 60 dBm

Info: 1000W (erp) = 1640W (eirp)

$60 \text{ dBm} > 43 \text{ dBm} + x \rightarrow x = 60 \text{ dBm} - 43 \text{ dBm} = 17 \text{ dBd}$

$x \text{ dBi} = 17 \text{ dBd} + 2.15 = 19.15 \text{ dBi}$

=> The antenna that will be used for the complete system have to have a gain lower than 19.15 dBi, relative to a dipol.

***MIMO:**

MIMO path test results see RF Test Report FCC ID XS5-UEUH7817E19P.

If the DUT used in MIMO configuration according to KDB 662911, the MIMO Max RF Power is the sum of the RF power from the SISO path and MIMO path.

$$\text{MIMO Max RF Power} = \text{SISO path RF Power} + \text{MIMO path RF Power}$$

$$\text{MIMO Max RF Power} = 20 \text{ W} + 20 \text{ W} = 40 \text{ W} = 46 \text{ dBm}$$

The MIMO max RF Power out is 46 dBm, so the maximum antenna gain (x) can be calculated as follow:

$$\text{Limit} = 1000\text{W (erp)} = \mathbf{60 \text{ dBm}}$$

$$\text{Info: } 1000\text{W (erp)} = 1640\text{W (eirp)}$$

$$60 \text{ dBm} > 46 \text{ dBm} + x \quad \text{-----} \rightarrow \quad x = 60 \text{ dBm} - 46 \text{ dBm} = \mathbf{14 \text{ dBd}}$$


$$x \text{ dBi} = 14 \text{ dBd} + 2.15 = \mathbf{16.15 \text{ dBi}}$$

=> The antenna that will be used for the complete system have to have a gain lower than 16.15 dBi, relative to a dipol.

Modulation	Pin / dBm (Ref. point B)
CDMA	-22.0
WCDMA	-22.0
LTE	-22.0


table 5.3.1-#2 RF Power Out: §27.50, §2.1046 Test results Downlink Input power

5.3.1.1 CDMA

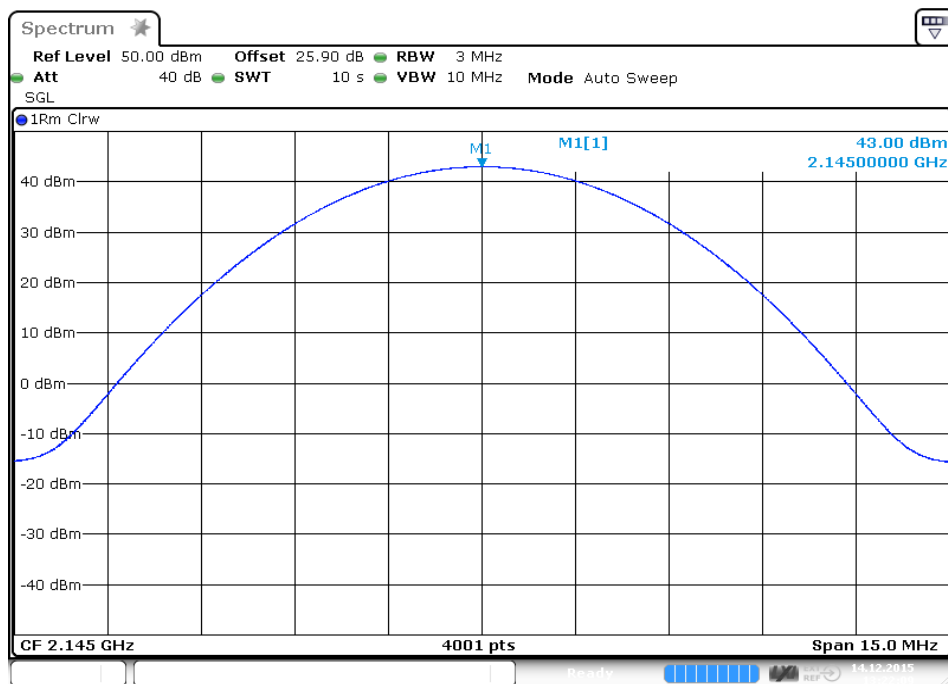

plot 5.3.1.1-#1 RF Power Out: §27.50, §2.1046; Test results; Downlink; CDMA Middle


5.3.1.2 W-CDMA

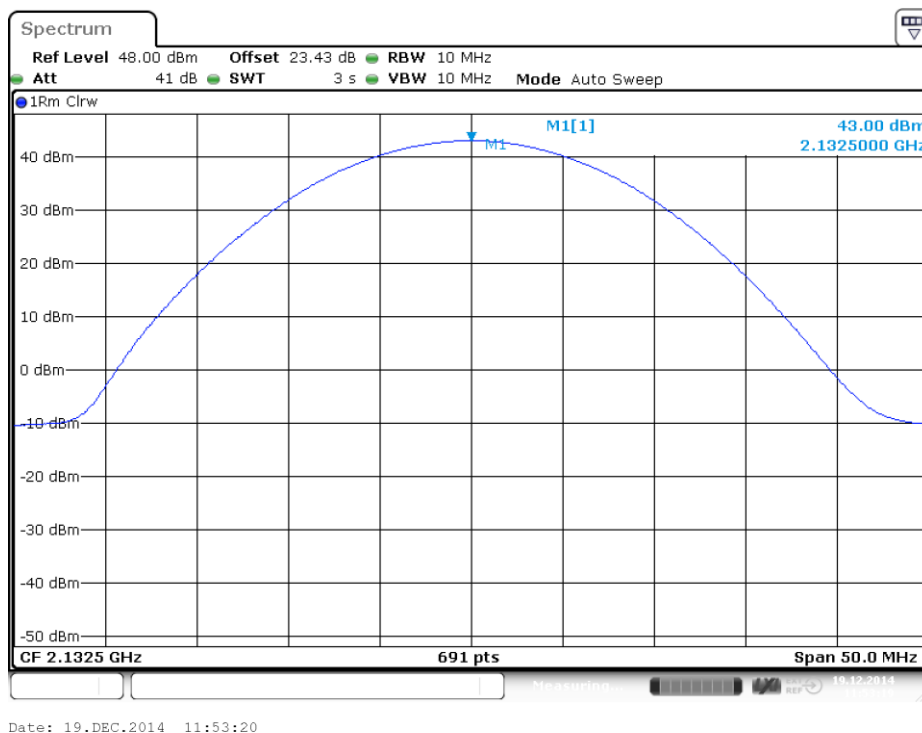

plot 5.3.1.2-#1 RF Power Out: §27.50, §2.1046; Test results; Downlink; W-CDMA Middle



5.3.1.3 LTE

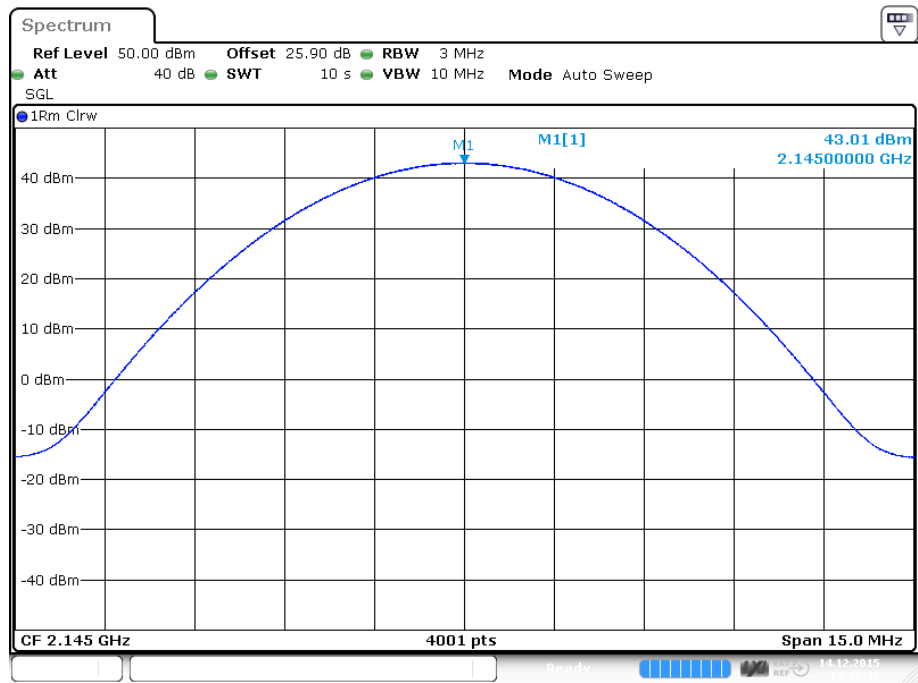

Date: 14 DEC 2015 14:47:35

plot 5.3.1.3-#1 RF Power Out: §27.50, §2.1046; Test results; Downlink; LTE Middle

5.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

5.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	16.12.2015

6 Occupied Bandwidth: §2.1049

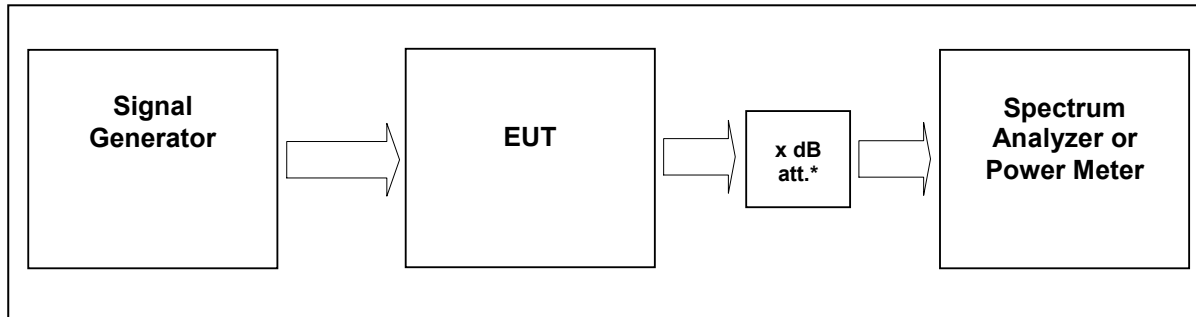

External Attenuator DL x dB = 20 dB
figure 6-#1 Test setup: Occupied Bandwidth: §2.1049

Measurement uncertainty	± 0,38 dB
Test equipment used	9300, 9069, 9236, 8990, 8667, 8668, 7406

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.



6.3 Test results

6.3.1 Downlink

Detector PK.


Modulation	Measured at	Fcenter / MHz	RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	2145	30kHz 300kHz 5MHz	1.2	6.3.1.1 #1, #2
WCDMA	Middle	2145	100kHz 1MHz 10MHz	4.2	6.3.1.2 #1, #2
LTE	Middle	2145	30 kHz 300 kHz 5 MHz	1.1	6.3.1.3 #1,#2

Modulation	Measured at	Fcenter / MHz	RBW VBW Span	26dB Bandwidth / MHz	Plot #
CDMA	Middle	2145	30kHz 300kHz 5MHz	1.4	6.3.2.1 #1, #2
WCDMA	Middle	2145	100kHz 1MHz 10MHz	4.7	6.3.2.2 #1, #2
LTE	Middle	2145	30 kHz 300 kHz 5 MHz	1.2	6.3.2.3 #1,#2


table 6.3-#1 Occupied Bandwidth: §2.1049 Test results Downlink

BUREAU
VERITAS

6.3.1.1 CDMA

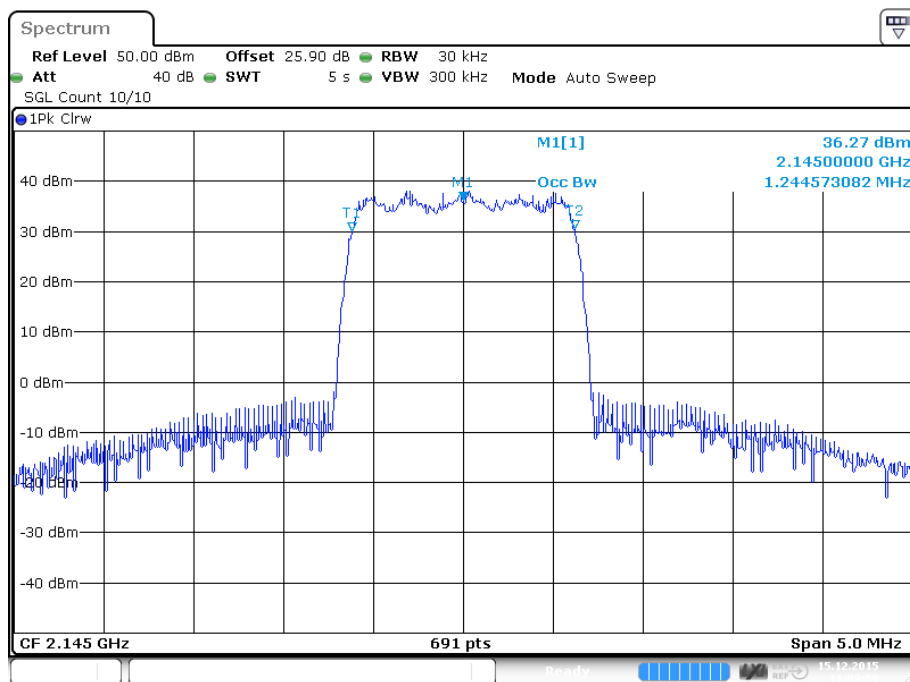


plot 6.3.1.1-#1 Occupied Bandwidth: \$2.1049; Test results; Downlink; CDMA Output

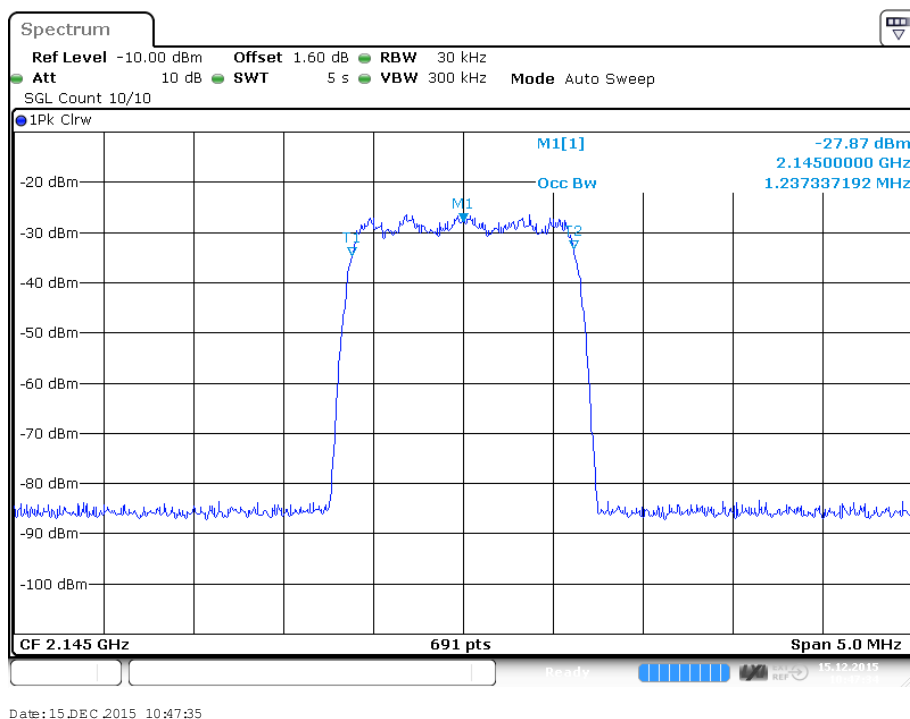


plot 6.3.1.1-#2 Occupied Bandwidth: \$2.1049; Test results; Downlink; CDMA Input



6.3.1.2 W-CDMA

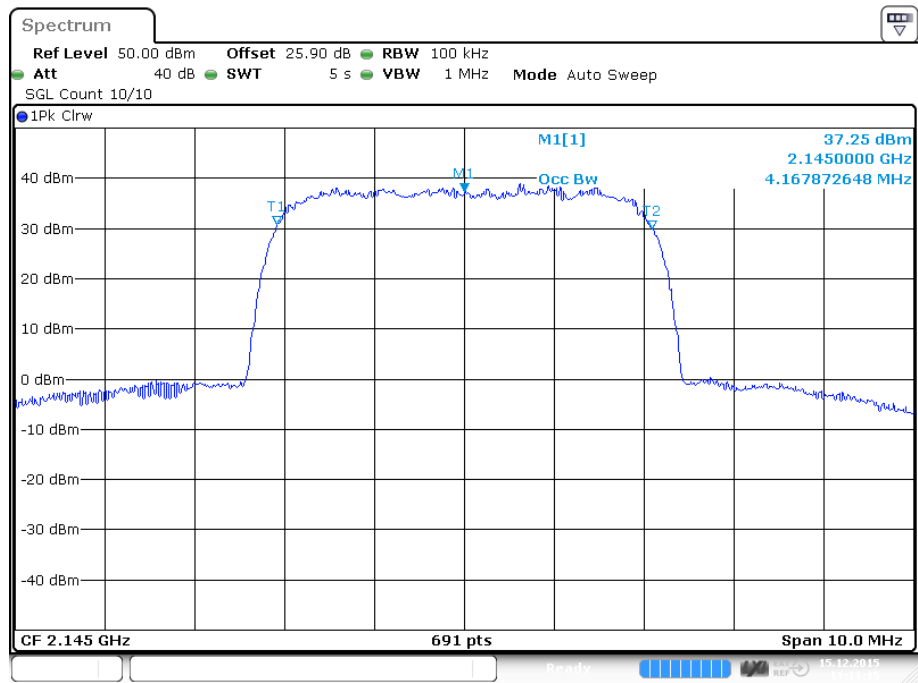


plot 6.3.1.2-#1 Occupied Bandwidth: \$2.1049; Test results; Downlink; W-CDMA Output

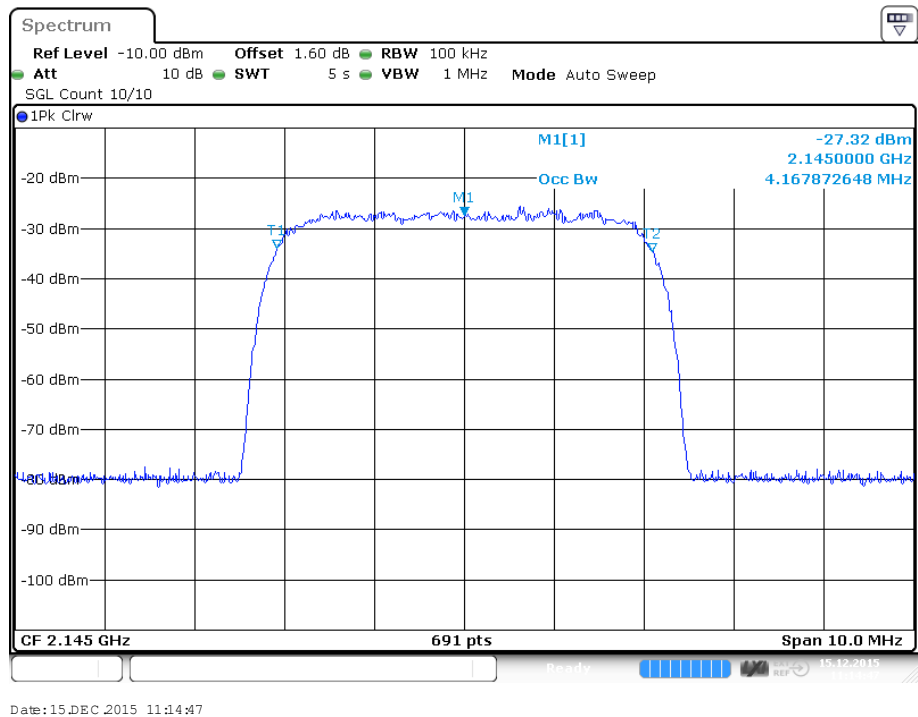


plot 6.3.1.2-#2 Occupied Bandwidth: \$2.1049; Test results; Downlink; W-CDMA Input



6.3.1.3 LTE

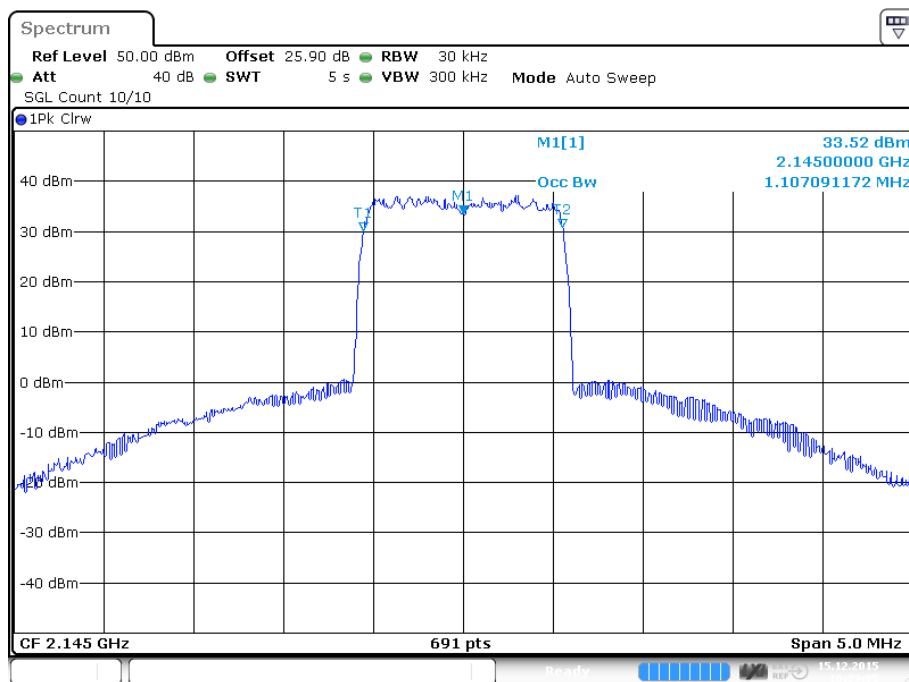


plot 6.3.1.3-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; LTE Output

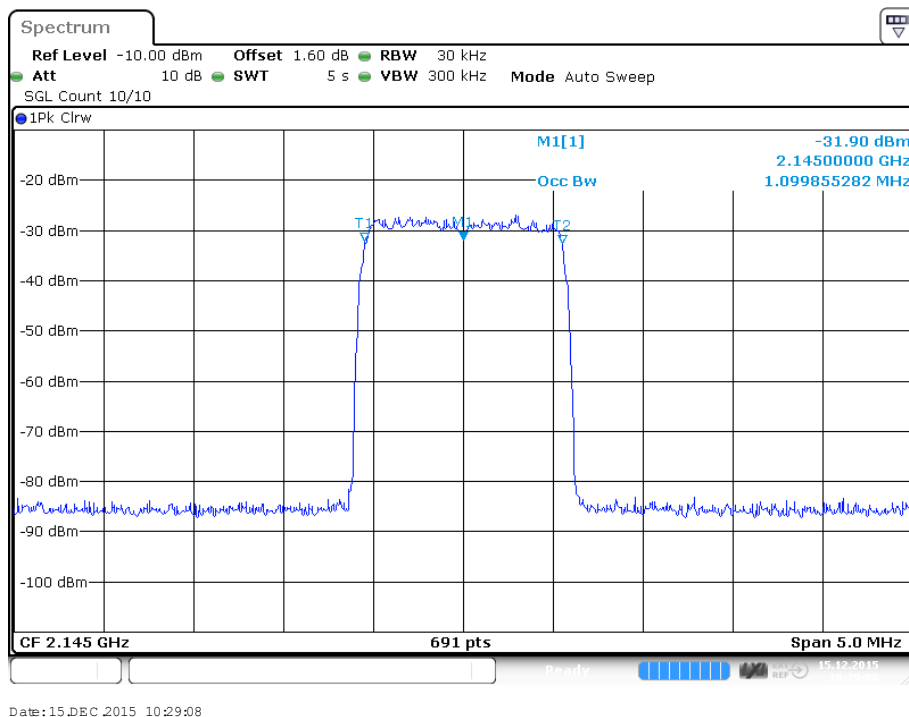

plot 6.3.1.3-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; LTE Input




6.3.2 26dB Bandwidth
6.3.2.1 CDMA

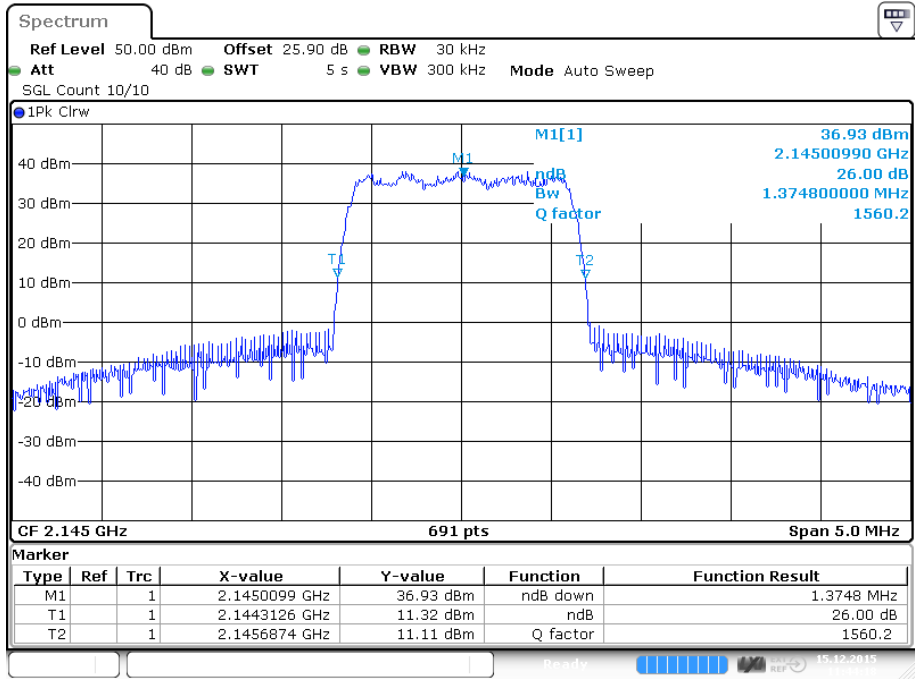

Date:15.DEC 2015 11:44:18

plot 6.3.2.1-#1 Occupied Bandwidth: \$2.1049; Test results; 26dB Bandwidth; CDMA Output

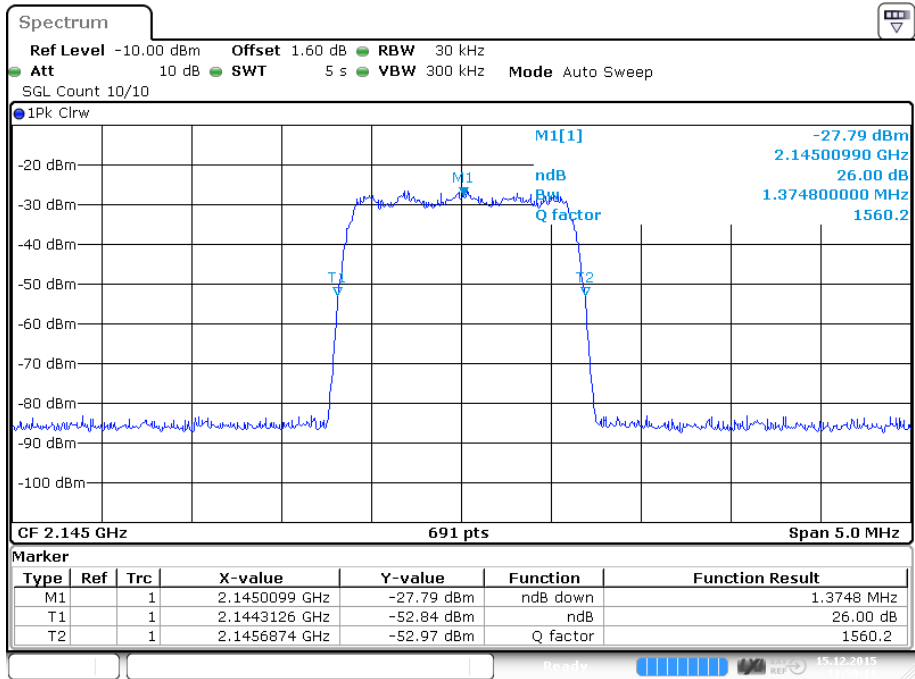


Date:15.DEC 2015 11:50:11


plot 6.3.2.1-#2 Occupied Bandwidth: \$2.1049; Test results; 26dB Bandwidth; CDMA Input



6.3.2.2 W-CDMA

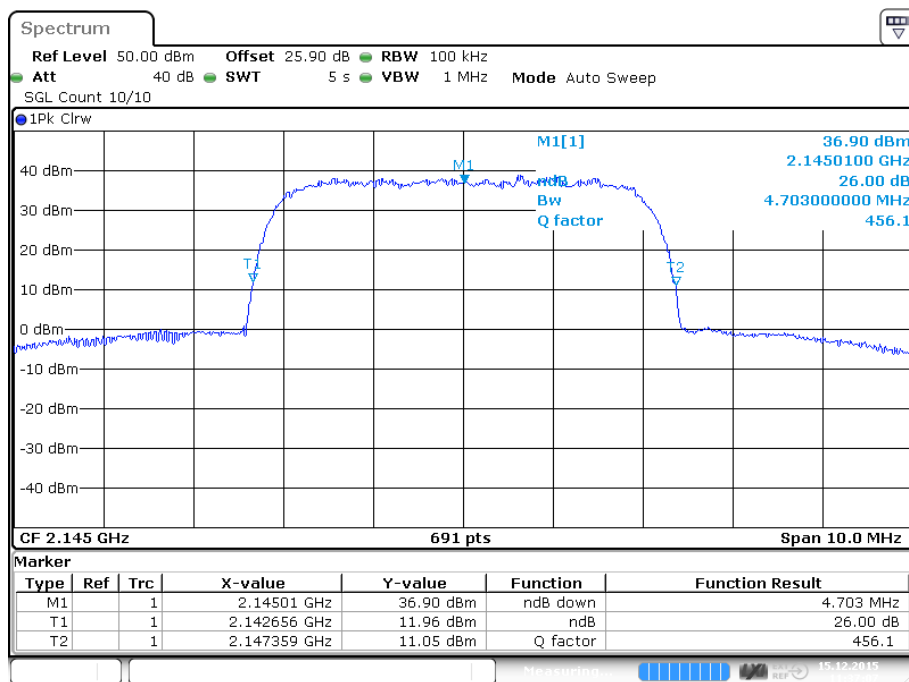


plot 6.3.2.2-#1 Occupied Bandwidth: \$2.1049; Test results; 26dB Bandwidth; W-CDMA Output

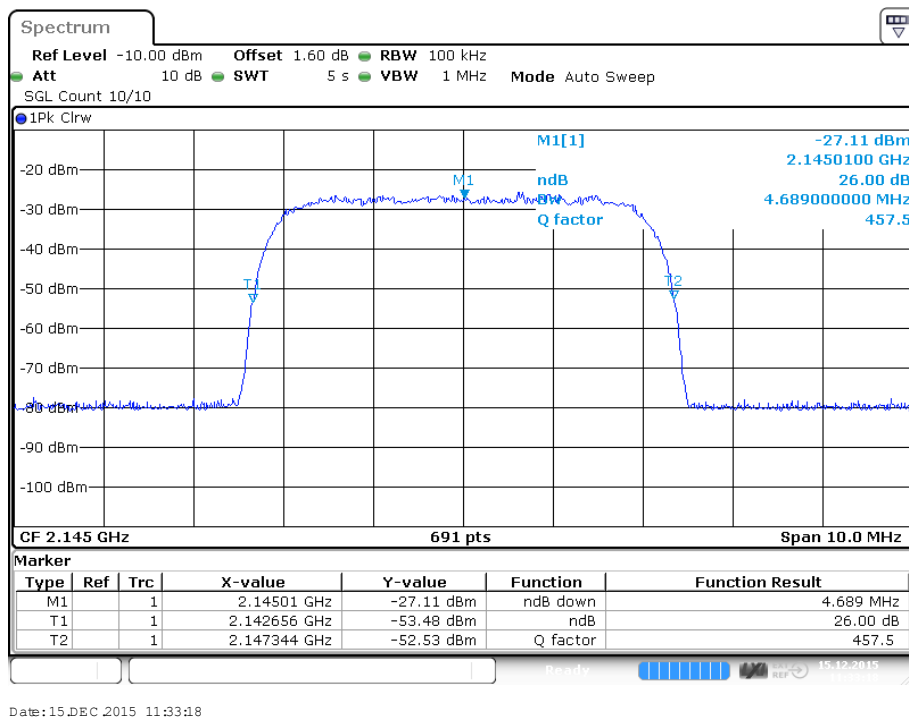


plot 6.3.2.2-#2 Occupied Bandwidth: \$2.1049; Test results; 26dB Bandwidth; W-CDMA Input

6.3.2.3 LTE

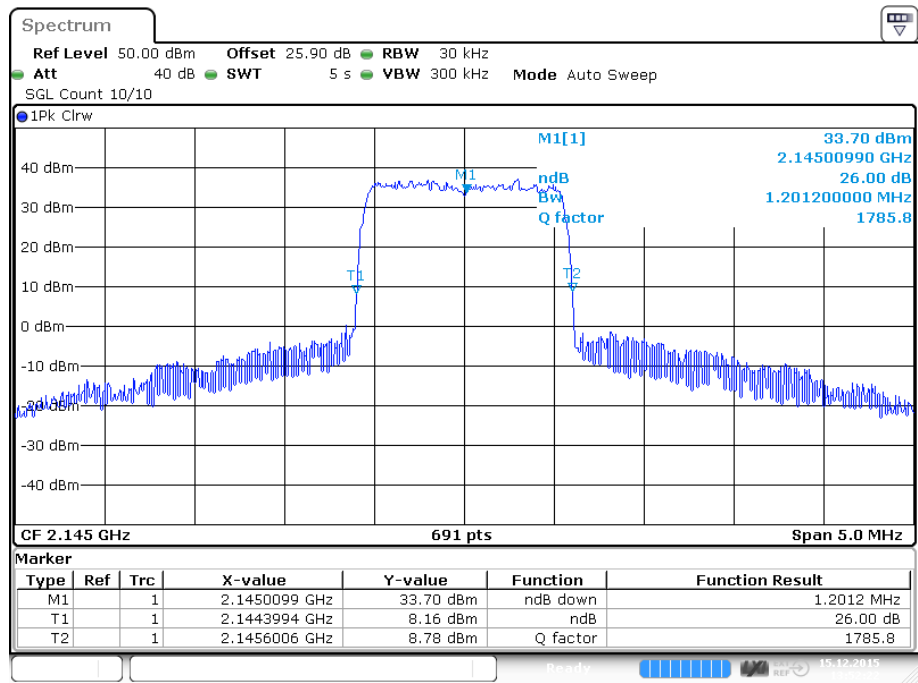

plot 6.3.2.3-#1 Occupied Bandwidth: \$2.1049; Test results; 26dB Bandwidth; LTE Output

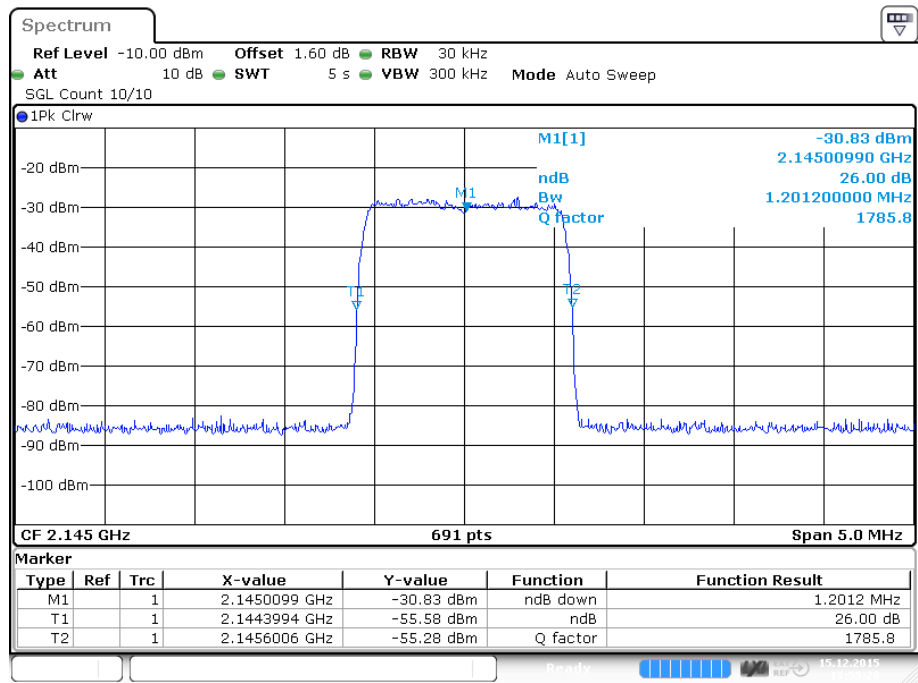

plot 6.3.2.3-#2 Occupied Bandwidth: \$2.1049; Test results; 26dB Bandwidth; LTE Input



6.3.3 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

6.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	15.12.2015

7 Spurious Emissions at Antenna Terminals: §27.53, §2.1051

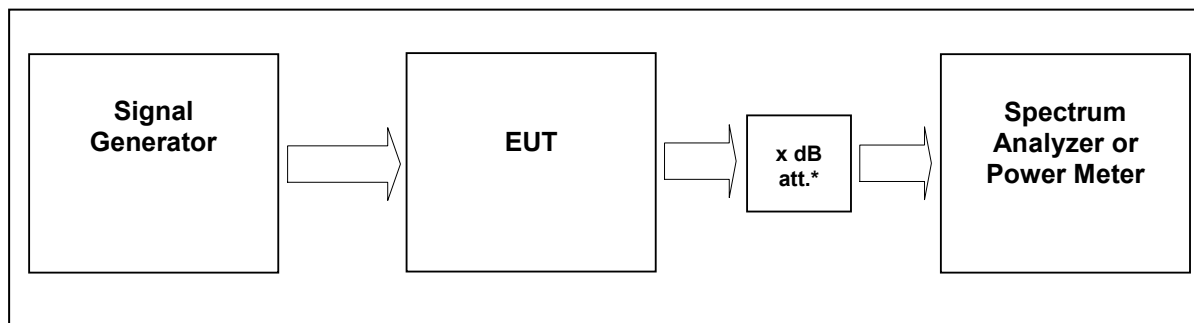

External Attenuator DL x dB = 20 dB

figure 7-#1 Test setup: Spurious Emissions at Antenna Terminals: §27.53, §2.1051

Measurement uncertainty	$\pm 0,54$ dB $\pm 1,2$ dB $\pm 1,5$ dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9300, 9069, 9236, 8990, 8667, 8668, 7406	

7.1 Limit

Minimum standard:

Para. No.27.53(h)

(h) *AWS emission limits*

(1) *General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

(3) *Measurement procedure.* (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

7.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



7.3 Test results

7.3.1 Downlink

Detector: RMS.


Modulation	Carrier	RBW VBW Span	Max. level (dBm)	MIMO Max. level (dBm)	Plot -
CDMA	2145 MHz	1MHz 3MHz 30MHz – 23GHz	-43.7	-40.7	7.3.1.1 #1
WCDMA	2145 MHz	1MHz 3MHz 30MHz – 23GHz	-44.7	-41.7	7.3.1.2 #1
LTE	2145 MHz	1MHz 3MHz 30MHz – 23GHz	-45.2	-42.2	7.3.1.3 #1

table 7.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051 Test results

If the DUT used in MIMO configuration according to KDB 662911, the summed emission (MIMO Max. Level) is calculated (Max. Level) of the output port plus $10 \log(N_{ANT})$. With ($N_{ANT}=2$) the MIMO Max. Level (dBm) equals Max. Level (dBm) plus 3dB.




7.3.1.1 CDMA

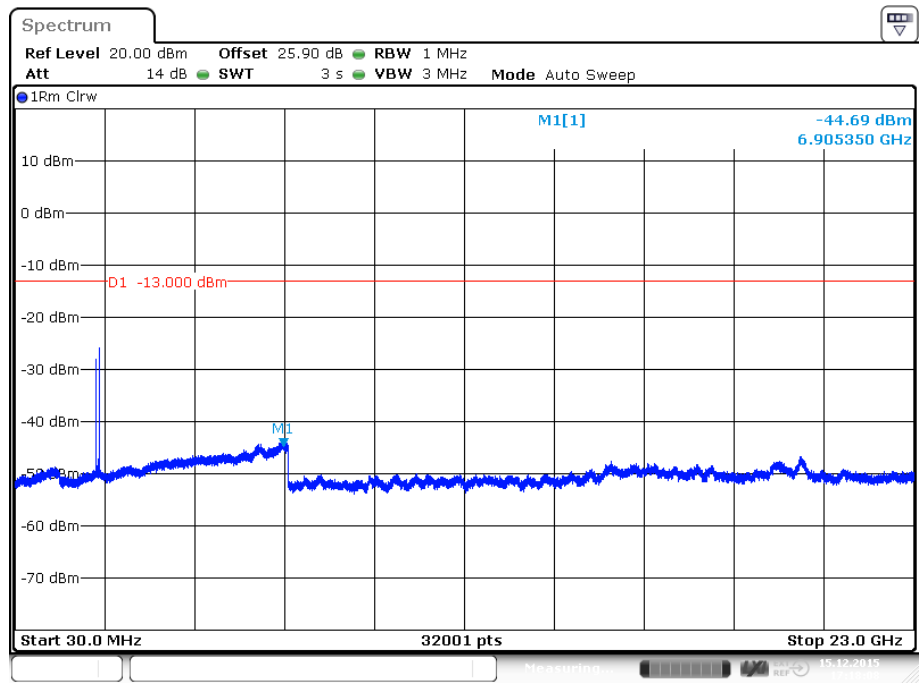


plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; Test results; Downlink; CDMA; carrier (2145MHz) notched

7.3.1.2 W-CDMA

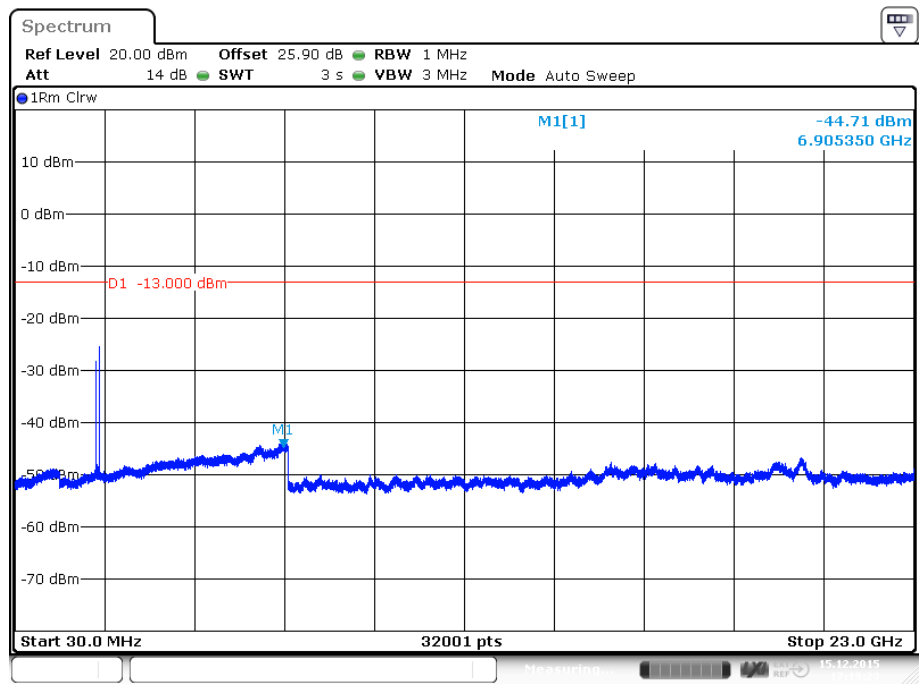

plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; Test results; Downlink; W-CDMA; carrier (2145MHz) notched

7.3.1.3 LTE

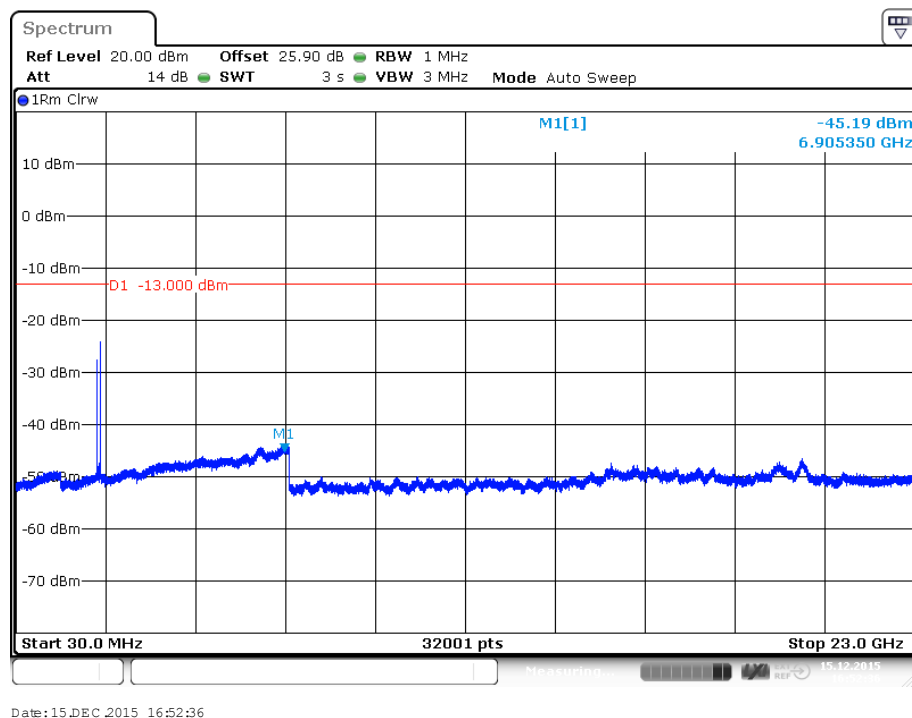

plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; Test results; Downlink; LTE; carrier (2145MHz) notched

7.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

7.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	15.12.2015

8 Intermodulation: §27.53, §2.1051

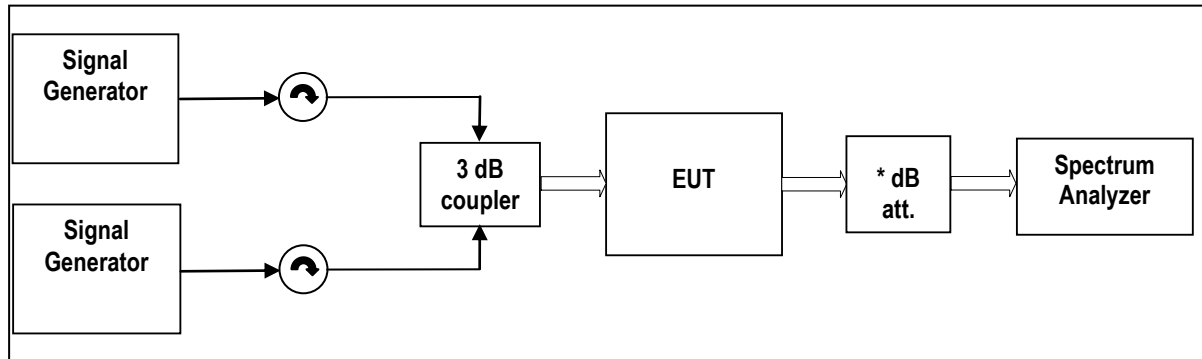

External Attenuator DL x dB = 20 dB

figure 8-#1 Test setup: Intermodulation: §27.53, §2.1051

Measurement uncertainty	$\pm 0,54$ dB $\pm 1,2$ dB $\pm 1,5$ dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9300, 9236, 8990, 8667, 8668, 7406	

8.1 Limit

Minimum standard:

Para. No.27.53(h)

(h) *AWS emission limits*

(1) *General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(3) *Measurement procedure.* (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

8.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



8.3 Test results

8.3.1 Downlink

Detector: RMS.


Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	MIMO Max. level (dBm)	Plot -
CDMA	Lower Edge	2110,775 MHz 2112,025 MHz	30kHz 300kHz 6MHz	-20.6	-17.6	8.3.1.1 #1
	Upper Edge	2177,975 MHz 2179,225 MHz				#2
WCDMA	Lower Edge	2112,6 MHz 2117,6 MHz	100kHz 1MHz 15MHz	-20.7	-17.7	8.3.1.2 #1
	Upper Edge	2172,4 MHz 2177,4 MHz				#2
LTE	Lower Edge	2110,7 MHz 2112,1 MHz	30kHz 300kHz 6MHz	-17.9	-14.9	8.3.1.3 #1
	Upper Edge	2177,9 MHz 2179,3 MHz				#2

table 8.3-#1 Intermodulation: §27.53, §2.1051 Test results


If the DUT used in MIMO configuration according to KDB 662911, the summed emission (MIMO Max. Level) is calculated (Max. Level) of the output port plus $10 \log(N_{ANT})$. With ($N_{ANT}=2$) the MIMO Max. Level (dBm) equals Max. Level (dBm) plus 3dB.



8.3.1.1 CDMA

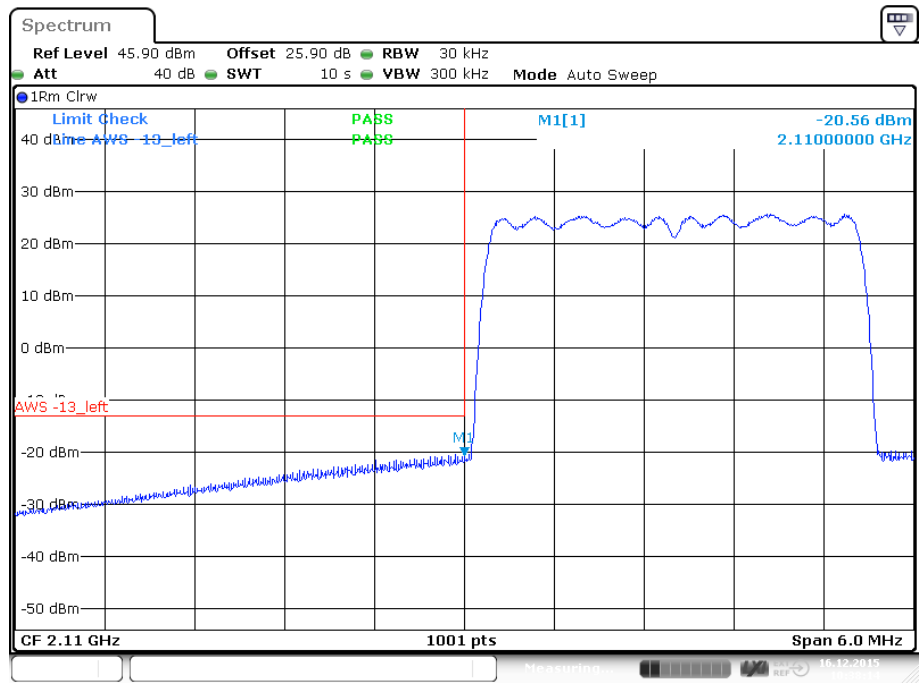


plot 8.3.1.1-#1 Intermodulation: §27.53, §2.1051; Test results; Downlink; CDMA Lower Band Edge

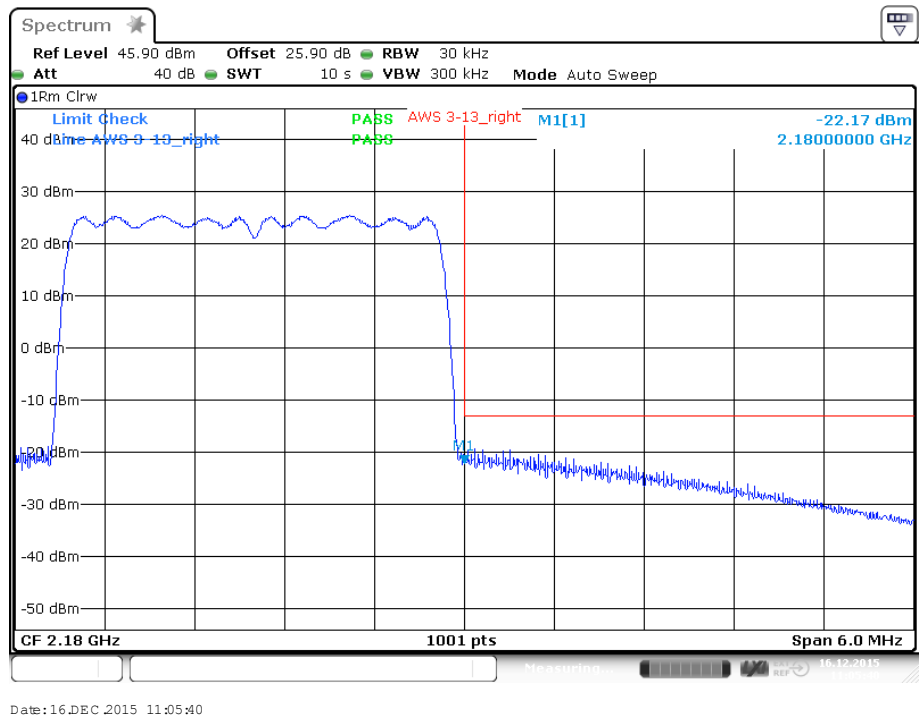


plot 8.3.1.1-#2 Intermodulation: §27.53, §2.1051; Test results; Downlink; CDMA Upper Band Edge



8.3.1.2 WCDMA

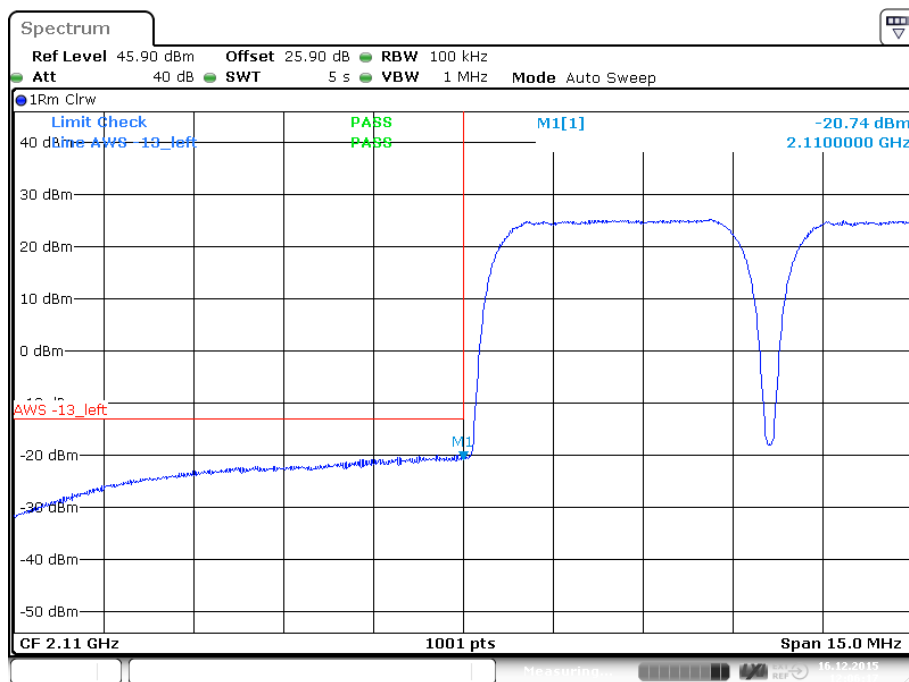


plot 8.3.1.2-#1 Intermodulation: §27.53, §2.1051; Test results; Downlink; WCDMA Lower Band Edge

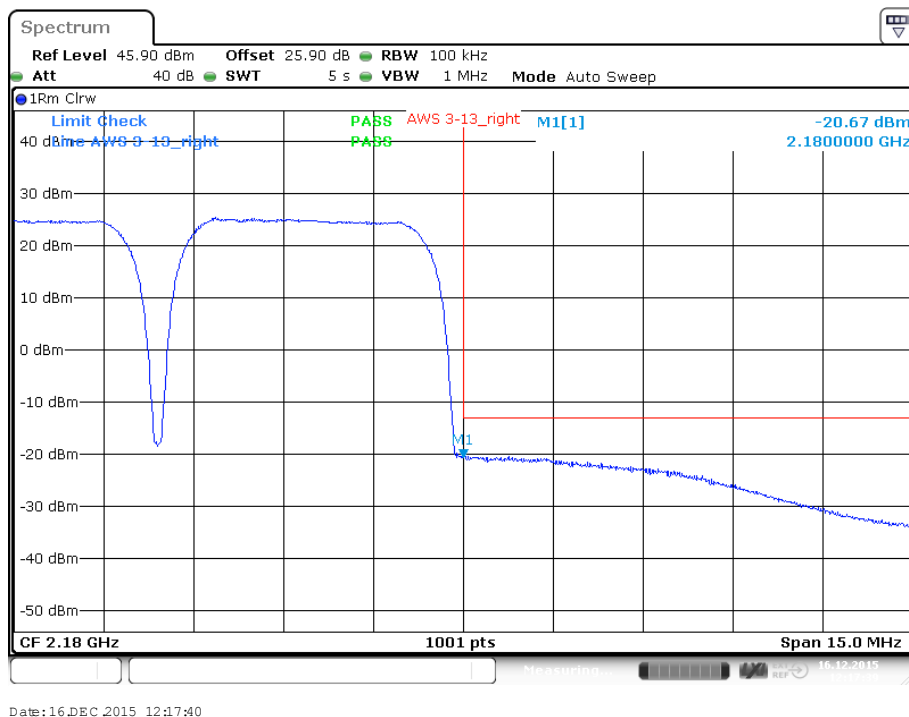


plot 8.3.1.2-#2 Intermodulation: §27.53, §2.1051; Test results; Downlink; WCDMA Upper Band Edge



8.3.1.3 LTE

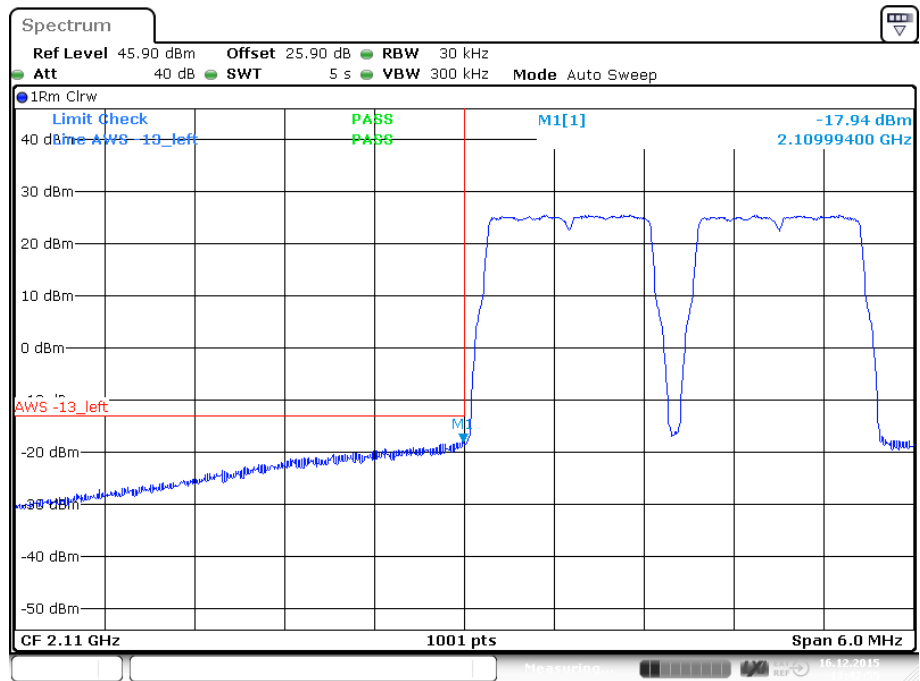

plot 8.3.1.3-#1 Intermodulation: §27.53, §2.1051; Test results; Downlink; LTE Lower Band Edge

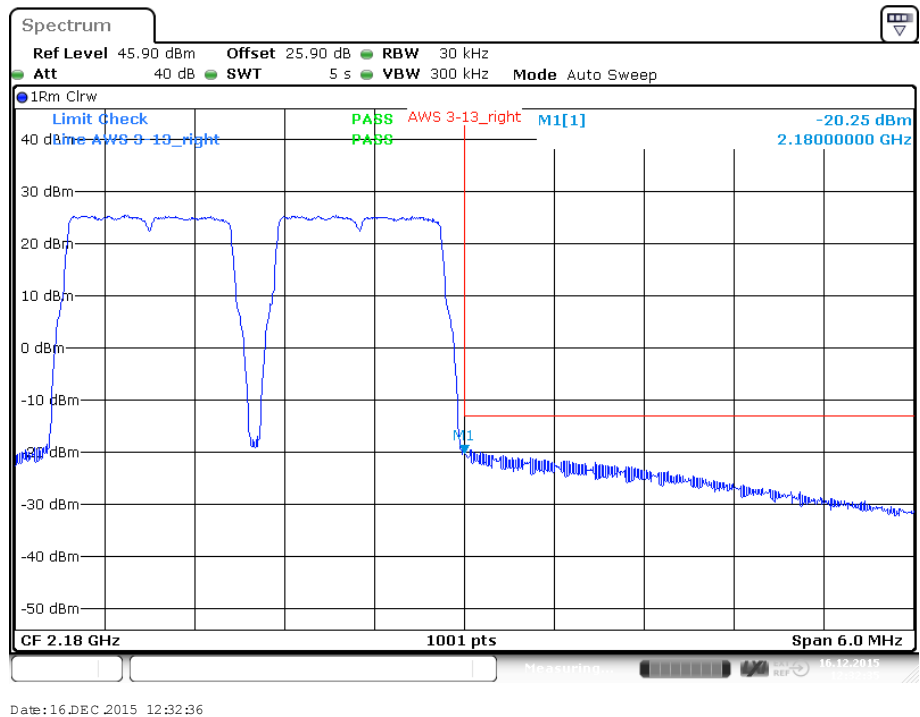

plot 8.3.1.3-#2 Intermodulation: §27.53, §2.1051; Test results; Downlink; LTE Upper Band Edge



8.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

8.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	16.12.2015

9 Out of Band Rejection

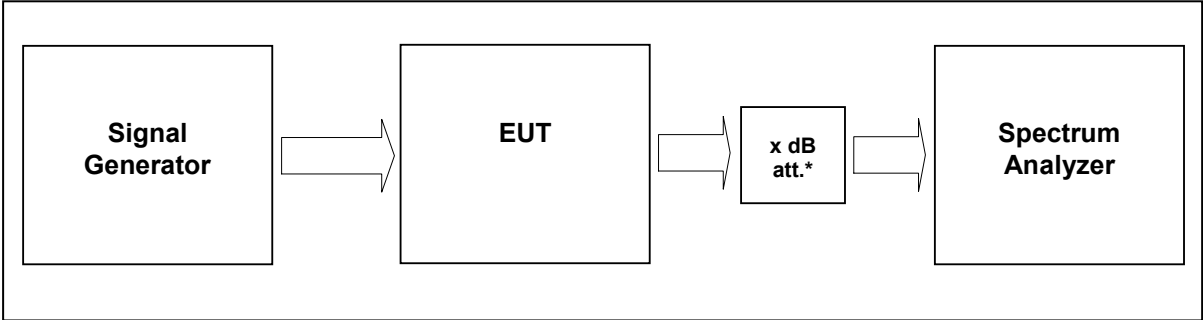

External Attenuator DL x dB = 20 dB
figure 9-#1 Test setup: Out of Band Rejection

Measurement uncertainty	± 0,38 dB
Test equipment used	9300, 9236,8990, 8667, 8668, 7406

9.1 Limit

KDB 935210 D02 v02
Test for rejection of out of band signals. Filter frequency response plots are acceptable.


9.2 Test method

935210 D03 v02
7.1 Authorized frequency band verification test

9.3 Test results

Detector Peak max hold

9.3.1 Downlink

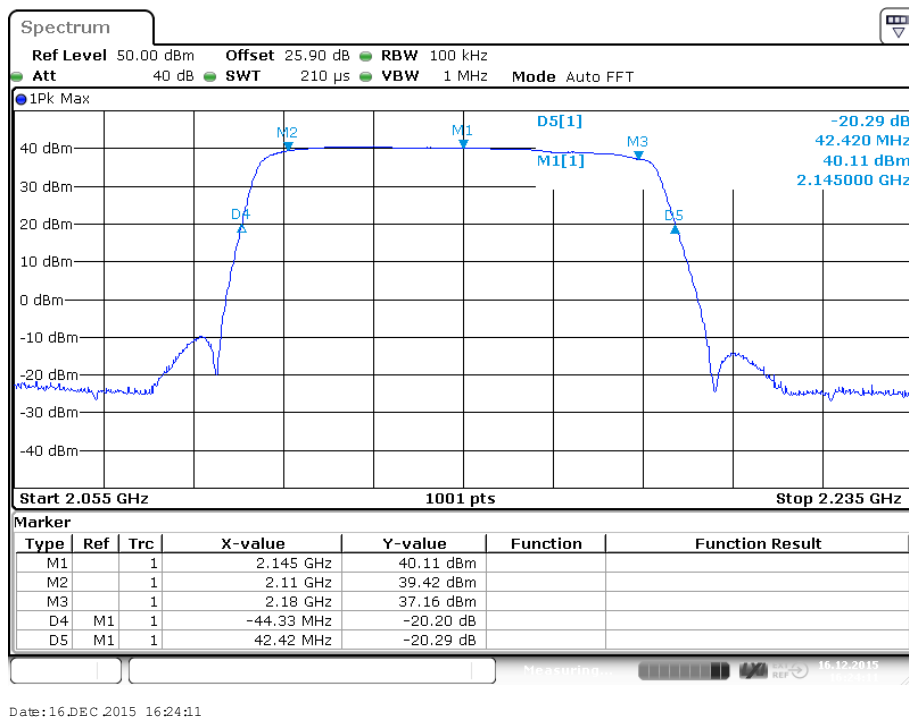

plot 9.3.1-#1 Out of Band Rejection; Test results; Downlink;

9.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

9.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	16.12.2015

10 Field Strength of Spurious Emissions: §27.53, §2.1053

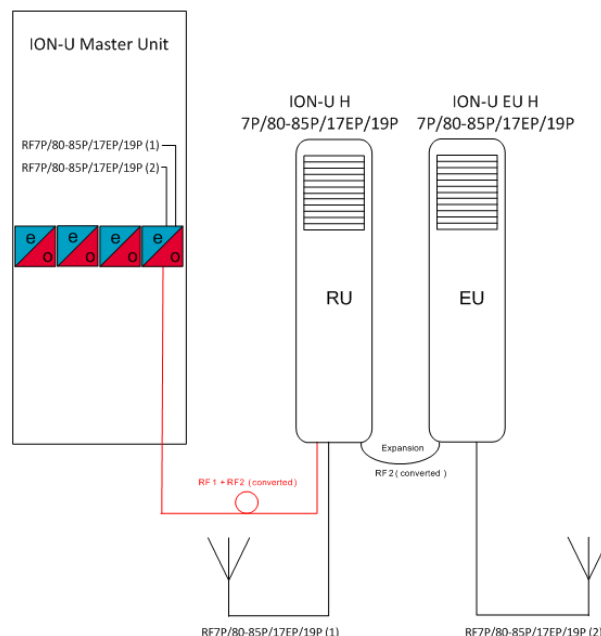

The frequencies bands of the extension unit will be implemented on the master unit with a compensation frequency bands.

About the optical fiber all frequencies will be forwarded to the RU.

At the RU the optical signals will be converted into RF signals.

The frequency bands, which were not changed will be filtered by the duplexer, then amplified and transmitted by the RU.

The replaced frequency bands filtered out and forwarded via the Cable Bridge to the EU. These frequencies converted back by the conversion module (FCM) to their original frequencies band and then they were amplified and sent out.


The worst case mode for the radiated emission is the MIMO mode. Both devices are operated with the maximum power, at the same time.




picture 8.1: label (EUT)




picture 8.2: label (auxiliary equipment)

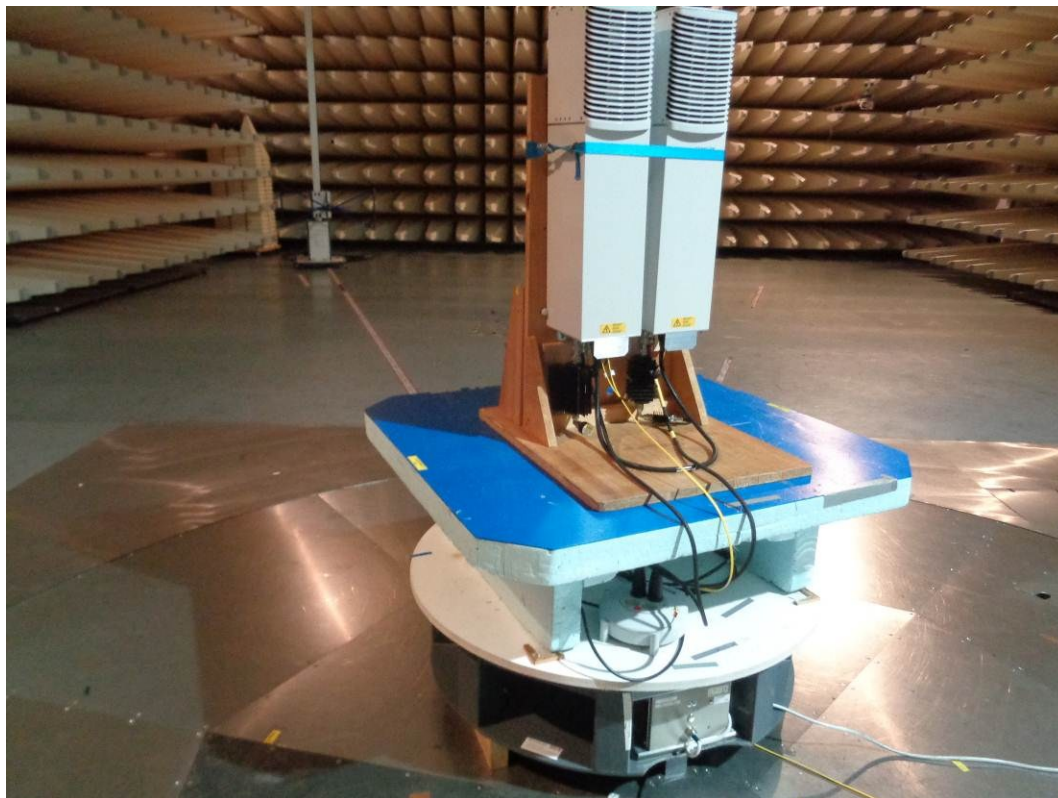


picture 8.3: Test setup: Field Strength Emission 30 MHz - 1 GHz @10m in the SAC (MIMO – RU + EU)

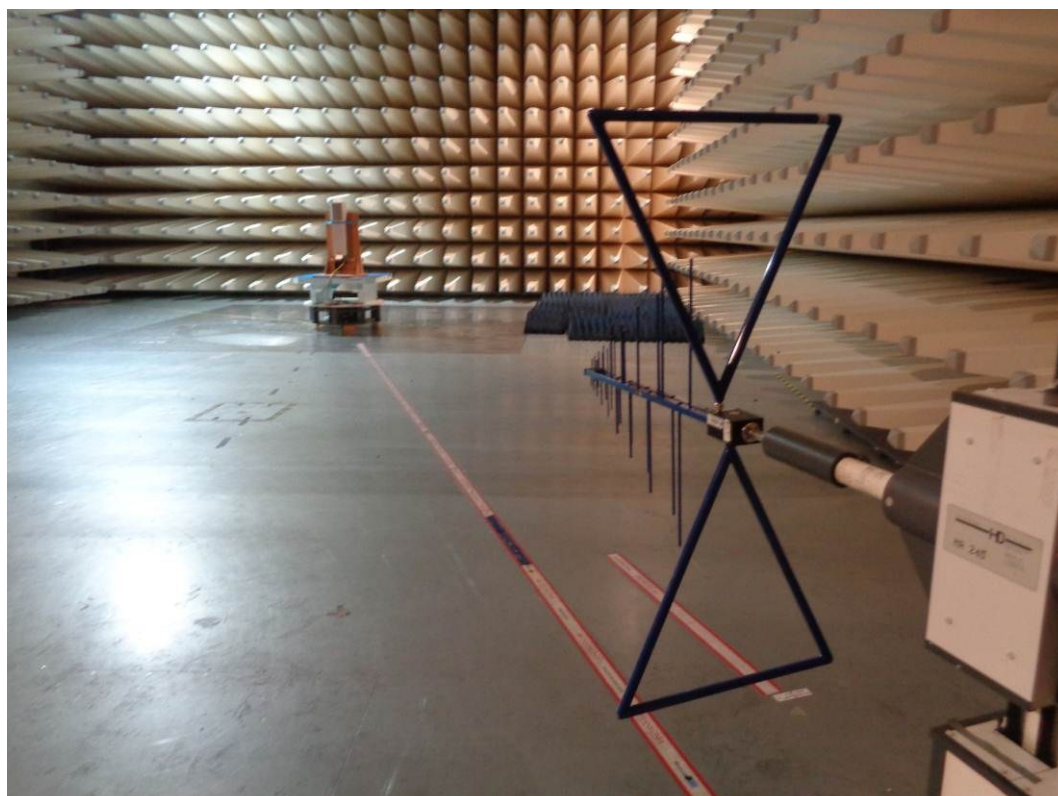


picture 8.4: Test setup: Field Strength Emission 30 MHz - 1 GHz @10m in the SAC (RU only)

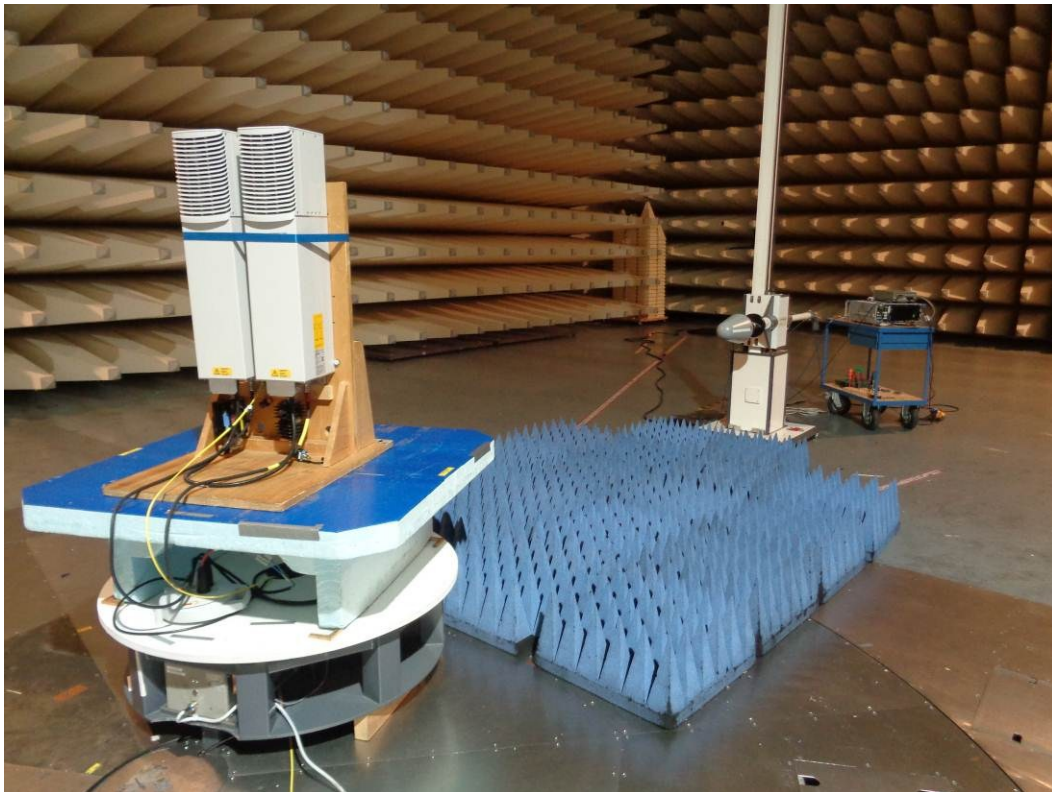


picture 8.4: Test setup: Field Strength Emission 1-18 GHz @3m in the SAC (MIMO – RU + EU)

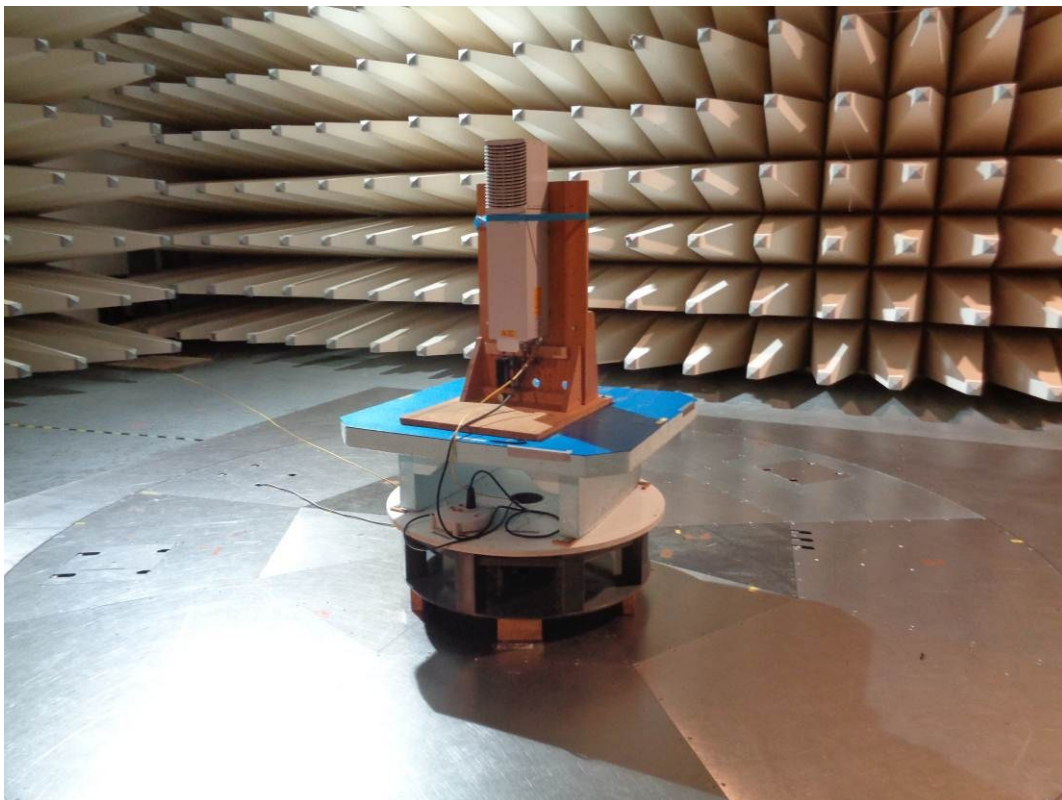

picture 8.5: Test setup: Field Strength Emission 1-18 GHz @3m in the SAC (RU only)

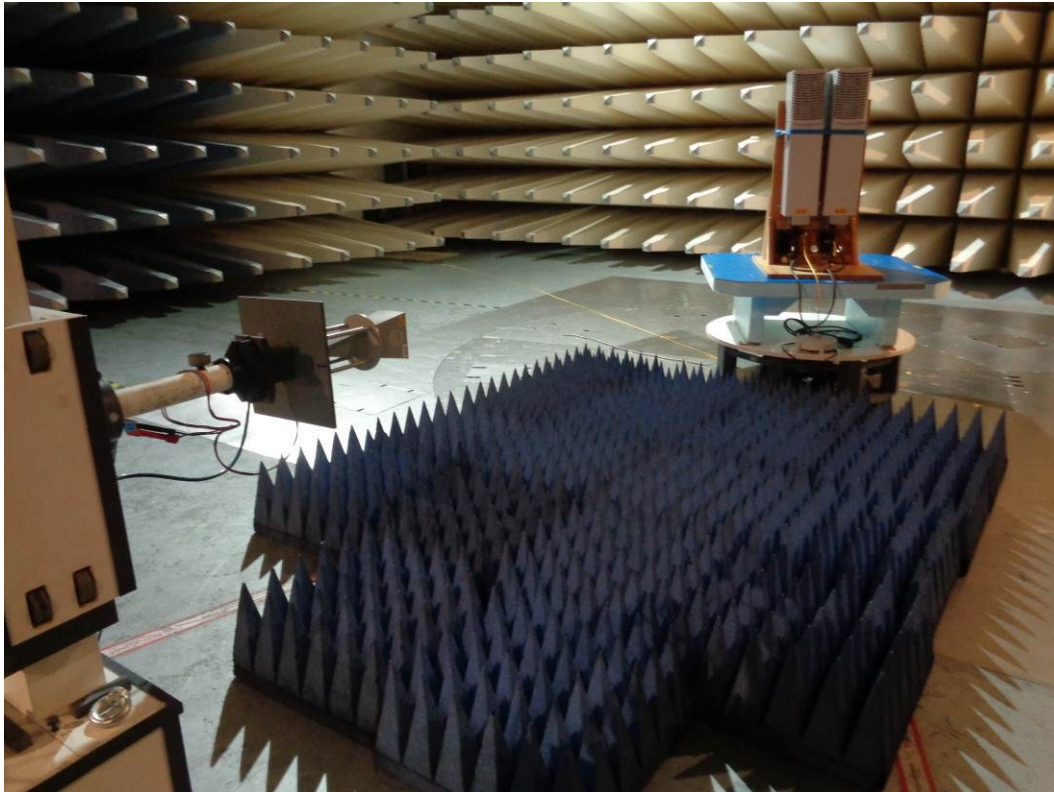

picture 8.6: Test setup: Field Strength Emission 18-26 GHz @3m in the SAC (MIMO – RU + EU)

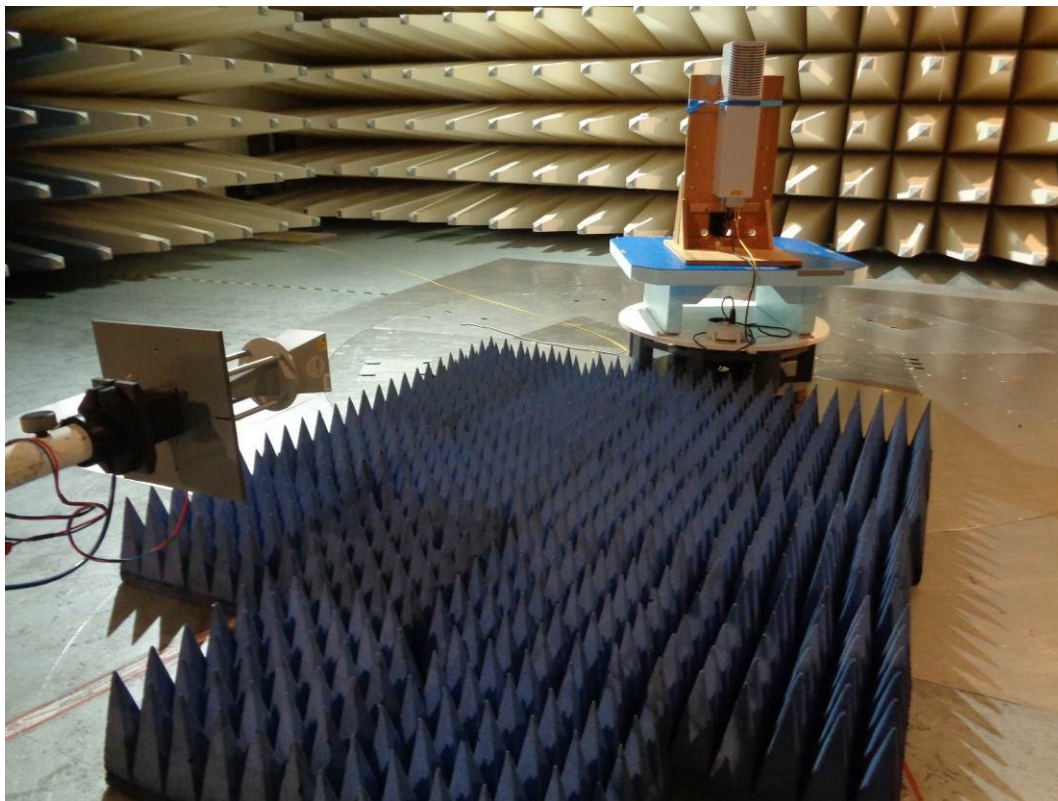

picture 8.7: Test setup: Field Strength Emission 18-26 GHz @3m in the SAC (RU only)



This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz – 1 GHz	10 metres / SAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
1 GHz – 18 GHz	3 metres / SAC		
18 GHz – 26 GHz	3 metres / SAC		

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.- date	used
EMI test receiver	ESU40	Rohde & Schwarz	E2025	18.05.2015	18.05.2016	X
Antenna	CBL 6111	Chase	K1026	09.03.2015	09.03.2016	X
RF Cable	RG214	Frankonia	K1121	16.04.2015	16.04.2017	X
Antenna	HL 025	R&S	K1114	09.03.2015	09.03.2016	X
Preamplifier	AFS4-00102000	Miteq	K838	17.06.2015	17.06.2016	X
RF Cable	Sucoflex 100	Suhner	K1760	04.08.2015	04.08.2016	X
Antenna	MWH-1826/B	ARA Inc.	K1042	02.03.2012	02.03.2017	X

The REMI version 2.135 has been used to maximize radiated emission from the EUT with regards to ANSI C63.4:2009.

Test set-up:

Test location: SAC
Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 110V / 60 Hz

Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---

10.1 Method of Measurement

Measurement procedure. TIA-603-C

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps width during the measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

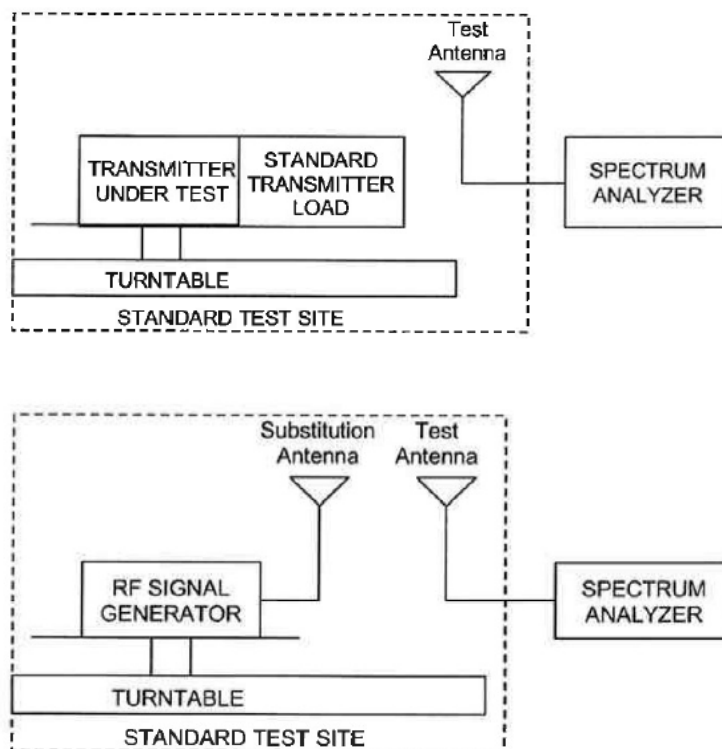


Figure #8.3 Substitution methods TIA/EIA-603-C



10.2 Limit

§27.53 Emission limitations

Minimum standard:

Para. No.27.53(h)

(h) *AWS emission limits*

(1) *General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(3) *Measurement procedure.* (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

The Emission limit is -13dBm.

10.3 Receiver Settings

	up to 1 GHz	above 1 GHz
Measurement bandwidth	120 kHz	1 MHz
Step width	60 kHz	500 kHz
Dwell time	20ms	
Detector	Peak	Average

10.4 Climatic values in the lab

Temperature	21°C
Relative Humidity	48%
Air-pressure	1014 hPa




10.5 Test results


10.5.1 30 MHz to 1 GHz Downlink (Bottom – Middle – Top)

EUT: RU only (without RF at EU) B/M/T: 2110 MHz / 2145 MHz / 2180 MHz

Vertikal

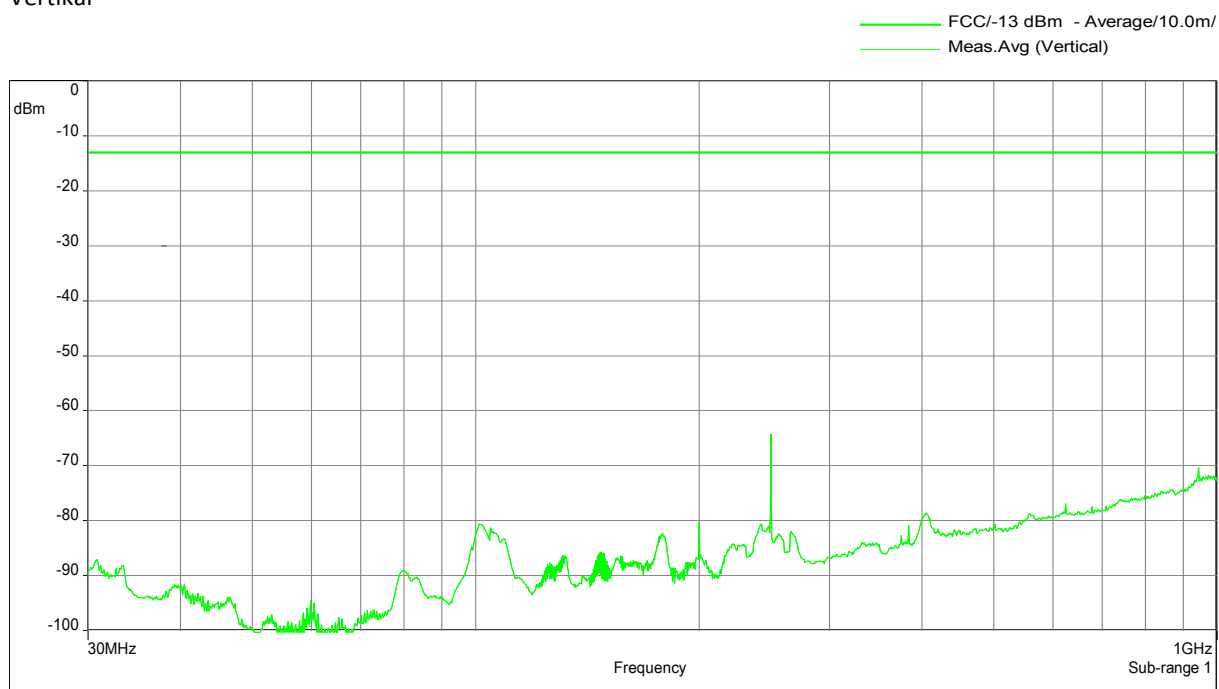


Horizontal

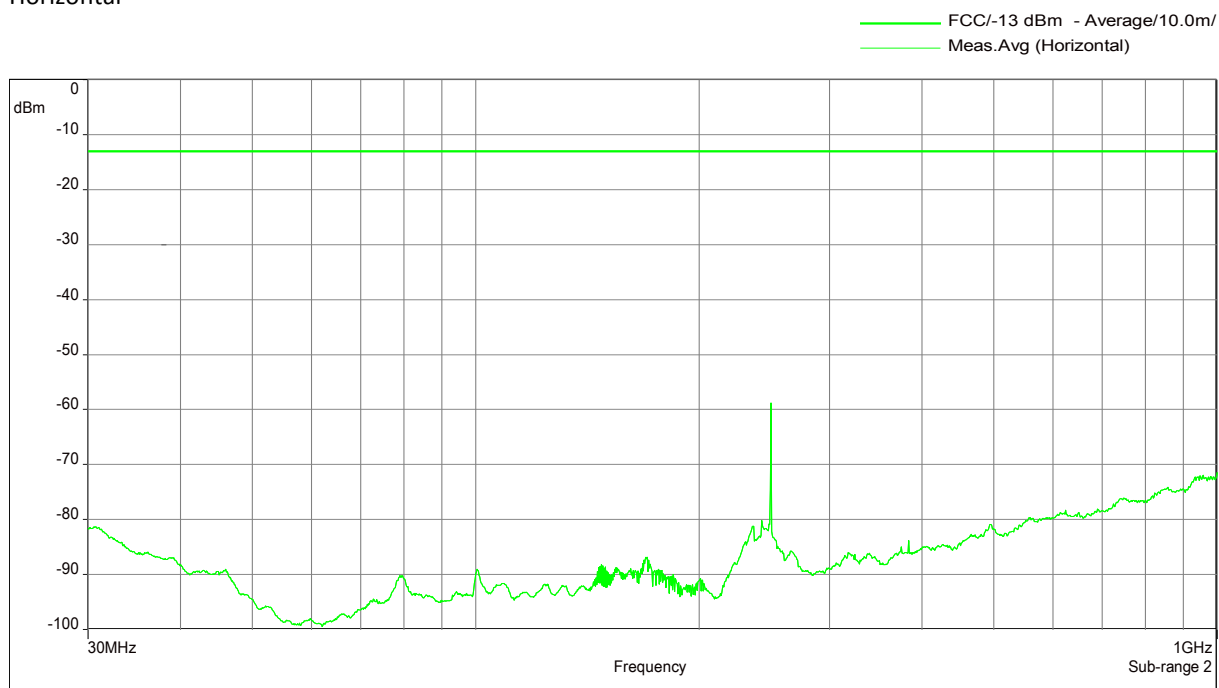


The RF output power is terminated.



EUT: EU and RU works with max power (MIMO) B/M/T: 2110 MHz / 2145 MHz / 2180 MHz
Vertikal

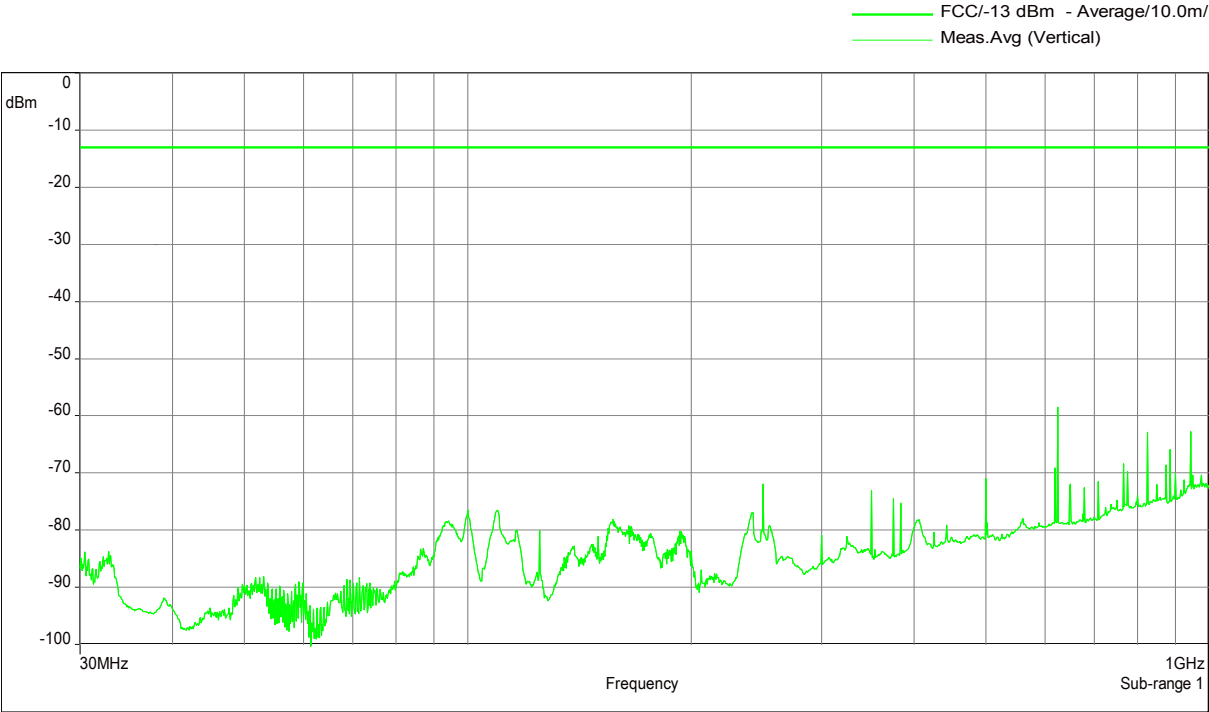

Horizontal

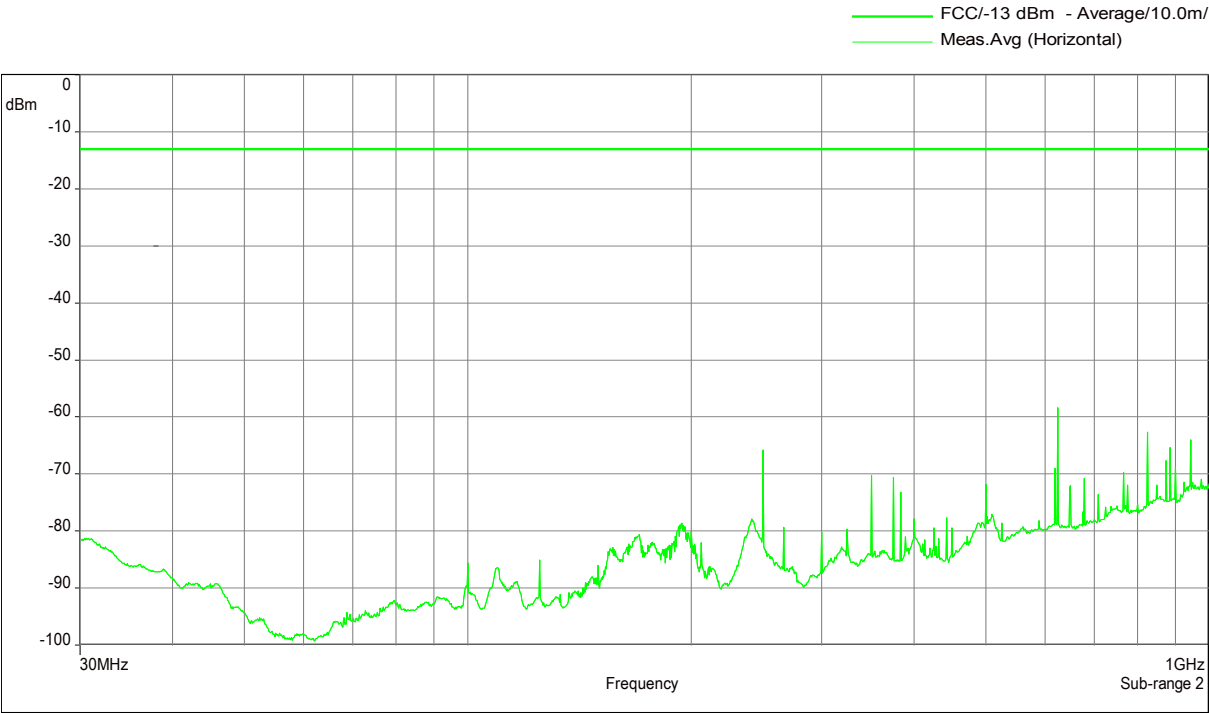


The RF output power is terminated.


10.5.2 30 MHz to 1 GHz Downlink (Middle of both paths)

EUT: RU only (without RF at EU) F1: 742,5 MHz; F2: 878 MHz; F3: 1962,5 MHz; F4: 2145 MHz

Vertikal

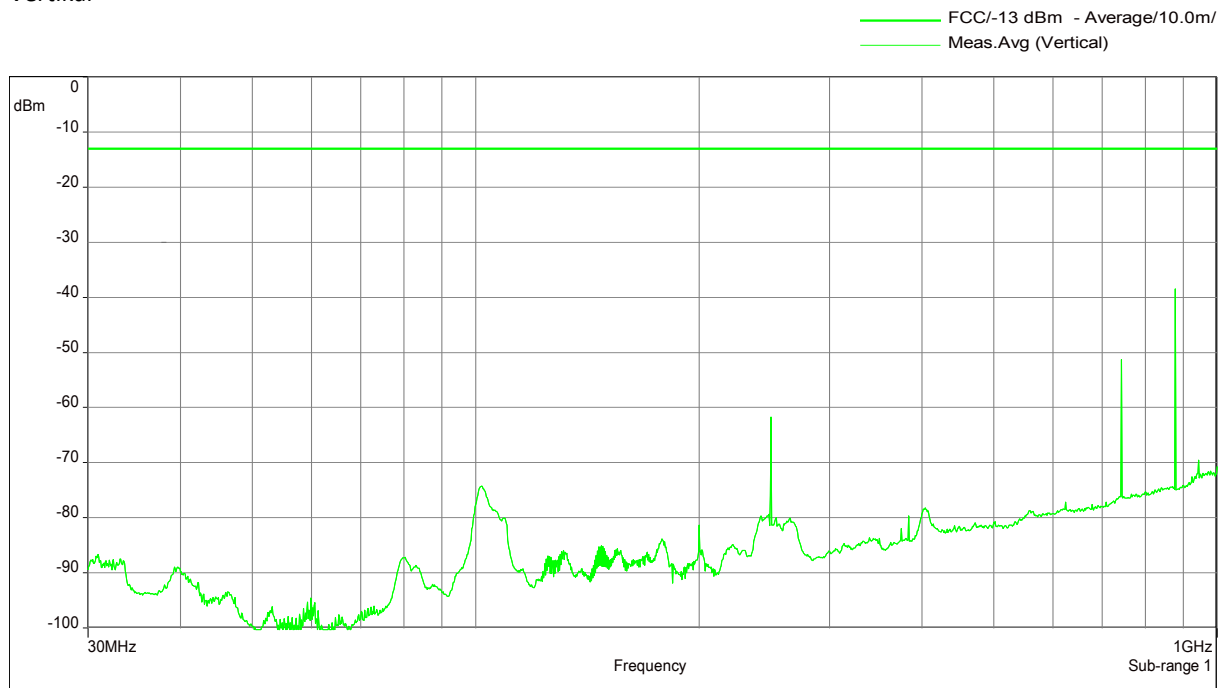


Horizontal

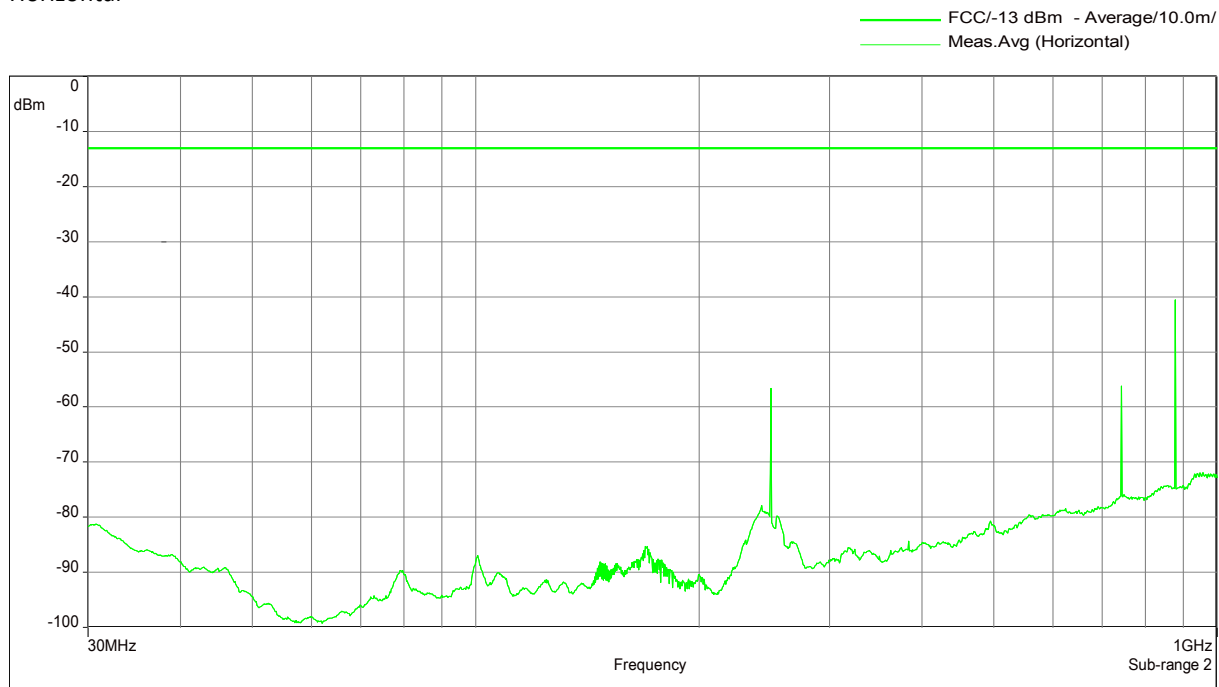


The RF output power is terminated.



EUT: EU and RU works with max power (MIMO) F1: 742,5 MHz/ F2: 878 MHz/ F3: 1962,5 MHz/
F4: 2145 MHz
Vertikal

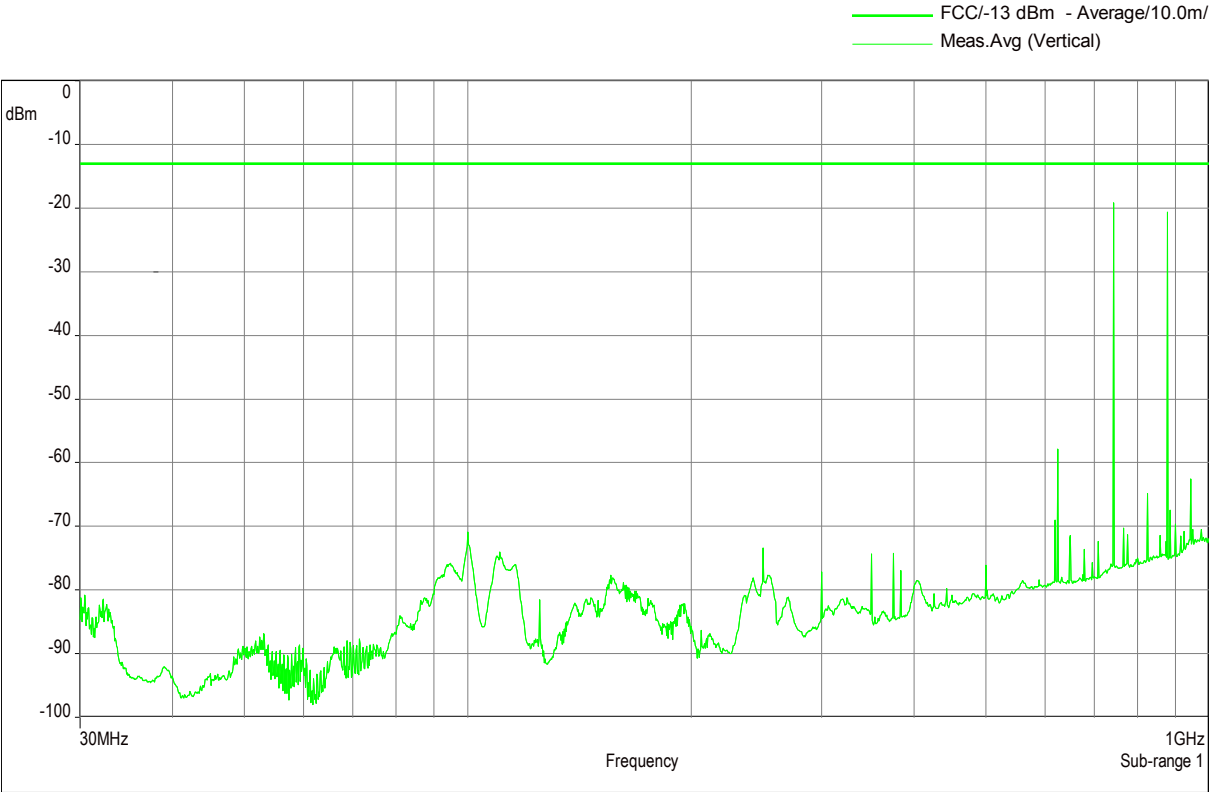

Horizontal

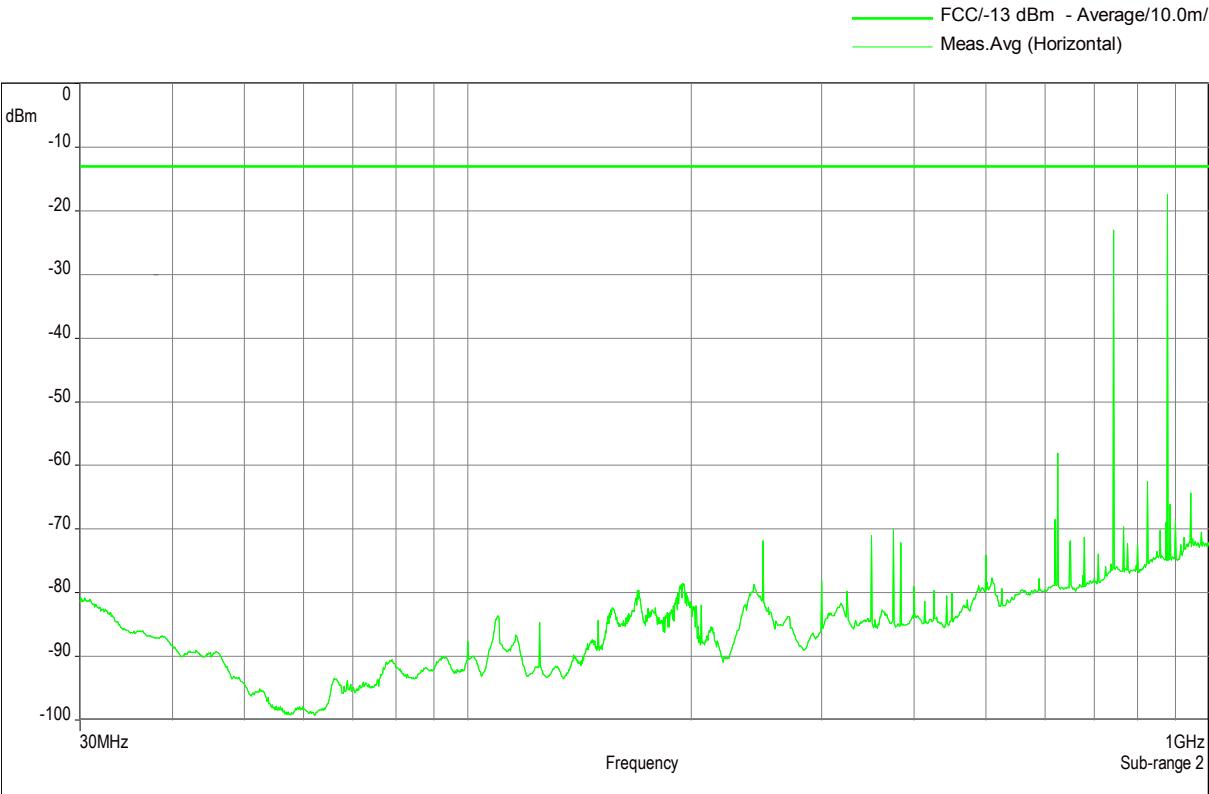


The RF output power is terminated.




10.5.3 1 GHz – 18 GHz Downlink (Bottom – Middle – Top)

EUT: RU only (without RF at EU) B/M/T: 2110 MHz / 2145 MHz / 2180 MHz

Vertikal

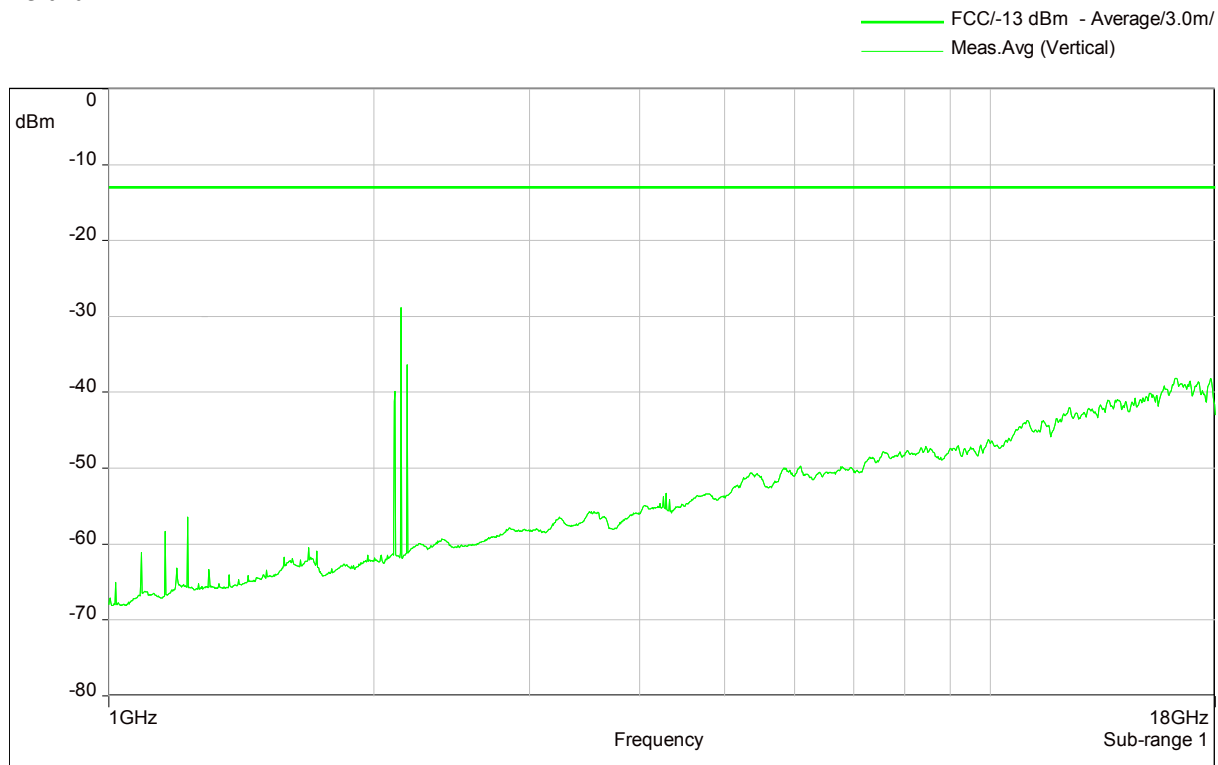


Horizontal

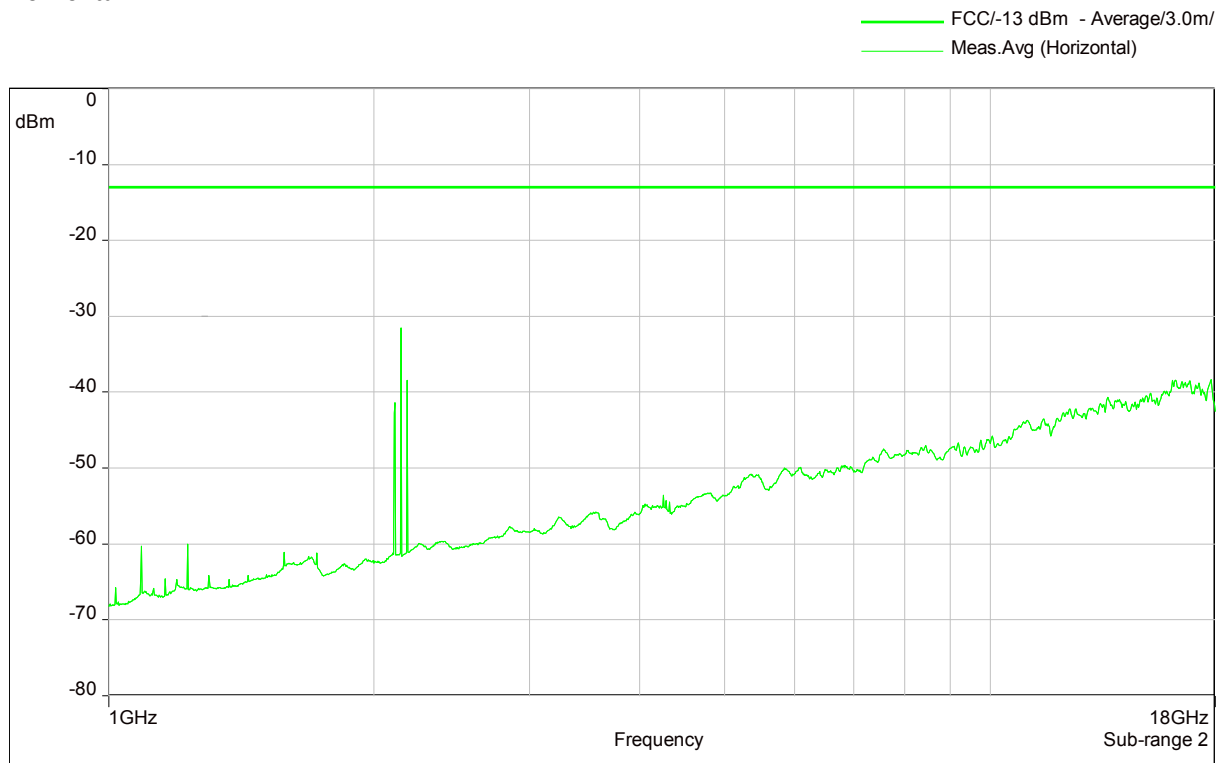

The RF output power is terminated.


EUT: RU and EU works with max power (MIMO) B/M/T: 2110 MHz / 2145 MHz / 2180 MHz

Vertikal

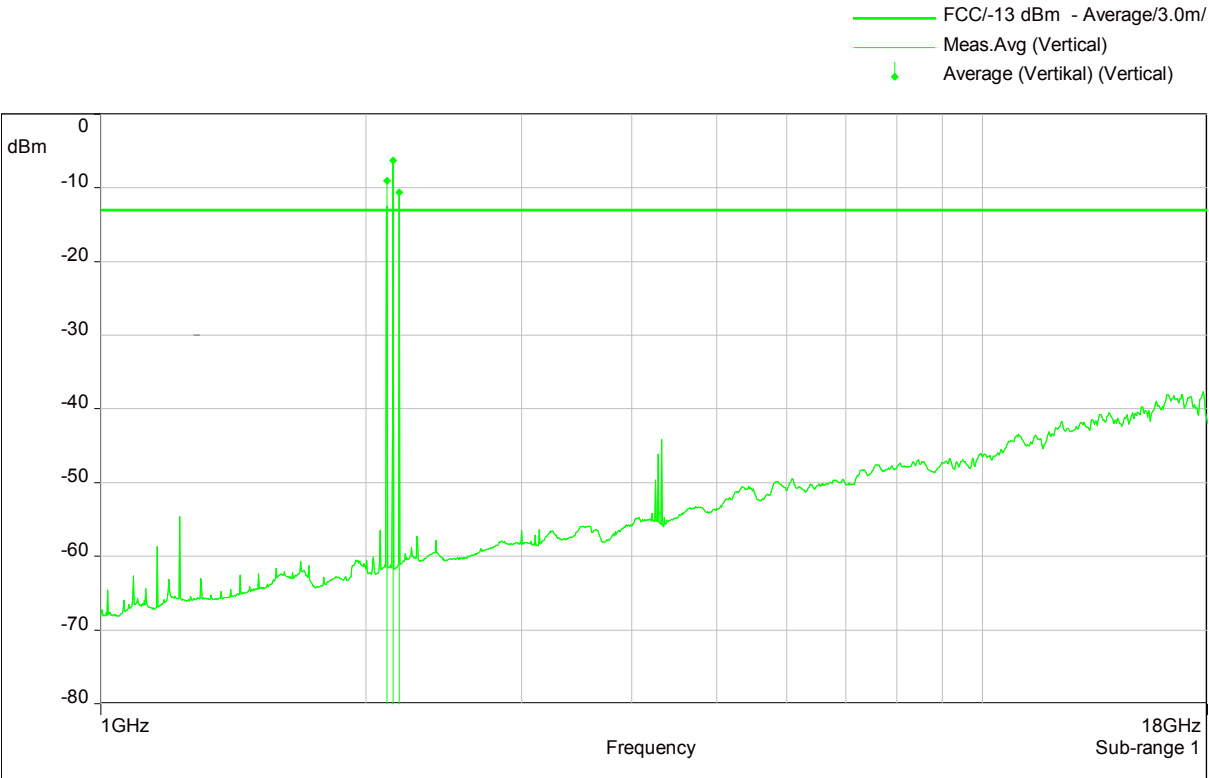

Frequency (MHz)	Peak (dBm)	Average (dBm)	Limit AV	Abstand AV (dBm)	Höhe	Winkel	Correction (dB)
2110	-8.94	-9.07	-13.00	-3.93	1.00	-92.10	27.87
2145	-6.17	-6.30	-13.00	-6.70	1.15	-179.20	27.60
2180	-10.39	-10.60	-13.00	-2.40	1.21	-180.00	28.25

Horizontal

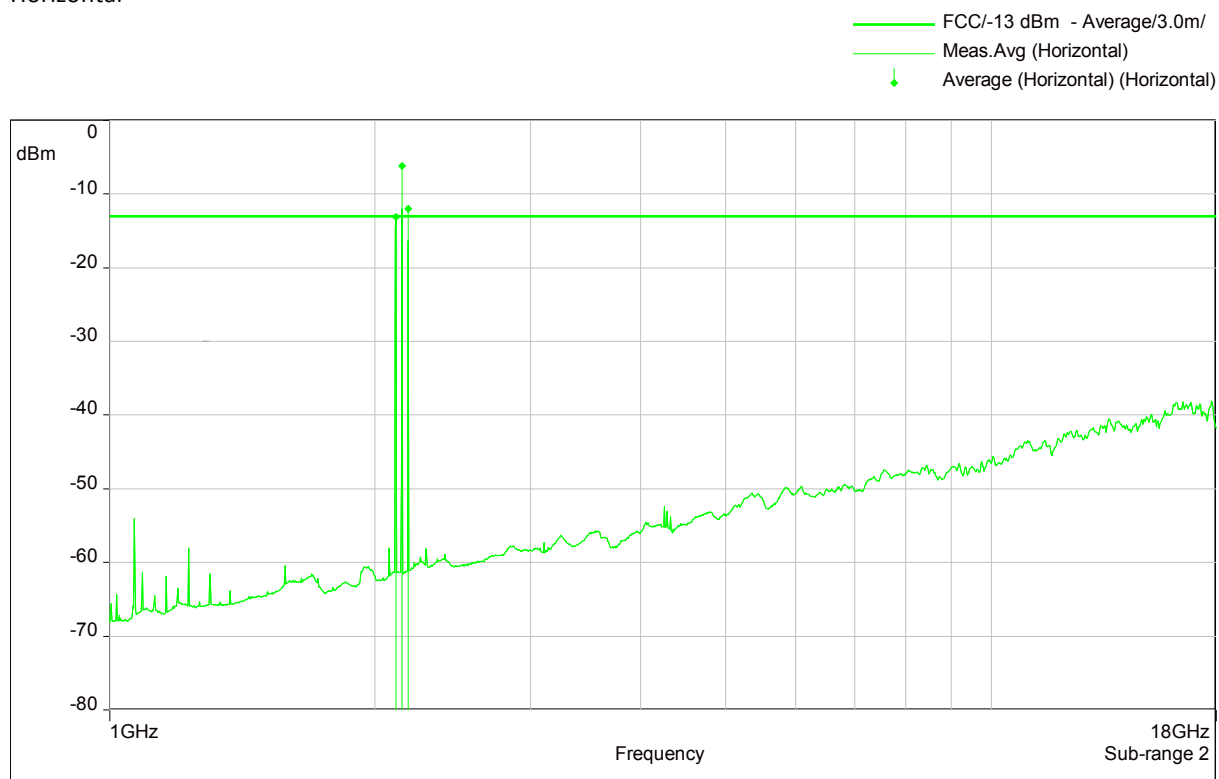


Frequency (MHz)	Peak (dBm)	Average (dBm)	Limit AV	Abstand AV (dBm)	Höhe	Winkel	Correction (dB)
2110	-12.89	-13.09	-13.00	0.09	1.19	-177.40	28.03
2145	-6.08	-6.21	-13.00	-6.79	1.28	18.70	27.97
2180	-11.76	-12.00	-13.00	-1.00	1.00	-132.00	28.34

The RF output power is terminated.


10.5.4 1 GHz – 18 GHz Downlink (Middle of both paths)

EUT: RU only (without RF at EU) F1: 742,5 MHz; F2: 878 MHz; F3: 1962,5 MHz; F4: 2145 MHz

Vertikal

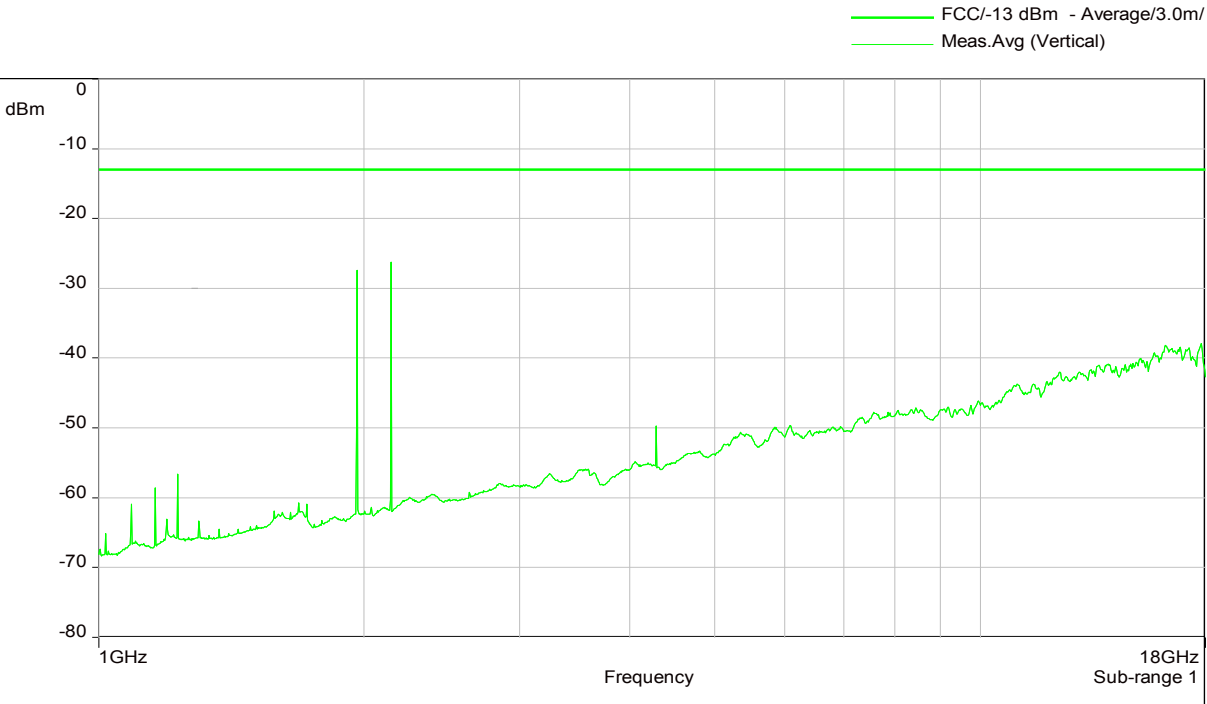

Horizontal

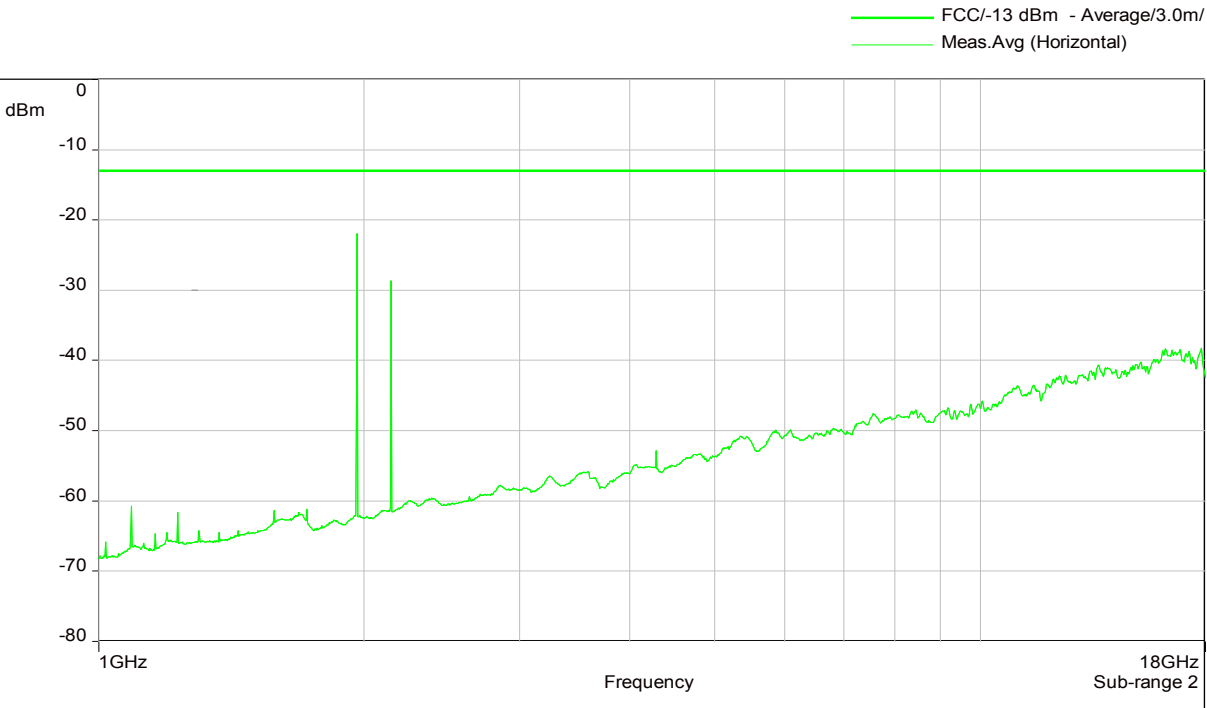


The RF output power is terminated.

EUT: RU and EU works with max power (MIMO) F1: 742,5 MHz/ F2: 878 MHz/ F3: 1962,5 MHz/
F4: 2145 MHz


Vertikal

— FCC/-13 dBm - Average/3.0m/
— Meas.Avg (Vertical)
◇ Peak (Vertikal) (Vertical)
↓ Average (Vertikal) (Vertical)

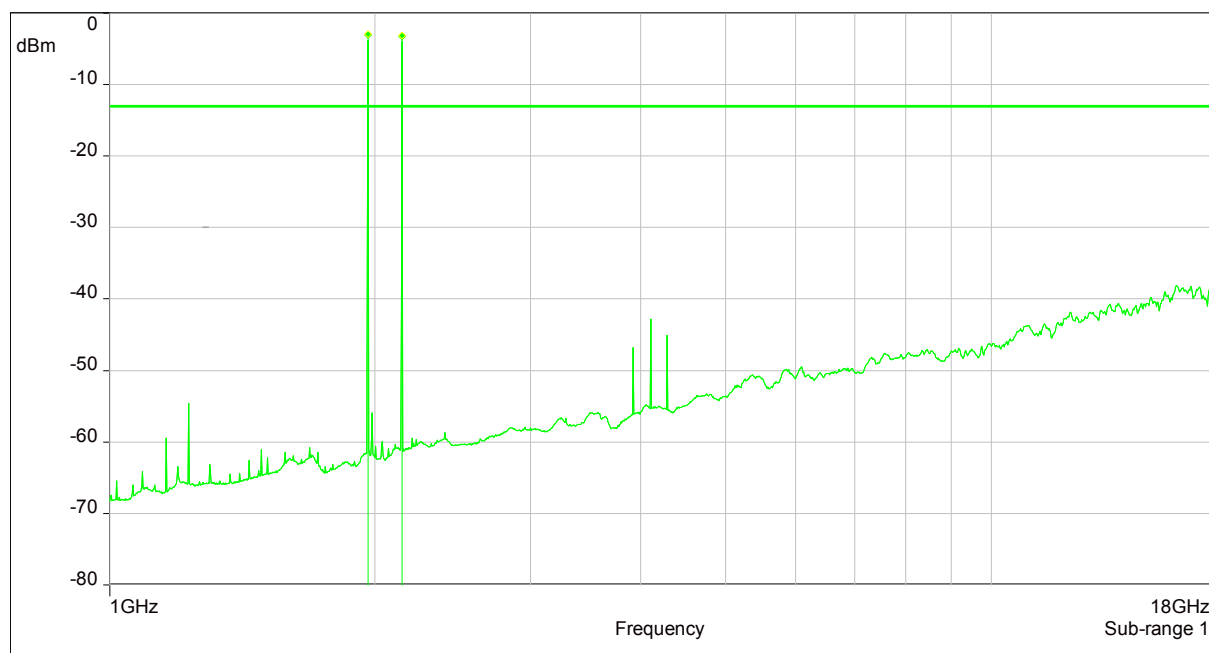

Frequency (MHz)	Peak (dBm)	Average (dBm)	Limit AV	Abstand AV (dBm)	Höhe	Winkel	Correction (dB)
1962.5	-2.99	-3.06	-13.00	-9.94	1.00	-115.10	26.86
2145	-3.13	-3.19	-13.00	-9.81	1.01	-92.50	27.60

Horizontal

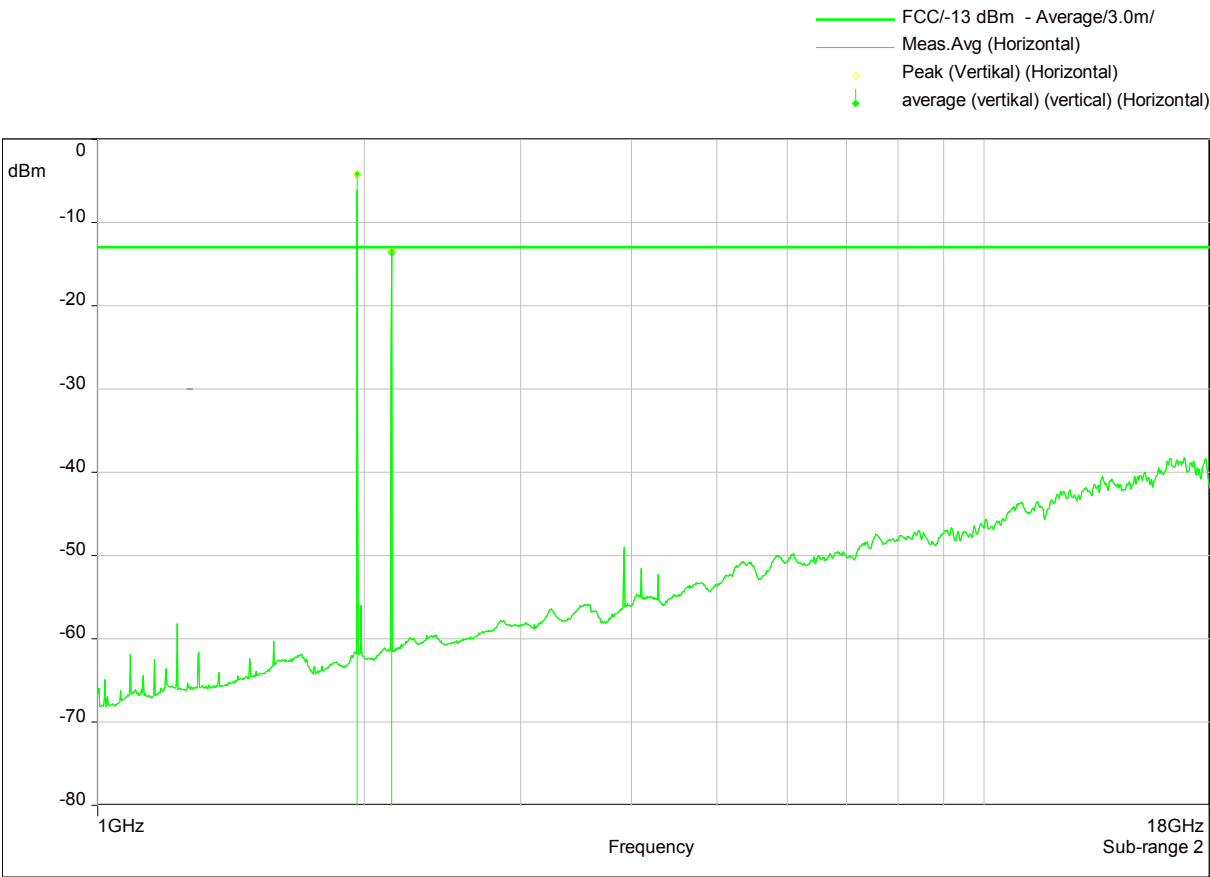


Frequency (MHz)	Peak (dBm)	Average (dBm)	Limit AV	Abstand AV (dBm)	Höhe	Winkel	Correction (dB)
1962.5	-4.11	-4.22	-13.00	-8.78	1.00	-131.40	27.06
2145	-13.35	-13.58	-13.00	0.58	1.87	-122.10	27.97

The RF output power is terminated.


10.5.5 18 GHz – 26 GHz Downlink (Bottom – Middle – Top)

EUT: RU only (without RF at EU) B/M/T: 2110 MHz / 2145 MHz / 2180 MHz

Vertikal

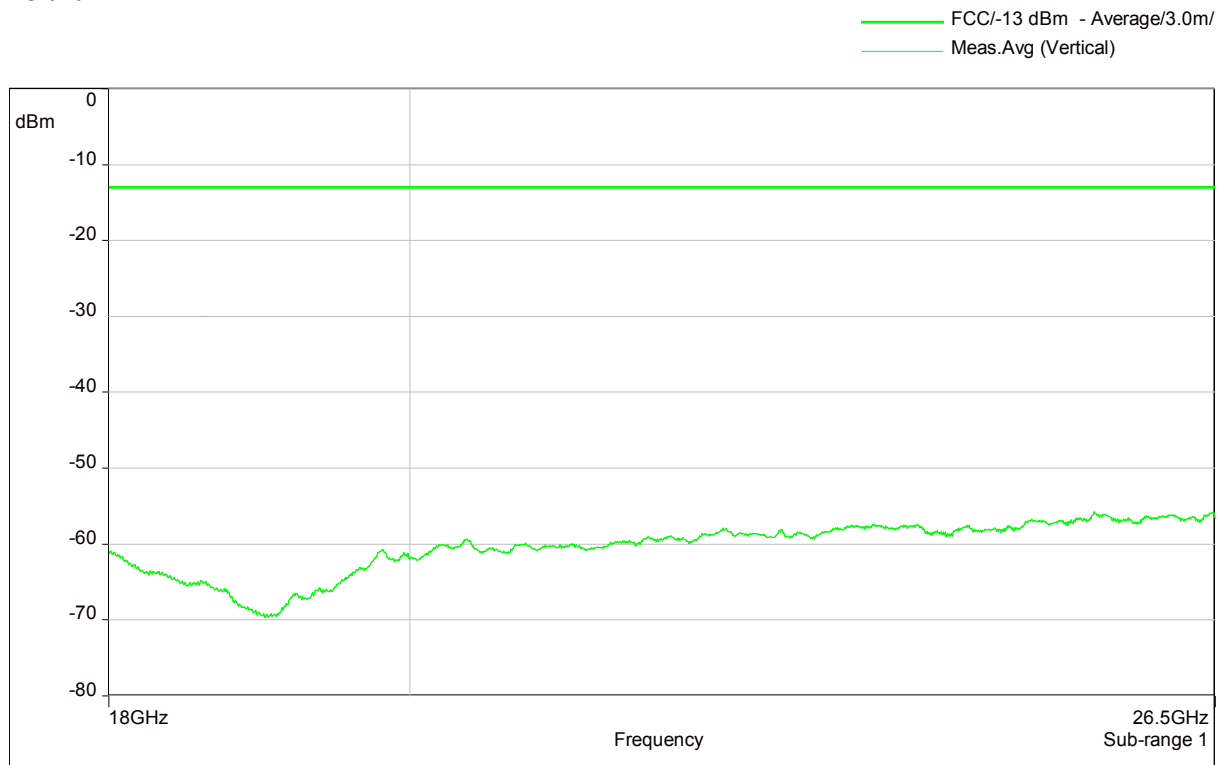


Horizontal

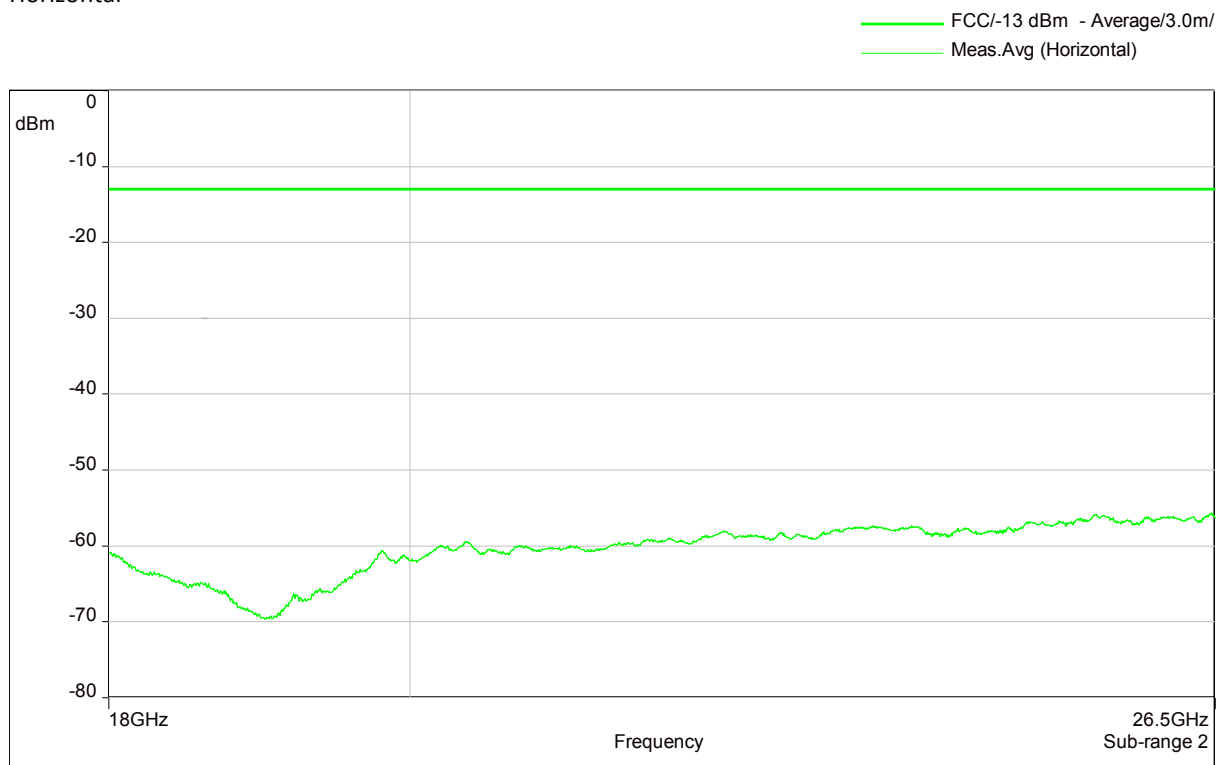


The RF output power is terminated.



EUT: RU and EU works with max power (MIMO) B/M/T: 2110 MHz / 2145 MHz / 2180 MHz
Vertikal

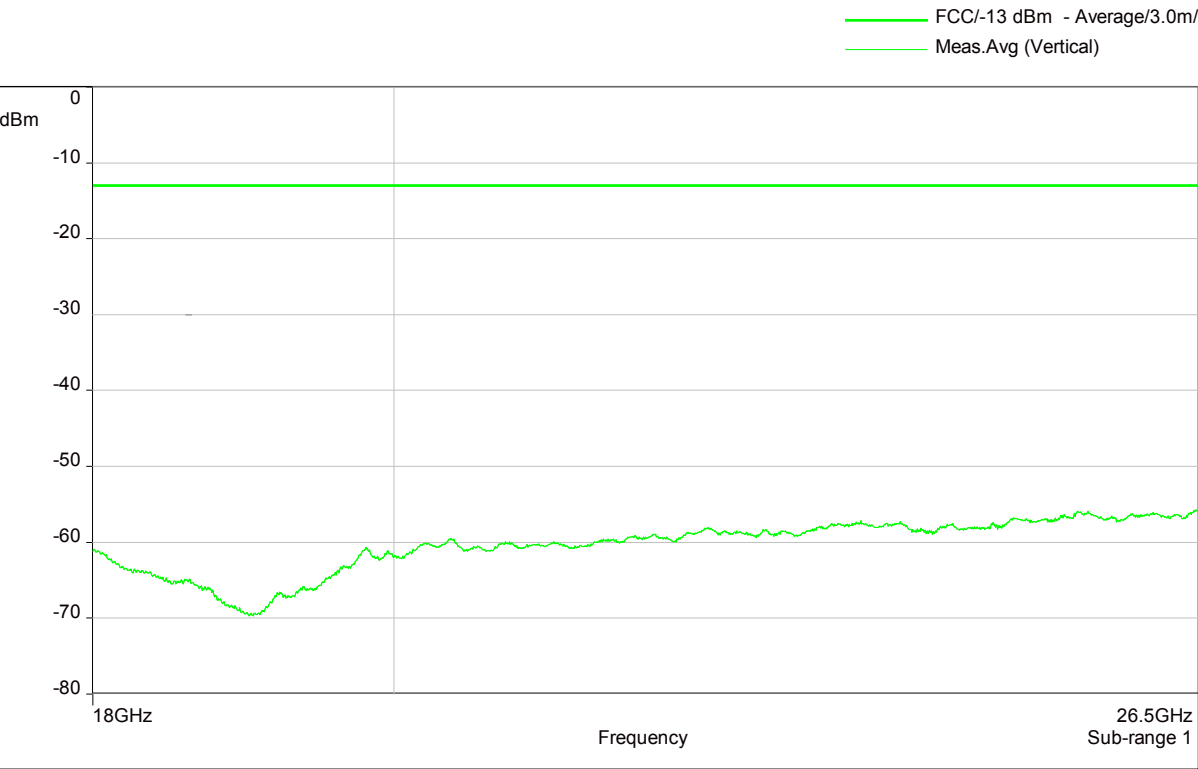

Horizontal

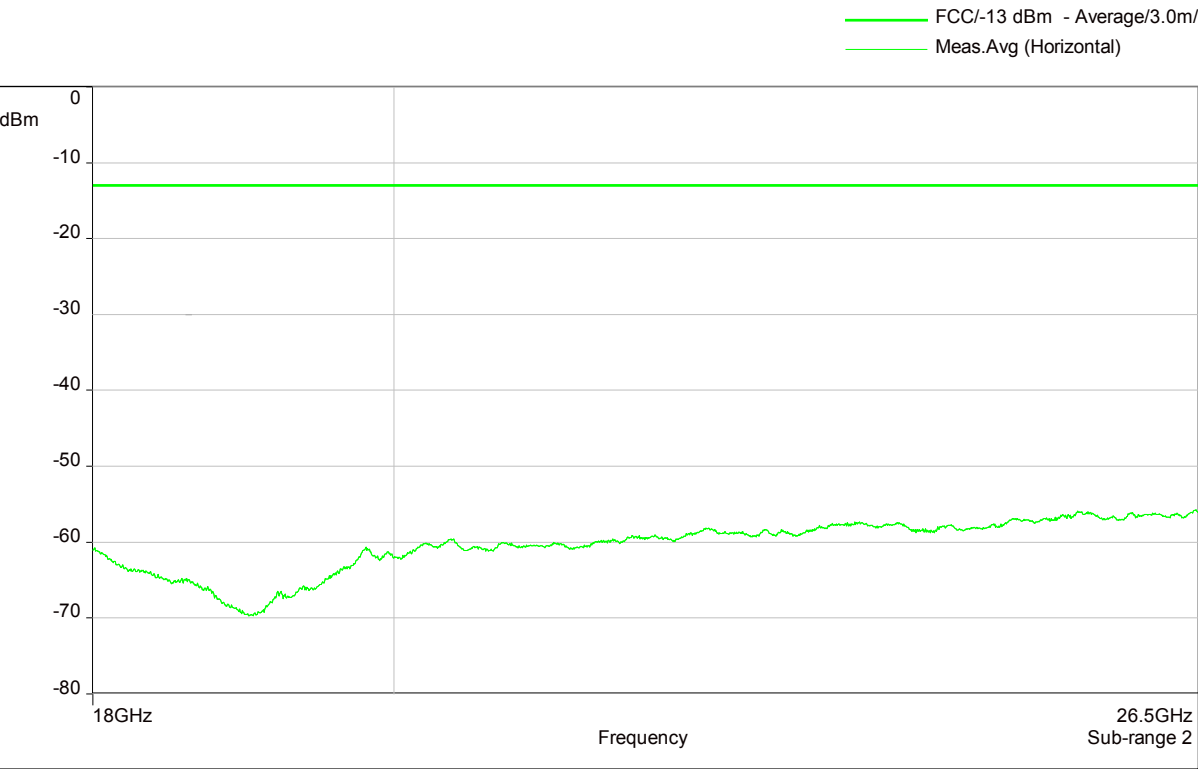


The RF output power is terminated.

10.5.6 18 GHz – 26 GHz Downlink (Middle of both paths)

EUT: RU only (without RF at EU) F1: 742,5 MHz; F2: 878 MHz; F3: 1962,5 MHz; F4: 2145 MHz


Vertikal

— FCC/-13 dBm - Average/3.0m/
— Meas.Avg (Vertical)

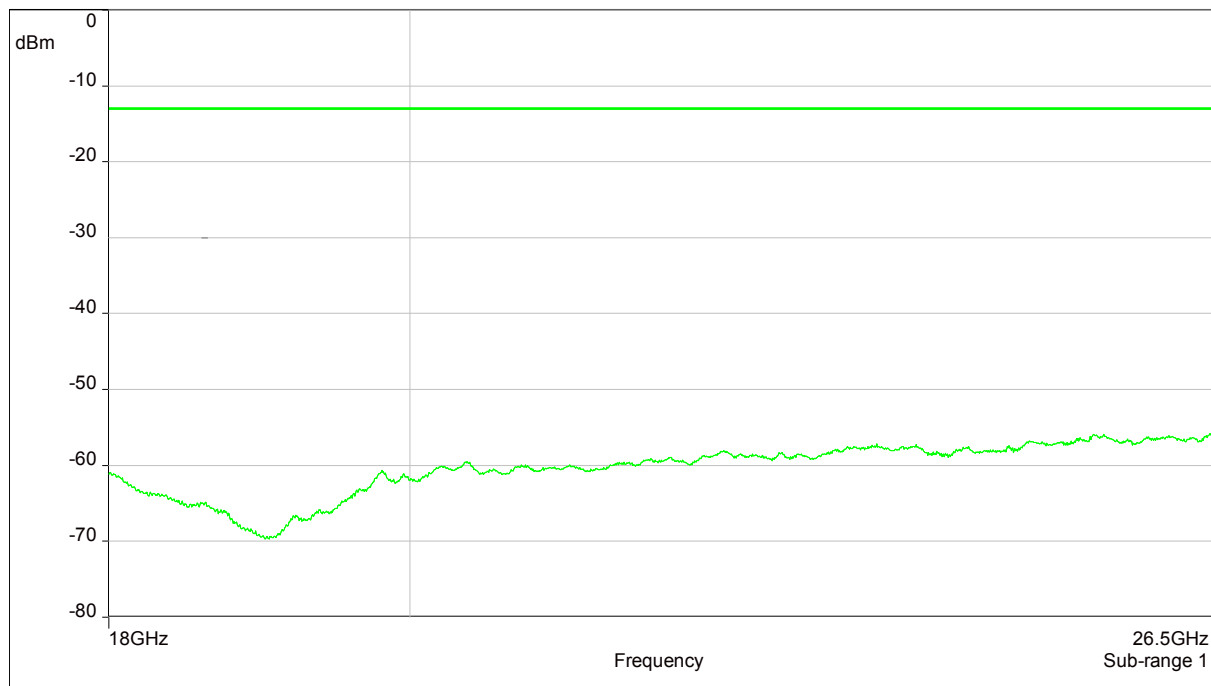

Horizontal


— FCC/-13 dBm - Average/3.0m/
— Meas.Avg (Horizontal)

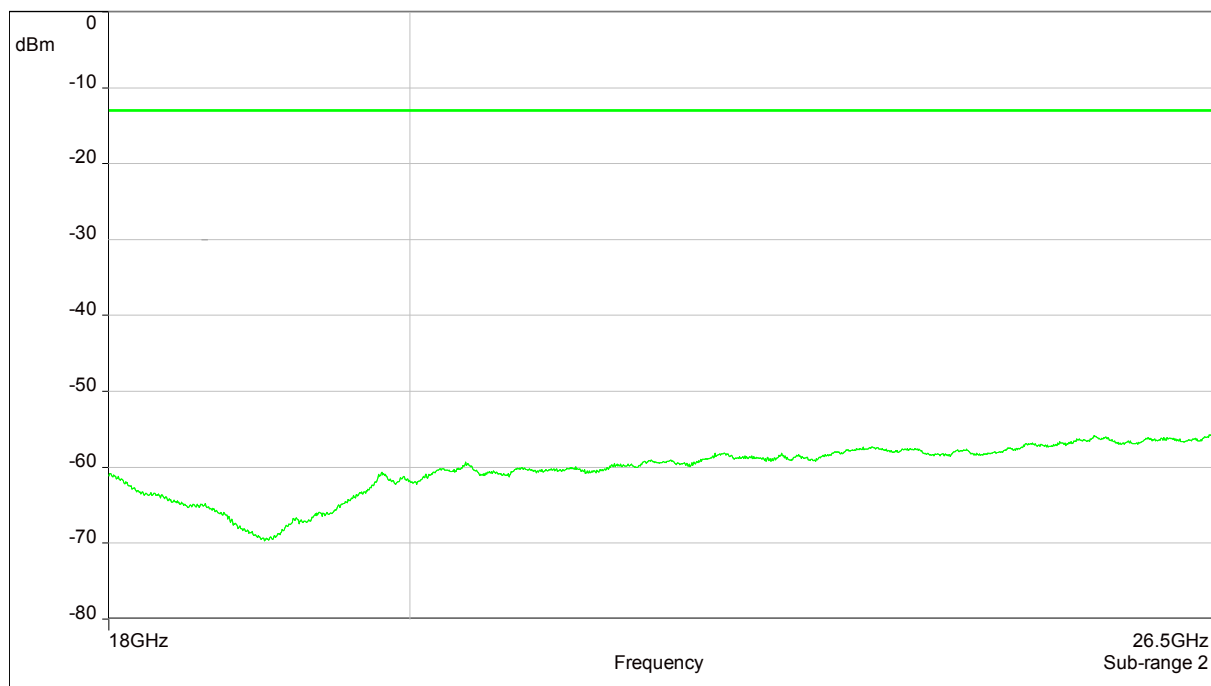


The RF output power is terminated.



EUT: RU and EU works with max power (MIMO) F1: 742,5 MHz/ F2: 878 MHz/ F3: 1962,5 MHz/
F4: 2145 MHz
Vertikal

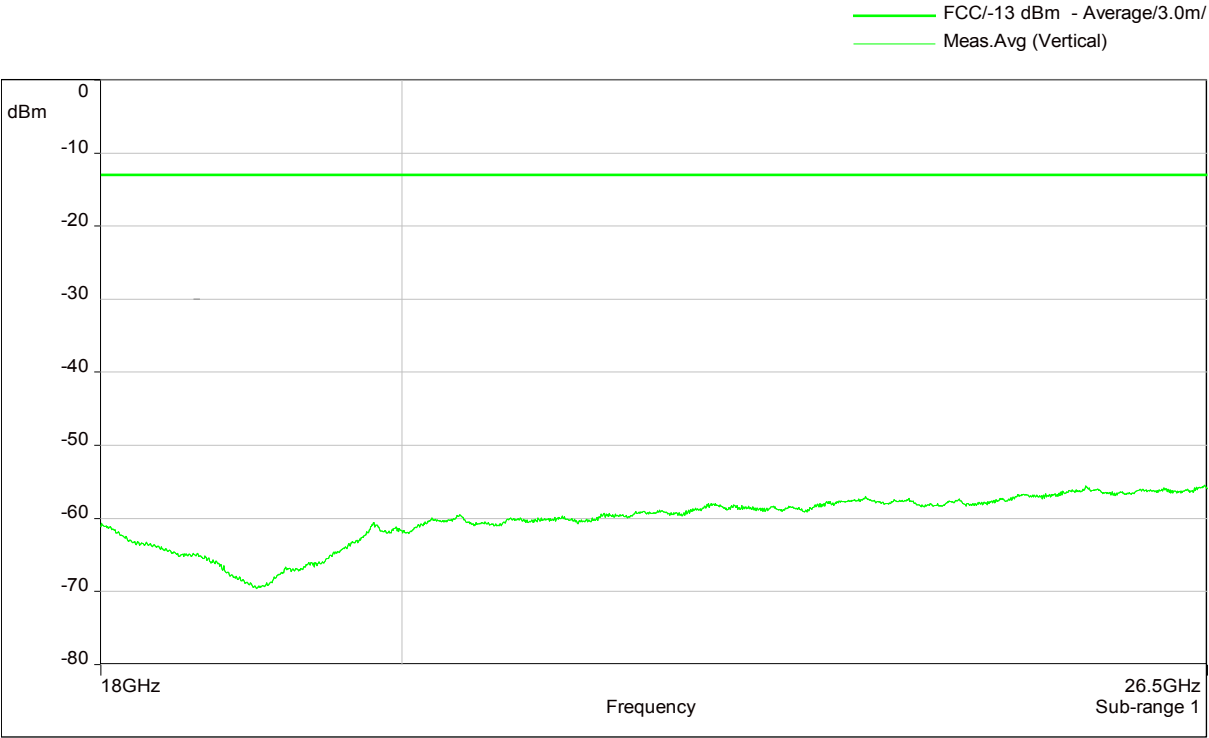

Horizontal

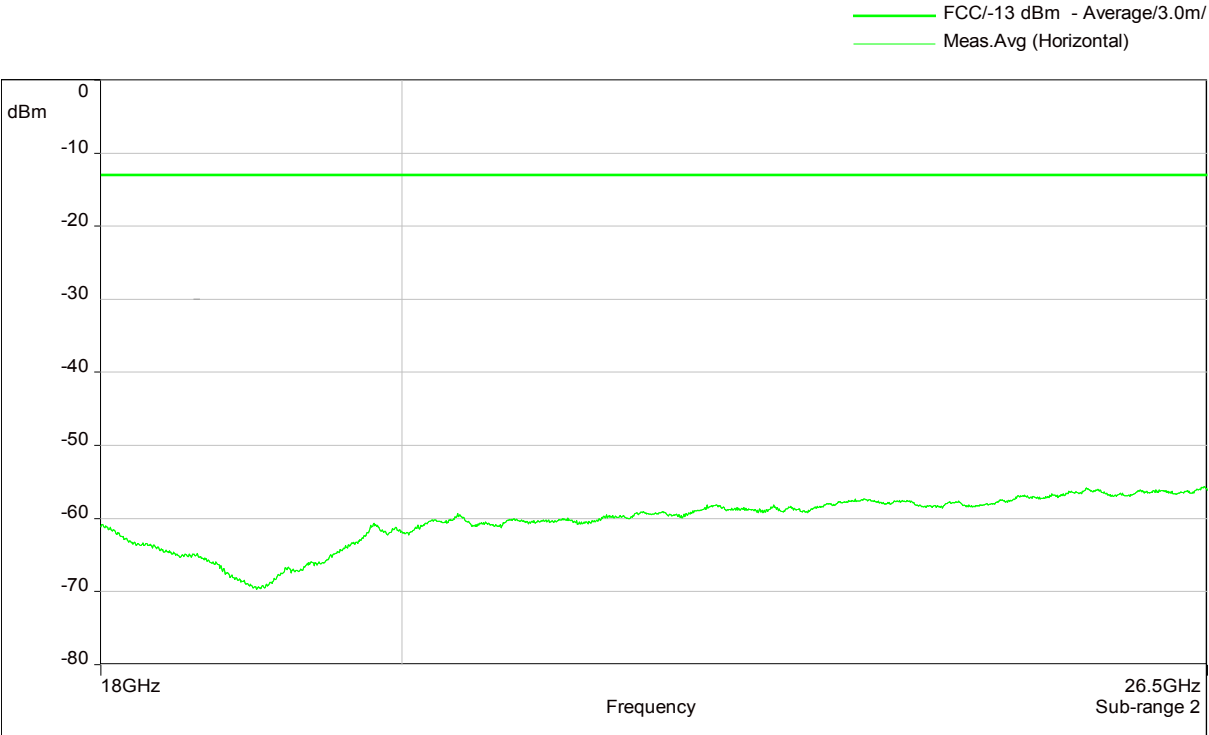

The RF output power is terminated.

Za / 25.01.2016

The radiated spurious emission measurements have been passed!



11 History

Revision	Modification	Date	Name
01.00	Initial Test report	15.02.2016	Tom Zahlmann

***** End of test report *****