



FCC 47 CFR PART 15 SUBPART C 15.247 TEST REPORT

FOR

Bluetooth Keyboard

Model : FILCFF03

Trade Name : FILCO

Issued to

Diatec Corporation

**4F Kairaku Bldg. (Soto-kanda) 6-5-4, Soto-kanda, Chiyoda-ku, Tokyo,
101-0021, Japan**

Issued by

WH Technology Corp.



Xizhi Office	7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Xizhi Lab	No. 67-22, Baoxin St., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Tel.: +886-2-7729-7707 Fax: +886-2-8648-1311	

Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. personnel only, and shall be noted in the revision section of the document.



Contents

1. General Information	4
2. Report of Measurements and Examinations	5
2.1 List of Measurements and Examinations	5
3. Test Configuration of Equipment under Test	6
3.1 Description of the Tested Samples	6
3.2 Carrier Frequency of Channels	7
3.3 Test Mode and Test Software	7
3.4 Test Methodology & General Test Procedures	8
3.5 Measurement Uncertainty	9
3.6 Description of the Support Equipments	9
4. Test and Measurement Equipment	10
4.1 Calibration	10
4.2 Equipment	10
5. Antenna Requirements	12
5.1 Standard Applicable	12
5.2 Antenna Construction and Directional Gain	12
6. Test of Conducted Emission	13
6.1 Test Limit	13
6.2 Test Procedures	13
6.3 Typical Test Setup	14
6.4 Test Result and Data	15
7. Test of Radiated Emission	17
7.1 Test Limit	17
7.2 Test Procedures	18
7.3 Typical Test Setup	19
7.4 Test Result and Data (9kHz ~ 30MHz)	20
7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)	20
7.6 Test Result and Data (Above 1GHz)	26
8. 20dB Bandwidth Measurement Data	32
8.1 Test Limit	32
8.2 Test Procedures	32
8.3 Test Setup Layout	32
8.4 Test Result and Data	32
9. Frequencies Separation	38
9.1 Test Limit	38
9.2 Test Procedures	38
9.3 Test Setup Layout	38
9.4 Test Result and Data	38
10. Dwell Time on each channel	44
10.1 Test Limit	44
10.2 Test Procedures	44
10.3 Test Setup Layout	44
10.4 Test Result and Data	45



11. Number of Hopping Channels	60
11.1 Test Limit	60
11.2 Test Procedures	60
11.3 Test Setup Layout	60
11.4 Test Result and Data	60
12. Maximum Peak Output Power	63
12.1 Test Limit	63
12.2 Test Procedures	63
12.3 Test Setup Layout	63
12.4 Test Result and Data	63
13. Band Edges Measurement	69
13.1 Test Limit	69
13.2 Test Procedure	69
13.3 Test Setup Layout	69
13.4 Test Result and Data	69
13.5 Restrict Band Emission Measurement Data	73
14. Restricted Bands of Operation	79
14.1 Labeling Requirement	79



1. General Information

Applicant : Diatec Corporation

Address : 4F Kairaku Bldg. (Soto-kanda) 6-5-4, Soto-kanda,
Chiyoda-ku, Tokyo, 101-0021, Japan

Manufacturer : Datacomp Electronics Co., Ltd.

Address : No. 38, Sec. 2 Nan-Kan Road, Lu-Chu Village, Taoyuan,
Taiwan R.O.C.

EUT : Bluetooth Keyboard

Model Name : FILCFF03

Model Differences : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10-2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

FCC part 15 subpart C

Receipt Date : 12/05/2019

Final Test Date : 05/12/2020

Tested By:

Reviewed by:

May. 12, 2020

Date

Bing Zhang / Engineer

May. 12, 2020

Date

Bell Wei / Manager
Designation Number: TW2954



2. Report of Measurements and Examinations

2.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
15.247(a)(1)	Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	20dB Bandwidth Measurement	Pass
15.247(a)(1)	Dwell Time	Pass
15.247(b)	Number of Hopping Channels	Pass
15.247(b)	Peak Output Power Measurement Data	Pass
15.247(d)	Band Edges Measurement Data	Pass



3. Test Configuration of Equipment under Test

3.1 Description of the Tested Samples

EUT Name : Bluetooth Keyboard

Model Number : FILCFF03

FCC ID : XS8-MINILA-R

Receipt Date : 12/05/2019

EUT Power Rating : DC 5V from PC
DC 3V from AA Batteries*2

Operate Frequency : Refer to the channel list as described below
(2402 ~ 2480 MHz)

Modulation Technique : GFSK, $\pi/4$ -DQPSK, 8DPSK

Number of Channels : 79

Channel Spacing : 1 MHz

Operating Mode : ☐ Simplex ☒ Duplex

Antenna Type : PCB Antenna

Antenna Gain : 2.78 dBi



3.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

3.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10-2013.
- The complete test system included Notebook and EUT for RF test.
- An executive "BLUETEST3" under WIN8 was executed to keep transmitting and receiving data via Wireless.
- The following test modes were performed for test:
 - GFSK: CH00: 2402MHz, CH39: 2441MHz, CH78: 2480MHz
 - $\pi/4$ -DQPSK: CH00: 2402MHz, CH39: 2441MHz, CH78: 2480MHz
 - 8DPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.



3.4 Test Methodology & General Test Procedures

All testing as described bellowed were performed in accordance with ANSI C63.10-2013 and FCC CFR 47 Part 15 Subpart C.

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

- 1) Putting the EUT on the platform and turning on the EUT (on/off button on the bottom of the EUT).
- 2) Setting test channel described as "Channel setting and operating condition", and testing channel by channel.
- 3) For the spurious emission test based on ANSI(2013), at the frequency where below 1GHz used quasi-peak detector mode; where above 1GHz used the peak and average detector mode. IF the peak value may be under average limit, the average mode will not be performed.



3.5 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	$\pm 4.11\text{dB}$
Peak Output Power (Conducted)	$\pm 1.38\text{dB}$
Peak Output Power (Radiated)	$\pm 1.70\text{dB}$
Power Spectral Density	$\pm 1.39\text{dB}$
Radiated emission (3m)	$\pm 4.11\text{dB}$
Radiated emission (10m)	$\pm 3.89\text{dB}$

3.6 Description of the Support Equipments

Setup Diagram

See test photographs attached in appendix for the actual connections between EUT and support equipment.

Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	PC	D19M	CYY7Y A00 DC4	R33002	DELL	N/A	Unshielded 1.8m
2.	Monitor	BL2420-T	EJ35J00797019	R33037	BENQ	Shielded 1.8m	Unshielded 1.8m
3.	Printer	D4360	N/A	R33001	HP	Shielded 1.8m / USB	Unshielded 1.8m
4.	USB 3.0	TAD-SDCZS0	NA	D31490	SanDisk	Shielded 1m / USB	N/A
5.	Mouse	MS111-L	CN-09RRC7- 48729-43M-070D	T41126	DELL	Shielded 1.8m / USB	N/A
6.	Notebook	N16P7	NXVGKTA001751 042C17200	R33142	Acer	N/A	Unshielded 1.8m

Note: (1) All the above equipment /cable were placed in worse case position to maximize emission signals during emission test.

(2) Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



4. Test and Measurement Equipment

4.1 Calibration

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2 Equipment

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.



TABLELIST OF TEST AND MEASUREMENT EQUIPMENT

Conducted emission				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
EMI Test Receiver	R&S	ESHS30	838550/003	2020/08/12
Spectrum Analyzer	R&S	FSP7	830180/009	2020/08/14
Two-Line V-Network	EMCO	3810/2NM	9801-1849	2020/08/07
Test Cable	EMCI	EMCCFD300-BM-BM-3000	180618	2020/08/11
Measurement Software	AUDIX	e3	V9.160707	N/A
Radiated emission Below 1GHz				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
Bilog antenna	Chase	CBL6111A	1546	2020/07/30
LOOP Antenna	EMCO	6507	9301-1298	2021/01/08
Pre-amplifier	Anritsu	MH648A	M15180	2020/08/11
Cable	EMCI	EMCCFD400-NM-NM-7000	180617	2020/08/11
Cable	Marvelous Microwave	260260.F141	120A	2020/08/11
Receiver	R&S	ESC13	101131	2020/09/08
Measurement Software	AUDIX	e3	V9.160707	N/A
Radiated emission Above 1GHz				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
Horn antenna	ETS LINDGREN	3117	00114397	2021/04/08
Horn antenna	com-power	AH-826	81000	2020/09/16
Horn antenna	Schwarzbeck	BBHA9170	#687	2020/06/11
Pre-amplifier	EMCI	EMC051845	980108	2020/12/19
Pre-amplifier	MITEQ	JS4-18002600-30-5A	808329	2020/09/04
Pre-amplifier	EMC INSTRUMENT	EMC264035SE	980288	2021/04/18
RF CABLE	SUCOFLEX	104PEA	27348/4PEA	2020/06/10
RF CABLE	AGILENT	EMC102-KM-KM-3000	160101	2020/08/18
RF CABLE	AGILENT	EMC102-KM-KM-600	160102	2020/08/18
Spectrum Analyzer	R&S	FSP7	830180/006	2021/04/23
Spectrum Analyzer	ADVANTEST	R3182	150900201	2021/01/17
Measurement Software	AUDIX	e3	V9.160707	N/A

***CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR.**



5. Antenna Requirements

5.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Antenna Construction and Directional Gain

Antenna Type: PCB Antenna

Antenna Gain: 2.78 dBi



6. Test of Conducted Emission

6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

6.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




6.3 Typical Test Setup

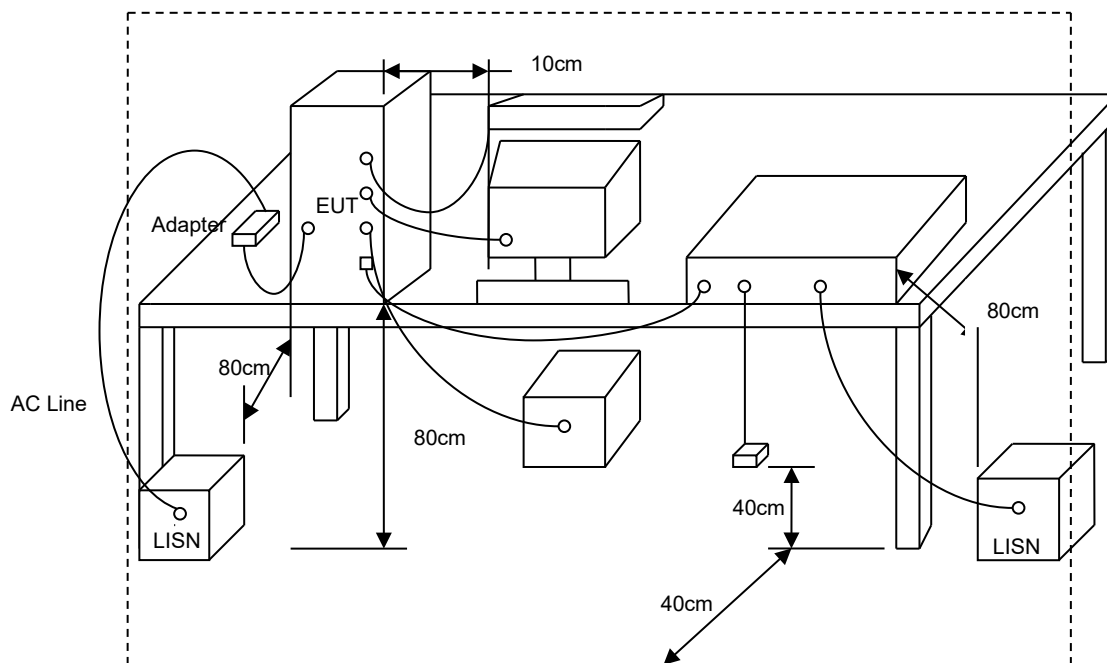



6.4 Test Result and Data

Power	: DC 5V	Pol/Phase	: LINE
Temperature	: 20 °C	Humidity	: 50 %
Test Mode	: USB Power + Bluetooth Connection		

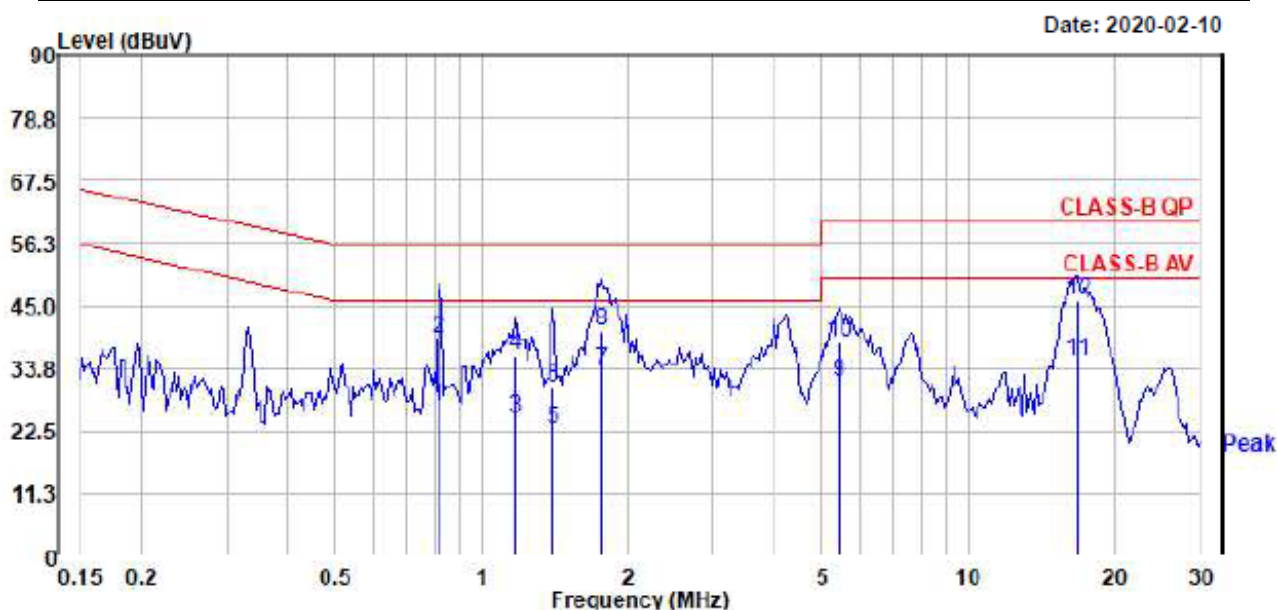


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.817	25.78	0.88	26.66	46.00	-19.34	Average
2	0.817	38.21	0.88	39.09	56.00	-16.91	QP
3	1.172	23.76	0.89	24.65	46.00	-21.35	Average
4	1.172	35.06	0.89	35.95	56.00	-20.05	QP
5	1.403	21.98	0.89	22.87	46.00	-23.13	Average
6	1.403	29.40	0.89	30.29	56.00	-25.71	QP
7	1.772	32.34	0.89	33.23	46.00	-12.77	Average
8	1.772	39.44	0.89	40.33	56.00	-15.67	QP
9	5.447	30.18	0.90	31.08	50.00	-18.92	Average
10	5.447	37.44	0.90	38.34	60.00	-21.66	QP
11	16.750	33.95	0.89	34.84	50.00	-15.16	Average
12	16.750	45.02	0.89	45.91	60.00	-14.09	QP

Remarks: Factor = Insertion Loss + Cable Loss



Power	: DC 5V	Pol/Phase	: NEUTRAL
Temperature	: 20 °C	Humidity	: 50 %
Test Mode	: USB Power + Bluetooth Connection		

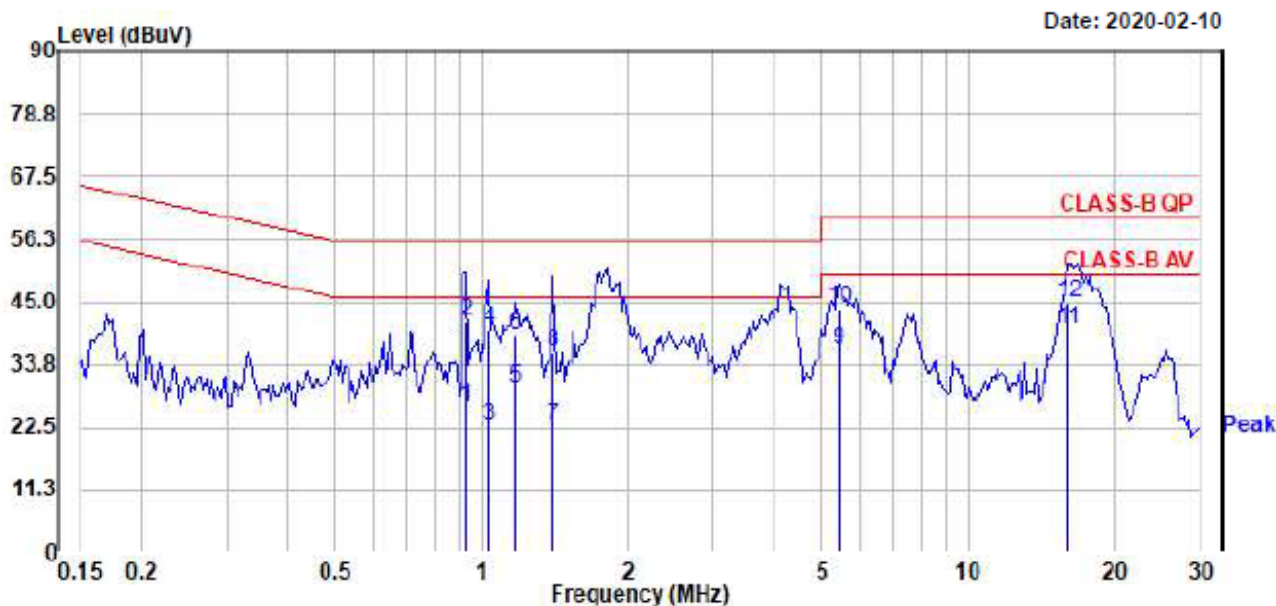

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dBuV	dBuV		
1	0.928	25.31	0.88	26.19	46.00	-19.81	Average
2	0.928	40.56	0.88	41.44	56.00	-14.56	QP
3	1.032	21.97	0.88	22.85	46.00	-23.15	Average
4	1.032	39.26	0.88	40.14	56.00	-15.86	QP
5	1.172	28.69	0.88	29.57	46.00	-16.43	Average
6	1.172	38.24	0.88	39.12	56.00	-16.88	QP
7	1.403	21.83	0.88	22.71	46.00	-23.29	Average
8	1.403	35.18	0.88	36.06	56.00	-19.94	QP
9	5.447	35.33	0.91	36.24	50.00	-13.76	Average
10	5.447	42.85	0.91	43.76	60.00	-16.24	QP
11	16.055	39.12	0.89	40.01	50.00	-9.99	Average
12	16.055	43.92	0.89	44.81	60.00	-15.19	QP

Remarks: Factor = Insertion Loss + Cable Loss



7. Test of Radiated Emission

7.1 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3




7.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




7.3 Typical Test Setup


For radiated emissions below 30MHz

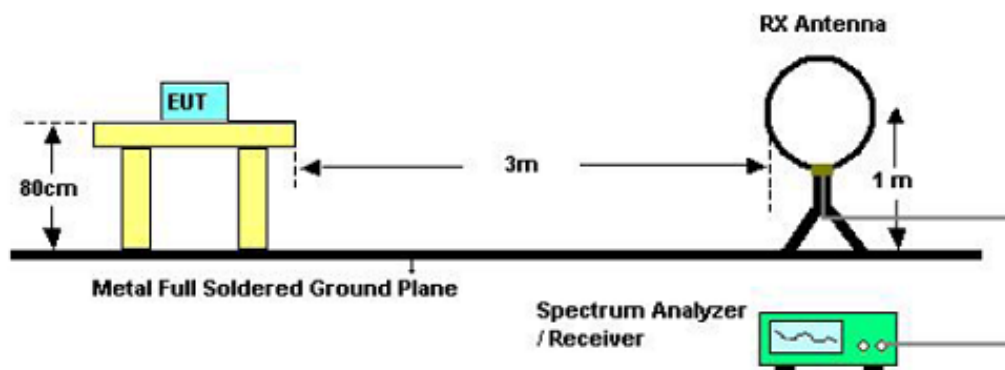

For radiated emissions above 30MHz

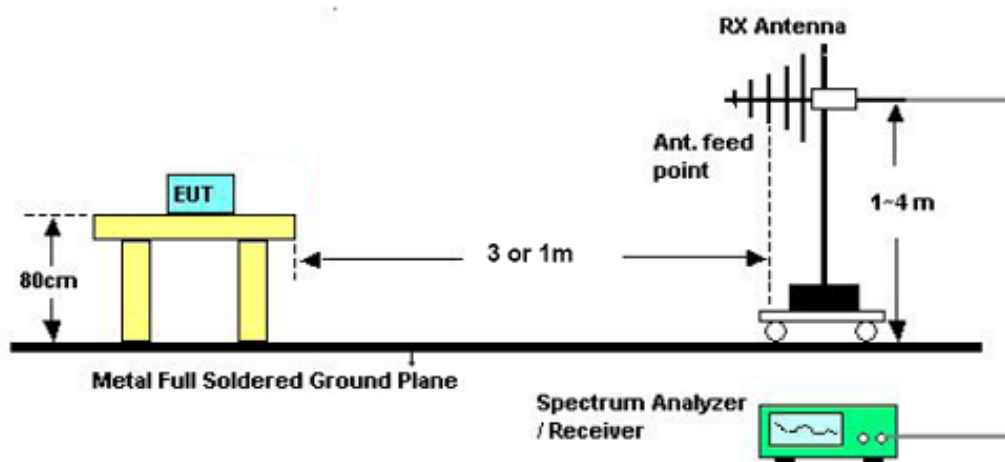

For radiated emissions above 1GHz

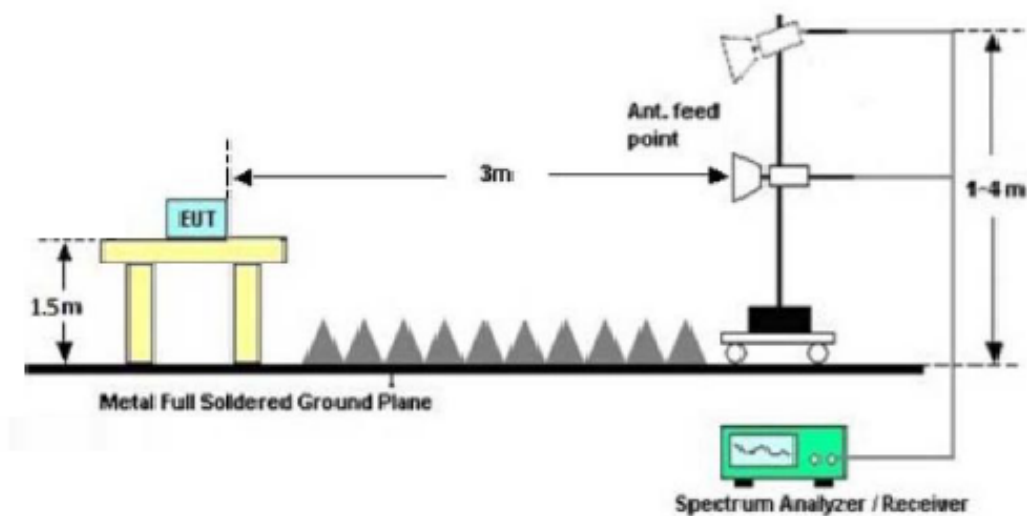




7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)

Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: GFSK: CH78		

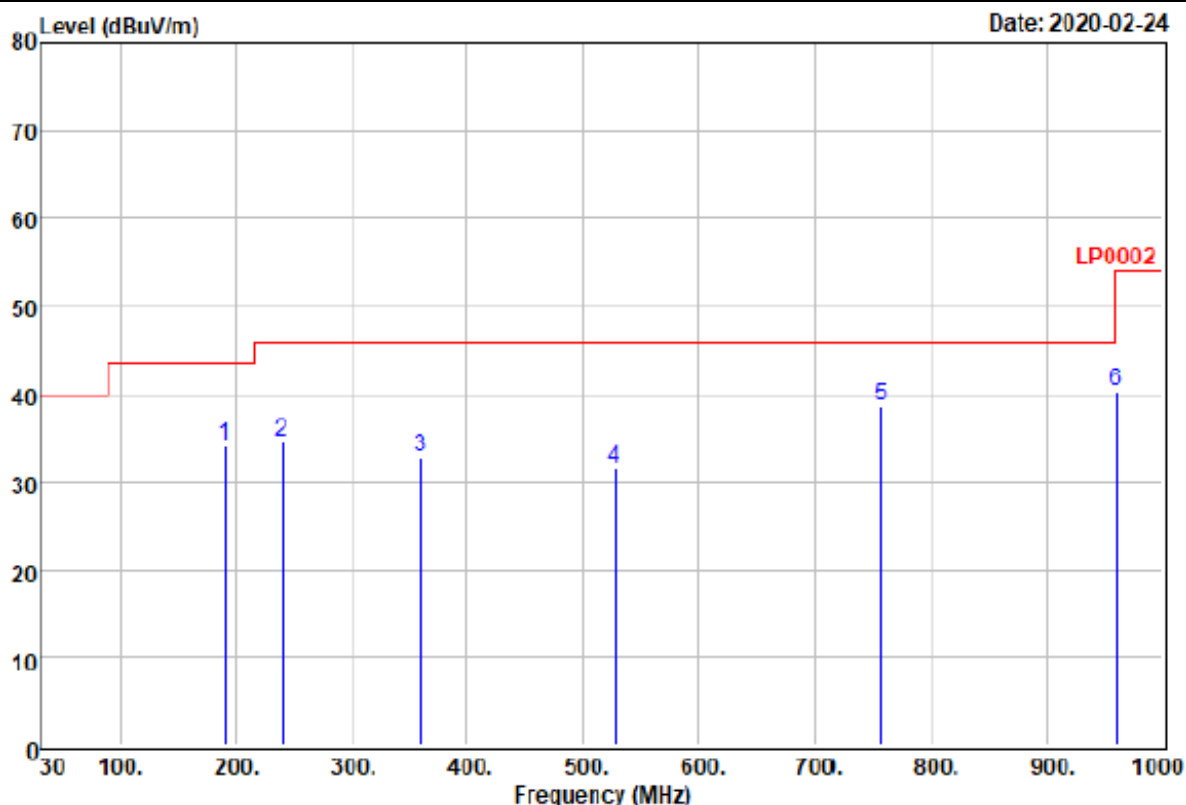


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read		Limit	Over	
	MHz	Level	Factor	Level	Line	Limit Remark
		dBuV	dB/m	dBuV/m	dBuV/m	dB
1	191.010	51.97	-17.95	34.02	43.50	-9.48 QP
2	239.370	49.88	-15.36	34.52	46.00	-11.48 QP
3	359.650	44.14	-11.34	32.80	46.00	-13.20 QP
4	527.300	39.83	-8.22	31.61	46.00	-14.39 QP
5 @	756.040	43.68	-5.15	38.53	46.00	-7.47 QP
6	960.510	40.87	-0.64	40.23	54.00	-13.77 QP



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: GFSK: CH78		

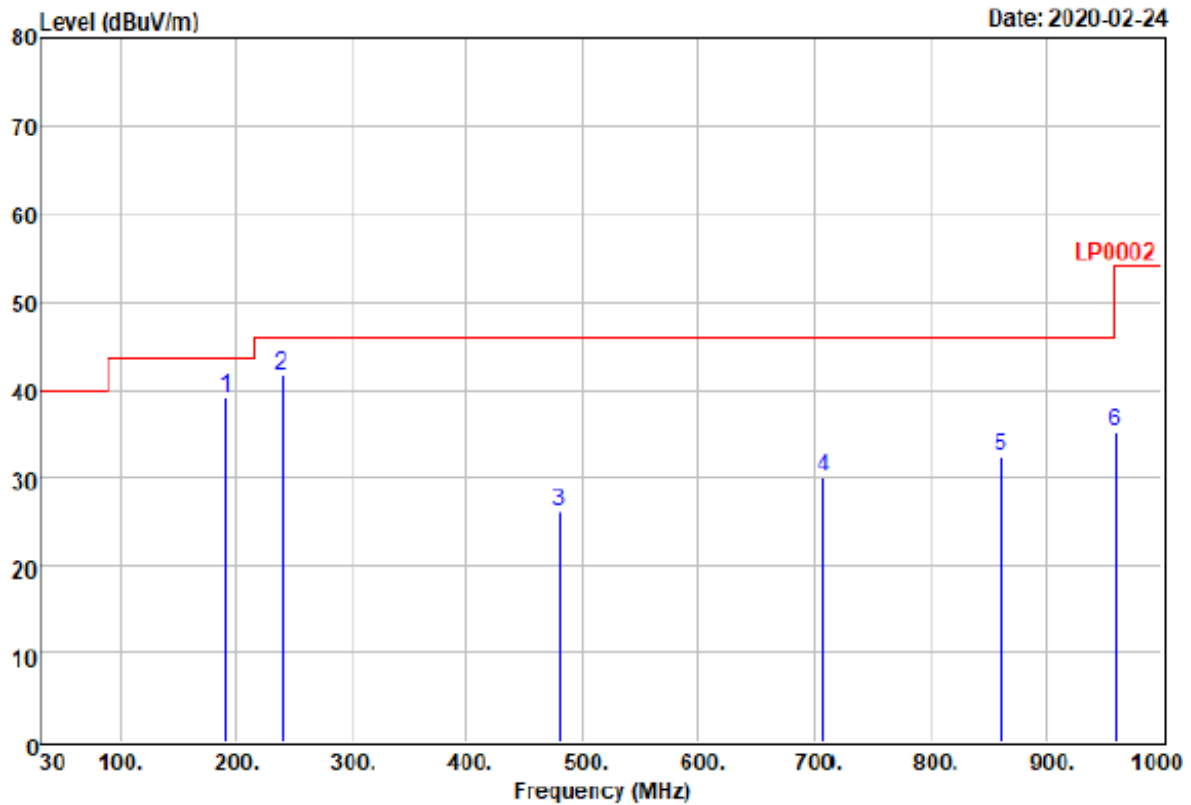


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 @	191.840	56.93	-17.91	39.02	43.50	-4.48 QP
2	239.920	56.85	-15.33	41.52	46.00	-4.48 QP
3	480.210	35.06	-8.98	26.08	46.00	-19.92 QP
4	709.150	35.63	-5.63	30.00	46.00	-16.00 QP
5	861.630	34.94	-2.65	32.29	46.00	-13.71 QP
6	960.810	35.87	-0.64	35.23	54.00	-18.77 QP



Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: $\pi/4$ -DQPSK: CH78		

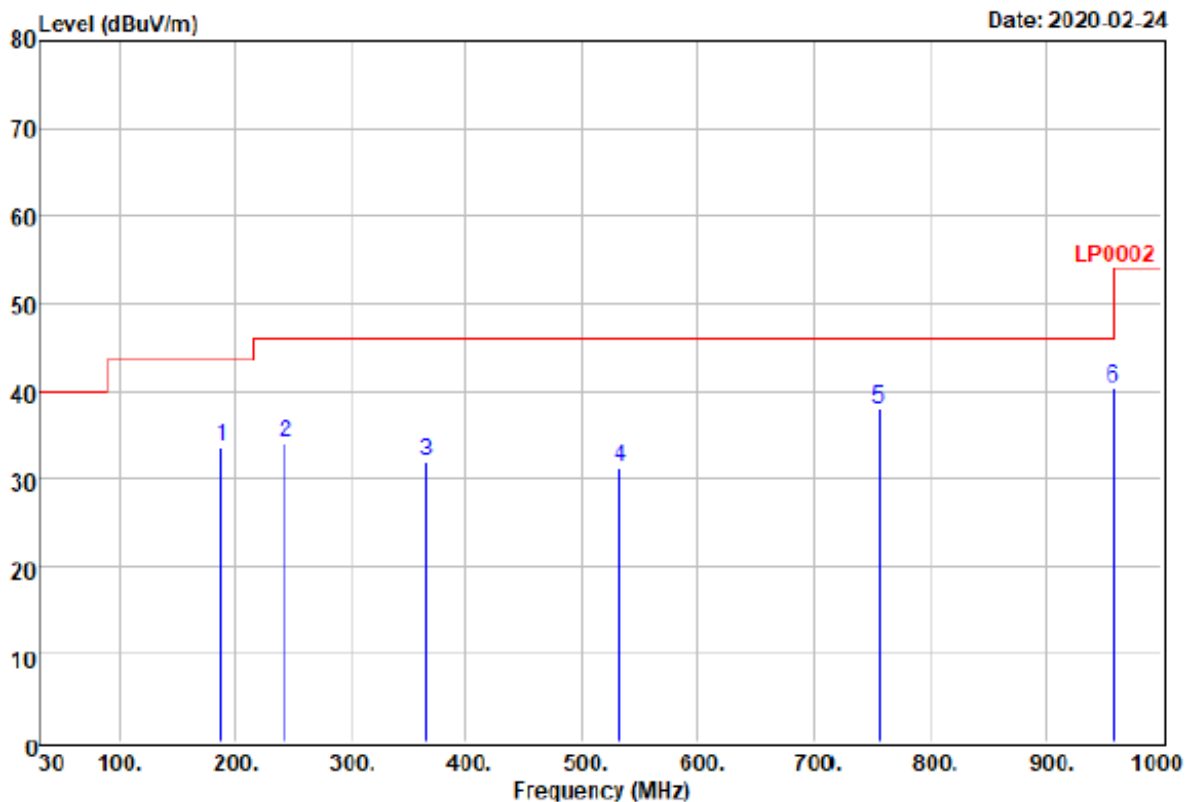


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	188.240	51.84	-18.09	33.75	43.50	-9.75	QP
2	243.610	49.20	-15.13	34.07	46.00	-11.93	QP
3	365.800	43.01	-11.12	31.89	46.00	-14.11	QP
4	533.190	39.51	-8.13	31.38	46.00	-14.62	QP
5	755.470	43.05	-5.15	37.90	46.00	-8.10	QP
6 @	958.700	40.86	-0.64	40.22	46.00	-5.78	QP



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: $\pi/4$ -DQPSK: CH78		

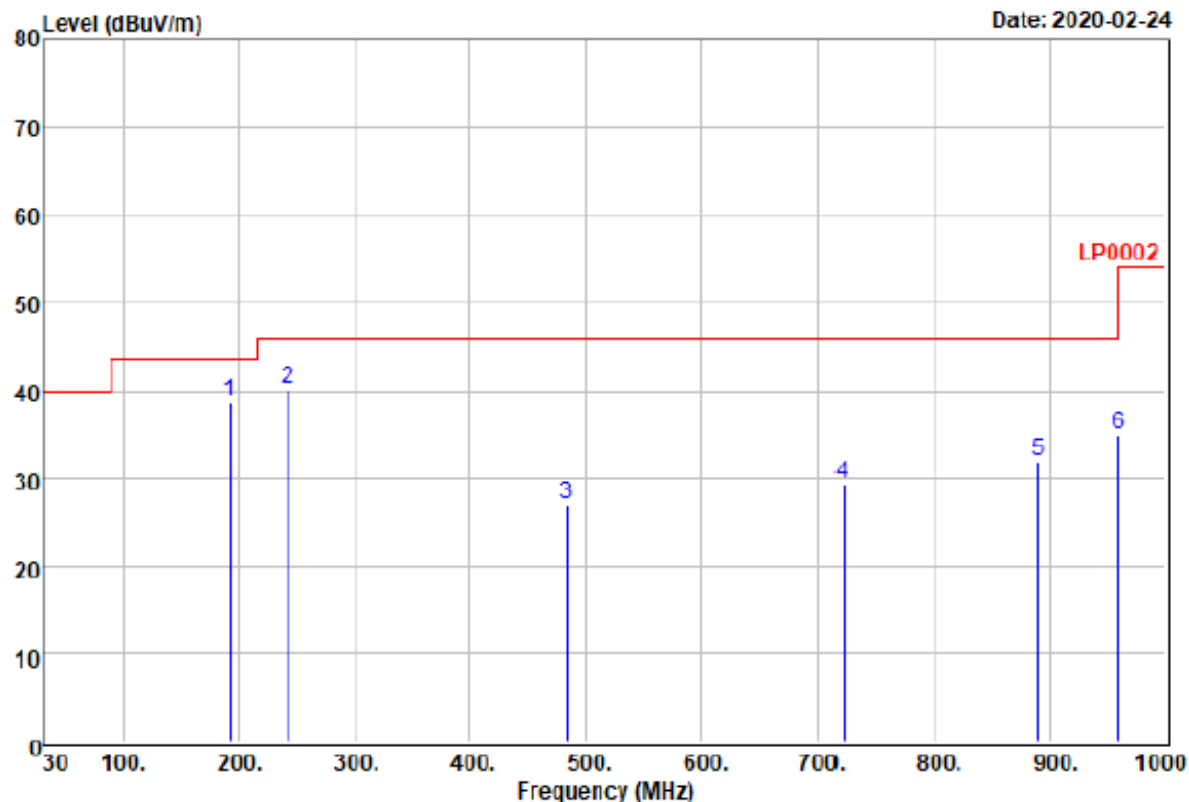


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 @	192.000	56.58	-17.91	38.67	43.50	-4.83 QP
2	242.930	55.38	-15.17	40.21	46.00	-5.79 QP
3	484.040	35.97	-8.92	27.05	46.00	-18.95 QP
4	721.620	34.93	-5.52	29.41	46.00	-16.59 QP
5	889.350	34.31	-2.46	31.85	46.00	-14.15 QP
6	960.030	35.62	-0.64	34.98	54.00	-19.02 QP



Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: 8DPSK: CH78		

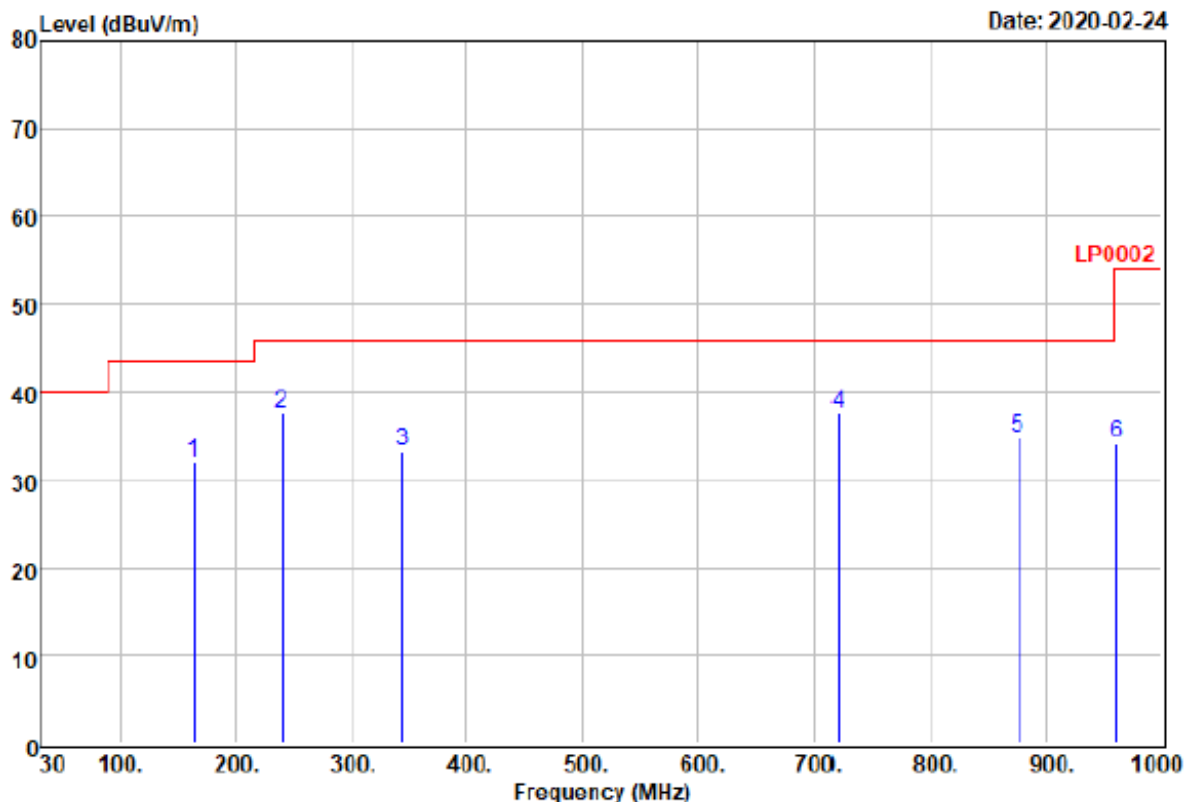


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	163.040	48.61	-16.75	31.86	43.50	-11.64	QP
2	239.560	52.87	-15.35	37.52	46.00	-8.48	QP
3	344.730	45.09	-11.81	33.28	46.00	-12.72	QP
4 @	720.310	43.16	-5.52	37.64	46.00	-8.36	QP
5	875.660	37.39	-2.55	34.84	46.00	-11.16	QP
6	961.310	34.84	-0.64	34.20	54.00	-19.80	QP



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: 8DPSK: CH78		

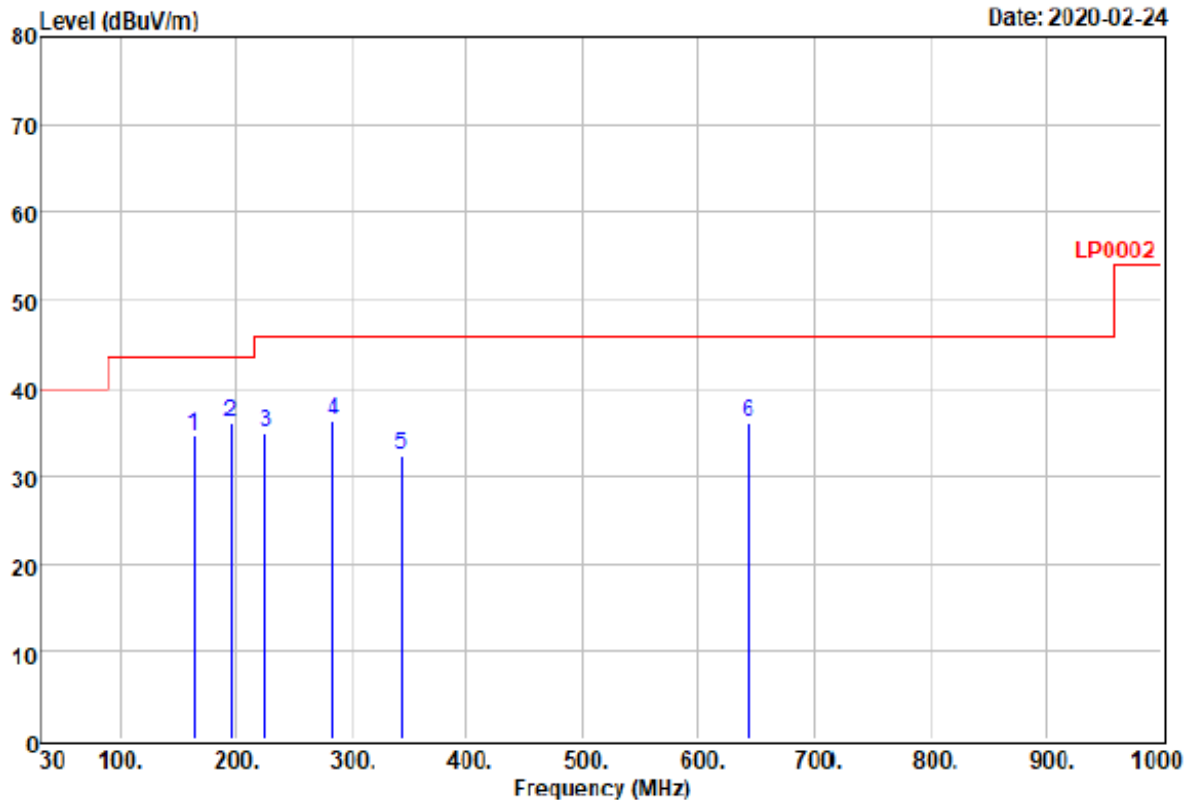


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	163.110	51.25	-16.76	34.49	43.50	-9.01	QP
2 @	195.490	53.74	-17.77	35.97	43.50	-7.53	QP
3	225.520	51.25	-16.31	34.94	46.00	-11.06	QP
4	284.520	49.37	-13.23	36.14	46.00	-9.86	QP
5	344.040	44.11	-11.83	32.28	46.00	-13.72	QP
6	644.100	41.21	-5.23	35.98	46.00	-10.02	QP



7.6 Test Result and Data (Above 1GHz)

Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: GFSK: CH00, CH39, CH78		

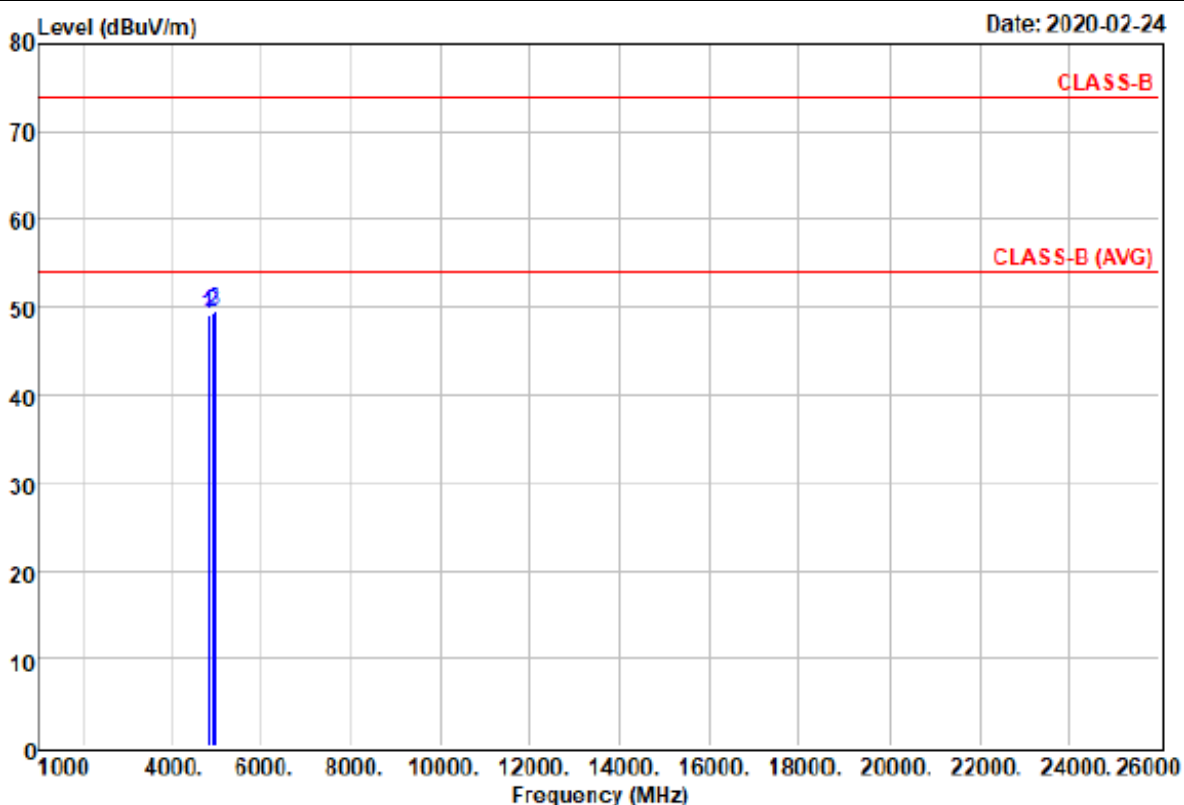


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	54.57	-5.44	49.13	74.00	-24.87 Peak
2	4882.000	54.43	-5.15	49.28	74.00	-24.72 Peak
3 @	4960.000	54.30	-4.86	49.44	74.00	-24.56 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: GFSK: CH00, CH39, CH78		

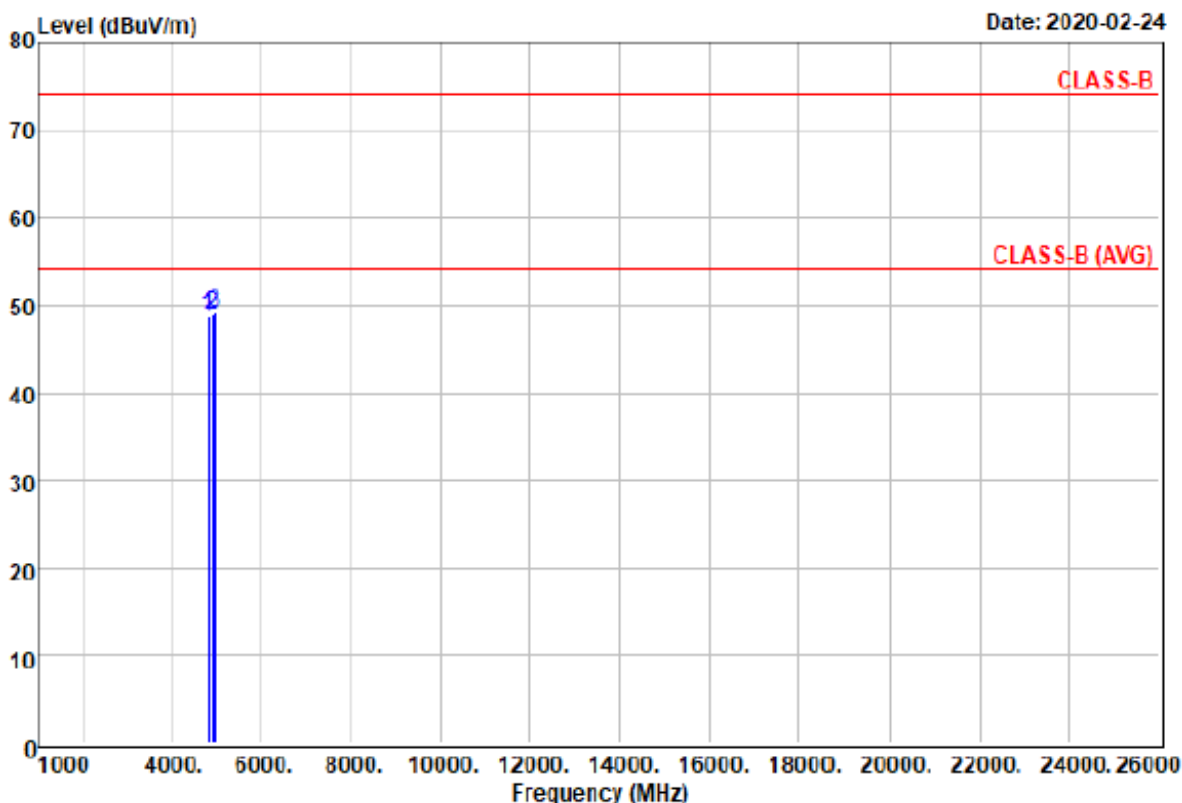


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	54.23	-5.44	48.79	74.00	-25.21 Peak
2	4882.000	54.11	-5.15	48.96	74.00	-25.04 Peak
3 @	4960.000	54.00	-4.86	49.14	74.00	-24.86 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: $\pi/4$ -DQPSK: CH00, CH39, CH78		

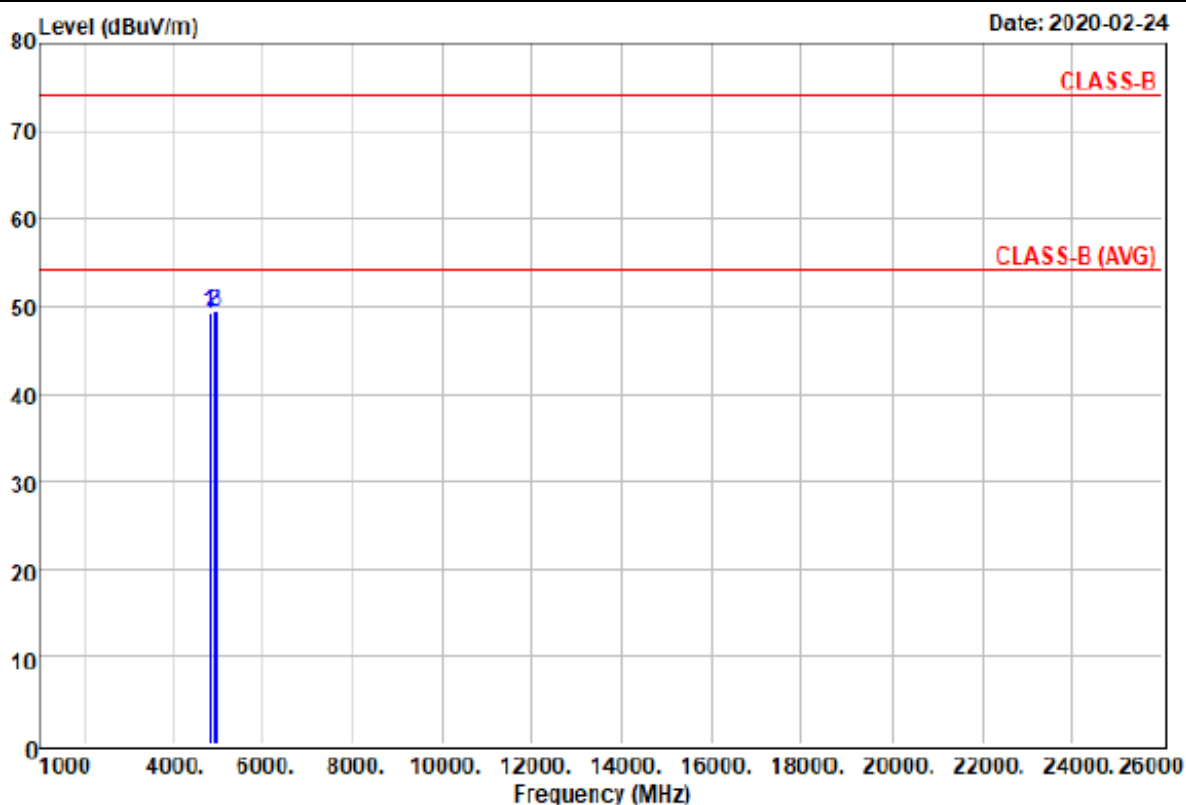


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	54.53	-5.44	49.09	74.00	-24.91 Peak
2	4882.000	54.40	-5.15	49.25	74.00	-24.75 Peak
3 @	4960.000	54.27	-4.86	49.41	74.00	-24.59 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: $\pi/4$ -DQPSK: CH00, CH39, CH78		

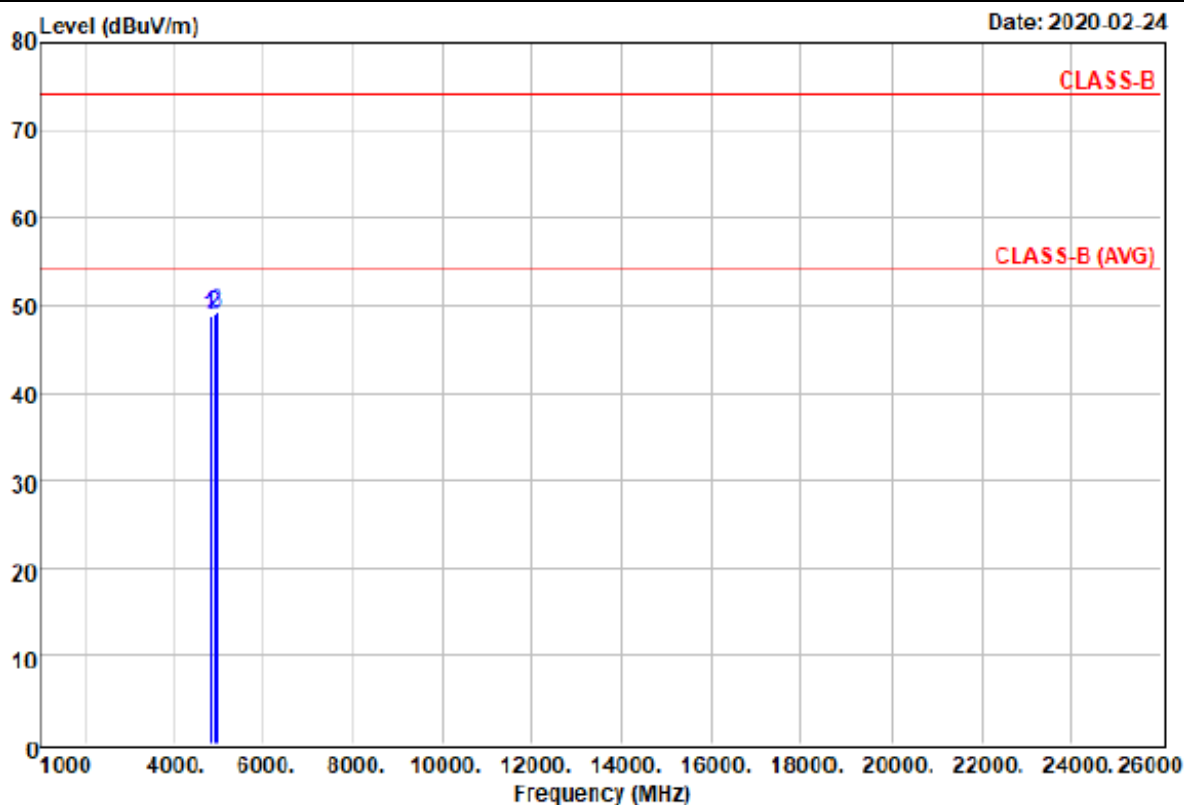


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	54.18	-5.44	48.74	74.00	-25.26 Peak
2	4882.000	54.09	-5.15	48.94	74.00	-25.06 Peak
3 @	4960.000	53.97	-4.86	49.11	74.00	-24.89 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: 8DPSK: CH00, CH39, CH78		

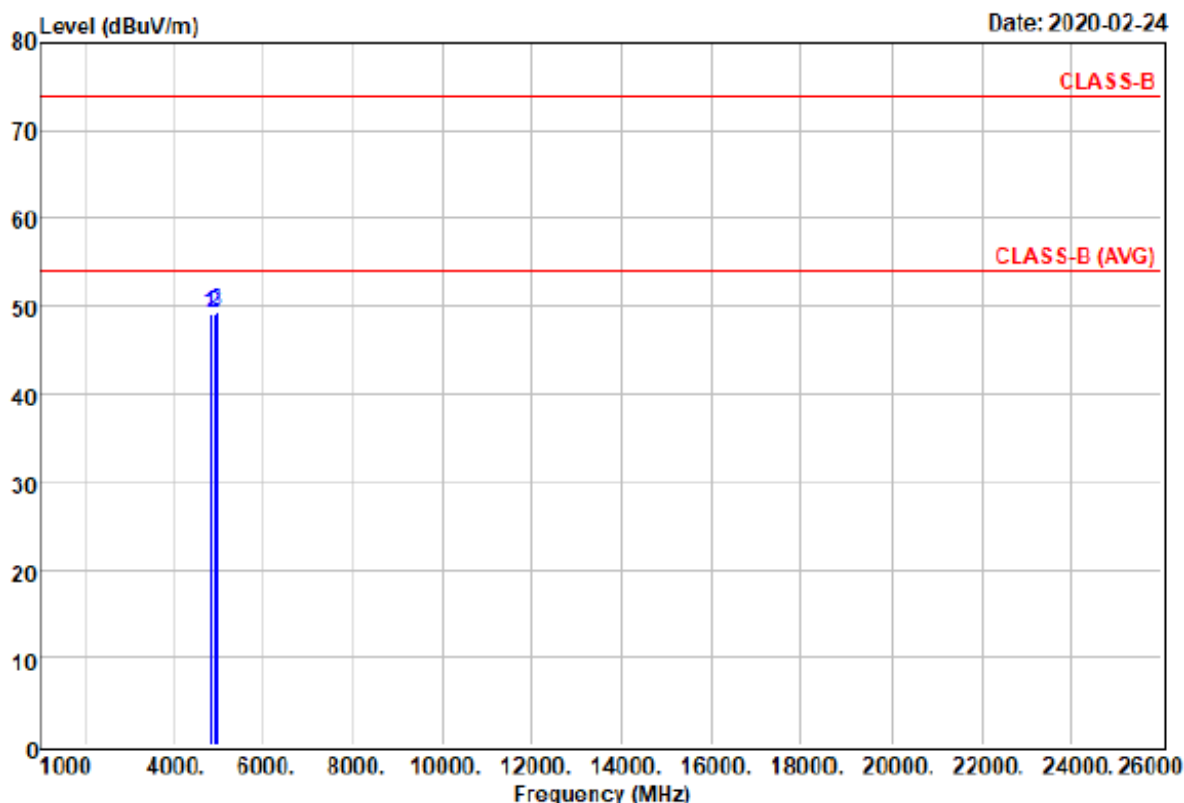


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	54.47	-5.44	49.03	74.00	-24.97 Peak
2	4882.000	54.36	-5.15	49.21	74.00	-24.79 Peak
3 @	4960.000	54.20	-4.86	49.34	74.00	-24.66 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: 8DPSK: CH00, CH39, CH78		

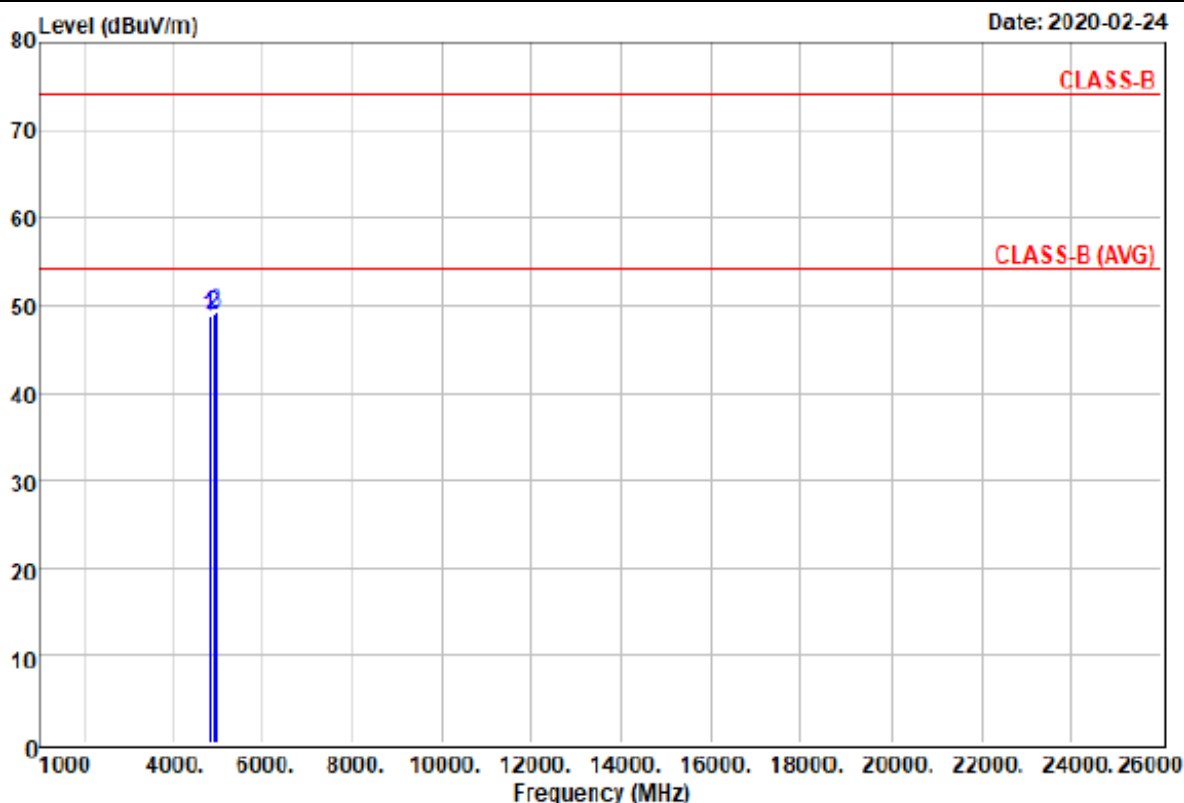

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	54.13	-5.44	48.69	74.00	-25.31 Peak
2	4882.000	53.97	-5.15	48.82	74.00	-25.18 Peak
3 @	4960.000	53.89	-4.86	49.03	74.00	-24.97 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



8. 20dB Bandwidth Measurement Data


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 ~ 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

8.3 Test Setup Layout



8.4 Test Result and Data

Test Date: 2020.05.06

Temperature: 23°C


Atmospheric pressure: 1012 hPa

Humidity: 57%


Modulation Standard	Channel	Frequency (MHz)	20dB Bandwidth (MHz)
GFSK (1Mbps)	00	2402	1.161
	39	2441	1.147
	78	2480	1.145
$\pi/4$ -DQPSK (2Mbps)	00	2402	1.161
	39	2441	1.160
	78	2480	1.157
8DPSK (3Mbps)	00	2402	1.154
	39	2441	1.155
	78	2480	1.145



GFSK (1Mbps) Channel: 00

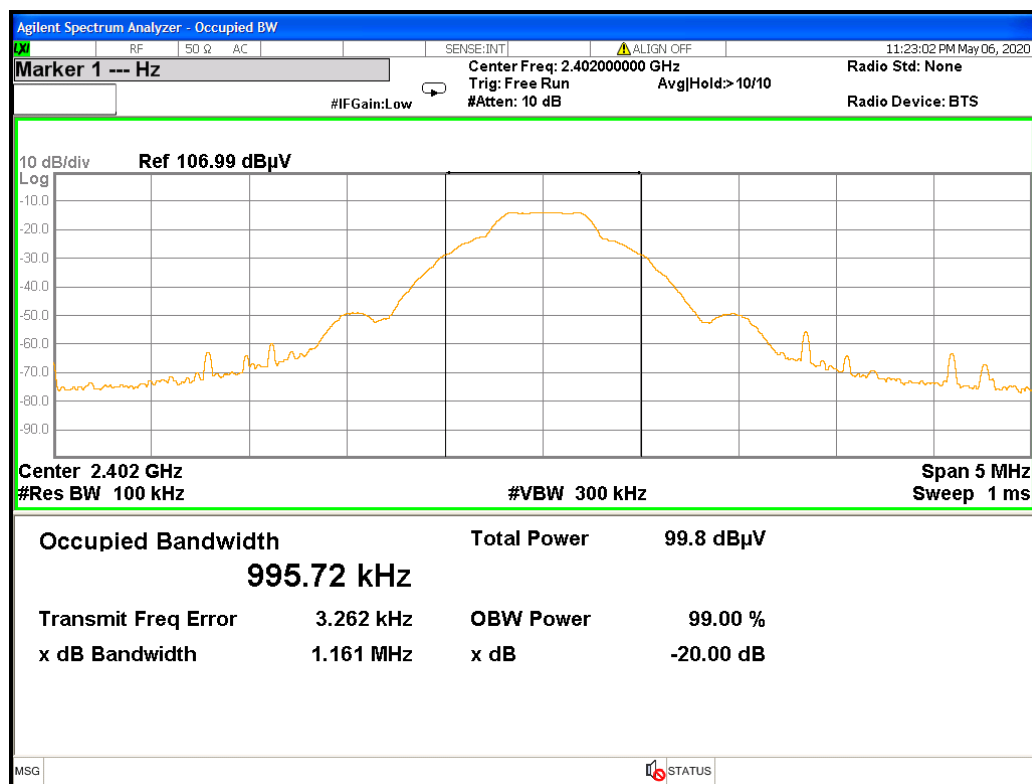


GFSK (1Mbps) Channel: 39

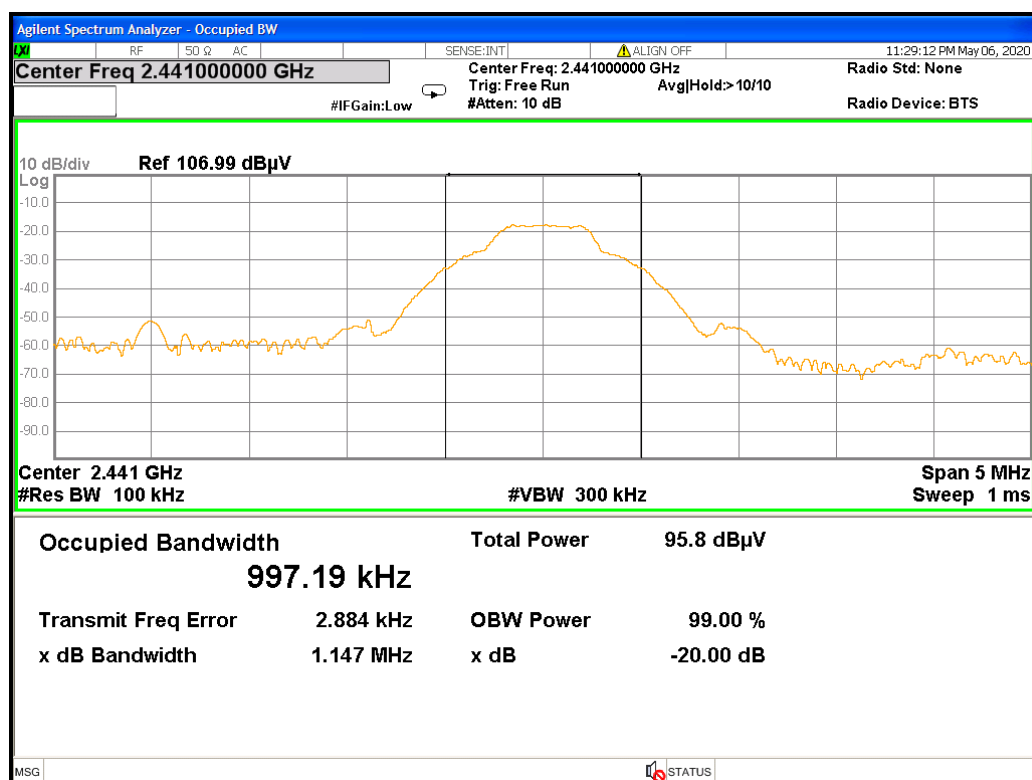




GFSK (1Mbps) Channel: 78

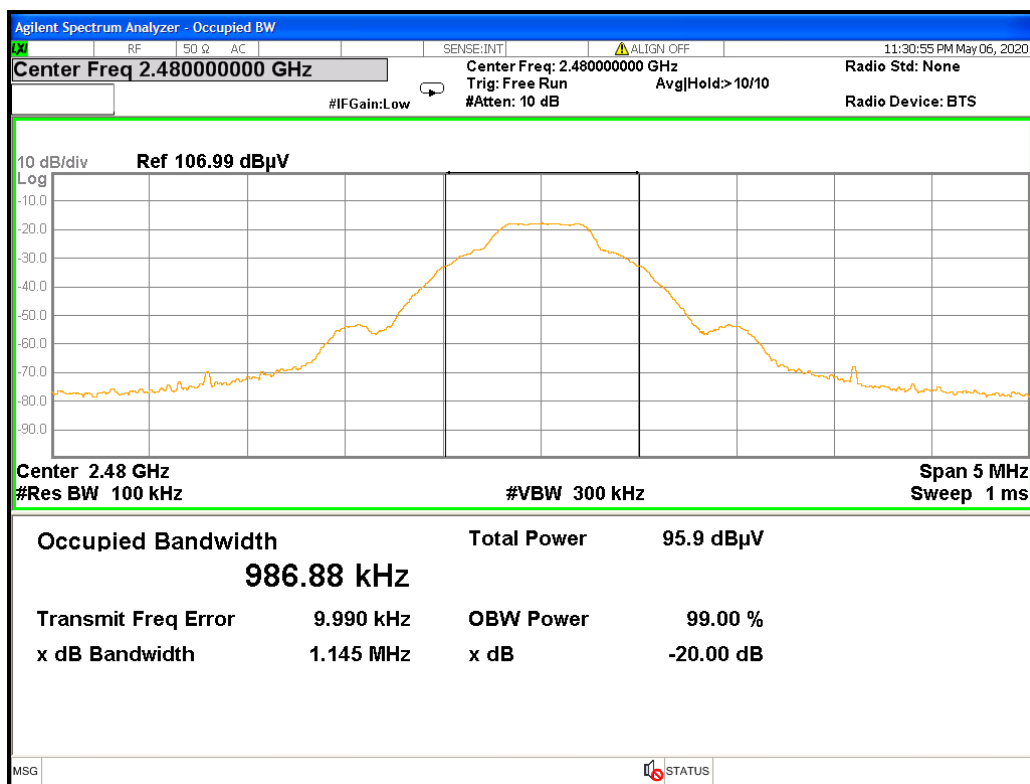


$\pi/4$ -DQPSK (2Mbps) Channel: 00

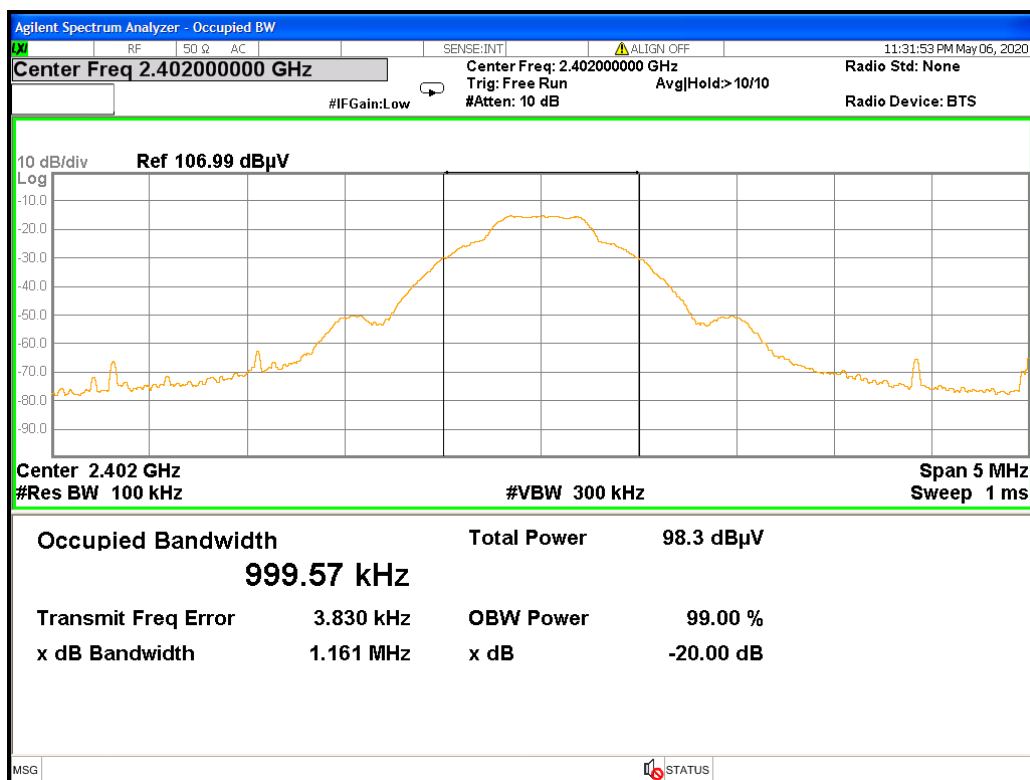




$\pi/4$ -DQPSK (2Mbps) Channel: 39

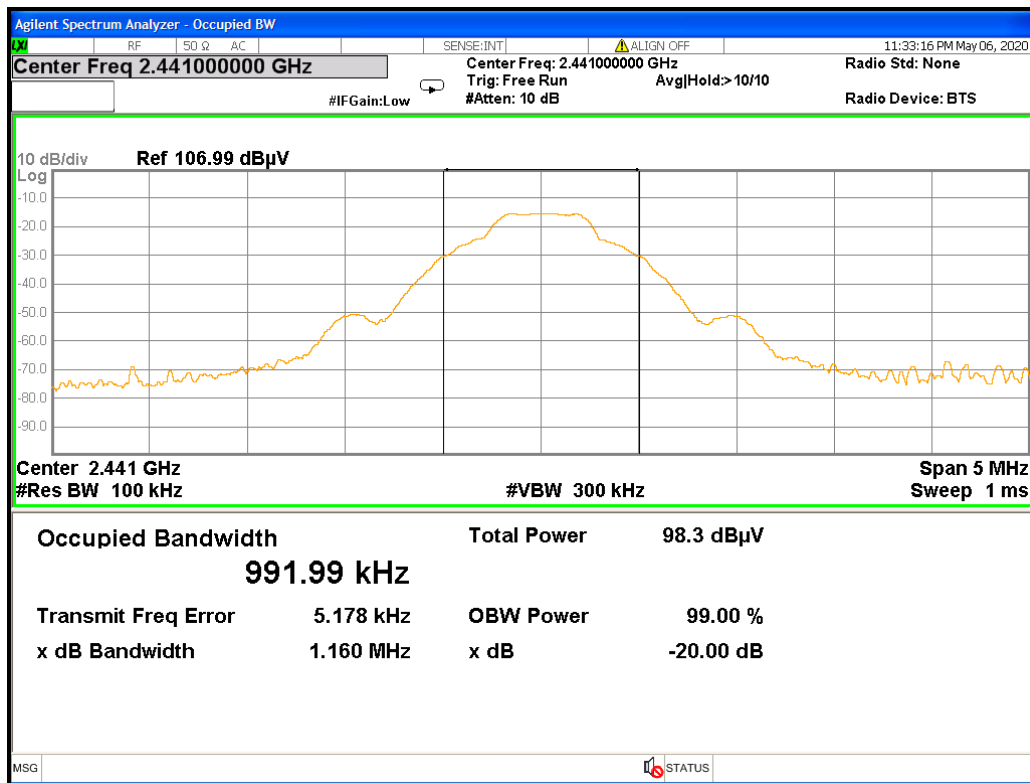


$\pi/4$ -DQPSK (2Mbps) Channel: 78

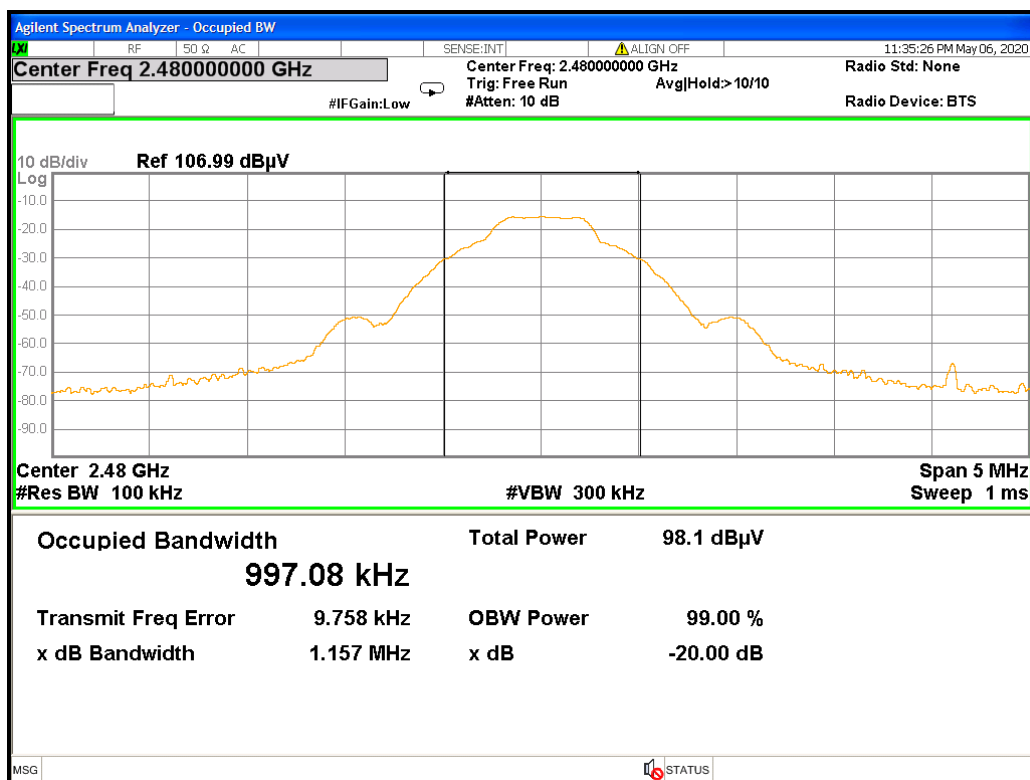




8DPSK (3Mbps) Channel: 00

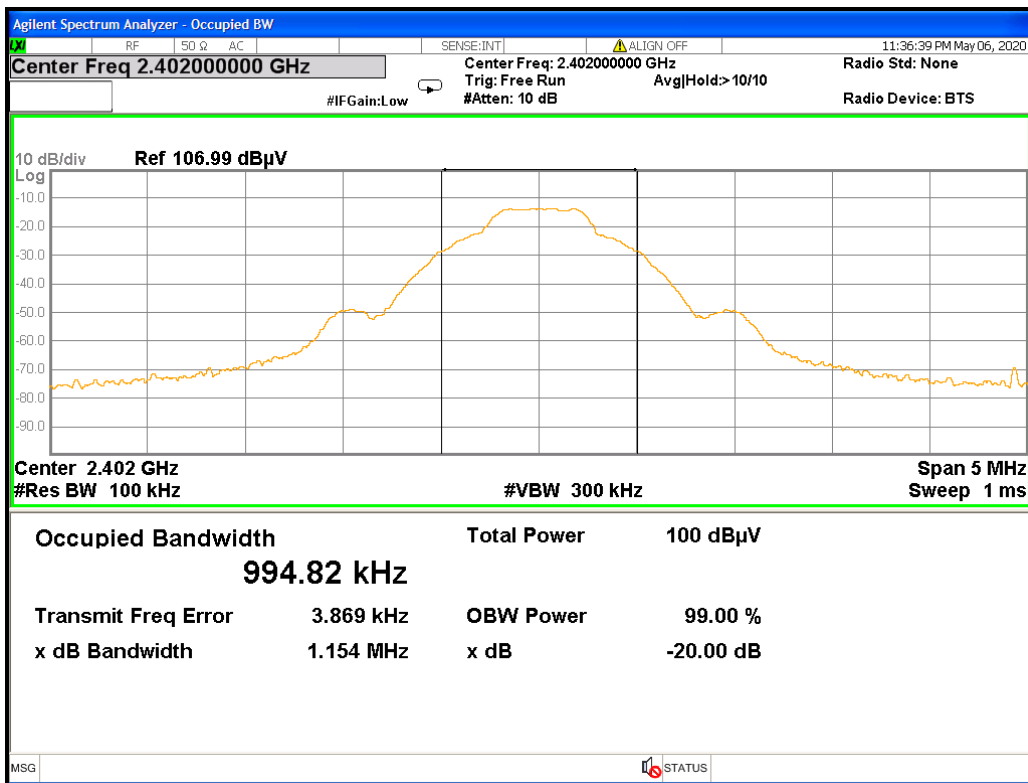


8DPSK (3Mbps) Channel: 39

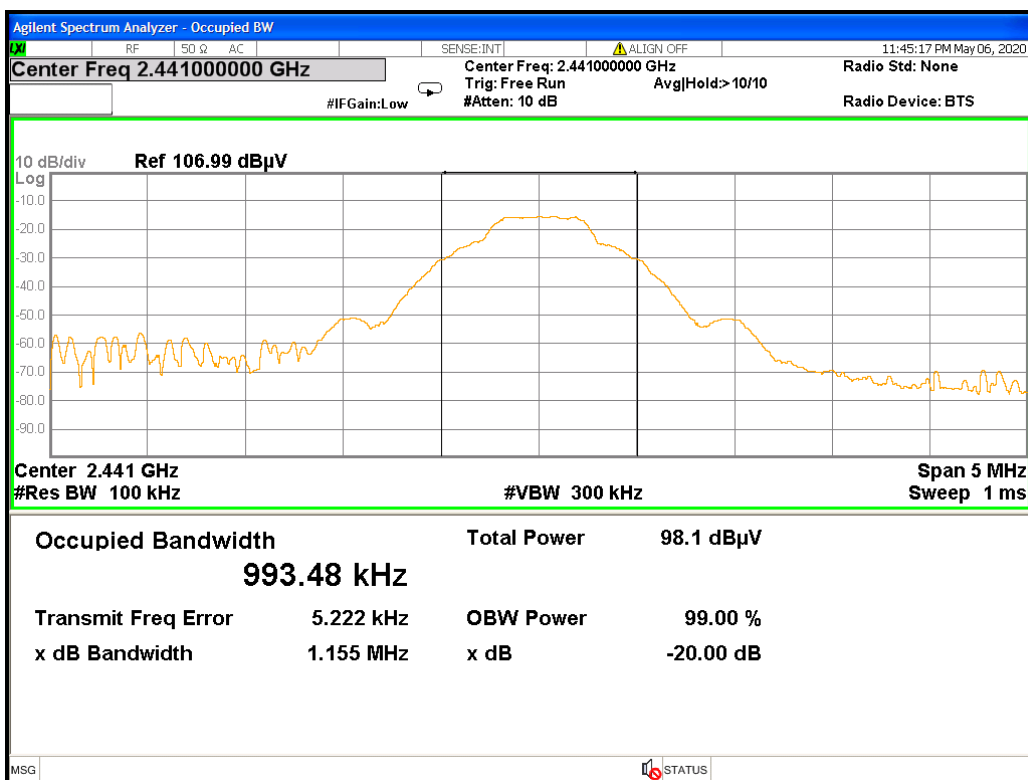



8DPSK (3Mbps) Channel: 78

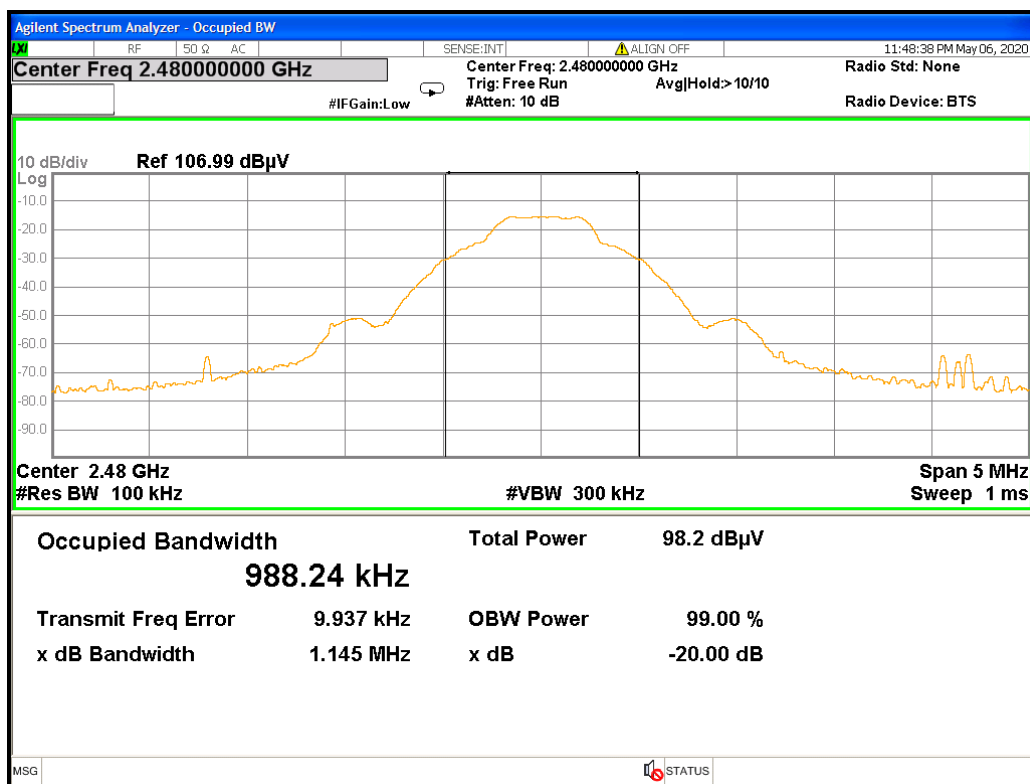



9. Frequencies Separation


9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

9.3 Test Setup Layout



9.4 Test Result and Data

Test Date: 2020.05.07

Temperature: 23°C

Atmospheric pressure: 1012 hPa

Humidity: 57%

Modulation Standard	Channel	Frequency (MHz)	Frequency Separation (MHz)
GFSK (1Mbps)	00	2402	1.000
	39	2441	1.000
	78	2480	1.000
$\pi/4$ -DQPSK (2Mbps)	00	2402	1.000
	39	2441	1.000
	78	2480	1.000
8DPSK (3Mbps)	00	2402	1.000
	39	2441	1.000
	78	2480	1.000



GFSK (1Mbps) Channel: 00




GFSK (1Mbps) Channel: 39






GFSK (1Mbps) Channel: 78

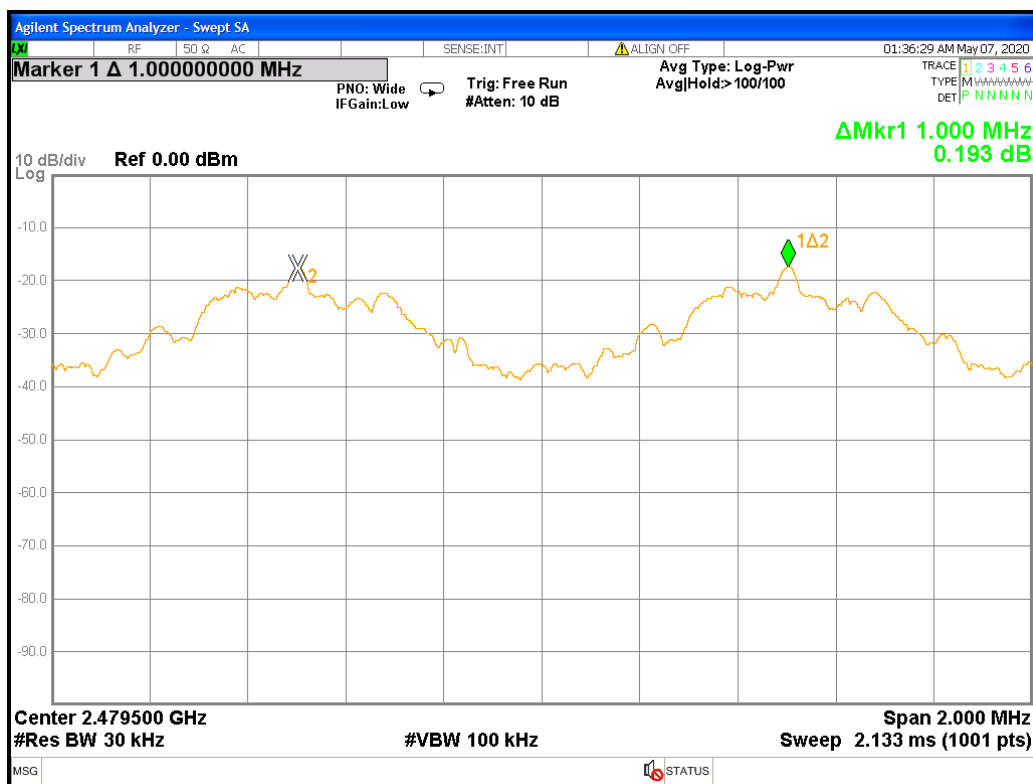

$\pi/4$ -DQPSK (2Mbps) Channel: 00

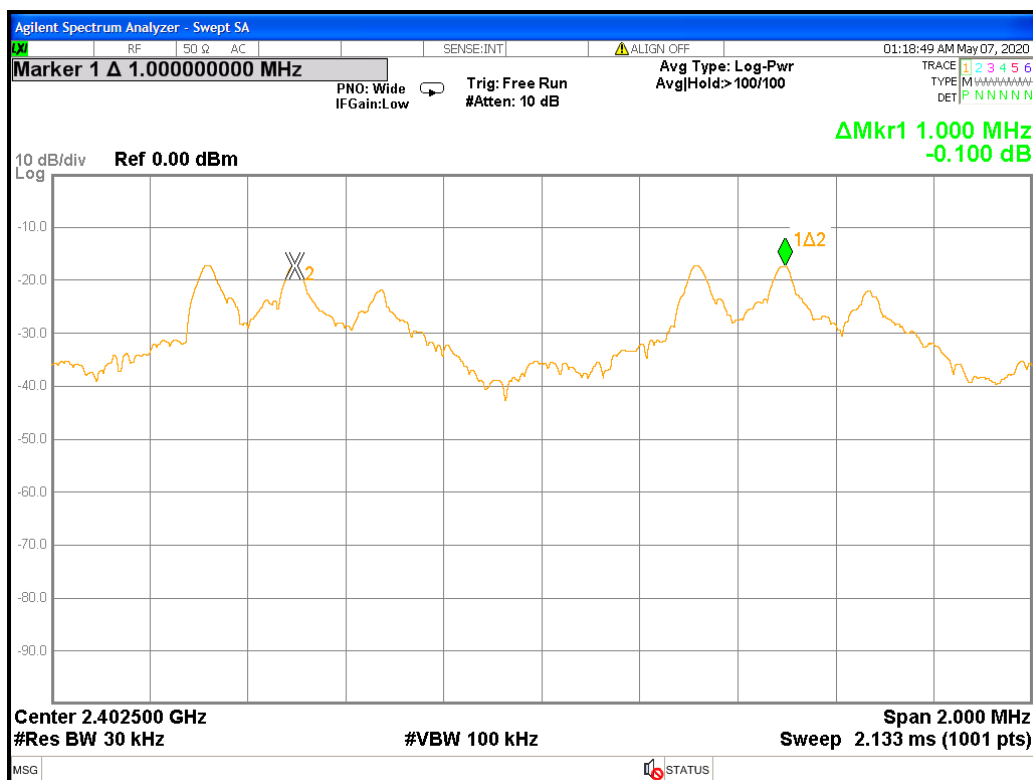



$\pi/4$ -DQPSK (2Mbps) Channel: 39



$\pi/4$ -DQPSK (2Mbps) Channel: 78





8DPSK (3Mbps) Channel: 00



8DPSK (3Mbps) Channel: 39





8DPSK (3Mbps) Channel: 78





10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Adjust the center frequency to measure frequency, then set zero span mode.
- c. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
- d. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout



**10.4 Test Result and Data**

Test Date: 2020.05.12

Temperature: 23°C

Atmospheric pressure: 1012 hPa

Humidity: 57%

Modulation Standard	Channel	Frequency (MHz)	Reading Data (ms)	Dwell Time (ms)
GFSK DH1	00	2402	0.420	134.4
	39	2441	0.410	131.2
	78	2480	0.410	134.4
GFSK DH3	00	2402	1.680	268.8
	39	2441	1.670	267.2
	78	2480	1.670	267.2
GFSK DH5	00	2402	2.930	312.5
	39	2441	2.910	310.4
	78	2480	2.930	312.5
$\pi/4$ -DQPSK 2DH1	00	2402	0.420	134.4
	39	2441	0.410	131.2
	78	2480	0.430	137.6
$\pi/4$ -DQPSK 2DH3	00	2402	1.680	268.8
	39	2441	1.670	267.2
	78	2480	1.660	265.6
$\pi/4$ -DQPSK 2DH5	00	2402	2.940	313.6
	39	2441	2.930	312.5
	78	2480	2.920	311.5
8DPSK 3DH1	00	2402	0.430	137.6
	39	2441	0.410	131.2
	78	2480	0.430	137.6
8DPSK 3DH3	00	2402	1.680	268.8
	39	2441	1.680	268.8
	78	2480	1.680	268.8
8DPSK 3DH5	00	2402	2.910	310.4
	39	2441	2.940	313.6
	78	2480	2.930	312.5

Test period: 0.4(second/ channel) x 79 channel= 31.6 second

Example:


CH00,DH1 mode = 0.420 (ms)*[(1600/2)/79]*31.6= 134.4 (ms)

CH00,DH3 mode = 1.680 (ms)*[(1600/4)/79]*31.6= 268.8 (ms)


CH00,DH5 mode = 2.930 (ms)*[(1600/6)/79]*31.6= 312.5 (ms)



GFSK (1Mbps) Rate: DH1 Channel: 00

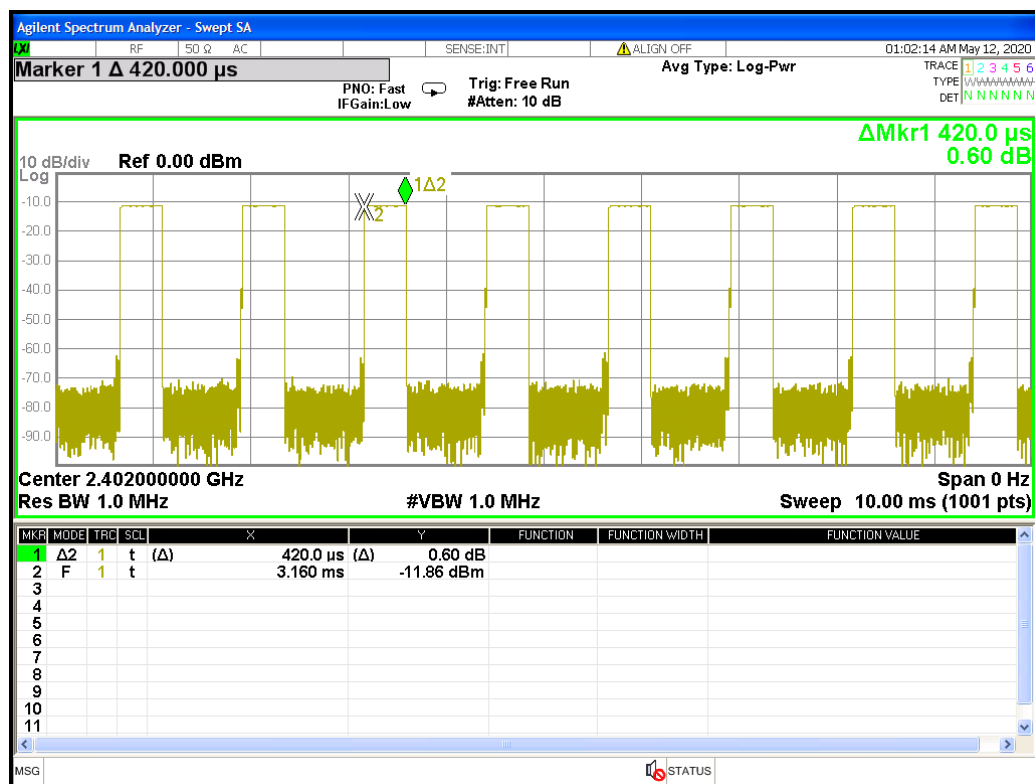


GFSK (1Mbps) Rate: DH1 Channel: 39

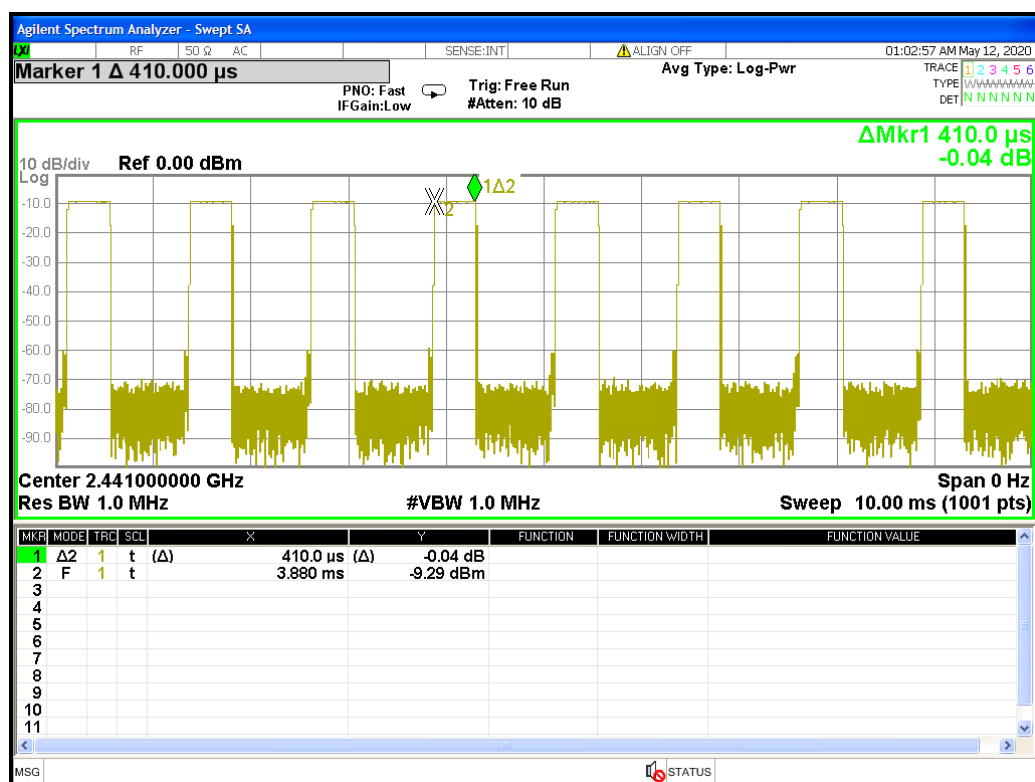




GFSK (1Mbps) Rate: DH1 Channel: 78

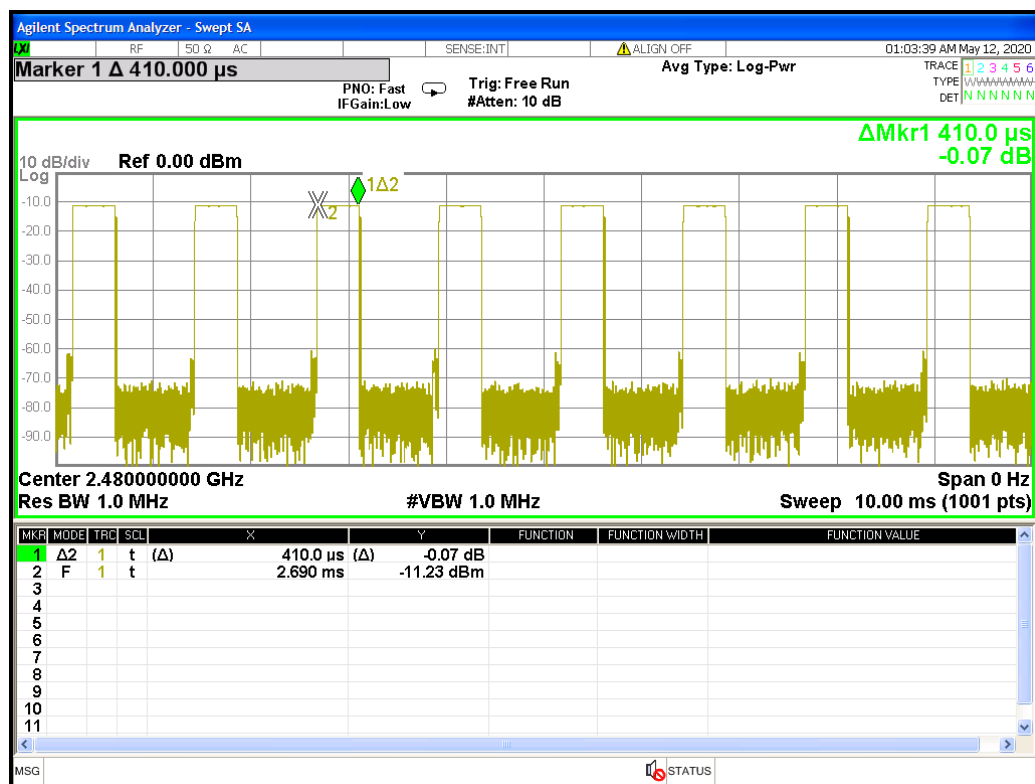


GFSK (1Mbps) Rate: DH3 Channel: 00

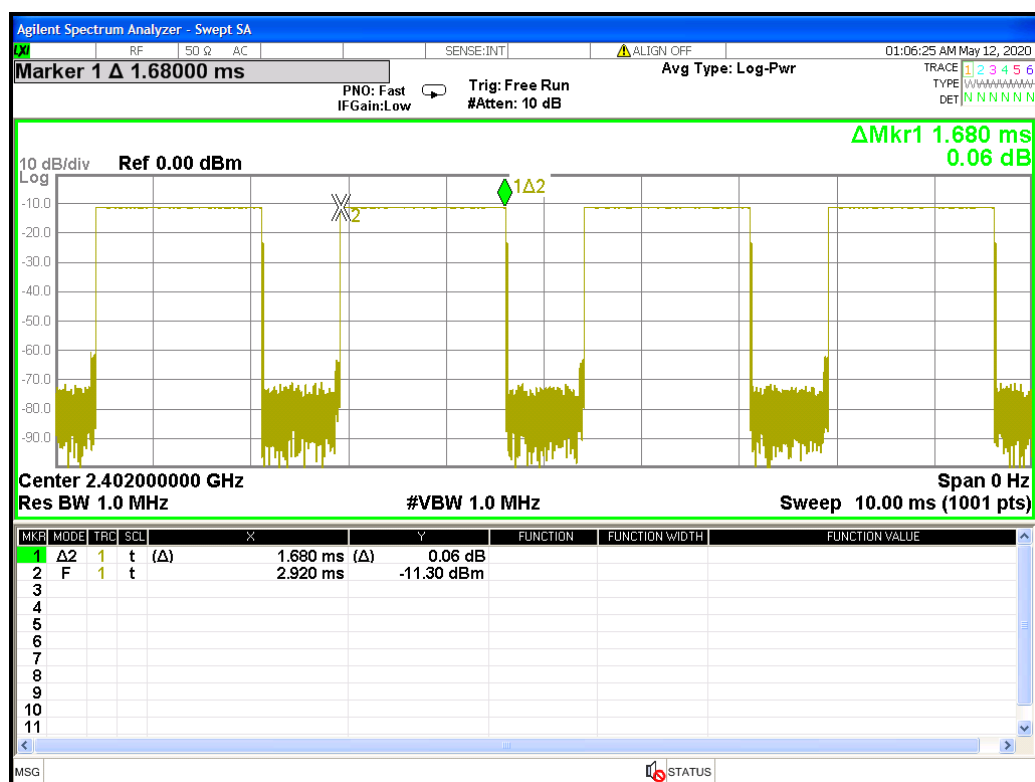




GFSK (1Mbps) Rate: DH3 Channel: 39

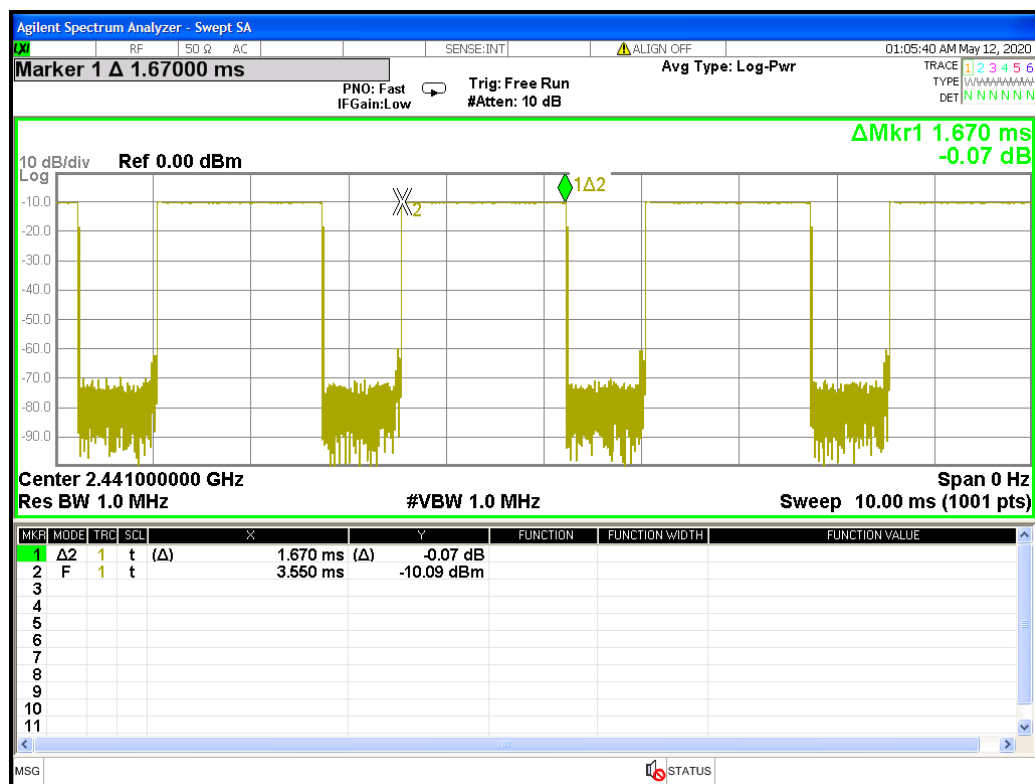


GFSK (1Mbps) Rate: DH3 Channel: 78

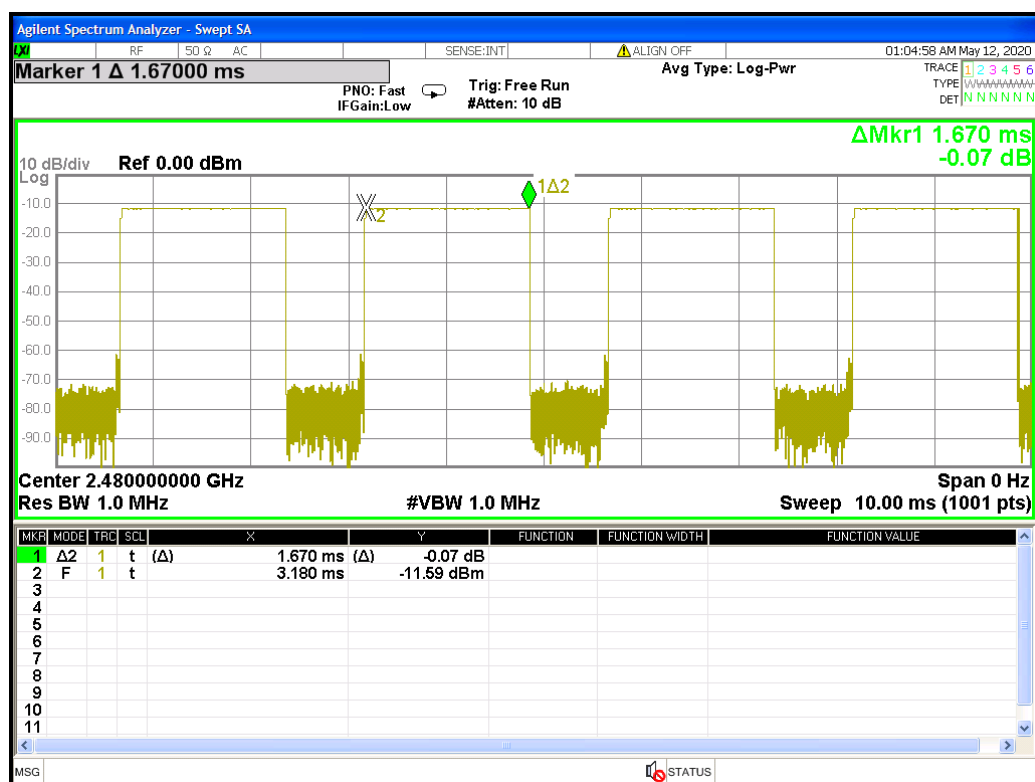




GFSK (1Mbps) Rate: DH5 Channel: 00

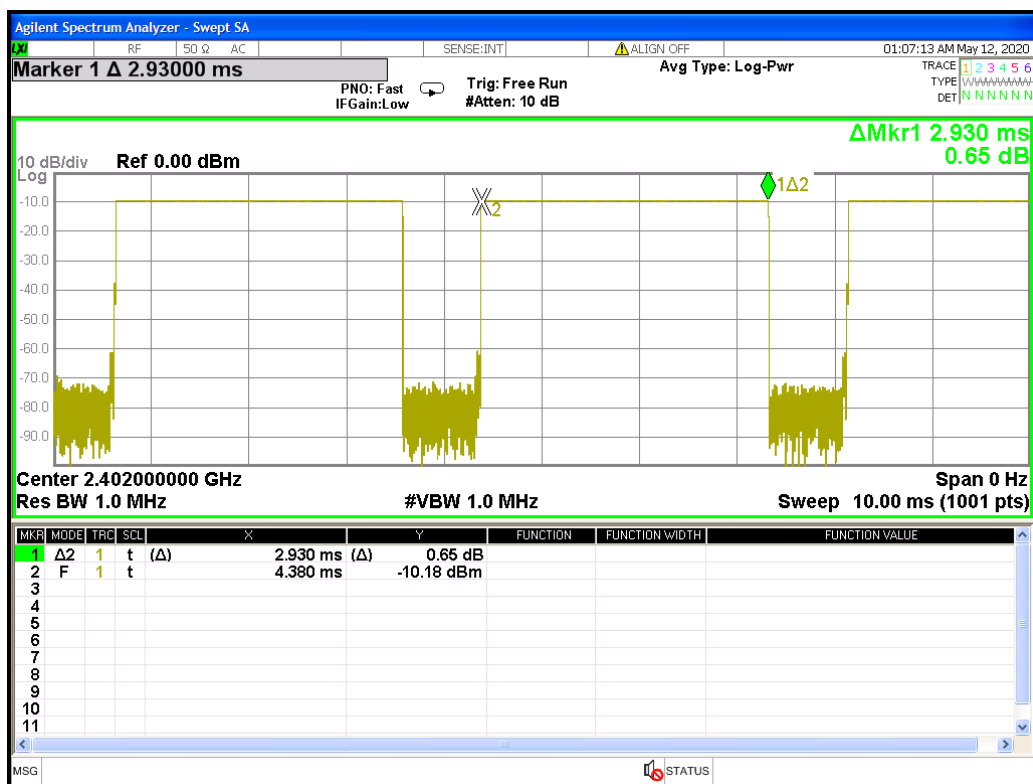


GFSK (1Mbps) Rate: DH5 Channel: 39

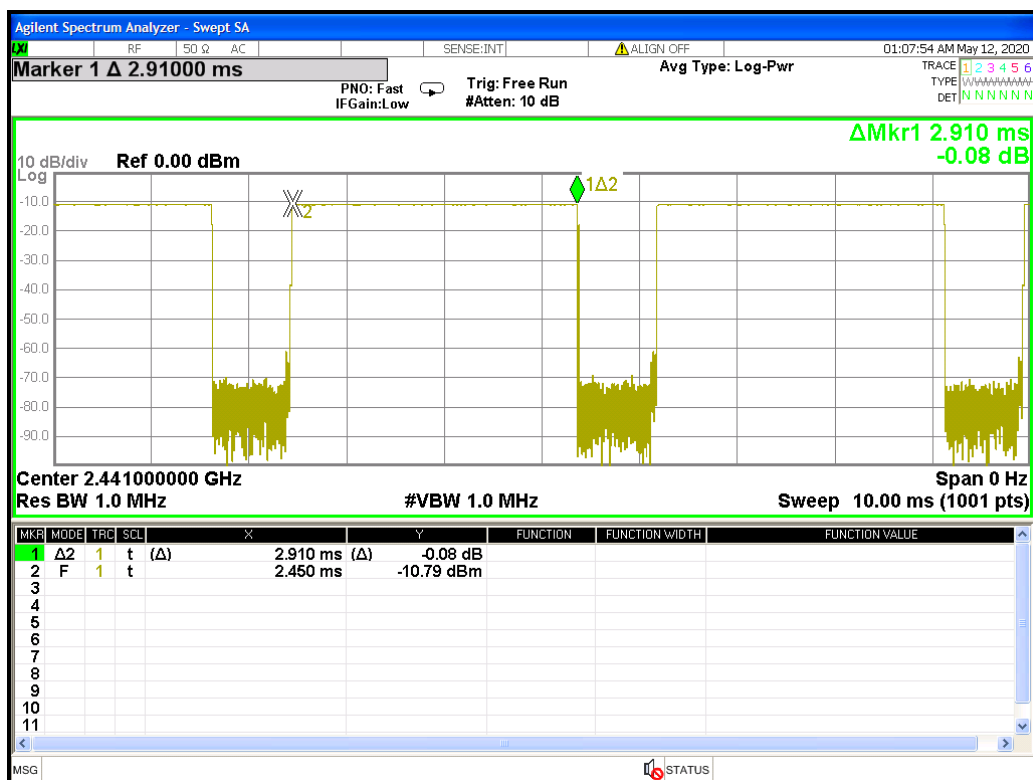



GFSK (1Mbps) Rate: DH5 Channel: 78

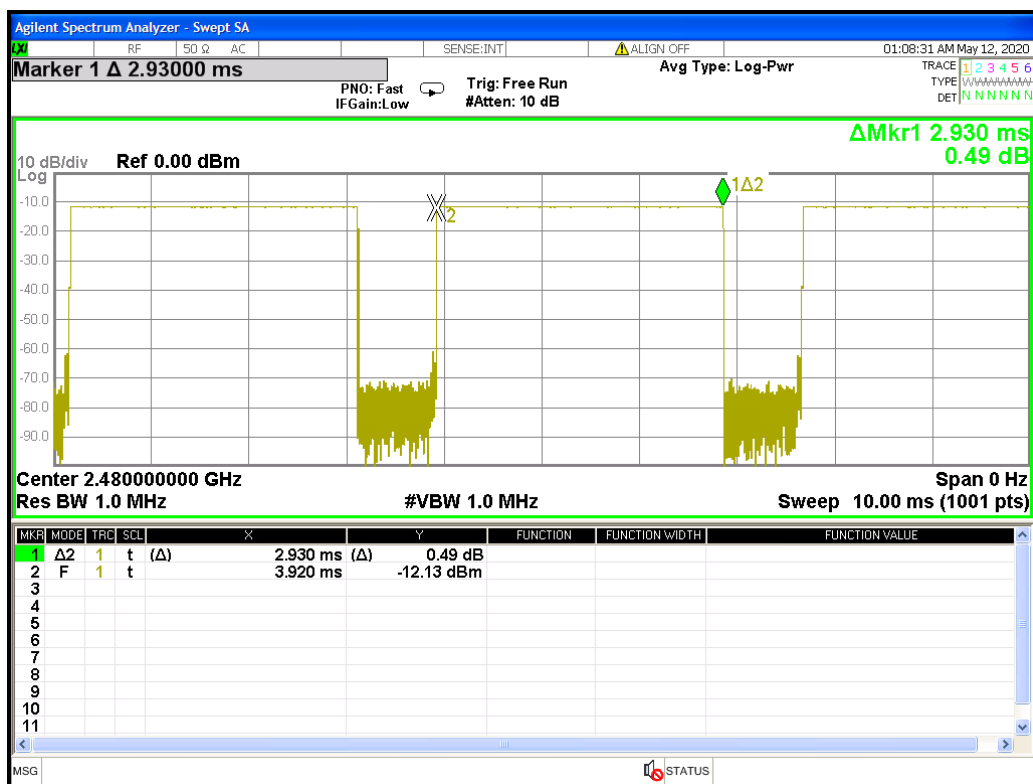


π /4-DQPSK (2Mbps) Rate: 2DH1 Channel: 00






$\pi/4$ -DQPSK (2Mbps) Rate: 2DH1 Channel: 39

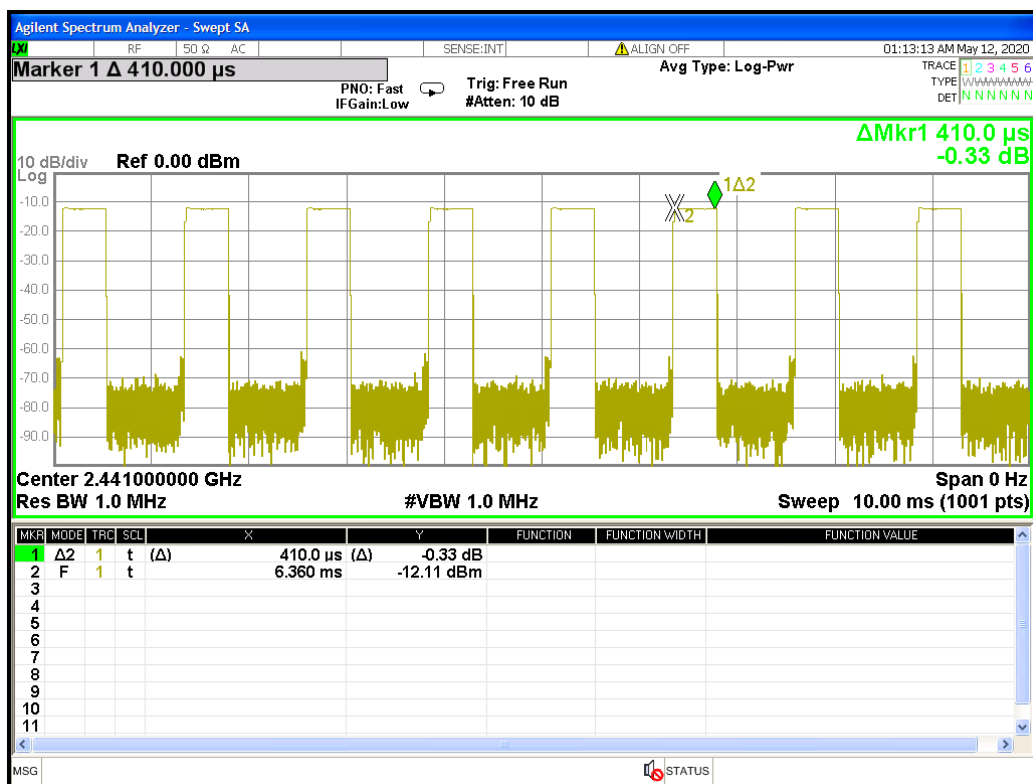


$\pi/4$ -DQPSK (2Mbps) Rate: 2DH1 Channel: 78

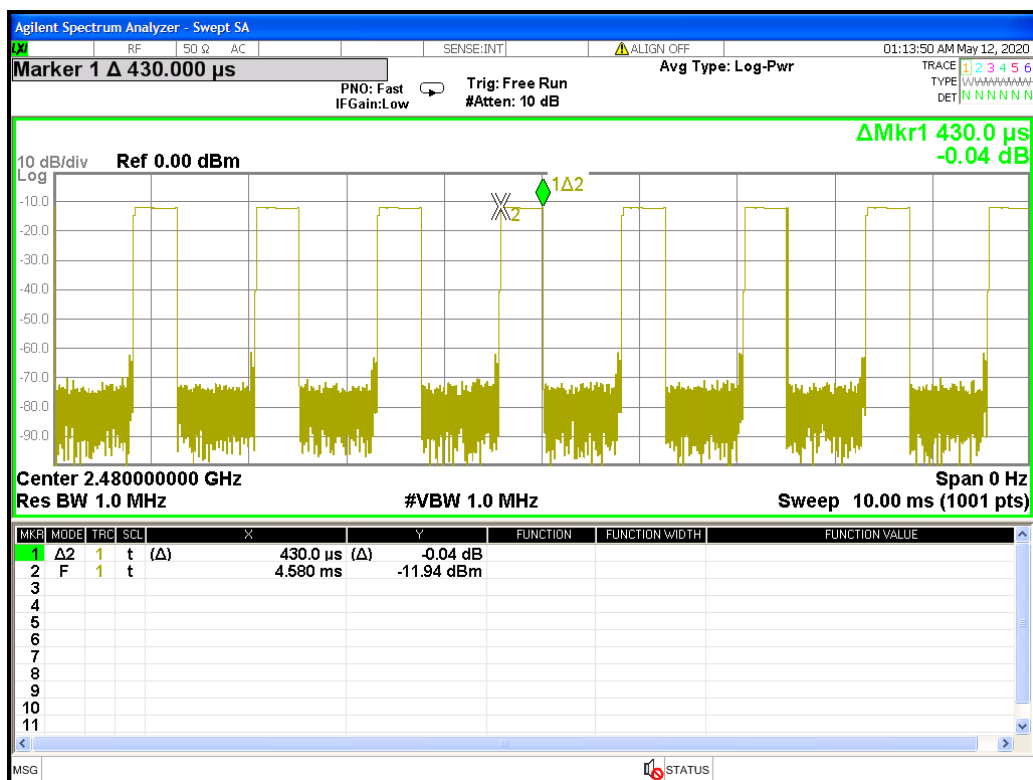




$\pi/4$ -DQPSK (2Mbps) Rate: 2DH3 Channel: 00

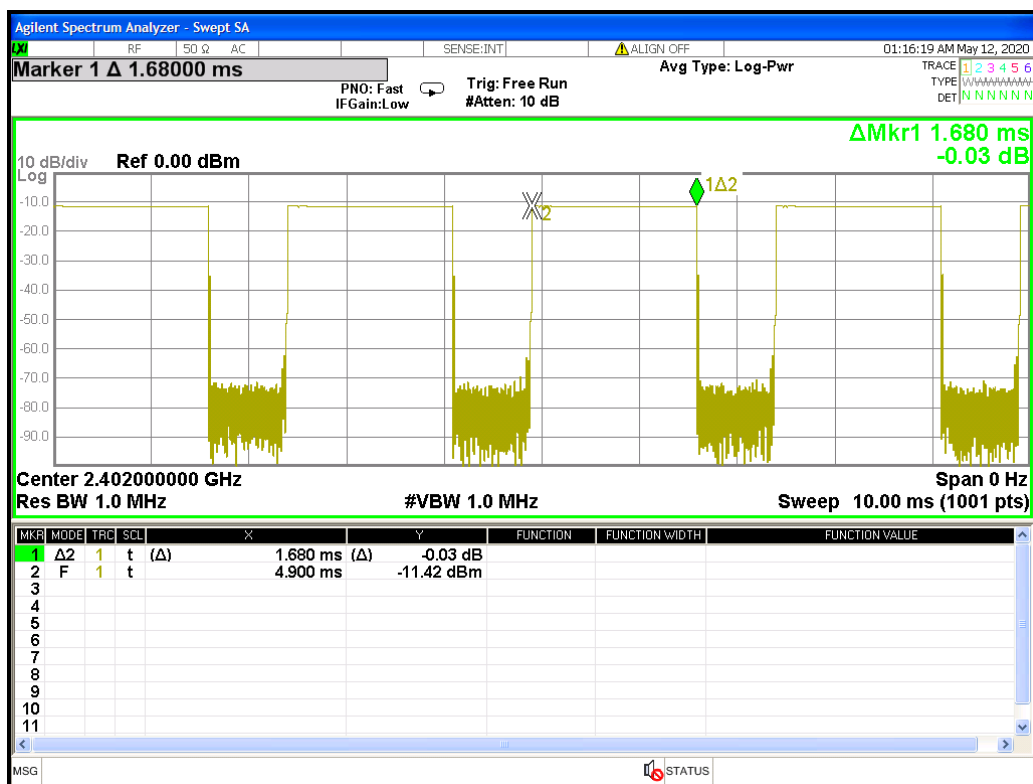


$\pi/4$ -DQPSK (2Mbps) Rate: 2DH3 Channel: 39

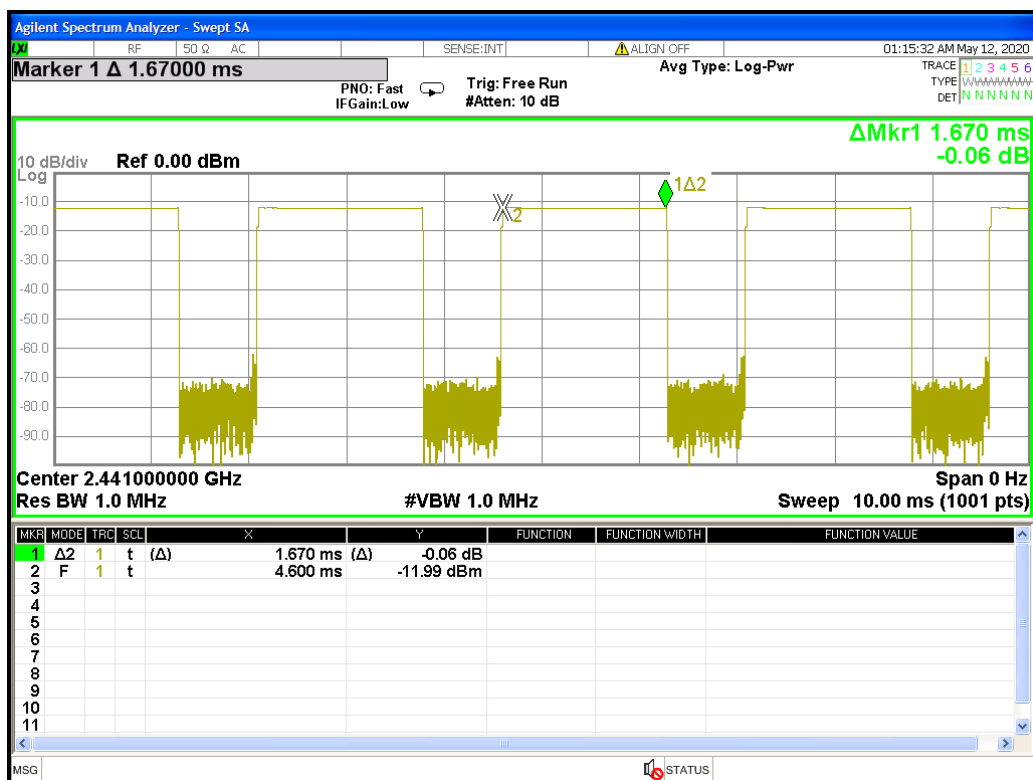



$\pi/4$ -DQPSK (2Mbps) Rate: 2DH3 Channel: 78

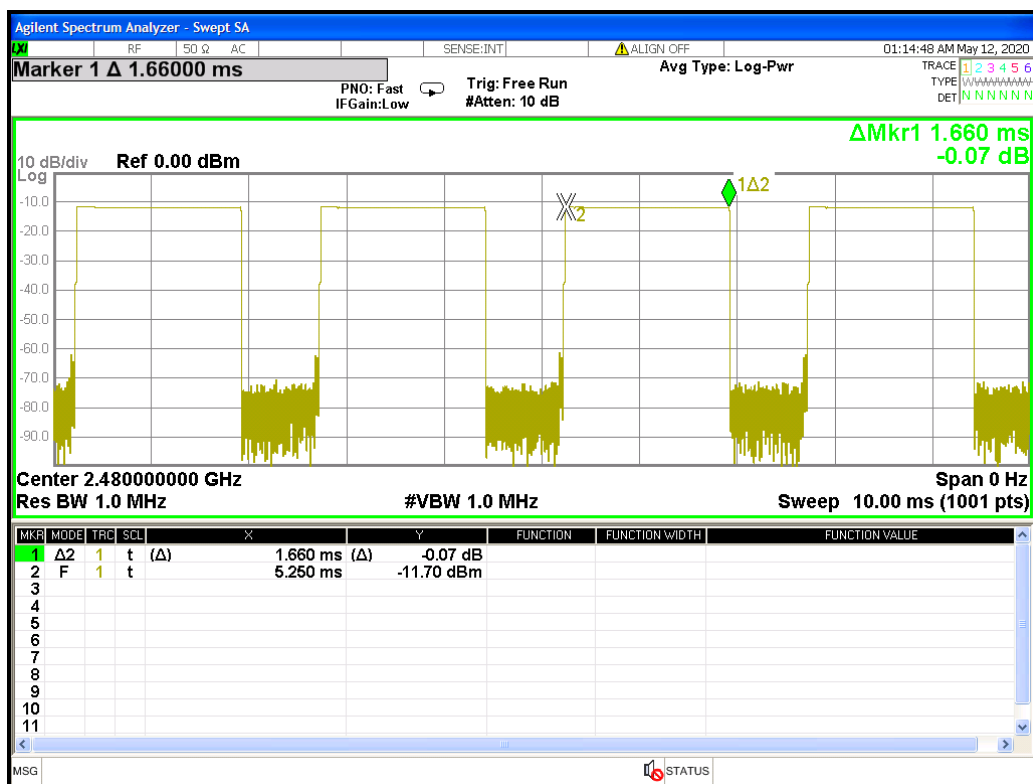


$\pi/4$ -DQPSK (2Mbps) Rate: 2DH5 Channel: 00






$\pi/4$ -DQPSK (2Mbps) Rate: 2DH5 Channel: 39

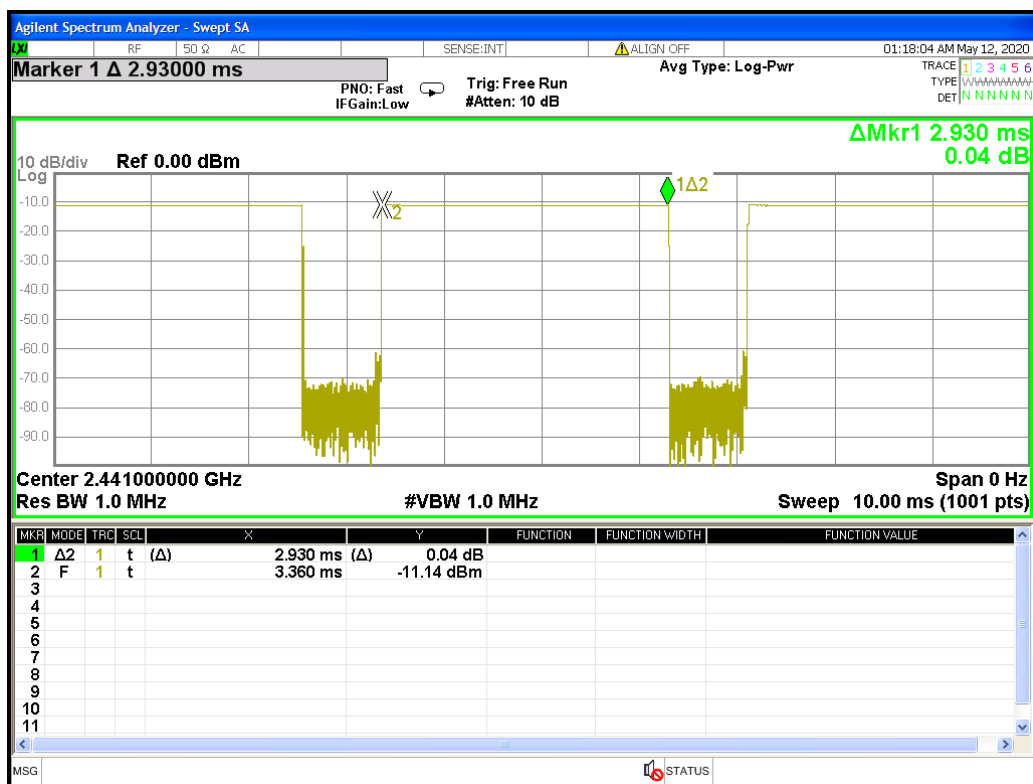


$\pi/4$ -DQPSK (2Mbps) Rate: 2DH5 Channel: 78

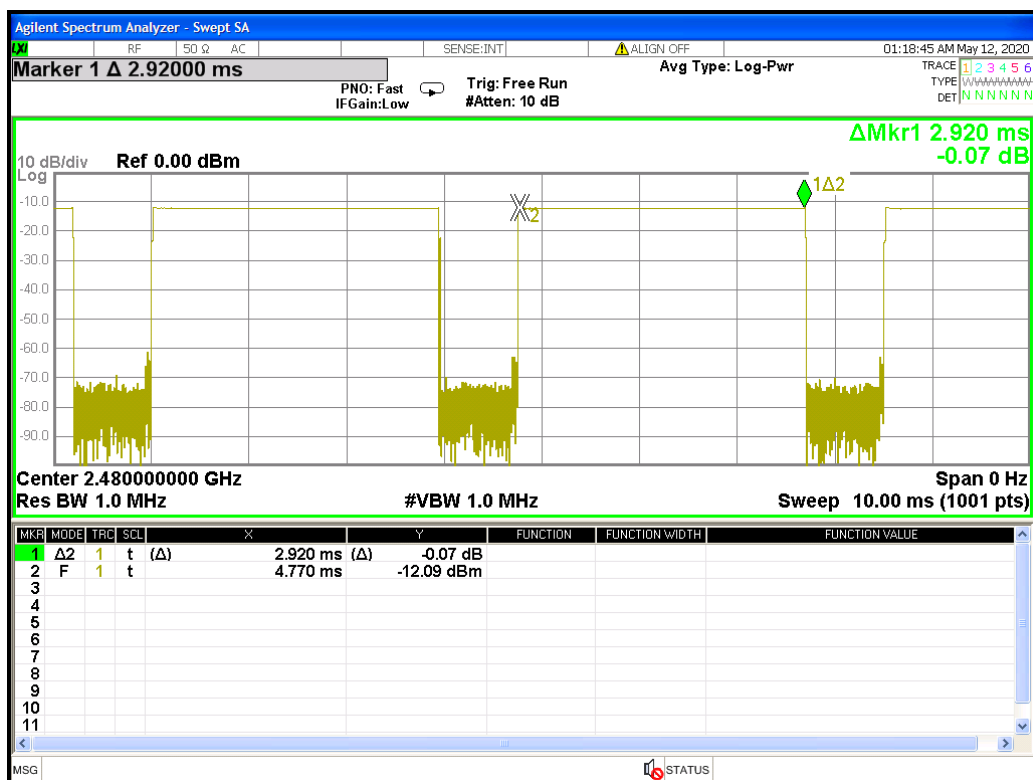




8DPSK (3Mbps) Rate: 3DH1 Channel: 00

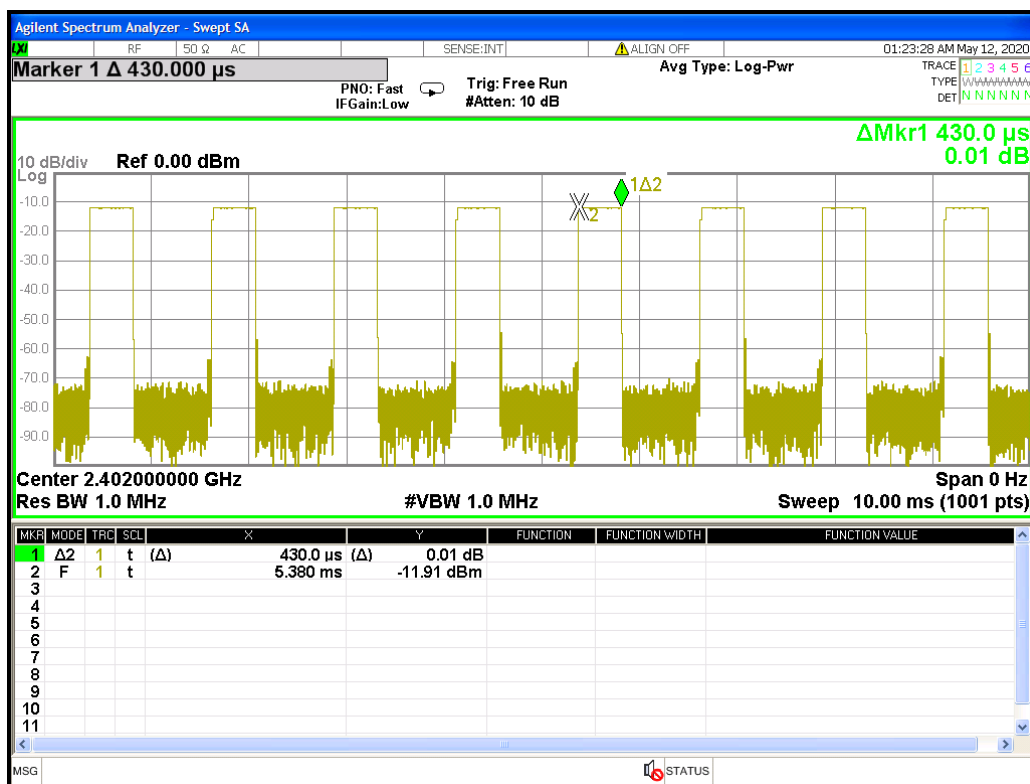


8DPSK (3Mbps) Rate: 3DH1 Channel: 39

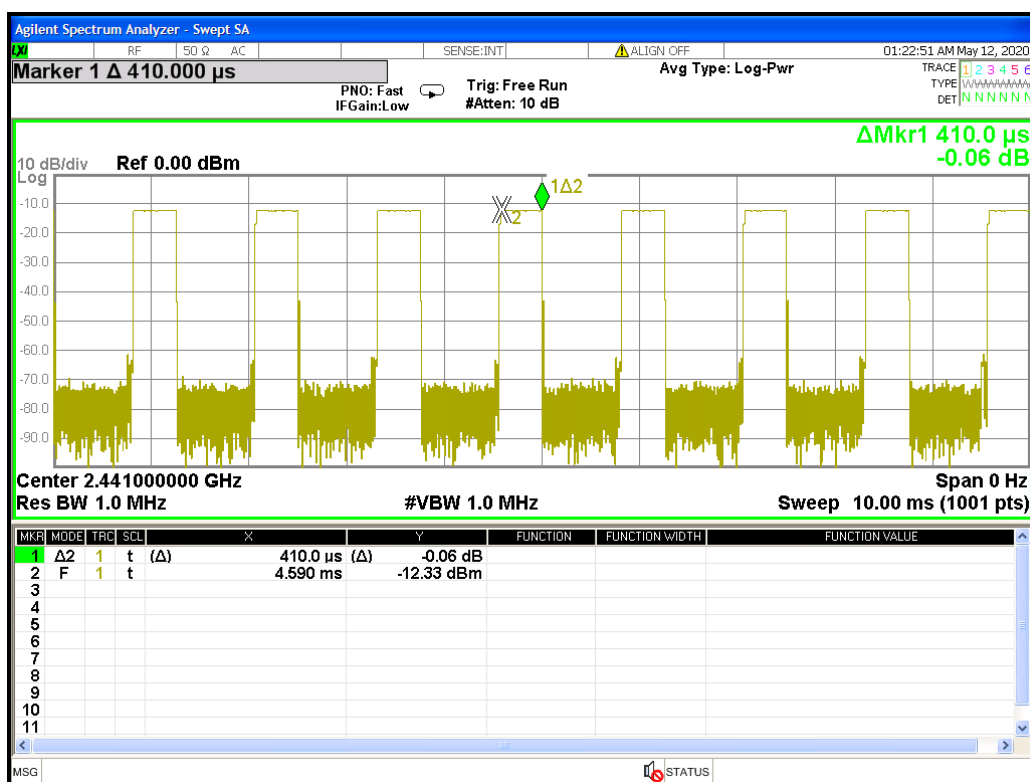




8DPSK (3Mbps) Rate: 3DH1 Channel: 78

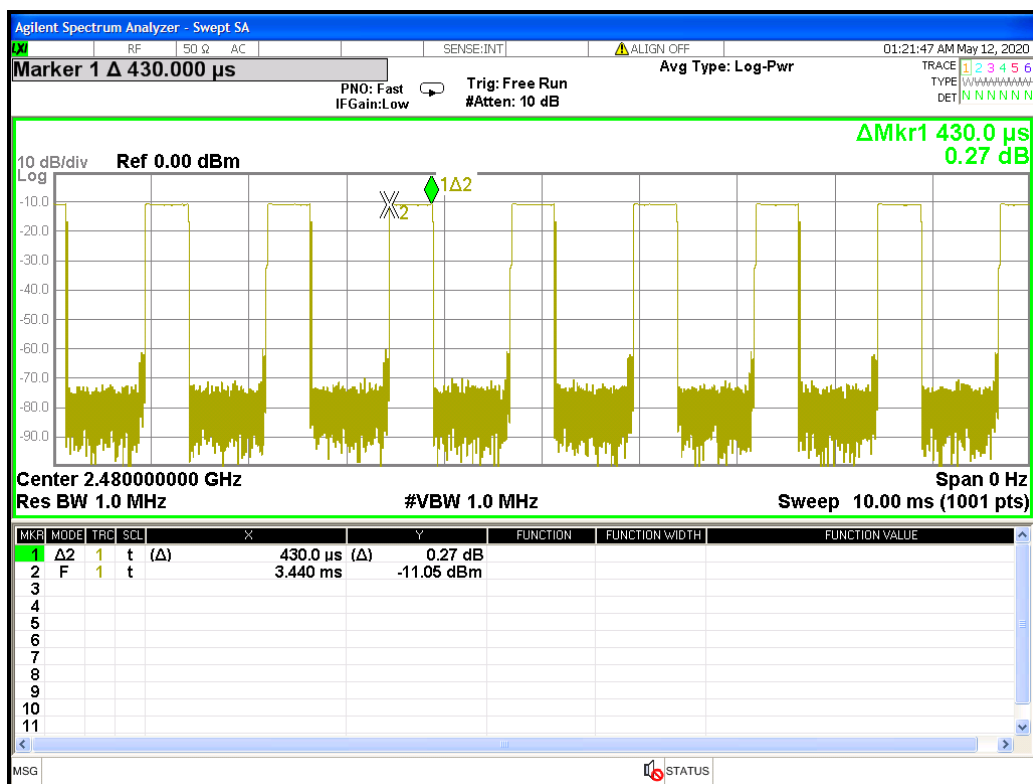


8DPSK (3Mbps) Rate: 3DH3 Channel: 00

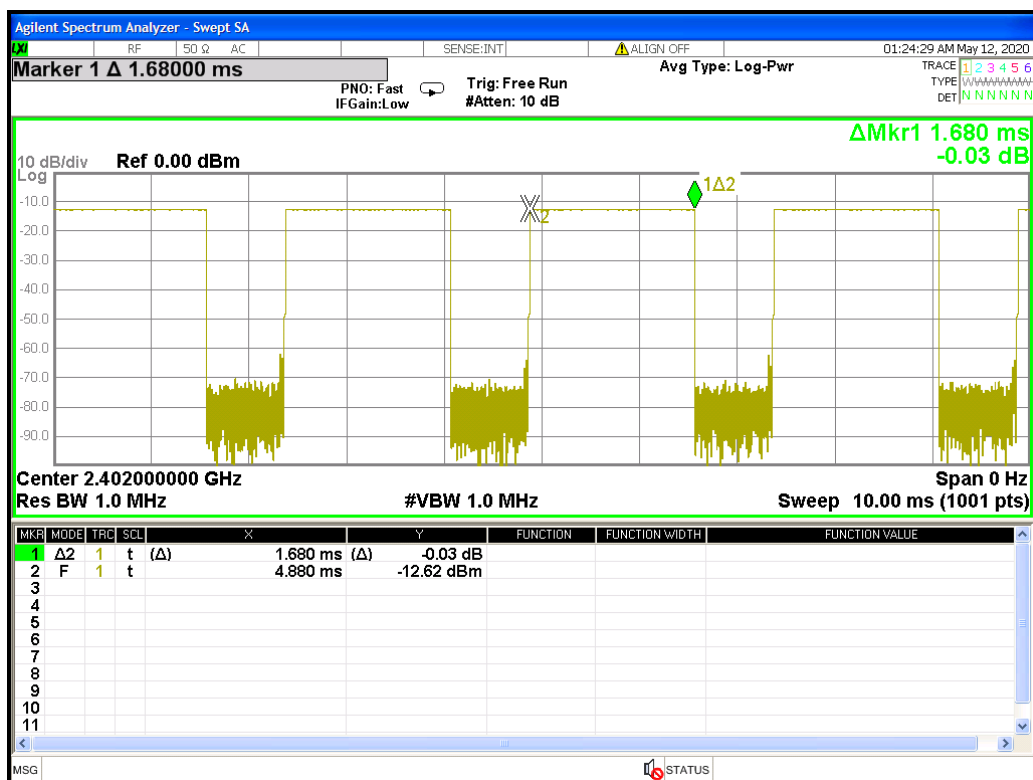




8DPSK (3Mbps) Rate: 3DH3 Channel: 39

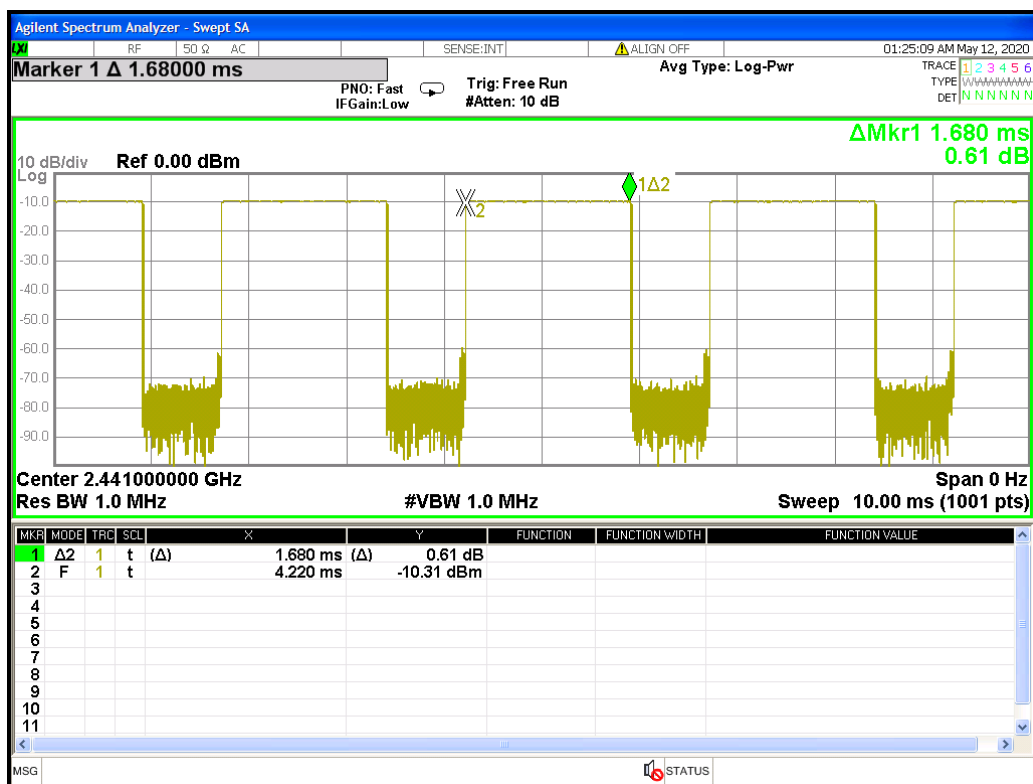


8DPSK (3Mbps) Rate: 3DH3 Channel: 78

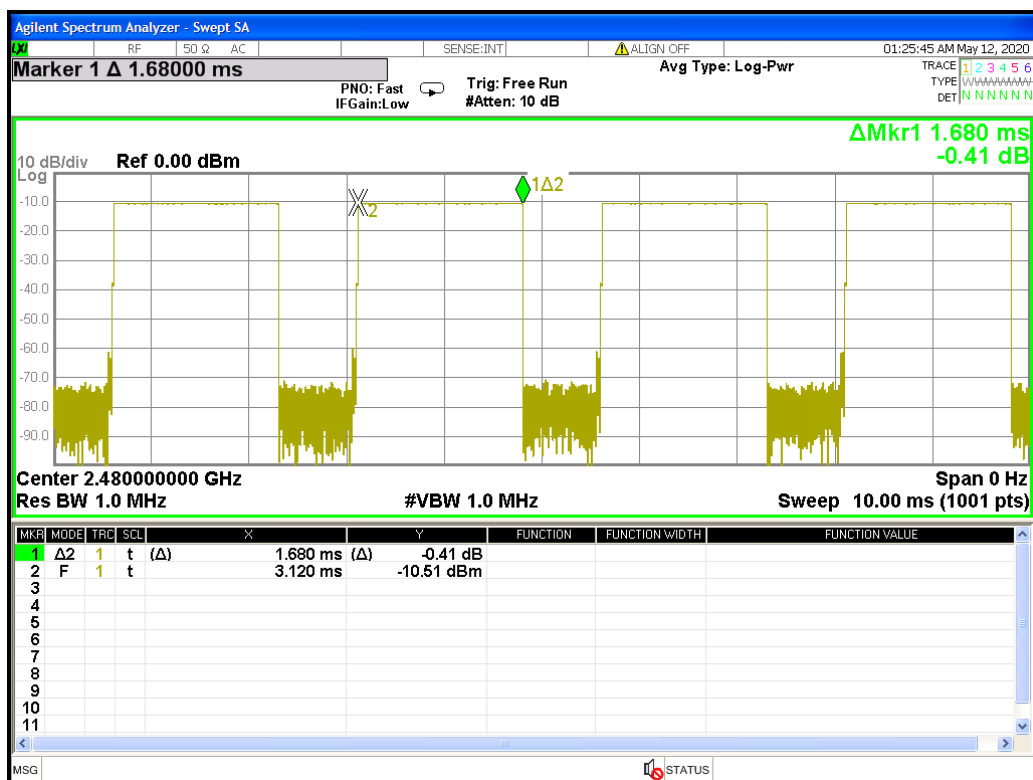




8DPSK (3Mbps) Rate: 3DH5 Channel: 00

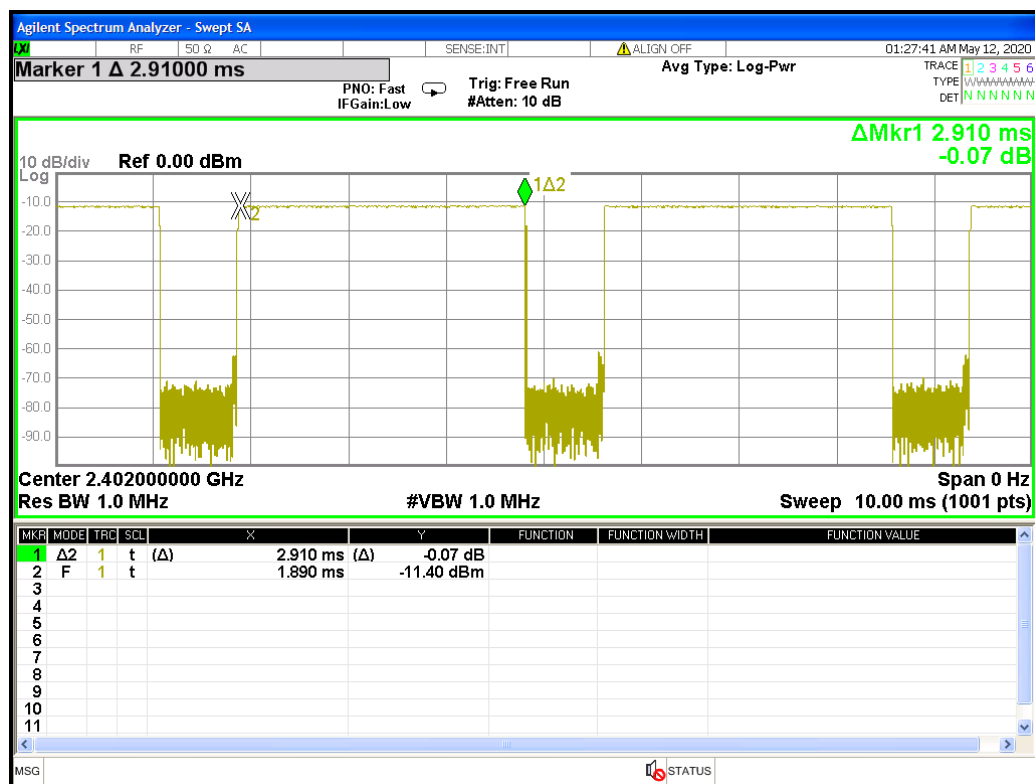


8DPSK (3Mbps) Rate: 3DH5 Channel: 39

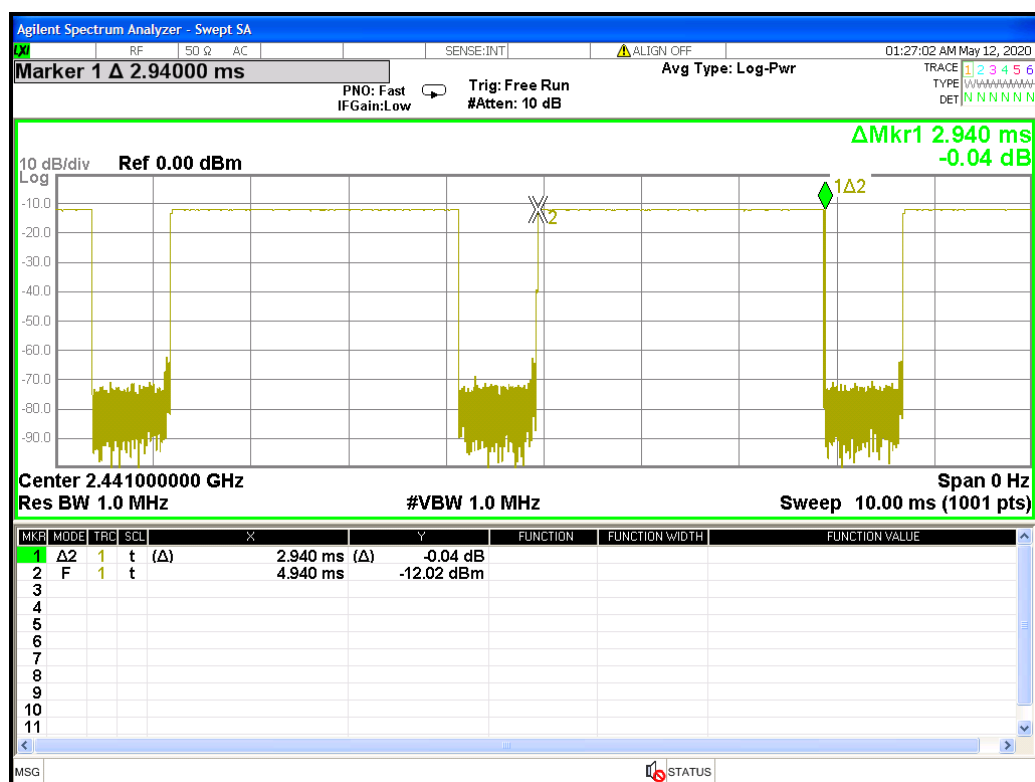



8DPSK (3Mbps) Rate: 3DH5 Channel: 78

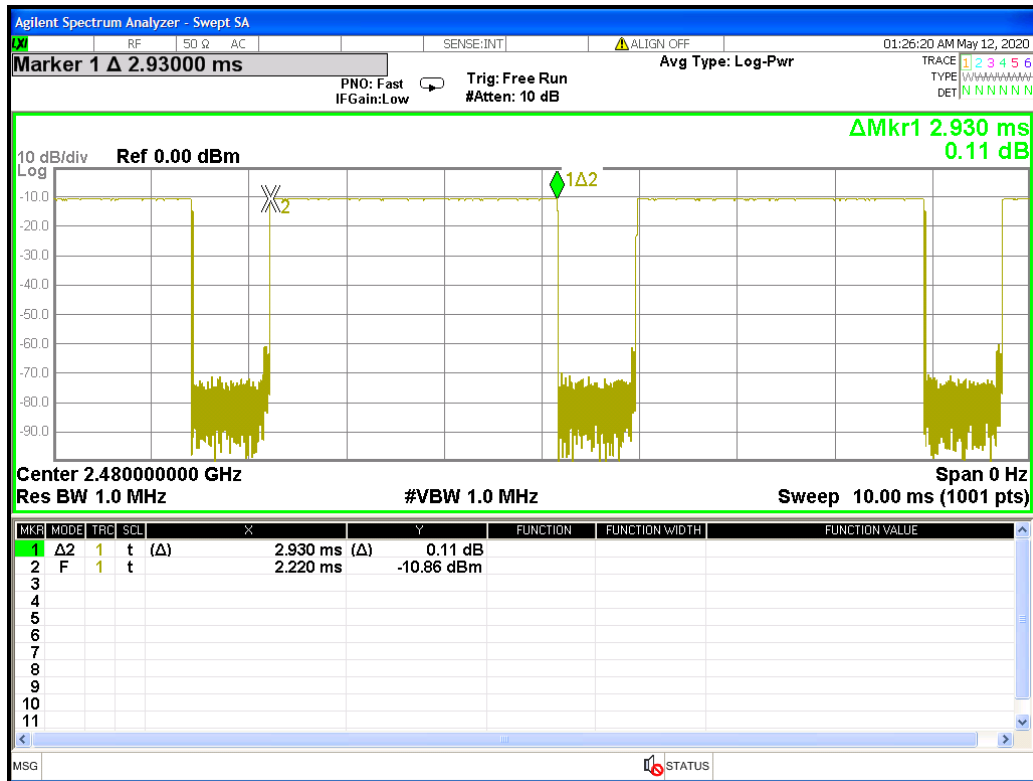



11. Number of Hopping Channels

11.1 Test Limit


Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- Set the MaxHold function, and then keep the EUT in hopping mode.

Record all the signals from each channel until each one has been record.

11.3 Test Setup Layout



11.4 Test Result and Data

Test Date: 2020.05.12

Temperature: 23°C


Atmospheric pressure: 1012 hPa

Humidity: 57%


Modulation Standard	Hopping Channels
GFSK (1Mbps)	79
$\pi/4$ -DQPSK (2Mbps)	79
8DPSK (2Mbps)	79



GFSK (1Mbps)

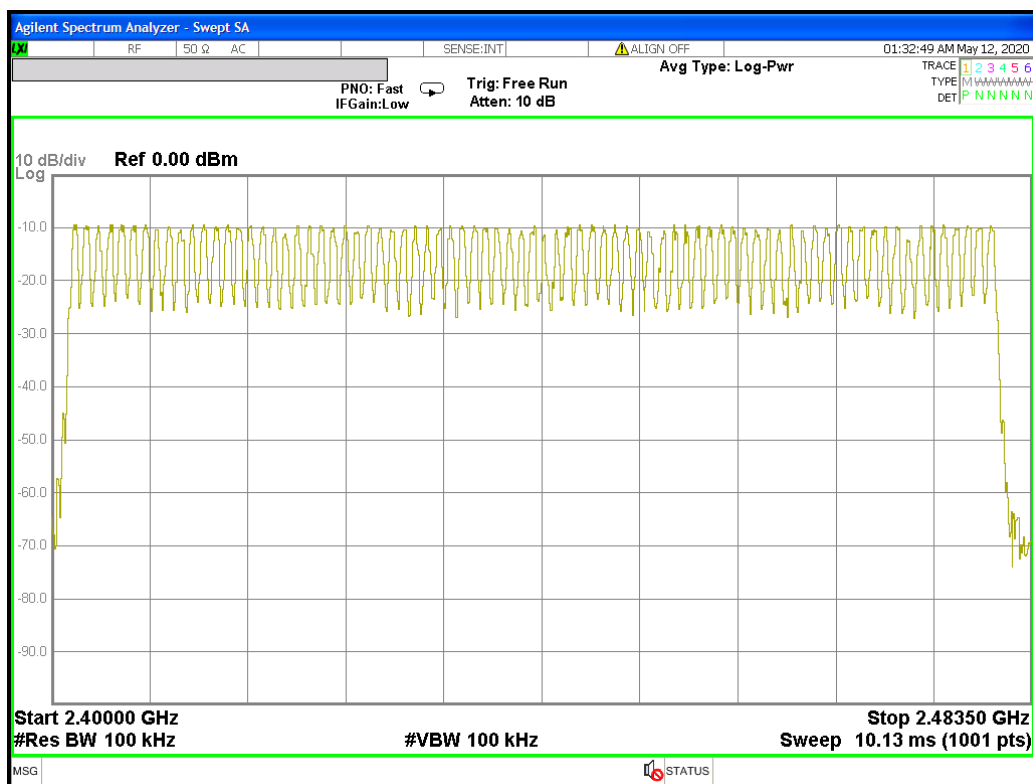


$\pi/4$ -DQPSK (2Mbps)

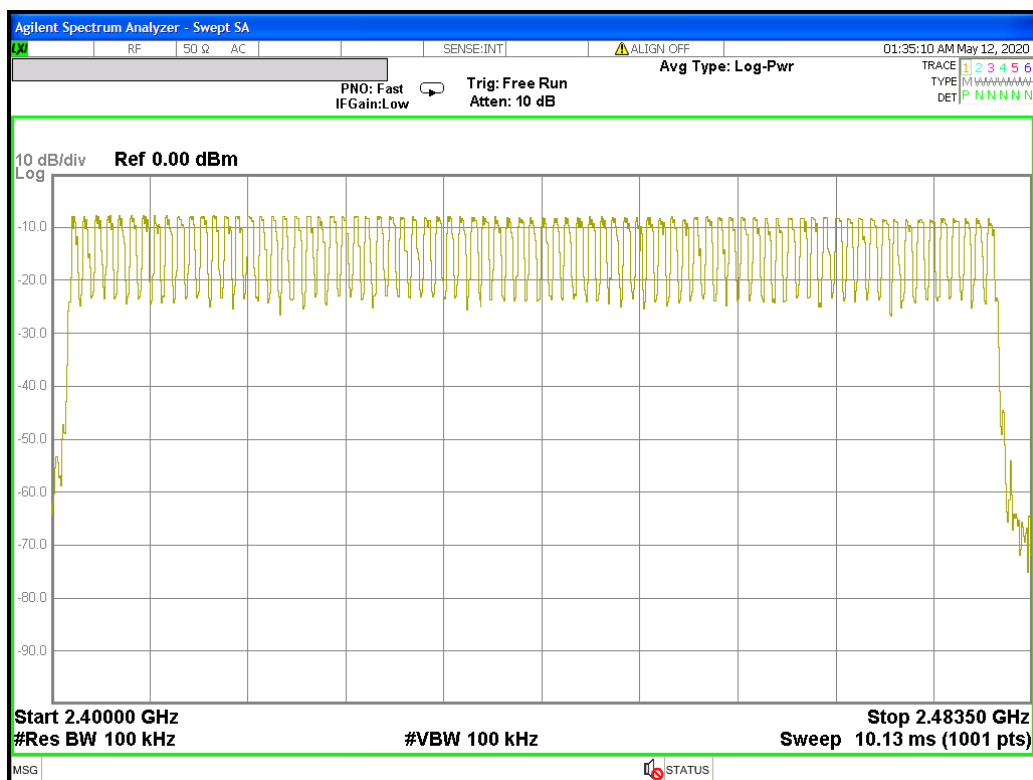



8DPSK (3Mbps)

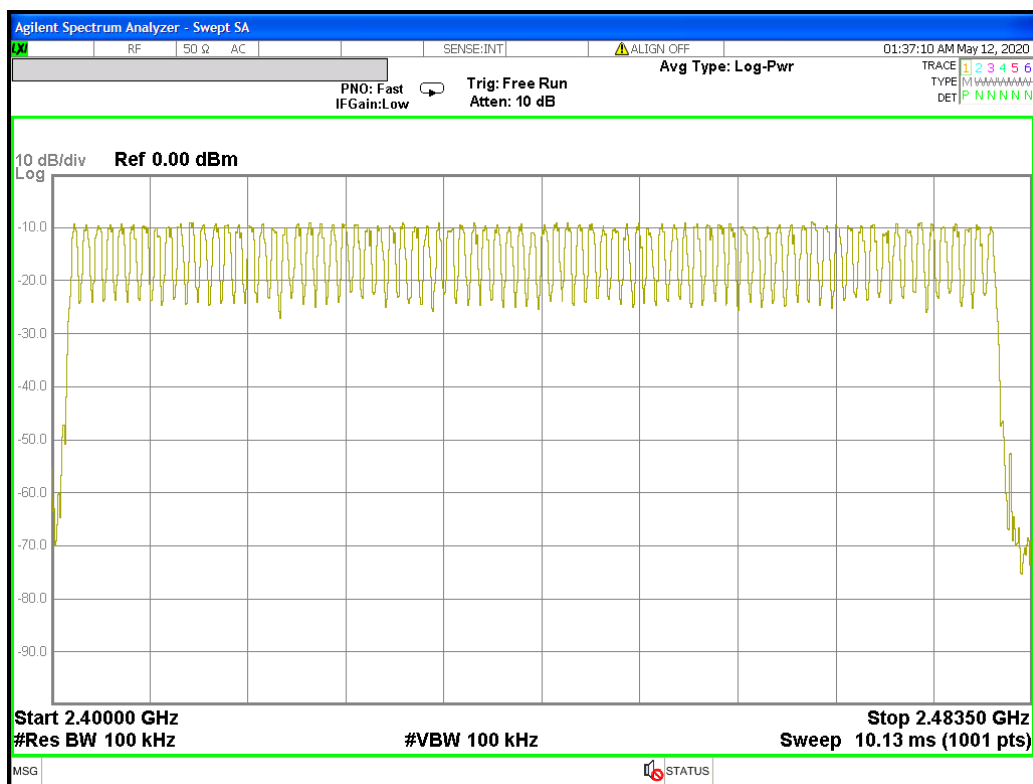



12. Maximum Peak Output Power


12.1 Test Limit

The Maximum Peak Output Power Measurement is 30 dBm.

12.2 Test Procedures

The transmitter output was connected to the spectrum analyzer. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout



12.4 Test Result and Data

Test Date: 2020.02.23

Temperature: 23°C


Atmospheric pressure: 1012 hPa

Humidity: 57%


Modulation Standard	Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
GFSK (1Mbps)	00	2402	-9.124	0.122349
	39	2441	-9.086	0.123424
	78	2480	-8.498	0.141319
$\pi/4$ -DQPSK (2Mbps)	00	2402	-8.727	0.134060
	39	2441	-8.860	0.130017
	78	2480	-8.382	0.145144
8DPSK (3Mbps)	00	2402	-8.906	0.128647
	39	2441	-8.820	0.131220
	78	2480	-8.331	0.146859



GFSK (1Mbps) Channel: 00

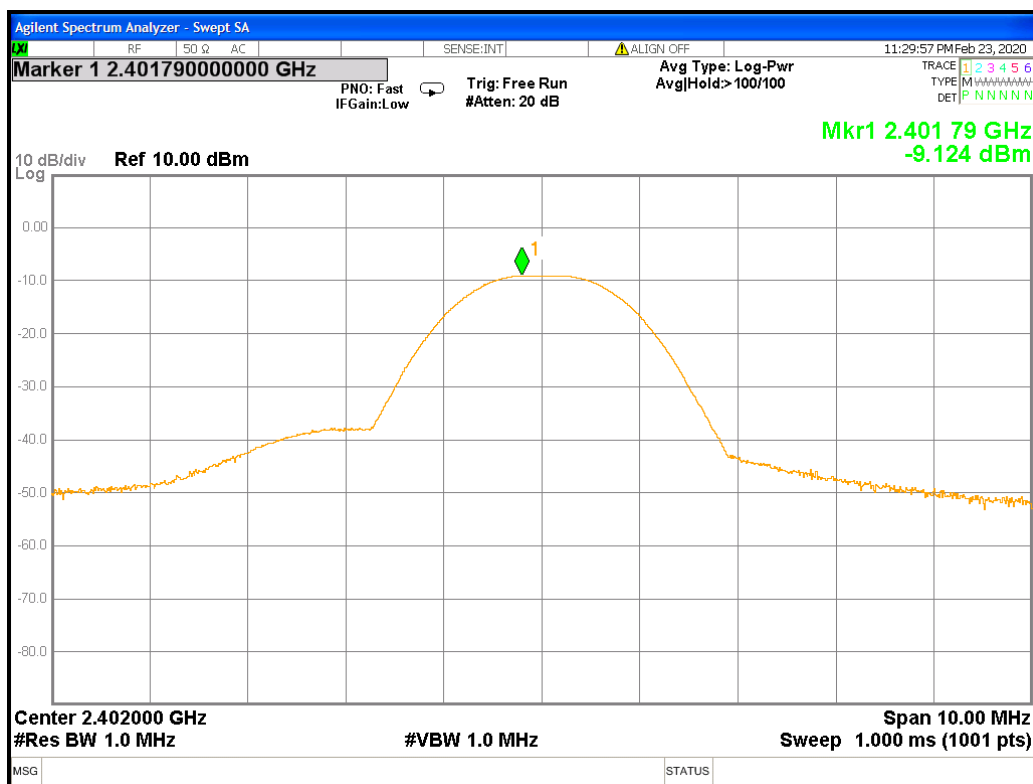


GFSK (1Mbps) Channel: 39

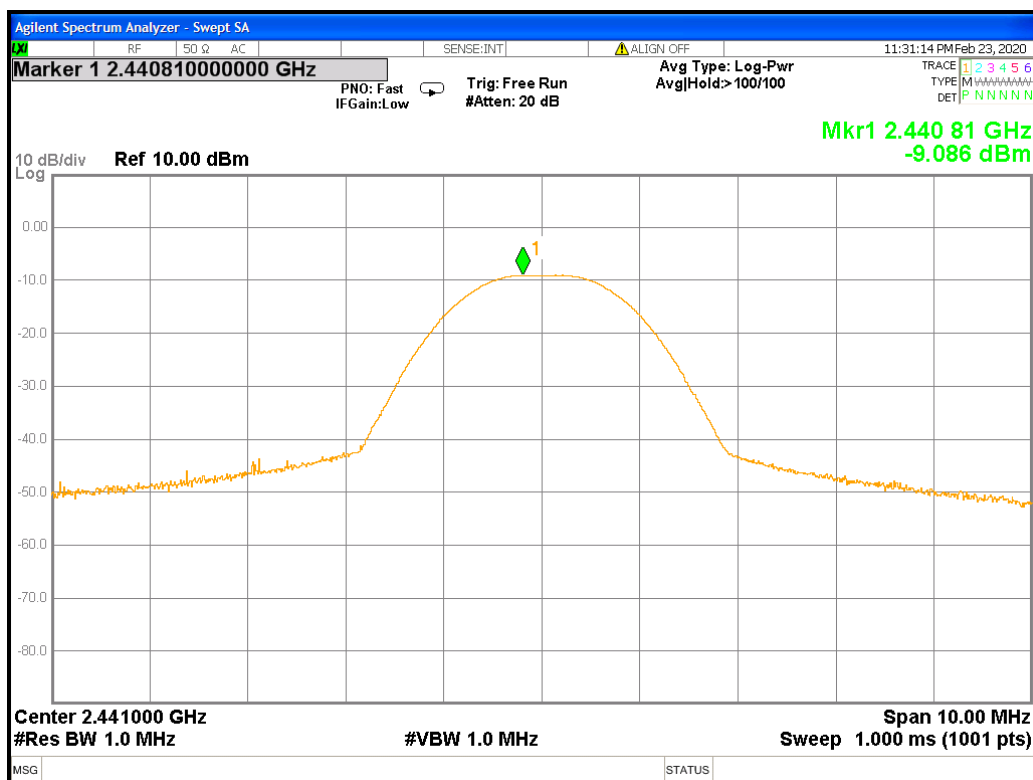




GFSK (1Mbps) Channel: 78

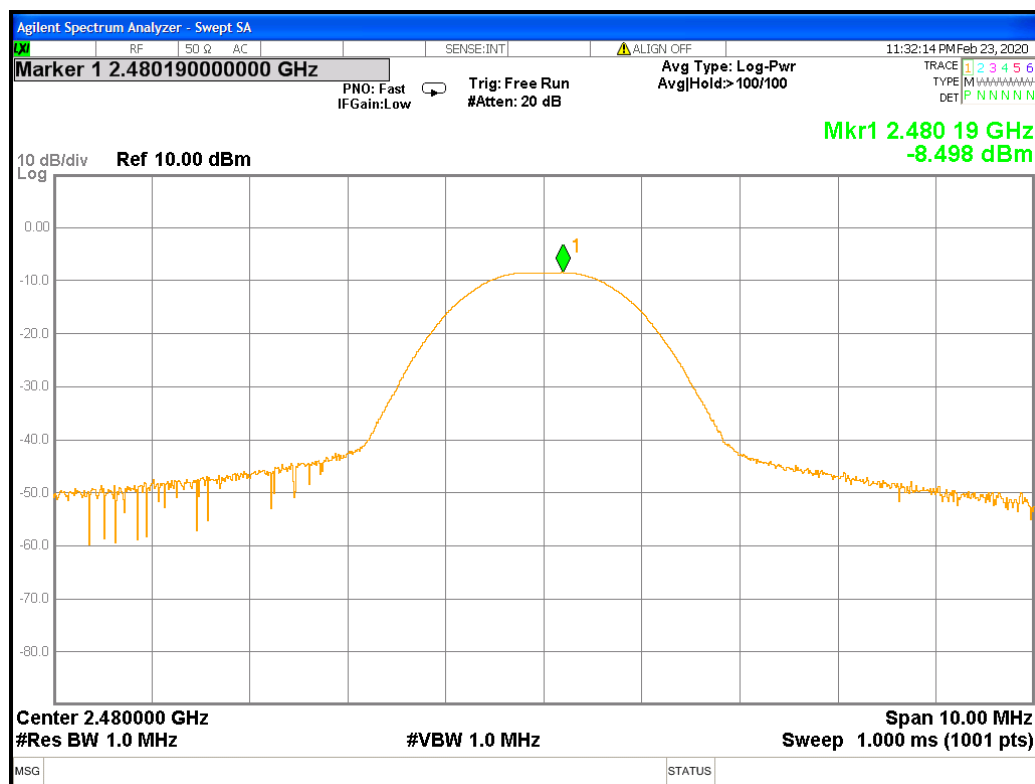


$\pi/4$ -DQPSK (2Mbps) Channel: 00

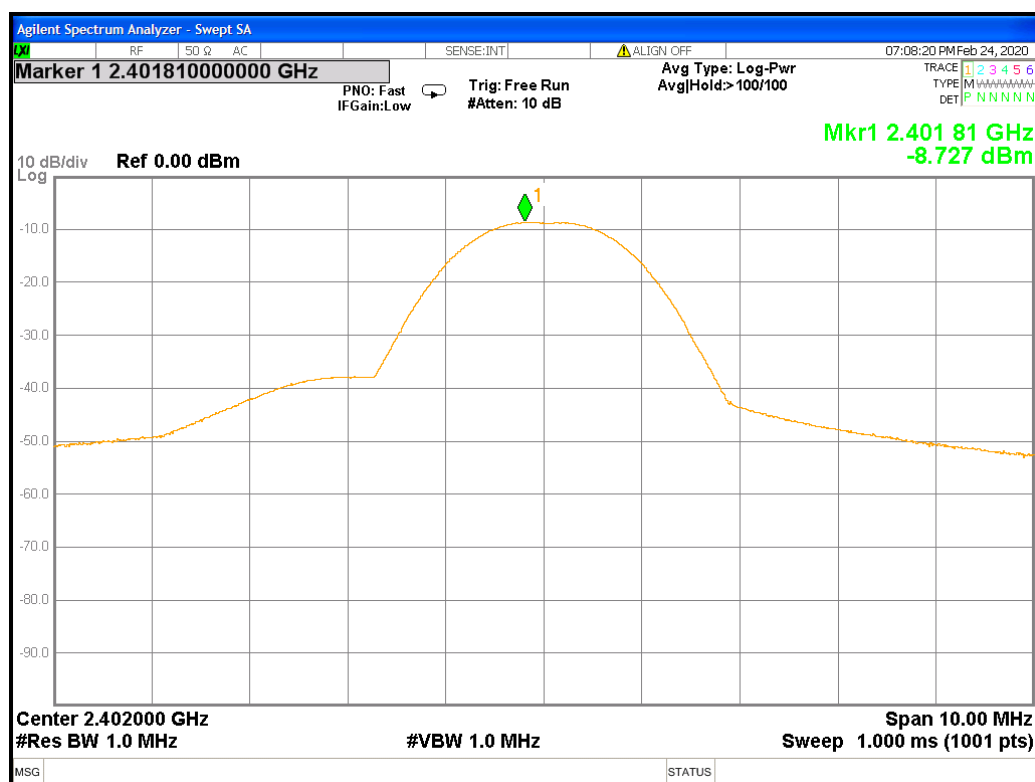




$\pi/4$ -DQPSK (2Mbps) Channel: 39

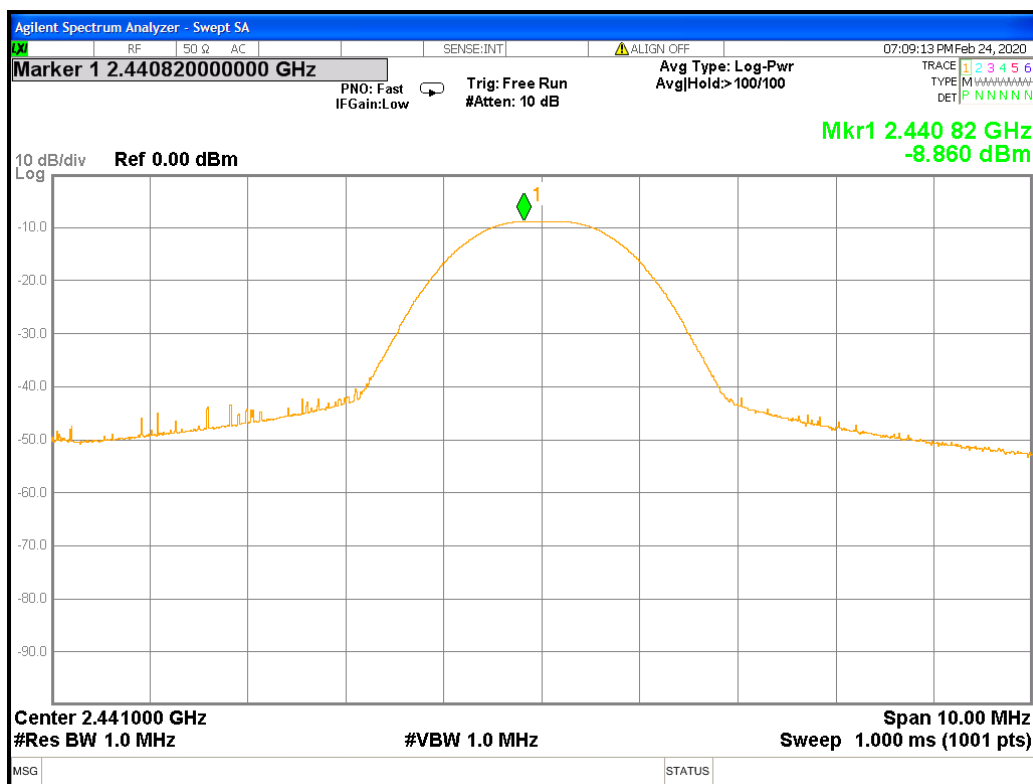


$\pi/4$ -DQPSK (2Mbps) Channel: 78

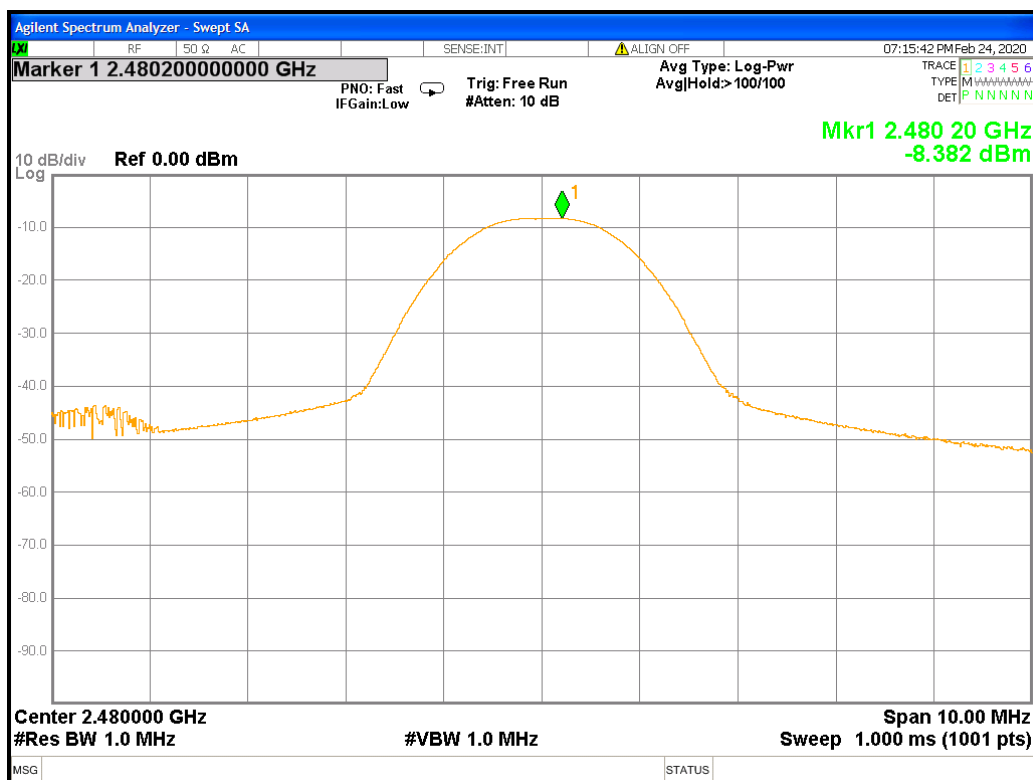




8DPSK (3Mbps) Channel: 00

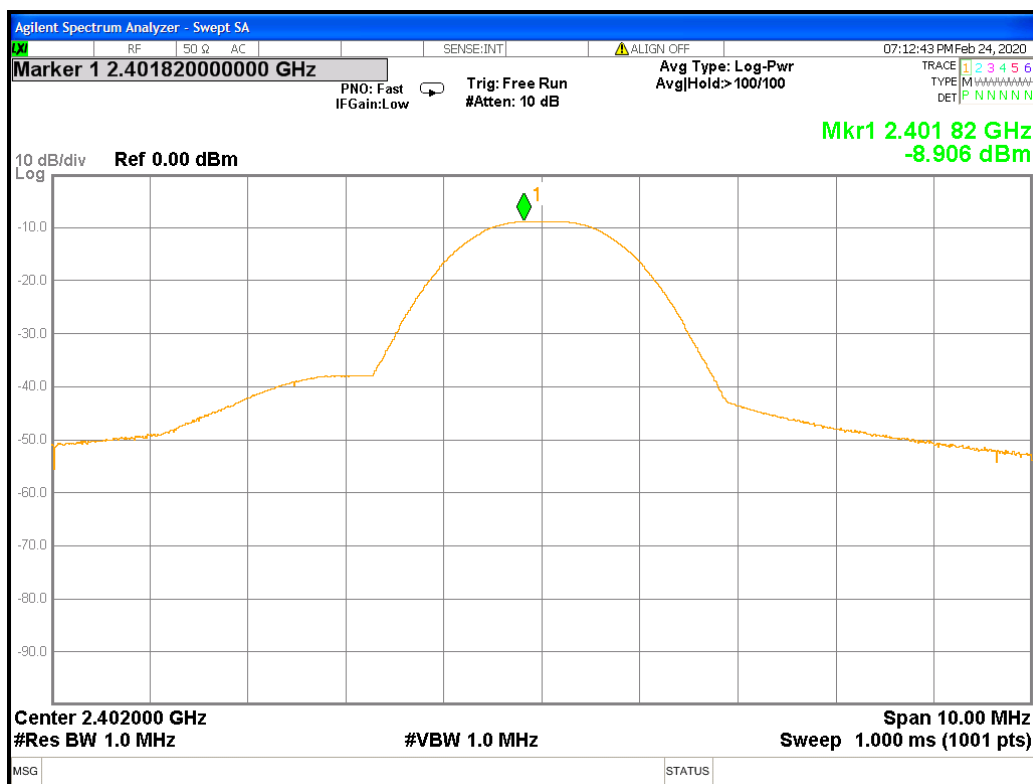


8DPSK (3Mbps) Channel: 39

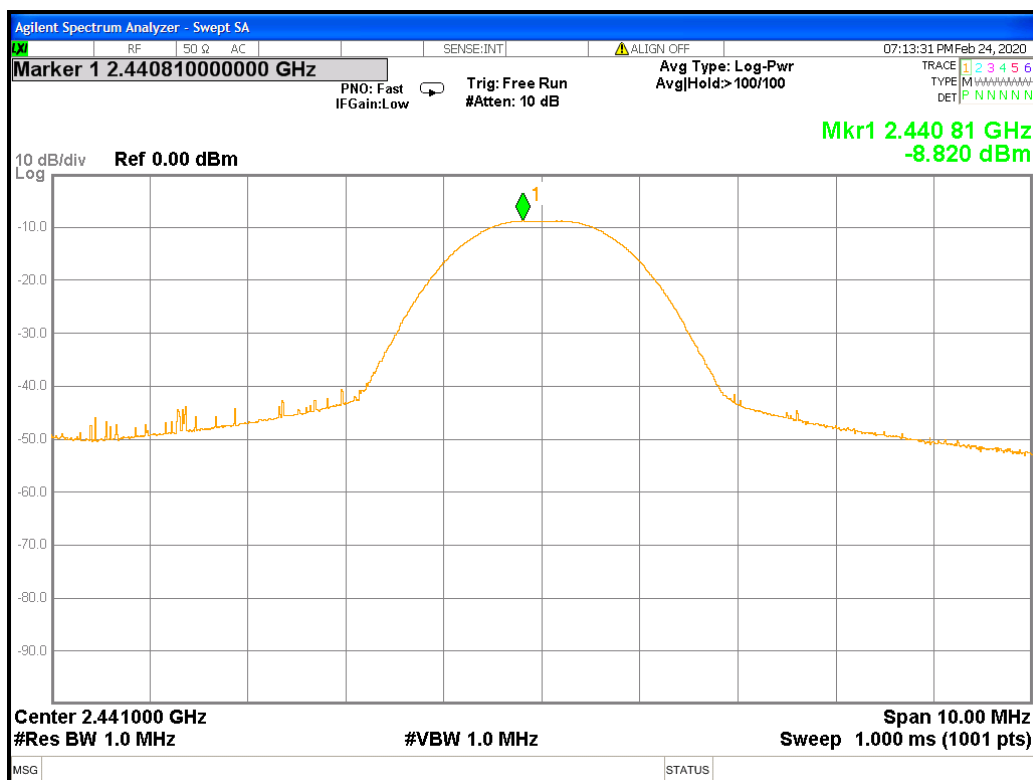



8DPSK (3Mbps) Channel: 78

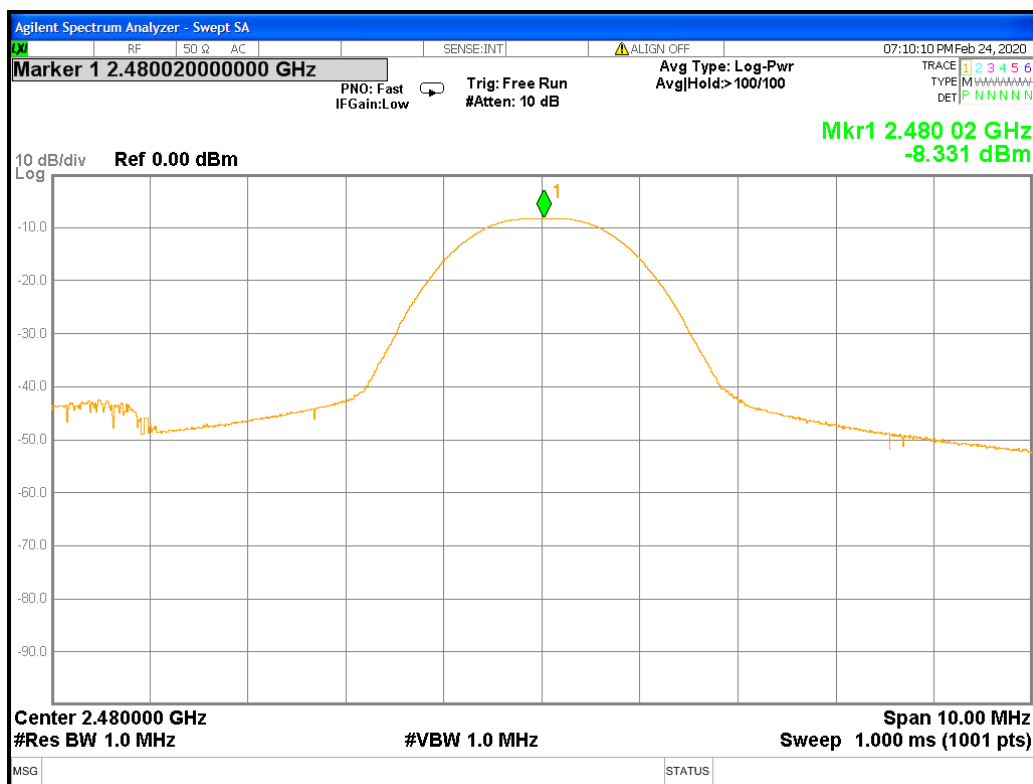



13. Band Edges Measurement


13.1 Test Limit

Below – 20 dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

13.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set both RBW and VBW of spectrum analyzer to 100 kHz with convenient frequency span including 100 kHz bandwidth from band edge.
- The band edges was measured and recorded.

13.3 Test Setup Layout



13.4 Test Result and Data

Test Date: 2020.02.24

Temperature: 23°C


Atmospheric pressure: 1012 hPa

Humidity: 57%


Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value (dBm)
GFSK (1Mbps)	00	2402	2399.9	-51.75
	78	2480	2483.5	-64.81
$\pi/4$ -DQPSK (2Mbps)	00	2402	2399.8	-54.23
	78	2480	2483.5	-65.99
8DPSK (3Mbps)	00	2402	2399.8	-55.43
	78	2480	2483.5	-73.00



GFSK (1Mbps) Channel: 00

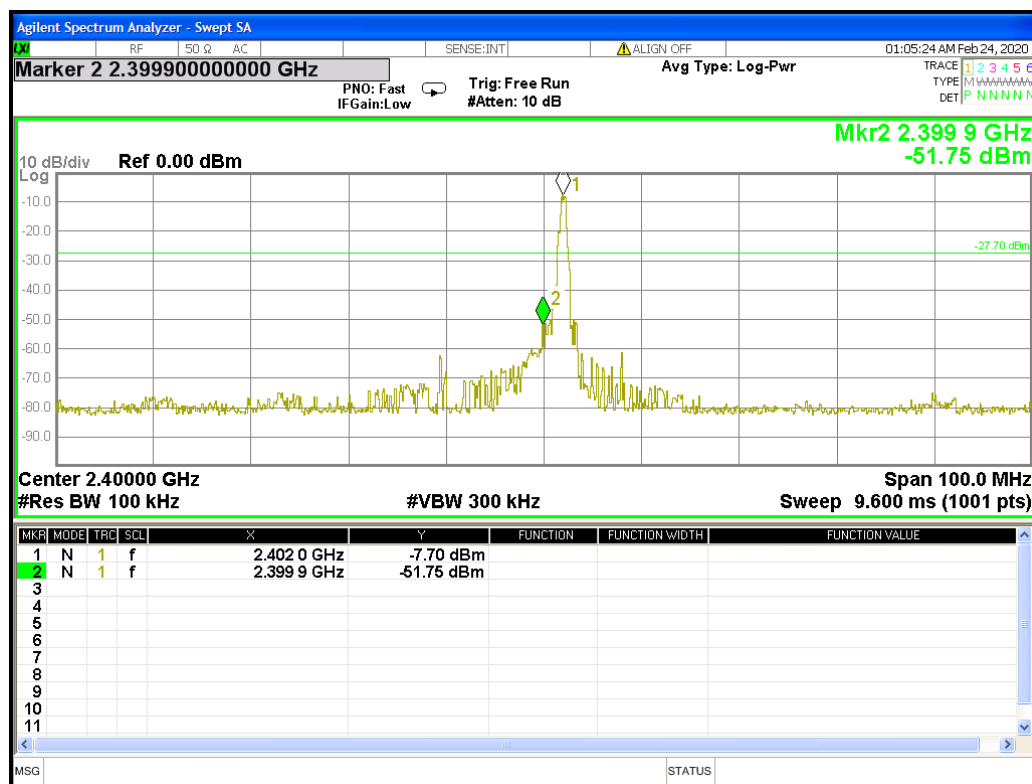


GFSK (1Mbps) Channel: 78

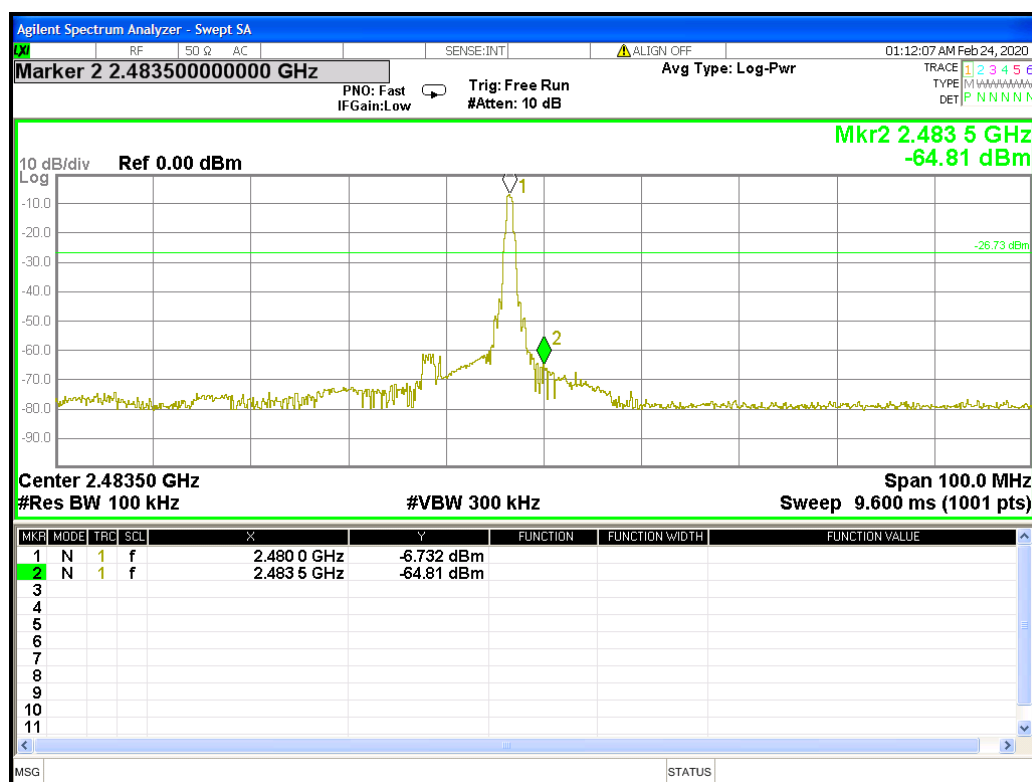




$\pi/4$ -DQPSK (2Mbps) Channel: 00

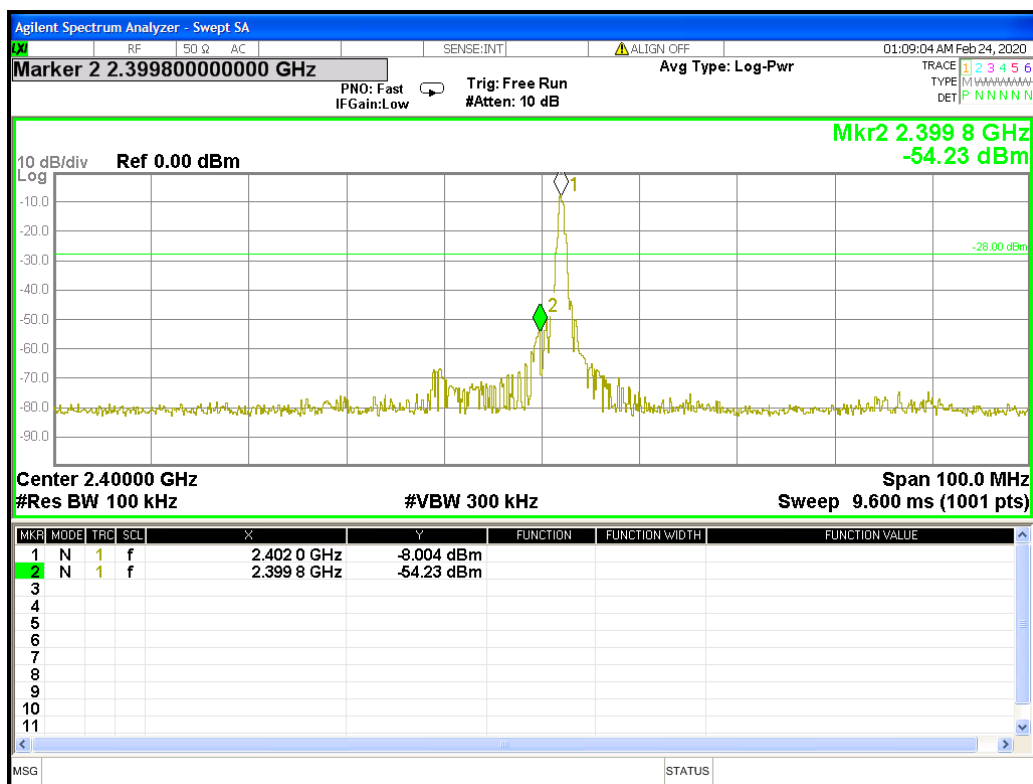


$\pi/4$ -DQPSK (2Mbps) Channel: 78

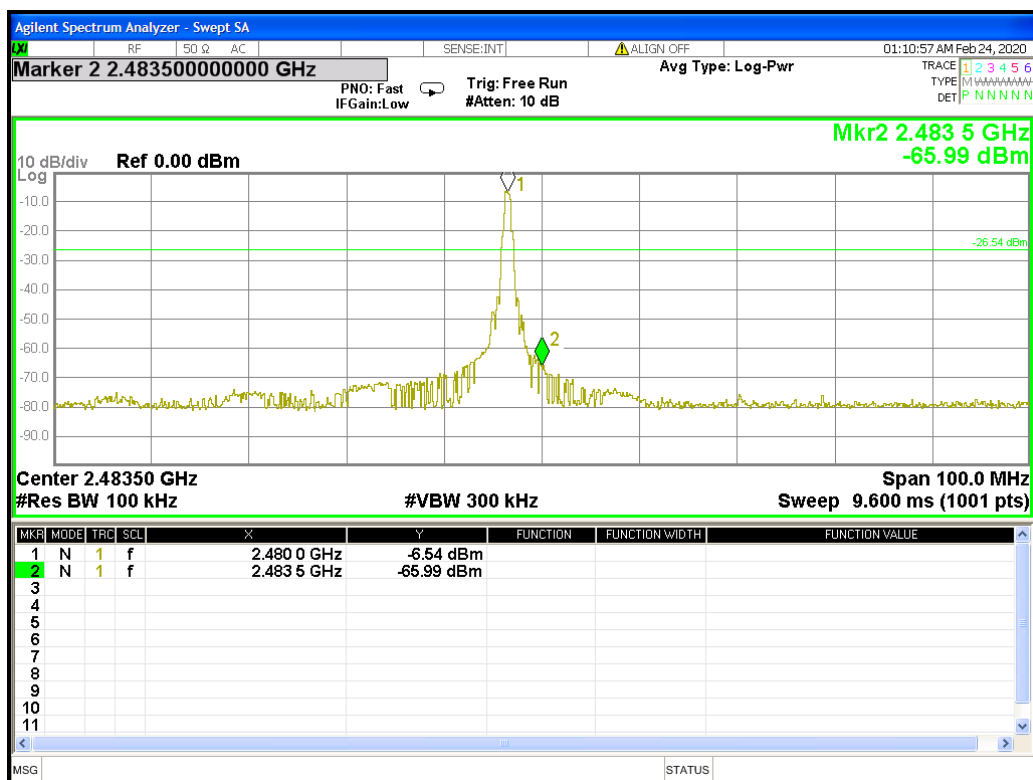




8DPSK (3Mbps) Channel: 00

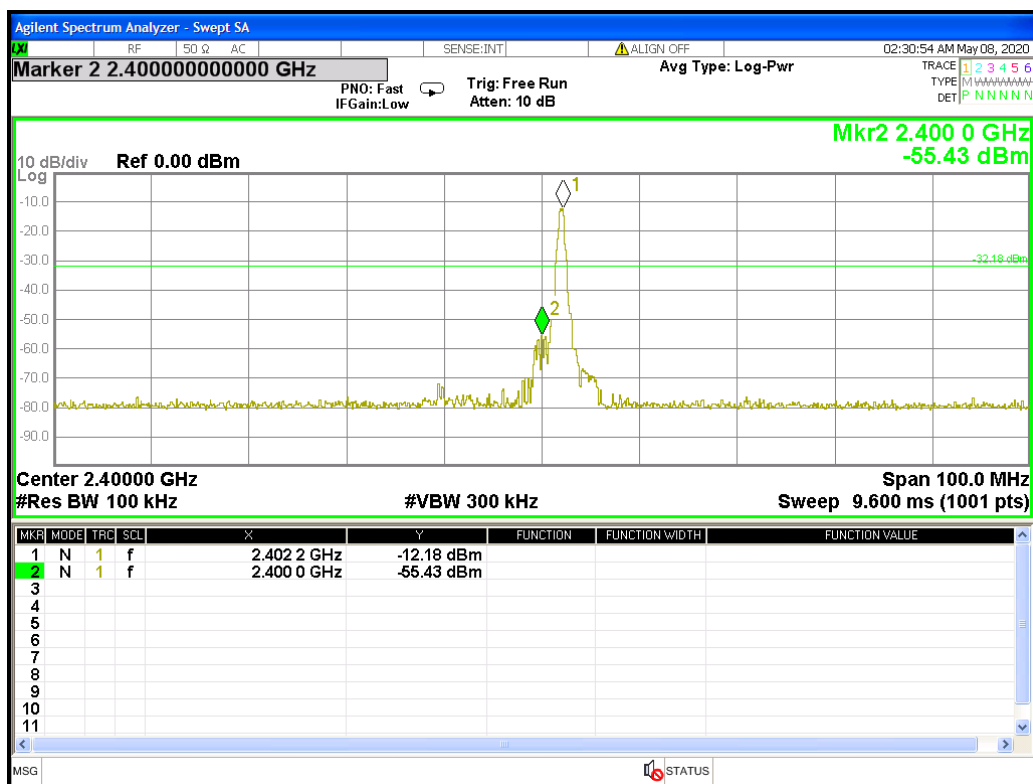


8DPSK (3Mbps) Channel: 78

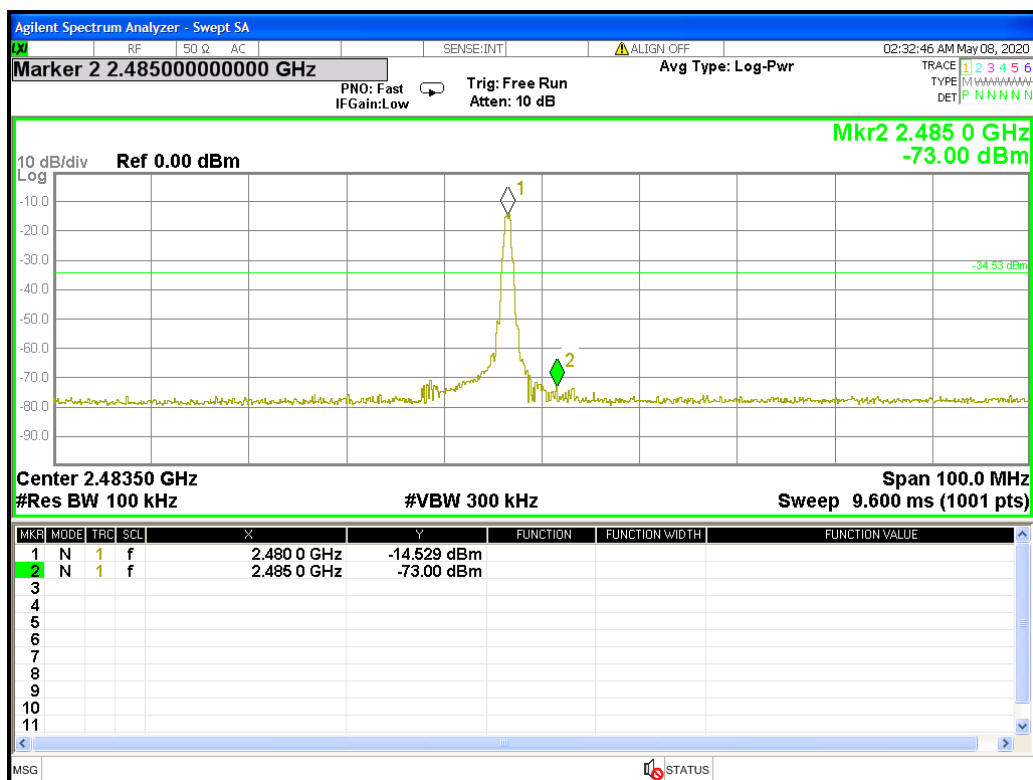



13.5 Restrict Band Emission Measurement Data

Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: GFSK

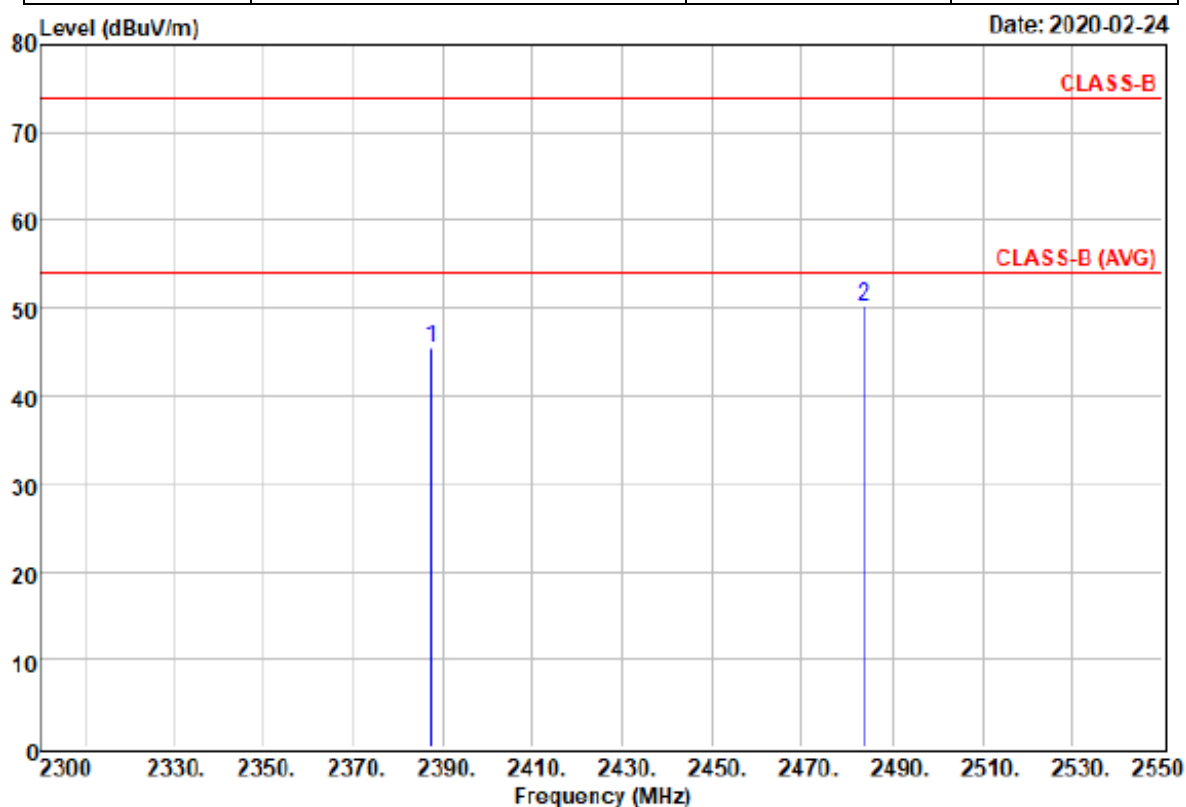


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 2387.300	55.57	-10.06	45.51	74.00	-28.49	Peak
2 @ 2483.500	60.16	-9.87	50.29	74.00	-23.71	Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: GFSK

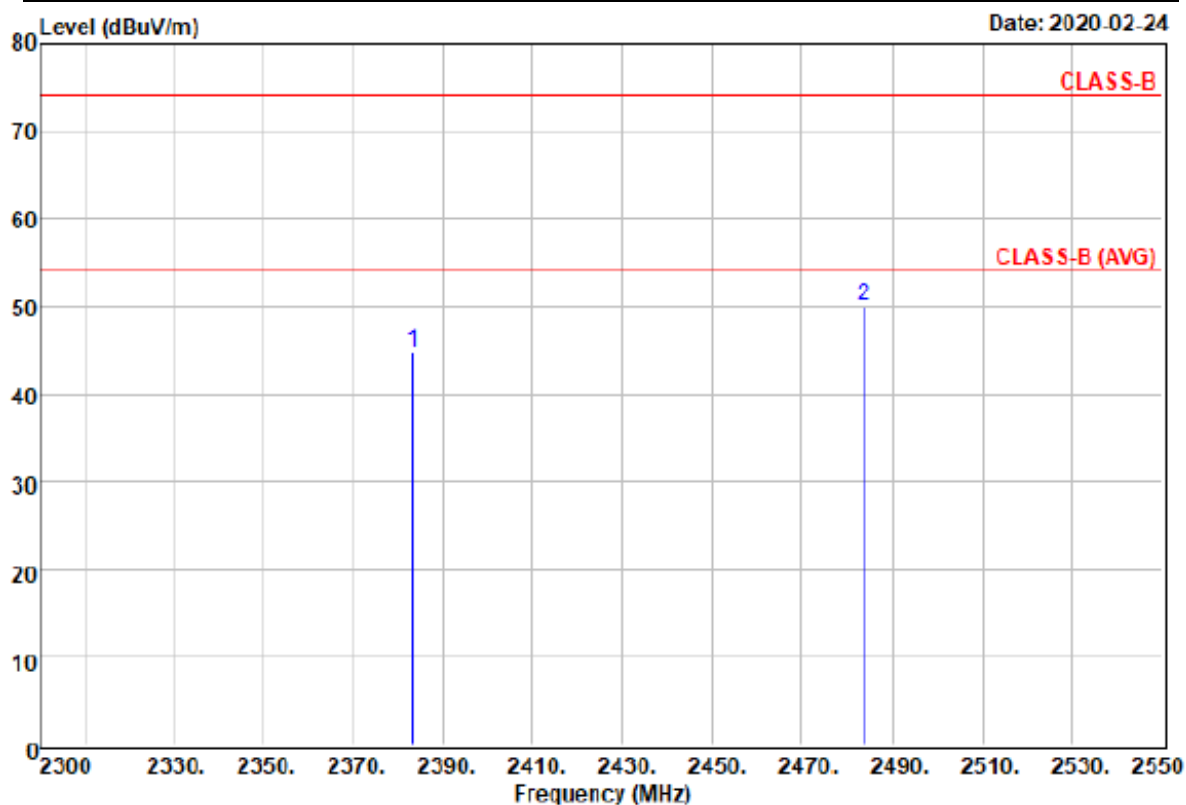


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 2383.200	54.78	-10.07	44.71	74.00	-29.29	Peak
2 @ 2483.500	59.87	-9.87	50.00	74.00	-24.00	Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: $\pi/4$ -DQPSK

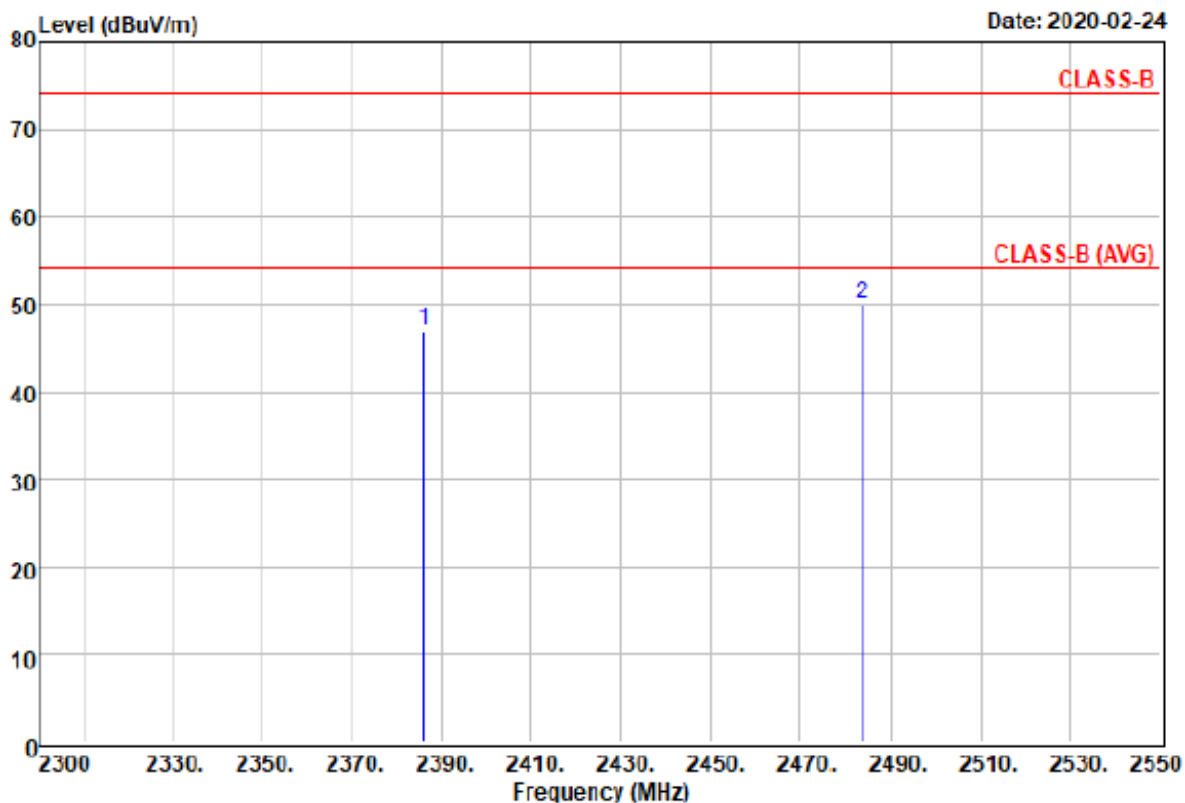


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2386.100	56.96	-10.06	46.90	74.00	-27.10 Peak
2 @	2483.500	59.95	-9.87	50.08	74.00	-23.92 Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: $\pi/4$ -DQPSK

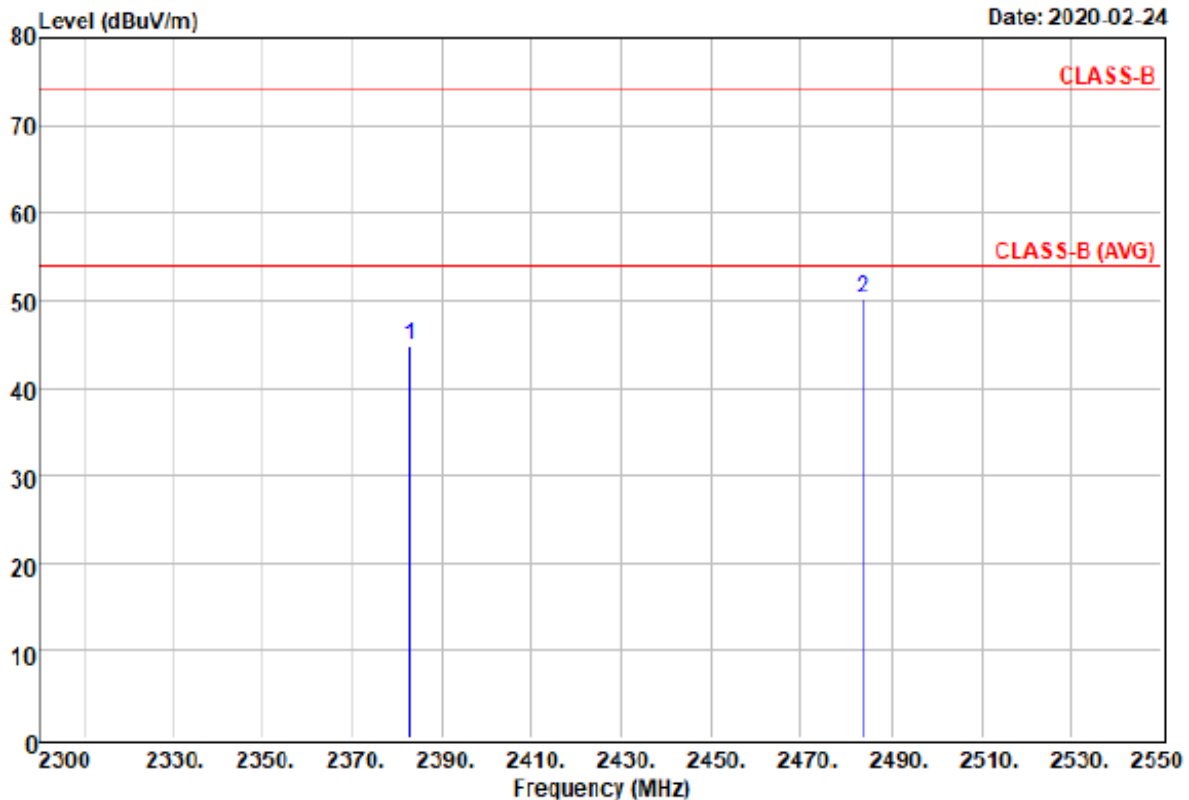


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2382.800	54.95	-10.07	44.88	74.00	-29.12 Peak
2 @	2483.500	60.06	-9.87	50.19	74.00	-23.81 Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: 8DPSK

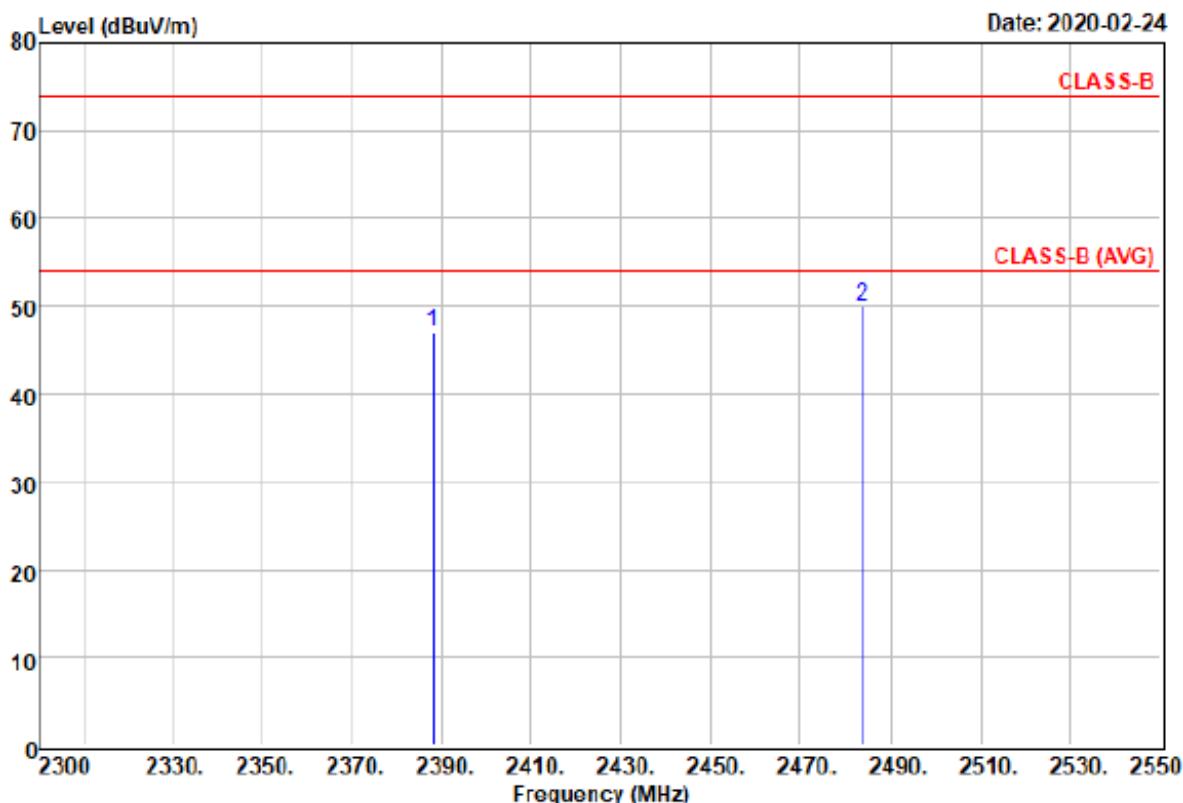


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 2387.900	57.08	-10.06	47.02	74.00	-26.98	Peak
2 @ 2483.500	59.84	-9.87	49.97	74.00	-24.03	Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 18 °C	Humidity	: 71 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: 8DPSK

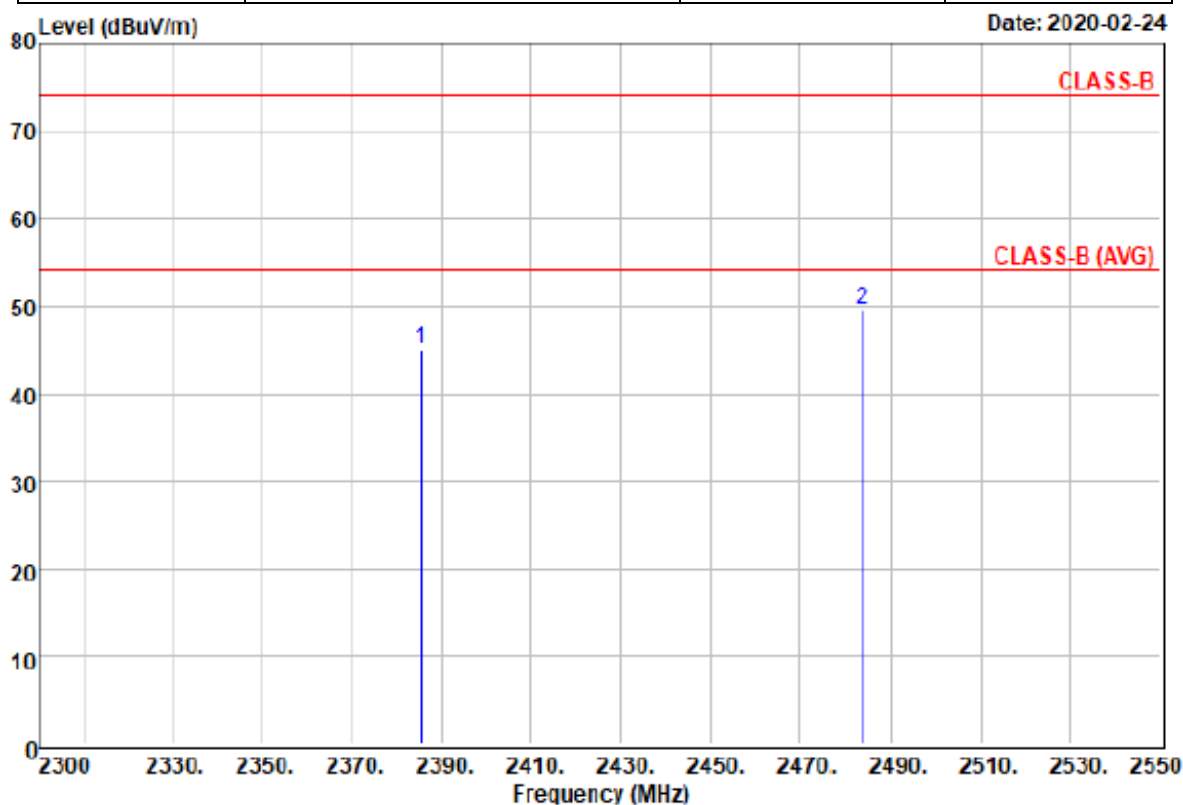

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2385.500	55.16	-10.07	45.09	74.00	-28.91 Peak
2 @	2483.500	59.34	-9.87	49.47	74.00	-24.53 Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



14. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

14.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.