
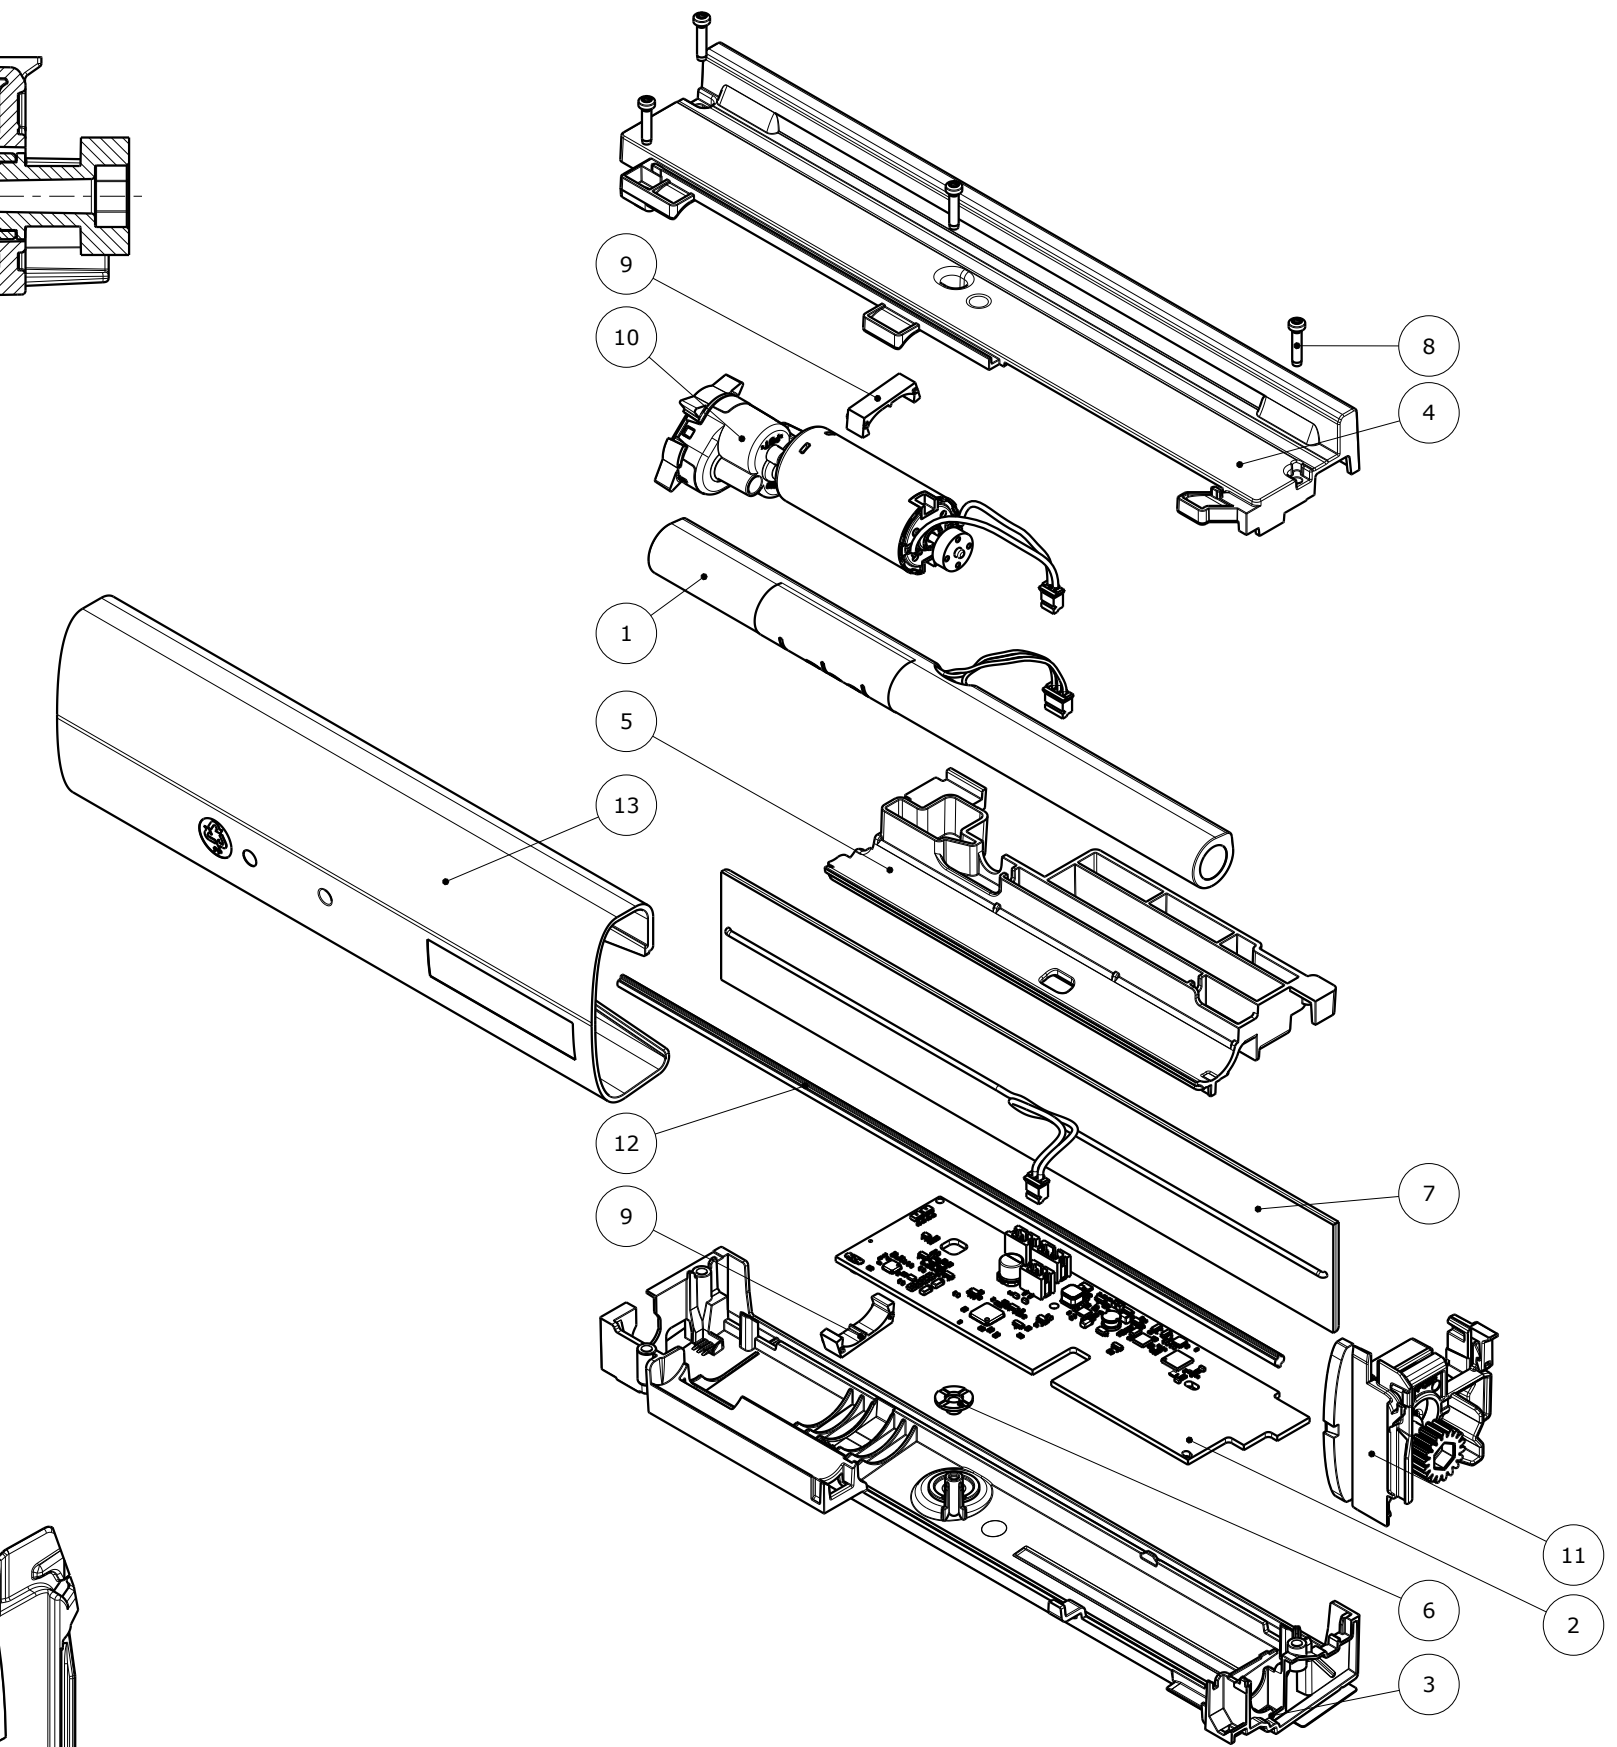
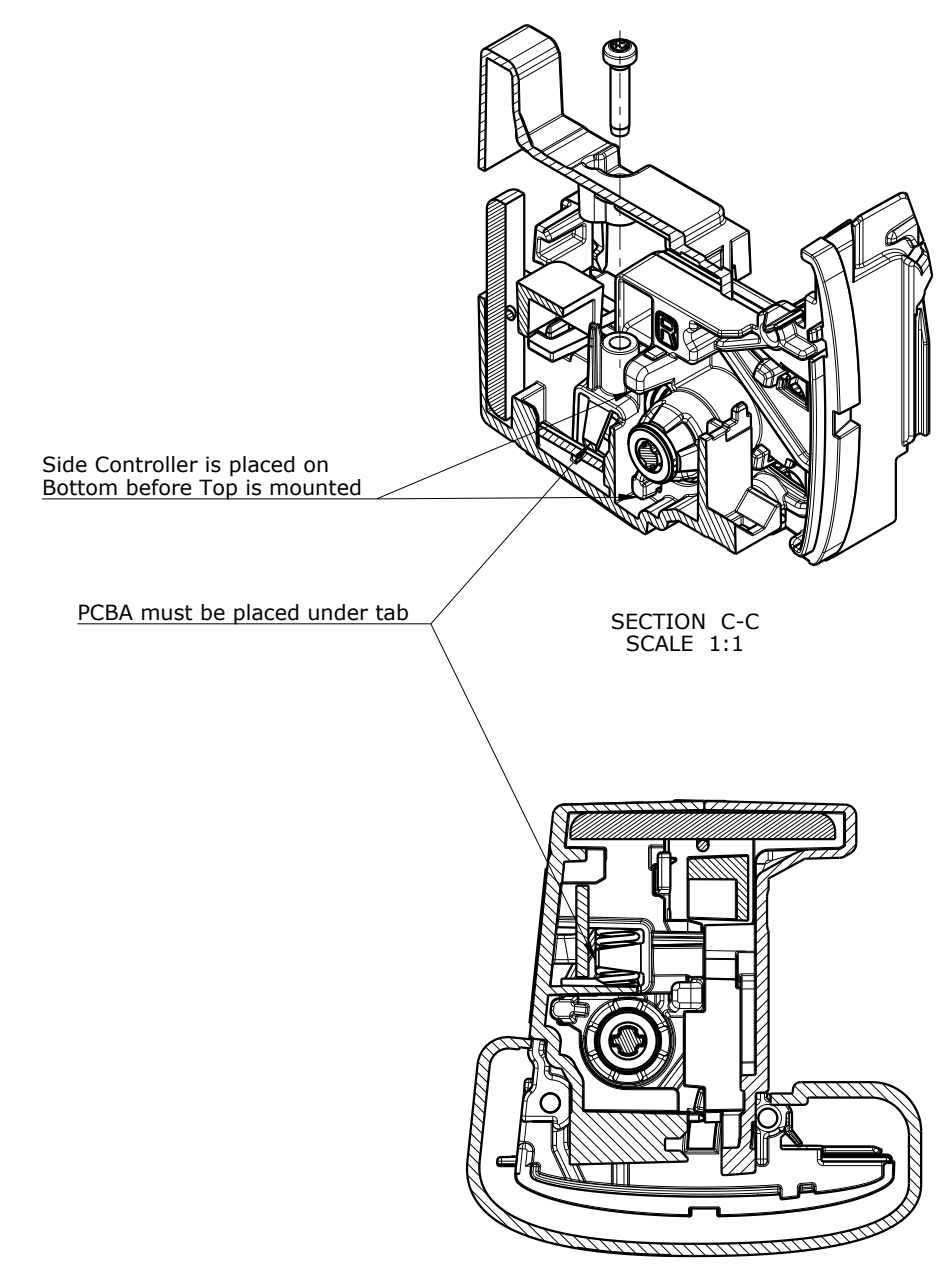
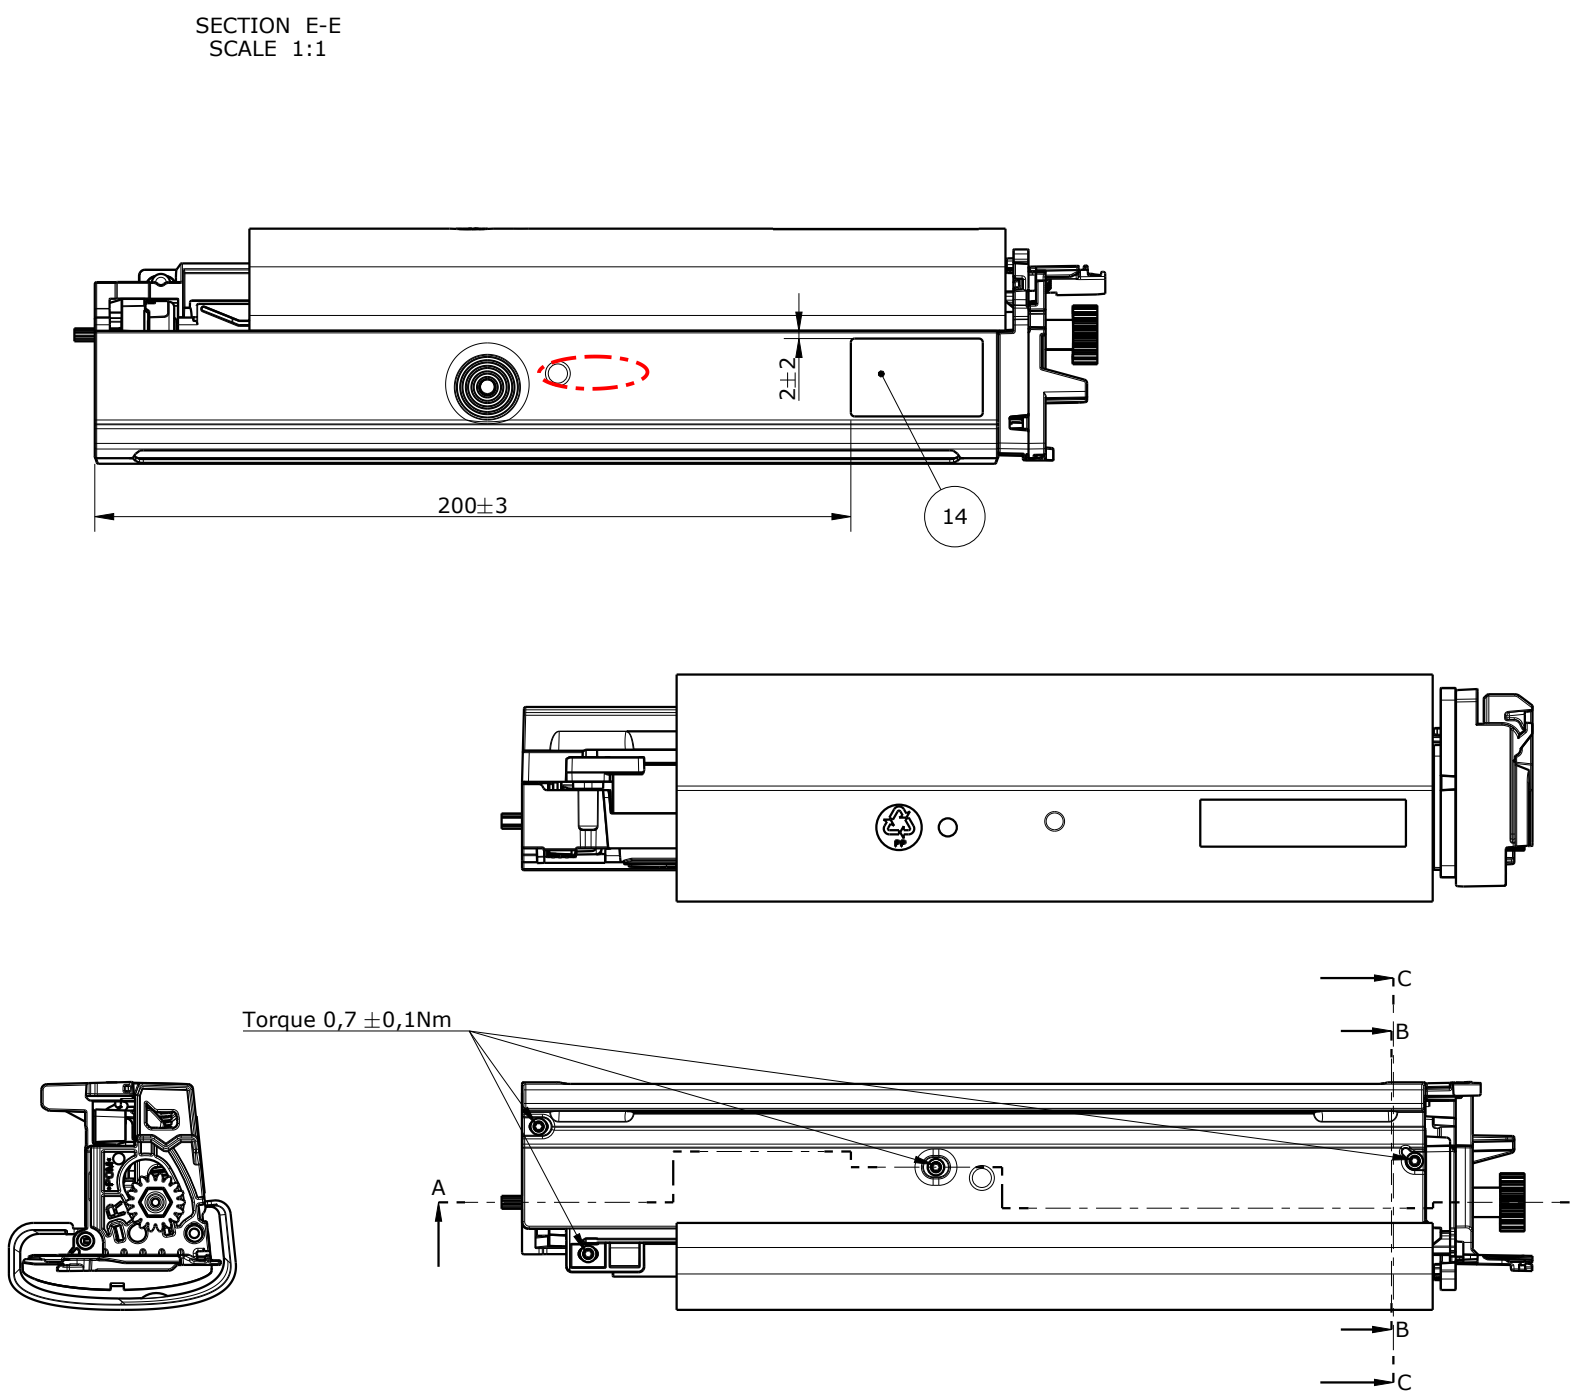


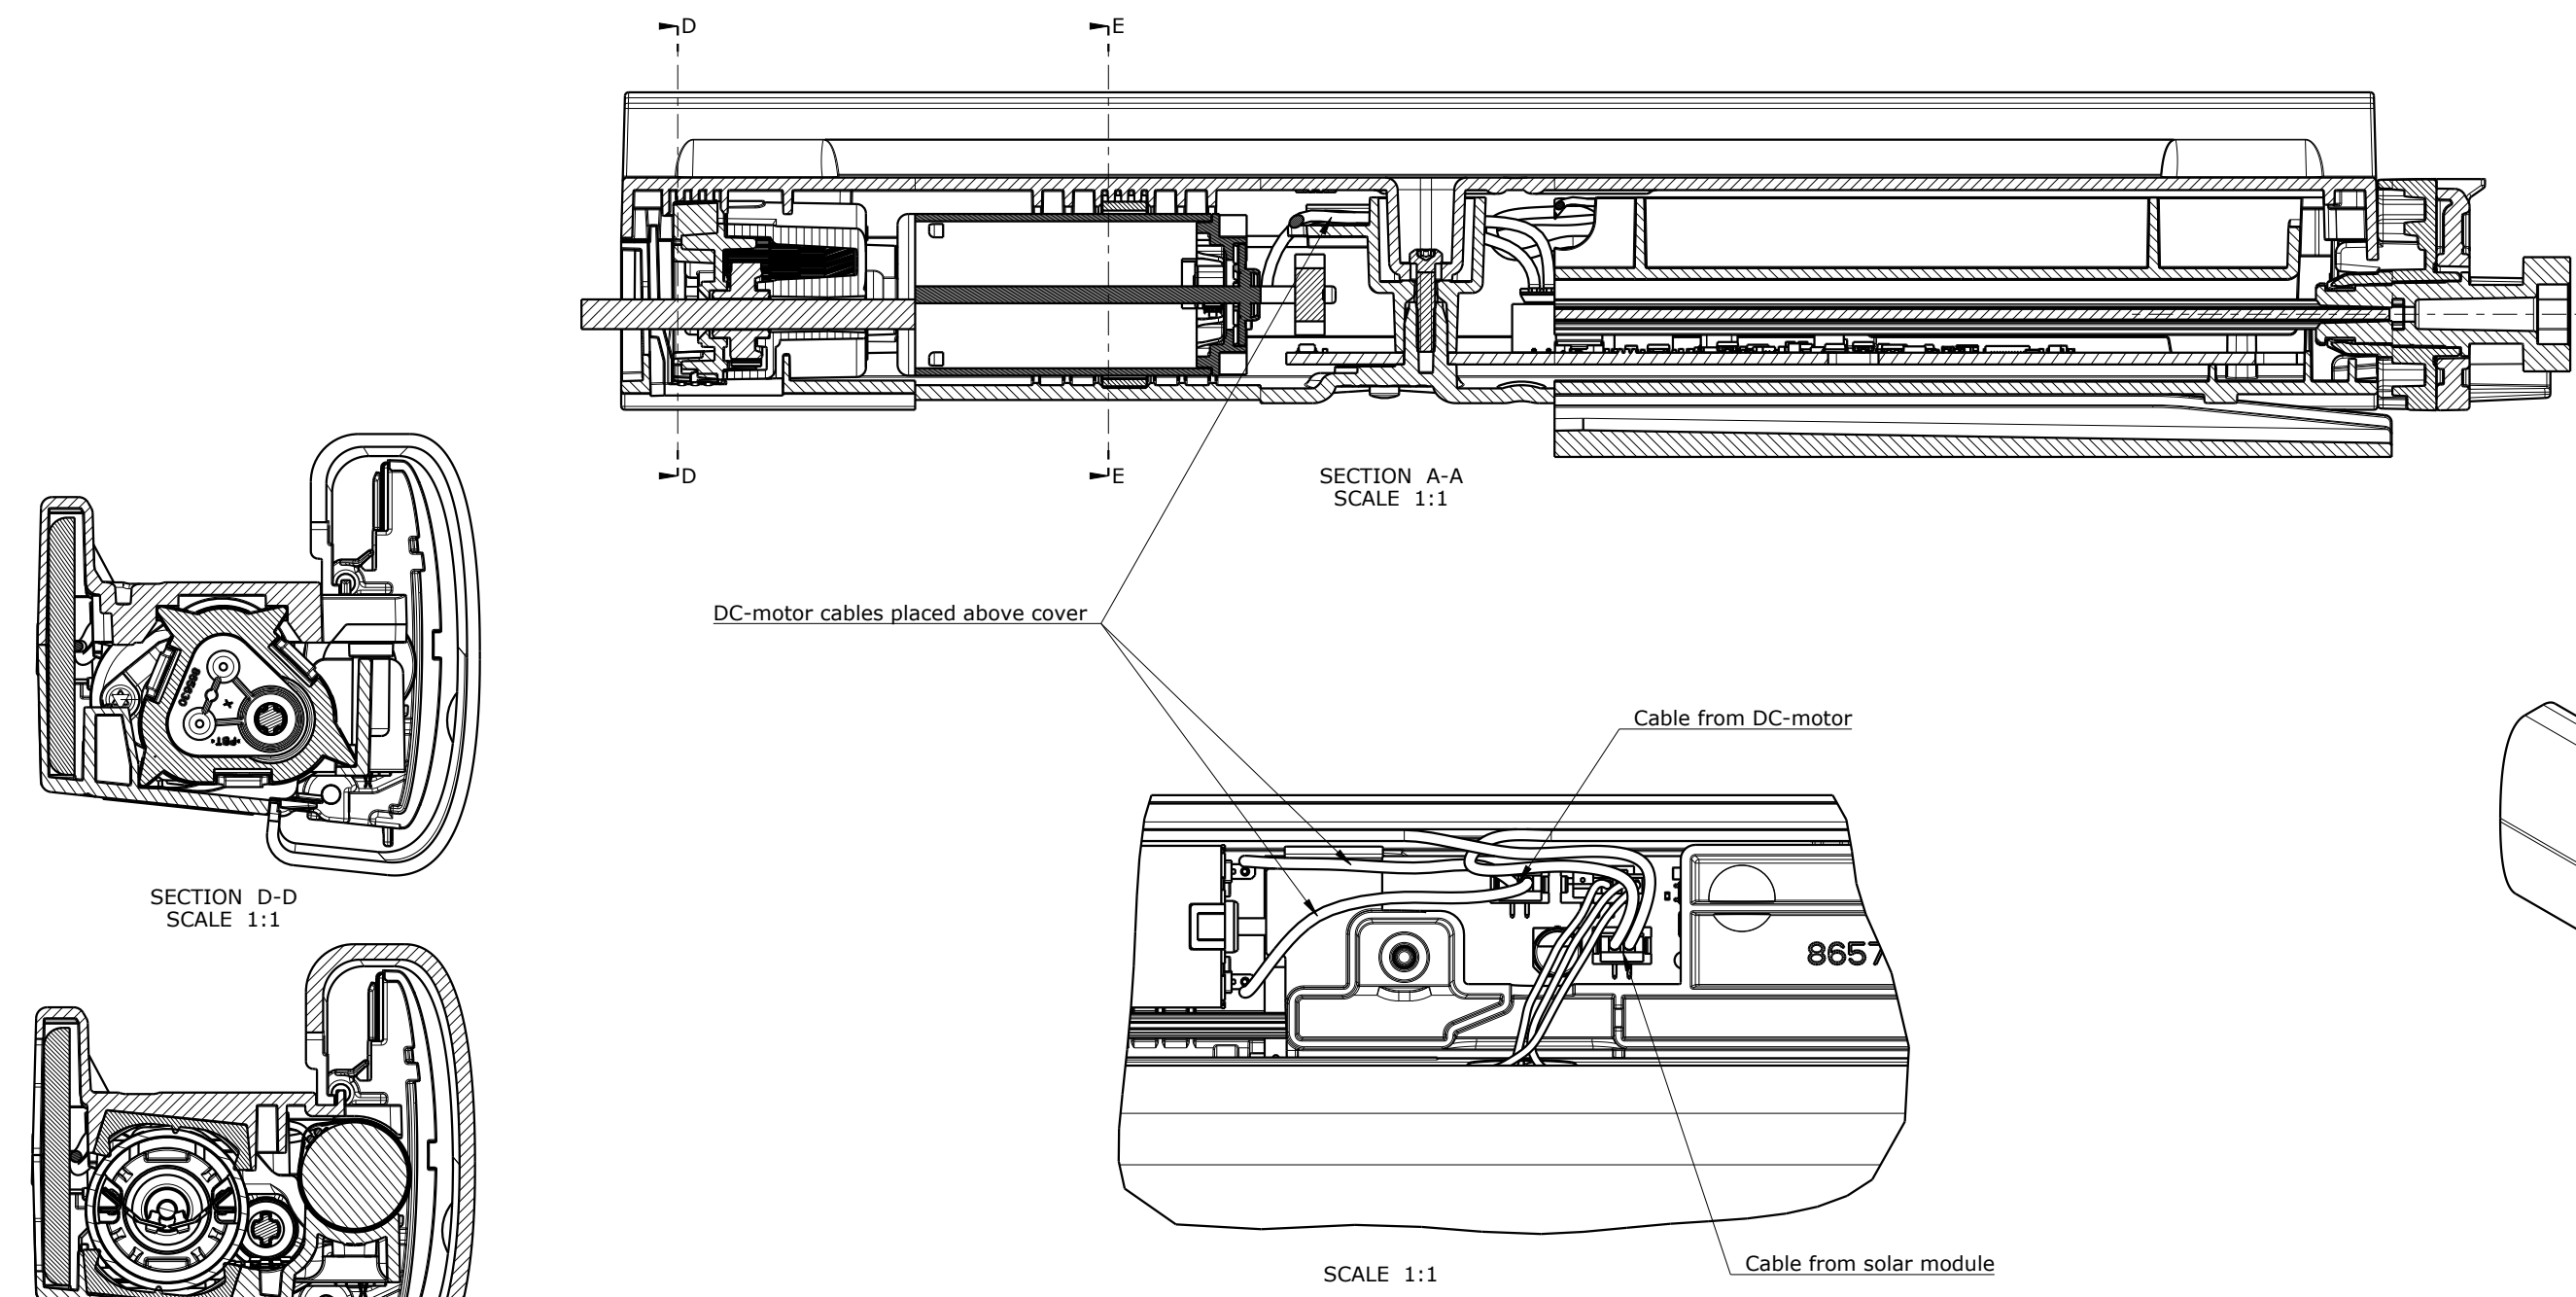

BOM					
Pos	Component	Drawing	Description	Qty.	Unit
1	833874	833874.500	Battery Pack, 4.8V NiMH	1	PC
2	865744	865744.320	Solar Blind PCBA,US,prog+test+lacq	1	PC
3	865758	865758.000	Bottom, f/box for electronics	1	PC
4	865759	865759.000	Top, f/box for electronics	1	PC
5	865760	865760.000	Solar Support, f/box for electronics	1	PC
6	865762	865762.000	Button, On/Off	1	PC
7	865769	865769.000	Solar Module, C-Si, PUR, indoor, 35mm	1	PC
8	865776	865776.000	Screw,(25)2.5x12,TX+8IP,PH PT@,BN20173	4	PC
9	865897	865897.000	Vibration Damper, silicone	2	PC
10	866054	866054.500	DC-motor, w/gearbox	1	PC
11	866090	866090.500	Side Controller, R, complete	1	PC
12	866111	866111.000	Drive Shaft, internal	1	PC
13	866278	866278.000	ESD Protection Shield,f/blind motor unit	1	PC
14	45100142		Label 34.9x20.6,printed with QR-code	1	PC
15	830230		Ink foil 48 mm for PET labels	0.015	m

Material		Colour	
Drawing		Specifications	866057.87
Standards		Q-instructions	
VELUX	VELUX A/S Ådalsvej 99, DK-2970 Hørsholm	Scale 1:2	Approved date
Sub-assembly		Size A2	General tolerance
Motor Unit, US solar blind, small		Lifecycle In Work	Approved by Søren Jespersen-Skree
		21	866061.500
			Rev. 2