

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-218-RWD-062

Reception No. : 2104002111

Applicant : TIT ENG Co.,Ltd.

Address : 7 Floor Shin-do B/D, 10, Garak-dong, Songpa-Gu, Seoul, South Korea

Manufacturer : TIT ENG Co.,Ltd.

Address : 7 Floor Shin-do B/D, 10, Garak-dong, Songpa-Gu, Seoul, South Korea

Type of Equipment : ID CARD PRINTER

FCC ID : XTNNL300

Model Name : NR300

Multiple Model Name : NR600, NR, JRT 300, JRT 600 PRO

Serial number : N/A

Total page of Report : 36 pages (including this page)

Date of Incoming : August 09, 2021


Date of Issuing : August 19, 2021

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART C Section 15.225**

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.



Tested by
/ Sieon Lee / Assistant Manager
ONETECH Corp.

Reviewed by
/ Ha-Ram Lee / Manager
ONETECH Corp.

Approved by
/ Ki-Hong, Nam / General Manager
ONETECH Corp.

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION.....	6
2.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY	7
3. SYSTEM TEST CONFIGURATION	8
3.1 JUSTIFICATION.....	8
3.2 PERIPHERAL EQUIPMENT	8
3.3 MODE OF OPERATION DURING THE TEST	8
3.4 CONFIGURATION OF TEST SYSTEM.....	9
3.5 ANTENNA REQUIREMENT	9
4. PRELIMINARY TEST	9
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	9
4.2 RADIATED EMISSIONS TESTS.....	9
5. FINAL RESULT OF MEASUREMENT.....	10
5.1 CONDUCTED EMISSION TEST.....	10
5.1.1 Test data for RF Tag Reader	10
5.1.2 Test data for RF Card Reader	12
5.1.3 Test data for Intermodulation	14
5.2 RADIATED EMISSION TEST.....	16
5.2.1 Test data for RF Tag Reader	16
5.2.2 Test data for RF Card Reader	18
5.3 SPURIOUS EMISSION TEST.....	20
5.3.1 Test data for RF Tag Reader.....	20
5.3.1.1 Spurious Radiated Emission Below 30 MHz	20
5.3.1.2 Spurious Radiated Emission below 1 GHz	22
5.3.2 Test data for RF Card Reader	23

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

5.3.2.1 Spurious Radiated Emission Below 30 MHz	23
5.3.2.2 Spurious Radiated Emission below 1 GHz	25
5.3.3 Test data for Intermodulation	26
5.3.3.1 Spurious Radiated Emission Below 30 MHz	26
5.3.3.2 Spurious Radiated Emission below 1 GHz	28
5.4 20 dB BANDWIDTH	29
5.4.1 Operating environment	29
5.4.2 Test set-up	29
5.4.3 Test date	29
5.4.4 Test data	30
5.4.4.1 Test data for RF Tag Reader	30
5.4.4.2 Test data for RF Card Reader	31
5.5 FREQUENCY STABILITY WITH TEMPERATURE VARIATION	32
5.5.1 Operating environment	32
5.5.2 Test set-up	32
5.5.3 Test date	32
5.5.4 Test data	33
5.5.4.1 Test data for RF Tag Reader	33
5.5.4.2 Test data for RF Card Reader	33
5.6 FREQUENCY STABILITY WITH VOLTAGE VARIATION	34
5.6.1 Operating environment	34
5.6.2 Test set-up	34
5.6.3 Test date	34
5.6.4 Test data	34
5.6.4.1 Test data for RF Tag Reader	34
5.6.4.2 Test data for RF Card Reader	34
6. FIELD STRENGTH CALCULATION	35
7. LIST OF TEST EQUIPMENT	36

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-218-RWD-062	August 19, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

-. APPLICANT : TIT ENG Co.,Ltd.
-. ADDRESS : 7 Floor Shin-do B/D, 10, Garak-dong, Songpa-Gu, Seoul, South Korea
-. CONTACT PERSON : Sang-Joong Lee / Chief Engineer
-. TELEPHONE NO : +82-10-2391-1292
-. FCC ID : XTNNL300
-. MODEL NO. : NR300
-. SERIAL NUMBER : N/A
-. DATE : August 19, 2021

DEVICE TYPE	DXX – Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	ID CARD PRINTER
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.225
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The TIT ENG Co.,Ltd., Model NR300 (referred to as the EUT in this report) is an ID CARD PRINTER, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	ID CARD PRINTER	
TRANSMITTING FREQUENCY	RF Tag Reader	13.561 5 MHz
	Rf Card Reader	13.559 3 MHz
MODULATION	ASK	
ANTENNA TYPE	Loop Antenna	
LIST OF EACH OSC. or CRY. FREQ.(FREQ. >= 1 MHz)	4 MHz, 8 MHz, 12 MHz, 13.56 MHz, 18 MHz, 27.12 MHz	

2.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
NR300	Basic Model using TPH(Thermal Print Head) with a resolution 300 DPI.	☒
NR600	This model is identical to the basic model except for using a TPH with a resolution 600 DPI.	☒
NR	This model is identical to the basic model. It is derived for Marketing purpose.	☐
JRT 300	This model is identical to the basic model. It is derived for Marketing purpose.	☐
JRT 600 PRO	This model is identical to the basic model except for using a TPH with a resolution 600 DPI.	☐

Note: 1. Applicant consigns only basic model to test. Therefore, this test report just guarantees the units which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.225.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
TIT-RETRANSFER-MAIN	N/A	N/A	N/A
TIT-RETRANSFER-RF-TAG	N/A	N/A	N/A
TIT-NEW-MECH-PCB	N/A	N/A	N/A
TIT-NUVIA_CIS	N/A	N/A	N/A
TIT-NUVIA_MS	N/A	N/A	N/A

3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
NR300	TIT ENG Co.,Ltd.	ID CARD PRINTER (EUT)	-
2ABU120M	Channel Well Technology	AC Adapter	EUT
E5500	DELL	Notebook	EUT
DA130PE1-00	DELL	AC Adapter	Notebook

3.3 Mode of operation during the test

-. The EUT has 13.56 MHz RF boards for reader and tagging. For the testing, program was used for making continuous transmission mode during the test.

The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report. For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

3.4 Configuration of Test System

Line Conducted Test : The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber.
For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna.
The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

3.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a PCB Antenna so there is no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test

5.1.1 Test data for RF Tag Reader

Humidity Level : 48 % R.H.

Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)


Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Tested Line : HOT LINE

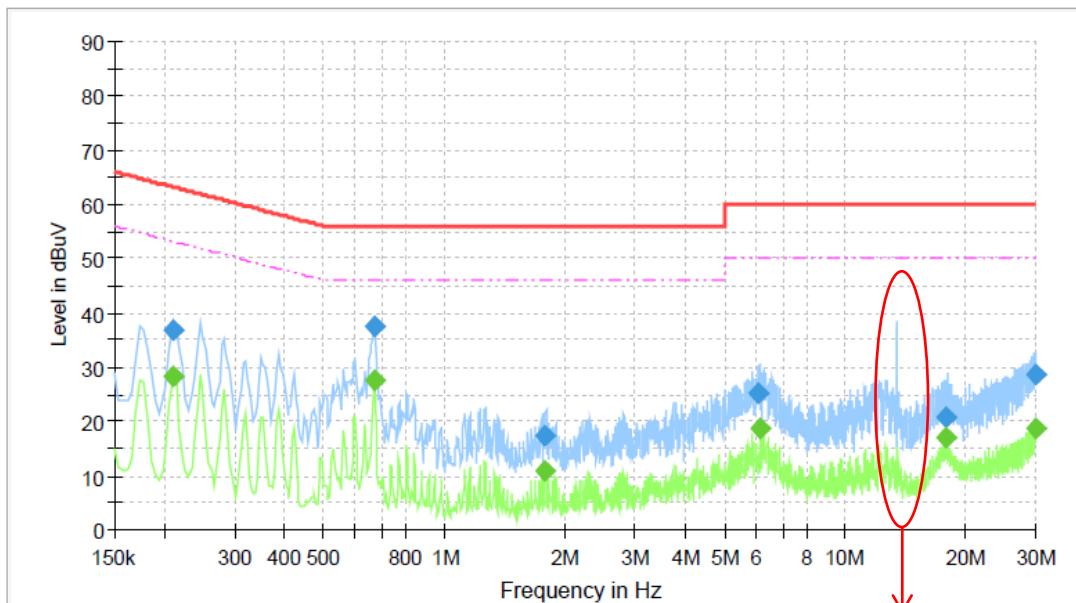

13.56 MHz Carrier Frequency

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.209	---	28.37	53.23	24.85	9.0	L1	9.92
0.209	36.95	---	63.23	26.28	9.0	L1	9.92
0.669	---	27.71	46.00	18.29	9.0	L1	9.95
0.669	37.63	---	56.00	18.37	9.0	L1	9.95
1.790	17.55	---	56.00	38.45	9.0	L1	10.01
1.790	---	10.87	46.00	35.13	9.0	L1	10.01
6.100	25.32	---	60.00	34.68	9.0	L1	10.12
6.140	---	18.90	50.00	31.10	9.0	L1	10.12
17.925	---	16.95	50.00	33.05	9.0	L1	10.59
17.972	20.93	---	60.00	39.07	9.0	L1	10.59
29.932	28.56	---	60.00	31.44	9.0	L1	10.77
29.980	---	18.65	50.00	31.35	9.0	L1	10.77


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

Tested Line : NEUTRAL LINE

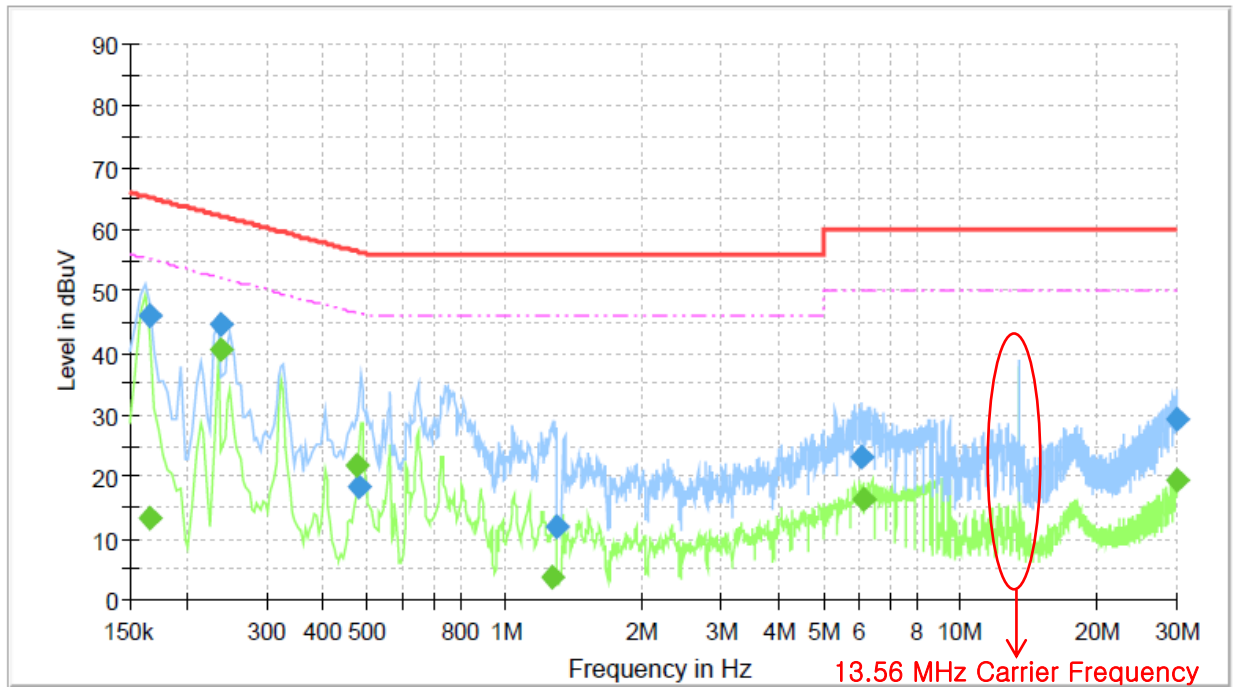

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.167	---	13.22	55.13	41.91	9.0	N	9.94
0.167	46.18	---	65.13	18.95	9.0	N	9.94
0.239	---	40.70	52.14	11.45	9.0	N	9.94
0.239	44.70	---	62.14	17.45	9.0	N	9.94
0.472	---	21.65	46.47	24.82	9.0	N	9.94
0.480	18.40	---	56.33	37.94	9.0	N	9.94
1.272	---	3.68	46.00	42.32	9.0	N	10.00
1.300	11.90	---	56.00	44.10	9.0	N	10.00
6.072	23.29	---	60.00	36.71	9.0	N	10.16
6.152	---	16.33	50.00	33.67	9.0	N	10.16
29.919	29.24	---	60.00	30.76	9.0	N	10.84
29.971	---	19.45	50.00	30.55	9.0	N	10.84

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

5.1.2 Test data for RF Card Reader

Humidity Level : 48 % R.H.

Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)


Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Tested Line : HOT LINE

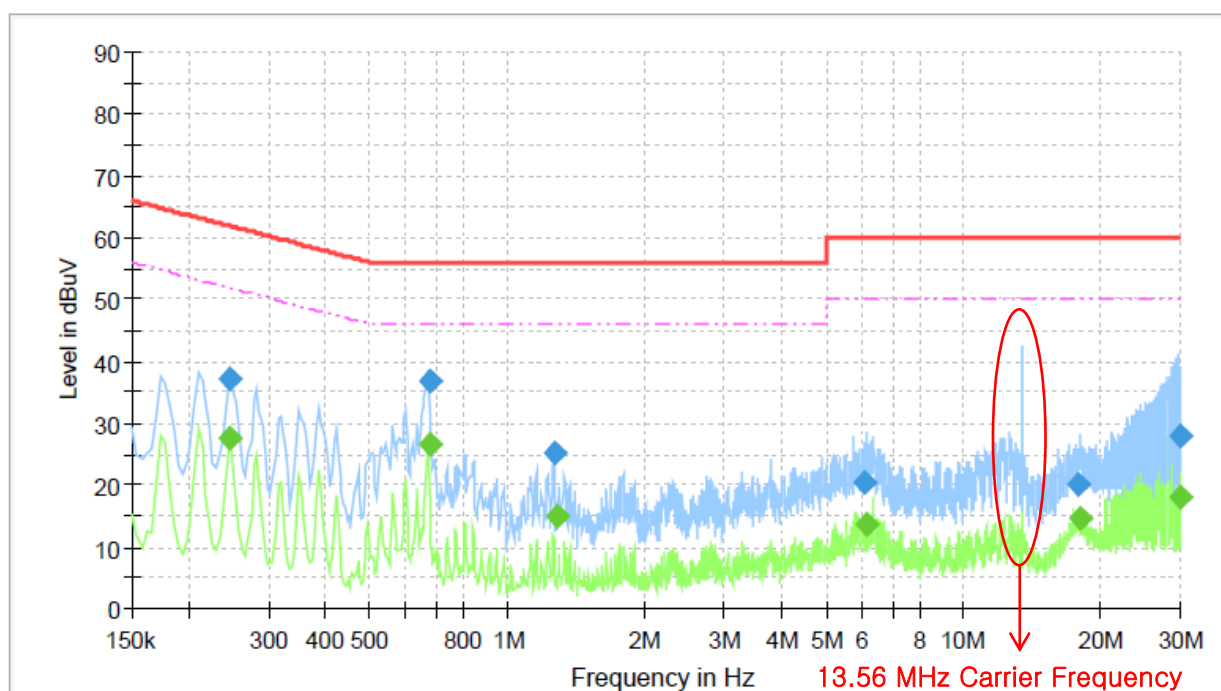

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.245	---	27.59	51.92	24.33	9.0	L1	9.93
0.245	37.12	---	61.92	24.80	9.0	L1	9.93
0.679	---	26.68	46.00	19.32	9.0	L1	9.95
0.679	36.75	---	56.00	19.25	9.0	L1	9.95
1.273	25.06	---	56.00	30.94	9.0	L1	9.98
1.285	---	14.95	46.00	31.05	9.0	L1	9.98
6.083	20.45	---	60.00	39.55	9.0	L1	10.12
6.155	---	13.68	50.00	36.32	9.0	L1	10.12
17.978	20.00	---	60.00	40.00	9.0	L1	10.59
18.065	---	14.55	50.00	35.45	9.0	L1	10.59
29.908	27.81	---	60.00	32.19	9.0	L1	10.77
29.997	---	18.07	50.00	31.93	9.0	L1	10.77


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

Tested Line : NEUTRAL LINE

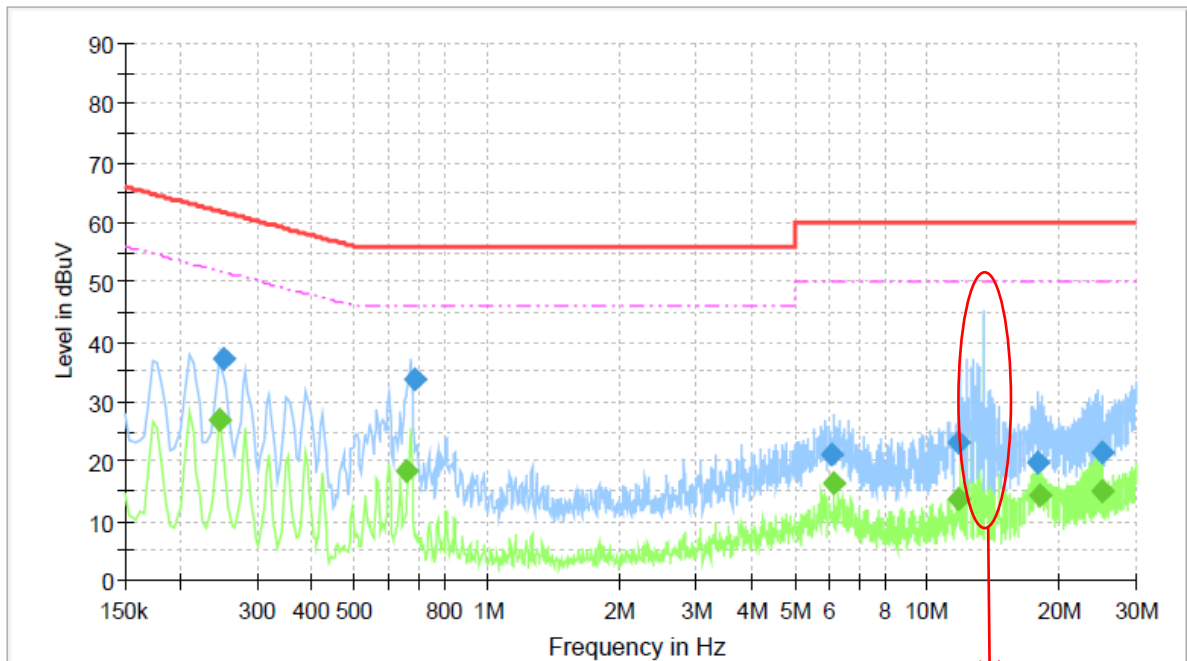

13.56 MHz Carrier Frequency

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.245	---	26.91	51.92	25.01	9.0	L1	9.93
0.251	37.21	---	61.73	24.51	9.0	L1	9.93
0.657	---	18.40	46.00	27.60	9.0	L1	9.95
0.683	33.76	---	56.00	22.24	9.0	L1	9.95
6.092	20.99	---	60.00	39.01	9.0	L1	10.12
6.151	---	16.38	50.00	33.62	9.0	L1	10.12
11.759	23.19	---	60.00	36.81	9.0	L1	10.40
11.787	---	13.59	50.00	36.41	9.0	L1	10.40
17.972	19.73	---	60.00	40.27	9.0	L1	10.59
18.088	---	14.25	50.00	35.75	9.0	L1	10.59
24.959	---	15.03	50.00	34.97	9.0	L1	10.70
25.035	21.55	---	60.00	38.45	9.0	L1	10.70

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

5.1.3 Test data for Intermodulation

Humidity Level : 48 % R.H.

Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)


Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Tested Line : HOT LINE

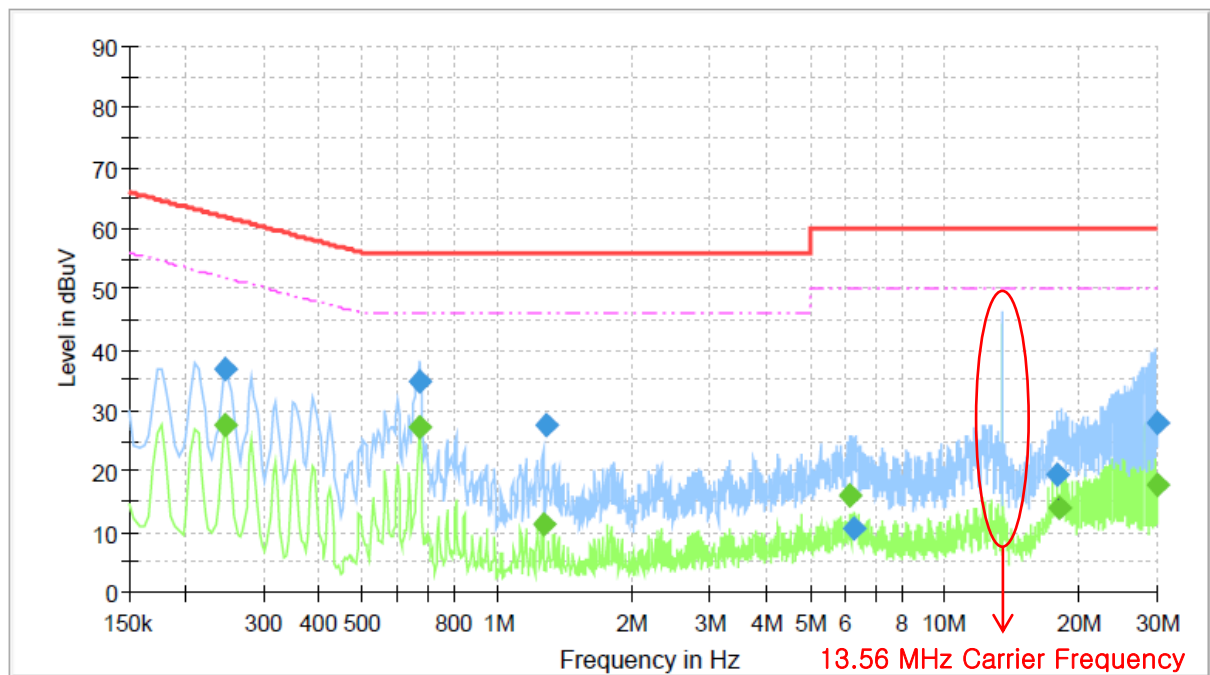

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.245	---	27.48	51.92	24.44	9.0	L1	9.93
0.245	36.82	---	61.92	25.10	9.0	L1	9.93
0.669	---	27.32	46.00	18.68	9.0	L1	9.95
0.669	34.81	---	56.00	21.19	9.0	L1	9.95
1.265	---	11.13	46.00	34.87	9.0	L1	9.98
1.291	27.72	---	56.00	28.28	9.0	L1	9.98
6.129	---	15.86	50.00	34.14	9.0	L1	10.12
6.285	10.61	---	60.00	49.39	9.0	L1	10.13
17.949	19.39	---	60.00	40.61	9.0	L1	10.59
18.169	---	14.02	50.00	35.98	9.0	L1	10.60
29.956	---	17.63	50.00	32.37	9.0	L1	10.77
29.992	27.90	---	60.00	32.10	9.0	L1	10.77

Tested Line : NEUTRAL LINE

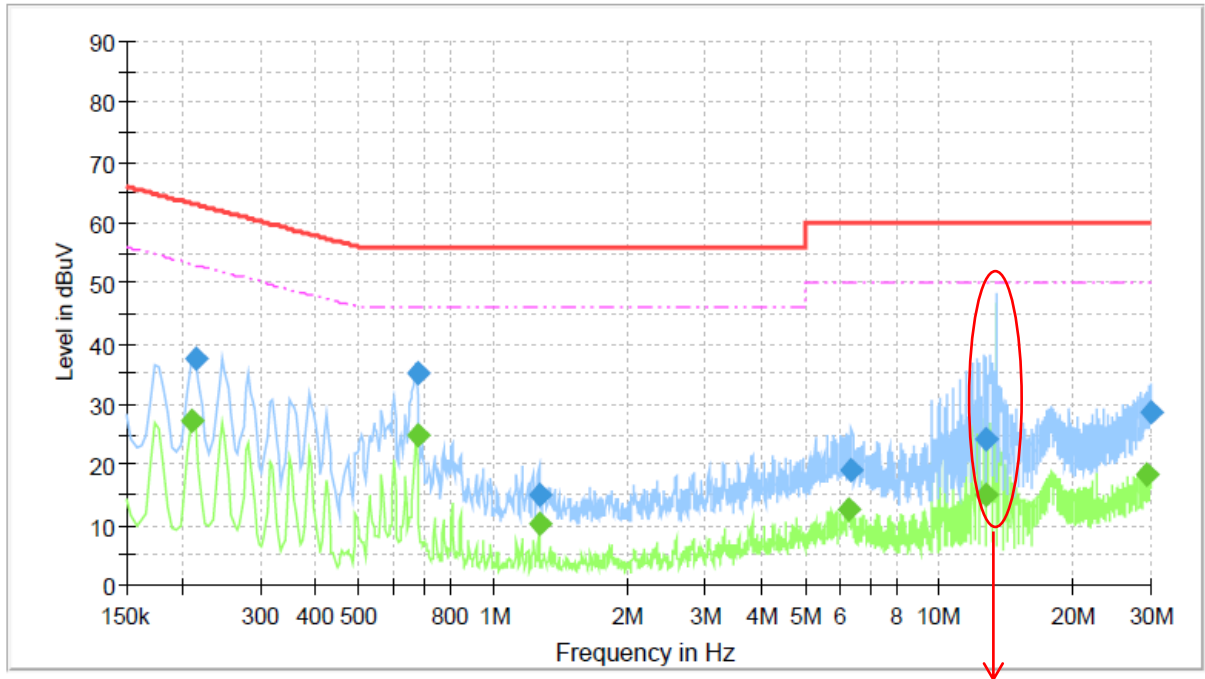

13.56 MHz Carrier Frequency

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.209	---	27.13	53.23	26.09	9.0	N	9.94
0.215	37.44	---	63.03	25.59	9.0	N	9.94
0.681	---	24.97	46.00	21.03	9.0	N	9.96
0.681	35.26	---	56.00	20.74	9.0	N	9.96
1.265	---	10.08	46.00	35.92	9.0	N	10.00
1.265	14.99	---	56.00	41.01	9.0	N	10.00
6.258	---	12.63	50.00	37.37	9.0	N	10.17
6.334	19.05	---	60.00	40.95	9.0	N	10.17
12.710	24.29	---	60.00	35.71	9.0	N	10.53
12.741	---	14.93	50.00	35.07	9.0	N	10.54
29.460	---	18.26	50.00	31.74	9.0	N	10.84
29.946	28.64	---	60.00	31.36	9.0	N	10.84

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

5.2 RADIATED EMISSION TEST

5.2.1 Test data for RF Tag Reader

5.2.1.1 Operation frequency band: (13.553 ~ 13.567) MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 48 % R.H. Temperature: 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.225
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED

EUT : ID CARD PRINTER Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)
13.561 50	40.62	H	19.30	0.30	60.22	124.00	63.78
13.561 50	40.13	V	19.30	0.30	59.73	124.00	64.27

Remark. The EUT was tested at 3 m, so conversation factor was included at above limit.

5.2.1.2 Operation frequency band: Below 13.553 MHz and above 13.567 MHz


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 48 % R.H. Temperature: 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.225
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

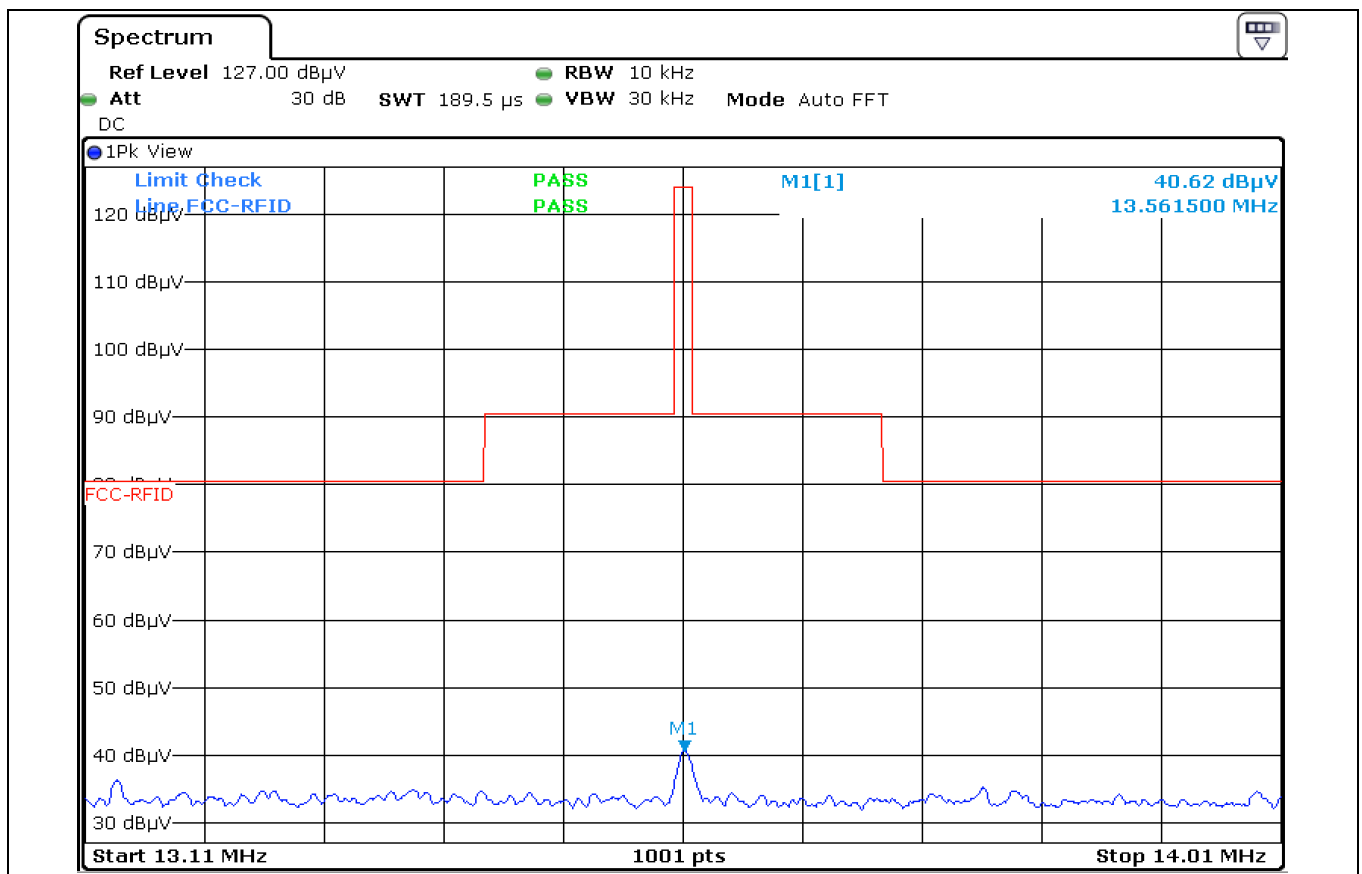

cc. to above test data, the field strength level of 13.561 5 MHz is 40.62 dBuV/m and the worst limit subject to 15.225 (b) and (c) is 60.22 dBuV/m, so the EUT meets the requirement.

5.2.2 Test data for RF Card Reader

5.2.2.1 Operation frequency band: (13.553 ~ 13.567) MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 48 % R.H. Temperature: 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.225
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED

EUT : ID CARD PRINTER Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)
13.559 30	47.41	H	19.30	0.30	67.01	124.00	56.99
13.559 30	47.21	V	19.30	0.30	66.81	124.00	57.19

Remark. The EUT was tested at 3 m, so conversation factor was included at above limit.

5.2.2.2 Operation frequency band: Below 13.553 MHz and above 13.567 MHz


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>48 % R.H.</u>	Temperature: <u>24 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.225</u>	
Type of Test	: <u>Low Power Communication Device Transmitter</u>	
Result	: <u>PASSED</u>	

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

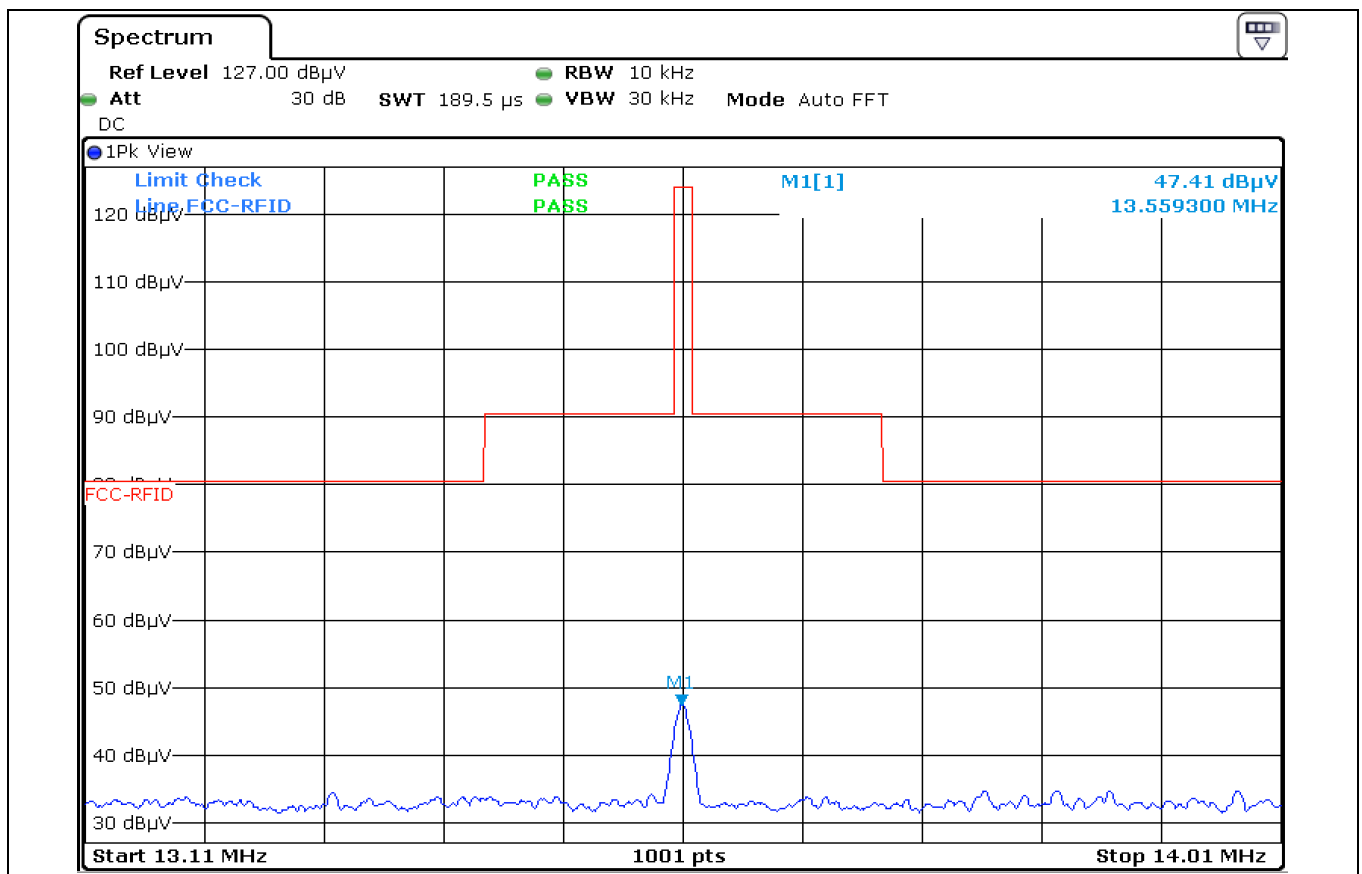

cc. to above test data, the field strength level of 13.559 3 MHz is 47.41 dBuV/m and the worst limit subject to 15.225 (b) and (c) is 67.01 dBuV/m, so the EUT meets the requirement.

5.3 SPURIOUS EMISSION TEST

5.3.1 Test data for RF Tag Reader

5.3.1.1 Spurious Radiated Emission Below 30 MHz

Humidity Level : 48 % R.H. Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Communication Device Transmitter

Frequency Range : 9 kHz ~ 30 MHz

Result : PASSED


EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)
0.051	41.52	H	18.9	0.10	60.52	113.45	52.93
0.156	32.54	H	18.9	0.10	51.54	103.74	52.20
23.73	9.94	H	20.1	0.50	30.54	69.54	39.00

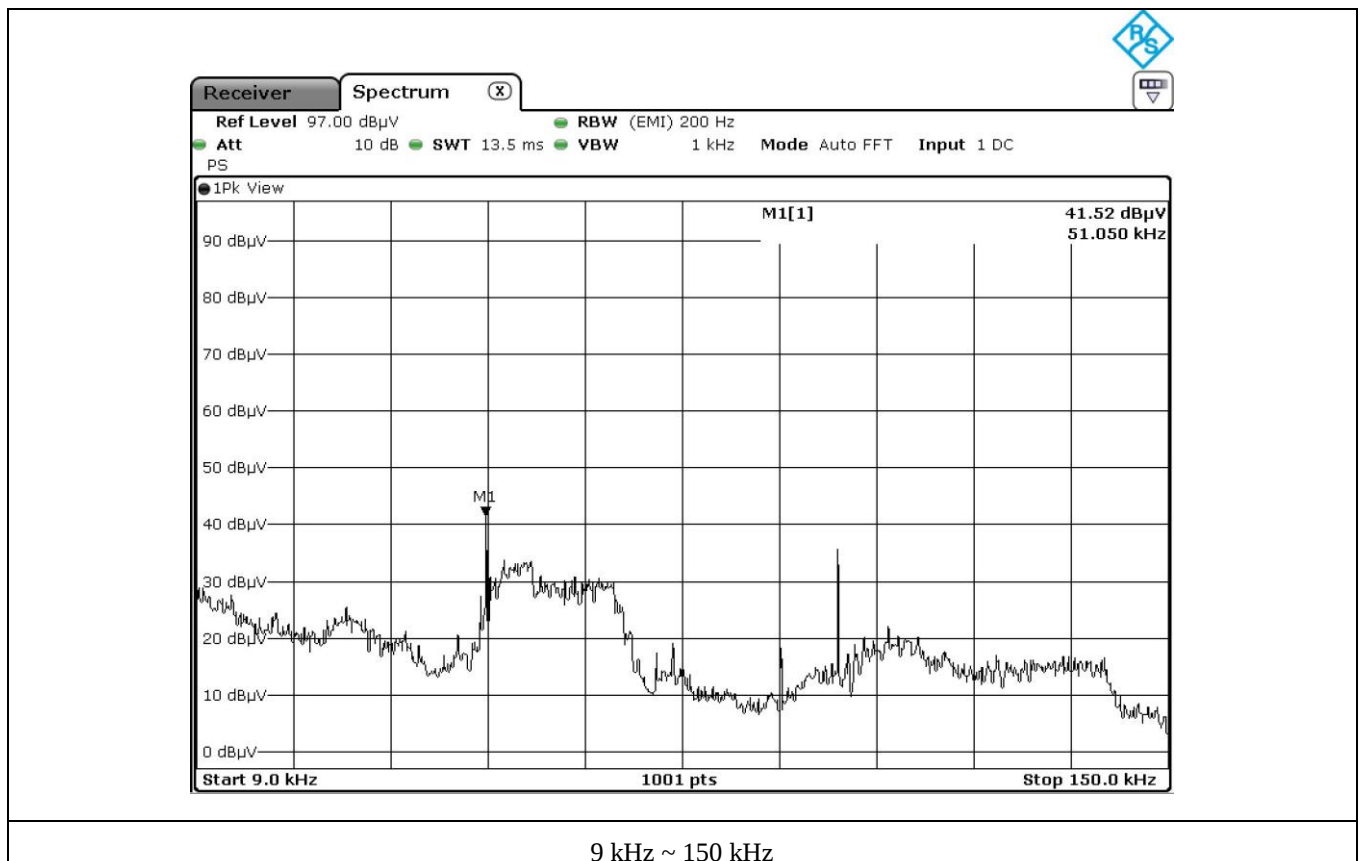


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

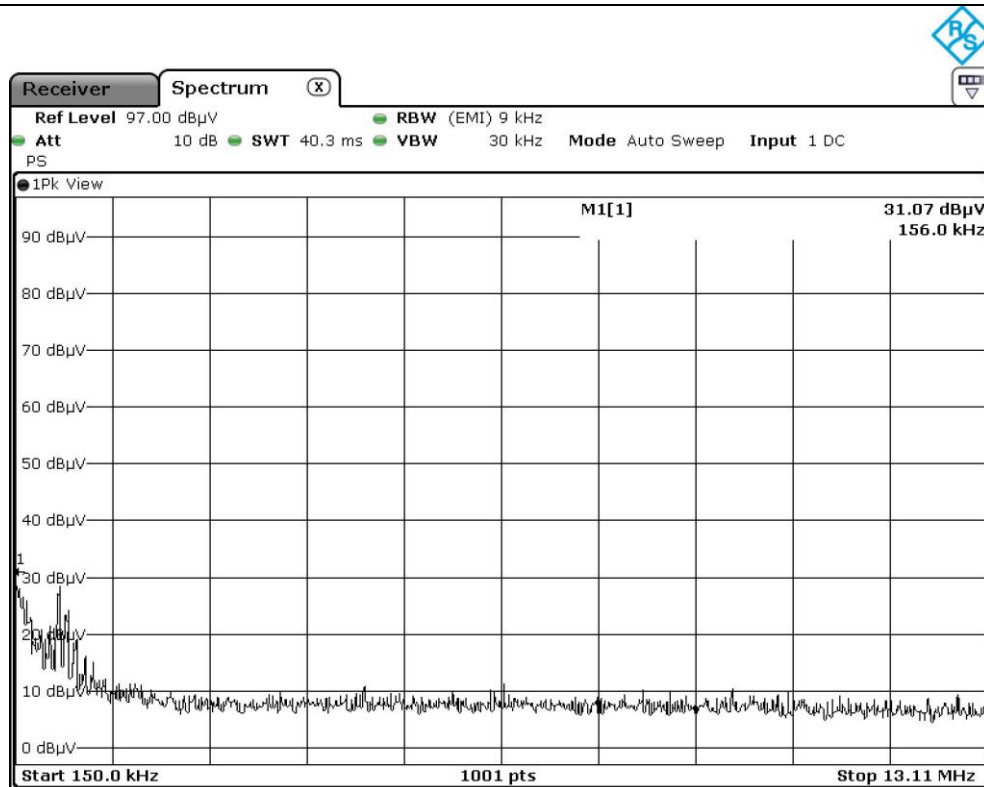

150 kHz ~ 13.11 MHz

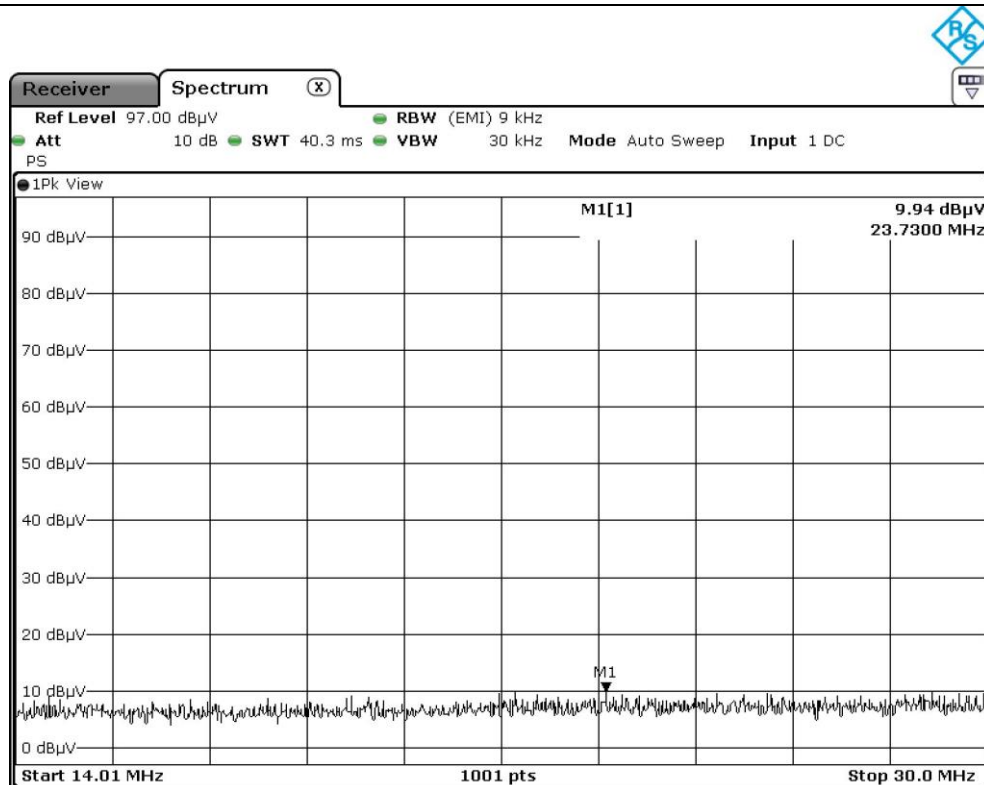

14.01 MHz ~ 30.00 MHz

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

5.3.1.2 Spurious Radiated Emission below 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.


Humidity Level : 48 % R.H. Temperature: 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209
 Type of Test : Low Power Communication Device Transmitter
 Frequency range : 30 MHz ~ 960 MHz
 Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Distance : 3 m

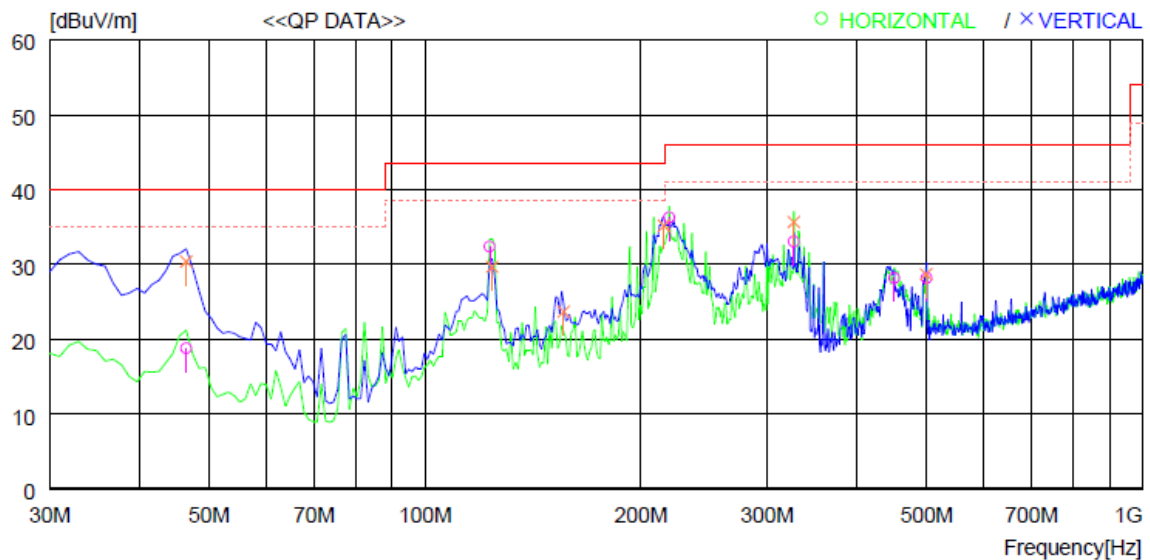

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	46.490	36.0	14.6	1.3	33.1	18.8	40.0	21.2	300	0
2	123.120	44.6	18.7	2.1	33.0	32.4	43.5	11.1	300	0
3	219.150	50.9	15.6	2.8	33.0	36.3	46.0	9.7	100	0
4	326.820	43.0	19.6	3.5	33.0	33.1	46.0	12.9	100	63
5	450.981	34.4	22.8	4.2	33.2	28.2	46.0	17.8	300	236
6	500.451	33.5	23.2	4.5	33.0	28.2	46.0	17.8	100	0
----- Vertical -----										
7	46.490	47.6	14.6	1.3	33.1	30.4	40.0	9.6	100	203
8	124.090	41.8	18.8	2.1	33.0	29.7	43.5	13.8	100	359
9	156.100	36.0	18.3	2.4	33.0	23.7	43.5	19.8	100	194
10	215.270	49.8	15.6	2.8	33.0	35.2	43.5	8.3	100	162
11	326.820	45.6	19.6	3.5	33.0	35.7	46.0	10.3	200	0
12	499.481	34.0	23.2	4.5	33.0	28.7	46.0	17.3	100	359

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

5.3.2 Test data for RF Card Reader

5.3.2.1 Spurious Radiated Emission Below 30 MHz

Humidity Level : 48 % R.H. Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Communication Device Transmitter

Frequency Range : 9 kHz ~ 30 MHz

Result : PASSED


EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)
0.051	41.38	H	18.9	0.10	60.38	113.45	53.07
0.156	32.54	H	18.9	0.10	51.54	103.74	52.20
20.80	10.64	H	19.7	0.50	30.84	69.54	38.70

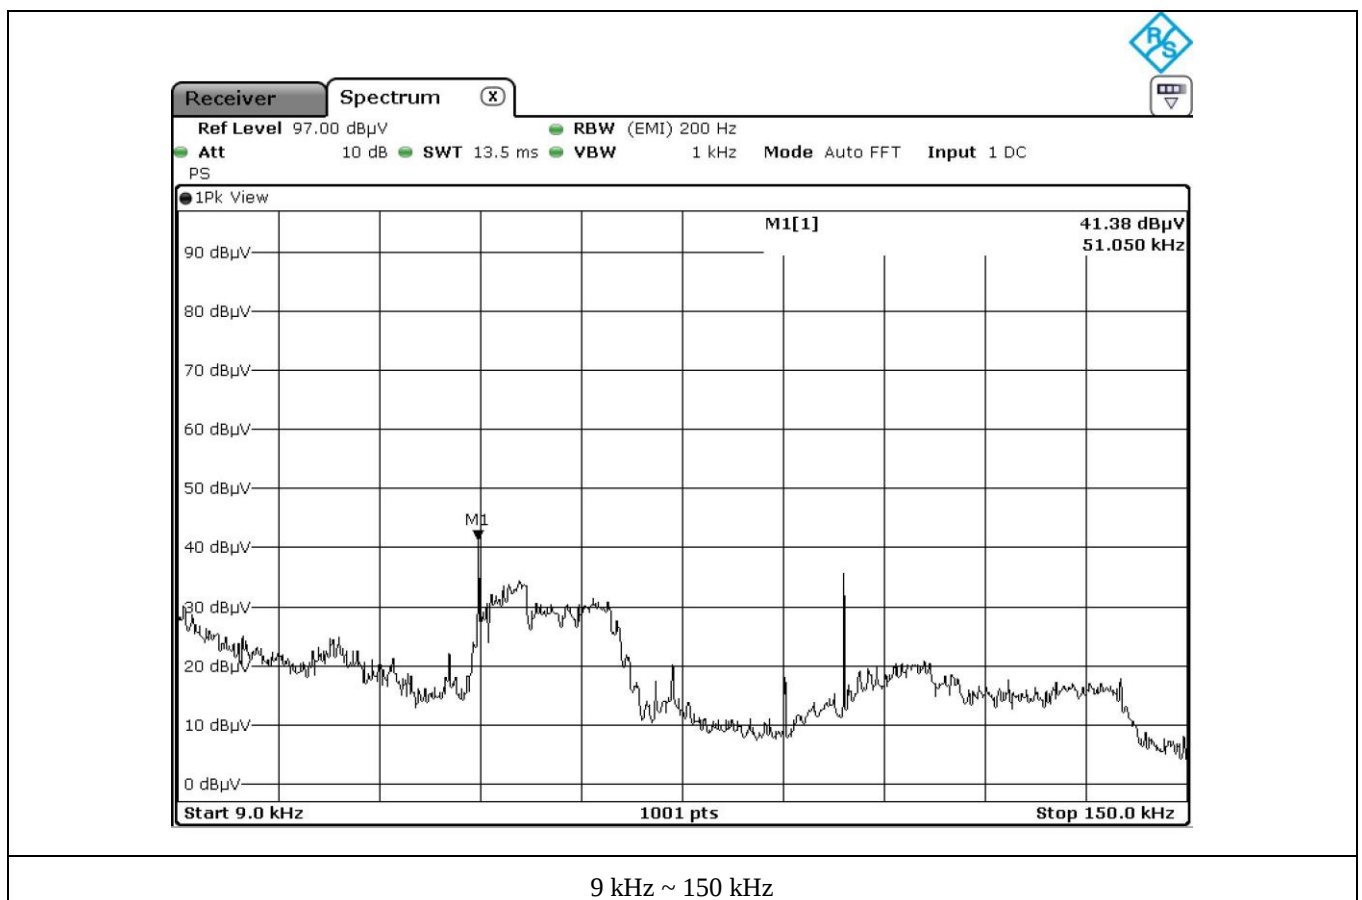


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

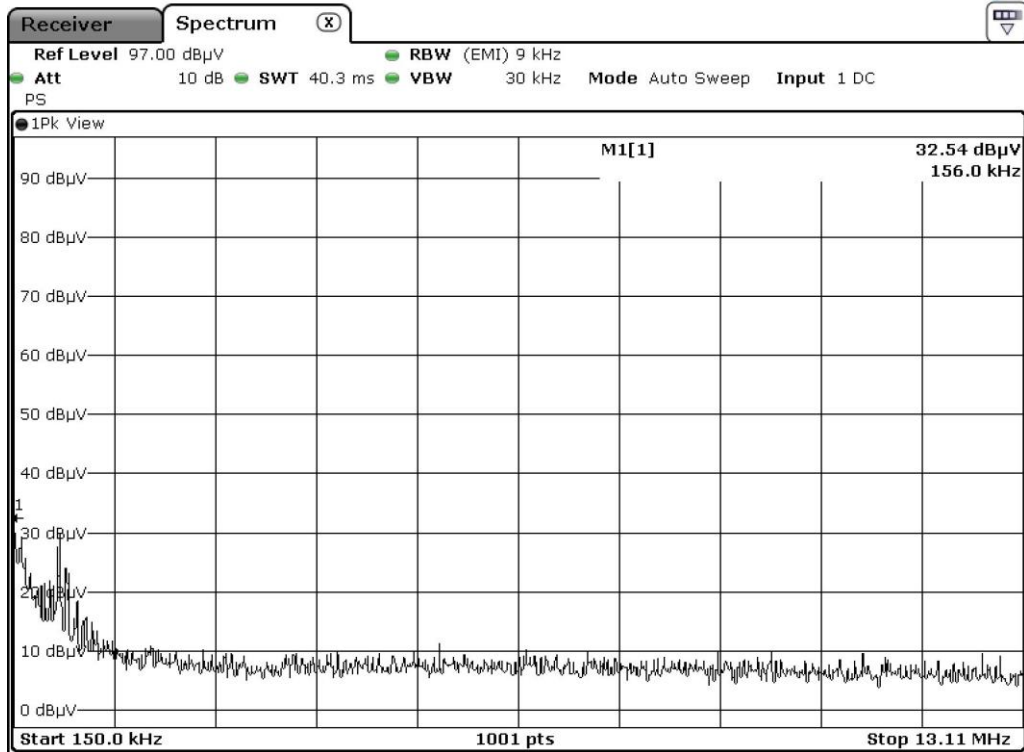

150 kHz ~ 13.11 MHz

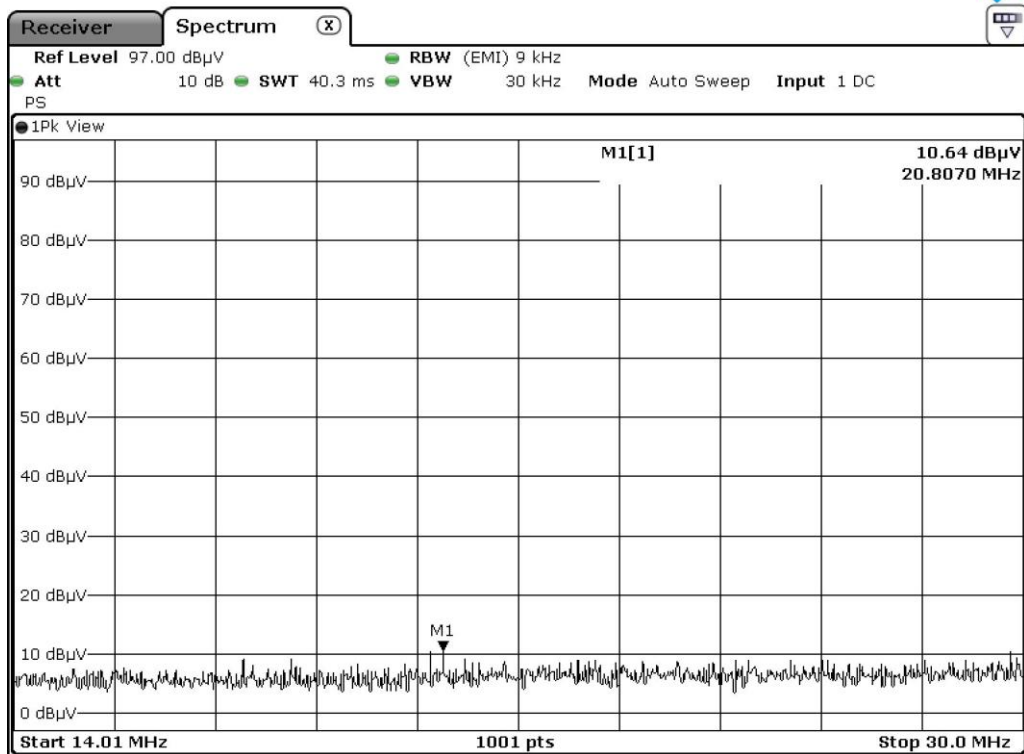

14.01 MHz ~ 30.00 MHz

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

5.3.2.2 Spurious Radiated Emission below 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.


Humidity Level : 48 % R.H. Temperature: 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209
 Type of Test : Low Power Communication Device Transmitter
 Frequency range : 30 MHz ~ 960 MHz
 Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Distance : 3 m

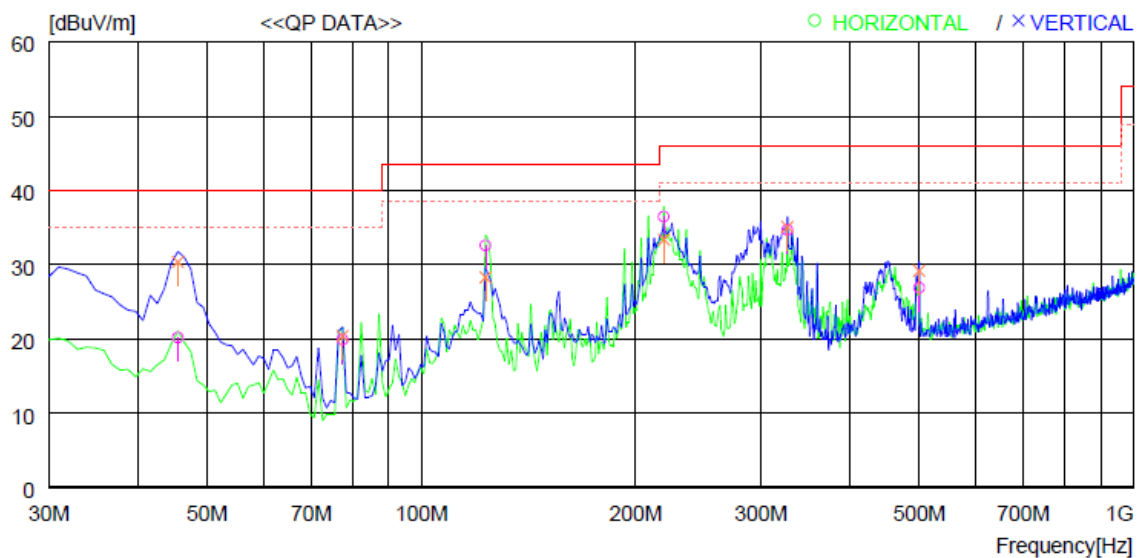

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	45.520	37.0	15.0	1.3	33.1	20.2	40.0	19.8	300	0
2	77.530	38.5	12.8	1.7	33.1	19.9	40.0	20.1	300	0
3	123.120	44.8	18.7	2.1	33.0	32.6	43.5	10.9	200	359
4	219.150	51.1	15.6	2.8	33.0	36.5	46.0	9.5	100	61
5	326.820	44.6	19.6	3.5	33.0	34.7	46.0	11.3	100	159
6	500.451	32.2	23.2	4.5	33.0	26.9	46.0	19.1	100	0
----- Vertical -----										
7	45.520	47.2	15.0	1.3	33.1	30.4	40.0	9.6	200	13
8	77.530	39.0	12.8	1.7	33.1	20.4	40.0	19.6	100	359
9	123.120	40.5	18.7	2.1	33.0	28.3	43.5	15.2	100	359
10	219.150	48.0	15.6	2.8	33.0	33.4	46.0	12.6	200	176
11	326.820	45.0	19.6	3.5	33.0	35.1	46.0	10.9	200	0
12	500.451	34.5	23.2	4.5	33.0	29.2	46.0	16.8	100	359

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

5.3.3 Test data for Intermodulation

5.3.3.1 Spurious Radiated Emission Below 30 MHz

Humidity Level : 48 % R.H. Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Communication Device Transmitter

Frequency Range : 9 kHz ~ 30 MHz

Result : PASSED


EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)
0.051	41.92	H	18.9	0.10	60.92	113.45	52.53
0.156	30.83	H	18.9	0.10	49.83	103.74	53.91
24.56	9.88	H	20.1	0.50	30.48	69.54	39.06

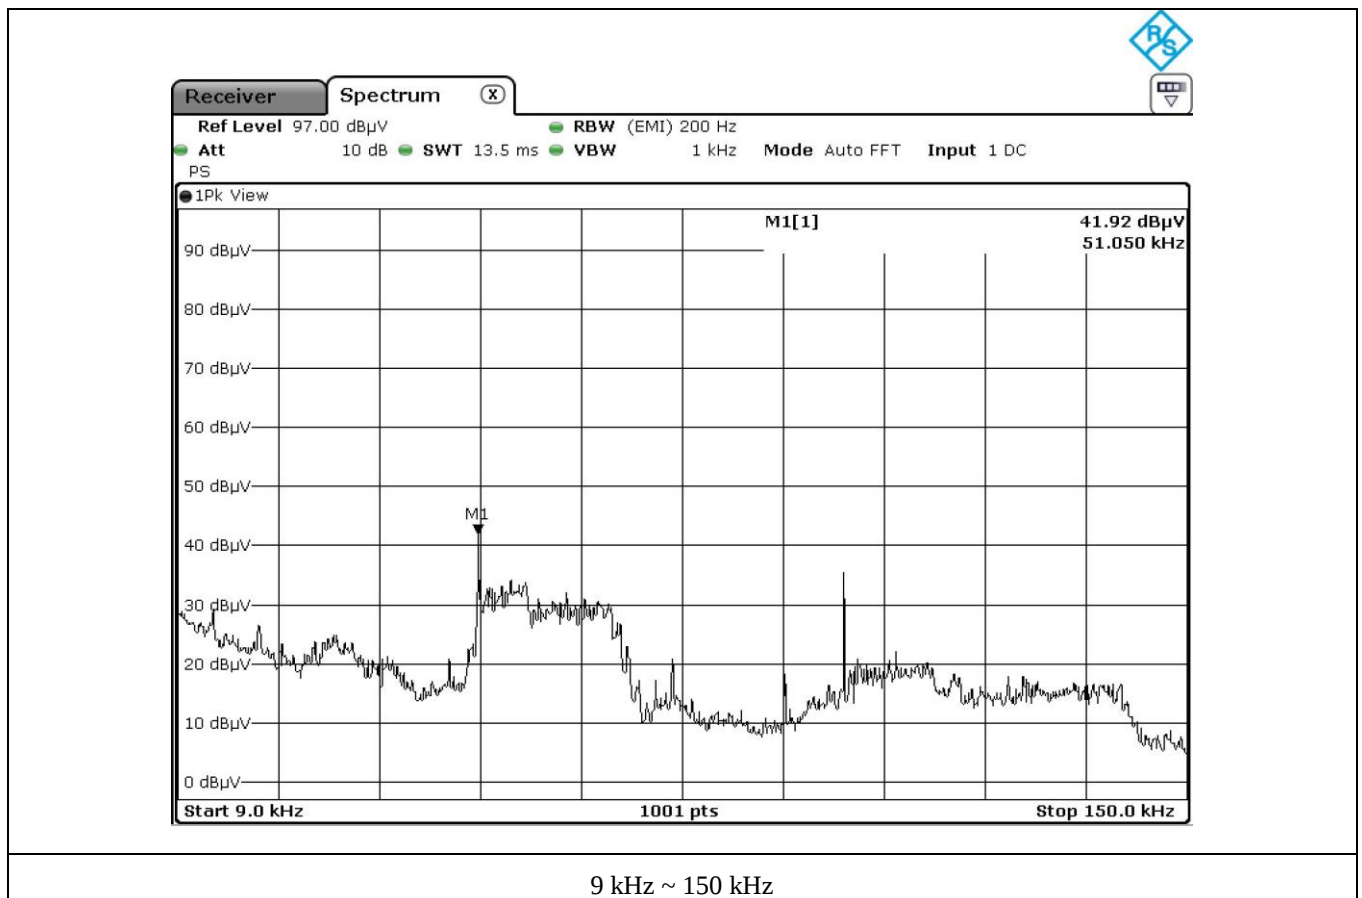


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

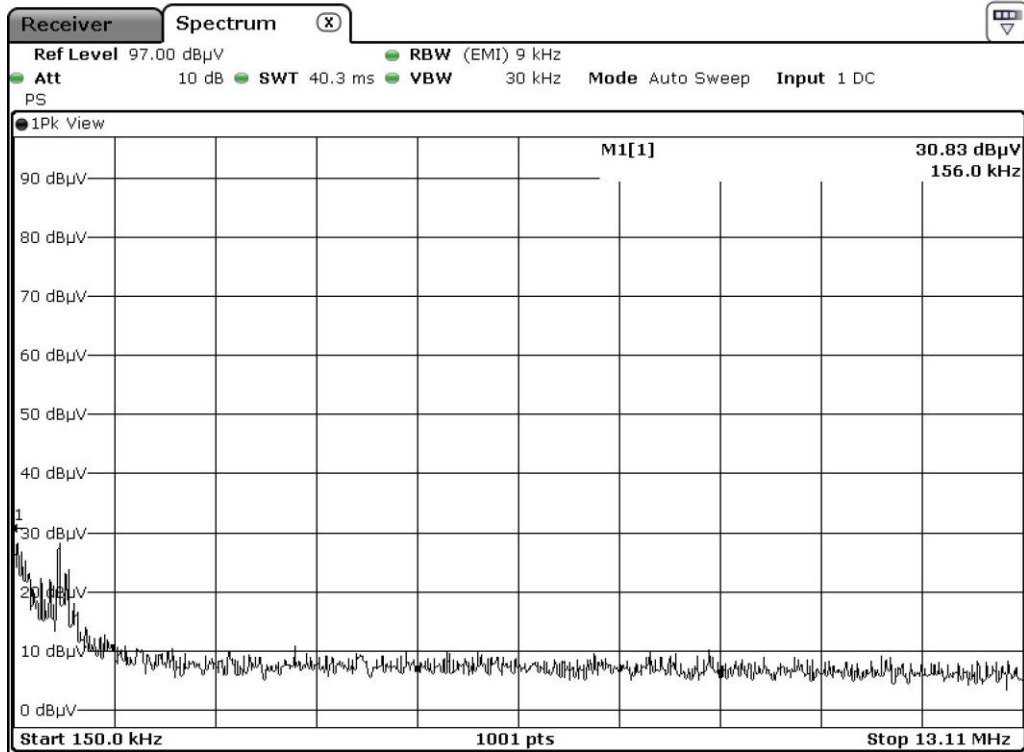

150 kHz ~ 13.11 MHz

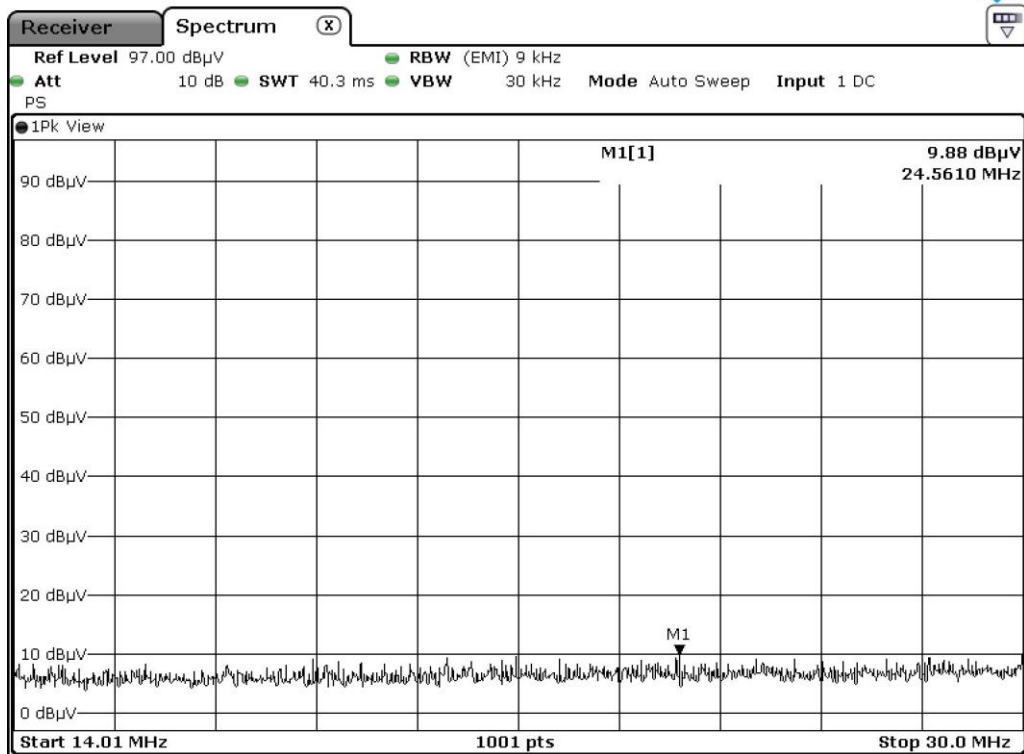

14.01 MHz ~ 30.00 MHz

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

5.3.3.2 Spurious Radiated Emission below 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 48 % R.H. Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Communication Device Transmitter

Frequency range : 30 MHz ~ 960 MHz


Result : PASSED

EUT : ID CARD PRINTER

Date: August 09, 2021 ~ August 13, 2021

Operating Condition : Transmitting Mode

Distance : 3 m

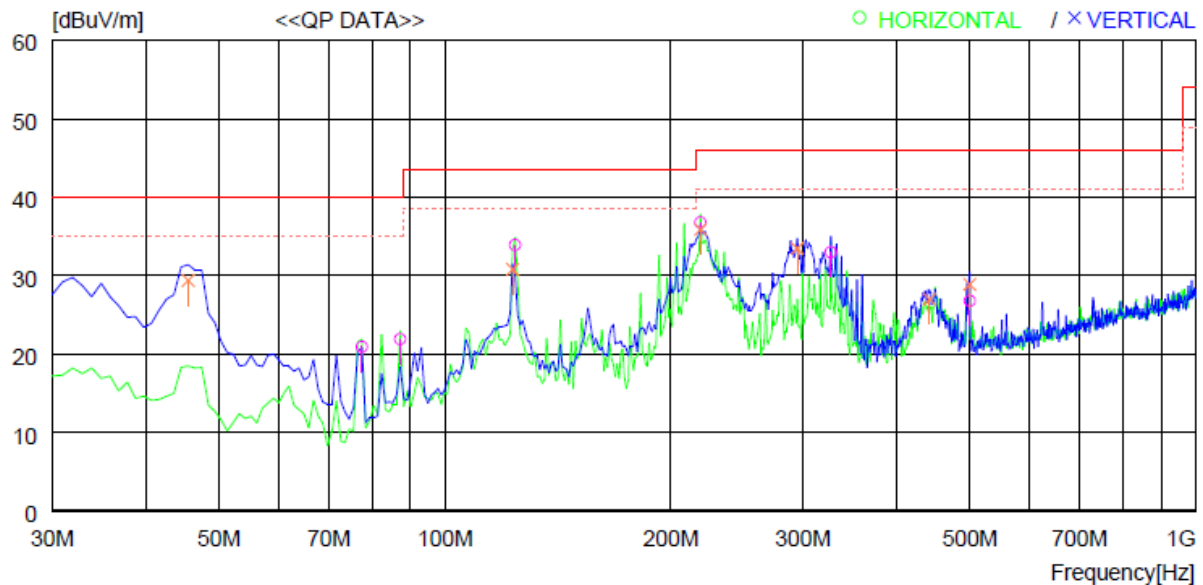

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	77.530	39.5	12.8	1.7	33.1	20.9	40.0	19.1	400	128
2	87.230	40.0	13.2	1.8	33.1	21.9	40.0	18.1	200	359
3	124.090	46.0	18.8	2.1	33.0	33.9	43.5	9.6	200	321
4	219.150	51.4	15.6	2.8	33.0	36.8	46.0	9.2	100	98
5	326.820	42.9	19.6	3.5	33.0	33.0	46.0	13.0	100	0
6	500.451	32.1	23.2	4.5	33.0	26.8	46.0	19.2	100	105
----- Vertical -----										
7	45.520	46.2	15.0	1.3	33.1	29.4	40.0	10.6	100	359
8	123.120	43.0	18.7	2.1	33.0	30.8	43.5	12.7	100	359
9	219.150	50.5	15.6	2.8	33.0	35.9	46.0	10.1	100	359
10	294.810	44.1	19.1	3.3	33.0	33.5	46.0	12.5	200	110
11	442.251	33.5	22.5	4.1	33.1	27.0	46.0	19.0	200	246
12	500.451	34.2	23.2	4.5	33.0	28.9	46.0	17.1	100	359

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

5.4 20 dB BANDWIDTH

5.4.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

5.4.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 % to 5 % of the OBW and video bandwidth (VBW) shall be approximately three times RBW. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.



5.4.3 Test date


August 09, 2021 ~ August 13, 2021

5.4.4 Test data

5.4.4.1 Test data for RF Tag Reader

-. Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.215


Operating Freq. (MHz)	Minimum Freq. (MHz)	Maximum Freq. (MHz)	20 dB Bandwidth (kHz)
13.561 500	13.549 110	13.573 790	24.68

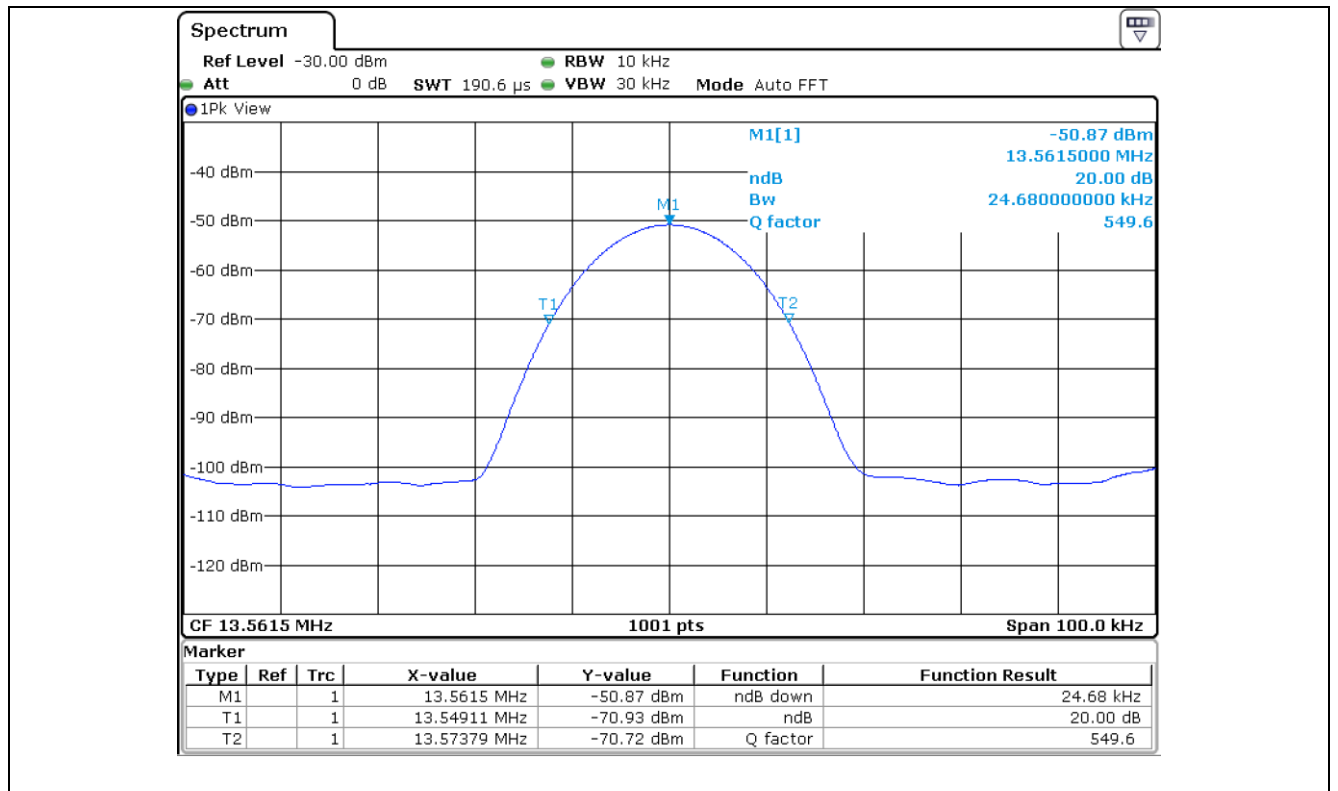

5.4.4.2 Test data for RF Card Reader

-. Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.215

Operating Freq. (MHz)	Minimum Freq. (MHz)	Maximum Freq. (MHz)	20 dB Bandwidth (kHz)
13.559 300	13.547 010	13.571 690	24.68

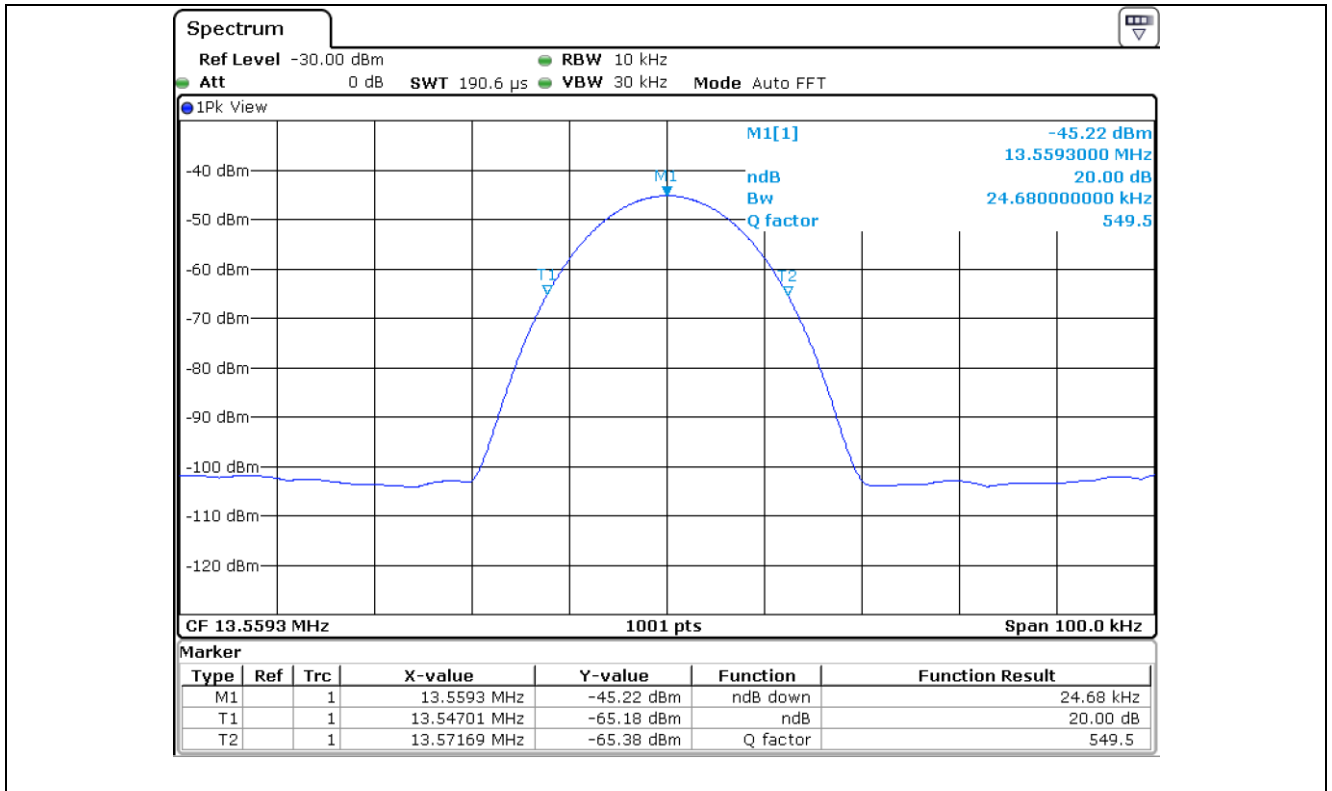

5.5 FREQUENCY STABILITY WITH TEMPERATURE VARIATION

5.5.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

5.5.2 Test set-up

Turn EUT off and set chamber temperature to -20 °C and then allow sufficient time (approximately 20 to 30 minutes after chamber reach the assigned temperature) for EUT to stabilize. Turn ON EUT and measure the EUT operating frequency and then turn off the EUT after the measurement. The temperature in the chamber was raised 10 °C step from -20 °C to +50°C. Repeat above method for frequency measurements every 10 °C step and then record all measured frequencies on each temperature step.

5.5.3 Test date

August 09, 2021 ~ August 13, 2021

5.5.4 Test data

5.5.4.1 Test data for RF Tag Reader

-. Result : PASSED

Temperature (°C)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Margin (Hz)	Limit (Hz)
-20	13 561 400	13 561 403	3	± 1 356.14
-10		13 561 406	6	
0		13 561 415	15	
10		13 561 407	7	
20		13 561 400	0	
30		13 561 398	-2	
40		13 561 396	-4	
50		13 561 393	-7	

5.5.4.2 Test data for RF Card Reader

-. Result : PASSED

Temperature (°C)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Margin (Hz)	Limit (Hz)
-20	13 559 300	13 559 378	78	± 1 355.93
-10		13 559 381	81	
0		13 559 392	92	
10		13 559 384	84	
20		13 559 371	71	
30		13 559 352	52	
40		13 559 340	40	
50		13 559 331	31	

5.6 FREQUENCY STABILITY WITH VOLTAGE VARIATION

5.6.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

5.6.2 Test set-up

An external DC power supply was connected to the input of the EUT. The voltage of EUT set to 115 % of the nominal value and then was reduced to 85 % of nominal voltage. The output frequency was recorded at each step.

5.6.3 Test date

August 09, 2021 ~ August 13, 2021

5.6.4 Test data

5.6.4.1 Test data for RF Tag Reader

-. Result : PASSED

Voltage (Vdc)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Margin (Hz)	Limit (Hz)
26.4 (115 %)	13 561 400	13 561 350	-50	± 1 356.14
24.0 (100 %)		13 561 353	-47	
21.6 (85 %)		13 561 356	-44	

5.6.4.2 Test data for RF Card Reader

-. Result : PASSED

Voltage (Vdc)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Margin (Hz)	Limit (Hz)
26.4 (115 %)	13 559 300	13 559 364	64	± 1 355.93
24.0 (100 %)		13 559 346	46	
21.6 (85 %)		13 559 359	59	

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses.

+	Meter reading	(dB μ V)
-	Amplifier Gain	(dB)
+	Cable Loss	(dB)
-	Antenna Factor	(dB/m)
=	Corrected Result	(dB μ V/m)
Margin (dB)		
	Specification Limit	(dB μ V/m)
-	Corrected Result	(dB μ V/m)
=	dB Relative to Spec	($\pm$ dB)

7. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 20, 2020 (1Y)
ESR3	Rohde & Schwarz	EMI Test Receiver	102602	Mar. 15, 2021 (1Y)
FSV30	Rohde & Schwarz	SIGNAL ANALYZER	101372	Jul. 14, 2021 (1Y)
310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 16, 2021 (1Y)
HLP-2008	TDK RF Solutions	Hybrid Antenna	131314	Feb. 27, 2020 (2Y)
NSLK8126	Schwarzbeck	LISN	8126479	Mar. 15, 2021 (1Y)
NSLK8126	Schwarzbeck	LISN	8126404	Mar. 15, 2021 (1Y)
ESH3Z2	Rohde & Schwarz	PULSE LIMITER	357.8810.52	Mar. 15, 2021 (1Y)
DT3000	Innco System	Turn Table	930611	N/A
MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4640/592/ 40700517/-	N/A
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
PSL-2KP	ESPEC	Environmental Test Chamber	14009407	Feb. 16, 2021 (1Y)
CO3000	Innco Systems GmbH	Controller	1026/40960617/P	N/A
DT2000-2t	Innco Systems GmbH	Turn Table	N/A	N/A
H-3005D	FinePower	DC Power Supply	FP09092008	Feb. 08, 2021 (1Y)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)