FCC Test Report

FCC ID	:	**XU8TEW814DAP**
Equipment	:	**AC1200 Dual Band Wireless Access Point**
Model No.	:	**TEW-814DAP**
Brand Name	:	**TRENDnet**
Applicant	:	**TRENDnet, Inc.**
Address	:	**20675 Manhattan Place, Torrance, CA 90501, USA**
Standard	:	**47 CFR FCC Part 15.407**
Received Date	:	**Jan. 16, 2014**
Tested Date	:	**May 16 ~ Jun. 25, 2014**

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Testing Laboratory
2732

Table of Contents

1 GENERAL DESCRIPTION 5

1.1 Information 5
1.2 Local Support Equipment List 7
1.3 Test Setup Chart 7
1.4 The Equipment List 8
1.5 Testing Applied Standards 9
1.6 Measurement Uncertainty 9

2 TEST CONFIGURATION 10

2.1 Testing Condition 10
2.2 The Worst Test Modes and Channel Details 10

3 TRANSMITTER TEST RESULTS 11

3.1 Conducted Emissions 11
3.2 Emission Bandwidth 14
3.3 RF Output Power 16
3.4 Peak Power Spectral Density 18
3.5 Peak Excursion 20
3.6 Transmitter Radiated and Band Edge Emissions 23
3.7 Frequency Stability 46

4 TEST LABORATORY INFORMATION 48

Release Record

Report No.	Version	Description	Issued Date
FR411604AN	Rev. 01	Initial issue	Aug. 13, 2014

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.186MHz 39.70 (Margin -14.52dB) - AV	Pass
15.407(b)(1)(2)(3) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5150.00MHz 52.85 (Margin -1.15dB) - AV	Pass
15.407(a)(1)(2)(3)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(1)(2)(3)	RF Output Power	Power [dBm]: 11a: 16.40 HT20: 16.44 HT40: 16.46 VHT20: 16.56 VHT40: 16.56 VHT80: 16.83	Pass
15.407(a)(1)(2)(3)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(a)(6)	Peak Excursion	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
IEEE Std. 802.11	Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N_{TX})	Data Rate / MCS
a	5150-5250	5180-5240	36-48 [4]	2	6-54 Mbps
n (HT20)	5150-5250	5180-5240	36-48 [4]	2	MCS 0-15
n (HT40)	5150-5250	5190-5230	38-46 [2]	2	MCS 0-15
ac (VHT20)	5150-5250	5180-5240	36-48 [4]	2	MCS 0-8
ac (VHT40)	5150-5250	5190-5230	38-46 [2]	2	MCS 0-9
ac (VHT80)	5150-5250	5210	42 [1]	2	MCS 0-9
Note 1: RF output power specifies that Maximum Conducted Output Power. Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.					

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	PCB	2	UFL	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter

1.1.4 Accessories

Accessories		
No.	**Equipment**	**Description**
1	AC Adapter	Brand Name: AMIGO Model Name: AMS9-1201000FU2 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 1.0A Power Line: 1.2m non-shielded cable w/o core
2	AC Adapter	Brand Name: FRECOM Model Name: F12W-120100SPAU Power Rating: I/P: 100-240Vac, 50-60Hz, 0.3A O/P: 12Vdc, 1.0A Power Line: 1.2m non-shielded cable w/o core

1.1.5 Channel List

802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	**Frequency(MHz)**	**Channel**	**Frequency(MHz)**
36	5180	38	5190
40	5200	46	5230
44	5220	**VHT80**	
48	5240	42	5210

1.1.6 Test Tool and Duty Cycle

Test Tool	RTL819x2.3, V. 2013/2/21		
Duty Cycle and Duty Factor	**Mode**	**Duty cycle (%)**	**Duty factor (dB)**
	11a	91.16%	0.40
	VHT20	93.85%	0.28
	VHT40	85.90%	0.66
	VHT80	67.80%	1.69

1.1.7 Power Setting

For Frequency band 5150-5250 MHz		
Modulation Mode	**Test Frequency (MHz)**	**Power Set**
11a	5180	46/43
11a	5200	45/42
11a	5240	44/41
HT20	5180	47/44
HT20	5200	45/42
HT20	5240	45/42
HT40	5190	46/43
HT40	5230	46/42
VHT20	5180	47/44
VHT20	5200	45/42
VHT20	5240	45/42
VHT40	5190	46/43
VHT40	5230	46/42
VHT80	5210	45/42

1.2 Local Support Equipment List

Support Equipment List						
No.	**Equipment**	**Brand**	**Model**	**S/N**	**FCC ID**	**Signal cable / Length (m)**
1	Notebook	lenovo	ThinkPad	---	DoC	RJ45, 10m non-shielded w/o core.

Note: Support unit was supplied by applicant.

1.3 Test Setup Chart

Test Setup Diagram

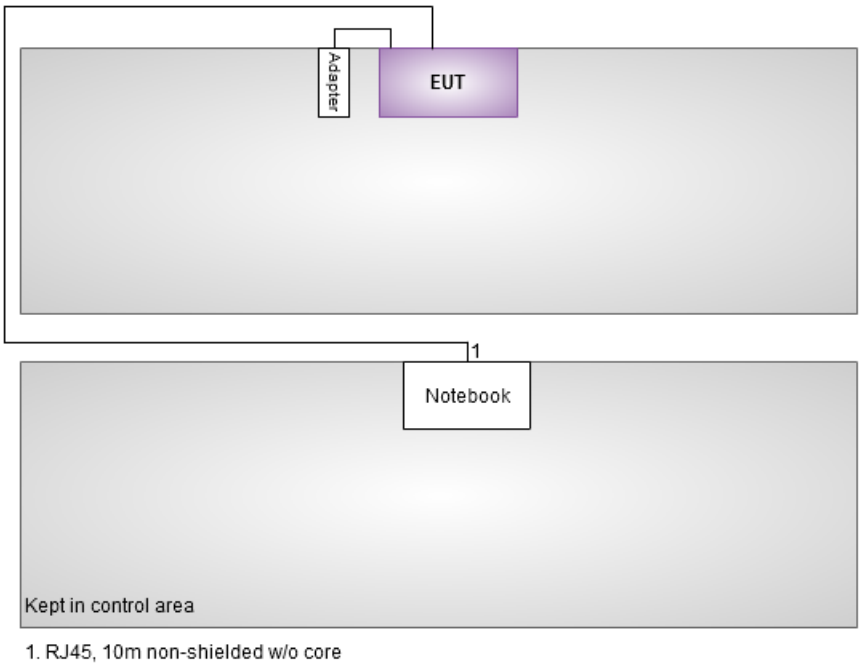

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Spectrum Analyzer	Agilent	N9010A	MY52221474	Sep. 26, 2013	Sep. 25, 2014
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Note: Calibration Interval of instruments listed above is two year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101486	Nov. 13, 2013	Nov. 12, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407
ANSI C63.10-2009
FCC KDB 412172
FCC KDB 789033 D01 General UNII Test Procedures Old Rules v01r04
FCC KDB 644545 D01 Guidance for IEEE 802 11ac v01r02
FCC KDB 644545 D02 Alternative Guidance for 802 11ac v01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	**Uncertainty**
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Frequency error	±34.134 Hz
Temperature	±0.6 ^{o}C
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.26 dB
Radiated emission > 1GHz	±4.94 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	25°C / 66%	Skys Huang
Radiated Emissions	03CH02-WS	20-23°C / 64-65%	Haru Yang Anderson Hung
RF Conducted	TH01-WS	21°C / 65%	Mark Liao

- FCC site registration No.: 657002
- IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT80	5210	MCS 0	---
Radiated Emissions ≤1GHz	VHT80	5210	MCS 0	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	
	HT40	5190 / 5230	MCS 0	
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Radiated Emissions >1GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	---
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Peak Excursion	11a	5180	6 Mbps	---
	VHT20	5180	MCS 0	
	VHT40	5190	MCS 0	
	VHT80	5210	MCS 0	
Frequency Stability	Un-modulation	5240	---	---

NOTE:

1. AMIGO Adapter and FRECOM Adapter had been pretested and found that **AMIGO Adapter** was the worst case and was selected for final testing. (AMIGO Adapter: AMS9-1201000FU2; FRECOM Adapter: F12W-120100SPAU).

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	**Quasi-Peak**	**Average**
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

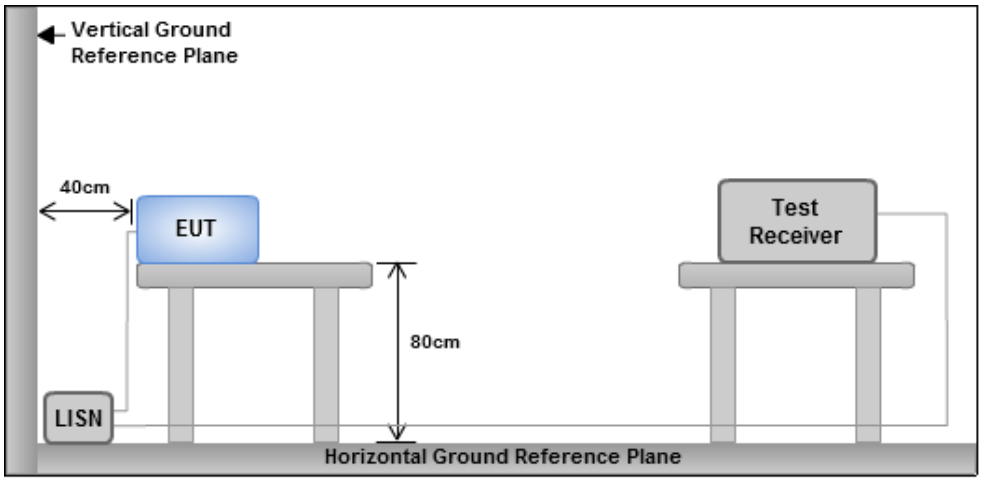

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Modulation	VHT80	Test Freq. (MHz)	5210
Power Phase	Line		

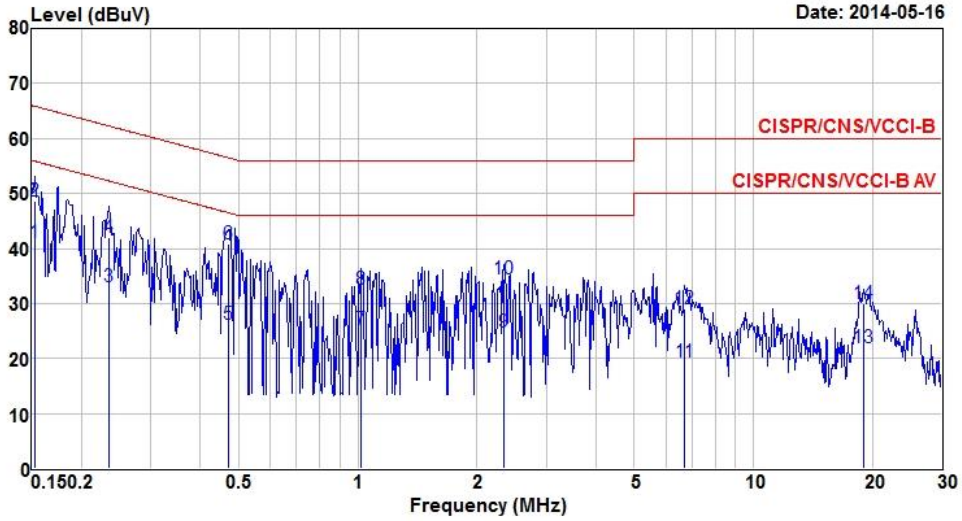

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.152	41.15	55.87	-14.72	40.73	0.40	0.02	Average
2	0.152	48.52	65.87	-17.35	48.10	0.40	0.02	QP
3	0.235	33.05	52.26	-19.21	32.65	0.39	0.01	Average
4	0.235	41.92	62.26	-20.34	41.52	0.39	0.01	QP
5	0.472	26.30	46.47	-20.17	25.86	0.39	0.05	Average
6	0.472	40.95	56.47	-15.52	40.51	0.39	0.05	QP
7	1.021	25.25	46.00	-20.75	24.64	0.41	0.20	Average
8	1.021	32.59	56.00	-23.41	31.98	0.41	0.20	QP
9	2.346	24.68	46.00	-21.32	24.19	0.44	0.05	Average
10	2.346	34.46	56.00	-21.54	33.97	0.44	0.05	QP
11	6.698	19.27	50.00	-30.73	18.56	0.50	0.21	Average
12	6.698	29.03	60.00	-30.97	28.32	0.50	0.21	QP
13	19.021	21.84	50.00	-28.16	20.91	0.55	0.38	Average
14	19.021	29.93	60.00	-30.07	29.00	0.55	0.38	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation	VHT80	Test Freq. (MHz)	5210
Power Phase	Neutral		

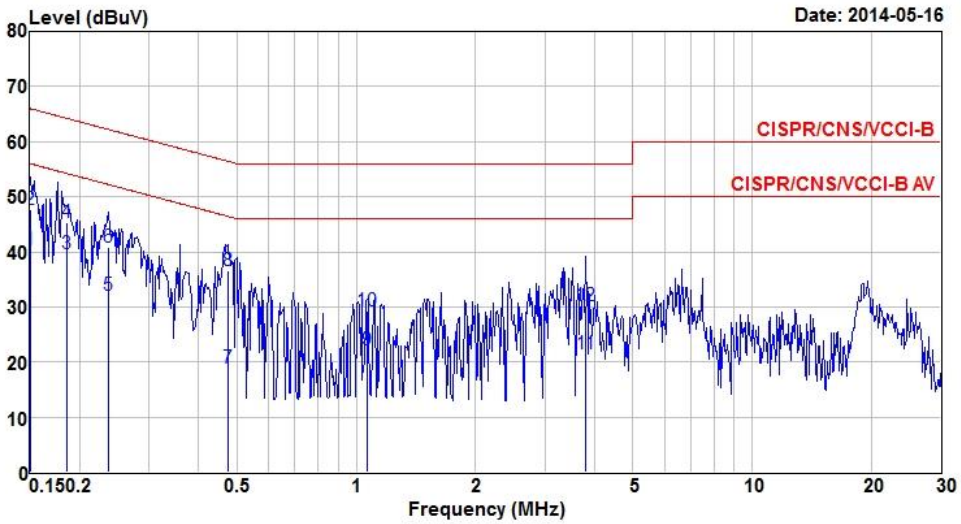

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.151	40.45	55.96	-15.51	39.95	0.48	0.02	Average
2	0.151	47.58	65.96	-18.38	47.08	0.48	0.02	QP
3*	0.186	39.70	54.22	-14.52	39.21	0.48	0.01	Average
4	0.186	45.40	64.22	-18.82	44.91	0.48	0.01	QP
5	0.237	32.09	52.22	-20.13	31.60	0.48	0.01	Average
6	0.237	40.81	62.22	-21.41	40.32	0.48	0.01	QP
7	0.474	18.89	46.45	-27.56	18.37	0.47	0.05	Average
8	0.474	36.63	56.45	-19.82	36.11	0.47	0.05	QP
9	1.065	22.09	46.00	-23.91	21.43	0.48	0.18	Average
10	1.065	29.33	56.00	-26.67	28.67	0.48	0.18	QP
11	3.799	21.45	46.00	-24.55	20.79	0.52	0.14	Average
12	3.799	30.11	56.00	-25.89	29.45	0.52	0.14	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Emission Bandwidth

3.2.1 Test Procedures

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

3.2.2 Test Setup



3.2.3 Test Result of Emission Bandwidth

Emission Bandwidth												
Mode	N_{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Power Limit (dBm)	
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	26dB BW	99%OBW
11a	2	5180	20.99	21.62	--	--	16.79	16.82	--	--	17.00	16.25
11a	2	5200	21.22	21.57	--	--	16.79	16.82	--	--	17.00	16.25
11a	2	5240	21.10	21.62	--	--	16.79	16.82	--	--	17.00	16.25
VHT20	2	5180	22.03	22.09	--	--	17.91	17.91	--	--	17.00	16.53
VHT20	2	5200	22.14	22.09	--	--	17.91	17.95	--	--	17.00	16.53
VHT20	2	5240	22.03	22.09	--	--	17.95	17.95	--	--	17.00	16.54
VHT40	2	5190	44.64	44.75	--	--	36.86	36.86	--	--	17.00	17.00
VHT40	2	5230	44.75	44.87	--	--	36.86	36.86	--	--	17.00	17.00
VHT80	2	5210	83.71	83.25	--	--	75.77	75.77	--	--	17.00	17.00

Worst Plots of 26dB Bandwidth	Worst Plots of 99% Bandwidth
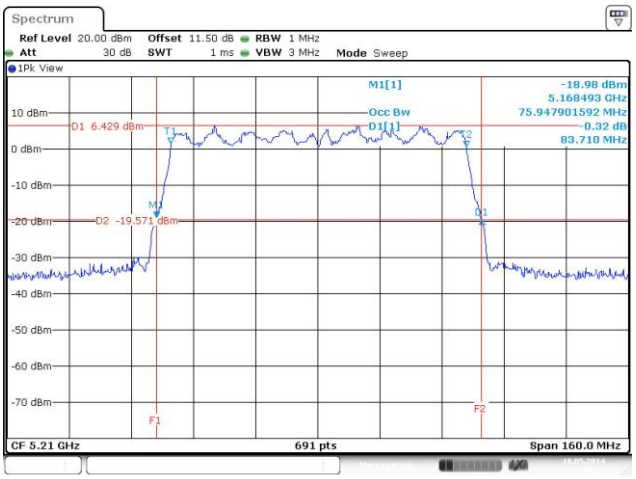	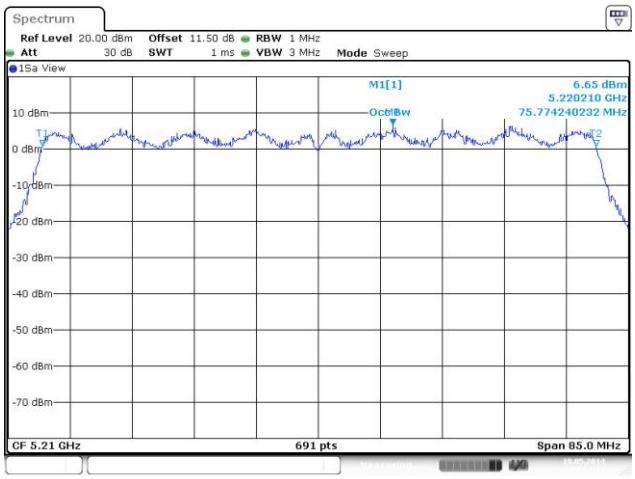

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency Band (GHz)		Limit for FCC 15.407
☒	5.15~5.25	50mW or 4dBm+10 log B
☐	5.25~5.35	250mW or 11dBm+10 log B
☐	5.47~5.725	250mW or 11dBm+10 log B
Note: “B” is the 26dB emission bandwidth in MHz.		

Frequency Band (GHz)		Limit for RSS-210 Annex 9
☐	5.15~5.25	The maximum E.I.R.P shall not exceed 200 mW or 10 + 10 $\log_{10}$ B, dBm, whichever power is less
☐	5.25~5.35	The maximum conducted power shall not exceed 250 mW or 11 + 10 $\log_{10}$ B, dBm, whichever power is less. The maximum E.I.R.P shall not exceed 1W or 17 + 10 $\log_{10}$ B, dBm, whichever power is less.
☐	5.47~5.725	The maximum conducted power shall not exceed 250 mW or 11 + 10 $\log_{10}$ B, dBm, whichever power is less. The maximum E.I.R.P shall not exceed 1W or 17 + 10 $\log_{10}$ B, dBm, whichever power is less.
Note: “B” is the 99% emission bandwidth in MHz.		

3.3.2 Test Procedures

☒ **Power meter**

☒ Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required

3.3.3 Test Setup

3.3.4 Test Result of Maximum Conducted Output Power

Mode	N_{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	13.41	13.36	--	--	43.605	16.40	17.00
11a	2	5200	13.33	13.28	--	--	42.809	16.32	17.00
11a	2	5240	13.36	13.29	--	--	43.007	16.34	17.00
HT20	2	5180	13.42	13.44	--	--	44.059	16.44	17.00
HT20	2	5200	13.41	13.36	--	--	43.605	16.40	17.00
HT20	2	5240	13.39	13.33	--	--	43.355	16.37	17.00
HT40	2	5190	13.38	13.51	--	--	44.216	16.46	17.00
HT40	2	5230	13.42	13.37	--	--	43.706	16.41	17.00
VHT20	2	5180	13.58	13.52	--	--	45.294	16.56	17.00
VHT20	2	5200	13.45	13.43	--	--	44.160	16.45	17.00
VHT20	2	5240	13.48	13.41	--	--	44.212	16.46	17.00
VHT40	2	5190	13.42	13.68	--	--	45.313	16.56	17.00
VHT40	2	5230	13.55	13.46	--	--	44.828	16.52	17.00
VHT80	2	5210	13.85	13.78	--	--	48.144	16.83	17.00

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency Band (GHz)		Limit (dBm) for FCC 15.407
☒	5.15~5.25	4
☐	5.25~5.35	11
☐	5.47~5.725	11

Frequency Band (GHz)		Limit (dBm) for RSS-210 Annex 9
☐	5.15~5.25	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band
☐	5.25~5.35	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band
☐	5.47~5.725	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band

3.4.2 Test Procedures

☐ Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

☐ Method SA-2

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time ≥ 10 * (number of points in sweep) * (symbol period of the transmitted signal).
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.

☒ Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal).
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add 10 log(1/x), where x is the duty cycle.

3.4.3 Test Setup



3.4.4 Test Result of Peak Power Spectral Density

Condition			Peak Power Spectral Density (dBm)			
Mode	N_{TX}	Freq. (MHz)	PPSD w/o D.F (dBm)	Duty Factor (dB)	PPSD with D.F (dBm)	PPSD Limit (dBm)
11a	2	5180	3.44	0.40	3.84	4
11a	2	5200	3.43	0.40	3.83	4
11a	2	5240	3.31	0.40	3.71	4
VHT20	2	5180	3.55	0.28	3.83	4
VHT20	2	5200	3.34	0.28	3.62	4
VHT20	2	5240	3.42	0.28	3.70	4
VHT40	2	5190	-0.54	0.66	0.12	4
VHT40	2	5230	0.01	0.66	0.67	4
VHT80	2	5210	-2.38	1.69	-0.69	4

Note: D.F is duty factor

Worst Plots

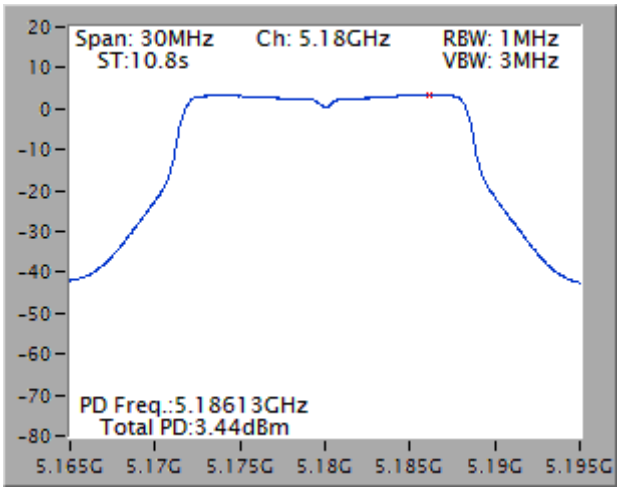

Note: Power density plot without duty factor

3.5 Peak Excursion

3.5.1 Peak Excursion Limit

Peak excursion of the modulation envelope shall not exceed 13 dB across any 1 MHz bandwidth.

3.5.2 Test Procedures

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Use the procedure of section 3.4.2 to measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

3.5.3 Test Setup



3.5.4 Test Result of Peak Excursion

Frequency band 5150-5250 MHz							
Mode	**Modulation Mode**	**N_{TX}**	**Freq. (MHz)**	**Measured Value(dB)**	**Duty Factor (dB)**	**Peak Excursion (dB)**	**Limit**
11a	BPSK	2	5180	8.40	0.40	8.00	13
11a	QPSK	2	5180	8.88	0.78	8.10	13
11a	16QAM	2	5180	9.06	1.52	7.54	13
11a	64QAM	2	5180	10.44	2.41	8.03	13
VHT20	BPSK	2	5180	8.06	0.28	7.78	13
VHT20	QPSK	2	5180	9.01	0.90	8.11	13
VHT20	16QAM	2	5180	9.79	1.71	8.08	13
VHT20	64QAM	2	5180	10.16	2.61	7.55	13
VHT20	256QAM	2	5180	9.99	3.37	6.62	13
VHT40	BPSK	2	5190	8.73	0.66	8.07	13
VHT40	QPSK	2	5190	10.42	1.46	8.96	13
VHT40	16QAM	2	5190	10.76	2.70	8.06	13
VHT40	64QAM	2	5190	10.56	3.42	7.14	13
VHT40	256QAM	2	5190	10.43	3.78	6.65	13
VHT80	BPSK	2	5210	9.72	1.69	8.03	13
VHT80	QPSK	2	5210	10.00	2.62	7.38	13
VHT80	16QAM	2	5210	10.71	2.80	7.91	13
VHT80	64QAM	2	5210	11.29	4.29	7.00	13
VHT80	256QAM	2	5210	11.99	4.60	7.39	13

Note: Measured value = Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission. Since the duty cycle is < 98 %, duty factor is required to average spectrum
Peak exclusion = Measured value – duty factor

Worst Plots

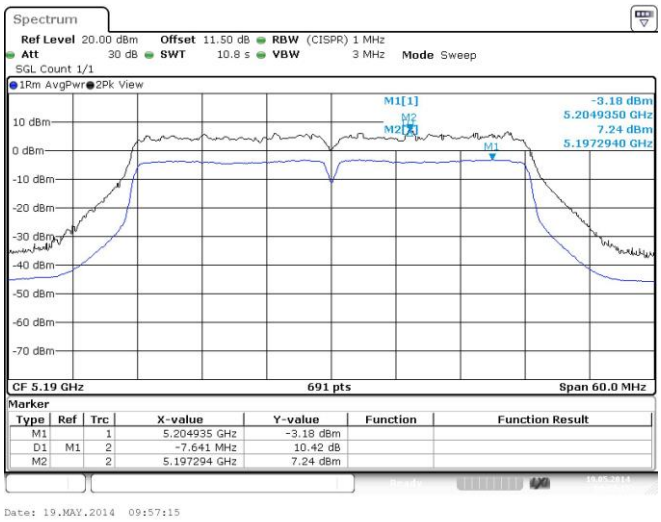
Spectrum
Ref Level 20.00 dBm Offset 11.50 dB RBW (CISPR) 1 MHz
Att 30 dB SWT 10.8 s VBW 3 MHz Mode Sweep
SGL Count 1/1
1Rm AvgPwr 2Pk View
M1[1] -3.18 dBm
5.2049350 GHz
M2 7.24 dBm
M2[X] 5.1972940 GHz
M1
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
CF 5.19 GHz
691 pts
Span 60.0 MHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 5.204935 GHz -3.18 dBm
D1 M1 2 -7.641 MHz 10.42 dB
M2 2 5.197294 GHz 7.24 dBm
Date: 19.MAY.2014 09:57:15

3.6 Transmitter Radiated and Band Edge Emissions

3.6.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit
Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	**Limit**
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.6.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.6.3 Test Setup

Radiated Emissions below 1 GHz

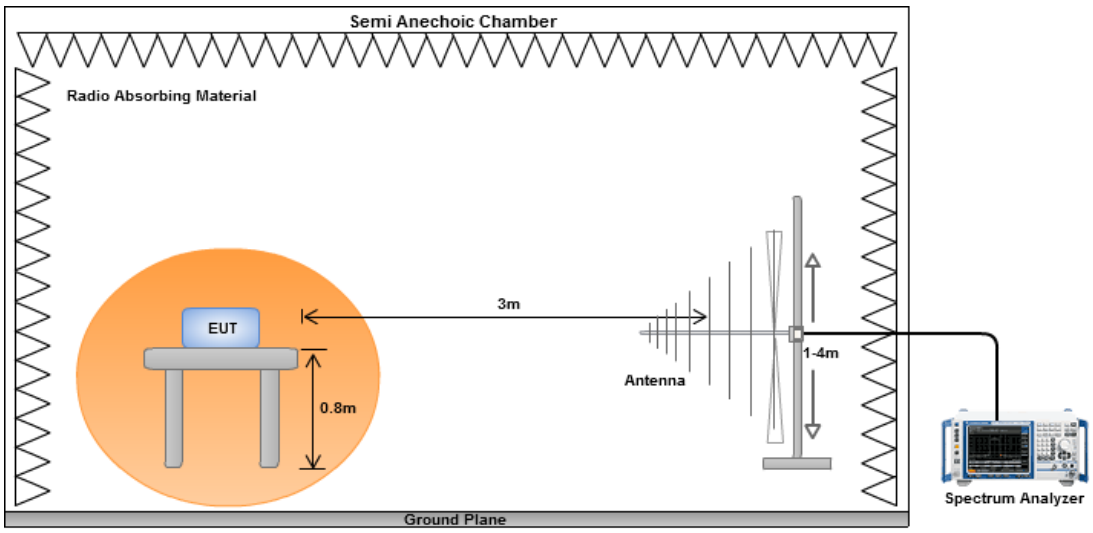

Radiated Emissions above 1 GHz

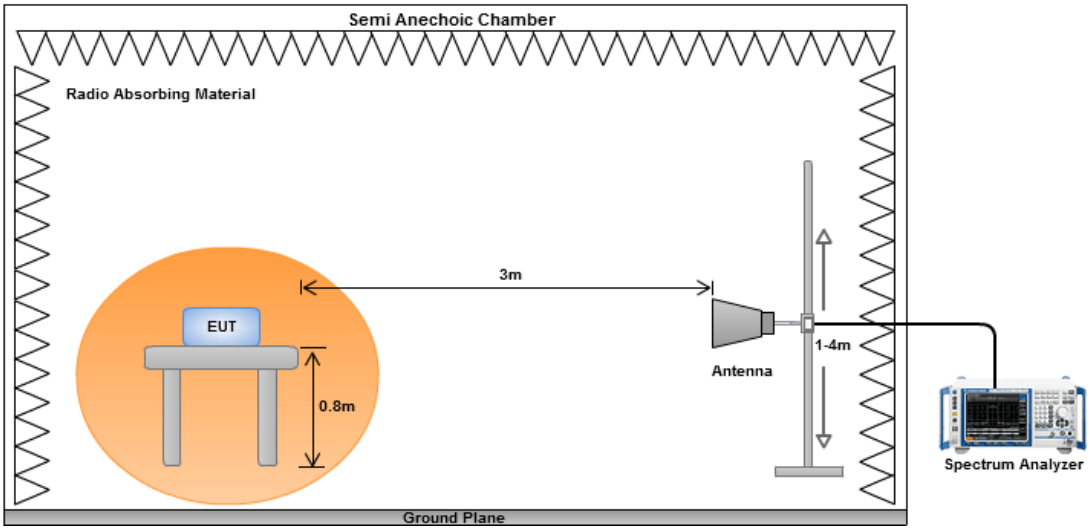

3.6.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

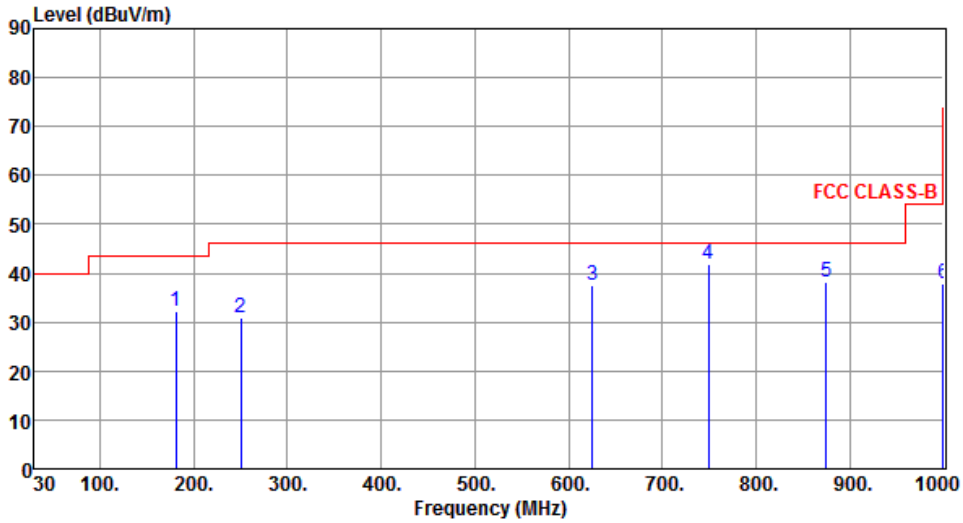

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	181.32	32.08	43.50	-11.42	50.84	-18.76	Peak	---	---
2	250.19	30.89	46.00	-15.11	48.86	-17.97	Peak	---	---
3	625.58	37.40	46.00	-8.60	46.70	-9.30	Peak	---	---
4	749.74	41.72	46.00	-4.28	49.13	-7.41	Peak	---	---
5	874.87	38.12	46.00	-7.88	44.03	-5.91	Peak	---	---
6	1000.00	37.99	54.00	-16.01	42.63	-4.64	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

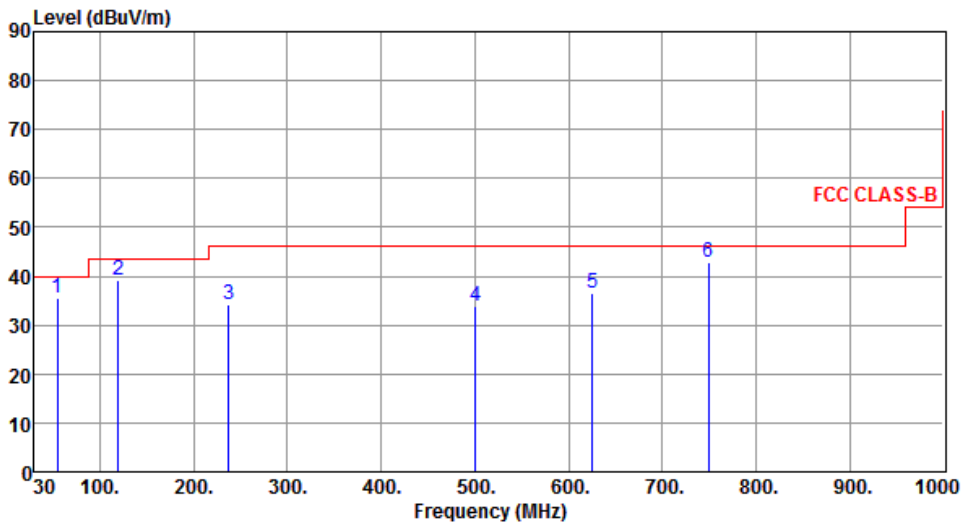

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.27	35.45	40.00	-4.55	52.19	-16.74	QP	---	---
2	119.24	39.04	43.50	-4.46	58.35	-19.31	Peak	---	---
3	237.58	34.33	46.00	-11.67	52.61	-18.28	Peak	---	---
4	500.45	33.80	46.00	-12.20	45.49	-11.69	Peak	---	---
5	625.58	36.56	46.00	-9.44	45.86	-9.30	Peak	---	---
6	749.74	42.96	46.00	-3.04	50.37	-7.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.6.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	**Test Freq. (MHz)**	5180
Polarization	Horizontal		

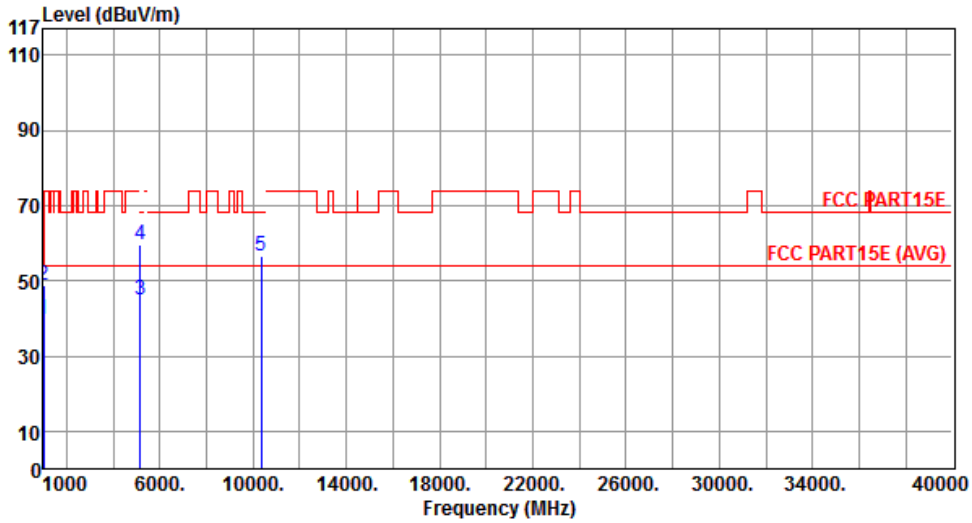

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	39.51	54.00	-14.49	49.27	-9.76	Average	---	---
2	1005.00	48.82	74.00	-25.18	58.58	-9.76	Peak	---	---
3	5150.00	44.98	54.00	-9.02	39.27	5.71	Average	---	---
4	5150.00	59.52	74.00	-14.48	53.81	5.71	Peak	---	---
5	10360.00	56.63	68.20	-11.57	42.19	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

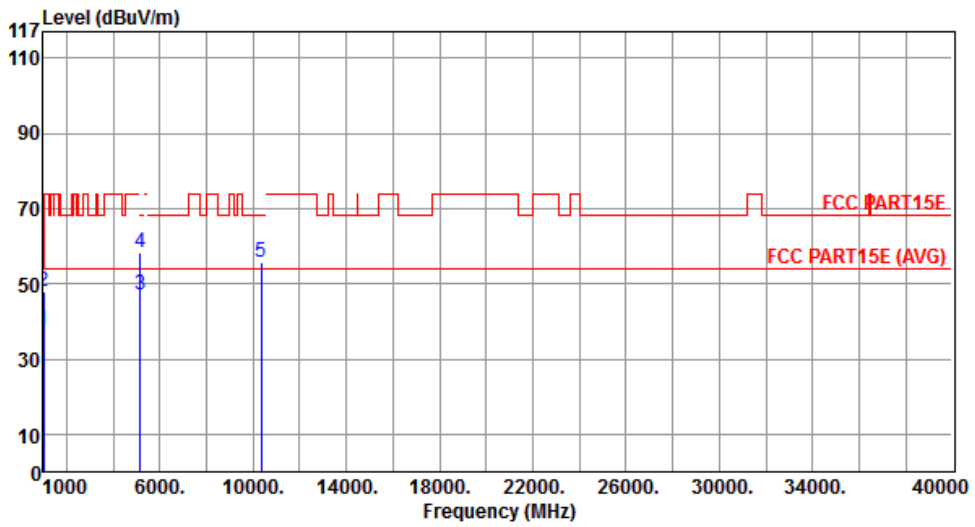

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	37.64	54.00	-16.36	47.40	-9.76	Average	---	---
2	1005.00	47.94	74.00	-26.06	57.70	-9.76	Peak	---	---
3	5150.00	47.02	54.00	-6.98	41.31	5.71	Average	---	---
4	5150.00	58.21	74.00	-15.79	52.50	5.71	Peak	---	---
5	10360.00	55.62	68.20	-12.58	41.18	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

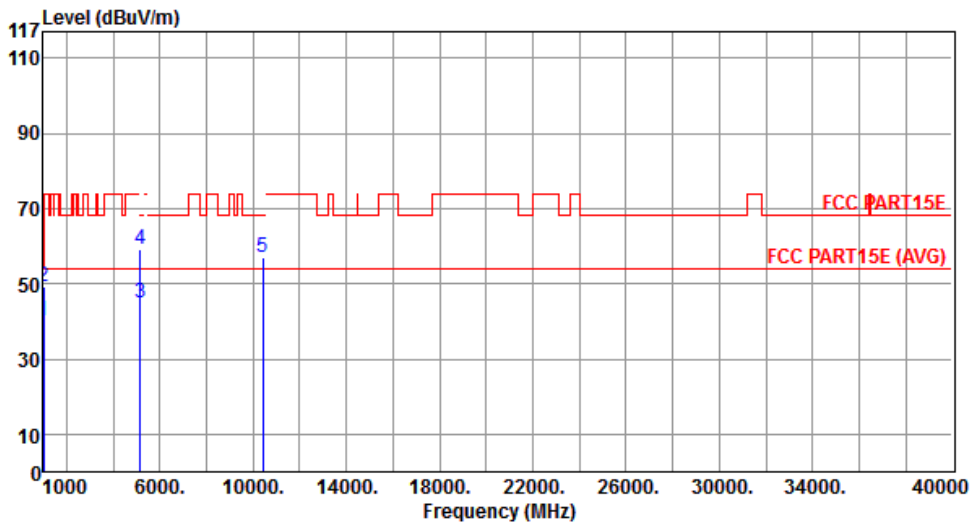

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	39.96	54.00	-14.04	49.72	-9.76	Average	---	---
2	1005.00	49.26	74.00	-24.74	59.02	-9.76	Peak	---	---
3	5150.00	44.84	54.00	-9.16	39.13	5.71	Average	---	---
4	5150.00	59.12	74.00	-14.88	53.41	5.71	Peak	---	---
5	10400.00	57.17	68.20	-11.03	42.67	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

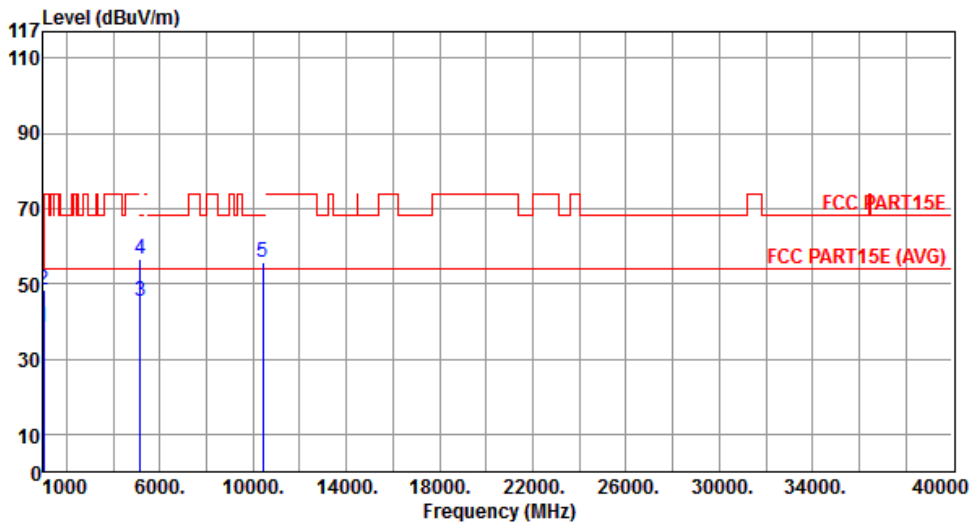

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	38.23	54.00	-15.77	47.99	-9.76	Average	---	---
2	1005.00	48.37	74.00	-25.63	58.13	-9.76	Peak	---	---
3	5150.00	45.46	54.00	-8.54	39.75	5.71	Average	---	---
4	5150.00	56.46	74.00	-17.54	50.75	5.71	Peak	---	---
5	10400.00	55.72	68.20	-12.48	41.22	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

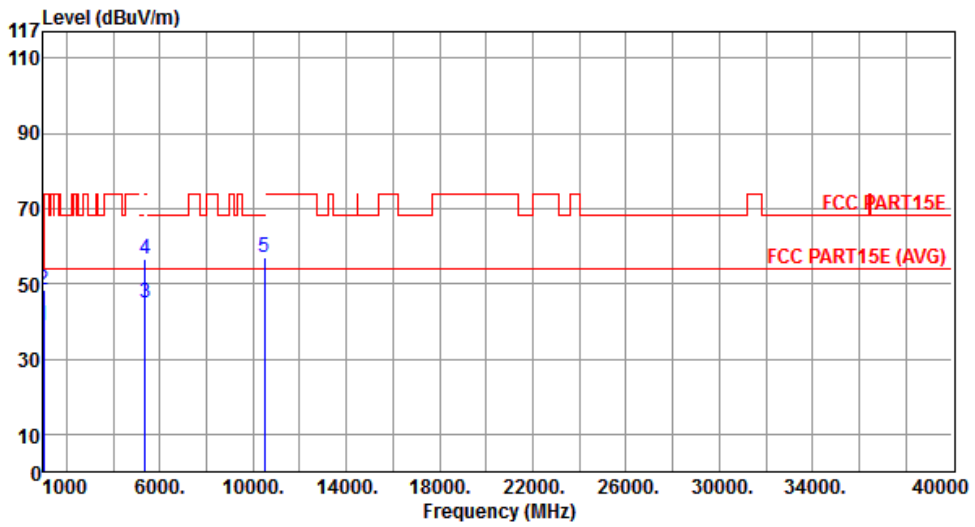

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	38.99	54.00	-15.01	48.75	-9.76	Average	---	---
2	1005.00	48.27	74.00	-25.73	58.03	-9.76	Peak	---	---
3	5350.00	44.94	54.00	-9.06	38.95	5.99	Average	---	---
4	5350.00	56.57	74.00	-17.43	50.58	5.99	Peak	---	---
5	10480.00	56.96	68.20	-11.24	42.33	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

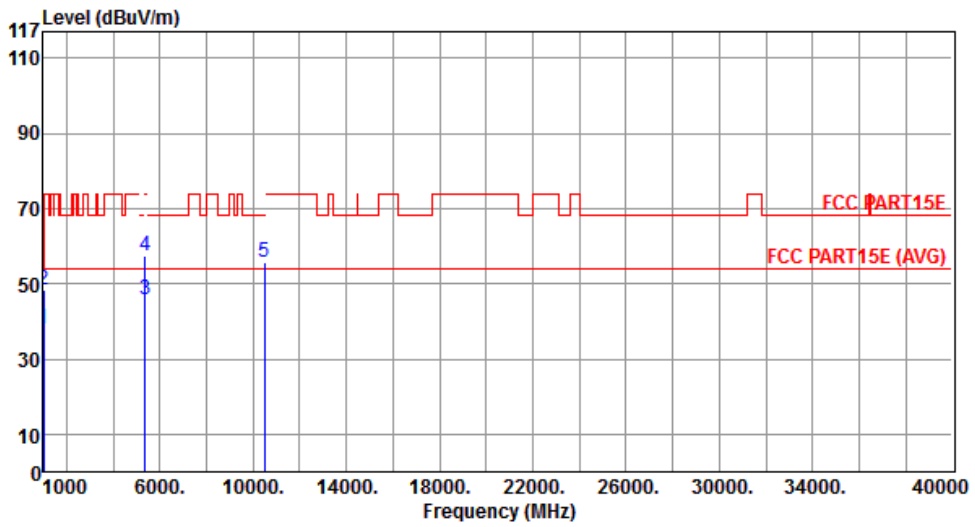

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	37.94	54.00	-16.06	47.70	-9.76	Average	---	---
2	1005.00	48.21	74.00	-25.79	57.97	-9.76	Peak	---	---
3	5350.00	45.63	54.00	-8.37	39.64	5.99	Average	---	---
4	5350.00	57.35	74.00	-16.65	51.36	5.99	Peak	---	---
5	10480.00	55.82	68.20	-12.38	41.19	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	**Test Freq. (MHz)**	5180
Polarization	Horizontal		

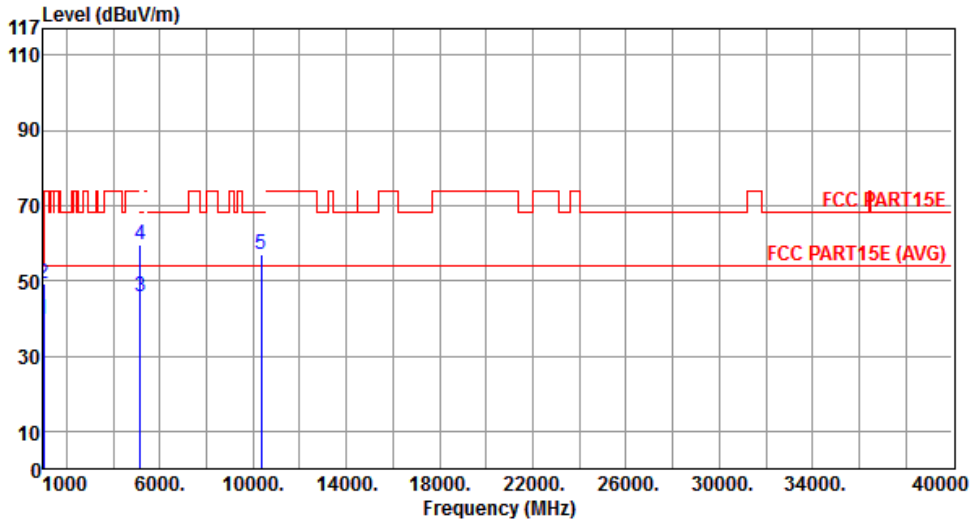

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	39.64	54.00	-14.36	49.40	-9.76	Average	---	---
2	1005.00	49.15	74.00	-24.85	58.91	-9.76	Peak	---	---
3	5150.00	45.58	54.00	-8.42	39.87	5.71	Average	---	---
4	5150.00	59.72	74.00	-14.28	54.01	5.71	Peak	---	---
5	10360.00	57.10	68.20	-11.10	42.66	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

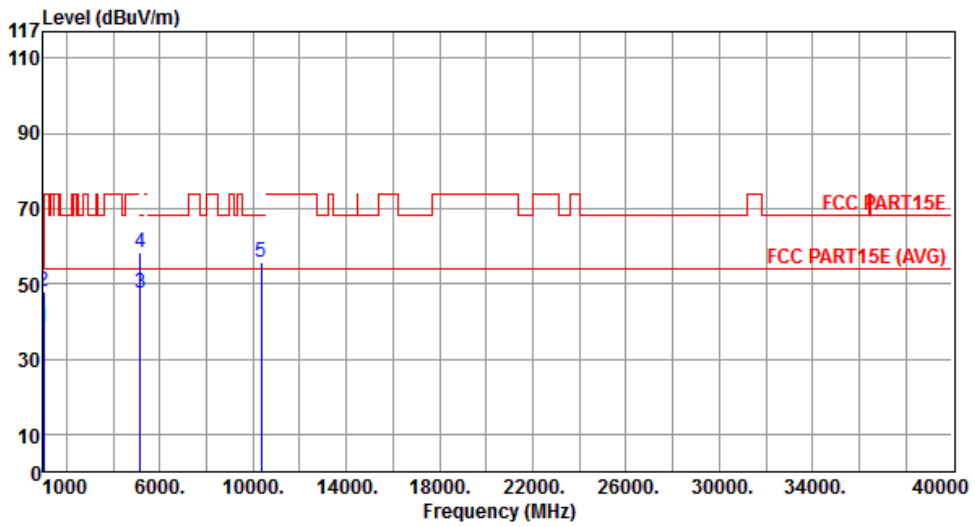

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	38.23	54.00	-15.77	47.99	-9.76	Average	---	---
2	1005.00	48.10	74.00	-25.90	57.86	-9.76	Peak	---	---
3	5150.00	47.31	54.00	-6.69	41.60	5.71	Average	---	---
4	5150.00	58.24	74.00	-15.76	52.53	5.71	Peak	---	---
5	10360.00	55.85	68.20	-12.35	41.41	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

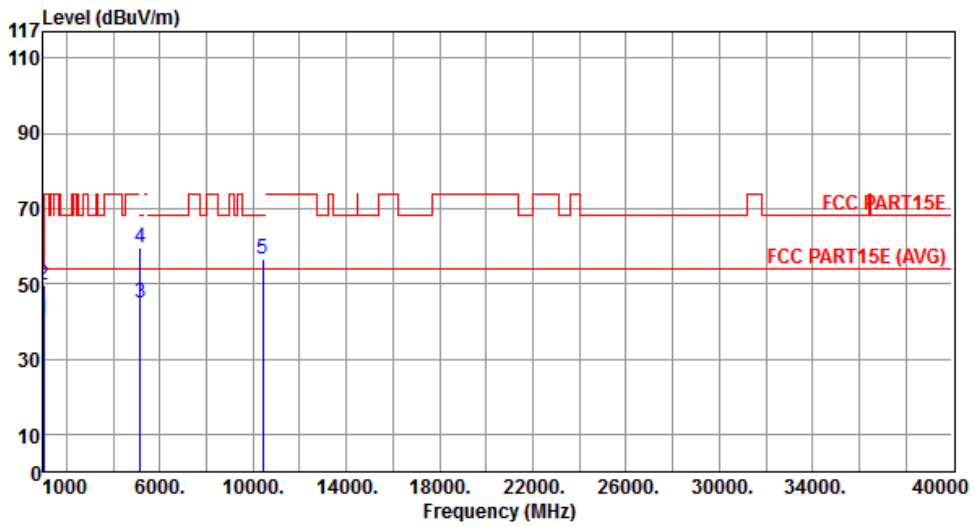

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	40.38	54.00	-13.62	50.14	-9.76	Average	---	---
2	1005.00	49.82	74.00	-24.18	59.58	-9.76	Peak	---	---
3	5150.00	44.87	54.00	-9.13	39.16	5.71	Average	---	---
4	5150.00	59.65	74.00	-14.35	53.94	5.71	Peak	---	---
5	10400.00	56.66	68.20	-11.54	42.16	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

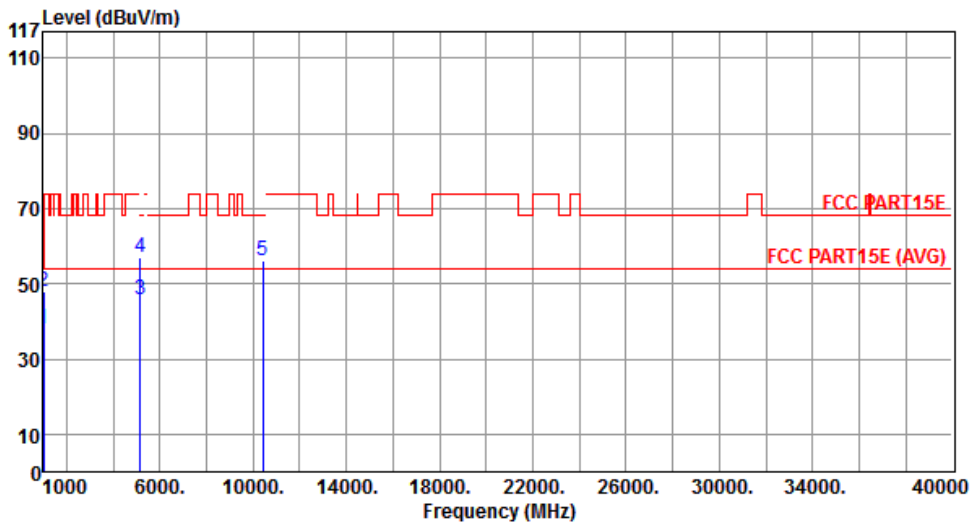

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	37.98	54.00	-16.02	47.74	-9.76	Average	---	---
2	1005.00	48.03	74.00	-25.97	57.79	-9.76	Peak	---	---
3	5150.00	45.55	54.00	-8.45	39.84	5.71	Average	---	---
4	5150.00	57.17	74.00	-16.83	51.46	5.71	Peak	---	---
5	10400.00	56.07	68.20	-12.13	41.57	14.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

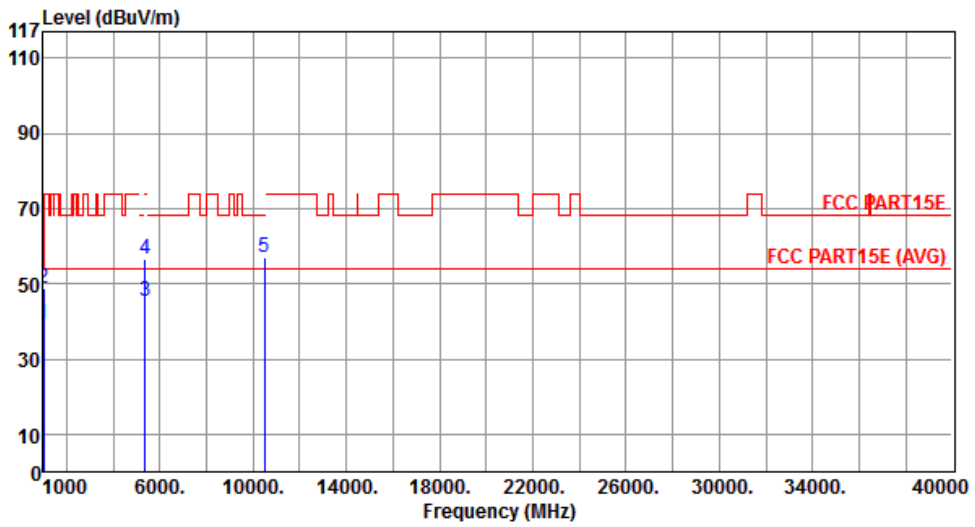

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	39.15	54.00	-14.85	48.91	-9.76	Average	---	---
2	1005.00	48.67	74.00	-25.33	58.43	-9.76	Peak	---	---
3	5350.00	45.28	54.00	-8.72	39.29	5.99	Average	---	---
4	5350.00	56.72	74.00	-17.28	50.73	5.99	Peak	---	---
5	10480.00	57.12	68.20	-11.08	42.49	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

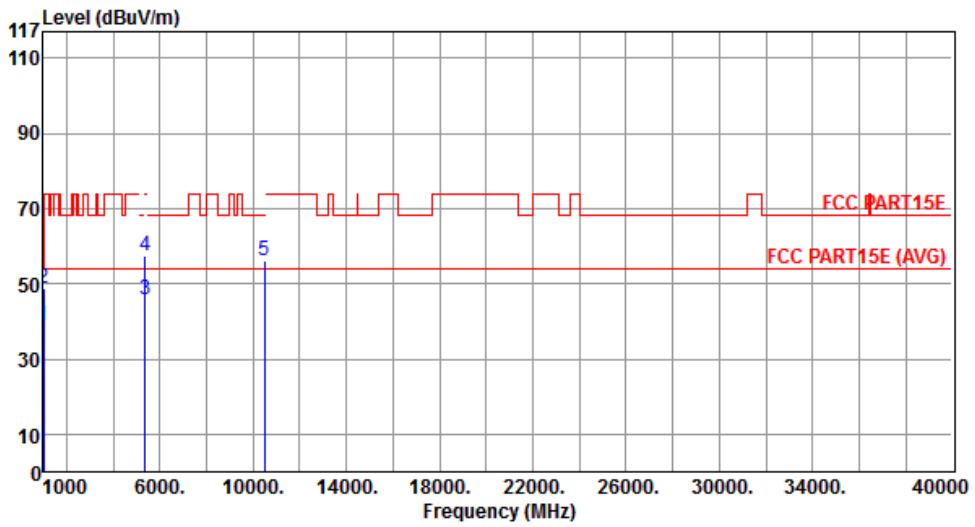

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	38.74	54.00	-15.26	48.50	-9.76	Average	---	---
2	1005.00	48.62	74.00	-25.38	58.38	-9.76	Peak	---	---
3	5350.00	45.78	54.00	-8.22	39.79	5.99	Average	---	---
4	5350.00	57.59	74.00	-16.41	51.60	5.99	Peak	---	---
5	10480.00	56.30	68.20	-11.90	41.67	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	**Test Freq. (MHz)**	5190
Polarization	Horizontal		

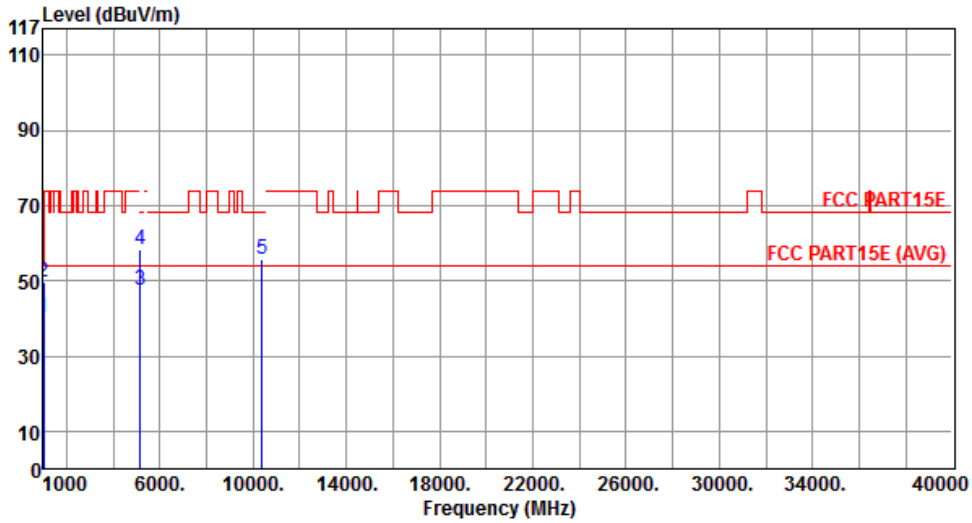

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	40.13	54.00	-13.87	49.89	-9.76	Average	---	---
2	1005.00	49.66	74.00	-24.34	59.42	-9.76	Peak	---	---
3	5150.00	47.55	54.00	-6.45	41.84	5.71	Average	---	---
4	5150.00	58.43	74.00	-15.57	52.72	5.71	Peak	---	---
5	10380.00	55.68	68.20	-12.52	41.22	14.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

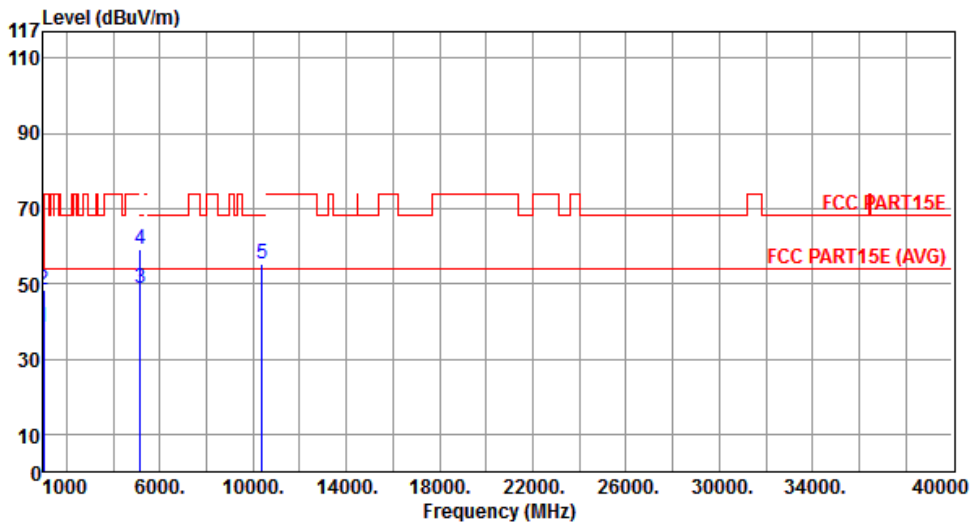

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	38.43	54.00	-15.57	48.19	-9.76	Average	---	---
2	1005.00	48.17	74.00	-25.83	57.93	-9.76	Peak	---	---
3	5150.00	48.95	54.00	-5.05	43.24	5.71	Average	---	---
4	5150.00	59.12	74.00	-14.88	53.41	5.71	Peak	---	---
5	10380.00	55.42	68.20	-12.78	40.96	14.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

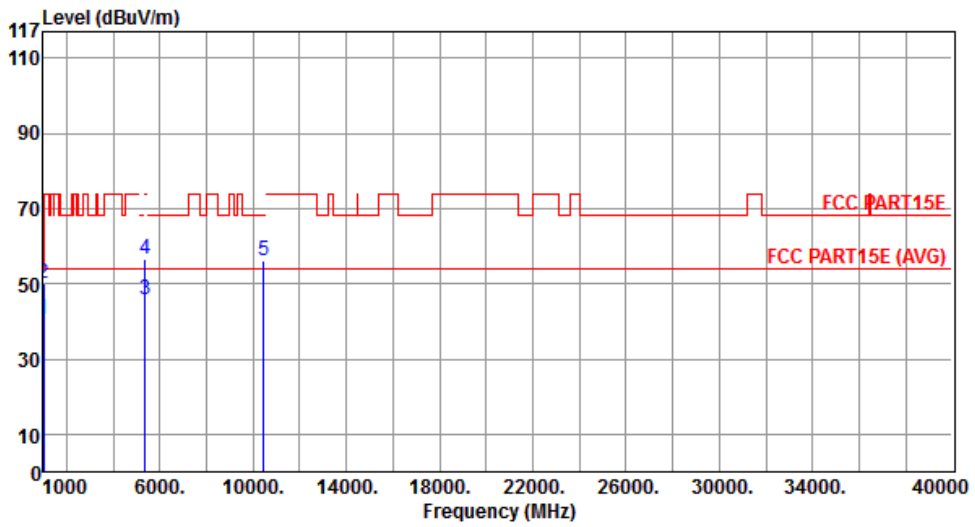

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	40.37	54.00	-13.63	50.13	-9.76	Average	---	---
2	1005.00	49.96	74.00	-24.04	59.72	-9.76	Peak	---	---
3	5350.00	45.55	54.00	-8.45	39.56	5.99	Average	---	---
4	5350.00	56.63	74.00	-17.37	50.64	5.99	Peak	---	---
5	10460.00	56.06	68.20	-12.14	41.46	14.60	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

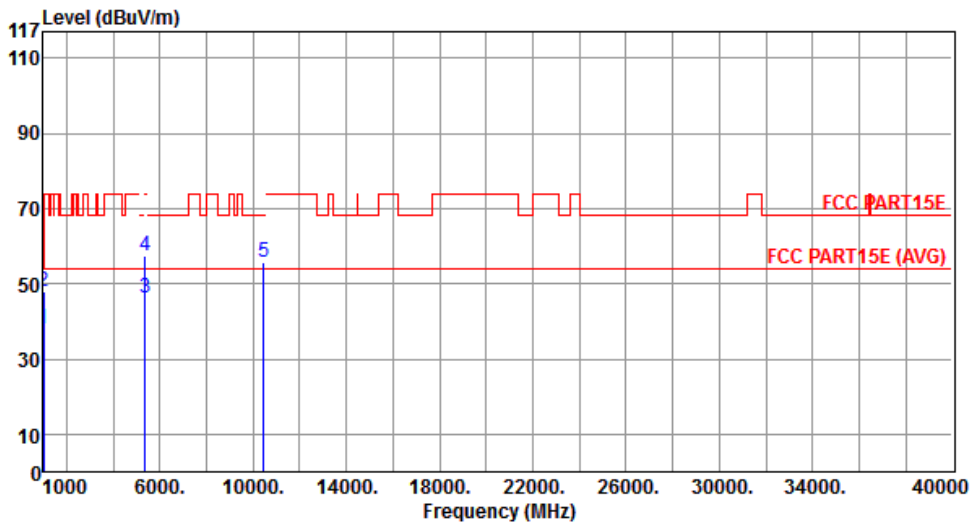

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	37.94	54.00	-16.06	47.70	-9.76	Average	---	---
2	1005.00	47.83	74.00	-26.17	57.59	-9.76	Peak	---	---
3	5350.00	46.36	54.00	-7.64	40.37	5.99	Average	---	---
4	5350.00	57.48	74.00	-16.52	51.49	5.99	Peak	---	---
5	10460.00	55.90	68.20	-12.30	41.30	14.60	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	**Test Freq. (MHz)**	5210
Polarization	Horizontal		

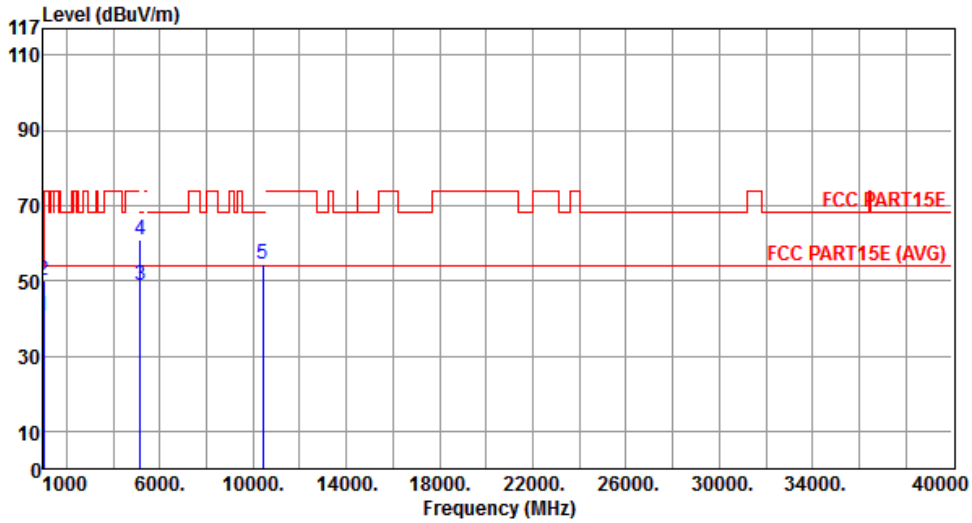

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	40.67	54.00	-13.33	50.43	-9.76	Average	---	---
2	1005.00	50.12	74.00	-23.88	59.88	-9.76	Peak	---	---
3	5150.00	48.58	54.00	-5.42	42.87	5.71	Average	---	---
4	5150.00	60.88	74.00	-13.12	55.17	5.71	Peak	---	---
5	10420.00	54.43	68.20	-13.77	39.89	14.54	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

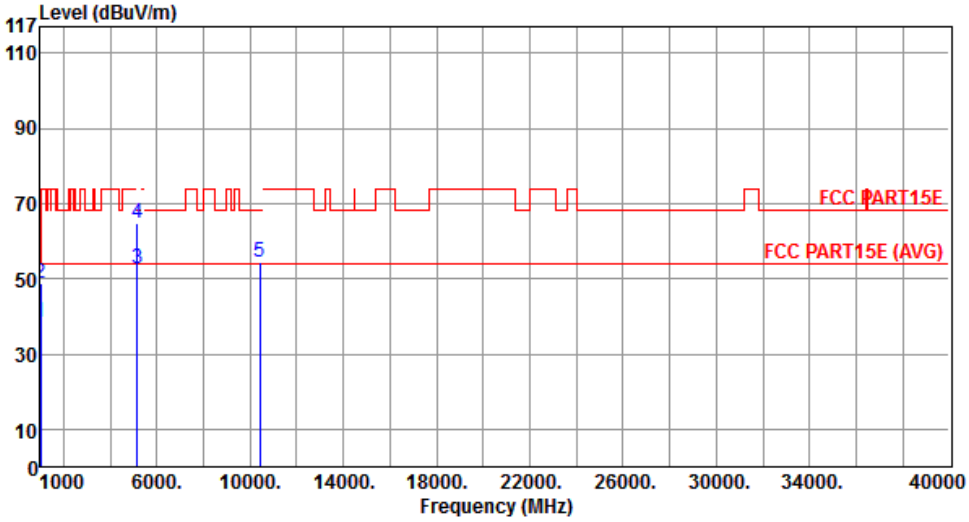

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1005.00	38.64	54.00	-15.36	48.40	-9.76	Average	---	---
2	1005.00	48.98	74.00	-25.02	58.74	-9.76	Peak	---	---
3	5150.00	52.85	54.00	-1.15	47.14	5.71	Average	---	---
4	5150.00	64.65	74.00	-9.35	58.94	5.71	Peak	---	---
5	10420.00	54.36	68.20	-13.84	39.82	14.54	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.7 Frequency Stability

3.7.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.7.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.7.3 Test Setup

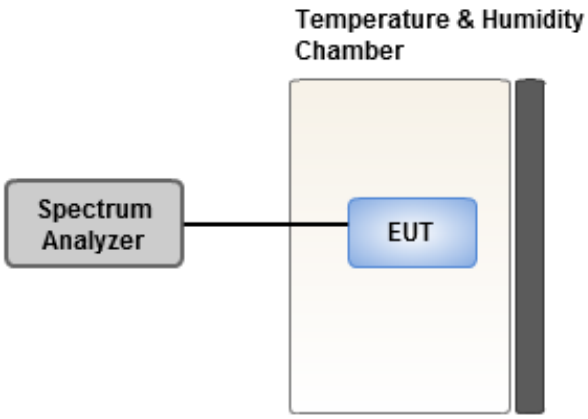

3.7.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	**0 minute**	**2 minutes**	**5 minutes**	**10 minutes**
T20°CVmax	1.15	1.21	1.21	1.21
T20°CVmin	1.04	1.02	0.94	0.98
T50°CVnom	2.46	2.42	2.48	2.33
T40°CVnom	2.21	2.22	2.18	2.24
T30°CVnom	1.84	1.81	1.92	1.93
T20°CVnom	1.59	1.72	1.65	1.67
T10°CVnom	1.13	1.17	1.11	1.17
T0°CVnom	1.29	1.27	1.18	1.22
T-10°CVnom	1.66	1.59	1.66	1.55
T-20°CVnom	1.75	1.82	1.85	1.82
T-30°CVnom	2.24	2.25	2.24	2.14
Vnom [Vac]: 110		Vmax [Vac]: 126.5		Vmin [Vac]: 93.5
Tnom [°C]: 20		Tmax [°C]: 55		Tmin [°C]: -30

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666
Fax: 886-3-318-0155
Email: ICC_Service@icertifi.com.tw

═END═