



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	TRENDnet, Inc.
Applicant Address	20675 Manhattan Place, Torrance, CA 90501 USA
FCC ID	XU8TEW828DRU

Product Name	AC3200 Tri Band Wireless Router
Brand Name	TRENDnet
Model No.	TEW-828DRU
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 06, 2014
Final Test Date	Dec. 02, 2014
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	11
3.11. Test Configurations	12
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Maximum Conducted Output Power Measurement.....	20
4.3. Power Spectral Density Measurement	23
4.4. 6dB Spectrum Bandwidth Measurement	31
4.5. Radiated Emissions Measurement	39
4.6. Emissions Measurement	58
4.7. Antenna Requirements	76
5. LIST OF MEASURING EQUIPMENTS	77
6. MEASUREMENT UNCERTAINTY.....	78
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N0617AA	Rev. 01	Initial issue of report	Dec. 12, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : AC3200 Tri Band Wireless Router
Brand Name : TRENDnet
Model No. : TEW-828DRU
Applicant : TRENDnet, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 06, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.02 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.02 dB
4.3	15.247(e)	Power Spectral Density	Complies	3.26 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.29 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.01 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (HT20): 17.62 MHz ; MCS0 (HT40): 36.20 MHz
Maximum Conducted Output Power	MCS0 (HT20): 29.01 dBm ; MCS0 (HT40): 24.09 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (1TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 12.11 MHz ; 11g: 18.71 MHz
Maximum Conducted Output Power	11b: 27.25 dBm ; 11g: 28.02 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☒ With beamforming ☐ Without beamforming

Note: The product has beamforming function for 802.11n and 802.11ac.

Antenna and Band width

Antenna	Single (TX)		Three (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11b	V	X	X	X
IEEE 802.11g	V	X	X	X
IEEE 802.11n	X	X	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model No.	Rating
Adapter 1	Ktec	KSAS0451200350HU	INPUT: 100-240Vac, 50/60Hz, 1.2A OUTPUT: 12Vdc, 3.5A
Adapter 2	HON-KWANG	HK-X142-A12	INPUT: 100-240Vac, 50/60Hz, 1.5A OUTPUT: 12Vdc, 0-3.5A (SER AT 3.5A)
Others			
RJ-45 Cable*1: Non-shielded, 1.5m			

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Type	Connector	Antenna Gain (dBi)		Cable Loss (dB)		True Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	JOYMAX	TWF-1561MPXX-711	Dipole	I-PEX	3.0	5.0	0.8	1.1	2.2	3.9
2	JOYMAX	TWF-1561MPXX-711	Dipole	I-PEX	3.0	5.0	0.8	1.1	2.2	3.9
3	JOYMAX	TWF-1561MPXX-711	Dipole	I-PEX	3.0	5.0	0.8	1.1	2.2	3.9
4	JOYMAX	TWF-1561MPXX-711	Dipole	I-PEX	-	5.0	-	1.1	-	3.9
5	JOYMAX	TWF-1561MPXX-711	Dipole	I-PEX	-	5.0	-	1.1	-	3.9
6	JOYMAX	TWF-1561MPXX-711	Dipole	I-PEX	-	5.0	-	1.1	-	3.9

Note: The EUT has six antennas of one set.

Ant. 1 ~ Ant. 3 supports 2.4GHz WLAN function and 5GHz Band 1 WLAN function.

Ant. 4 ~ Ant. 6 supports 5GHz Band 4 WLAN function only.

For 2.4GHz Band:

For IEEE 802.11b/g mode (1TX, 3RX):

Only Chain 1 can be used as transmitting, but Chain 1, Chain 2 and Chain 3 could receive simultaneously.

For IEEE 802.11n mode (3TX, 3RX):

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

For 5GHz Band 1:

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

For 5GHz Band 4:

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

For 2.4GHz Band: Chain 3 (Connect to Ant. 3)

For 5GHz Band 1: Chain 1 (Connect to Ant. 3)

For 5GHz Band 4: Chain 1 (Connect to Ant. 4)

For 2.4GHz Band: Chain 2 (Connect to Ant. 2)


For 5GHz Band 1: Chain 2 (Connect to Ant. 2)

For 5GHz Band 4: Chain 2 (Connect to Ant. 5)

For 2.4GHz Band: Chain 1 (Connect to Ant. 1)

For 5GHz Band 1: Chain 3 (Connect to Ant. 1)

For 5GHz Band 4: Chain 3 (Connect to Ant. 6)

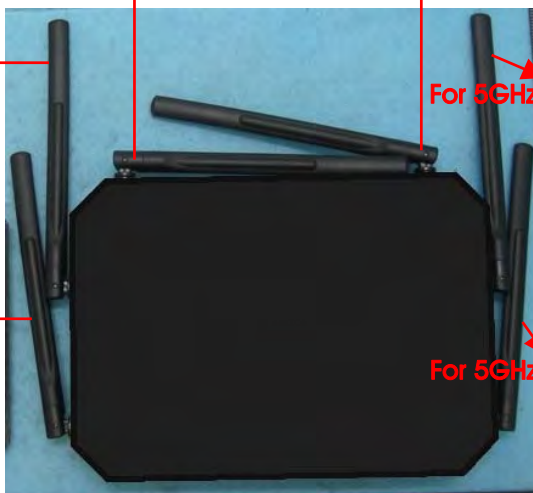

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Power Spectral Density	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
6dB Spectrum Bandwidth	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	802.11n HT20	MCS0	1/6/11	1+2+3
	802.11n HT40	MCS0	3/6/9	1+2+3
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1

Note: There are two functions of EUT, one is beamforming function, and the other is non-beamforming function for 802.11n, after evaluating, beamforming function has been evaluated to be the worst case, so it was selected to test and record in this test report.

The following test modes were performed for all tests:

For AC Power Line Conducted Emissions test:

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emissions Below 1GHz and Radiated Emission Co-location test:

Mode 1. EUT laying + Adapter 1

Mode 2. EUT standing + Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. EUT laying + Adapter 2

For Radiated Emissions Below 1GHz test:

Mode 3 is the worst case, so it was selected to record in this test report.

For Radiated Emission Co-location test:

Mode 3 generated the worst test result for radiated emission below 1GHz test, thus the measurement for radiated emission co-location test will follow this same test configuration.

For Radiated Emissions Above 1GHz test:

Mode 1. EUT laying + Antenna in 90°

Mode 2. EUT standing + Antenna in 90°

Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. EUT standing + Antenna in 0°

Mode 2 is the worst case, so it was selected to record in this test report.

For Co-location MPE and Radiated Emission Co-location test:

The EUT could be applied with 2.4GHz WLAN function, 5GHz Band 1 WLAN function and 5GHz Band 4 WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function, 5GHz Band 1 WLAN function and 5GHz Band 4 WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
Flash Disk	Transcend	604108 8255	DoC
Flash Disk	TDK	TF30	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
NB	DELL	E6430	DoC
NB	DELL	D420	DoC
NB	Apple	Mac Book	DoC
Flash Disk	Silicon	D33B01	DoC
Flash Disk	TDK	TF30	DoC

Test Site No: 03CH01-CB (above 1GHz)

For non-beamforming function:

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

For beamforming function:

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
WLAN ac Dongle	Netgear	A6200	PY312200200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n

Test Software Version	MTool_2.0.1.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	74	98	70
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	58	75	58

Power Parameters of IEEE 802.11b/g

Test Software Version	MTool_2.0.1.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	105	107	104
IEEE 802.11g	89	112	89

3.9. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:


1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n MCS0 HT20	3.980	4.120	96.60	0.15	0.25
802.11n MCS0 HT40	4.580	5.240	87.40	0.58	0.22
802.11b	1.000	1.000	100.00	0.00	0.01
802.11g	2.063	2.087	98.85	0.05	0.01




3.11.1. AC Power Line Conduction Emissions Test Configuration

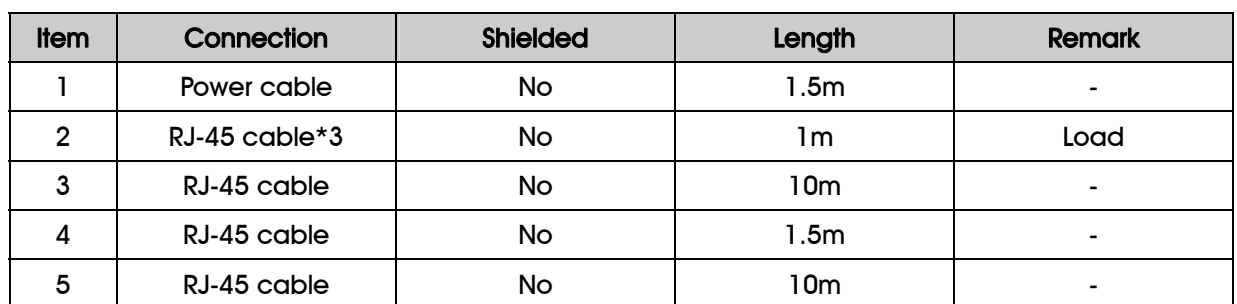

3.11.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

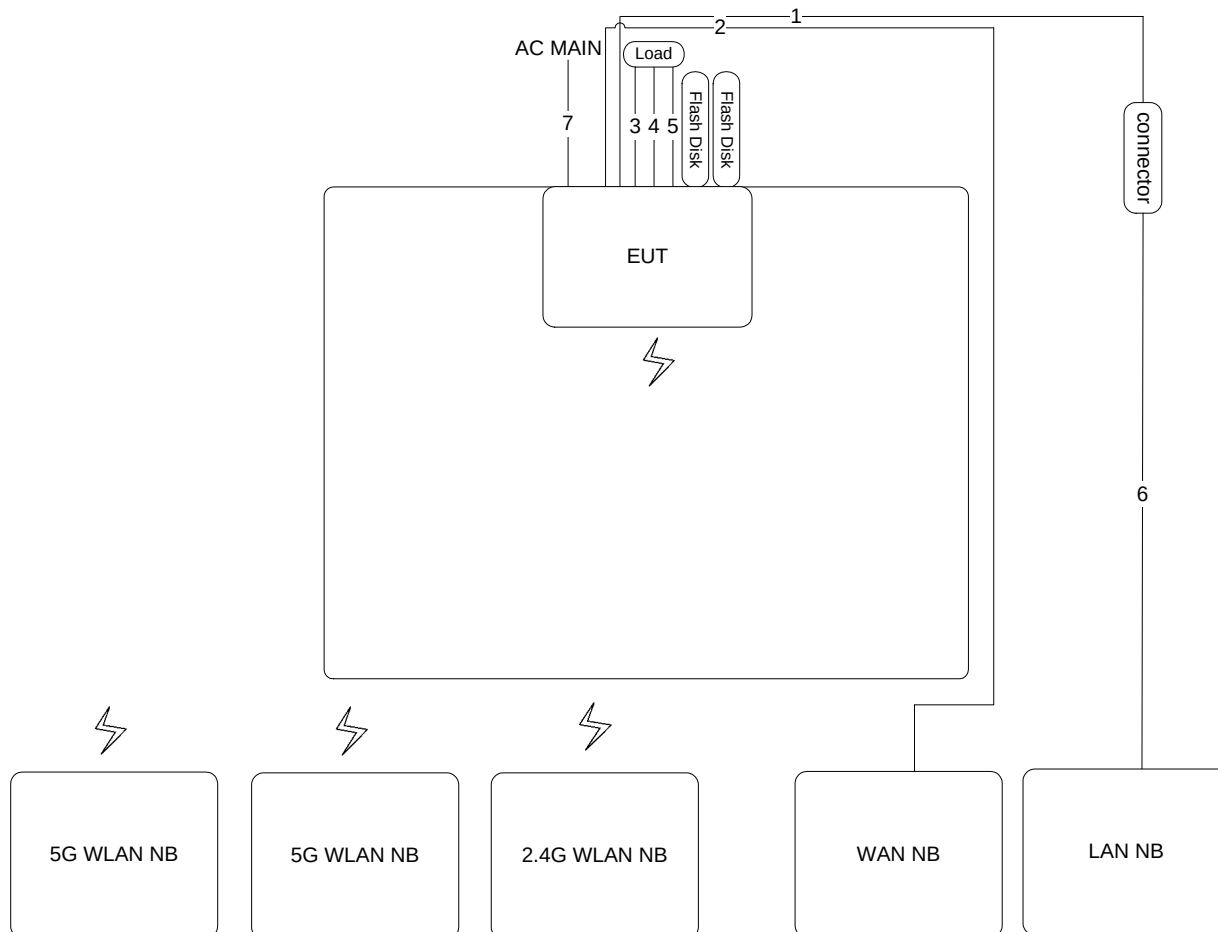

Item	Connection	Shielded	Length	Remark
1	RJ-45 cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	1.5m	Load
4	RJ-45 cable	No	1.5m	Load
5	RJ-45 cable	No	1.5m	Load
6	RJ-45 cable	No	10m	-
7	Power cable	No	1.5m	-


Test Configuration: above 1GHz

For non-beamforming function:

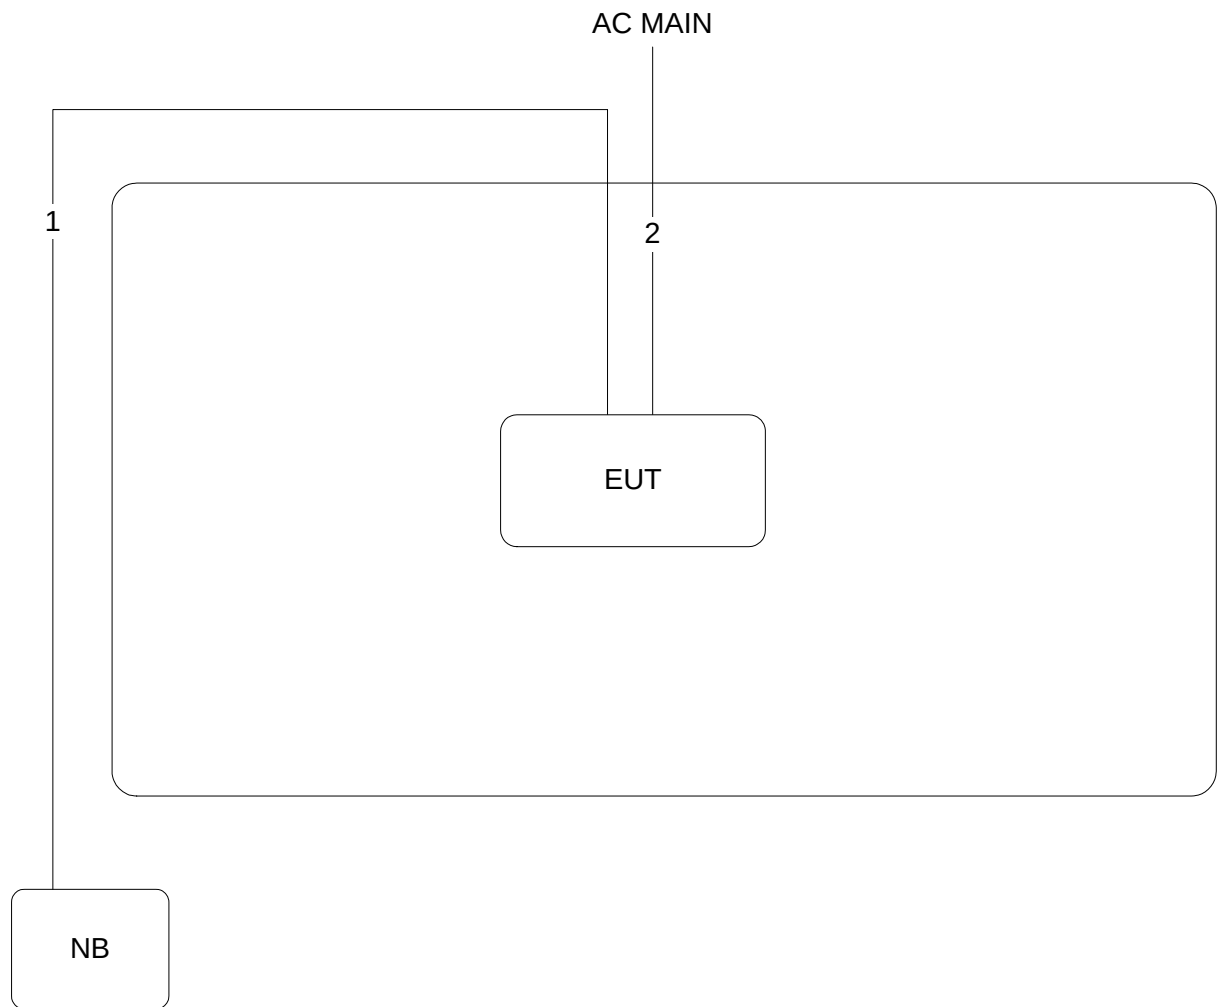

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

For beamforming function:

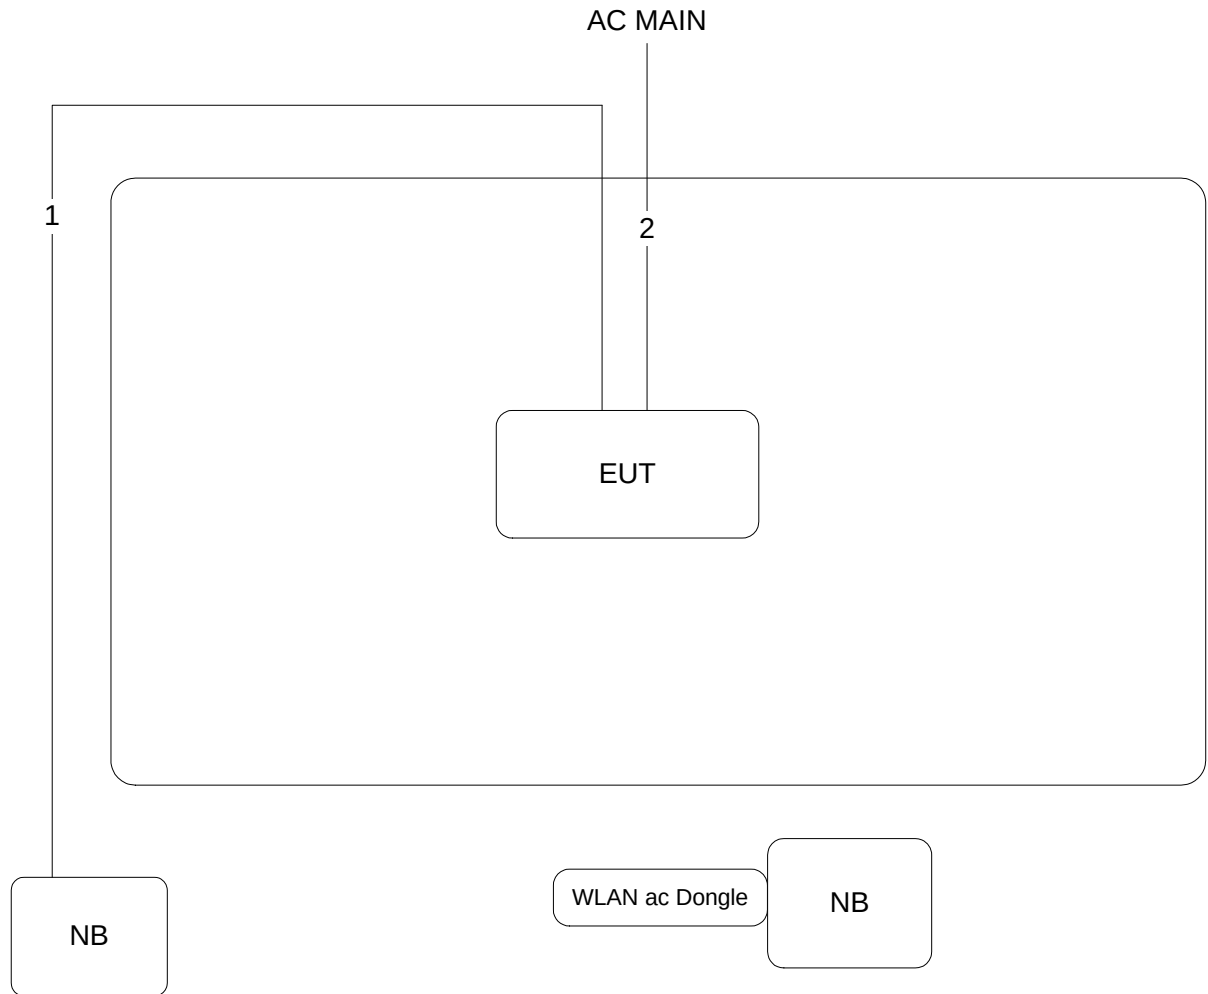

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

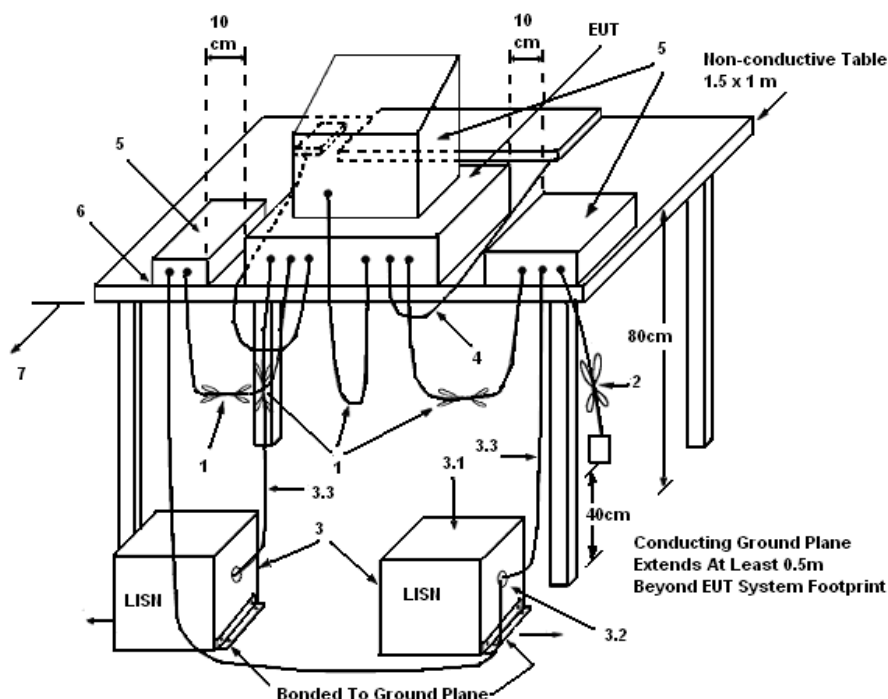

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	55%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

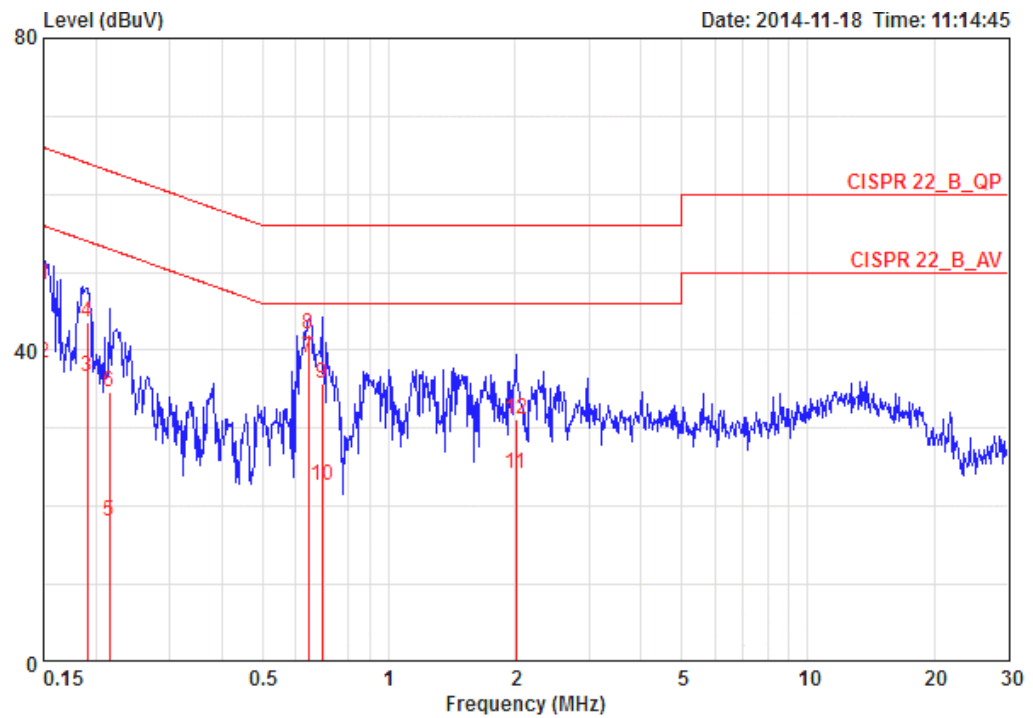

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	48.30	-17.70	66.00	38.18	9.96	0.16	QP	LINE
2	0.15000	38.47	-17.53	56.00	28.35	9.96	0.16	AVERAGE	LINE
3	0.19039	36.59	-17.43	54.02	26.47	9.96	0.16	AVERAGE	LINE
4	0.19039	43.62	-20.40	64.02	33.50	9.96	0.16	QP	LINE
5	0.21506	18.01	-35.00	53.01	7.88	9.96	0.17	AVERAGE	LINE
6	0.21506	34.77	-28.24	63.01	24.64	9.96	0.17	QP	LINE
7	0.64398	38.98	-7.02	46.00	28.81	9.98	0.19	AVERAGE	LINE
8	0.64398	42.04	-13.96	56.00	31.87	9.98	0.19	QP	LINE
9	0.69357	35.71	-20.29	56.00	25.54	9.98	0.19	QP	LINE
10	0.69357	22.73	-23.27	46.00	12.56	9.98	0.19	AVERAGE	LINE
11	2.012	24.21	-21.79	46.00	13.93	10.03	0.25	AVERAGE	LINE
12	2.012	31.22	-24.78	56.00	20.94	10.03	0.25	QP	LINE

Temperature	23°C	Humidity	55%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

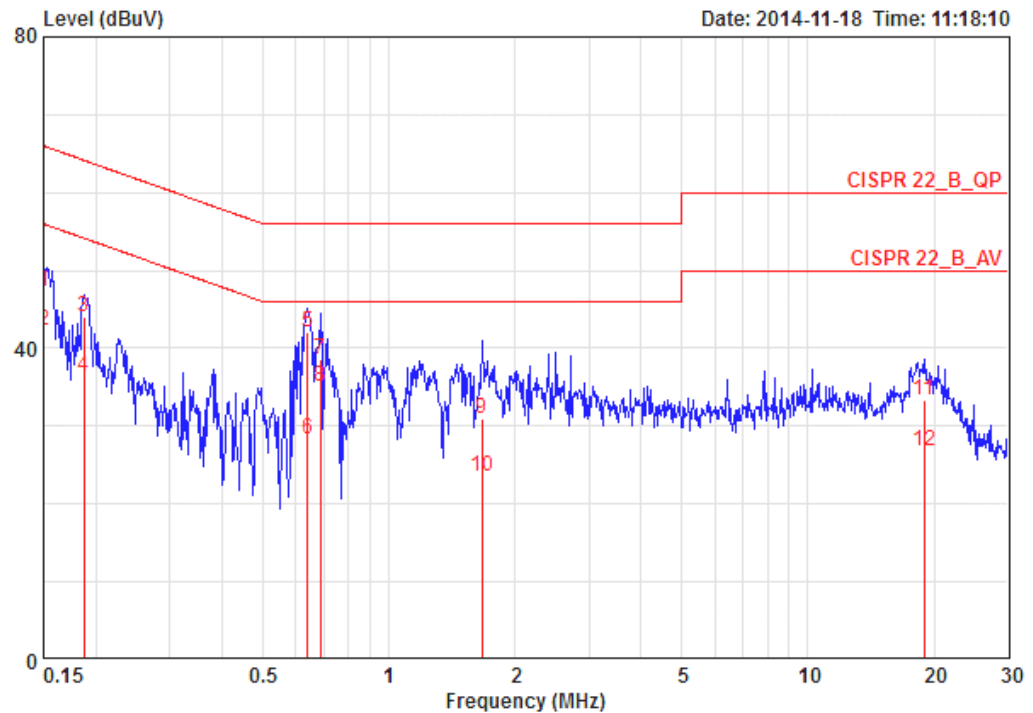

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	47.31	-18.69	66.00	37.20	9.95	0.16	QP	NEUTRAL
2	0.15000	42.29	-13.71	56.00	32.18	9.95	0.16	AVERAGE	NEUTRAL
3	0.18739	44.11	-20.04	64.15	34.00	9.95	0.16	QP	NEUTRAL
4	0.18739	36.47	-17.68	54.15	26.36	9.95	0.16	AVERAGE	NEUTRAL
5	0.64058	42.12	-13.88	56.00	31.96	9.97	0.19	QP	NEUTRAL
6	0.64058	28.41	-17.59	46.00	18.25	9.97	0.19	AVERAGE	NEUTRAL
7	0.68626	38.61	-17.39	56.00	28.45	9.97	0.19	QP	NEUTRAL
8	0.68626	35.02	-10.98	46.00	24.86	9.97	0.19	AVERAGE	NEUTRAL
9	1.671	30.95	-25.05	56.00	20.71	10.00	0.24	QP	NEUTRAL
10	1.671	23.45	-22.55	46.00	13.21	10.00	0.24	AVERAGE	NEUTRAL
11	18.920	33.33	-26.67	60.00	22.47	10.37	0.50	QP	NEUTRAL
12	18.920	26.89	-23.11	50.00	16.03	10.37	0.50	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

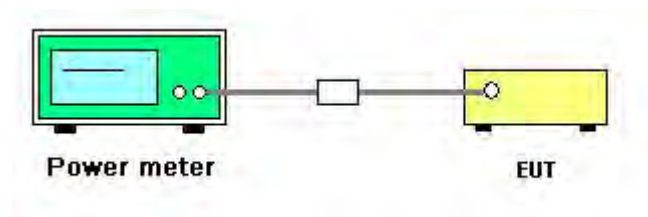

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	James Chou	Configurations	IEEE 802.11n
Test Date	Nov. 27, 2014		

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	19.03	18.71	18.66	23.57	29.03	Complies
6	2437 MHz	24.32	24.26	24.12	29.01	29.03	Complies
11	2462 MHz	18.58	18.83	18.35	23.36	29.03	Complies

Note: Directional gain = $10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AQ}} \left\{ \sum_{k=1}^{N_{AQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{dBi} > 6 \text{dBi}$, so limit = $30 - (6.97 - 6) = 29.03 \text{dBm}$.

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	15.58	15.72	15.46	20.36	29.03	Complies
6	2437 MHz	19.46	19.38	19.12	24.09	29.03	Complies
9	2452 MHz	15.43	18.82	15.38	21.63	29.03	Complies

Note: Directional gain = $10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AQ}} \left\{ \sum_{k=1}^{N_{AQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.97 \text{dBi} > 6 \text{dBi}$, so limit = $30 - (6.97 - 6) = 29.03 \text{dBm}$.

Temperature	26°C	Humidity	63%
Test Engineer	James Chou	Configurations	IEEE 802.11b/g
Test Date	Nov. 27, 2014		

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	26.88	30.00	Complies
6	2437 MHz	27.25	30.00	Complies
11	2462 MHz	26.68	30.00	Complies

Configuration IEEE 802.11g / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.26	30.00	Complies
6	2437 MHz	28.02	30.00	Complies
11	2462 MHz	22.46	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

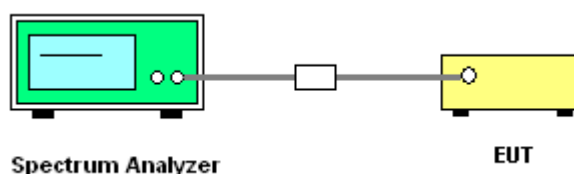

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	James Chou	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-7.39	-6.19	-7.85	-2.31	7.03	Complies
6	2437 MHz	-0.06	-1.15	-2.00	3.77	7.03	Complies
11	2462 MHz	-5.94	-7.18	-6.64	-1.79	7.03	Complies

Note: Directional gain = $10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left(\sum_{k=1}^{N_{ant}} g_{j,k} \right)^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so limit = $8 - (6.97 - 6) = 7.03 \text{ dBm/3kHz}$.

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	-13.20	-12.17	-13.19	-8.05	7.03	Complies
6	2437 MHz	-9.11	-9.07	-9.39	-4.42	7.03	Complies
9	2452 MHz	-12.33	-12.32	-13.19	-7.82	7.03	Complies

Note: Directional gain = $10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left(\sum_{k=1}^{N_{ant}} g_{j,k} \right)^2}{N_{ANT}} \right] = 6.97 \text{ dBi} > 6 \text{ dBi}$, so limit = $8 - (6.97 - 6) = 7.03 \text{ dBm/3kHz}$.

Temperature	26°C	Humidity	63%
Test Engineer	James Chou	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	3.42	8.00	Complies
6	2437 MHz	4.26	8.00	Complies
11	2462 MHz	3.85	8.00	Complies


Configuration IEEE 802.11g / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-2.53	8.00	Complies
6	2437 MHz	1.46	8.00	Complies
11	2462 MHz	-2.49	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

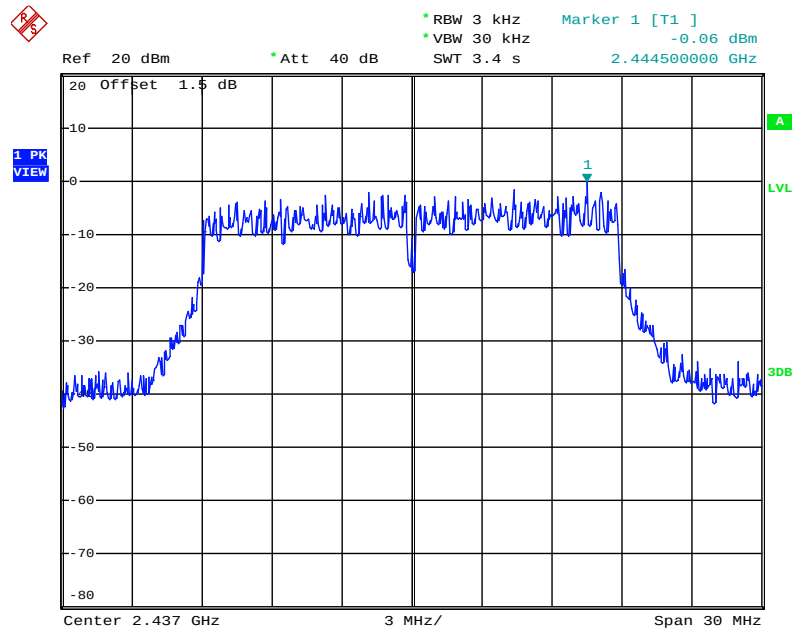


Date: 27.NOV.2014 14:05:43

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

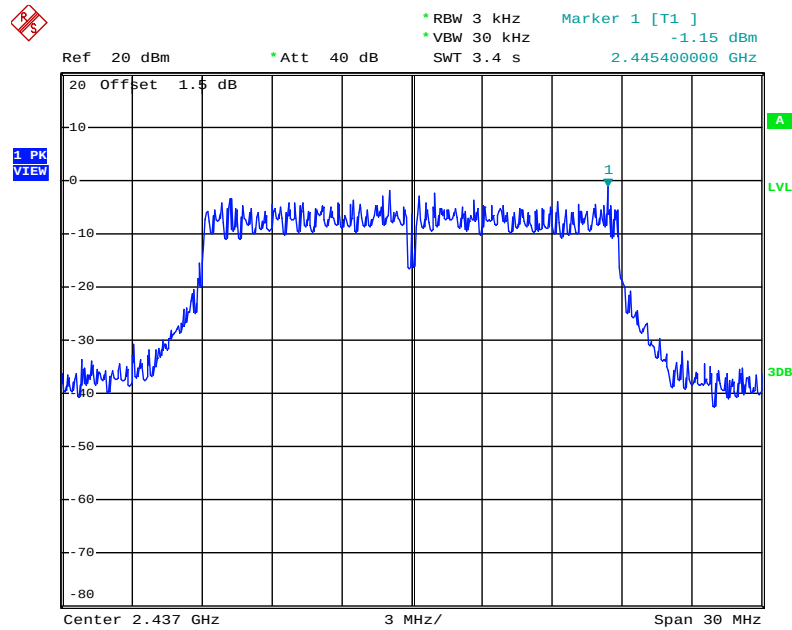


Date: 27.NOV.2014 14:04:47

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

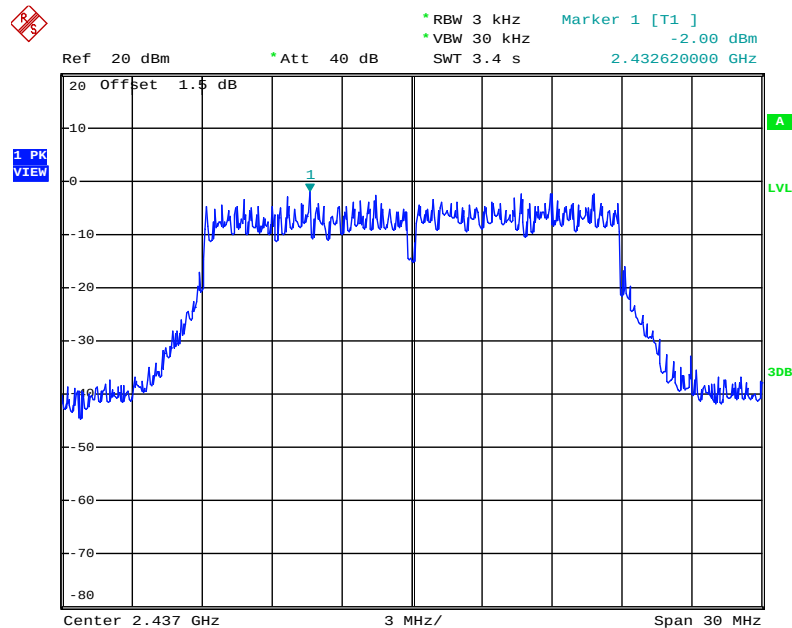


Date: 27.NOV.2014 14:03:59

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

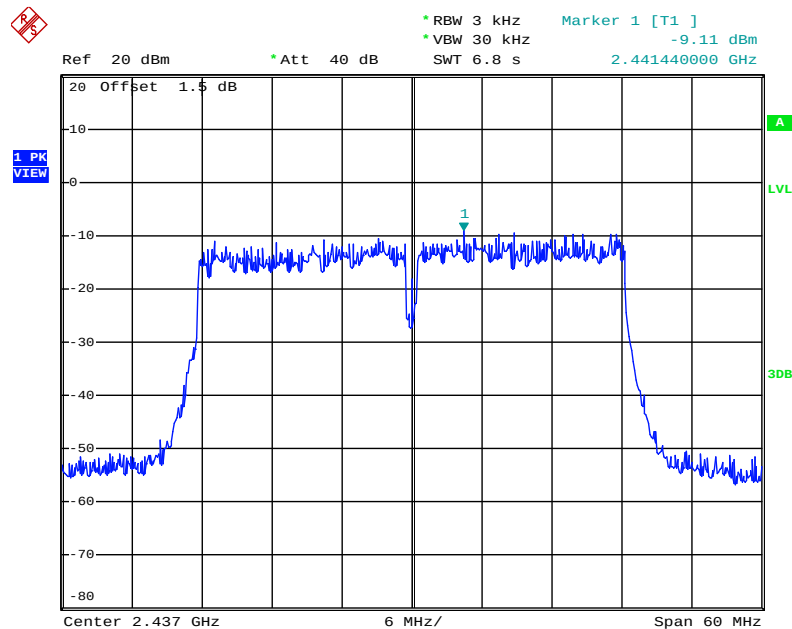


Date: 27.NOV.2014 14:13:47

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

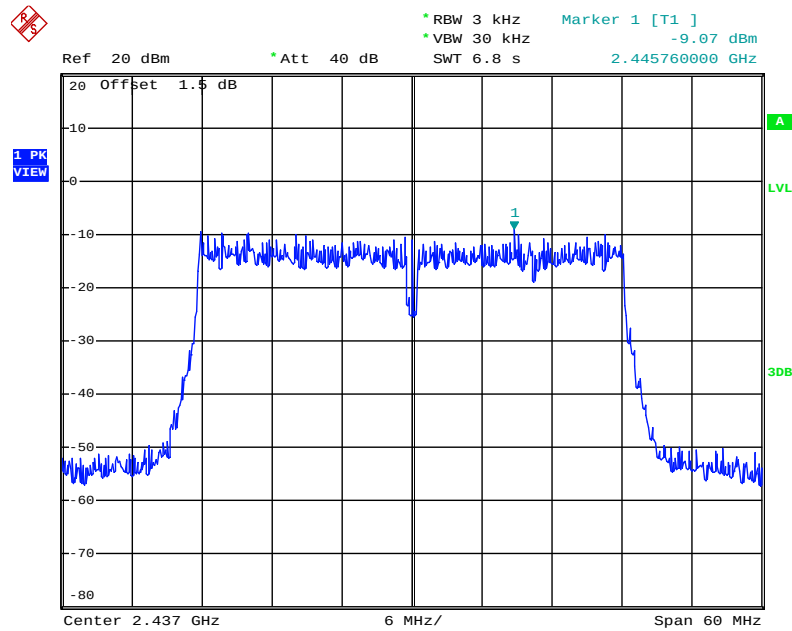


Date: 27.NOV.2014 14:14:40

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

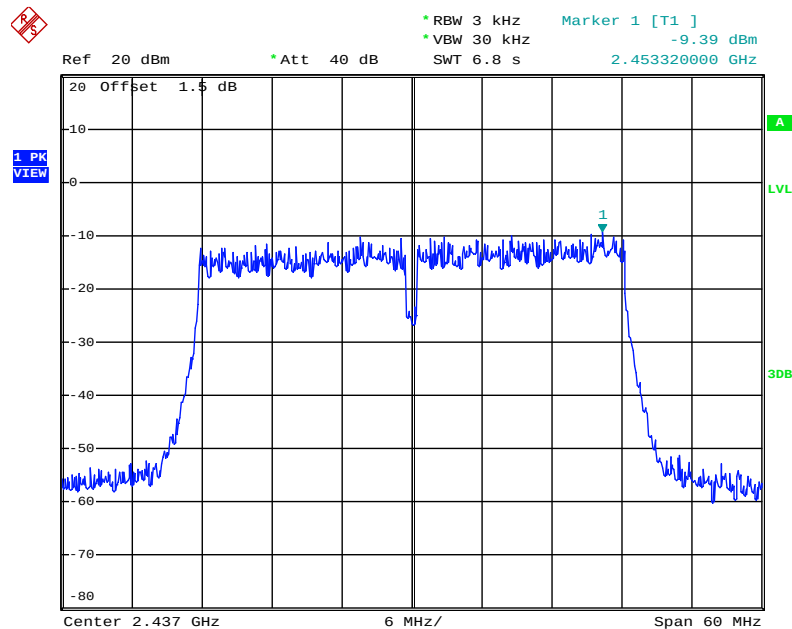


Date: 27.NOV.2014 14:18:35

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

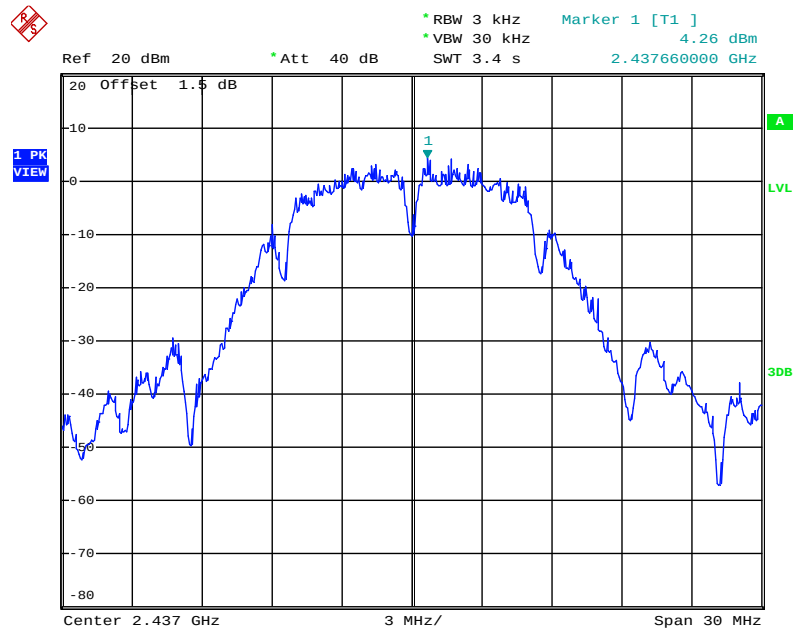

Date: 27.NOV.2014 13:51:07

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

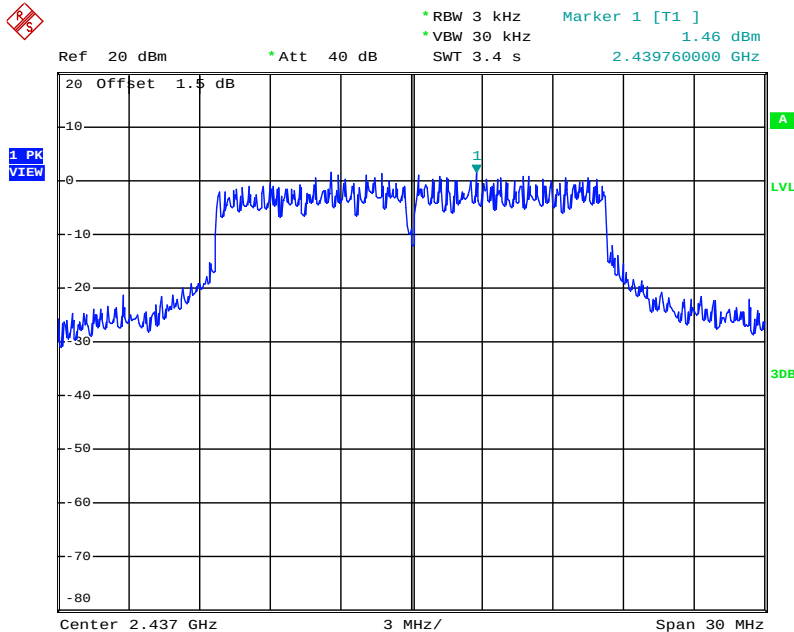

Date: 27.NOV.2014 13:53:55

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	James Chou	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.07	17.36	500	Complies
6	2437 MHz	15.07	17.62	500	Complies
11	2462 MHz	15.07	17.58	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	33.85	36.03	500	Complies
6	2437 MHz	35.13	36.20	500	Complies
9	2452 MHz	33.85	35.94	500	Complies

Temperature	26°C	Humidity	63%
Test Engineer	James Chou	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.04	11.98	500	Complies
6	2437 MHz	9.04	12.11	500	Complies
11	2462 MHz	8.98	11.93	500	Complies


Configuration IEEE 802.11g / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.34	17.01	500	Complies
6	2437 MHz	16.34	18.71	500	Complies
11	2462 MHz	16.28	17.06	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

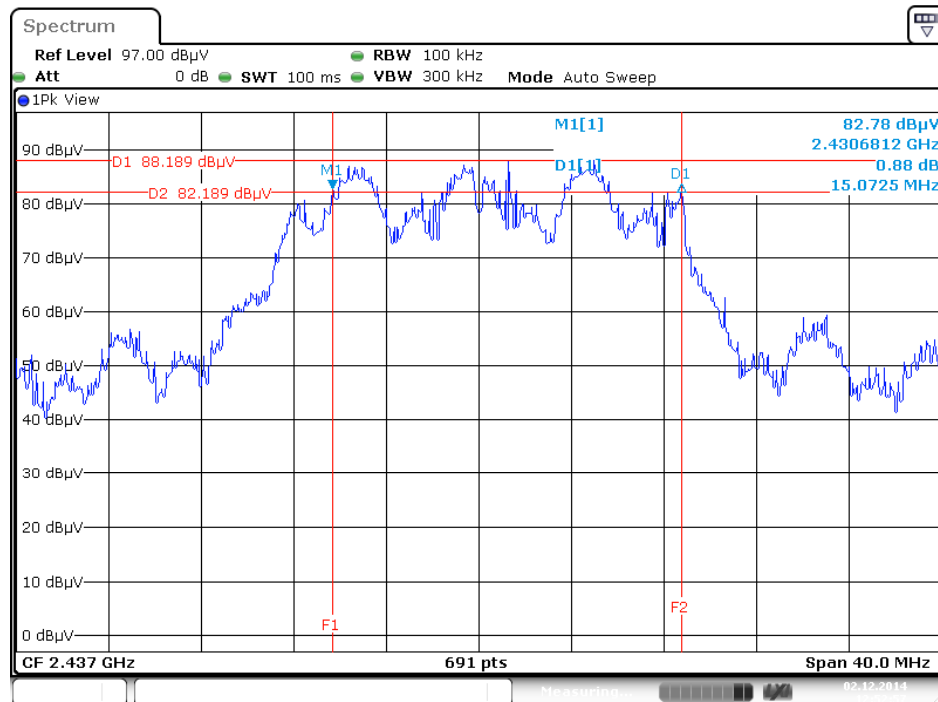


Date: 2 DEC 2014 12:52:58

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

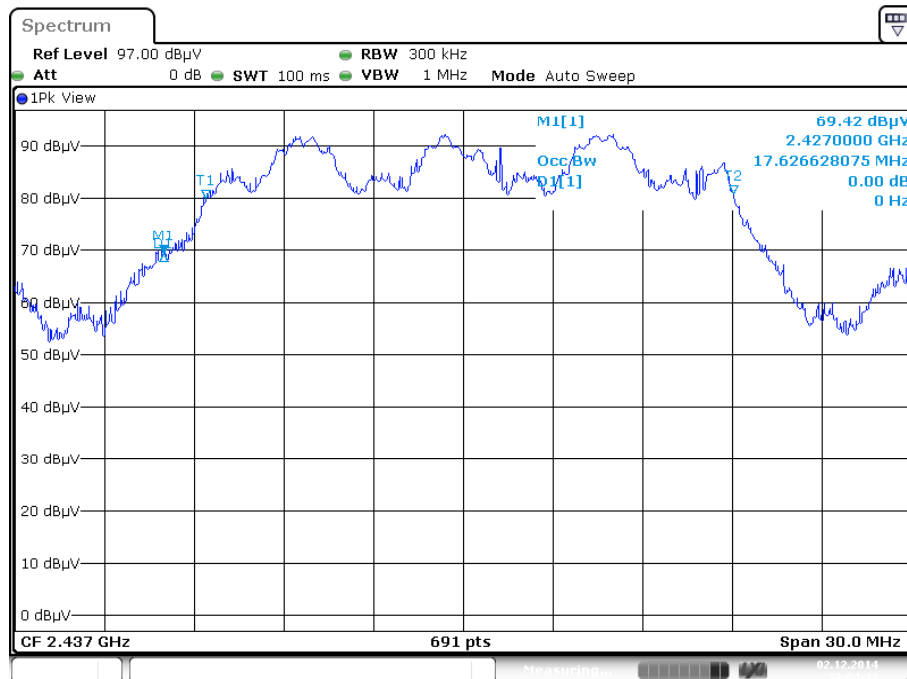


Date: 2 DEC 2014 13:04:44


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3

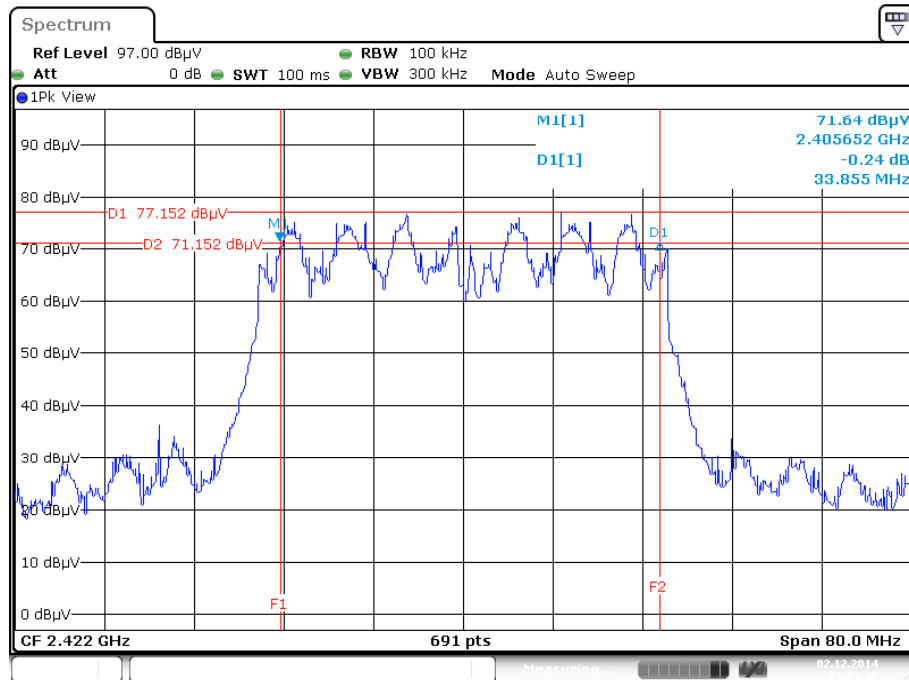


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

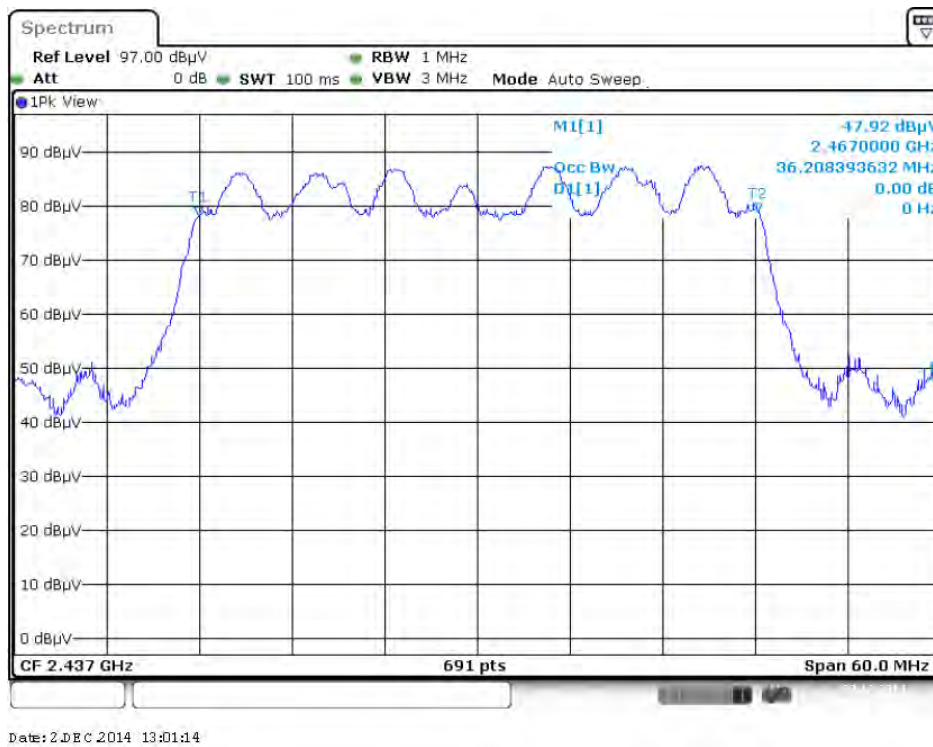


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

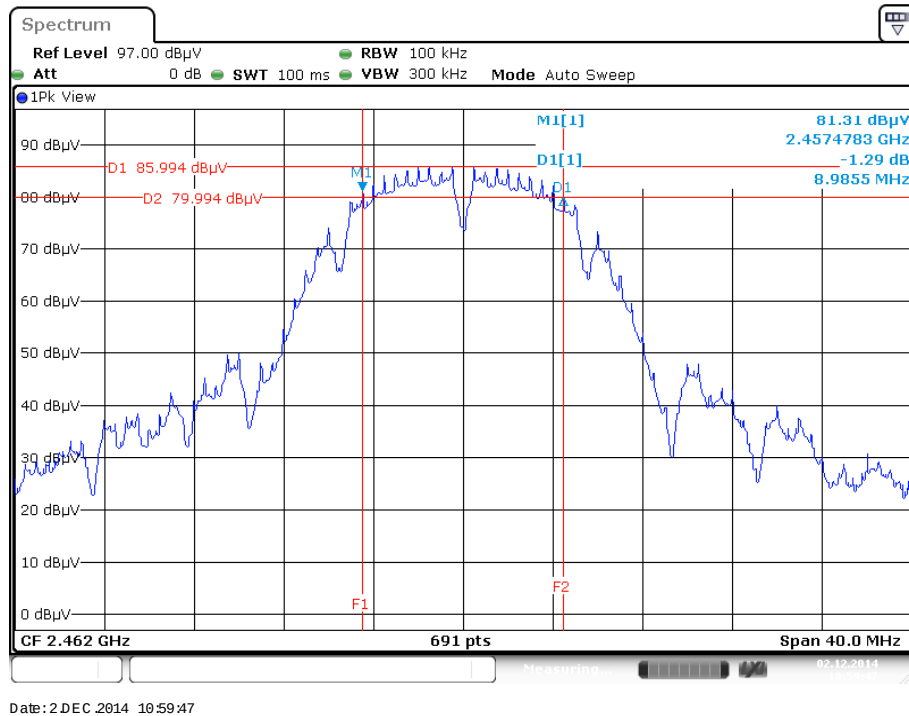


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

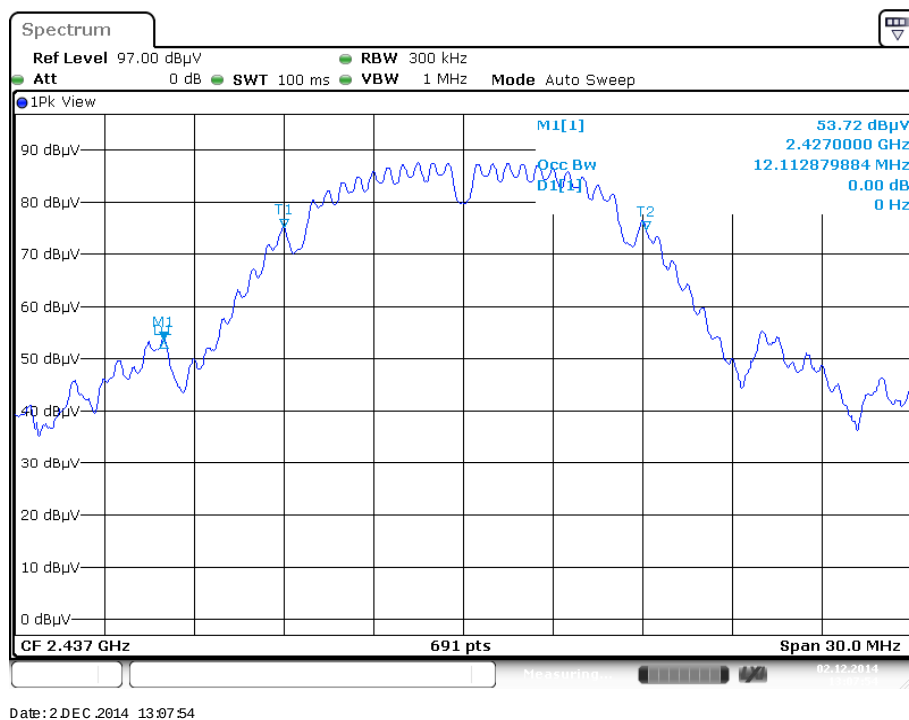

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1

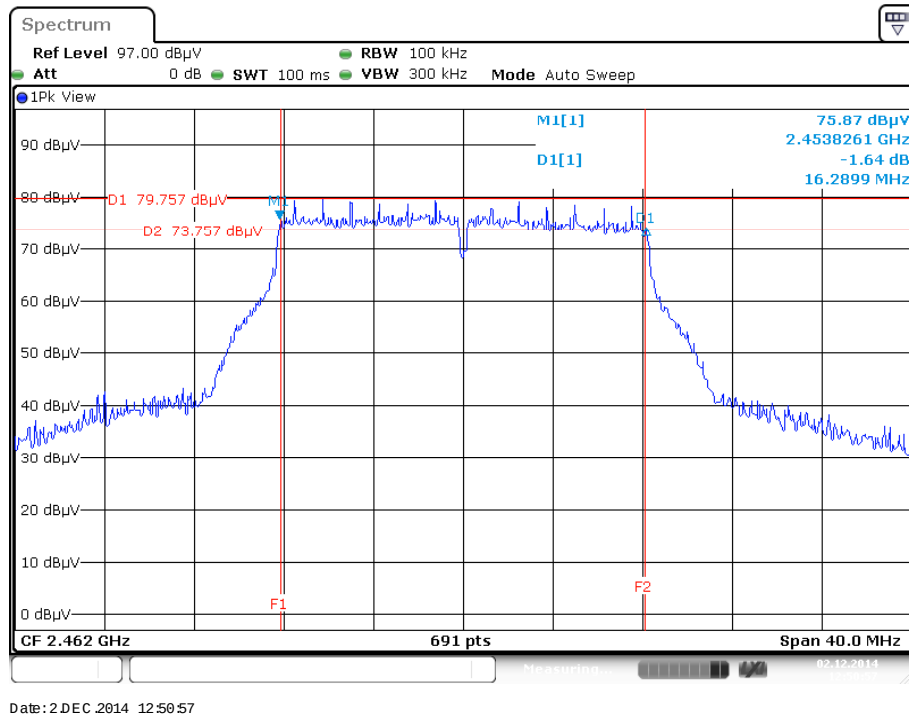

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

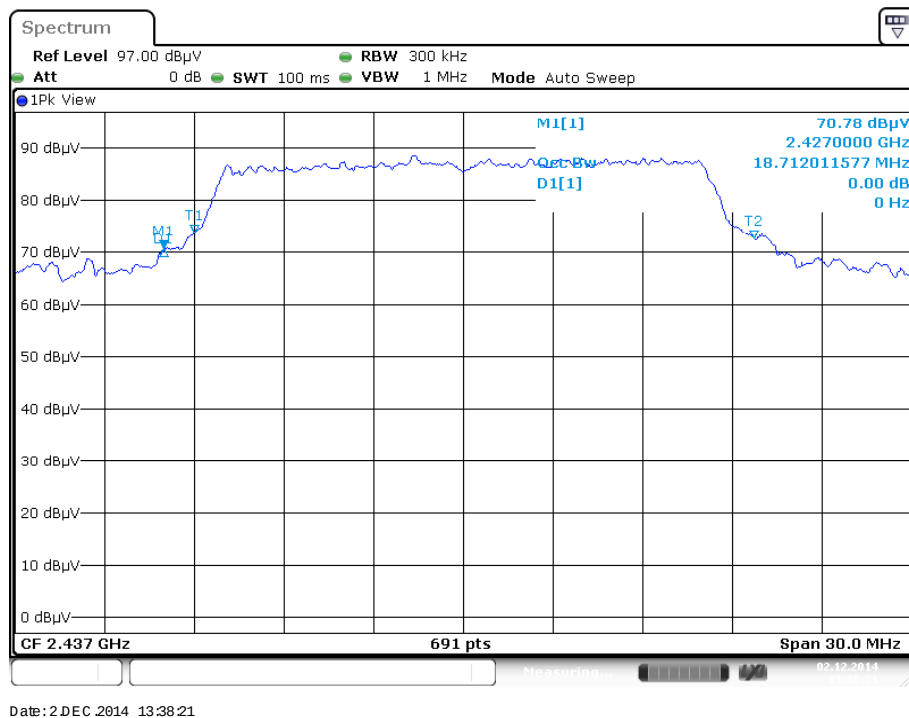

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

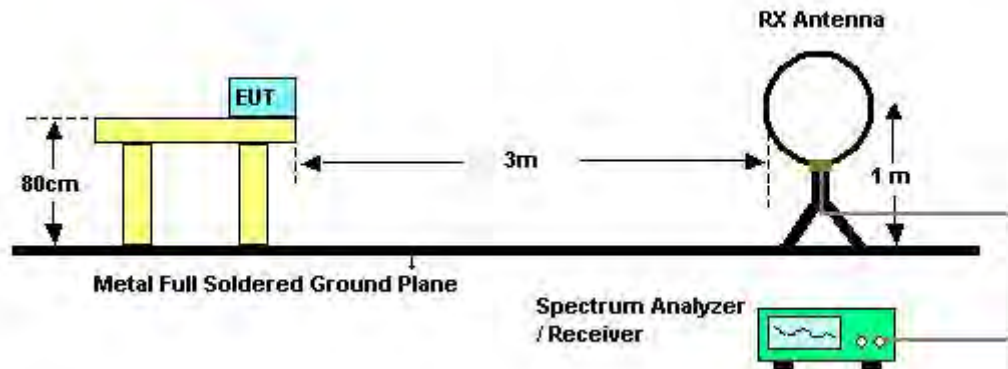

For Radiated Emissions: 30MHz~1GHz

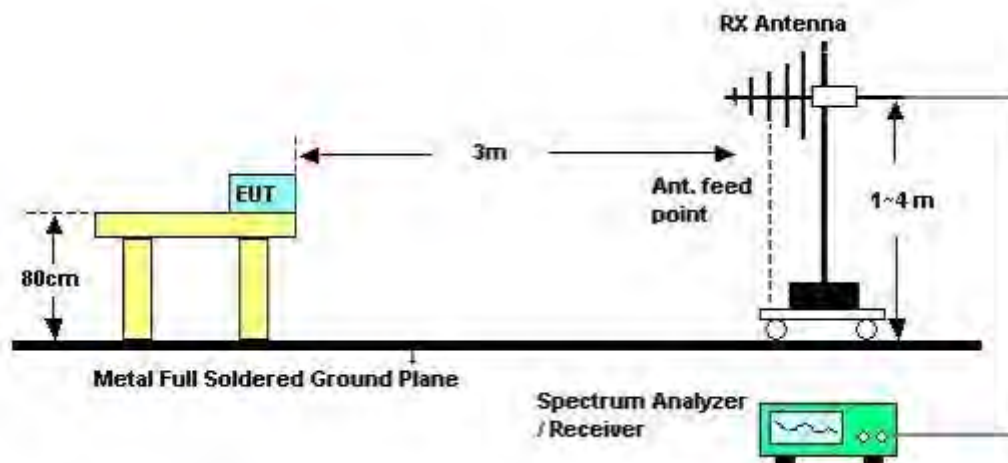

For Radiated Emissions: Above 1GHz

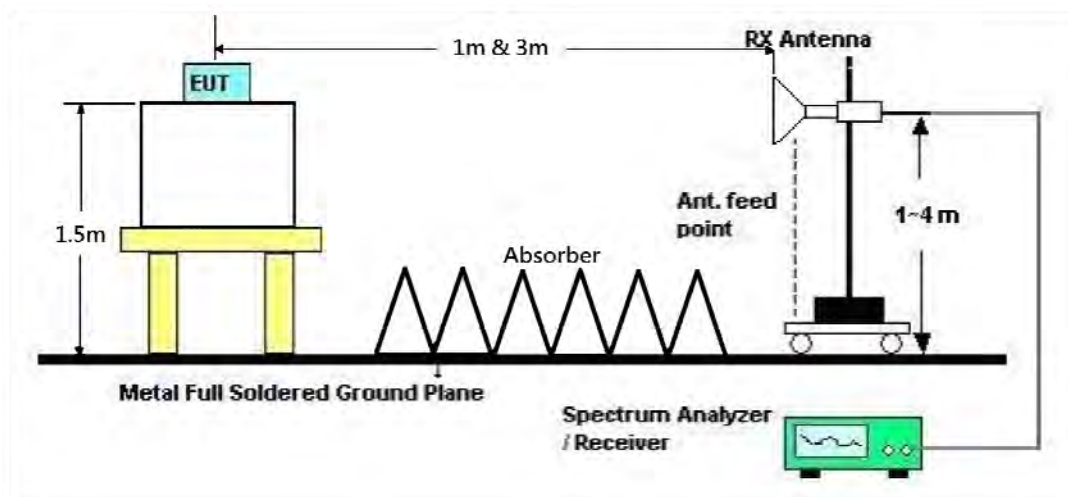

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	Normal Link
Test Date	Nov. 18, 2014	Test Mode	Mode 3

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	Normal Link
Test Mode	Mode 3		

Horizontal

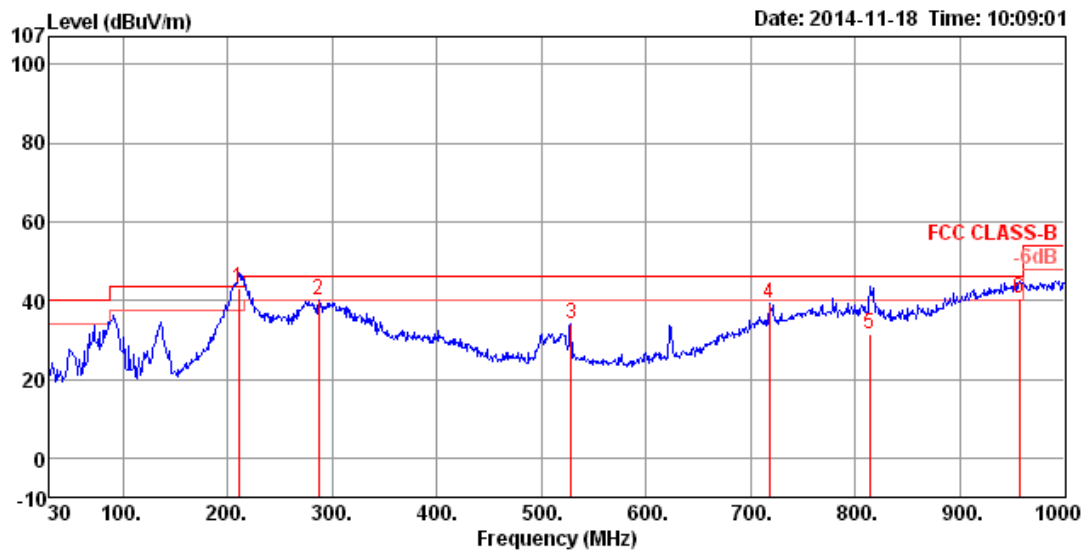

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	210.42	43.21	43.50	-0.29	64.35	1.77	31.42	8.51	HORIZONTAL	136	169	QP
2	287.05	40.21	46.00	-5.79	57.07	2.06	31.54	12.62	HORIZONTAL	82	125	Peak
3	528.58	34.08	46.00	-11.92	45.12	2.89	31.39	17.46	HORIZONTAL	59	100	Peak
4	717.73	39.40	46.00	-6.60	47.95	3.45	31.25	19.25	HORIZONTAL	96	125	Peak
5	813.76	31.38	46.00	-14.62	38.68	3.70	31.21	20.21	HORIZONTAL	164	100	QP
6	956.35	40.52	46.00	-5.48	46.52	4.09	31.10	21.01	HORIZONTAL	281	128	QP

Vertical

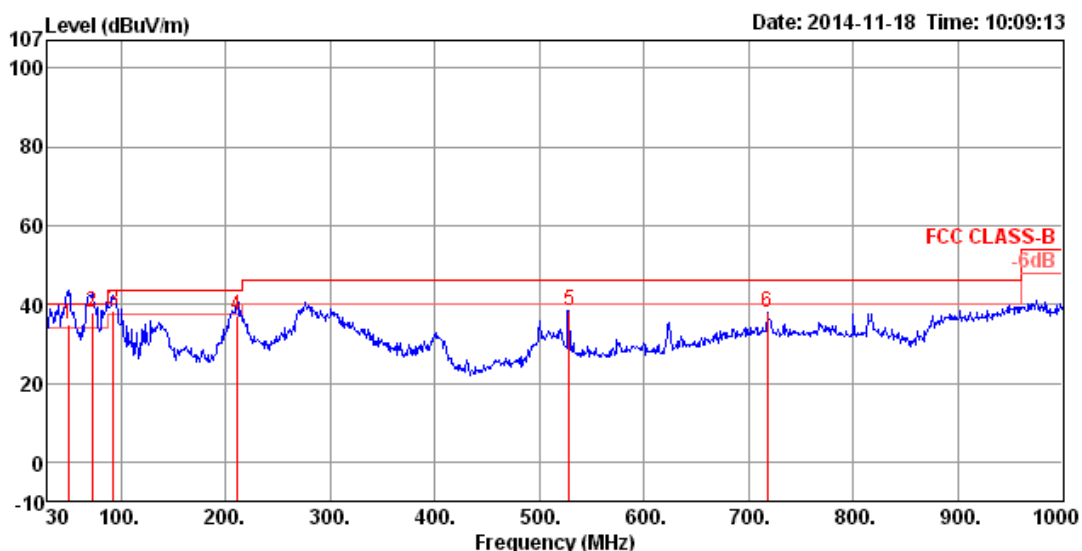

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	49.40	34.86	40.00	-5.14	57.94	0.83	31.79	7.88	VERTICAL	360	100	QP
2	72.68	38.13	40.00	-1.87	63.21	1.01	31.73	5.64	VERTICAL	15	177	QP
3	93.05	38.21	43.50	-5.29	59.36	1.15	31.58	9.28	VERTICAL	281	100	QP
4	210.42	37.11	43.50	-6.39	58.25	1.77	31.42	8.51	VERTICAL	71	100	QP
5	528.58	38.56	46.00	-7.44	49.60	2.89	31.39	17.46	VERTICAL	156	100	Peak
6	717.73	37.92	46.00	-8.08	46.47	3.45	31.25	19.25	VERTICAL	86	100	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 19, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4822.46	49.65	74.00	-24.35	45.59	5.87	33.39	35.20 Peak	104	305	HORIZONTAL
2	4823.74	38.59	54.00	-15.41	34.53	5.87	33.39	35.20 Average	104	305	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.01	50.18	74.00	-23.82	46.12	5.87	33.39	35.20 Peak	231	356	VERTICAL
2	4823.04	38.08	54.00	-15.92	34.02	5.87	33.39	35.20 Average	231	356	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 19, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4873.49	50.39	54.00	-3.61	46.19	5.92	33.48	35.20	Average	100	296 HORIZONTAL
2	4873.62	67.68	74.00	-6.32	63.48	5.92	33.48	35.20	Peak	100	296 HORIZONTAL
3	7314.72	50.44	54.00	-3.56	42.23	7.13	36.51	35.43	Average	207	39 HORIZONTAL
4	7315.74	63.38	74.00	-10.62	55.16	7.14	36.51	35.43	Peak	207	39 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4873.17	48.58	54.00	-5.42	44.38	5.92	33.48	35.20	Average	241	1 VERTICAL
2	4878.23	64.61	74.00	-9.39	60.41	5.92	33.48	35.20	Peak	241	1 VERTICAL
3	7307.60	55.24	74.00	-18.76	47.03	7.13	36.51	35.43	Peak	100	295 VERTICAL
4	7312.67	42.55	54.00	-11.45	34.34	7.13	36.51	35.43	Average	100	295 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 19, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4924.83	34.76	54.00	-19.24	30.41	5.97	33.58	35.20	Average	100	353 HORIZONTAL
2	4924.96	47.43	74.00	-26.57	43.08	5.97	33.58	35.20	Peak	100	353 HORIZONTAL
3	7376.45	48.61	74.00	-25.39	40.29	7.16	36.61	35.45	Peak	100	120 HORIZONTAL
4	7386.83	37.70	54.00	-16.30	29.38	7.17	36.61	35.46	Average	100	120 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4925.86	33.66	54.00	-20.34	29.31	5.97	33.58	35.20	Average	100	30 VERTICAL
2	4937.14	46.03	74.00	-27.97	41.67	5.98	33.58	35.20	Peak	100	30 VERTICAL
3	7386.90	37.12	54.00	-16.88	28.80	7.17	36.61	35.46	Average	100	250 VERTICAL
4	7388.12	49.24	74.00	-24.76	40.92	7.17	36.61	35.46	Peak	100	250 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 20, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4830.54	32.94	54.00	-21.06	28.88	5.87	33.39	35.20	Average	100	283	HORIZONTAL
2	4836.44	44.11	74.00	-29.89	40.04	5.88	33.39	35.20	Peak	100	283	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4824.00	32.68	54.00	-21.32	28.62	5.87	33.39	35.20	Average	100	280	VERTICAL
2	4852.21	45.69	74.00	-28.31	41.57	5.90	33.42	35.20	Peak	100	280	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 20, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4862.14	45.88	74.00	-28.12	41.73	5.90	33.45	35.20	Peak	100	6	HORIZONTAL
2	4874.45	33.63	54.00	-20.37	29.43	5.92	33.48	35.20	Average	100	6	HORIZONTAL
3	7317.35	50.48	74.00	-23.52	42.26	7.14	36.51	35.43	Peak	100	354	HORIZONTAL
4	7321.83	37.24	54.00	-16.76	29.02	7.14	36.51	35.43	Average	100	354	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4861.05	45.63	74.00	-28.37	41.48	5.90	33.45	35.20	Peak	100	356	VERTICAL
2	4873.68	33.35	54.00	-20.65	29.15	5.92	33.48	35.20	Average	100	356	VERTICAL
3	7293.50	49.58	74.00	-24.42	41.40	7.12	36.48	35.42	Peak	100	249	VERTICAL
4	7330.42	37.17	54.00	-16.83	28.93	7.14	36.53	35.43	Average	100	249	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 20, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preampl		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4900.41	32.76	54.00	-21.24	28.52	5.93	33.51	35.20	Average	100	289 HORIZONTAL
2	4912.56	45.61	74.00	-28.39	41.32	5.95	33.54	35.20	Peak	100	289 HORIZONTAL
3	7349.97	37.04	54.00	-16.96	28.76	7.16	36.56	35.44	Average	100	87 HORIZONTAL
4	7358.95	49.29	74.00	-24.71	40.99	7.16	36.59	35.45	Peak	100	87 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preampl		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4899.42	32.57	54.00	-21.43	28.33	5.93	33.51	35.20	Average	100	120 VERTICAL
2	4904.35	46.01	74.00	-27.99	41.75	5.95	33.51	35.20	Peak	100	120 VERTICAL
3	7351.55	36.83	54.00	-17.17	28.55	7.16	36.56	35.44	Average	100	227 VERTICAL
4	7352.36	49.40	74.00	-24.60	41.12	7.16	36.56	35.44	Peak	100	227 VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	Nov. 18, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.00	51.93	54.00	-2.07	47.87	5.87	33.39	35.20	Average	115	293	HORIZONTAL
2	4824.10	58.75	74.00	-15.25	54.69	5.87	33.39	35.20	Peak	115	293	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.95	58.08	74.00	-15.92	54.02	5.87	33.39	35.20	Peak	148	344	VERTICAL
2	4823.97	51.45	54.00	-2.55	47.39	5.87	33.39	35.20	Average	148	344	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 6 / Chain 1
Test Date	Nov. 18, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4873.65	55.42	74.00	-18.58	51.22	5.92	33.48	35.20	Peak	100	295	HORIZONTAL
2	4873.97	53.49	54.00	-0.51	49.29	5.92	33.48	35.20	Average	100	295	HORIZONTAL
3	7310.26	47.65	54.00	-6.35	39.44	7.13	36.51	35.43	Average	100	296	HORIZONTAL
4	7312.44	55.08	74.00	-18.92	46.87	7.13	36.51	35.43	Peak	100	296	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4873.90	52.91	74.00	-21.09	48.71	5.92	33.48	35.20	Peak	172	347	VERTICAL
2	4873.96	52.80	54.00	-1.20	48.60	5.92	33.48	35.20	Average	172	347	VERTICAL
3	7310.20	41.61	54.00	-12.39	33.40	7.13	36.51	35.43	Average	100	310	VERTICAL
4	7312.54	52.33	74.00	-21.67	44.12	7.13	36.51	35.43	Peak	100	310	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 11 / Chain 1
Test Date	Nov. 18, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.90	58.76	74.00	-15.24	54.41	5.97	33.58	35.20	Peak	110	295	HORIZONTAL
2	4923.98	53.61	54.00	-0.39	49.26	5.97	33.58	35.20	Average	110	295	HORIZONTAL
3	7384.99	57.67	74.00	-16.33	49.35	7.17	36.61	35.46	Peak	100	41	HORIZONTAL
4	7385.30	51.53	54.00	-2.47	43.21	7.17	36.61	35.46	Average	100	41	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.90	52.96	74.00	-21.04	48.61	5.97	33.58	35.20	Peak	100	359	VERTICAL
2	4923.98	47.20	54.00	-6.80	42.85	5.97	33.58	35.20	Average	100	359	VERTICAL
3	7383.26	53.85	74.00	-20.15	45.53	7.16	36.61	35.45	Peak	100	316	VERTICAL
4	7385.25	45.60	54.00	-8.40	37.28	7.17	36.61	35.46	Average	100	316	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1 / Chain 1
Test Date	Nov. 19, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.80	51.68	74.00	-22.32	47.62	5.87	33.39	35.20	Peak	108	303	HORIZONTAL
2	4824.34	35.95	54.00	-18.05	31.89	5.87	33.39	35.20	Average	108	303	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.47	35.50	54.00	-18.50	31.44	5.87	33.39	35.20	Average	125	360	VERTICAL
2	4824.28	48.85	74.00	-25.15	44.79	5.87	33.39	35.20	Peak	125	360	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 6 / Chain 1
Test Date	Nov. 19, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4872.33	68.07	74.00	-5.93	63.87	5.92	33.48	35.20	Peak	101	300	HORIZONTAL
2	4875.80	52.16	54.00	-1.84	47.96	5.92	33.48	35.20	Average	101	300	HORIZONTAL
3	7312.60	47.63	54.00	-6.37	39.42	7.13	36.51	35.43	Average	100	42	HORIZONTAL
4	7314.27	61.72	74.00	-12.28	53.51	7.13	36.51	35.43	Peak	100	42	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4875.92	49.20	54.00	-4.80	45.00	5.92	33.48	35.20	Average	120	313	VERTICAL
2	4876.76	63.52	74.00	-10.48	59.32	5.92	33.48	35.20	Peak	120	313	VERTICAL
3	7304.91	57.78	74.00	-16.22	49.59	7.13	36.48	35.42	Peak	100	321	VERTICAL
4	7314.72	43.23	54.00	-10.77	35.02	7.13	36.51	35.43	Average	100	321	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 11 / Chain 1
Test Date	Nov. 19, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.22	34.76	54.00	-19.24	30.41	5.97	33.58	35.20	Average	100	297	HORIZONTAL
2	4927.13	52.49	74.00	-21.51	48.14	5.97	33.58	35.20	Peak	100	297	HORIZONTAL
3	7382.59	39.18	54.00	-14.82	30.86	7.16	36.61	35.45	Average	100	42	HORIZONTAL
4	7382.97	54.11	74.00	-19.89	45.79	7.16	36.61	35.45	Peak	100	42	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4925.12	46.92	74.00	-27.08	42.57	5.97	33.58	35.20	Peak	100	258	VERTICAL
2	4926.92	33.17	54.00	-20.83	28.82	5.97	33.58	35.20	Average	100	258	VERTICAL
3	7382.06	50.01	74.00	-23.99	41.69	7.16	36.61	35.45	Peak	100	235	VERTICAL
4	7388.87	37.25	54.00	-16.75	28.93	7.17	36.61	35.46	Average	100	235	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 25, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Aux Factor	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	
1	2389.80	72.93	74.00	-1.07	41.39	4.43	27.11	0.00	0.00	137	83	HORIZONTAL
2	2390.00	53.97	54.00	-0.03	22.42	4.44	27.11	0.00	0.00	137	83	HORIZONTAL
3	2413.60	109.09			77.47	4.46	27.16	0.00	0.00	137	83	HORIZONTAL
4	2419.80	119.43			87.76	4.46	27.21	0.00	0.00	137	83	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2388.55	66.36	74.00	-7.64	34.22	4.09	28.05	0.00 Peak	139	268	HORIZONTAL
2	2390.00	53.94	54.00	-0.06	21.80	4.09	28.05	0.00 Average	139	268	HORIZONTAL
3	2439.03	116.48			84.17	4.13	28.18	0.00 Average	139	268	HORIZONTAL
4	2439.89	123.66			91.35	4.13	28.18	0.00 Peak	139	268	HORIZONTAL
5	2483.50	53.94	54.00	-0.06	21.52	4.16	28.26	0.00 Average	139	268	HORIZONTAL
6	2483.79	62.60	74.00	-11.40	30.18	4.16	28.26	0.00 Peak	139	268	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Aux Factor	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	
1	2457.20	118.84			87.04	4.50	27.30	0.00	0.00	129	88	HORIZONTAL
2	2460.00	108.87			77.07	4.50	27.30	0.00	0.00	129	88	HORIZONTAL
3	2483.50	53.93	54.00	-0.07	22.06	4.52	27.35	0.00	0.00	129	88	HORIZONTAL
4	2485.20	70.57	74.00	-3.43	38.70	4.52	27.35	0.00	0.00	129	88	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 25, 2014		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Aux Factor	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	
1	2389.60	68.07	74.00	-5.93	36.53	4.43	27.11	0.00	0.00	163	93	HORIZONTAL
2	2390.00	53.83	54.00	-0.17	22.28	4.44	27.11	0.00	0.00	163	93	HORIZONTAL
3	2418.00	104.00			72.38	4.46	27.16	0.00	0.00	163	93	HORIZONTAL
4	2419.60	114.33			82.66	4.46	27.21	0.00	0.00	163	93	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Aux Factor	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	
1	2388.60	67.90	74.00	-6.10	36.36	4.43	27.11	0.00	0.00	157	87	HORIZONTAL
2	2390.00	52.72	54.00	-1.28	21.17	4.44	27.11	0.00	0.00	157	87	HORIZONTAL
3	2435.40	107.61			75.92	4.48	27.21	0.00	0.00	157	87	HORIZONTAL
4	2439.40	117.66			85.92	4.48	27.26	0.00	0.00	157	87	HORIZONTAL
5	2483.50	70.15	74.00	-3.85	38.28	4.52	27.35	0.00	0.00	157	87	HORIZONTAL
6	2483.50	53.97	54.00	-0.03	22.10	4.52	27.35	0.00	0.00	157	87	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Aux Factor	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	
1	2456.40	104.16			72.36	4.50	27.30	0.00	0.00	135	89	HORIZONTAL
2	2457.60	113.87			82.07	4.50	27.30	0.00	0.00	135	89	HORIZONTAL
3	2483.50	53.82	54.00	-0.18	21.95	4.52	27.35	0.00	0.00	135	89	HORIZONTAL
4	2487.60	68.77	74.00	-5.23	36.84	4.53	27.40	0.00	0.00	135	89	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	Nov. 19, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2377.22	62.98	74.00	-11.02	30.89	4.08	28.01	0.00	Peak	171	263
2	2387.16	53.53	54.00	-0.47	21.39	4.09	28.05	0.00	Average	171	263
3	2410.24	114.21			82.01	4.11	28.09	0.00	Average	171	263
4	2411.04	117.88			85.68	4.11	28.09	0.00	Peak	171	263

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2385.72	62.98	74.00	-11.02	30.84	4.09	28.05	0.00	Peak	174	264
2	2390.00	48.71	54.00	-5.29	16.57	4.09	28.05	0.00	Average	174	264
3	2436.04	119.86			87.56	4.12	28.18	0.00	Peak	174	264
4	2438.60	116.34			84.03	4.13	28.18	0.00	Average	174	264
5	2483.50	49.66	54.00	-4.34	17.24	4.16	28.26	0.00	Average	174	264
6	2487.00	62.05	74.00	-11.95	29.59	4.16	28.30	0.00	Peak	174	264

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2383.47	61.01	74.00	-12.99	28.88	4.08	28.05	0.00	Peak	172	264
2	2384.76	50.36	54.00	-3.64	18.23	4.08	28.05	0.00	Average	172	264
3	2460.40	113.90			81.54	4.14	28.22	0.00	Average	172	264
4	2461.36	117.22			84.86	4.14	28.22	0.00	Peak	172	264
5	2486.36	50.54	54.00	-3.46	18.08	4.16	28.30	0.00	Average	172	264
6	2487.96	63.15	74.00	-10.85	30.68	4.17	28.30	0.00	Peak	172	264

Item 3, 4 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
Test Date	Nov. 19, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.56	73.23	74.00	-0.77	41.09	4.09	28.05	0.00	Peak	171	266	HORIZONTAL
2	2390.00	53.96	54.00	-0.04	21.82	4.09	28.05	0.00	Average	171	266	HORIZONTAL
3	2409.12	104.99			72.79	4.11	28.09	0.00	Average	171	266	HORIZONTAL
4	2410.24	116.21			84.01	4.11	28.09	0.00	Peak	171	266	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.24	68.64	74.00	-5.36	36.50	4.09	28.05	0.00	Peak	174	262	HORIZONTAL
2	2390.00	52.36	54.00	-1.64	20.22	4.09	28.05	0.00	Average	174	262	HORIZONTAL
3	2435.40	122.14			89.84	4.12	28.18	0.00	Peak	174	262	HORIZONTAL
4	2436.04	111.16			78.86	4.12	28.18	0.00	Average	174	262	HORIZONTAL
5	2483.50	52.56	54.00	-1.44	20.14	4.16	28.26	0.00	Average	174	262	HORIZONTAL
6	2484.12	65.91	74.00	-8.09	33.49	4.16	28.26	0.00	Peak	174	262	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2454.47	105.49			73.13	4.14	28.22	0.00	Average	171	265	HORIZONTAL
2	2460.24	115.95			83.59	4.14	28.22	0.00	Peak	171	265	HORIZONTAL
3	2483.50	53.99	54.00	-0.01	21.57	4.16	28.26	0.00	Average	171	265	HORIZONTAL
4	2483.64	72.39	74.00	-1.61	39.97	4.16	28.26	0.00	Peak	171	265	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

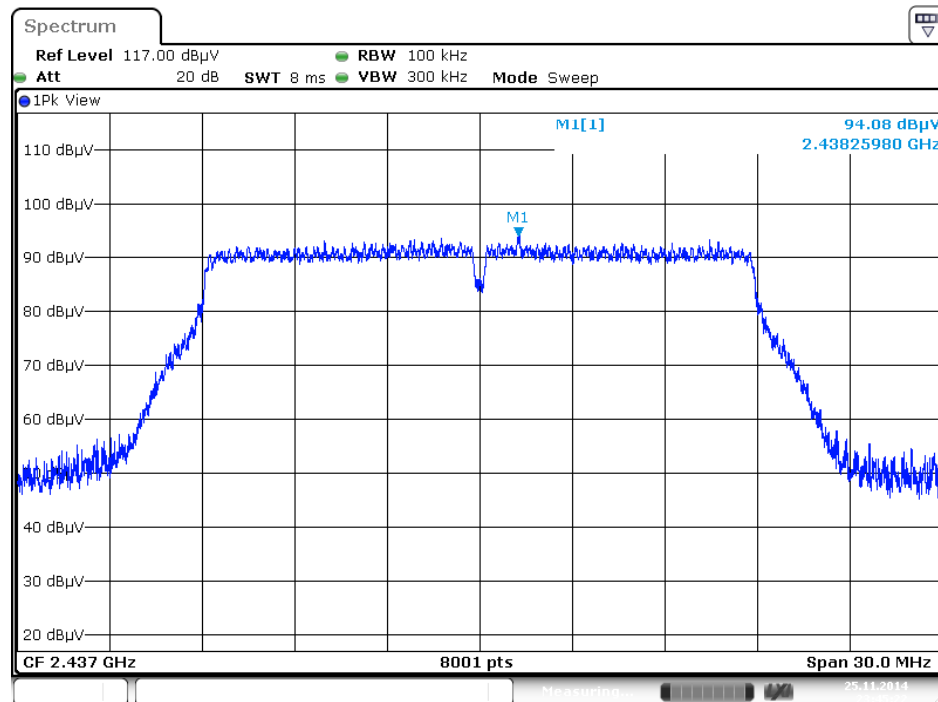


Date: 25.11.2014 23:45:22

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

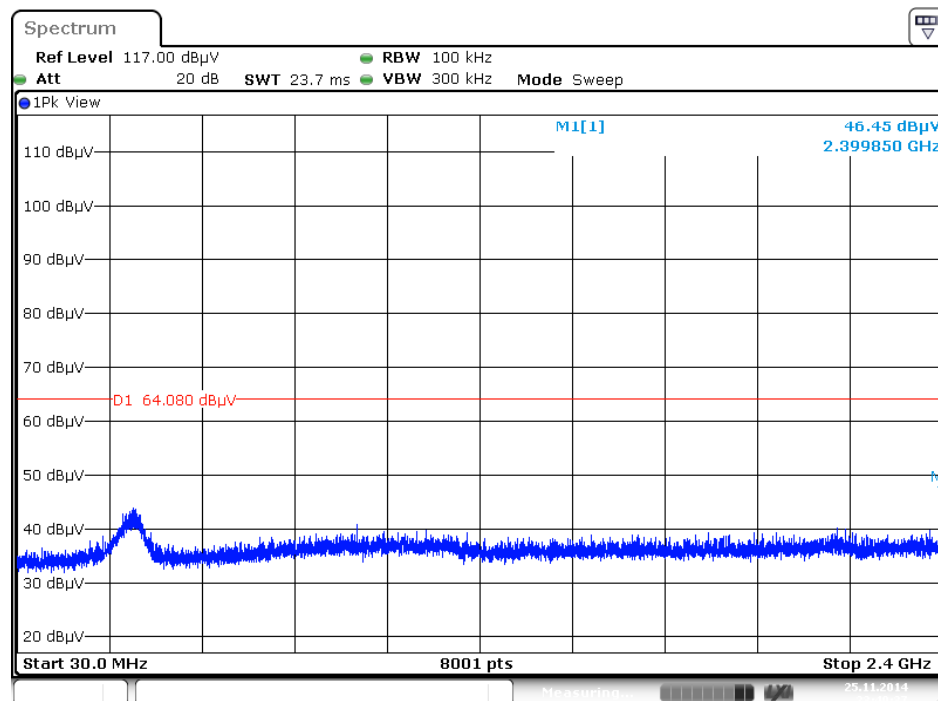


Date: 25.11.2014 23:49:37

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

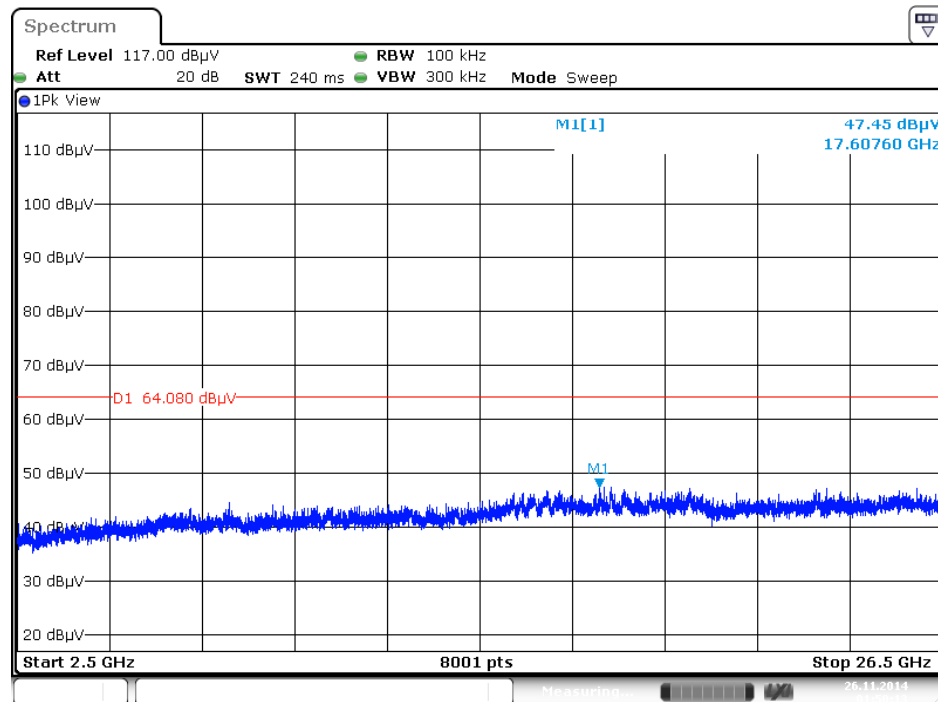


Date: 26.NOV.2014 01:50:13

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

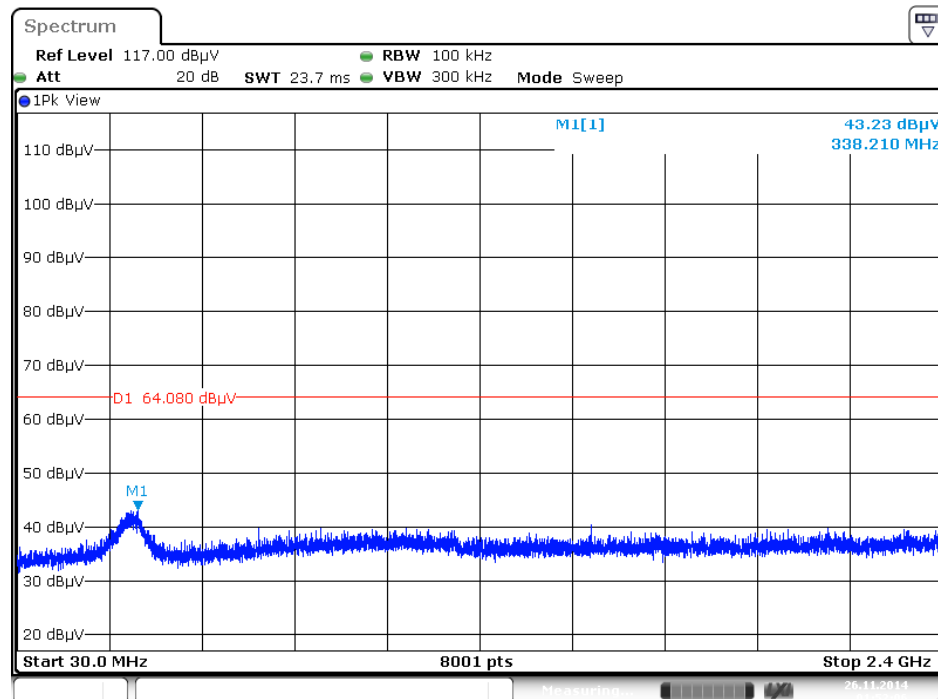

Date: 26.NOV.2014 01:52:06

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

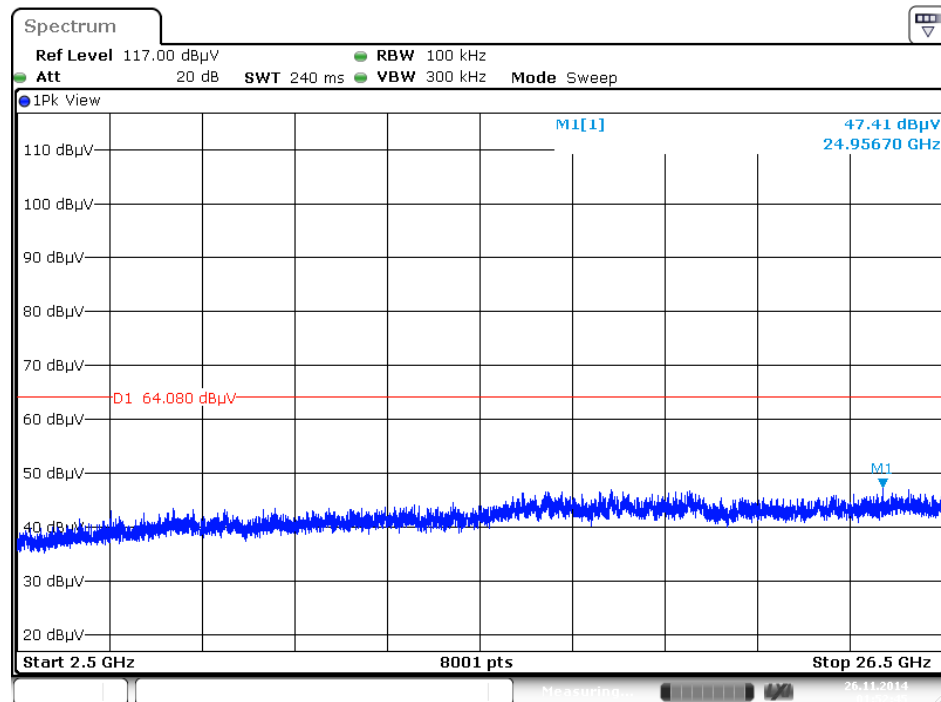

Date: 26.10.2014 01:52:46



Spectrum

Ref Level 117.00 dBμV
Att 20 dB SWT 8 ms RBW 100 kHz VBW 300 kHz Mode Sweep

1Pk View

M1[1] 90.80 dBμV
2.44569890 GHz

M1

CF 2.437 GHz 8001 pts Span 60.0 MHz

Measuring...

25.11.2014

Spectrum

Ref Level 117.00 dBμV RBW 100 kHz

Att 20 dB SWT 23.7 ms VBW 300 kHz Mode Sweep

1Pk View


M1[1] 45.89 dBμV 2.399260 GHz

D1 60.800 dBμV

Start 30.0 MHz 8001 pts Stop 2.4 GHz


Issued Date : Dec. 12, 2014

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

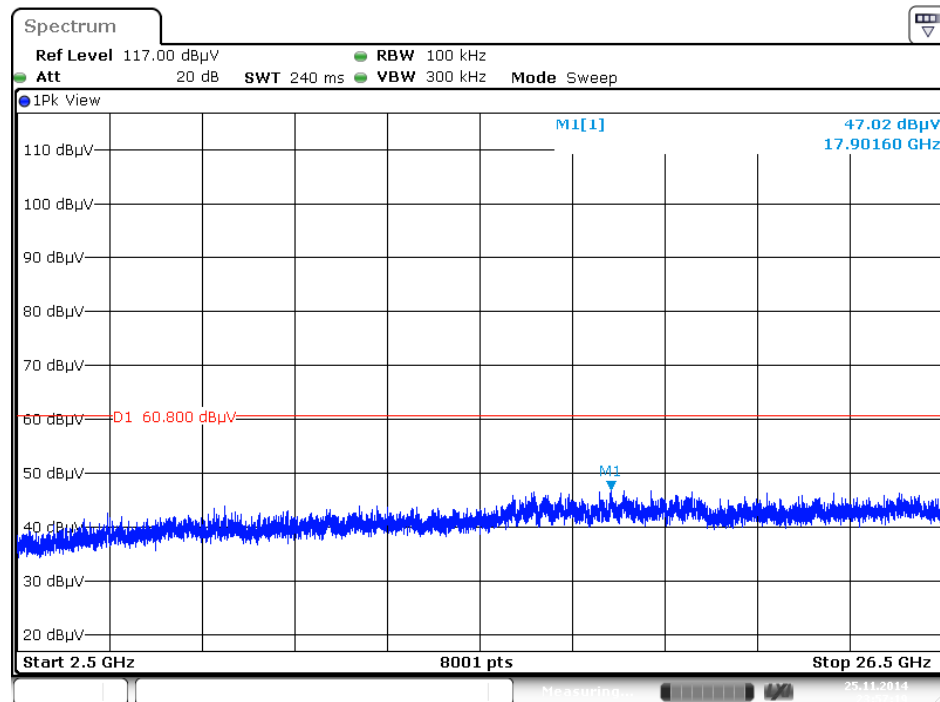


Date: 25.10.2014 23:57:19

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

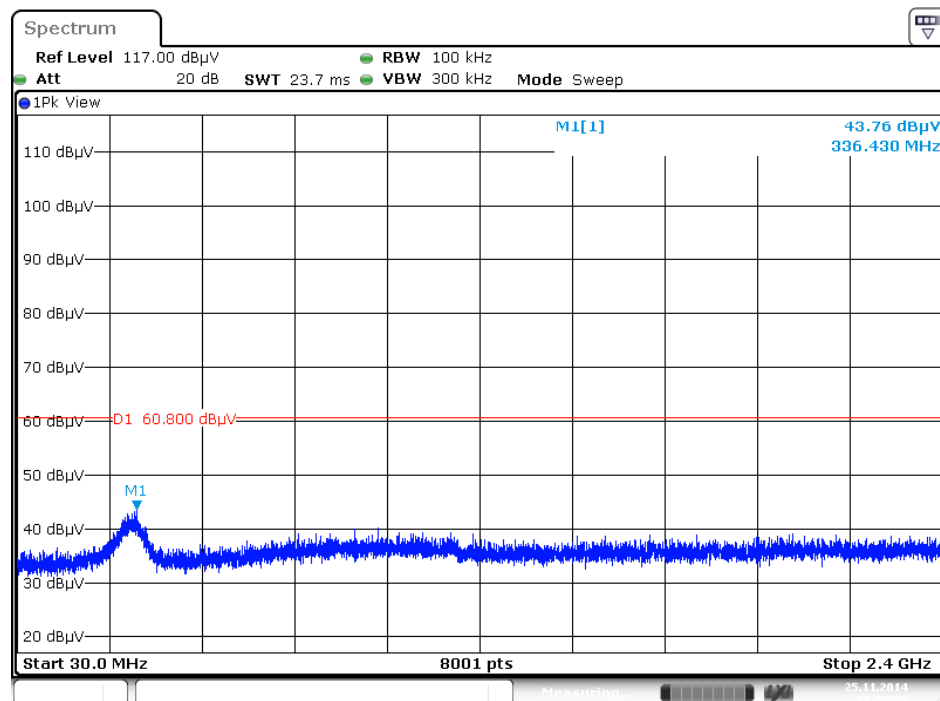


Date: 25.10.2014 23:58:59

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

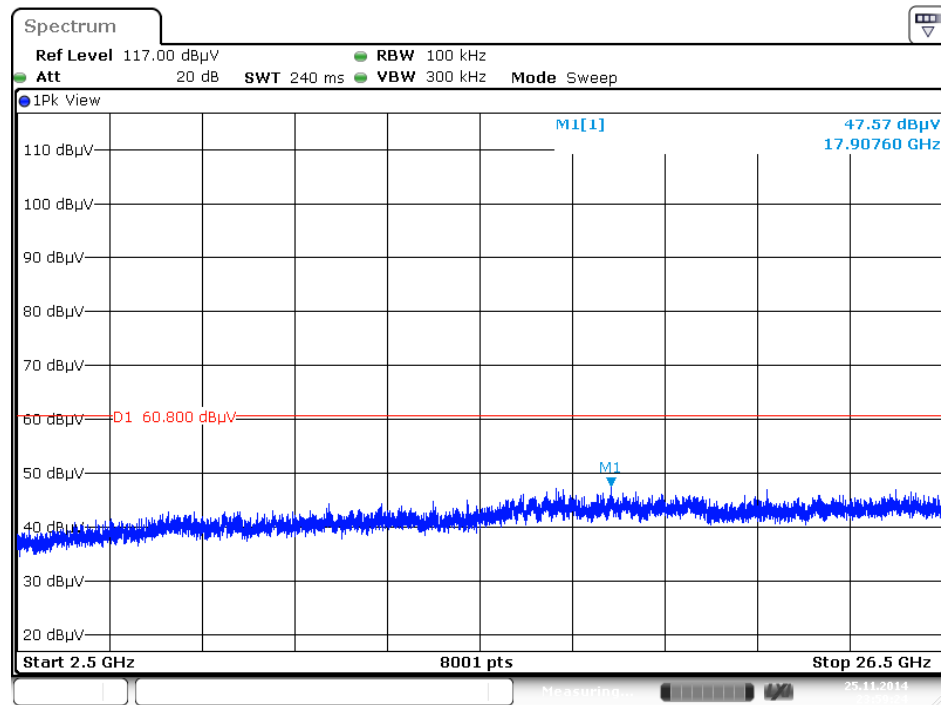


Plot on Configuration IEEE 802.11b / Reference Level

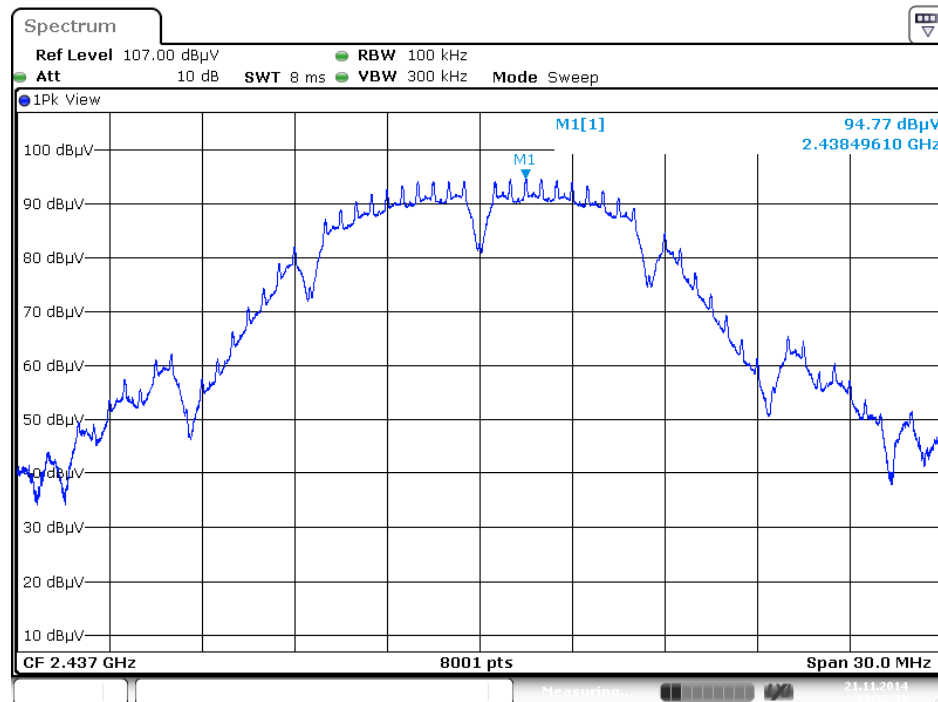


Date: 21.10.2014 19:56:39

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

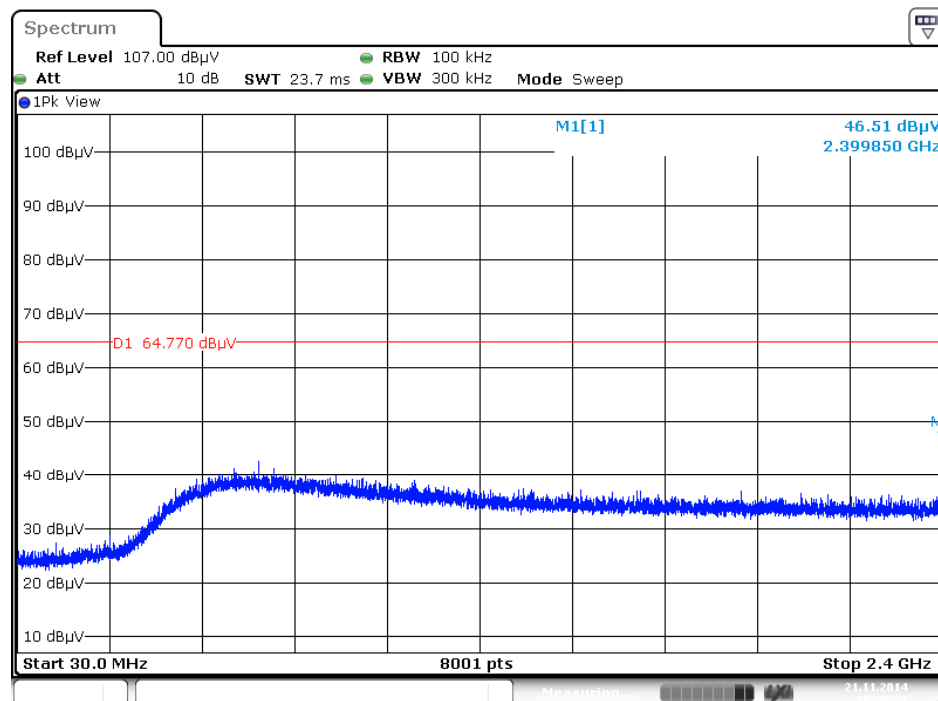


Date: 21.10.2014 19:58:58

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

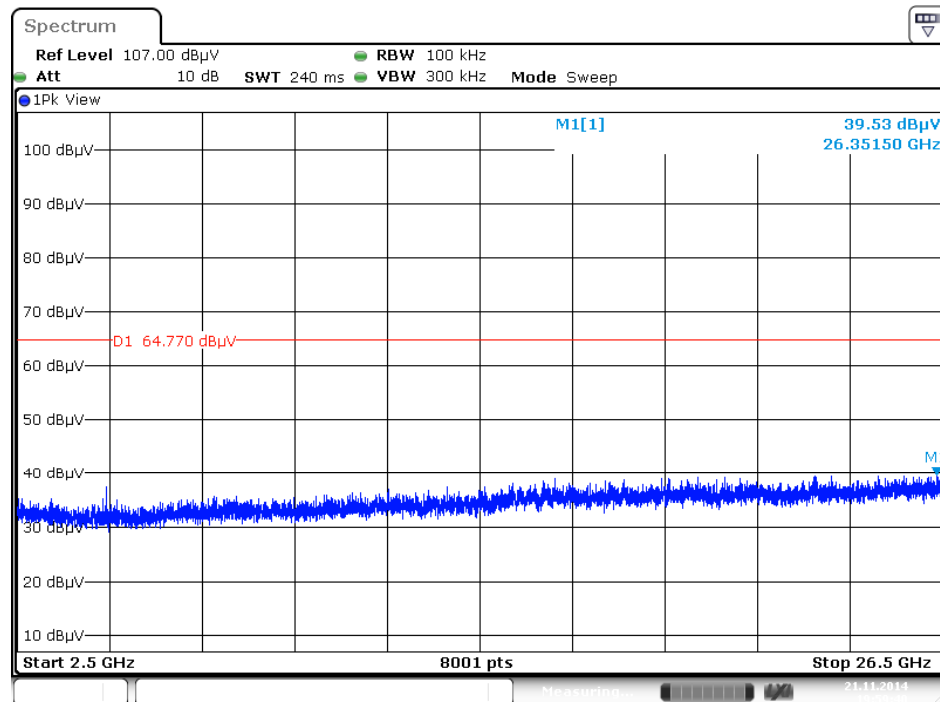


Date: 21.NOV.2014 19:59:40

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

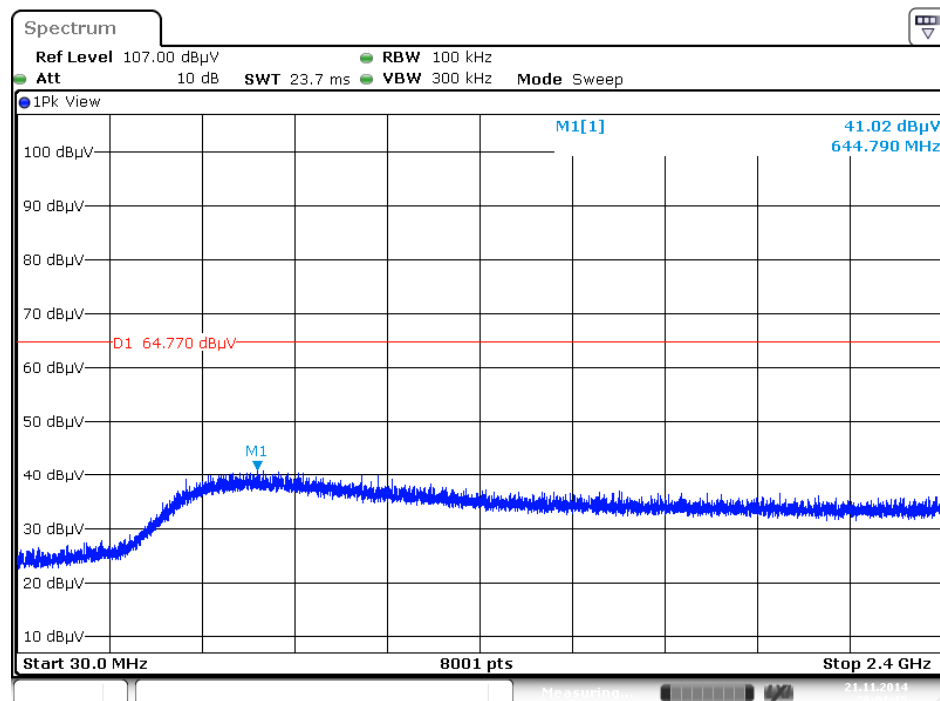


Date: 21.NOV.2014 20:01:15

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

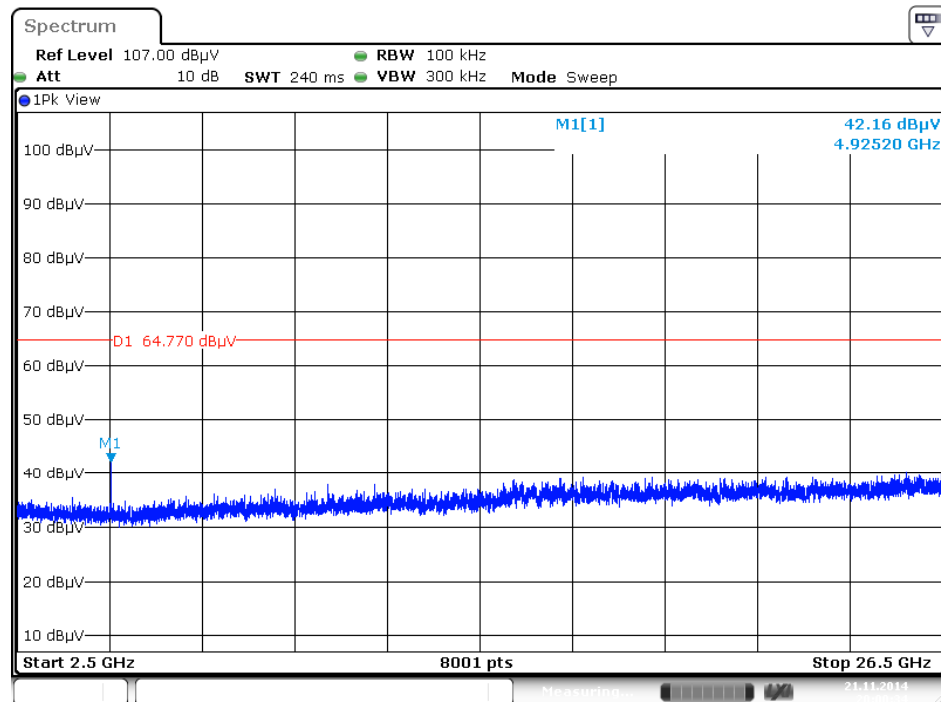


Date: 21.10.2014 20:00:34

Plot on Configuration IEEE 802.11g / Reference Level

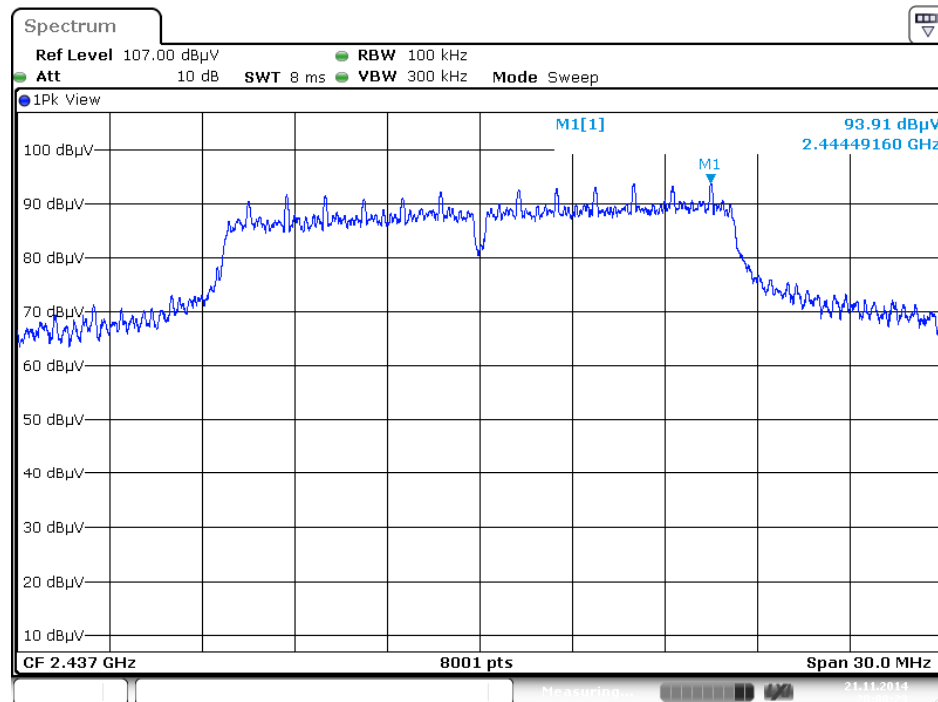


Date: 21.10.2014 20:08:23

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

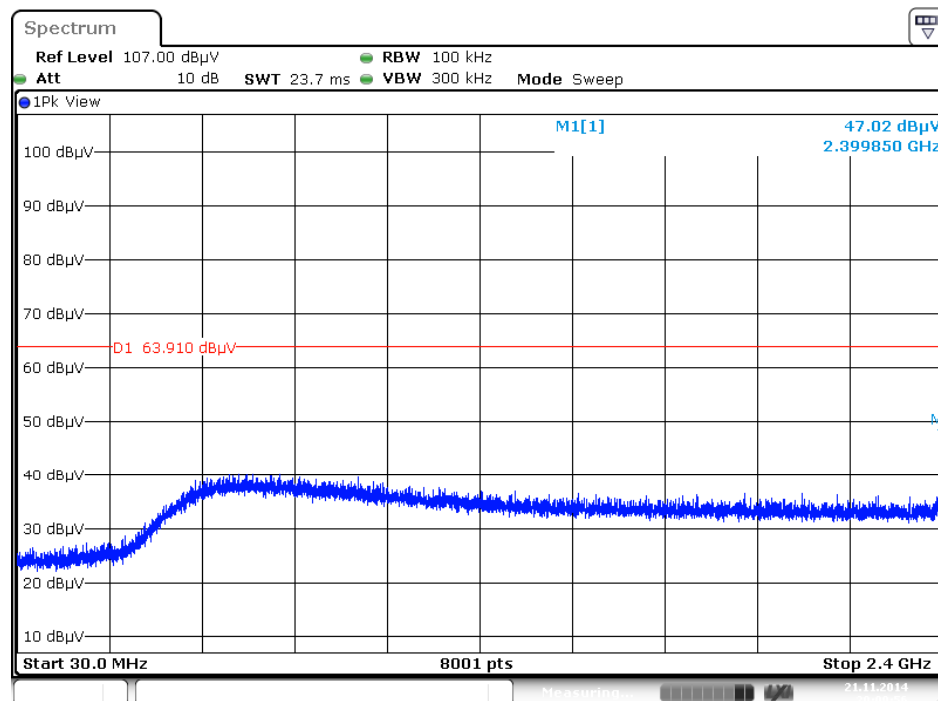


Date: 21.10.2014 20:09:55

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

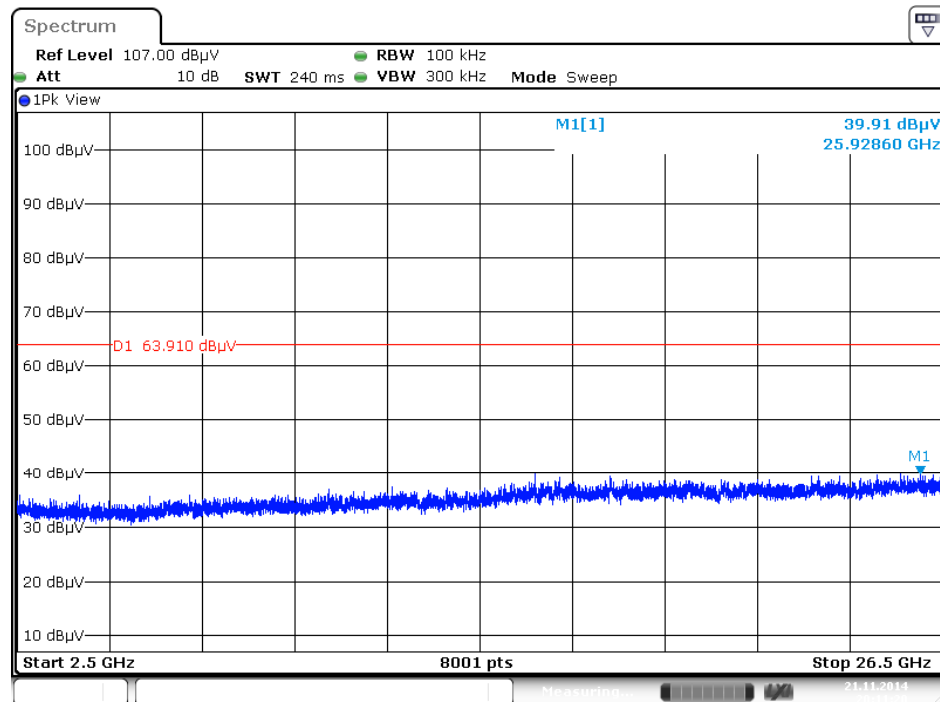


Date: 21.10 V. 2014 20:11:20

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

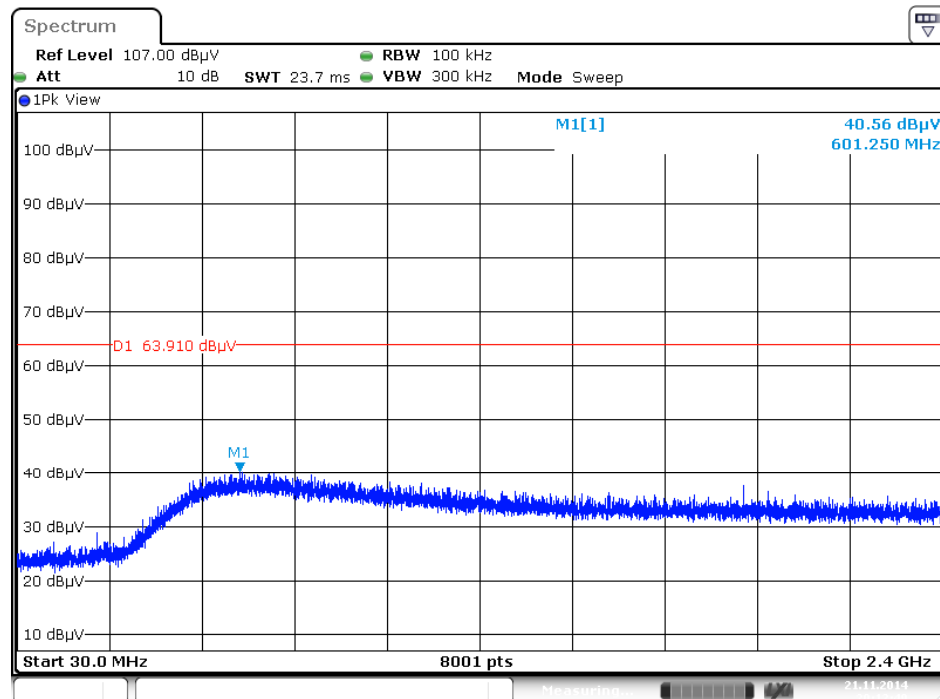

Date: 21.10 V. 2014 20:12:49

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

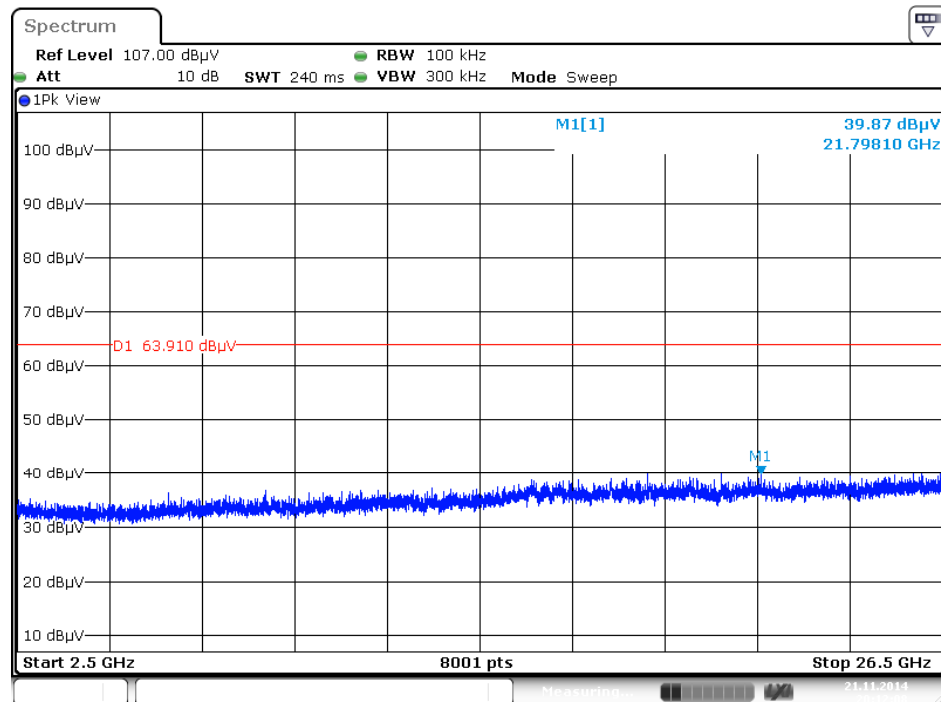

Date: 21.10.2014 20:12:09

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	101026	9kHz~40GHz	Aug. 28, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	--	26GHz ~ 40GHz	Feb. 17, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Dec. 18, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%