

IA.00340.LB.2FI (PRO MINI V5.0)**Antenna Specification****1. Application:**

This application shall apply for antenna unit which shall be used such as automotive, **conventional communications, smart home, etc..**

2.Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
GPS/WIFI2.4/5.8G	1575.42/2400-2500/5150-5850

2-2. Impedance

50 ohm nominal

2-3. VSWR**2-3-1.Measurement frequency points and VSWR value**

Frequency Band(MHz)	1575.42	2400	2500	5150	5850
2-3-3. Typical Value:	1.75	1.74	1.25	1.93	1.49

2-3-2. VSWR


Frequency Band(MHz)	1575.42	2400	2500	5150	5850
2-3-3. Typical Value:	≤2	≤2	≤2	≤2	≤2

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 kingRF Electronics Technclogy Co. Ltd
SCALE:	UNIT: mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE: IA.0340.LB.2FI Antenna Specification		
		SPEC REV.
		P0

2-3-4 Measuring Method

1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR.
2. Keeping this jig away from metal at least 20 cm

2-3-5 Picture

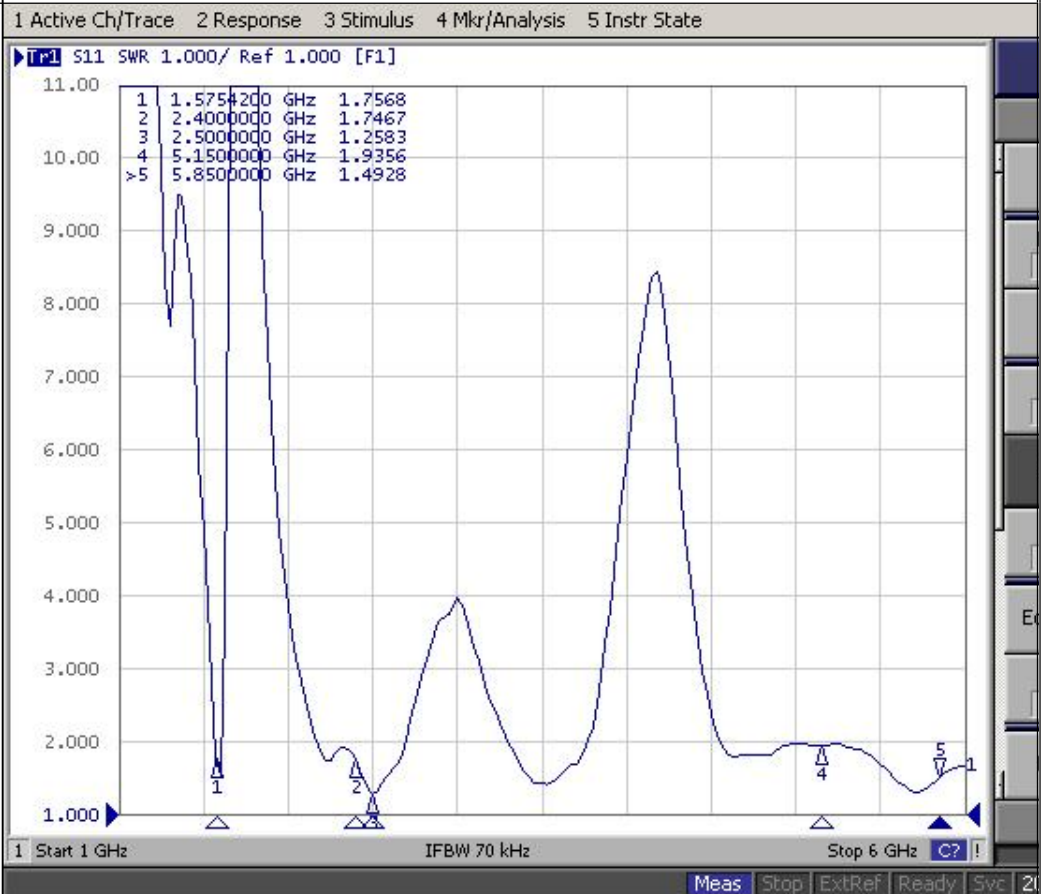

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



kingRF Electronics Technclogy Co. Ltd

SCALE:

UNIT: mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen

APPROVED BY: YS

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: IA.0340.LB.2FI Antenna Specification

SPEC REV.


P0

2-4. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

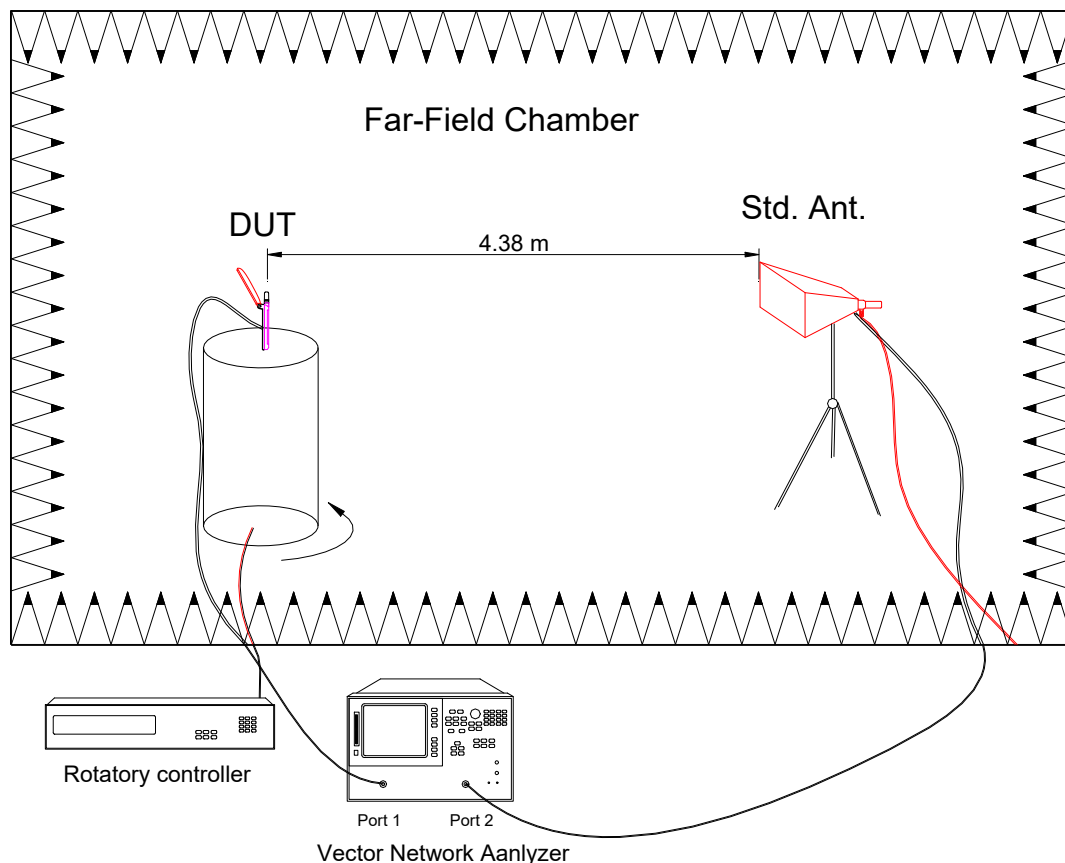

1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 kingRF Electronics Technclogy Co. Ltd
SCALE:	UNIT: mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE: IA.0340.LB.2FI Antenna Specification		SPEC REV. P0


2-4-1 Efficiency and Gain

GPS

1573	48.22	-2.35	2.63
1574	50.11	-2.21	2.79
1575	51.66	-2.1	2.91
1576	52.64	-2.03	2.99
1577	52.94	-2.01	3.02

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	59.43	-2.26	2.35
2410	59.63	-2.25	2.22
2420	58.21	-2.35	2.16
2430	56.58	-2.47	1.8
2440	56.41	-2.49	1.84
2450	58.32	-2.34	1.98
2460	61.13	-2.14	1.83
2470	50.43	-2.97	0.99
2480	59.07	-2.29	1.76
2490	59.38	-2.26	1.86
2500	60.59	-2.18	2.07

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
5150	40.89	-3.88	1.34
5200	41.77	-4.98	1.73
5250	47.45	-5.61	1.06
5300	46.08	-4.43	1.89
5350	43.23	-4.78	1.9
5400	44.13	-3.55	1.98
5450	55.68	-2.54	3.58
5500	40.9	-3.88	1.92
5550	42.58	-3.71	2.1
5600	41.18	-5.06	0.44
5650	47.33	-3.25	2.55
5700	45.86	-3.39	2.93
5750	43.76	-4.72	1.37
5800	47.47	-3.24	3.49
5840	46.09	-3.36	3.04

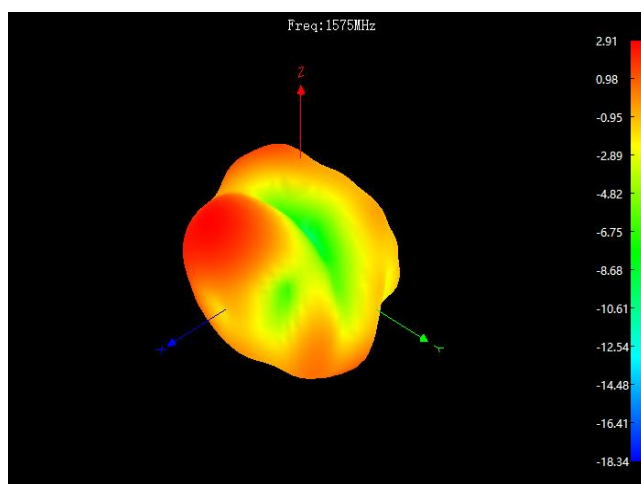

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE:

UNIT: mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen








APPROVED BY: YS

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: IA.0340.LB.2FI Antenna Specification

SPEC REV.

P0

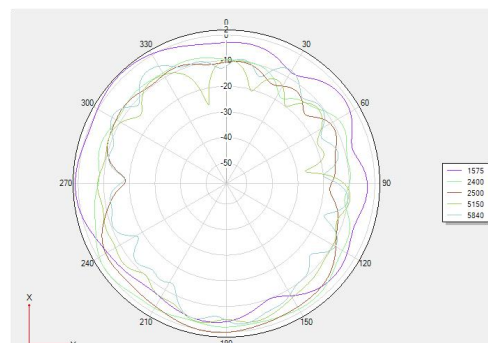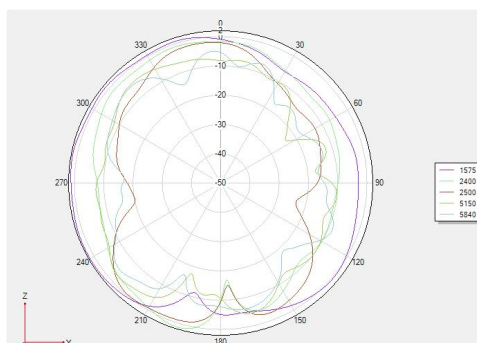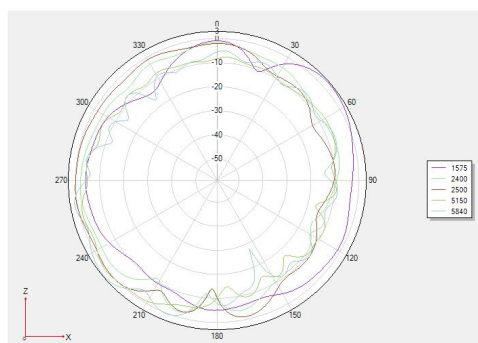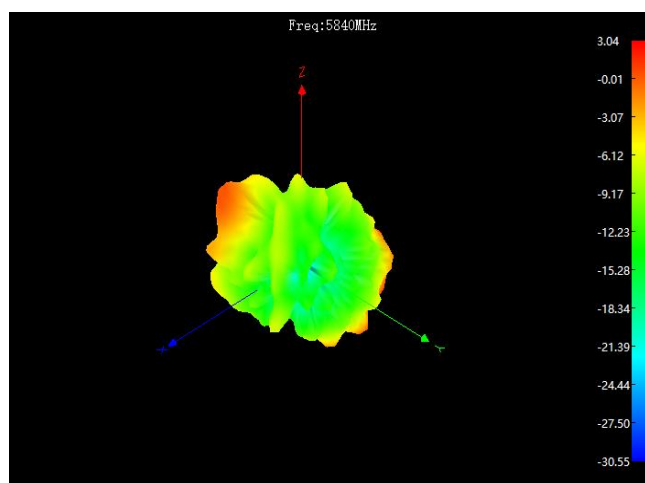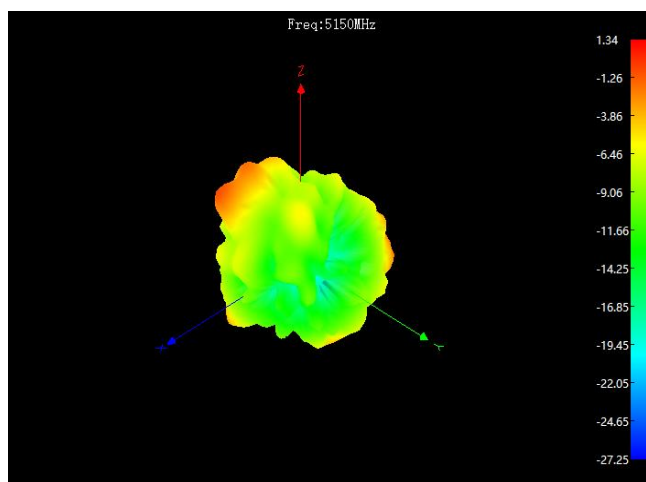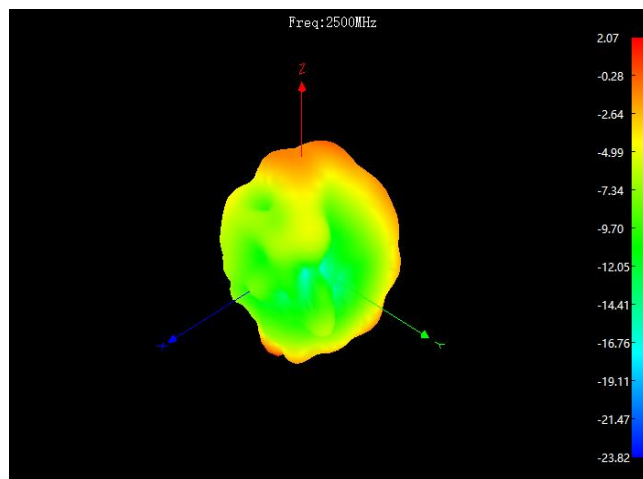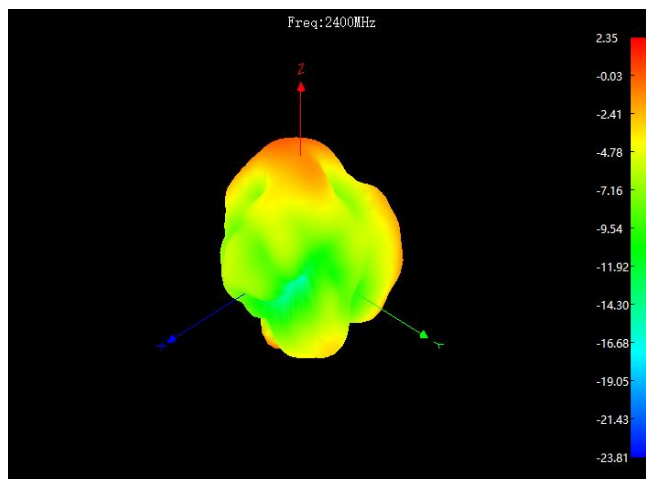

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X=\pm$ $X.X=\pm$ $X.XX=\pm$

ANGLES= $\pm$ HOLEDIA= $\pm$

SCALE:

UNIT: mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen

APPROVED BY: YS

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: IA.0340.LB.2FI Antenna Specification


SPEC REV.

P0

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

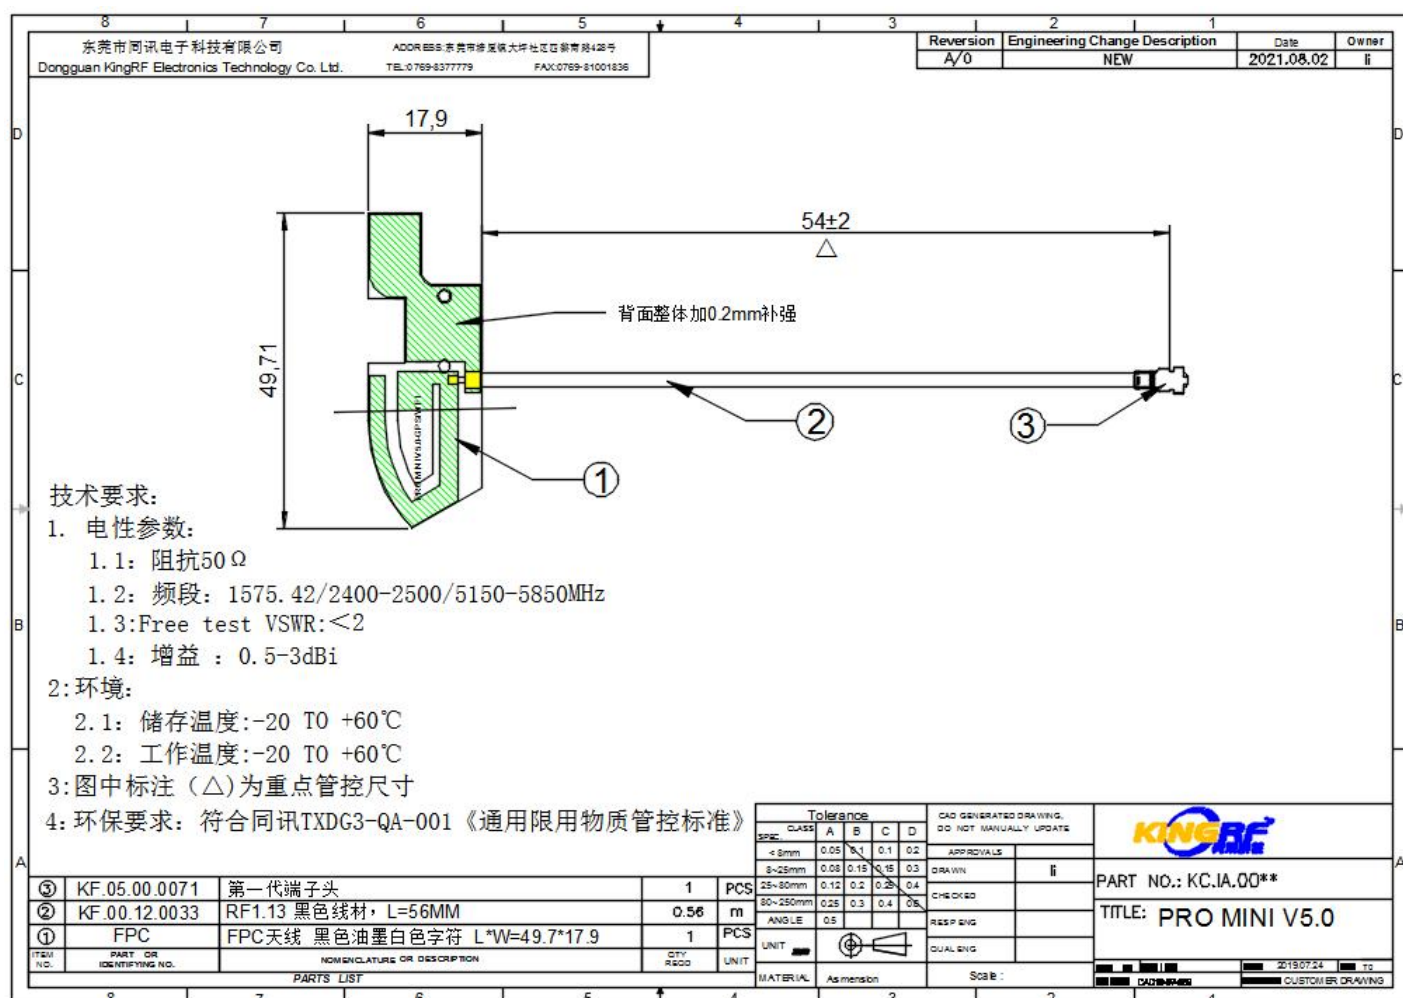


UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±			kingRF Electronics Technclogy Co. Ltd
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE: IA.0340.LB.2FI Antenna Specification			SPEC REV. P0

3-2. Connector appearance:

IPEX

3-3. Product picture:

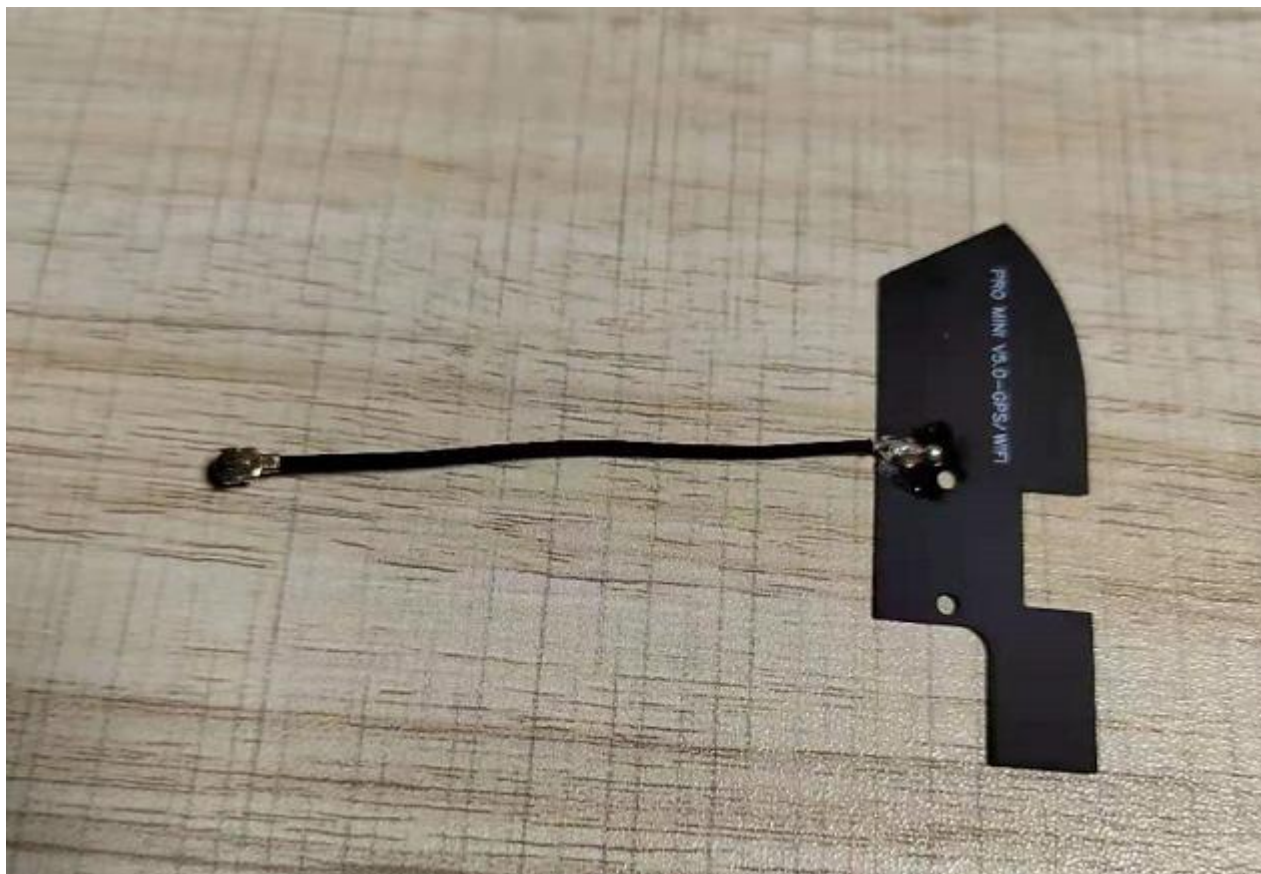

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 kingRF Electronics Technclogy Co. Ltd
SCALE:	UNIT: mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE: IA.0340.LB.2FI Antenna Specification		
SPEC REV. P0		

5.包装规格:

产品料号: **xxx**产品型号: **xxx**


一、标签要求:

需方	xxx		
供方	xxxxxx		
物料编码	xx		
产品型号	xx		
数量/单	xxx PCS	出厂日期	X 年 X 月 X 日
备注/其他			

二、装箱要求:

作业说明:

1. 内包装:


产品 **XXpcs** 一袋, 放入小 **PE** 袋;

2. 外包装:

XxPCS 一箱;

3. 注意事项:

- a. 是否要增设隔板、珍珠棉;
- b. 标签的帖附, 如 **ROHS** 等;



UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± **X.X=±** **X.XX=±****ANGLES=±** **HOLEDIA=±****SCALE:** **UNIT: mm****DRAWN BY:** LI **CHECKED BY:** YS**DESIGNED BY:** De wen **APPROVED BY:** YS**kingRF Electronics Technology Co. Ltd**No. 21, Haibin Road, Wusha Community, Chang 'an Town,
Dongguan CityTHIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF
TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS
THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR
DEVICES WITHOUT PERMISSION**TITLE:** IA.0340.LB.2FI Antenna Specification**SPEC REV.****P0**