

BT

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:BT; Frequency: 2441 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2441\text{ MHz}$; $\sigma = 1.78\text{ S/m}$; $\epsilon_r = 39.41$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.9\text{ }^{\circ}\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left DH5/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.310 W/kg

Left DH5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.870 V/m ; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.556 W/kg
SAR(1 g) = 0.202 W/kg ; SAR(10 g) = 0.073 W/kg
Smallest distance from peaks to all points 3 dB below = 7 mm
Ratio of SAR at M2 to SAR at M1 = 37.6%
Maximum value of SAR (measured) = 0.355 W/kg

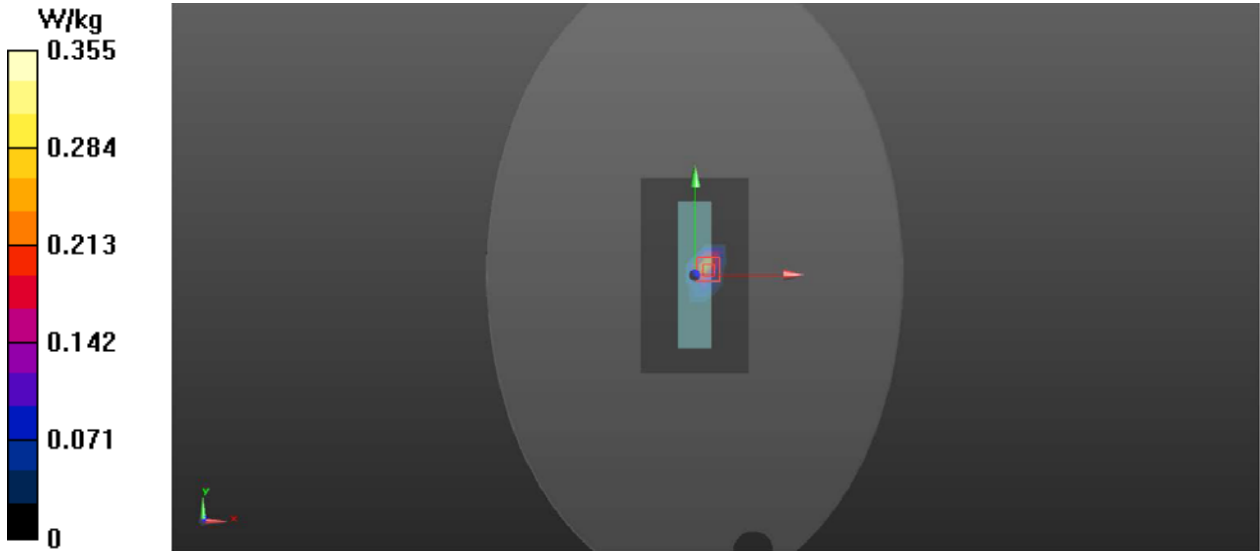

BT

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:BT; Frequency: 2441 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2441\text{ MHz}$; $\sigma = 1.78\text{ S/m}$; $\epsilon_r = 39.41$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.9\text{ }^{\circ}\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left DH5-Worse Case/Area Scan (6x10x1): Measurement grid: $dx=15\text{ mm}$, $dy=15\text{ mm}$

Maximum value of SAR (measured) = 0.301 W/kg

Left DH5-Worse Case/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 4.436 V/m ; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.548 W/kg
SAR(1 g) = 0.198 W/kg ; SAR(10 g) = 0.071 W/kg
Smallest distance from peaks to all points 3 dB below = 7 mm
Ratio of SAR at M2 to SAR at M1 = 36.1%
Maximum value of SAR (measured) = 0.326 W/kg

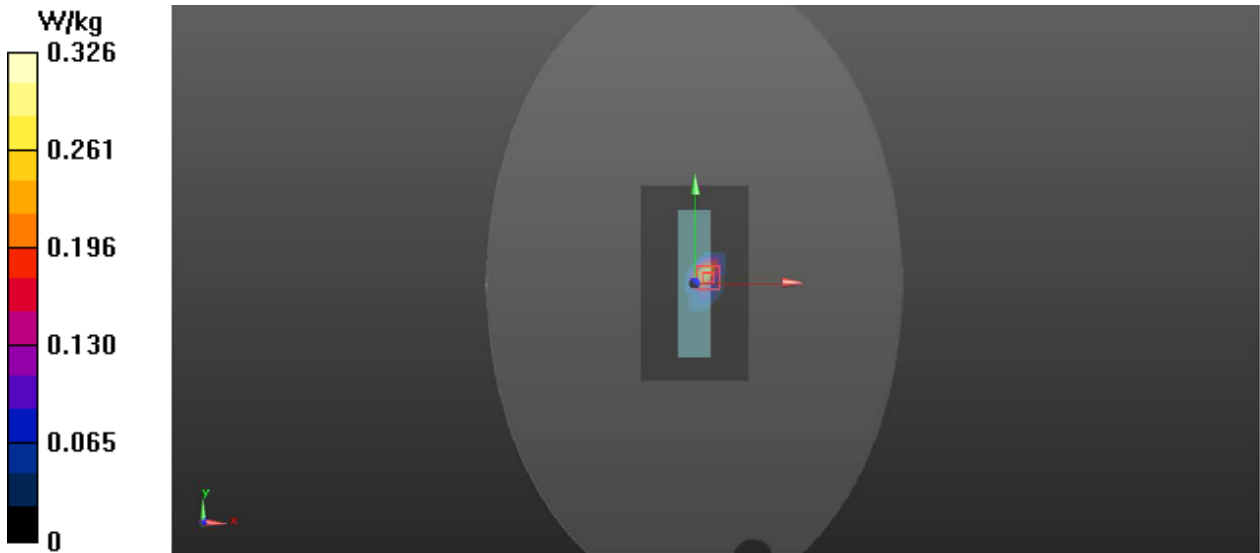

2.4GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.77\text{ S/m}$; $\epsilon_r = 39.54$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^\circ\text{C}$; Liquid Temperature : $21.9\text{ }^\circ\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.945 W/kg

Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.09 V/m ; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 2.28 W/kg
SAR(1 g) = 0.625 W/kg ; SAR(10 g) = 0.202 W/kg
Smallest distance from peaks to all points 3 dB below = 7 mm
Ratio of SAR at M2 to SAR at M1 = 37.8%
Maximum value of SAR (measured) = 1.38 W/kg

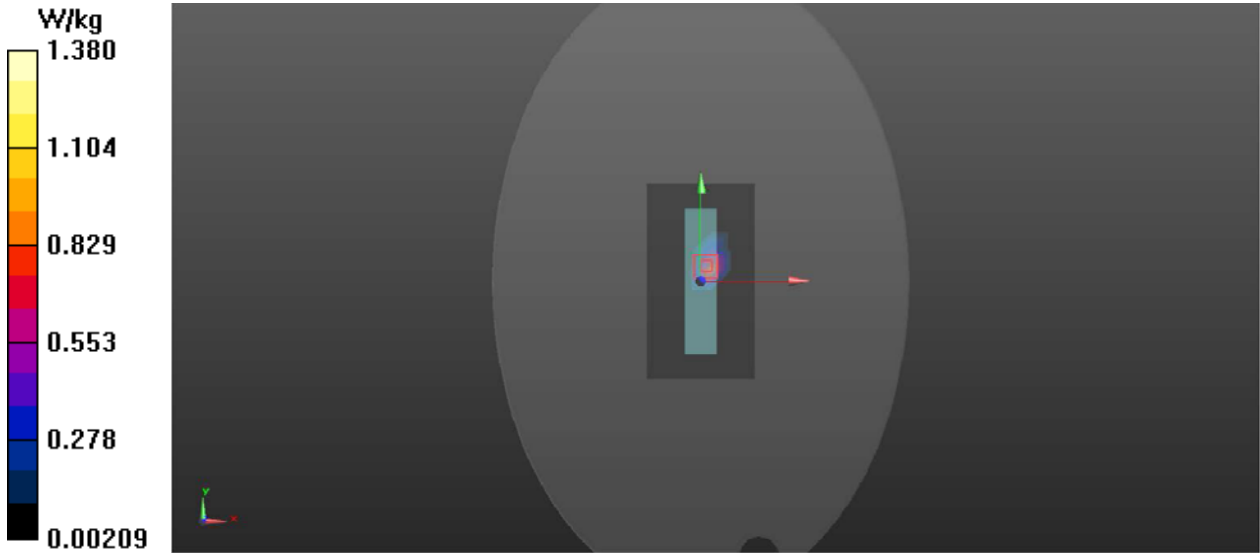

2.4GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.77\text{ S/m}$; $\epsilon_r = 39.54$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.9\text{ }^{\circ}\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left-Worse Case/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.19 W/kg

Left-Worse Case/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.489 V/m ; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.92 W/kg
SAR(1 g) = 0.591 W/kg ; SAR(10 g) = 0.183 W/kg
Smallest distance from peaks to all points 3 dB below = 7 mm
Ratio of SAR at M2 to SAR at M1 = 37.4%
Maximum value of SAR (measured) = 1.16 W/kg

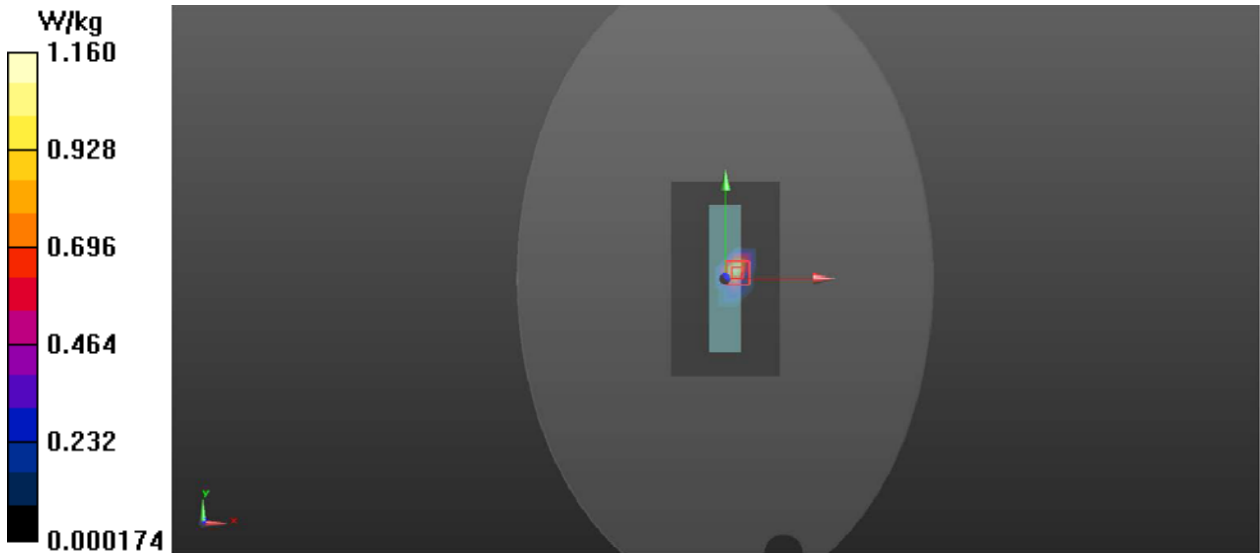

5.2GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S


Communication System:802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5200\text{ MHz}$; $\sigma = 4.68\text{ S/m}$; $\epsilon_r = 35.79$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^\circ\text{C}$; Liquid Temperature : $21.8\text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left/Area Scan (6x10x1): Measurement grid: $dx=15\text{ mm}$, $dy=15\text{ mm}$

Maximum value of SAR (measured) = 1.78 W/kg

Left/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{ mm}$, $dy=4\text{ mm}$, $dz=2\text{ mm}$
Reference Value = 3.536 V/m ; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 4.50 W/kg
SAR(1 g) = 0.647 W/kg ; SAR(10 g) = 0.250 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.7%
Maximum value of SAR (measured) = 2.04 W/kg

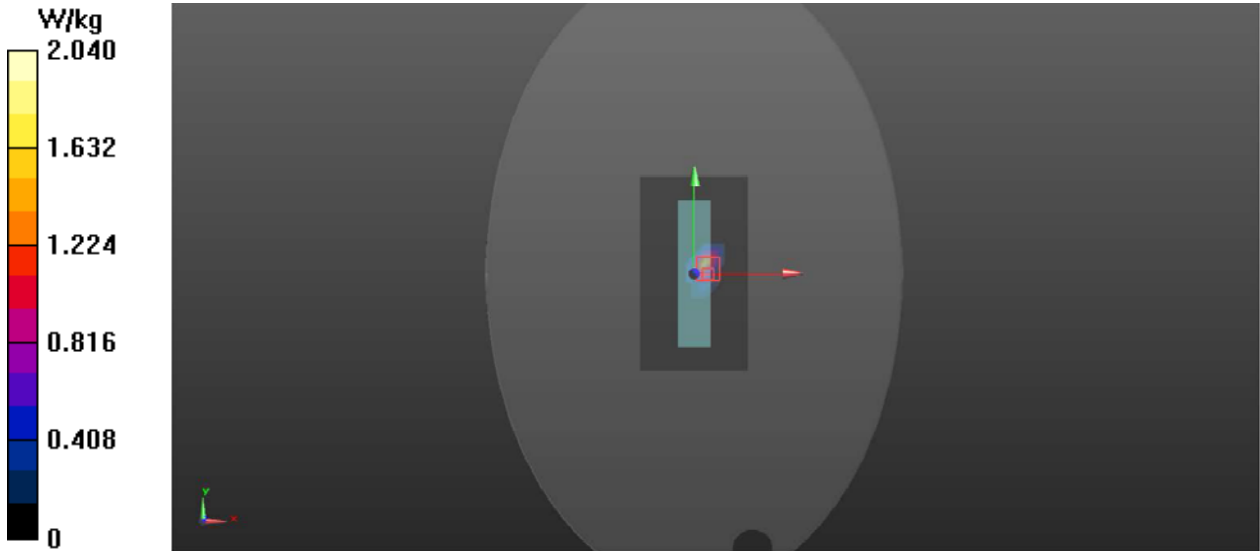

5.2GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.68 \text{ S/m}$; $\epsilon_r = 35.79$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left-Worse Case/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.53 W/kg

Left-Worse Case/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.336 V/m ; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 5.22 W/kg
SAR(1 g) = 0.632 W/kg ; SAR(10 g) = 0.243 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 48.1%
Maximum value of SAR (measured) = 1.91 W/kg

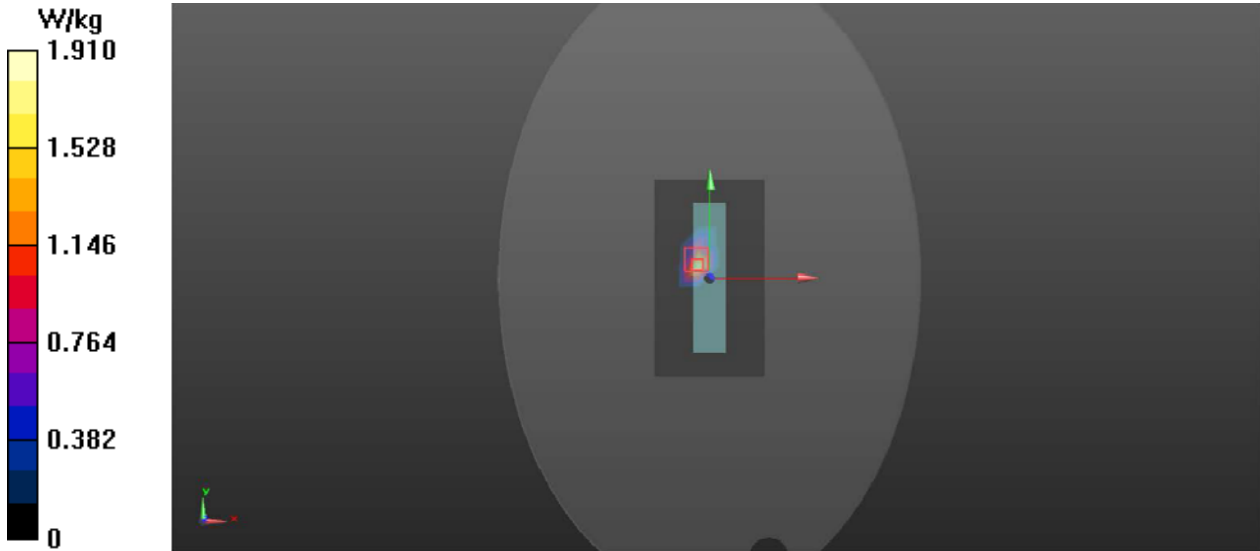

5.3GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System: 802.11a; Frequency: 5280 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5280\text{ MHz}$; $\sigma = 4.81\text{ S/m}$; $\epsilon_r = 35.79$; $\rho = 1000\text{ kg/m}^3$

Ambient Ambient Temperature : $22.0\text{ }^\circ\text{C}$; Liquid Temperature : $21.8\text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.33 W/kg

Left/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.877 V/m ; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 4.51 W/kg

SAR(1 g) = 0.643 W/kg ; SAR(10 g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 1.88 W/kg

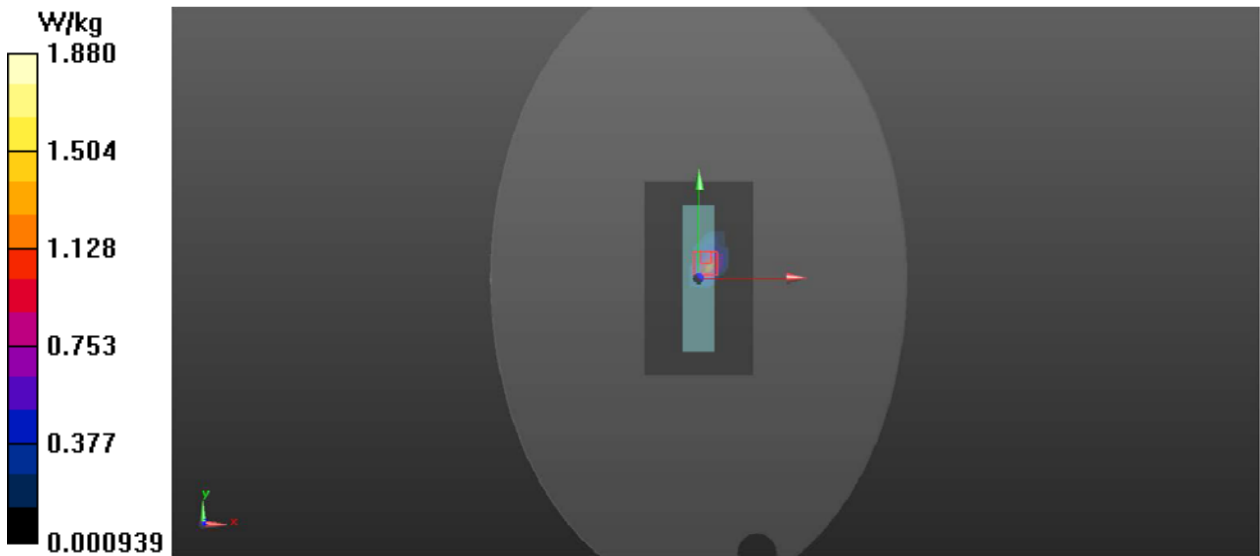

5.3GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System: 802.11a; Frequency: 5280 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5280\text{ MHz}$; $\sigma = 4.81\text{ S/m}$; $\epsilon_r = 35.79$; $\rho = 1000\text{ kg/m}^3$

Ambient Ambient Temperature : $22.0\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.8\text{ }^{\circ}\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left-Worse Case/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.22 W/kg

Left-Worse Case/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.672 V/m ; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 0.635 W/kg ; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.85 W/kg

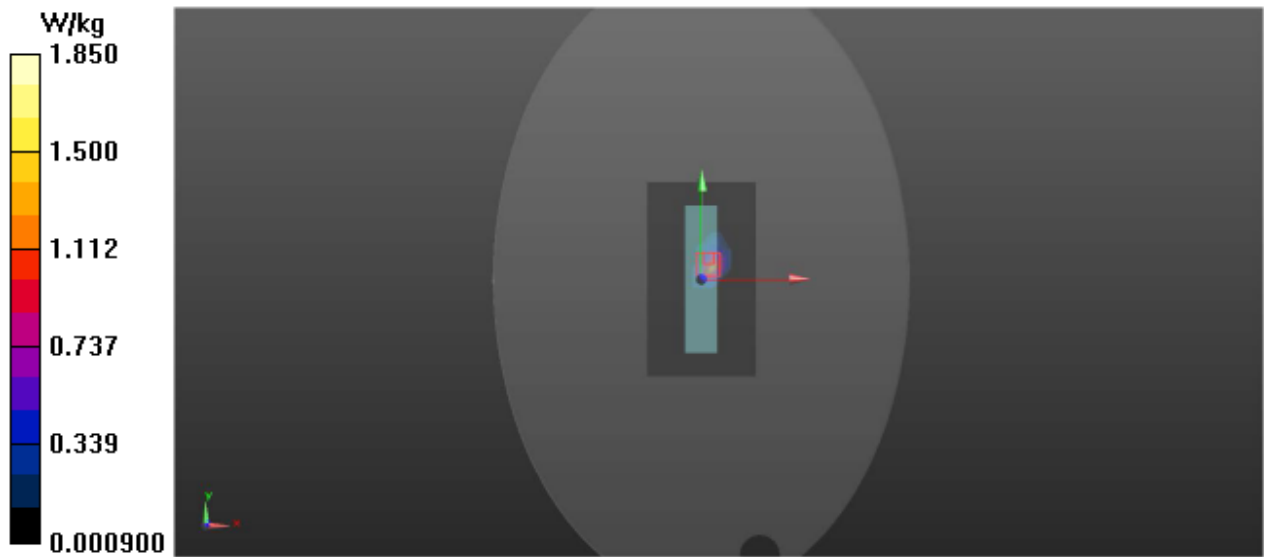

5.6GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System: 802.11a; Frequency: 5580 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.15 \text{ S/m}$; $\epsilon_r = 35.56$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.909 W/kg

Left/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.044 V/m ; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 5.41 W/kg
SAR(1 g) = 0.627 W/kg ; SAR(10 g) = 0.173 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.3%
Maximum value of SAR (measured) = 1.47 W/kg

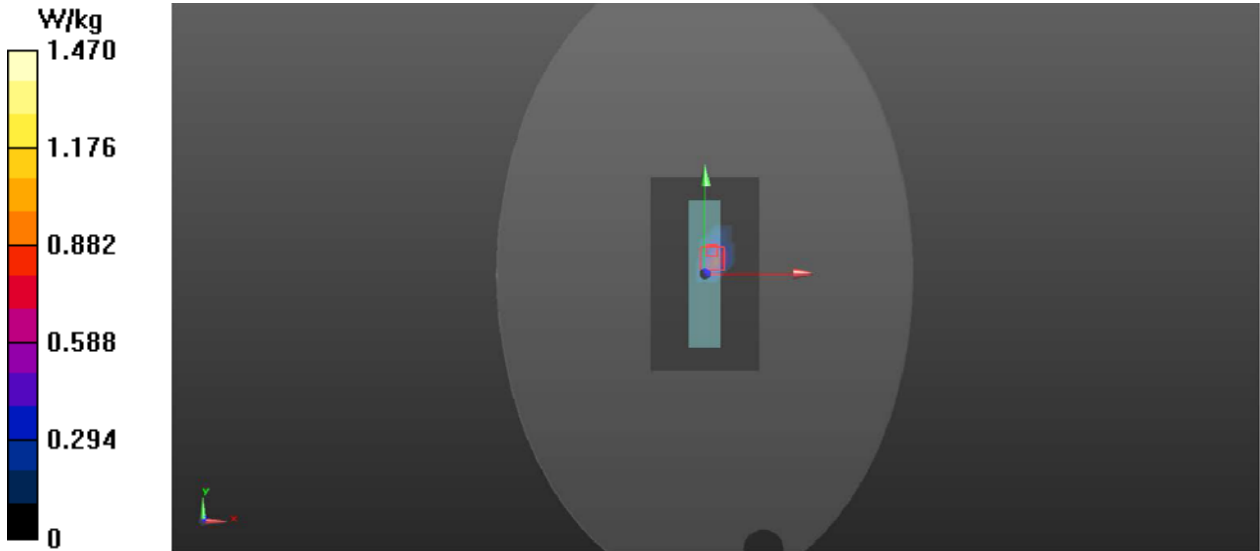

5.6GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System: 802.11a; Frequency: 5580 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.15 \text{ S/m}$; $\epsilon_r = 35.56$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left-Worse Case/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.876 W/kg

Left-Worse Case/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.978 V/m ; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 5.22 W/kg
SAR(1 g) = 0.619 W/kg ; SAR(10 g) = 0.165 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 1.40 W/kg

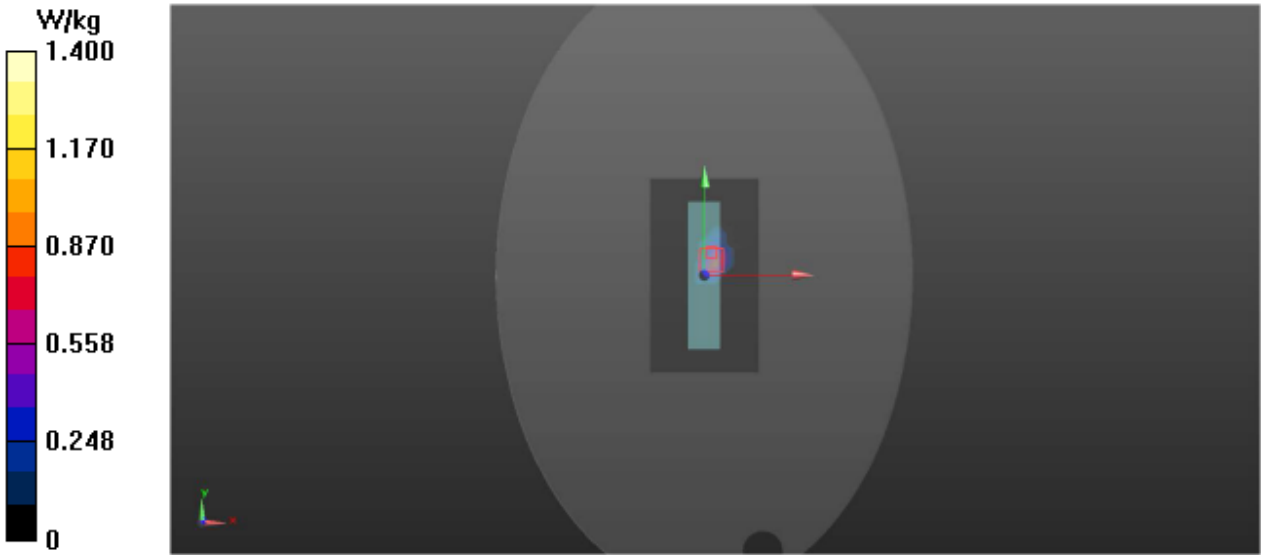

5.8GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.21 \text{ S/m}$; $\epsilon_r = 35.74$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$


DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.12 W/kg

Left/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.652 V/m ; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 7.98 W/kg
SAR(1 g) = 0.694 W/kg ; SAR(10 g) = 0.279 W/kg
Smallest distance from peaks to all points 3 dB below = 4.8 mm
Ratio of SAR at M2 to SAR at M1 = 43%
Maximum value of SAR (measured) = 1.83 W/kg

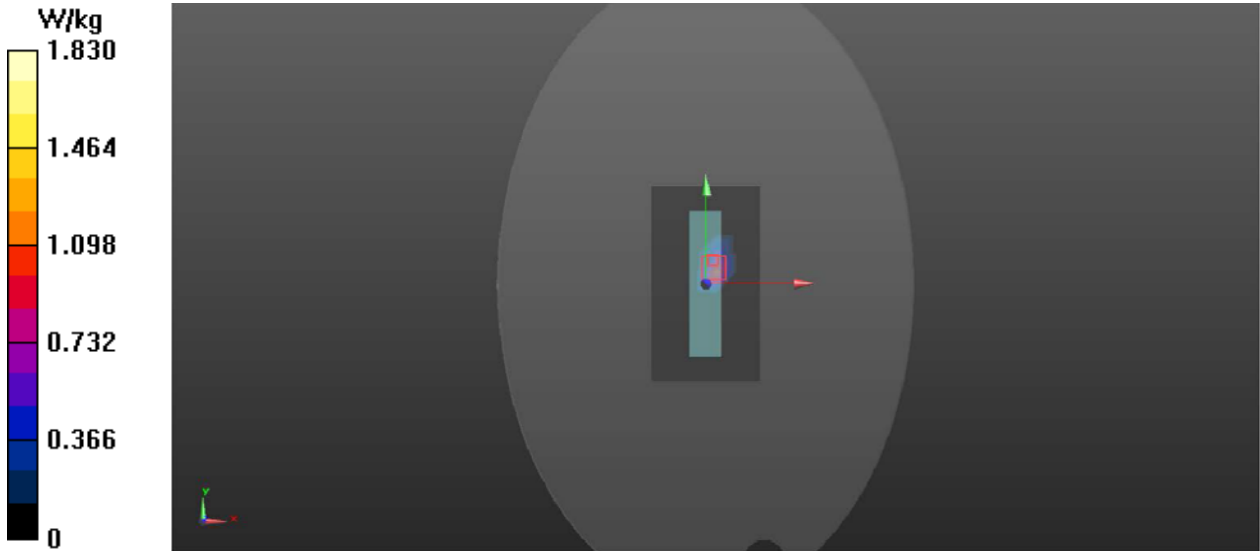

5.8GWIFI

DUT: Creader Professional 719X, Creader Professional 719E, Creader Professional 719I, Creader Professional 719K, Creader Professional 719 Expert, Creader Professional MOT 4S

Communication System:802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.21 \text{ S/m}$; $\epsilon_r = 35.74$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Left-Worse Case/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.386 W/kg

Left-Worse Case/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.280 V/m ; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 3.85 W/kg
SAR(1 g) = 0.682 W/kg ; SAR(10 g) = 0.260 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 42.7%
Maximum value of SAR (measured) = 1.44 W/kg

