

FCC RADIO TEST REPORT

FCC ID: XUJWO0806A

Product: AUTO Smart Diagnostic Tool

Trade Mark: LAUNCH

Model No.: X-431 PRO ELITE V2

X-431 PROS ELITE V2, X-431 PRO

Family Model: STAR V2, OADD-WO0806x(x=A~Z,
indicates configuration difference)

Report No.: N26051100116E

Issue Date: Jul. 21, 2026

Prepared for

Launch Tech Co., Ltd.

No.4012, Launch Industrial Park, North Wuhe Rd, Bantian Street,
Longgang District, Shenzhen, Guangdong, 518129, China.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Launch Tech Co., Ltd.Address : No.4012, Launch Industrial Park, North Wuhe Rd, Bantian Street,
Longgang District, Shenzhen, Guangdong, 518129, China.**Manufacturer's Name** : Launch Tech Co., Ltd.Address : No.4012, Launch Industrial Park, North Wuhe Rd, Bantian Street,
Longgang District, Shenzhen, Guangdong, 518129, China.**Product description**

Product name : AUTO Smart Diagnostic Tool

Trade Mark : LAUNCH

Model and/or type reference : X-431 PRO ELITE V2

Family Model : X-431 PROS ELITE V2, X-431 PRO STAR V2,
OADD-WO0806x(x=A~Z, indicates configuration difference)Test Sample Number S2512110207-1#
S2605110319-1#**Standards** : FCC Part15.407Test procedure ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to
C63.10a-2024
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D03 Client Without DFS New Rules v01r02
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of TestDate (s) of performance of tests Dec. 08, 2025 ~ Jan. 05, 2026
May. 11, 2026 ~ Jul. 21, 2026

Date of Issue Jul. 21, 2026

Test Result **Pass**

Note: A Part of test data of this report are based on the original test report
N25120800414E, dated by Jan. 05, 2026.

Prepared By : 
Allen Liu
(Project Engineer)

Reviewed By : 
Aaron Cheng
(Supervisor)

Approved By : 
Alex Li
(Manager)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
1 . GENERAL INFORMATION	8
1.1 GENERAL DESCRIPTION OF EUT	8
1.2 DESCRIPTION OF TEST MODES	10
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
2 . EMC EMISSION TEST	15
2.1 CONDUCTED EMISSION MEASUREMENT	15
2.1.1 APPLICABLE STANDARD	15
2.1.2 CONFORMANCE LIMIT	15
2.1.3 TEST CONFIGURATION	15
2.1.4 TEST PROCEDURE	15
2.2 RADIATED EMISSION MEASUREMENT	22
2.2.1 APPLICABLE STANDARD	22
2.2.2 CONFORMANCE LIMIT	22
2.2.3 MEASURING INSTRUMENTS	23
2.2.4 TEST CONFIGURATION	24
2.2.5 TEST PROCEDURE	25
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	26
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	27
2.2.8 TEST RESULTS (1GHZ-18GHZ)	33
2.2.9 SPURIOUS EMISSION ABOVE 1GHZ (18GHZ TO 40GHZ)	57
3 . POWER SPECTRAL DENSITY TEST	81
3.1 APPLIED PROCEDURES / LIMIT	81
3.2 TEST PROCEDURE	82
3.3 DEVIATION FROM STANDARD	82
3.4 TEST SETUP	83
3.5 EUT OPERATION CONDITIONS	83
3.6 TEST RESULTS	84
4 . 26DB & 99% EMISSION BANDWIDTH	85
4.1 APPLIED PROCEDURES / LIMIT	85
4.2 TEST PROCEDURE	85
4.3 EUT OPERATION CONDITIONS	86
4.4 TEST RESULTS	86

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	87
5.1 APPLIED PROCEDURES / LIMIT	87
5.2 TEST PROCEDURE	87
5.3 DEVIATION FROM STANDARD	87
5.4 TEST SETUP	87
5.5 EUT OPERATION CONDITIONS	87
5.6 TEST RESULTS	88
6 . MAXIMUM CONDUCTED OUTPUT POWER	89
6.1 PPLIED PROCEDURES / LIMIT	89
6.2 TEST RESULTS	91
7. FREQUENCY STABILITY MEASUREMENT	92
7.1 LIMIT	92
7.2 TEST PROCEDURES	92
7.3 TEST SETUP LAYOUT	92
7.4 EUT OPERATION DURING TEST	92
7.5 TEST RESULTS	93
8. DYNAMIC FREQUENCY SELECTION(DFS)	105
8.1 APPLICABILITY OF DFS REQUIREMENTS	105
8.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	105
8.3 DFS RESPONSE REQUIREMENT VALUES	106
8.4 SHORT PULSE RADAR TEST WAVEFORMS	106
8.5 CALIBRATION SETUP AND DFS TEST RESULTS	107
8.6 CONDUCTED CALIBRATION SETUP	107
8.7 RADAR WAVEFORM CALIBRATION RESULT	107
8.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	108
8.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	109
9. ANTENNA REQUIREMENT	110
9.1 STANDARD REQUIREMENT	110
9.2 EUT ANTENNA	110

Revision History

Report No.	Version	Description	Issued Date
N25120800414E	Rev.01	Initial issue of report	Jan. 05, 2026
N26051100116E	Rev.02	Updated radiation, spurious , band edges data. Updated antenna and C63.10	Jul. 21, 2026

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407(b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	(Note 2)

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The product is a client device, and the data transmission is limited by the AP.
When the information to be sent is missing or the operation fails,
the device will automatically stop sending and directly connect to the AP correctly again.

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at No. 24 Xinfu East Road Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier: CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : No. 24 Xinfu East Road Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted, PSD	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	Occupied bandwidth	$\pm 4.7\%$
5	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$
6	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
7	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
8	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
9	Temperature	$\pm 0.5^\circ\text{C}$
10	Humidity	$\pm 2\%$
11	Radio Frequency	$\pm 0.2\text{ppm}$
12	Occupied bandwidth	$\pm 4.7\%$
13	Time	$\pm 2.5\%$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	AUTO Smart Diagnostic Tool		
Trade Mark	LAUNCH		
Model Name	X-431 PRO ELITE V2		
Family Model	X-431 PROS ELITE V2, X-431 PRO STAR V2, OADD-WO0806x(x=A~Z, indicates configuration difference)		
Model Difference	All models are the same circuit and RF module, except for the color of the rubber sleeve or shell.		
FCC ID	XUJWO0806A		
Product Description	Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11n/ac (40MHz channel bandwidth) ☒ 802.11ac (80MHz channel bandwidth)	
	Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps; 802.11n (20MHz): MCS0-15, up to 144Mbps 802.11n (40MHz): MCS0-15, up to 300Mbps 802.11ac (20MHz): MCS0-8, up to 173.4Mbps 802.11ac (40MHz): MCS0-9, up to 400Mbps 802.11ac (80MHz): MCS0-9, up to 866.6Mbps	
	Modulation	802.11a:OFDM (BPSK / QPSK / 16QAM/64QAM) 802.11n:OFDM (QPSK/BPSK/16QAM/64QAM) 802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/ 256QAM)	
	Operating Frequency Range	☒ U-NII-1: 5150 MHz ~5250MHz ☒ U-NII-2A: 5250MHz~5350MHz ☒ U-NII-2C: 5470MHz~5725MHz ☒ U-NII-3: 5725 MHz ~5850 MHz	
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client	
	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection	
	Support TPC	☐ YES ☒ NO	
	Antenna Type	FPC antenna	
	Antenna Gain	3.94dBi	
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		
Adapter1	Model: XDJ361R-050500 Input: 100-240V~50/60Hz 0.9A Output: 5.0V---5A, 25.0W Manufacturer: Shenzhen Xindejia Electronic Technology Co.. Ltd		
Adapter2	Model:GME36F-050500FXR Input: 100-240V~50/60Hz 0.8A Output: 5.0V---5A, 25.0W Manufacturer: GME Technology(Shenzhen) Co.,Ltd.		
Adapter3	Model: BI36L-050500-I Input: 100-240V~50/60Hz 1.2A Output: 5.0V---5A, 25.0W Manufacturer: Dong Guan Royal Intelligent Co., Ltd.		
Battery	DC 3.7V, 6000mA, 22.2Wh		
Power supply	DC 3.7V from battery or DC 5V from adapter.		
HW Version	N/A		
SW Version	N/A		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
	136	5680 MHz				
	140	5700 MHz				
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165
Mode 3	802.11n40/ac CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159
Mode 4	802.11ac CH42/CH58/CH106/CH122/CH155


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165
Mode 3	802.11n40/ac CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159
Mode 4	802.11ac CH42/CH58/CH106/CH122/CH155

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

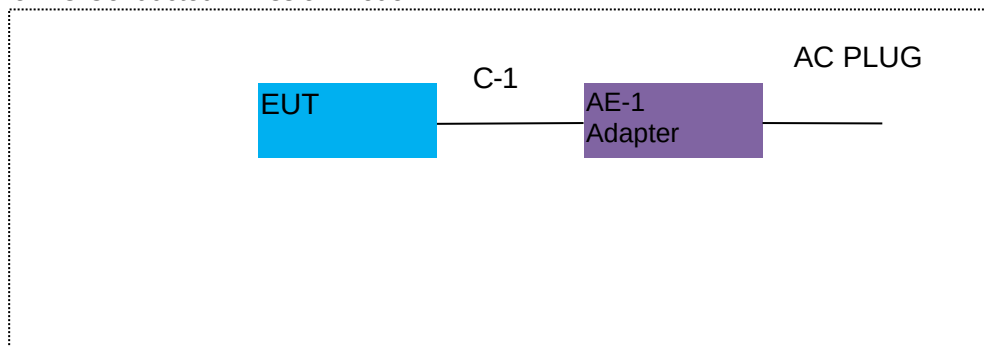

For Radiated Test Cases

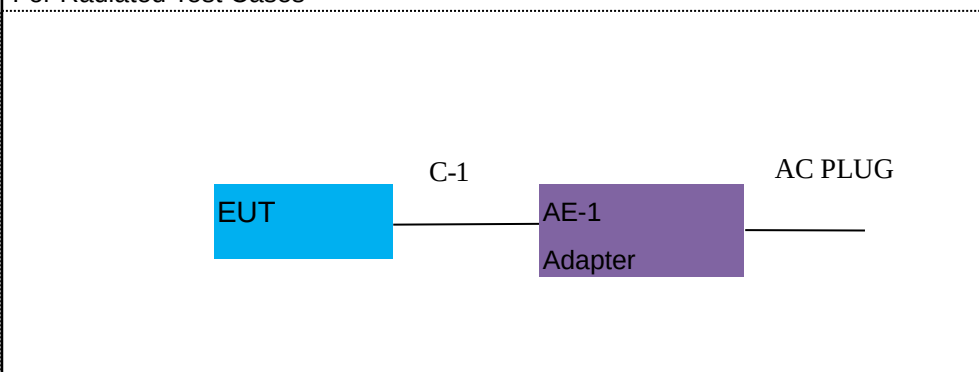

For Conducted Test Cases

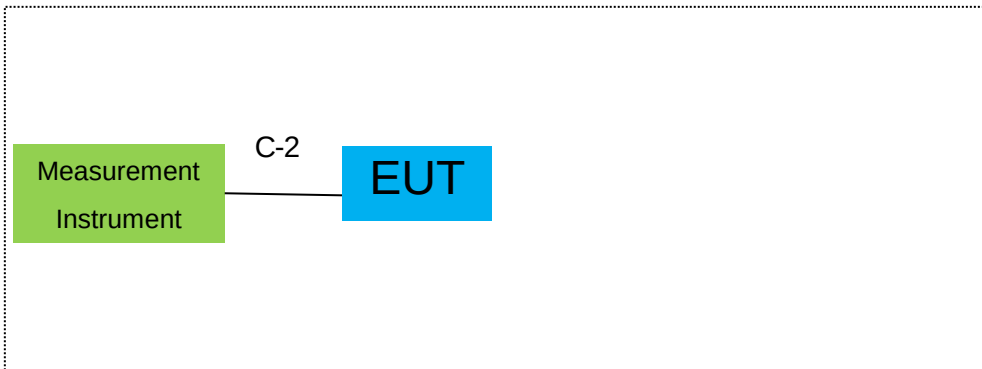

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Manufacturer	Model/Type No.	Series No.	Note
AE-1	Adapter	Shenzhen Xindejia Electronic Technology Co., Ltd	XDJ361R-050500	N/A	
AE-1	Adapter	GME Technology(Shenzhen) Co.,Ltd.	GME36F-050500 FXR	N/A	
AE-1	Adapter	Dong Guan Royal Intelligent Co., Ltd.	BI36L-050500-I	N/A	

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Type-C Cable	YES	NO	0.8m
C-2	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2025.04.17 2026.04.15	2026.04.16 2027.04.14	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025.04.17 2026.04.15	2026.04.16 2027.04.14	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2025.04.17 2026.04.15	2026.04.16 2027.04.14	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
6	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
7	Amplifier	EMC	EMC051835SE	980246	2025.04.17 2026.04.15	2026.04.16 2027.04.14	1 year
8	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
9	Power Meter	DARE	RPR3006W	15I00041SN084	2025.04.17 2026.04.15	2026.04.16 2027.04.14	1 year
10	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2024.05.06	2027.05.05	3 year
11	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2024.05.06	2027.05.05	3 year
12	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2024.05.06	2027.05.05	3 year
13	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2025.04.17	2026.04.16	1 year
2	LISN	R&S	ENV216	101313	2025.04.16	2026.04.15	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2025.04.16	2026.04.15	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

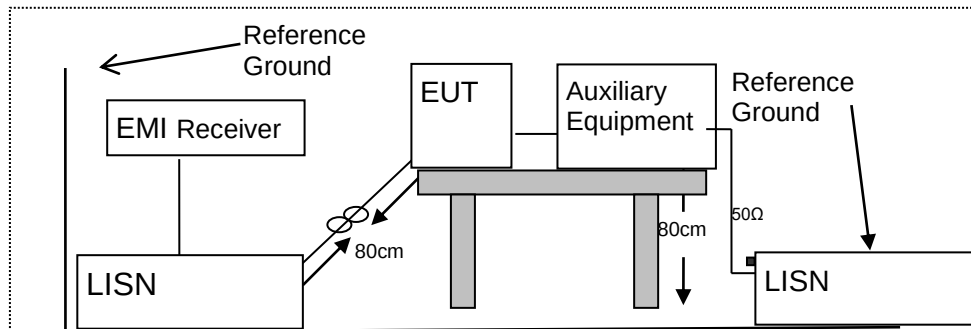

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	23.2℃	Relative Humidity :	47.6%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter1 AC 120V/60Hz	Test Mode :	Mode 7(5G WIFI)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1660	31.40	20.31	51.71	65.16	-13.45	QP
0.1660	27.58	20.31	47.89	55.16	-7.27	AVG
0.2100	31.69	20.34	52.03	63.21	-11.18	QP
0.2100	27.05	20.34	47.39	53.21	-5.82	AVG
0.2500	31.97	20.36	52.33	61.76	-9.43	QP
0.2500	23.74	20.36	44.10	51.76	-7.66	AVG
0.2860	28.69	20.39	49.08	60.64	-11.56	QP
0.2860	21.81	20.39	42.20	50.64	-8.44	AVG
0.5620	26.61	20.43	47.04	56.00	-8.96	QP
0.5620	17.97	20.43	38.40	46.00	-7.60	AVG
0.6260	28.17	20.43	48.60	56.00	-7.40	QP
0.6260	19.47	20.43	39.90	46.00	-6.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

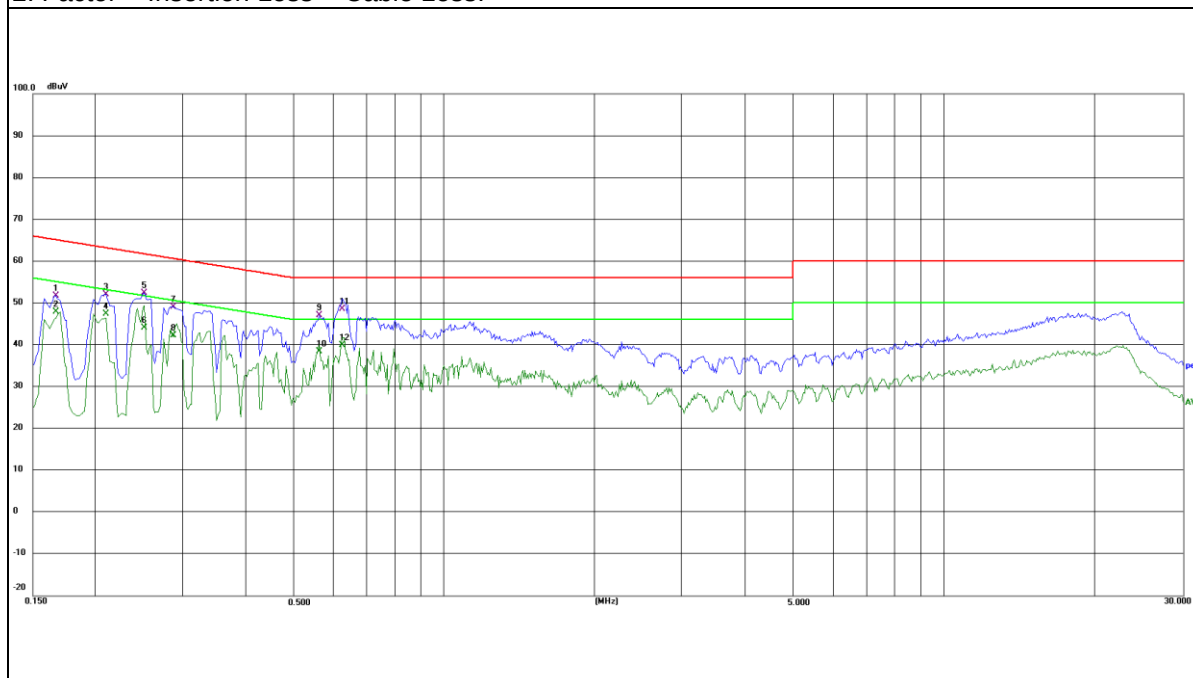


EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	23.2℃	Relative Humidity :	47.6%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter1 AC 120V/60Hz	Test Mode :	Mode 7(5G WIFI)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4100	23.82	20.41	44.23	57.65	-13.42	QP
0.4100	17.28	20.41	37.69	47.65	-9.96	AVG
0.4740	25.08	20.43	45.51	56.44	-10.93	QP
0.4740	18.27	20.43	38.70	46.44	-7.74	AVG
0.4940	25.07	20.43	45.50	56.10	-10.60	QP
0.4940	17.14	20.43	37.57	46.10	-8.53	AVG
0.5820	26.88	20.44	47.32	56.00	-8.68	QP
0.5820	18.79	20.44	39.23	46.00	-6.77	AVG
0.6380	27.31	20.43	47.74	56.00	-8.26	QP
0.6380	18.67	20.43	39.10	46.00	-6.90	AVG
0.9620	24.73	20.35	45.08	56.00	-10.92	QP
0.9620	16.41	20.35	36.76	46.00	-9.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

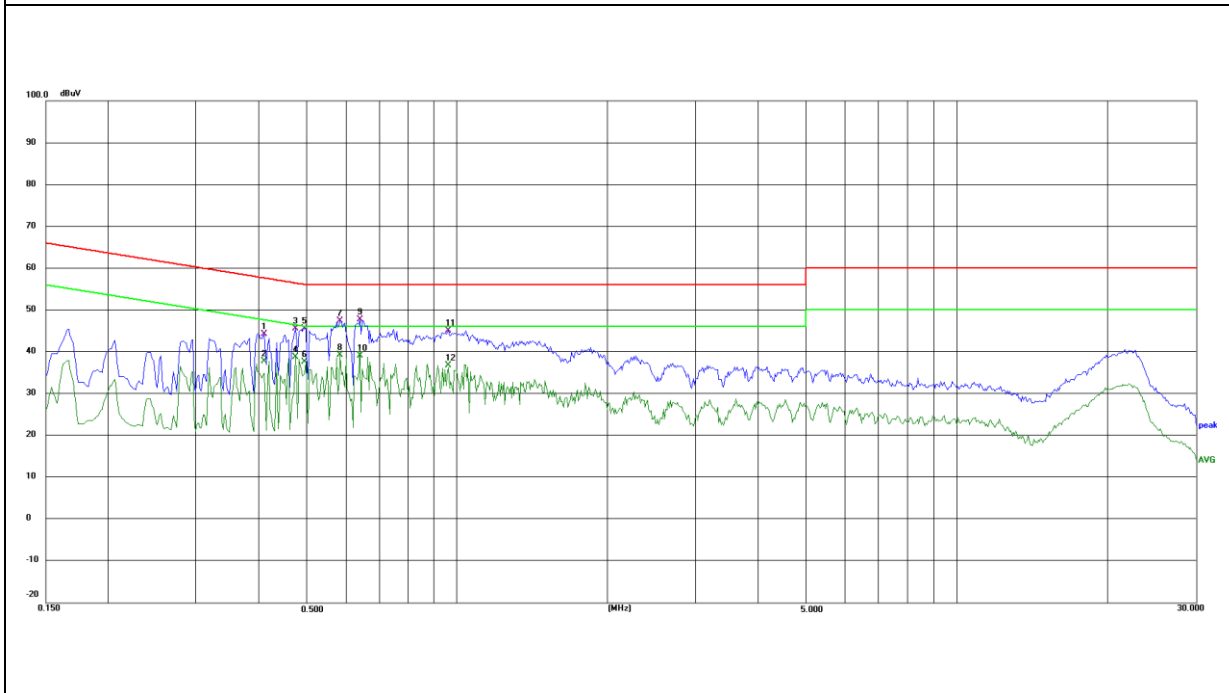


EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
-------	----------------------------	--------------	--------------------

Temperature :	23.2℃	Relative Humidity :	47.6%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter2 AC 120V/60Hz	Test Mode :	Mode 7(5G WIFI)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1660	23.67	19.58	43.25	65.16	-21.91	QP
0.1660	10.65	19.58	30.23	55.16	-24.93	AVG
0.3780	29.01	19.55	48.56	58.32	-9.76	QP
0.3780	16.87	19.55	36.42	48.32	-11.90	AVG
0.4980	23.96	19.56	43.52	56.03	-12.51	QP
0.4980	12.11	19.56	31.67	46.03	-14.36	AVG
0.8740	27.04	19.59	46.63	56.00	-9.37	QP
0.8740	10.52	19.59	30.11	46.00	-15.89	AVG
2.2580	24.97	19.66	44.63	56.00	-11.37	QP
2.2580	6.83	19.66	26.49	46.00	-19.51	AVG
5.5900	19.93	19.90	39.83	60.00	-20.17	QP
5.5900	5.12	19.90	25.02	50.00	-24.98	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

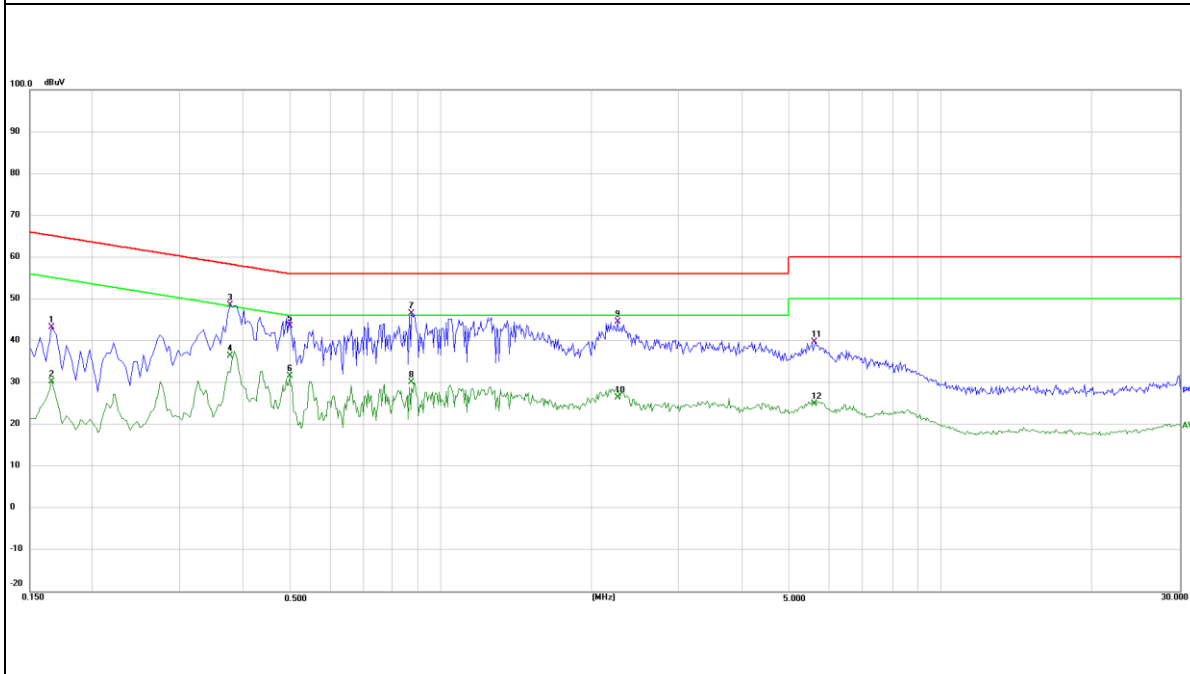


EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	23.2℃	Relative Humidity :	47.6%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter2 AC 120V/60Hz	Test Mode :	Mode 7(5G WIFI)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1660	24.85	19.53	44.38	65.16	-20.78	QP
0.1660	7.51	19.53	27.04	55.16	-28.12	AVG
0.2180	22.71	19.53	42.24	62.89	-20.65	QP
0.2180	6.84	19.53	26.37	52.89	-26.52	AVG
0.3820	27.72	19.54	47.26	58.24	-10.98	QP
0.3820	14.41	19.54	33.95	48.24	-14.29	AVG
0.8780	22.35	19.62	41.97	56.00	-14.03	QP
0.8780	6.23	19.62	25.85	46.00	-20.15	AVG
2.2100	20.31	19.69	40.00	56.00	-16.00	QP
2.2100	4.26	19.69	23.95	46.00	-22.05	AVG
5.3580	15.46	19.92	35.38	60.00	-24.62	QP
5.3580	0.97	19.92	20.89	50.00	-29.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

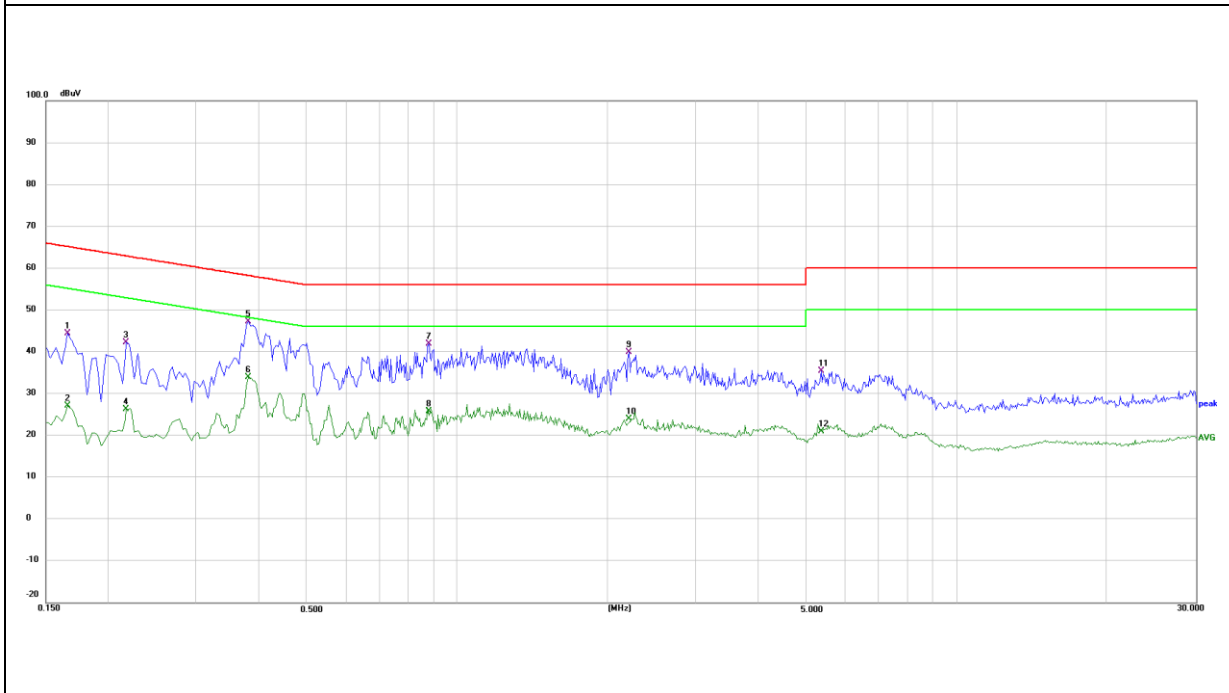


EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	23.2℃	Relative Humidity :	47.6%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter3 AC 120V/60Hz	Test Mode :	Mode 7(5G WIFI)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1500	37.48	19.60	57.08	66.00	-8.92	QP
0.1500	19.47	19.60	39.07	56.00	-16.93	AVG
0.2060	30.60	19.54	50.14	63.37	-13.23	QP
0.2060	16.92	19.54	36.46	53.37	-16.91	AVG
0.2740	26.77	19.54	46.31	61.00	-14.69	QP
0.2740	11.97	19.54	31.51	51.00	-19.49	AVG
0.4220	19.50	19.56	39.06	57.41	-18.35	QP
0.4220	11.32	19.56	30.88	47.41	-16.53	AVG
0.5740	17.71	19.57	37.28	56.00	-18.72	QP
0.5740	7.21	19.57	26.78	46.00	-19.22	AVG
2.7659	10.14	19.70	29.84	56.00	-26.16	QP
2.7659	-3.02	19.70	16.68	46.00	-29.32	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

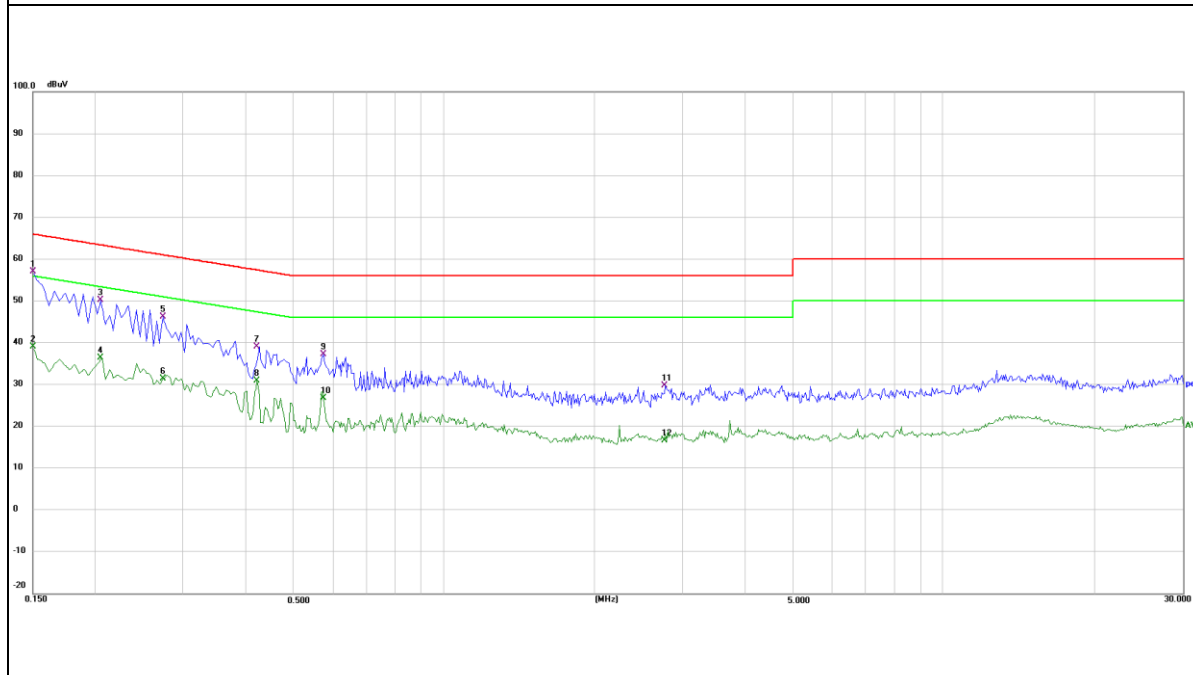


EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	23.2℃	Relative Humidity :	47.6%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter3 AC 120V/60Hz	Test Mode :	Mode 7(5G WIFI)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1500	37.11	19.53	56.64	66.00	-9.36	QP
0.1500	17.72	19.53	37.25	56.00	-18.75	AVG
0.2340	28.24	19.53	47.77	62.31	-14.54	QP
0.2340	9.99	19.53	29.52	52.31	-22.79	AVG
0.3740	20.12	19.54	39.66	58.41	-18.75	QP
0.3740	8.37	19.54	27.91	48.41	-20.50	AVG
0.5340	20.52	19.57	40.09	56.00	-15.91	QP
0.5340	14.52	19.57	34.09	46.00	-11.91	AVG
1.2460	13.45	19.63	33.08	56.00	-22.92	QP
1.2460	1.28	19.63	20.91	46.00	-25.09	AVG
14.4180	9.11	22.35	31.46	60.00	-28.54	QP
14.4180	-2.29	22.35	20.06	50.00	-29.94	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

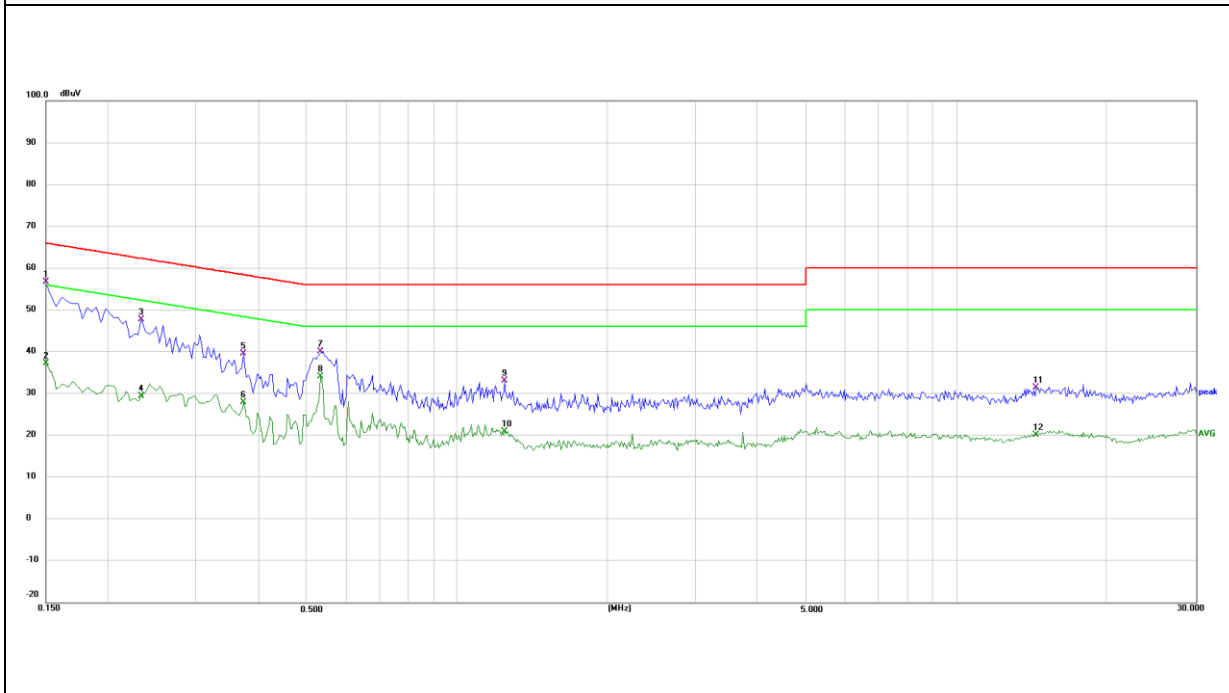

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b) and 15.209&15.205

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407 (b) (9) (10) : radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

Undesirable emission limits. Except as shown in paragraph (b)(1)(2)(3)(4) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

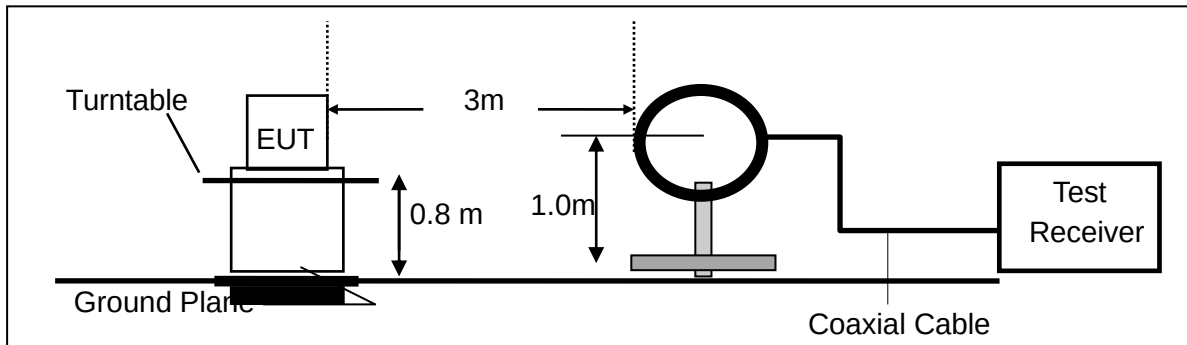

(b) For radiated emissions from 30MHz to 1000MHz

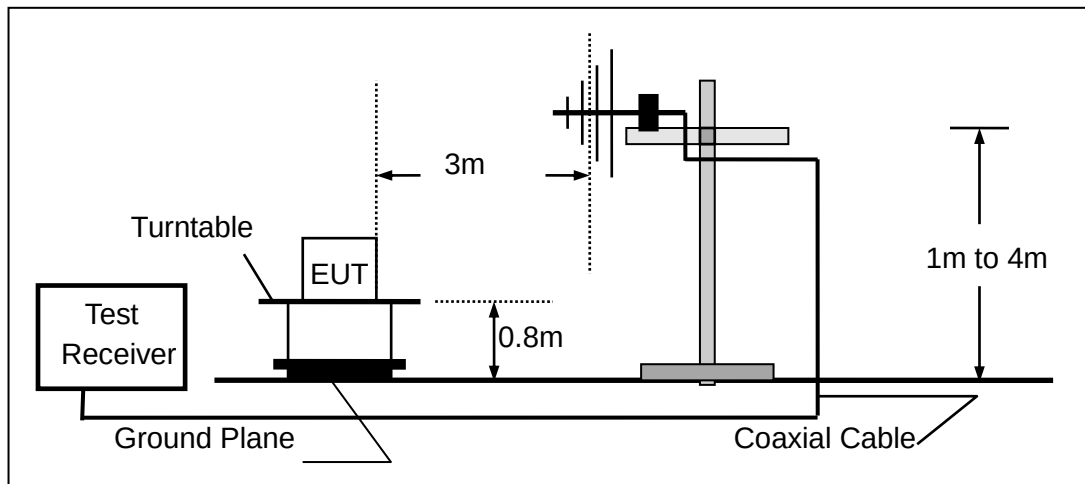

(c) For radiated emissions above 1000MHz

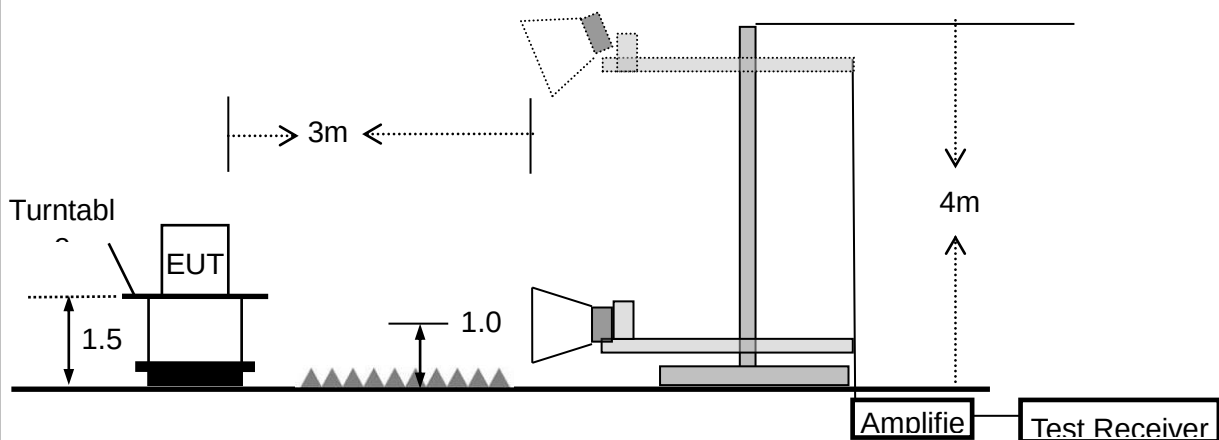

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25.5 °C	Relative Humidity :	55%
Pressure :	1010hPa	Test Mode :	802.11a-5180MHz (5G WIFI)
Test Voltage :	DC 5V from Adapter1 AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	45.5350	10.10	19.55	29.65	40.00	-10.35	QP
V	239.9870	20.56	18.86	39.42	46.00	-6.58	peak
V	480.5280	8.84	24.00	32.84	46.00	-13.16	peak
V	601.4270	7.65	25.40	33.05	46.00	-12.95	peak
V	721.7260	11.11	27.57	38.68	46.00	-7.32	peak
V	948.7610	8.25	30.21	38.46	46.00	-7.54	peak

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

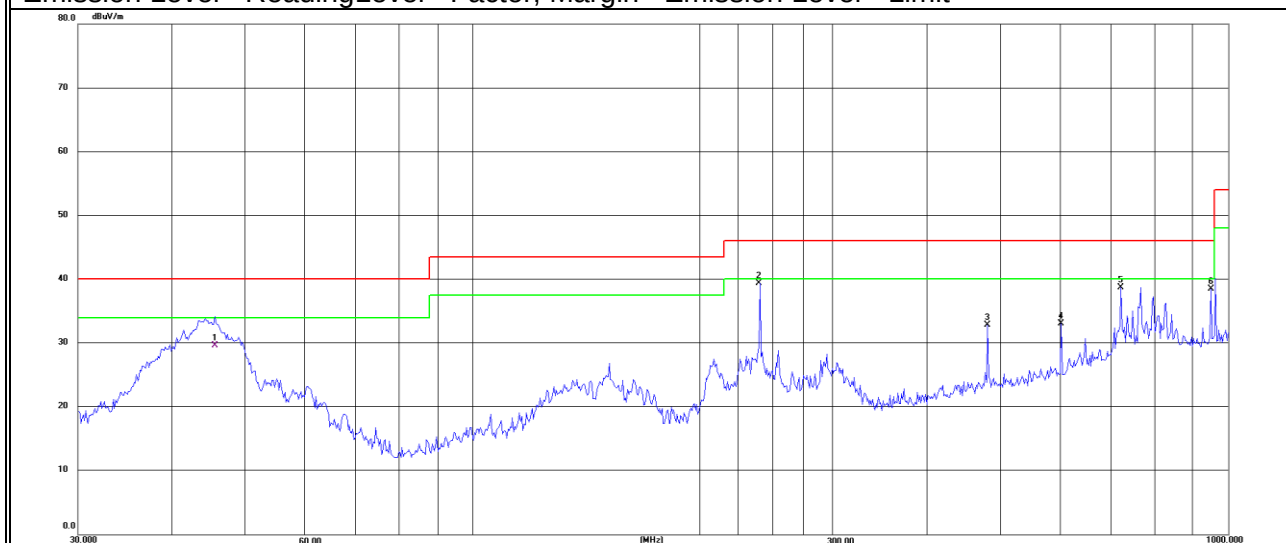

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	46.6300	11.71	19.68	31.39	40.00	-8.61	QP
H	207.1230	12.75	17.45	30.20	43.50	-13.30	peak
H	299.3160	15.42	19.74	35.16	46.00	-10.84	peak
H	463.9700	3.65	23.31	26.96	46.00	-19.04	peak
H	766.0570	6.55	28.15	34.70	46.00	-11.30	peak
H	948.7610	7.95	30.21	38.16	46.00	-7.84	peak

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

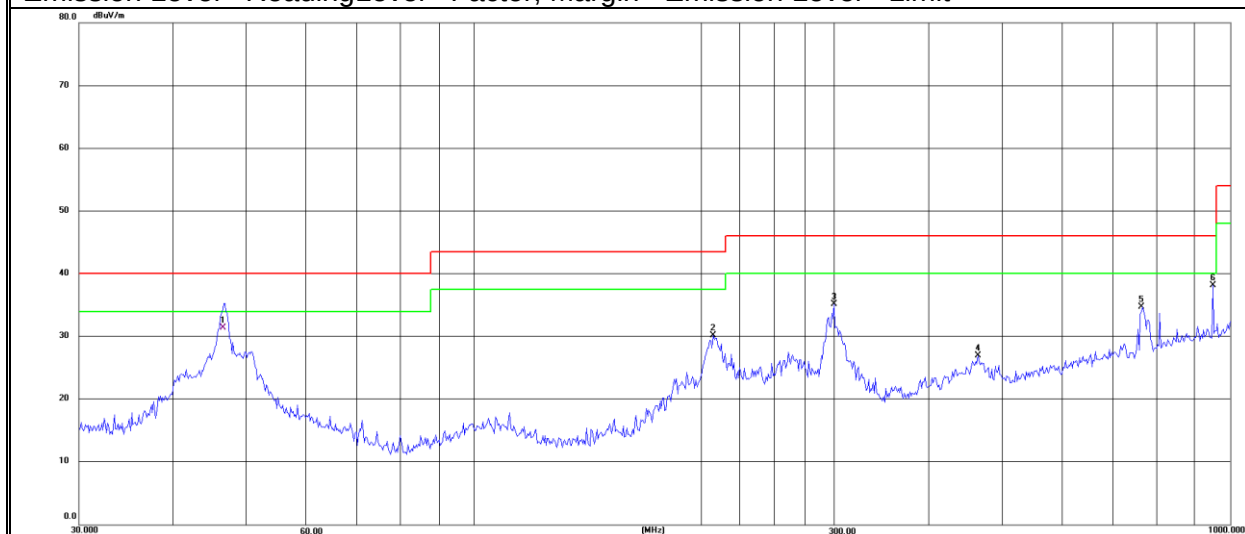


EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25.5 °C	Relative Humidity :	55%
Pressure :	1010hPa	Test Mode :	802.11a-5180MHz (5G WIFI)
Test Voltage :	DC 5V from Adapter2 AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	48.6720	9.00	20.17	29.17	40.00	-10.83	peak
V	63.0920	11.99	18.13	30.12	40.00	-9.88	peak
V	107.1340	7.68	17.84	25.52	43.50	-17.98	peak
V	205.6750	13.88	18.12	32.00	43.50	-11.50	peak
V	399.0300	5.29	22.68	27.97	46.00	-18.03	peak
V	774.1579	6.55	28.84	35.39	46.00	-10.61	peak

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

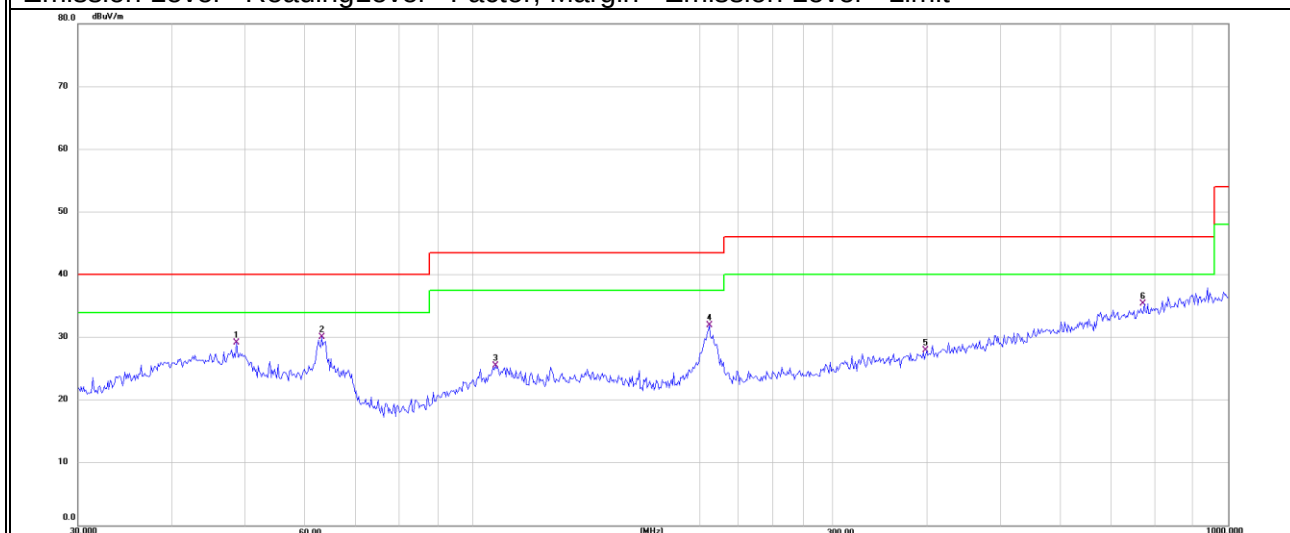

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	48.6720	5.50	20.17	25.67	40.00	-14.33	peak
H	102.7190	5.40	18.27	23.67	43.50	-19.83	peak
H	147.9210	10.19	14.61	24.80	43.50	-18.70	peak
H	207.1230	13.76	18.13	31.89	43.50	-11.61	peak
H	400.4320	5.91	22.77	28.68	46.00	-17.32	peak
H	938.8330	11.98	30.51	42.49	46.00	-3.51	peak

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

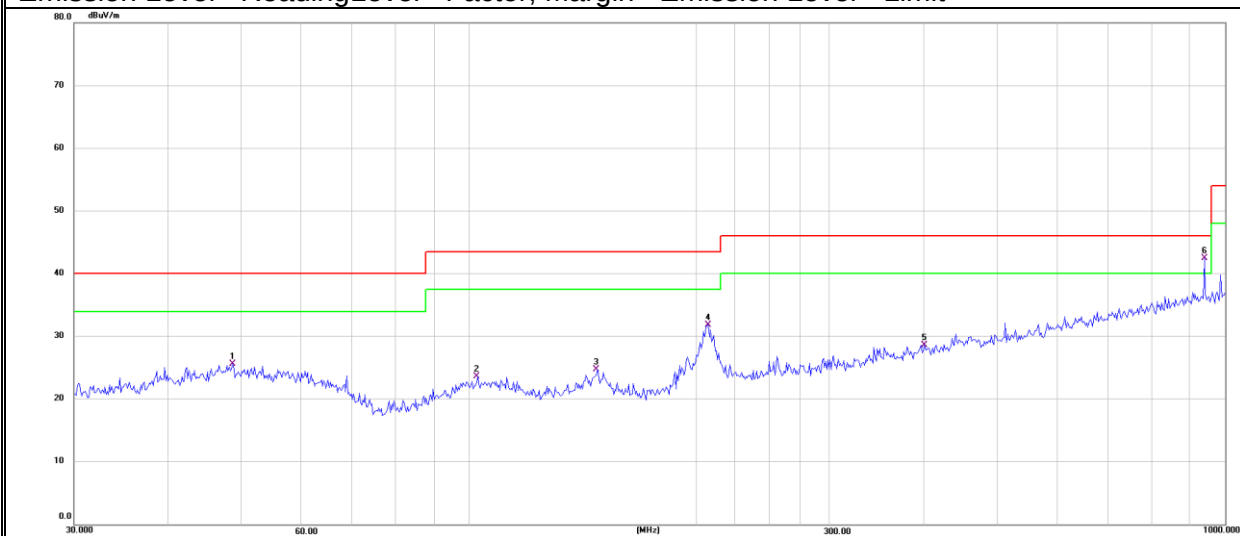

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25.5 °C	Relative Humidity :	55%
Pressure :	1010hPa	Test Mode :	802.11a-5180MHz (5G WIFI)
Test Voltage :	DC 5V from Adapter3 AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	35.2510	16.97	17.63	34.60	40.00	-5.40	peak
V	49.7070	13.47	19.97	33.44	40.00	-6.56	peak
V	106.3850	13.97	18.11	32.08	43.50	-11.42	peak
V	207.1230	11.14	18.13	29.27	43.50	-14.23	peak
V	383.9320	7.42	22.24	29.66	46.00	-16.34	peak
V	948.7610	8.24	30.54	38.78	46.00	-7.22	peak

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit



Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	52.2080	5.64	19.77	25.41	40.00	-14.59	peak
H	109.0290	6.45	17.91	24.36	43.50	-19.14	peak
H	207.8500	12.80	18.13	30.93	43.50	-12.57	peak
H	550.9480	6.24	25.45	31.69	46.00	-14.31	peak
H	631.6880	7.69	26.60	34.29	46.00	-11.71	peak
H	938.8330	10.39	30.51	40.90	46.00	-5.10	peak

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

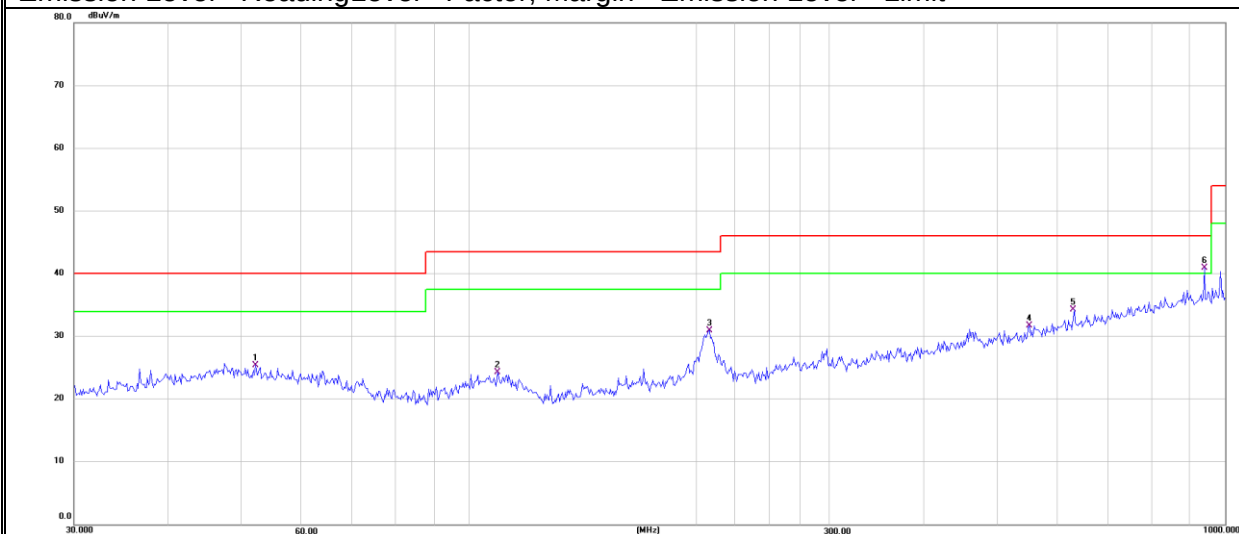

Note: All modes have been tested, just the worst mode has been recorded in the report.

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT:	AUTO Smart Diagnostic Tool	Model No.:	X-431 PRO ELITE V2
Temperature:	22.6 °C	Relative Humidity :	62%
Test Mode:	TX(5.2G) - 802.11a	Test By:	Allen Liu

5180

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2093.950	55.17	-12.53	42.64	68.20	-25.56	peak
V	5179.025	54.60	-6.19	48.41	68.20	-19.79	peak
V	13930.625	45.73	5.40	51.13	68.20	-17.07	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

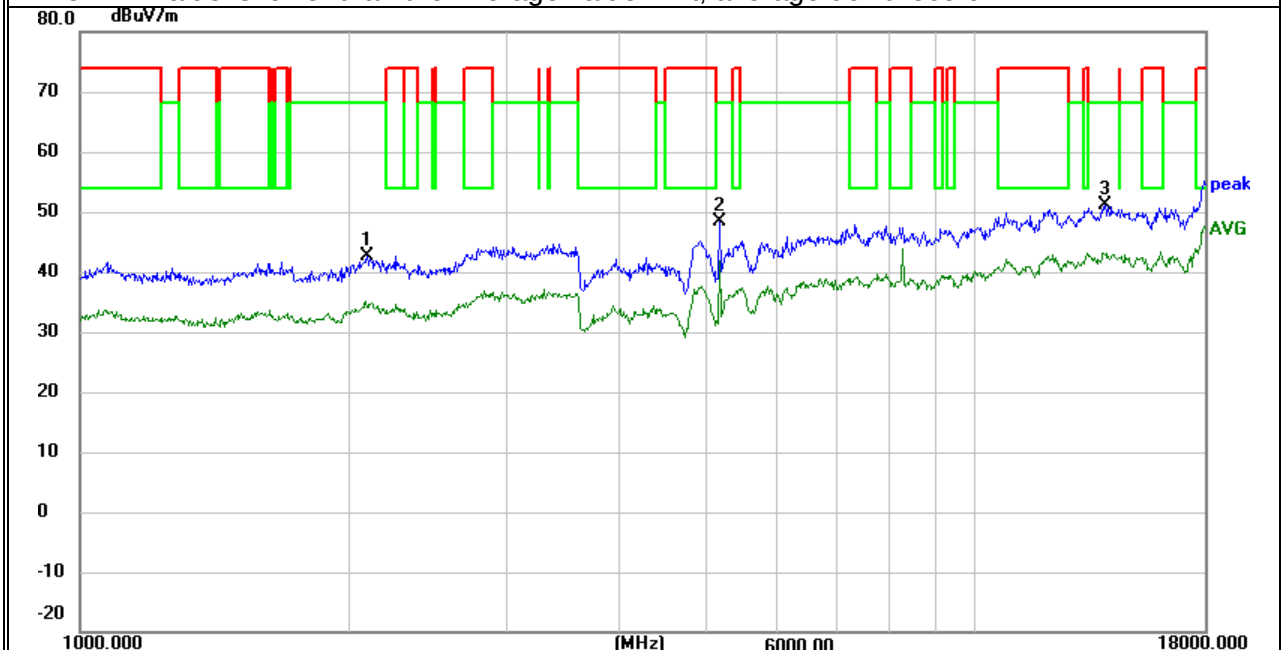

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1884.000	56.65	-14.92	41.73	68.20	-26.47	peak
H	5182.000	54.91	-6.22	48.69	68.20	-19.51	peak
H	13903.850	45.80	5.31	51.11	68.20	-17.09	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

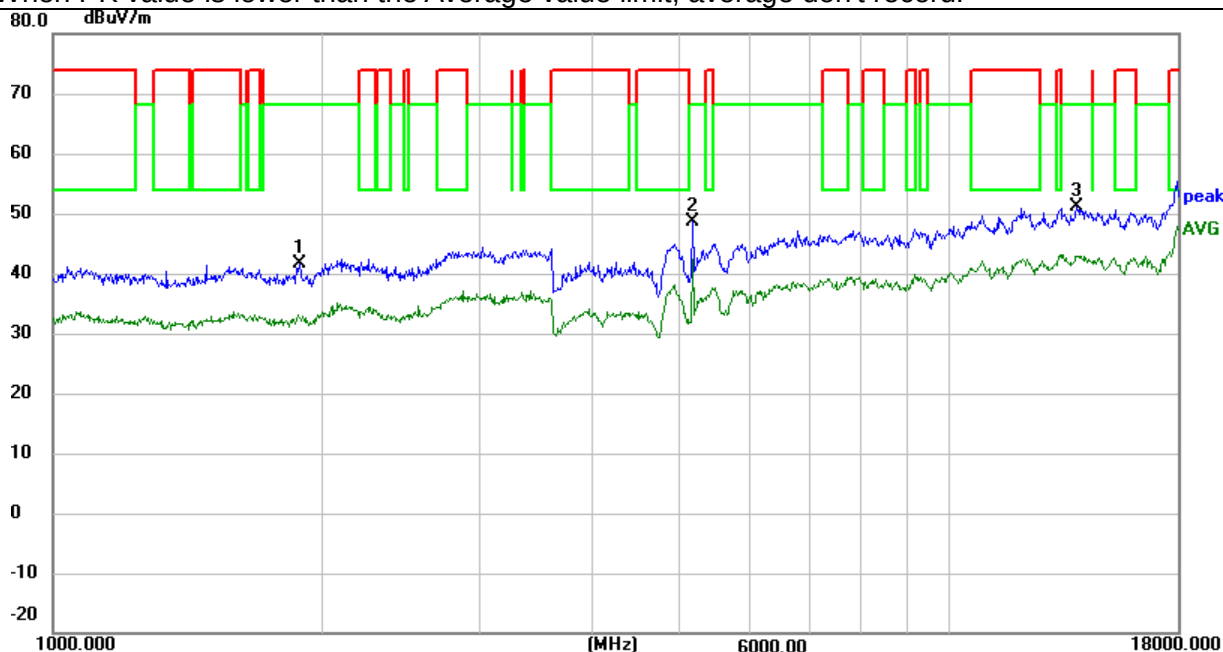

5200

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1630.700	58.02	-16.64	41.38	68.20	-26.82	peak
V	5197.725	57.70	-6.38	51.32	68.20	-16.88	peak
V	14376.875	44.95	5.59	50.54	68.20	-17.66	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

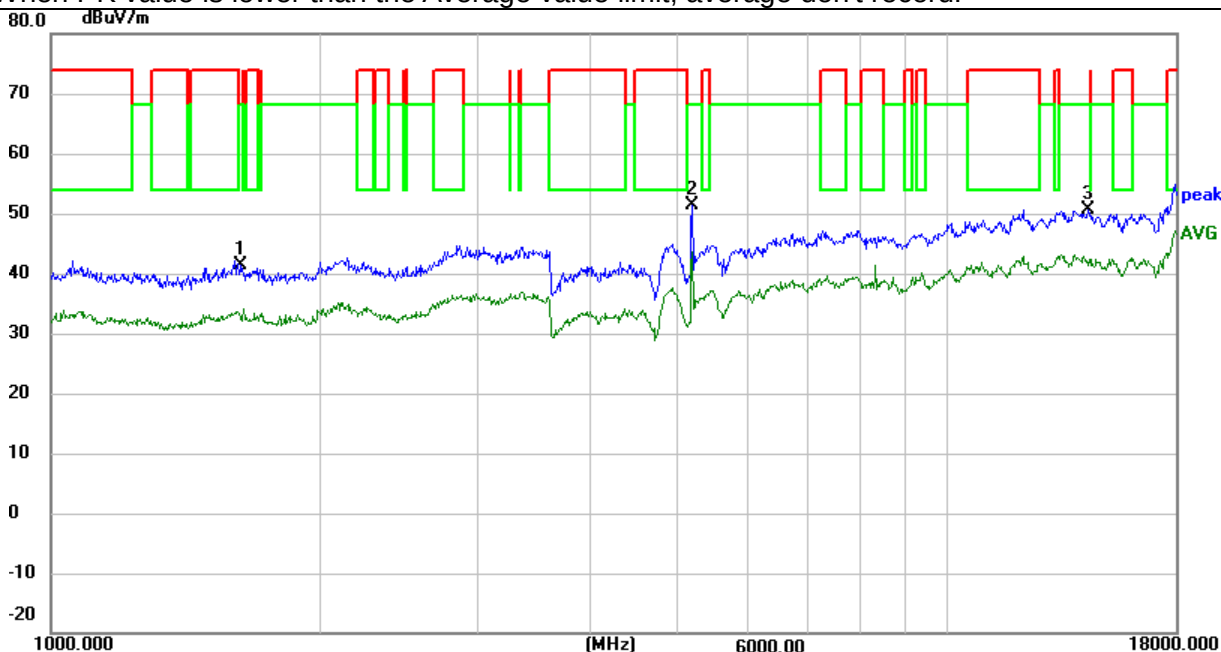

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1973.250	55.09	-14.21	40.88	68.20	-27.32	peak
H	5199.425	58.52	-6.39	52.13	68.20	-16.07	peak
H	14155.025	45.66	5.42	51.08	68.20	-17.12	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

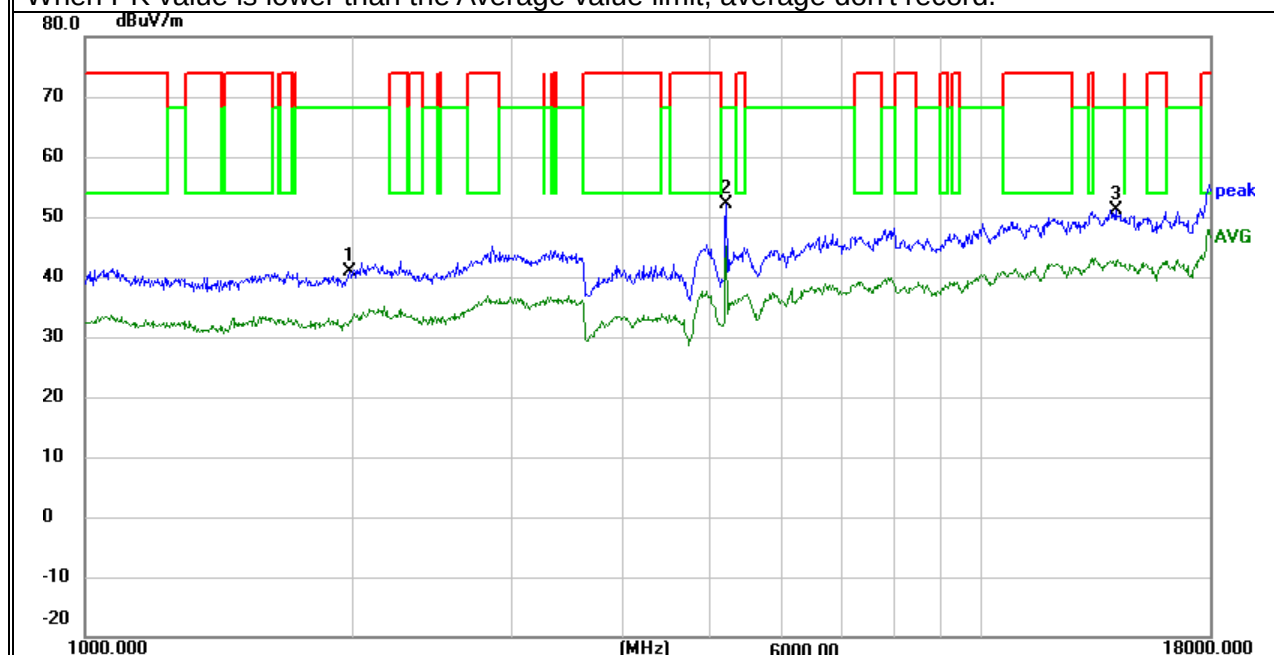

5240

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	3460.325	54.76	-9.54	45.22	68.20	-22.98	peak
V	5238.100	57.07	-6.02	51.05	68.20	-17.15	peak
V	13483.950	46.15	5.47	51.62	68.20	-16.58	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

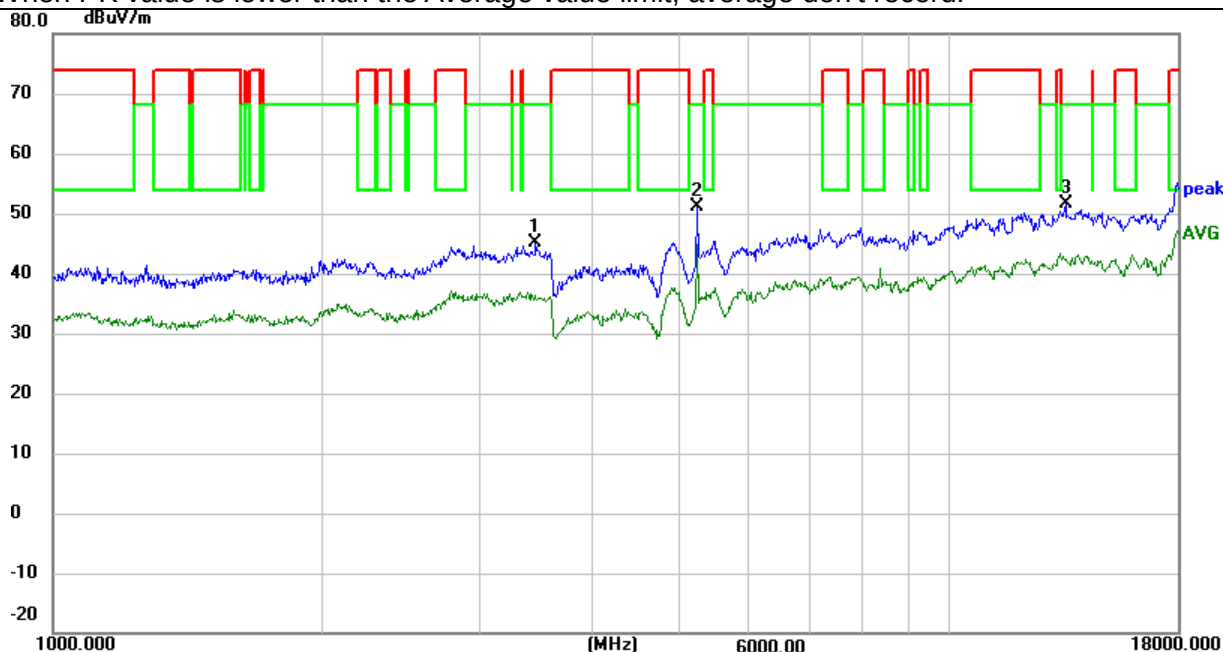

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2100.750	55.03	-12.49	42.54	68.20	-25.66	peak
H	5241.500	57.57	-5.98	51.59	68.20	-16.61	peak
H	14135.050	45.27	5.30	50.57	68.20	-17.63	peak


Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

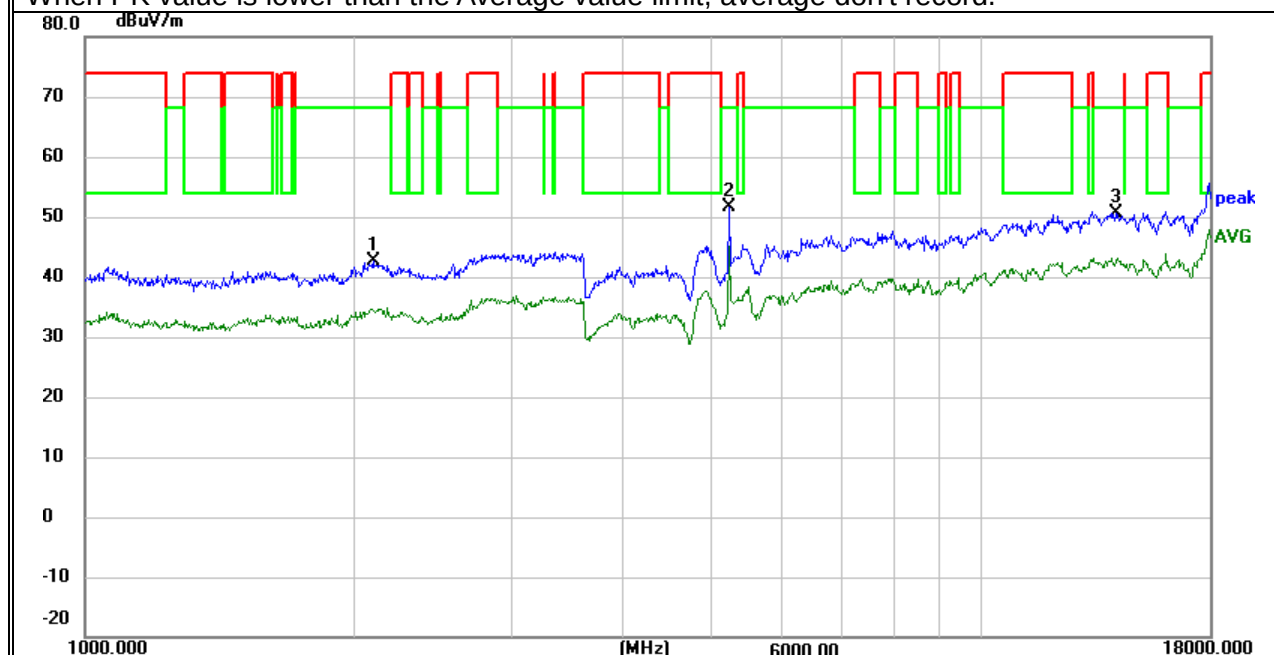

EUT:	AUTO Smart Diagnostic Tool	Model No.:	X-431 PRO ELITE V2
Temperature:	25 °C	Relative Humidity :	56%
Test Mode:	TX(5.3) - 802.11a	Test By:	Allen Liu

5260

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	1638.350	57.57	-16.68	40.89	68.20	-27.31	peak
V	5253.825	51.93	-5.98	45.95	68.20	-22.25	peak
V	13455.475	44.46	5.33	49.79	68.20	-18.41	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

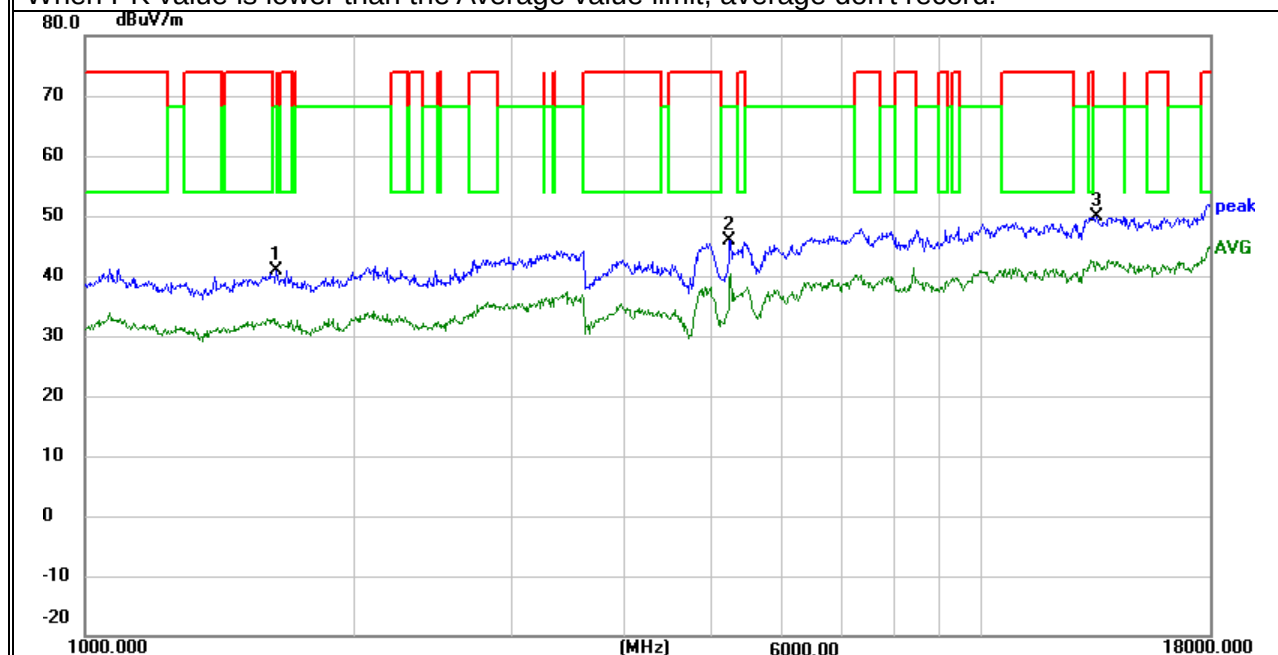

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2150.900	56.13	-12.78	43.35	68.20	-24.85	peak
H	7212.650	49.13	-2.19	46.94	68.20	-21.26	peak
H	14240.450	43.87	5.74	49.61	68.20	-18.59	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

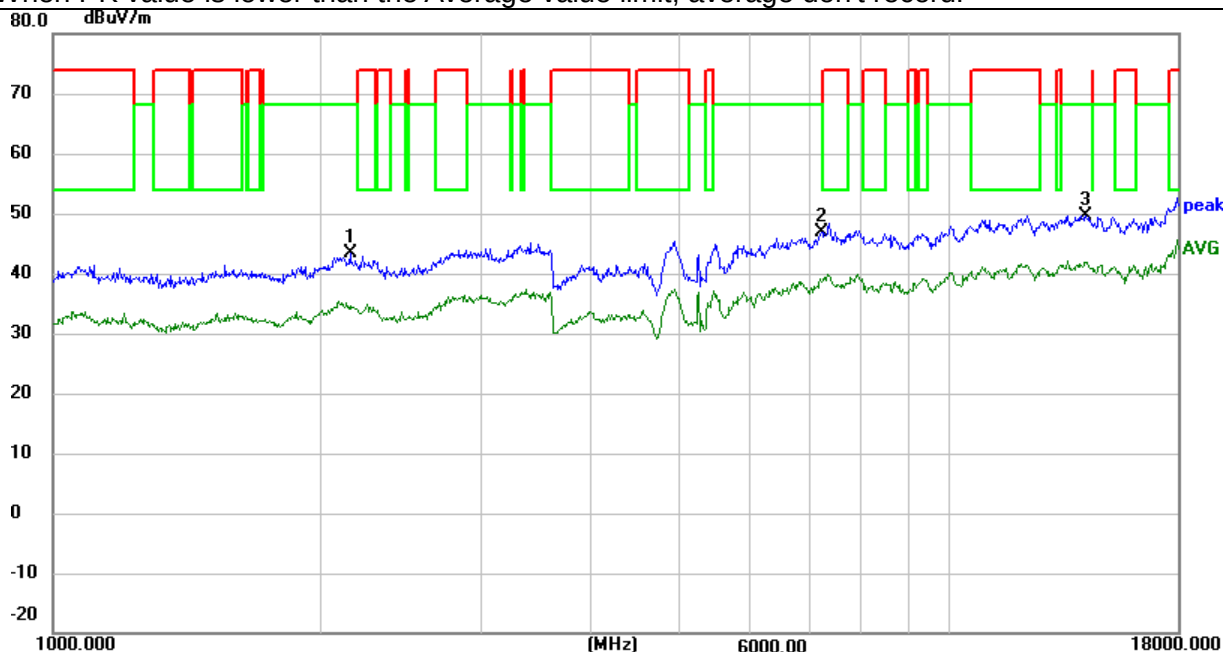

5280

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
V	2061.225	54.44	-12.79	41.65	68.20	-26.55	peak
V	4904.475	54.04	-7.34	46.70	74.00	-27.30	peak
V	4933.800	45.19	-6.48	38.71	54.00	-15.29	AVG
V	16223.500	44.56	6.17	50.73	68.20	-17.47	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

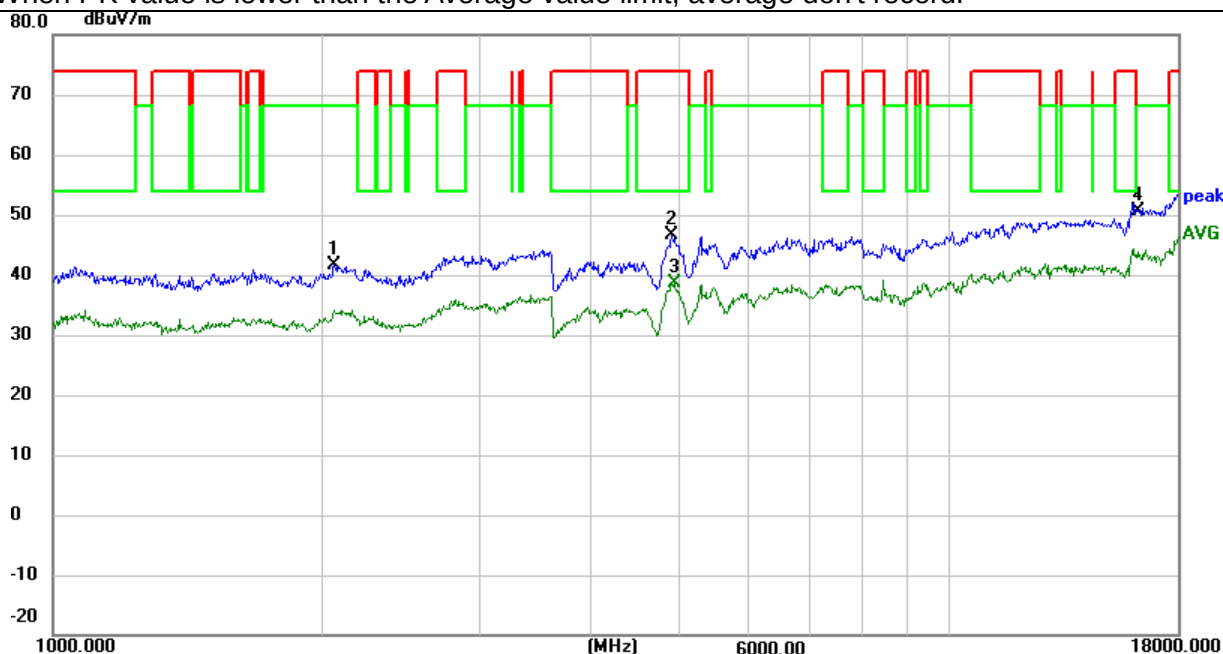

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1999.600	56.33	-13.61	42.72	68.20	-25.48	peak
H	9971.750	47.75	1.05	48.80	68.20	-19.40	peak
H	16810.425	45.21	6.13	51.34	68.20	-16.86	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

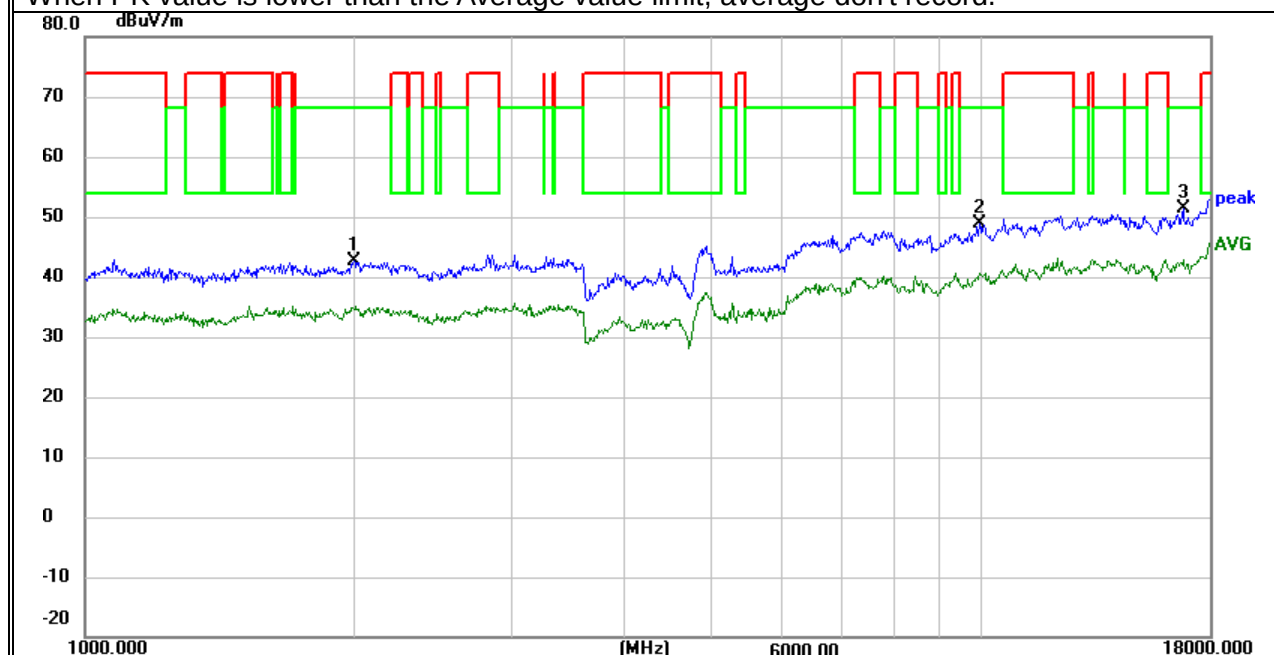

5320

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2926.100	54.57	-10.04	44.53	68.20	-23.67	peak
V	6952.125	50.47	-3.60	46.87	68.20	-21.33	peak
V	13852.425	45.39	5.15	50.54	68.20	-17.66	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

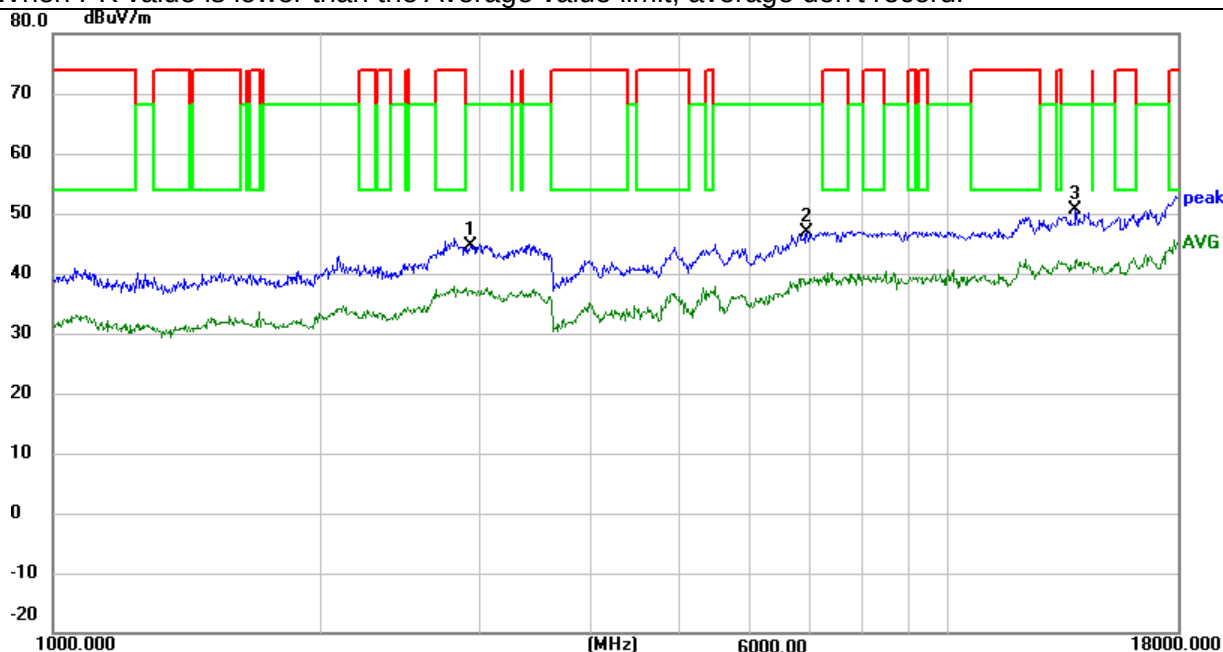

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2085.450	55.04	-12.60	42.44	68.20	-25.76	peak
H	10588.000	45.94	2.69	48.63	68.20	-19.57	peak
H	16571.575	45.04	6.46	51.50	68.20	-16.70	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

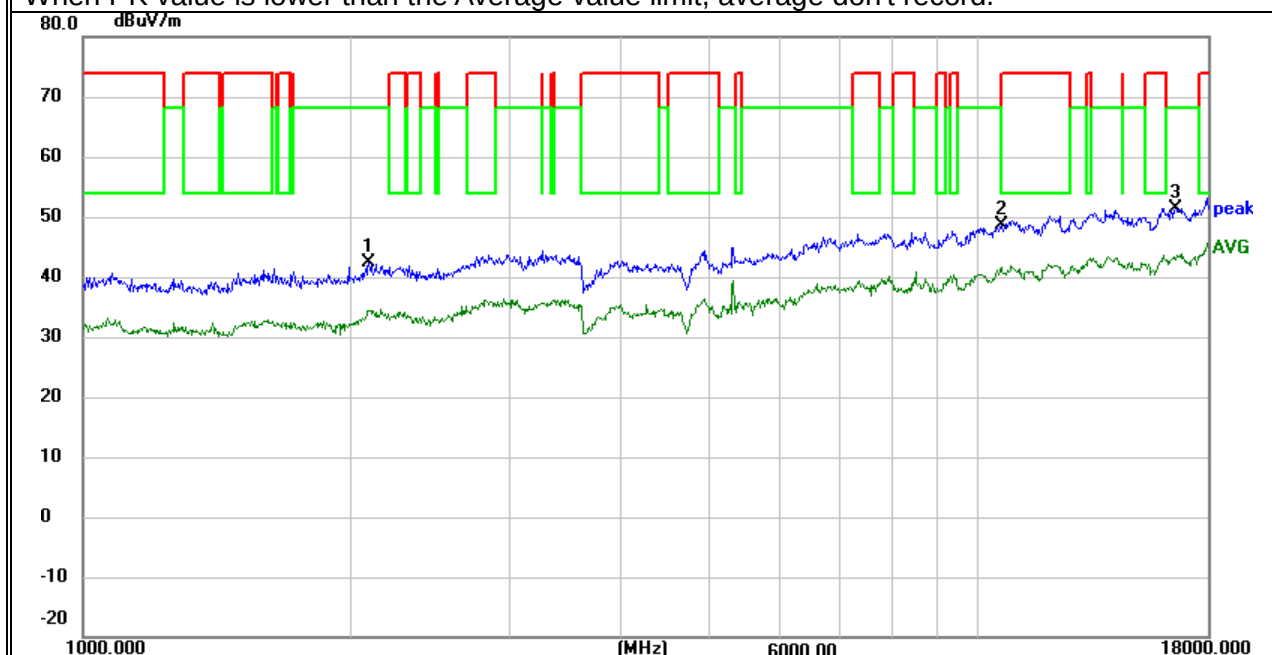

EUT:	AUTO Smart Diagnostic Tool	Model No.:	X-431 PRO ELITE V2
Temperature:	25 °C	Relative Humidity :	56%
Test Mode:	TX(5.6) - 802.11a	Test By:	Allen Liu

5500

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2914.625	55.98	-10.02	45.96	68.20	-22.24	peak
V	7202.450	49.14	-2.01	47.13	68.20	-21.07	peak
V	13478.850	44.53	5.44	49.97	68.20	-18.23	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

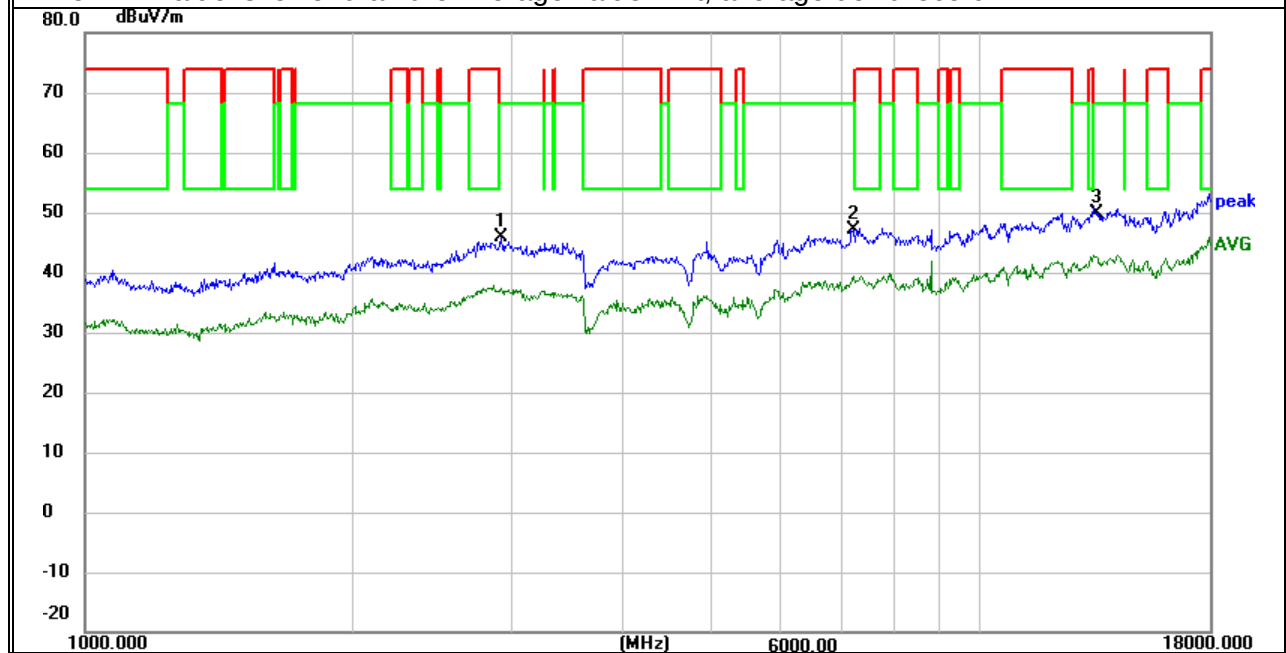

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	2129.225	56.30	-12.64	43.66	68.20	-24.54	peak
H	7951.300	48.80	-1.29	47.51	68.20	-20.69	peak
H	13446.975	45.20	5.29	50.49	68.20	-17.71	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

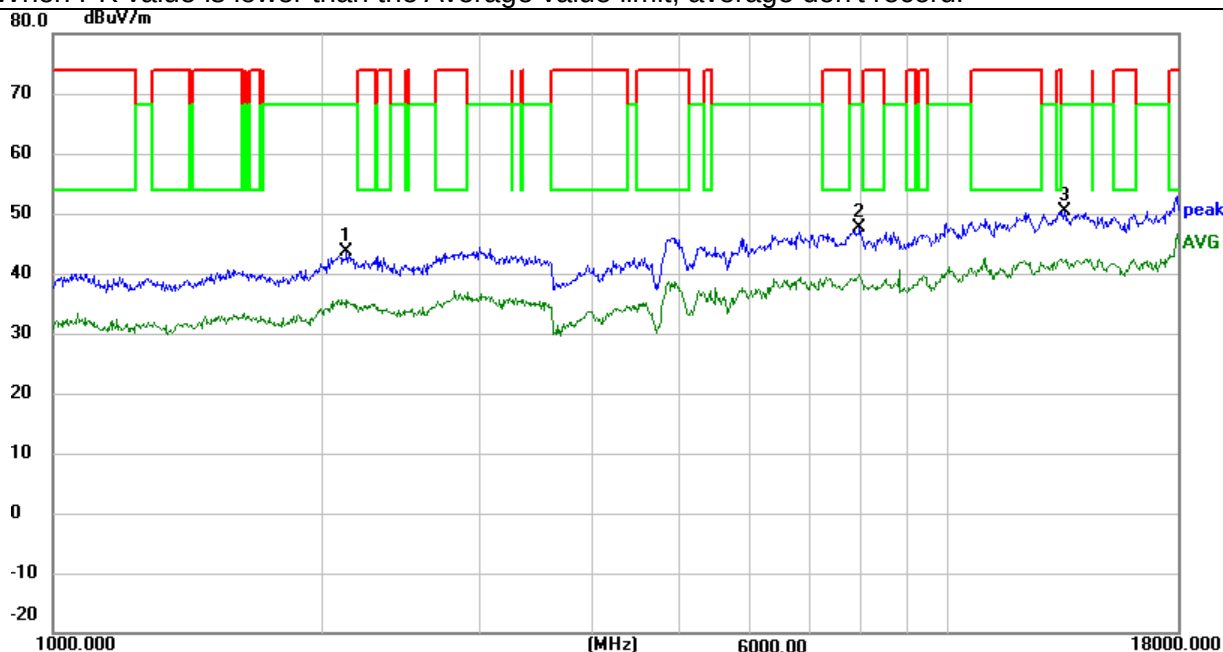

5600

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1657.900	58.39	-16.73	41.66	68.20	-26.54	peak
V	2691.075	55.89	-11.30	44.59	74.00	-29.41	peak
V	2698.725	47.83	-11.25	36.58	54.00	-17.42	AVG
V	10575.250	47.32	2.56	49.88	68.20	-18.32	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

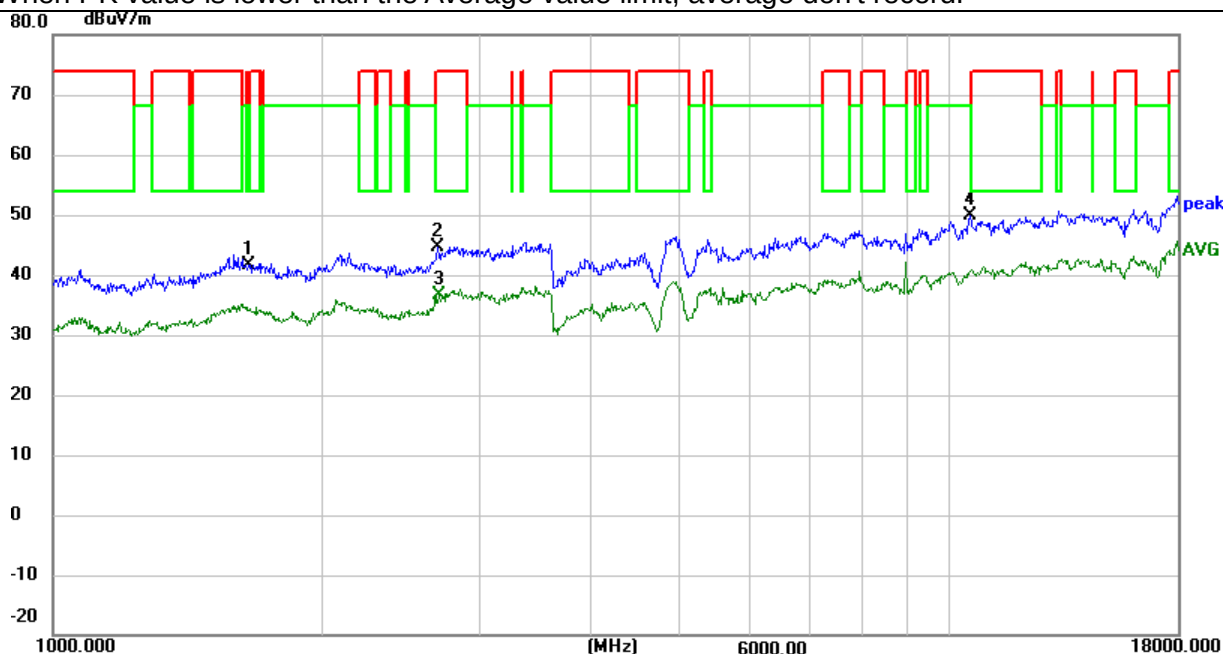

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2988.150	55.27	-9.62	45.65	68.20	-22.55	peak
H	6822.500	50.36	-3.38	46.98	68.20	-21.22	peak
H	14075.125	46.10	5.23	51.33	68.20	-16.87	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

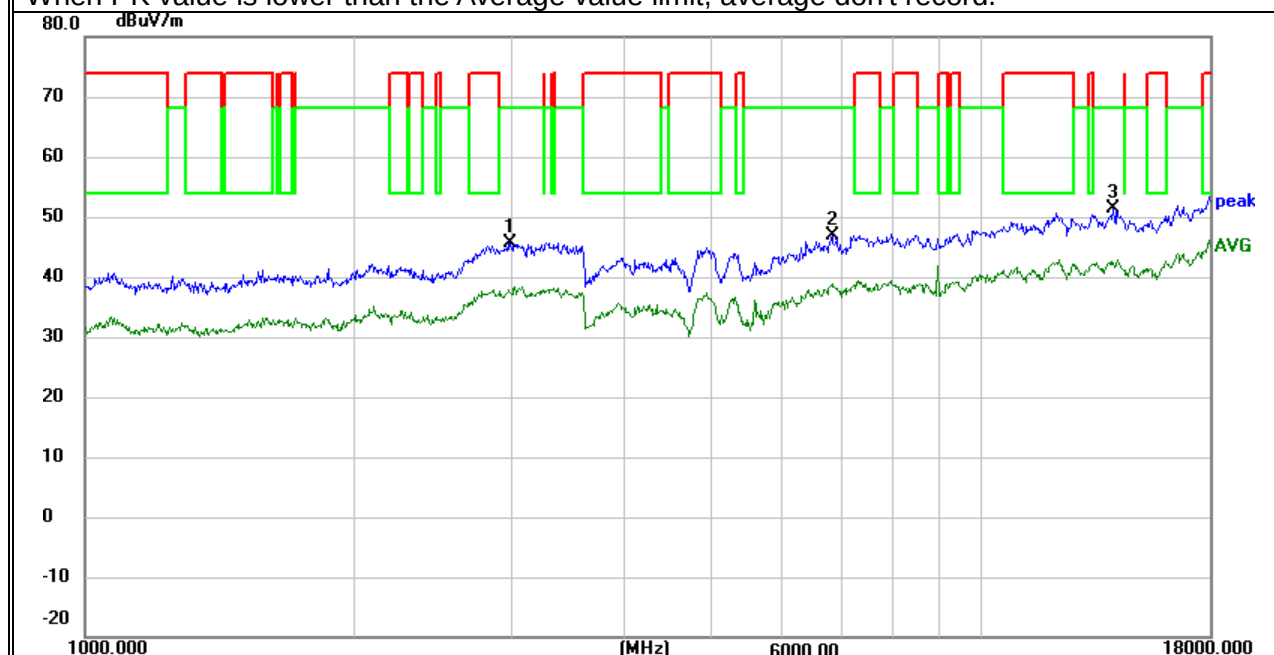

5700

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	2113.075	55.36	-12.54	42.82	68.20	-25.38	peak
V	6854.800	50.20	-3.63	46.57	68.20	-21.63	peak
V	14200.500	44.66	5.70	50.36	68.20	-17.84	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

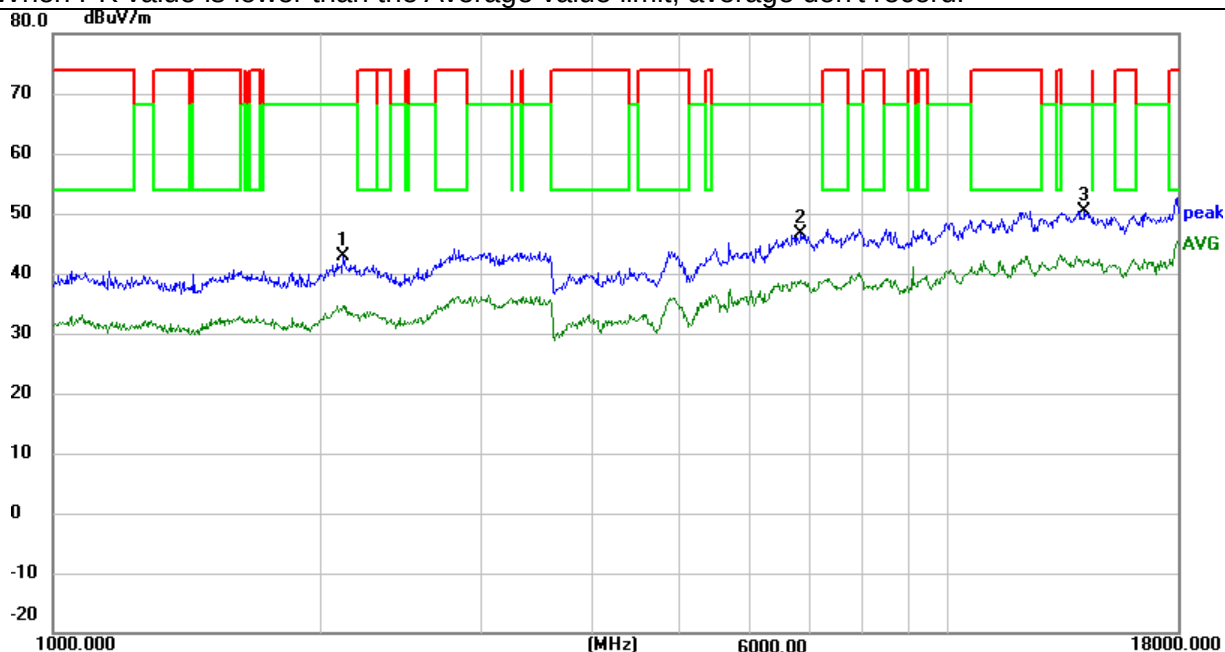

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2122.425	55.24	-12.61	42.63	68.20	-25.57	peak
H	2911.225	54.21	-10.01	44.20	68.20	-24.00	peak
H	12083.150	38.18	4.86	43.04	54.00	-10.96	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

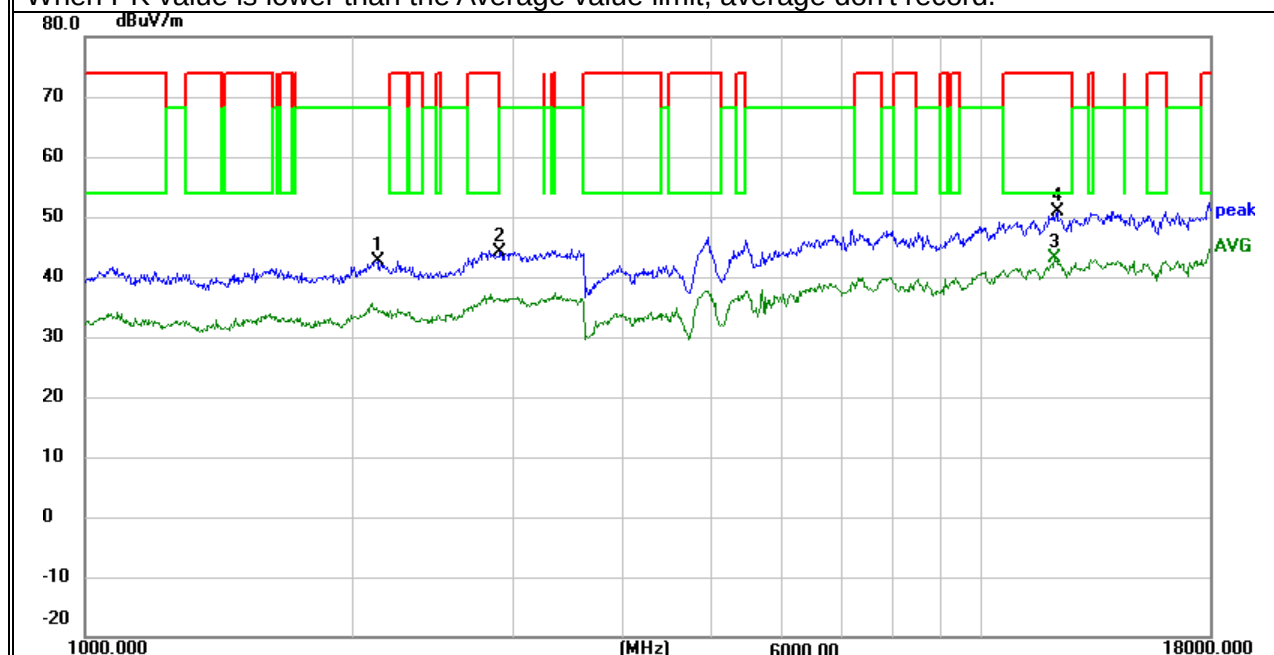

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	22.6℃	Relative Humidity :	62%
Pressure :	1010 hPa	Test Voltage:	DC 3.7V
Test Mode :	TX (5.8G) -- 802.11a		

5745

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2159.825	55.34	-12.96	42.38	68.20	-25.82	peak
V	5743.850	61.04	-5.30	55.74	68.20	-12.46	peak
V	13283.775	45.58	5.15	50.73	74.00	-23.27	peak
V	13317.775	37.39	5.23	42.62	54.00	-11.38	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

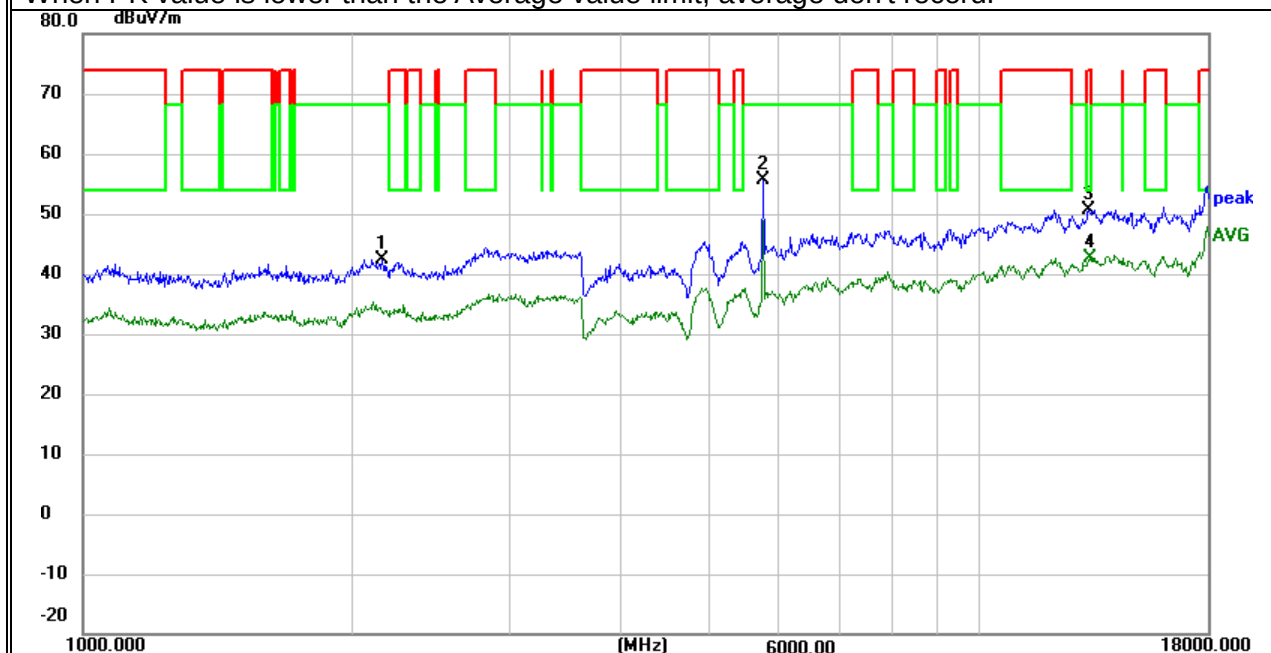

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2145.800	55.54	-12.74	42.80	68.20	-25.40	peak
H	5743.850	58.14	-5.30	52.84	68.20	-15.36	peak
H	13195.375	46.39	4.50	50.89	68.20	-17.31	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

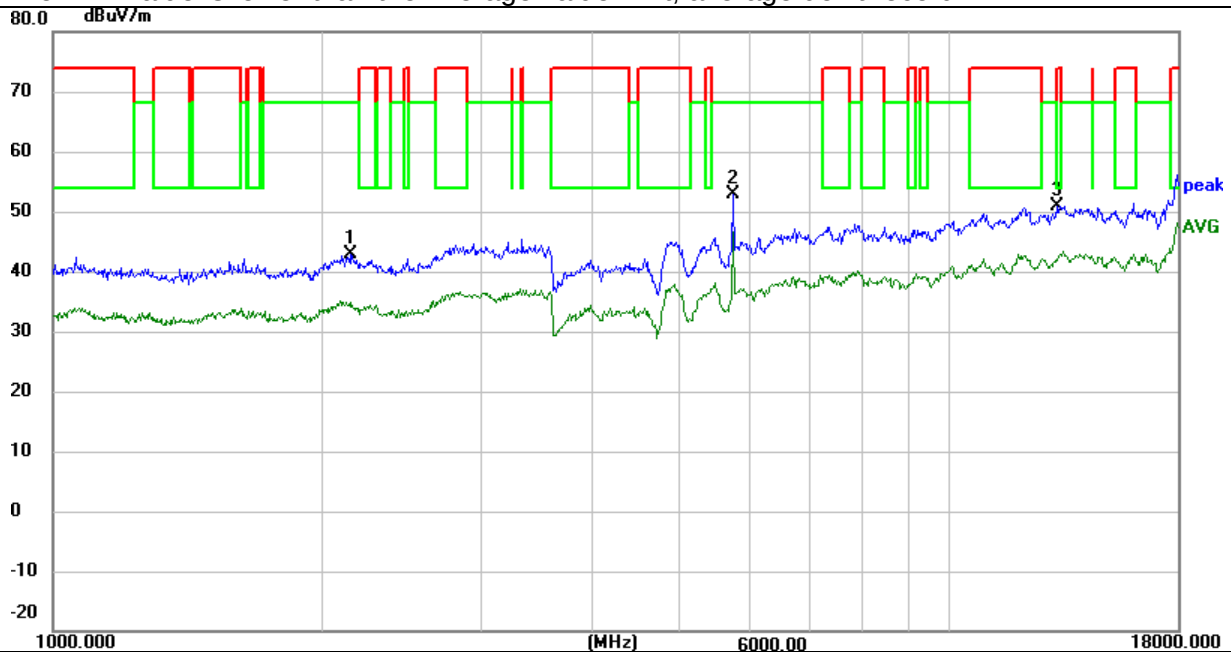

5785

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2013.200	56.08	-13.41	42.67	68.20	-25.53	peak
V	5787.200	62.28	-5.28	57.00	68.20	-11.20	peak
V	13949.325	44.95	5.48	50.43	68.20	-17.77	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

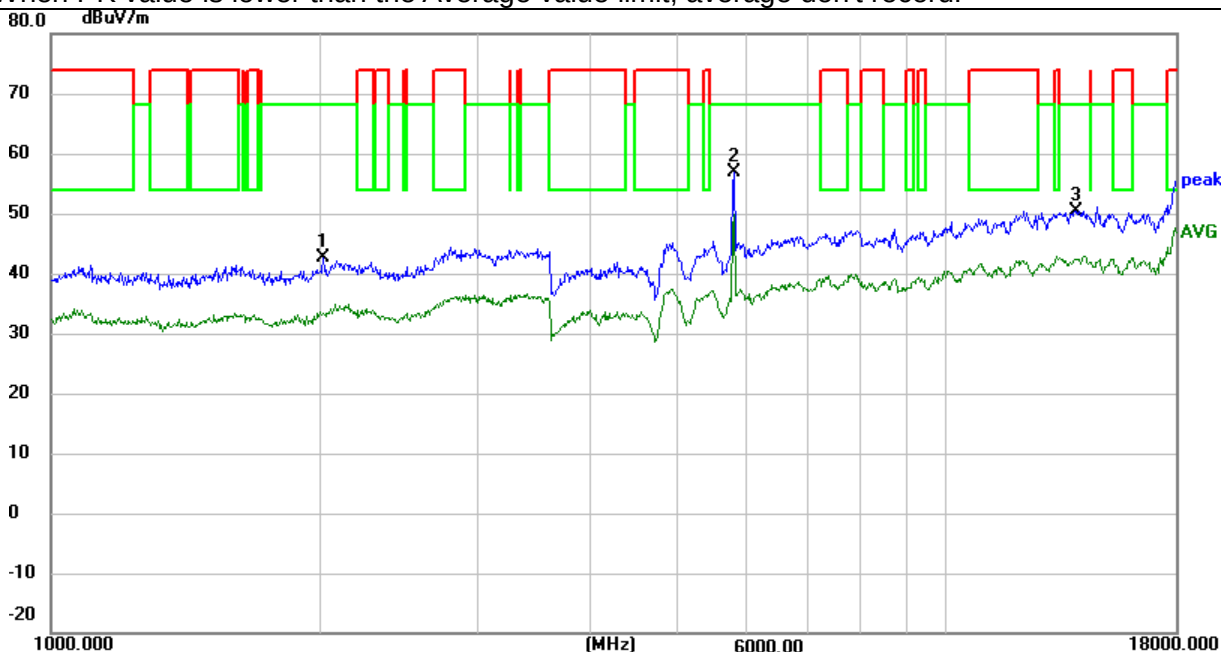

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	3417.825	54.18	-9.63	44.55	68.20	-23.65	peak
H	5784.225	58.55	-5.28	53.27	68.20	-14.93	peak
H	14236.200	44.94	5.74	50.68	68.20	-17.52	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

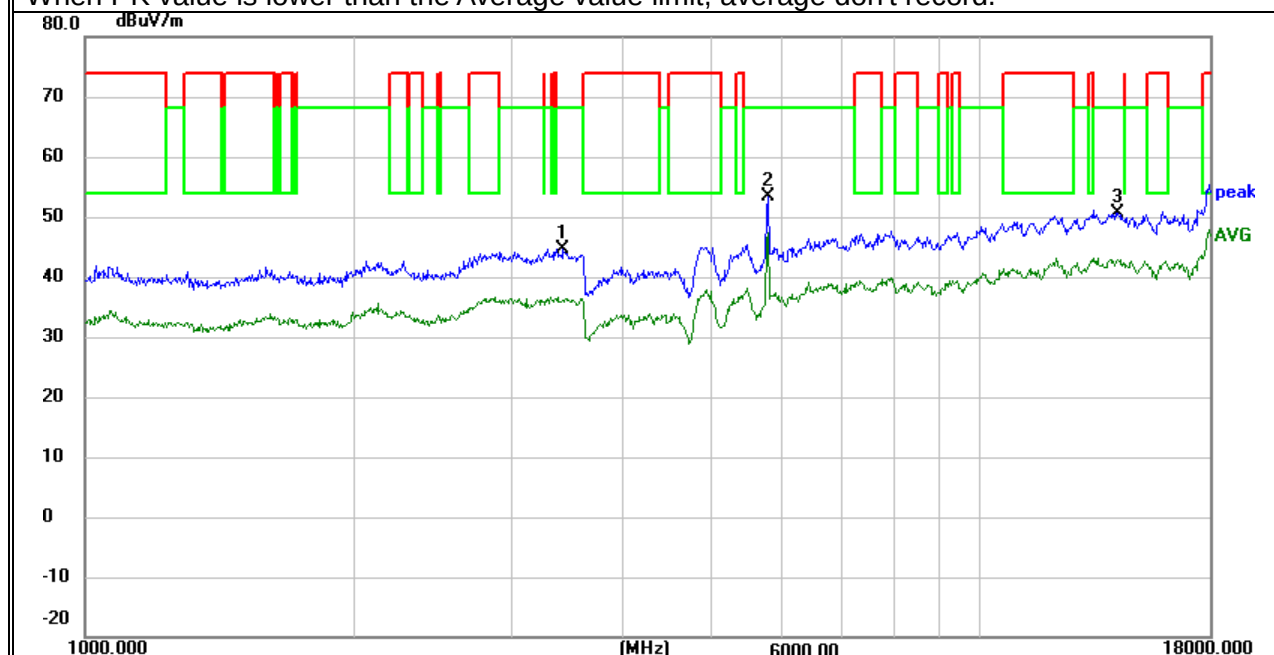

5825

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	3294.150	53.72	-9.35	44.37	68.20	-23.83	peak
V	5824.175	60.75	-5.22	55.53	68.20	-12.67	peak
V	13437.625	45.80	5.24	51.04	68.20	-17.16	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

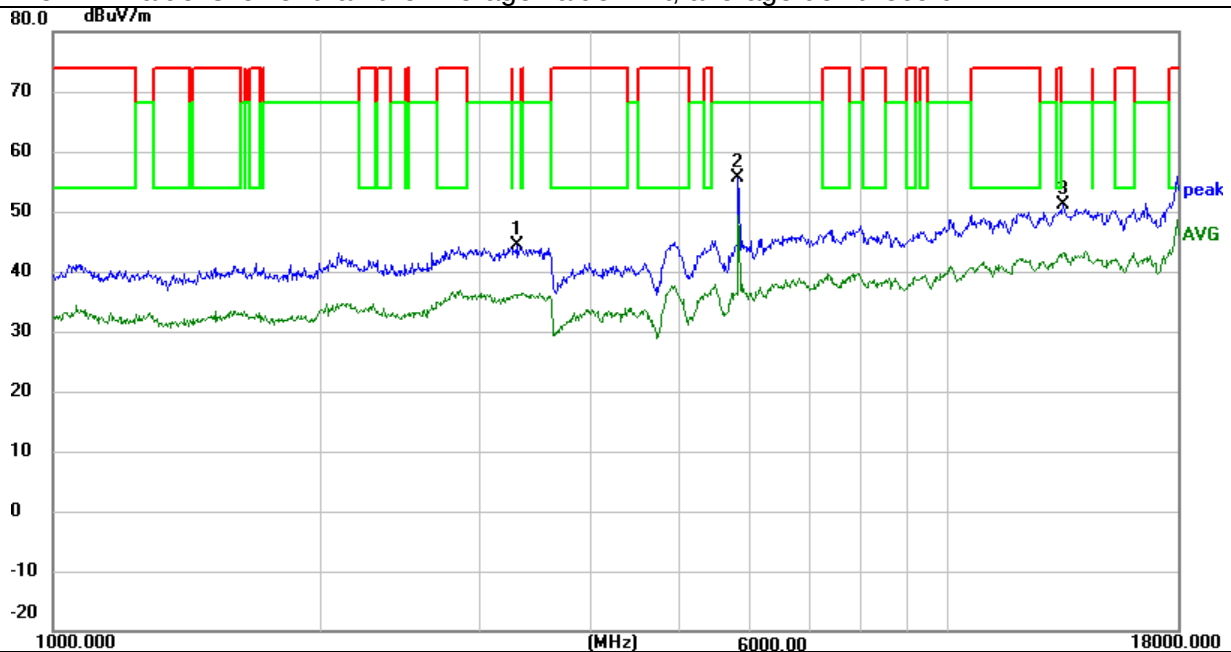

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2133.900	55.37	-12.68	42.69	68.20	-25.51	peak
H	5824.175	58.12	-5.22	52.90	68.20	-15.30	peak
H	14034.325	46.03	5.47	51.50	68.20	-16.70	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

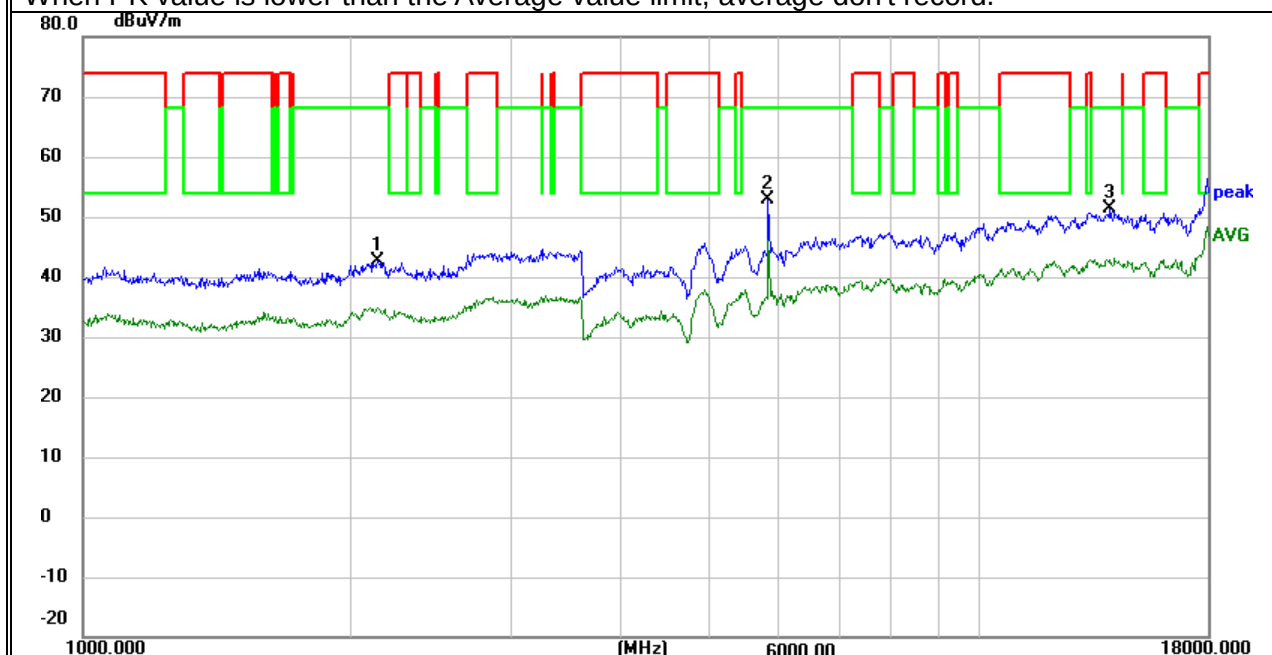

2.2.9 SPURIOUS EMISSION ABOVE 1GHZ (18GHZ TO 40GHZ)

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	22.6 °C	Relative Humidity :	62%
Pressure :	1010 hPa	Test Voltage:	DC 3.7V
Test Mode :	TX (5.2G) -- 802.11a		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19753.623	61.72	-12.89	48.83	74.00	-25.17	peak
V	19753.623	48.87	-12.89	35.98	54.00	-18.02	AVG
V	33910.145	56.79	-5.05	51.74	68.20	-16.46	peak
V	39968.116	57.34	-3.58	53.76	68.20	-14.44	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5180MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

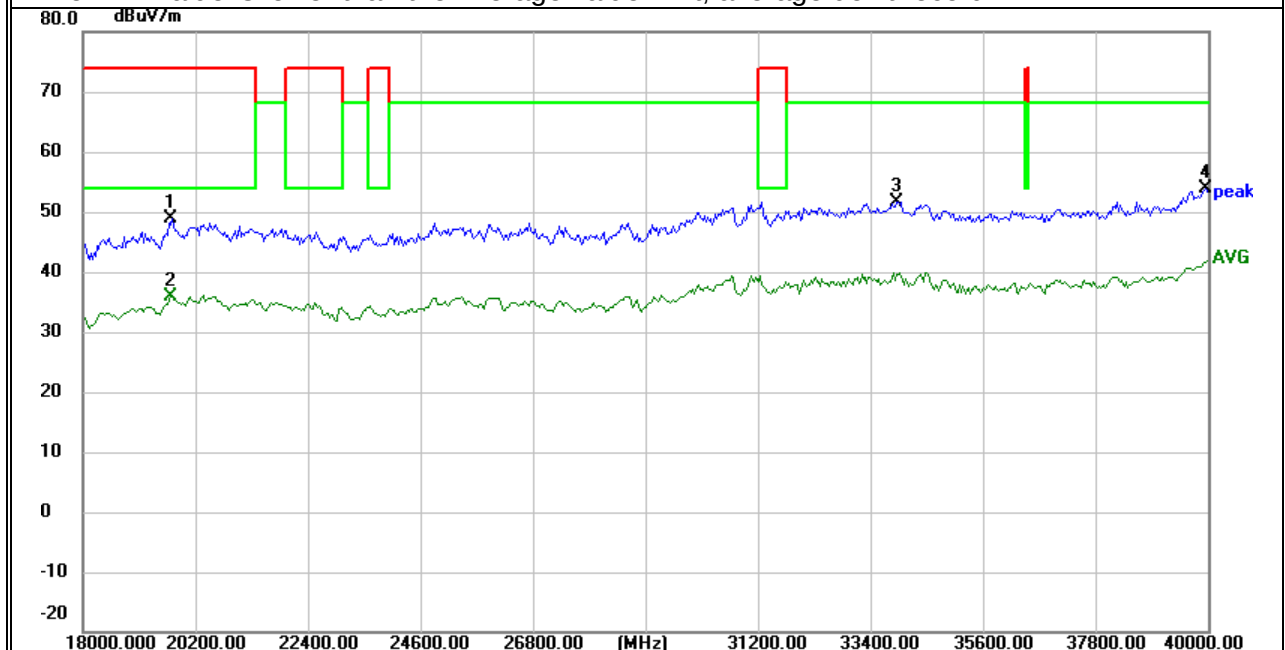

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20518.840	60.26	-12.15	48.11	74.00	-25.89	peak
H	20582.608	47.37	-12.14	35.23	54.00	-18.77	AVG
H	32634.783	59.56	-6.02	53.54	68.20	-14.66	peak
H	39713.043	58.76	-3.65	55.11	68.20	-13.09	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5180MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

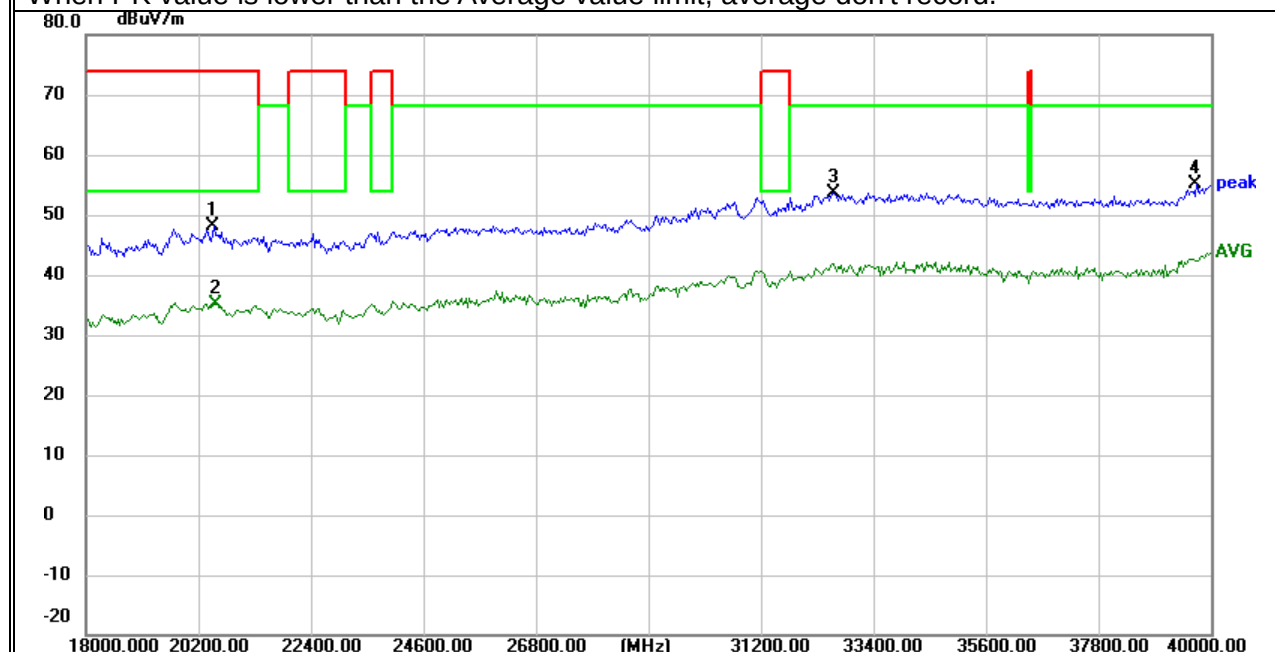

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	22.6 °C	Relative Humidity :	62%
Pressure :	1010 hPa	Test Voltage:	DC 3.7V
Test Mode :	TX (5.3G) -- 802.11a		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19721.739	48.45	-12.96	35.49	54.00	-18.51	AVG
V	19753.623	61.22	-12.89	48.33	74.00	-25.67	peak
V	31072.464	58.05	-7.50	50.55	68.20	-17.65	peak
V	39968.116	57.34	-3.58	53.76	68.20	-14.44	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5260MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

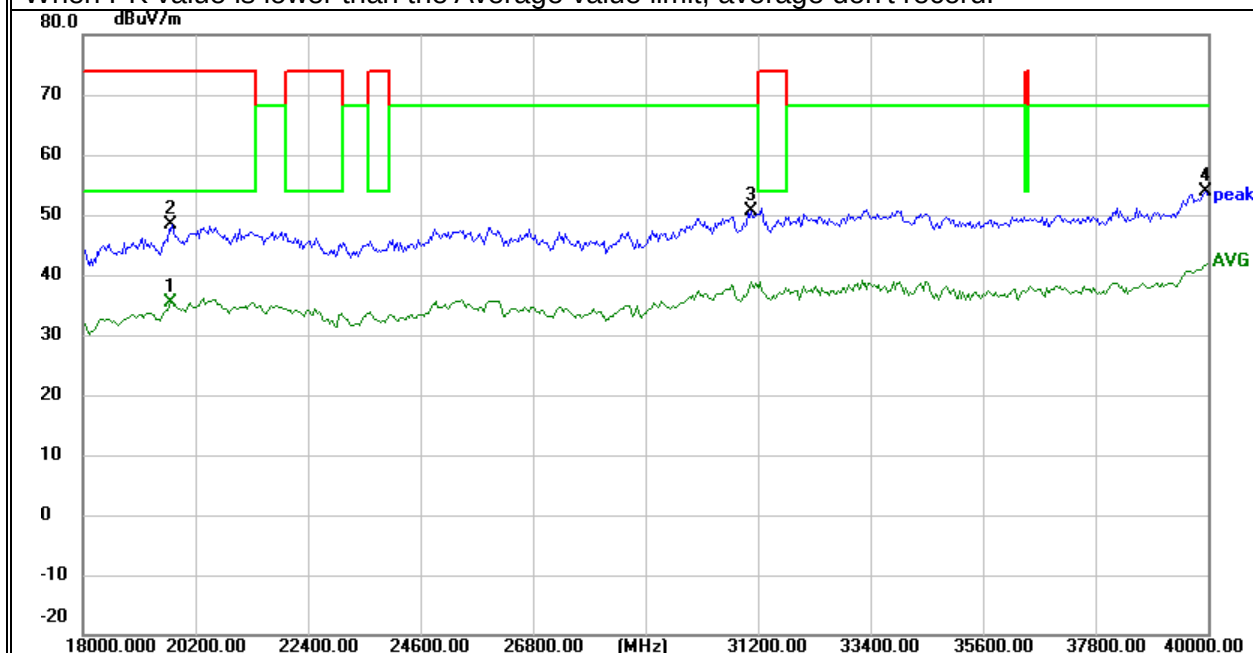

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20518.840	59.26	-12.15	47.11	74.00	-26.89	peak
H	20550.725	46.19	-12.14	34.05	54.00	-19.95	AVG
H	31136.232	59.80	-7.30	52.50	68.20	-15.70	peak
H	39713.043	57.76	-3.65	54.11	68.20	-14.09	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5260MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

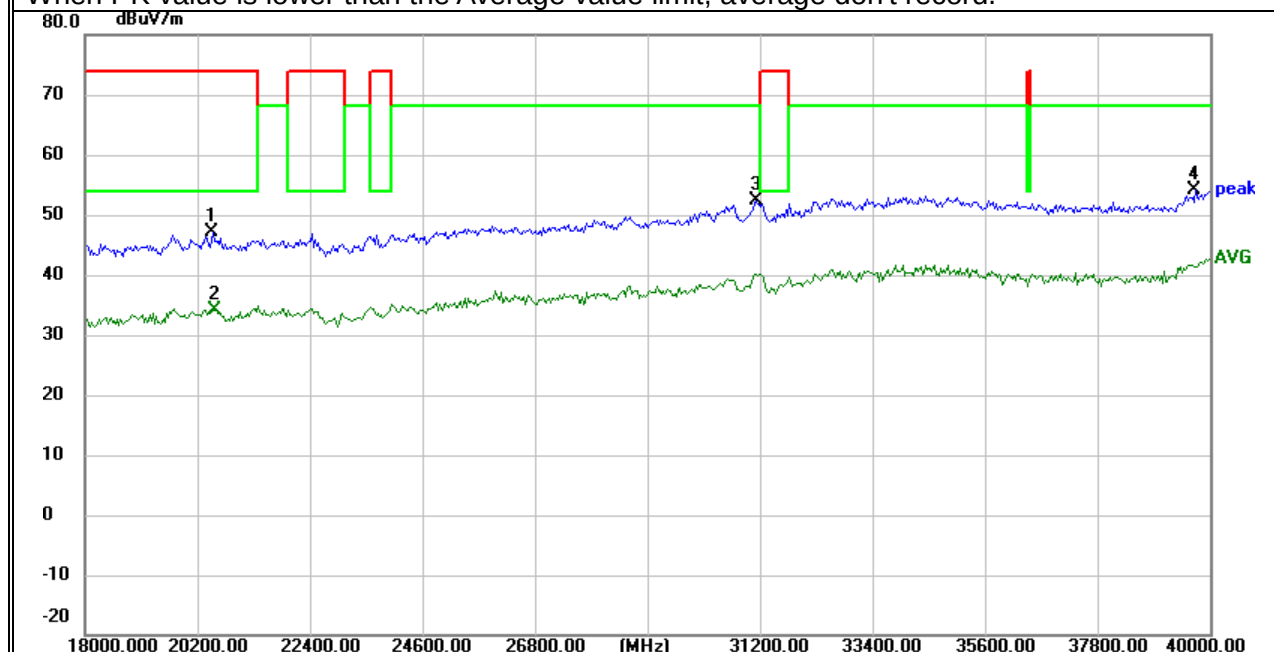

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	22.6 °C	Relative Humidity :	62%
Pressure :	1010 hPa	Test Voltage:	DC 3.7V
Test Mode :	TX (5.6G) -- 802.11a		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	19721.739	47.95	-12.96	34.99	54.00	-19.01	AVG
V	19753.623	60.72	-12.89	47.83	74.00	-26.17	peak
V	31072.464	58.05	-7.50	50.55	68.20	-17.65	peak
V	39681.159	57.01	-3.67	53.34	68.20	-14.86	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5500MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

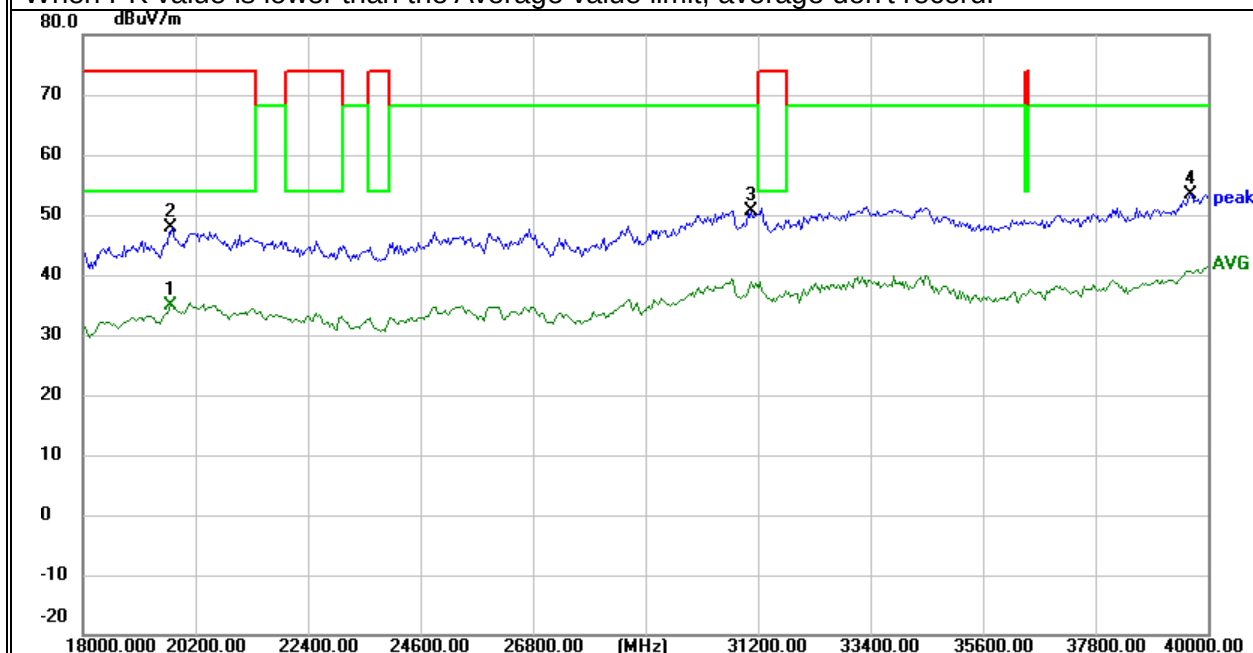

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20518.840	60.26	-12.15	48.11	74.00	-25.89	peak
H	20582.608	47.37	-12.14	35.23	54.00	-18.77	AVG
H	31136.232	58.30	-7.30	51.00	68.20	-17.20	peak
H	39968.116	57.15	-3.58	53.57	68.20	-14.63	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5500MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

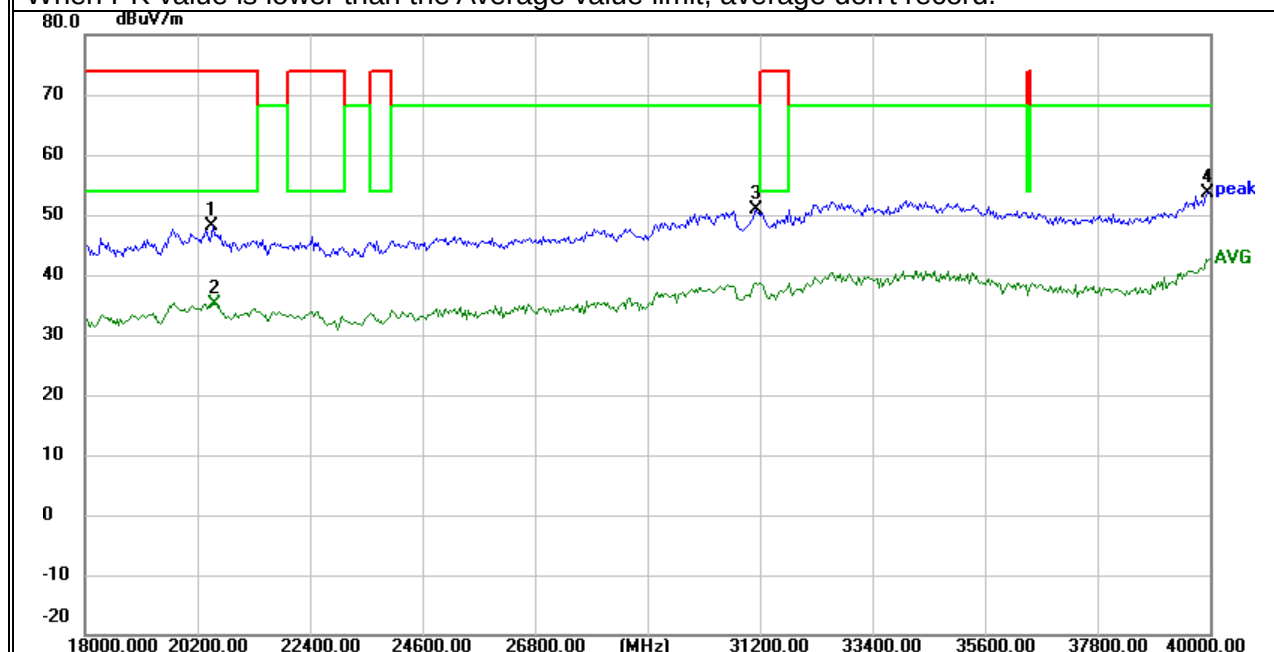

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	22.6 °C	Relative Humidity :	62%
Pressure :	1010 hPa	Test Voltage:	DC 3.7V
Test Mode :	TX (5.8G) -- 802.11a		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19689.855	48.03	-13.03	35.00	54.00	-19.00	AVG
V	19753.623	61.22	-12.89	48.33	74.00	-25.67	peak
V	30689.855	59.13	-7.90	51.23	68.20	-16.97	peak
V	39681.159	57.51	-3.67	53.84	68.20	-14.36	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5745MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

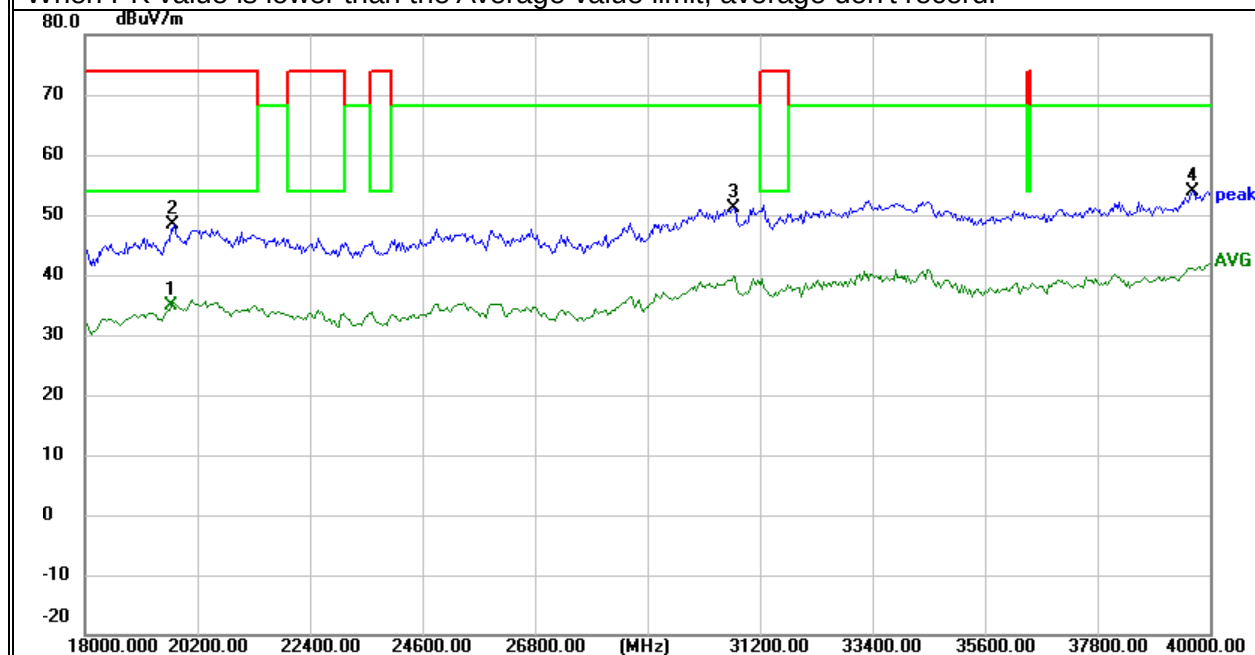

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20518.840	59.76	-12.15	47.61	74.00	-26.39	peak
H	20518.840	46.84	-12.15	34.69	54.00	-19.31	AVG
H	32252.174	58.49	-6.44	52.05	68.20	-16.15	peak
H	39713.043	57.76	-3.65	54.11	68.20	-14.09	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5745MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

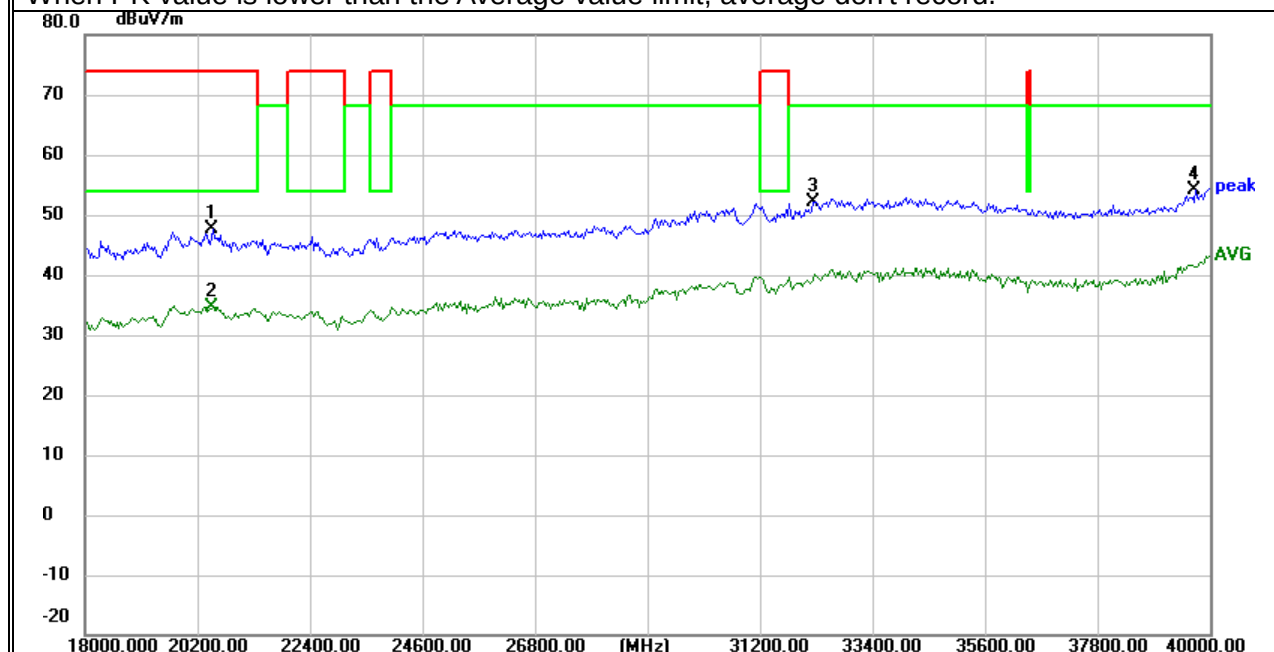

2.2.10 Radiated Spurious at Band Edges

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	22.6 °C	Relative Humidity :	62%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)- 802.11a 5180MHz~5240MHz TX (5.3G)- 802.11a 5260MHz~5320MHz TX (5.6G)- 802.11a 5500MHz~5700MHz TX (5.8G)- 802.11a 5745MHz~5825MHz		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	12.36	38.51	50.87	74.00	-23.13	peak
V	5150.000	3.33	38.51	41.84	54.00	-12.16	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5180MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

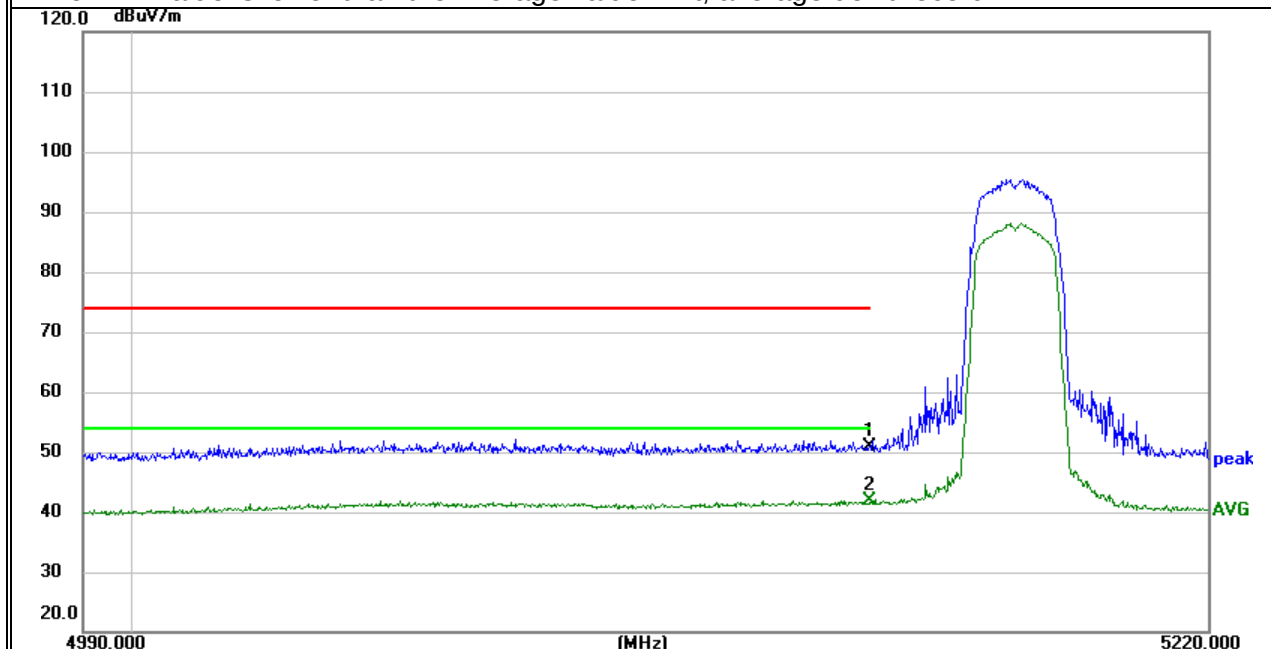

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	5150.000	15.70	38.51	54.21	74.00	-19.79	peak
H	5150.000	4.21	38.51	42.72	54.00	-11.28	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5180MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

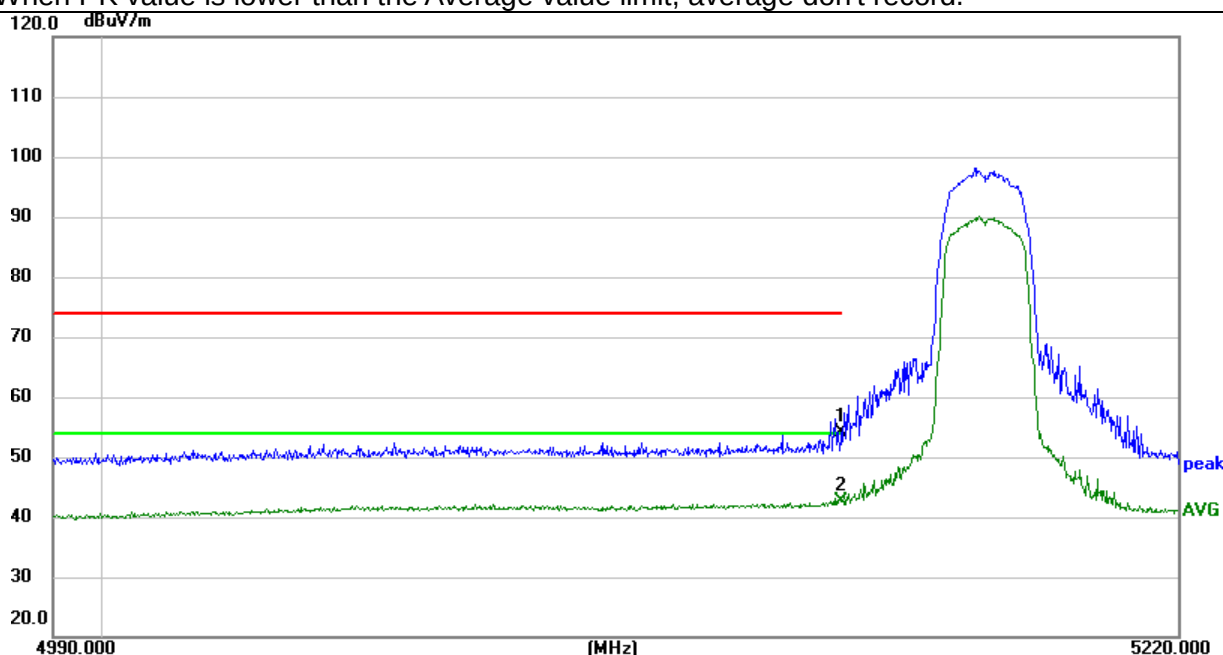

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5350.000	10.51	37.64	48.15	74.00	-25.85	peak
V	5350.000	1.44	37.64	39.08	54.00	-14.92	AVG


Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5240MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

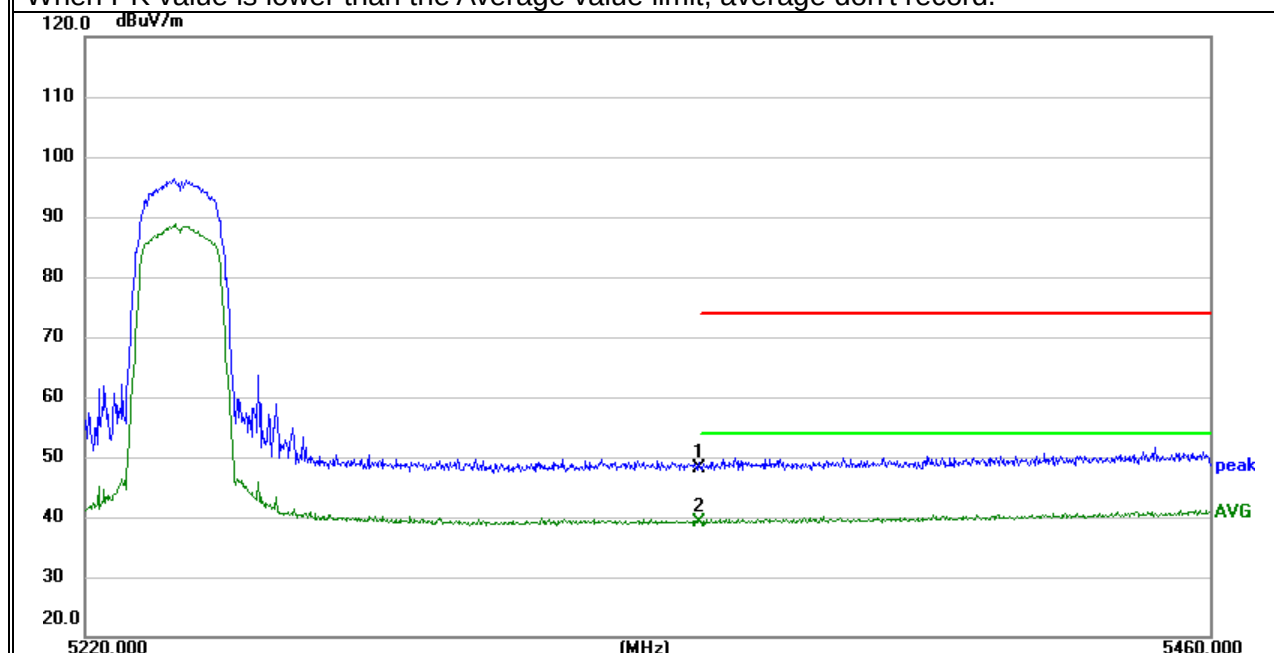

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	10.65	37.64	48.29	74.00	-25.71	peak
H	5350.000	1.22	37.64	38.86	54.00	-15.14	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5240MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

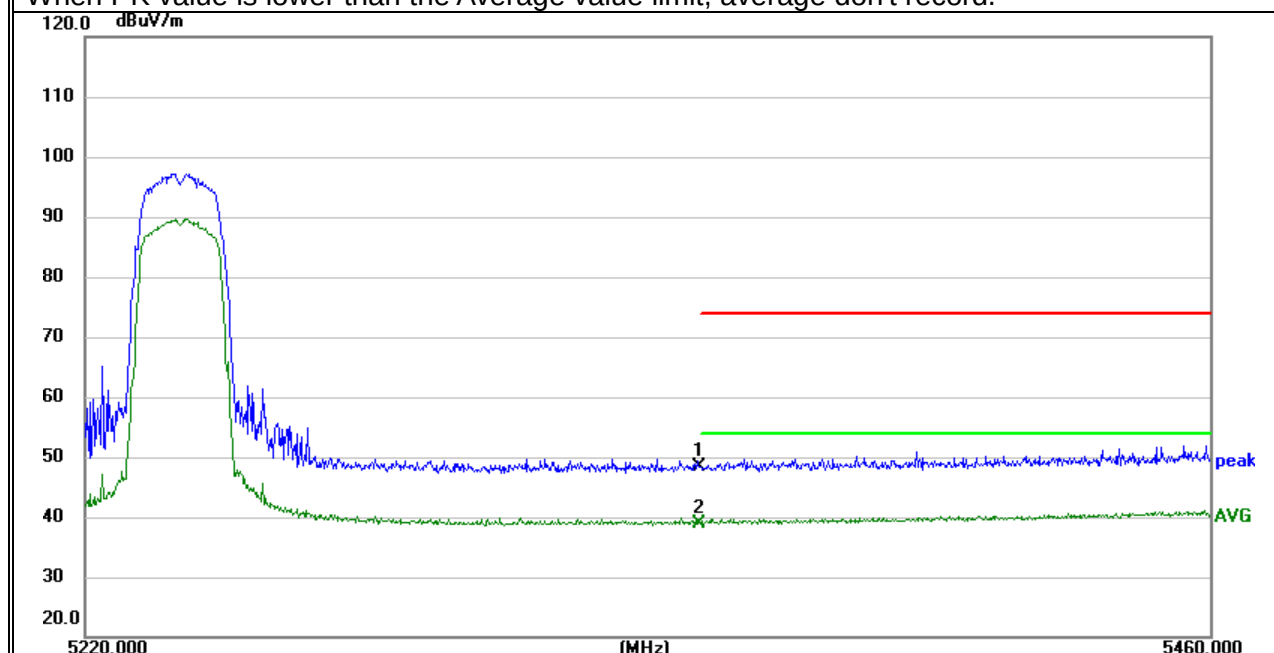

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5150.000	11.83	38.51	50.34	74.00	-23.66	peak
V	5150.000	2.03	38.51	40.54	54.00	-13.46	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5260MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

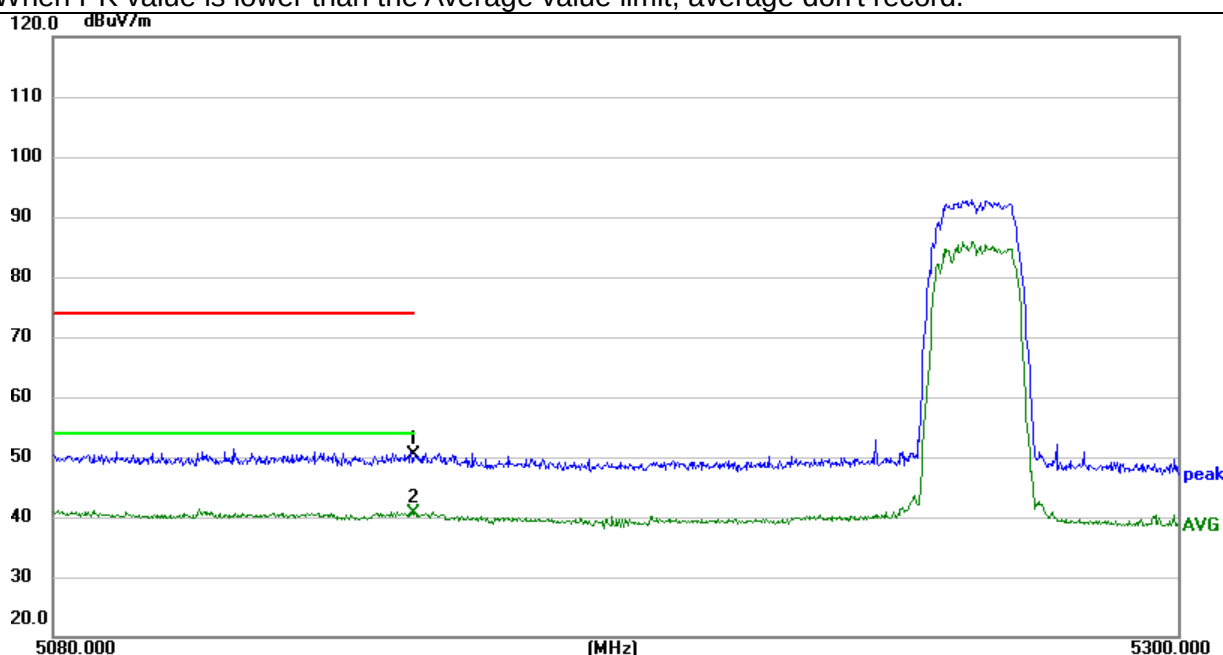

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	11.03	38.51	49.54	74.00	-24.46	peak
H	5150.000	1.93	38.51	40.44	54.00	-13.56	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5260MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

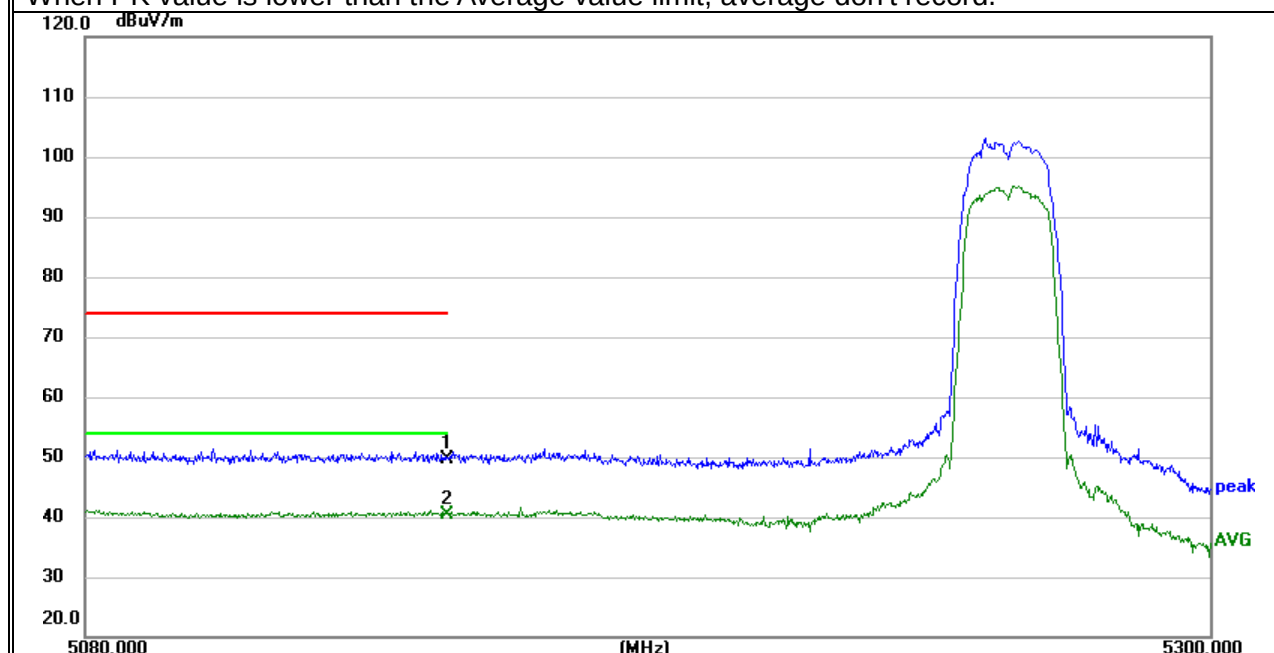

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5350.000	9.90	37.64	47.54	74.00	-26.46	peak
V	5350.000	0.60	37.64	38.24	54.00	-15.76	AVG


Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5320MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

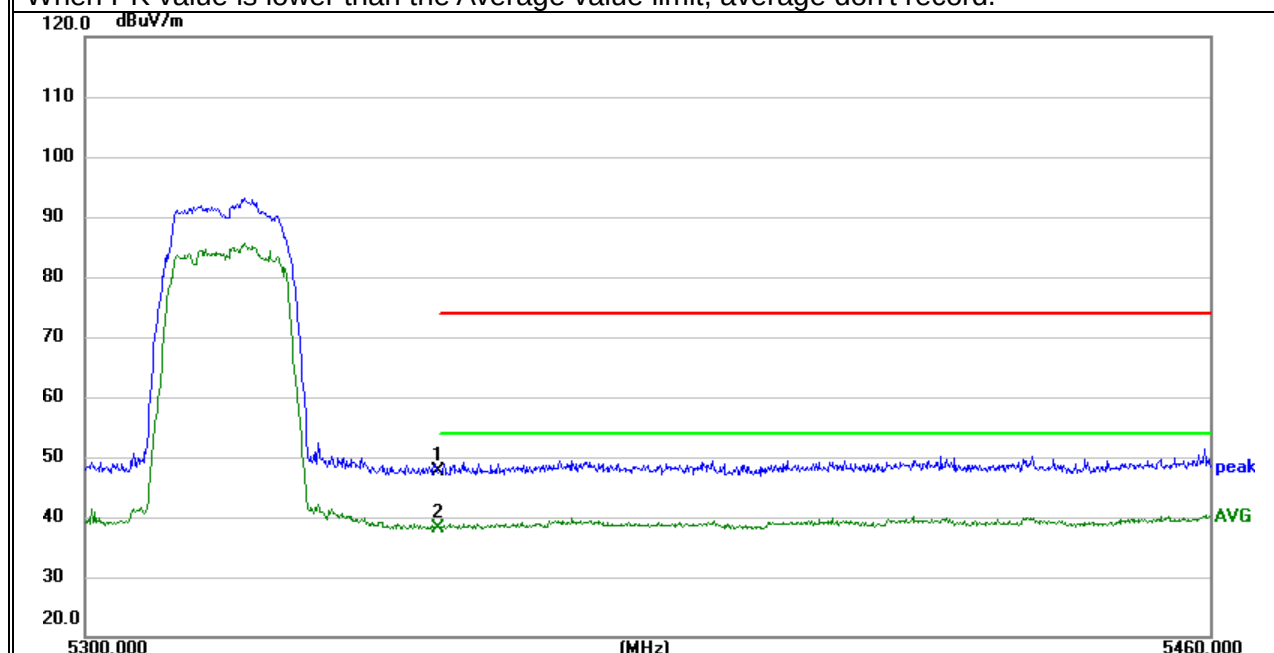

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	9.93	37.64	47.57	74.00	-26.43	peak
H	5350.000	0.53	37.64	38.17	54.00	-15.83	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5320MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

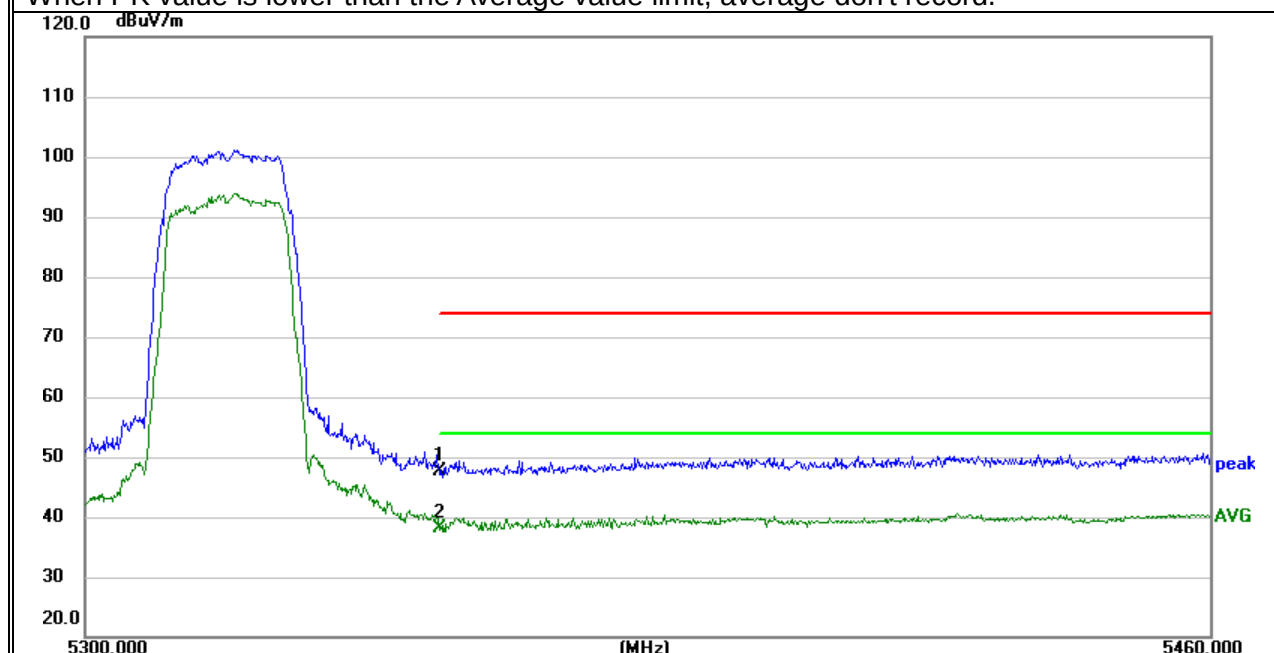

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5460.000	10.66	38.51	49.17	68.20	-19.03	peak
V	5460.000	1.32	38.51	39.83	54.00	-14.17	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5500MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

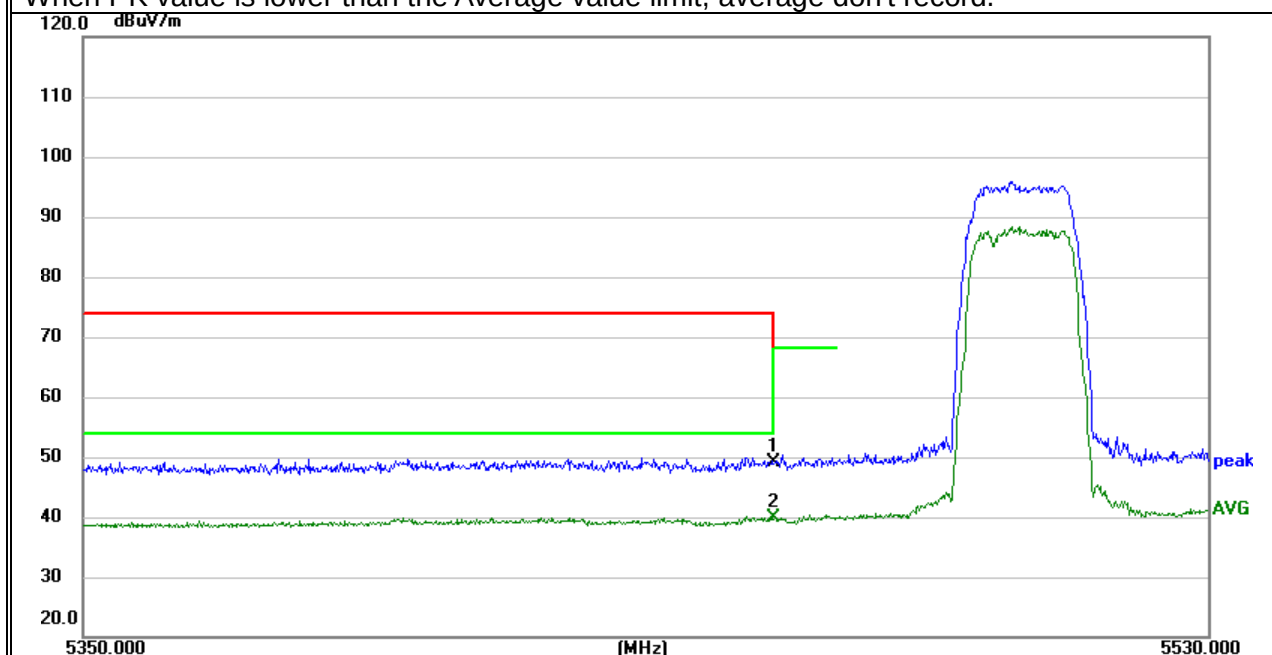

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	11.96	38.51	50.47	68.20	-17.73	peak
H	5460.000	2.95	38.51	41.46	54.00	-12.54	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5500MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

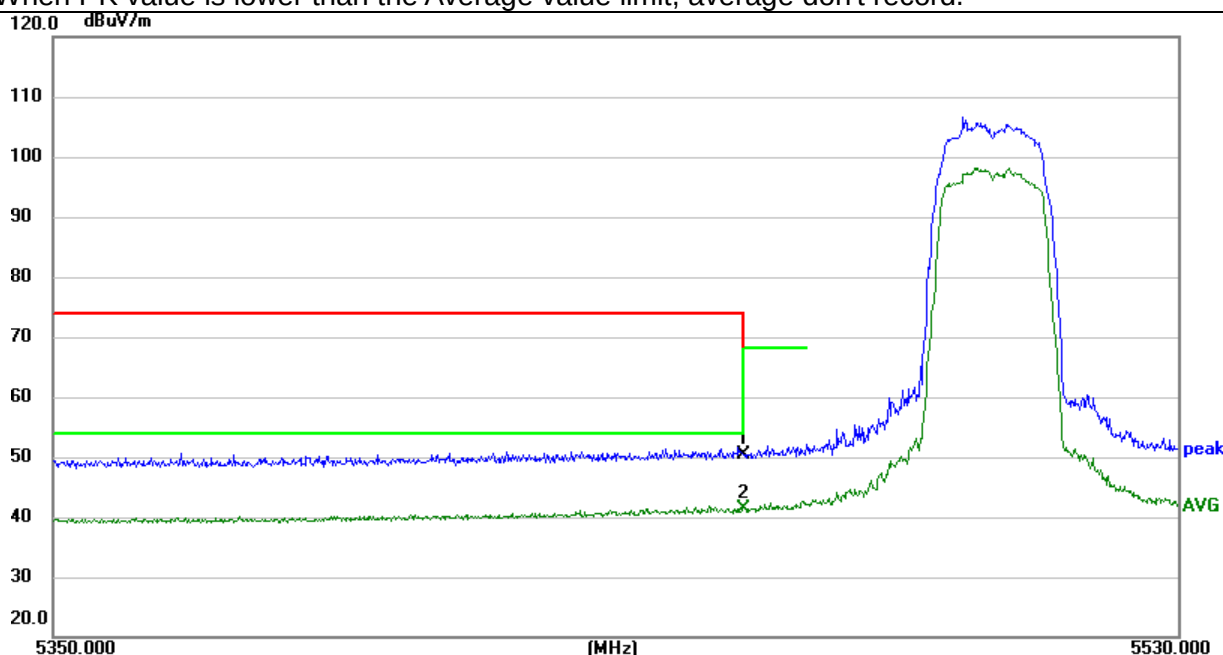

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5725.000	9.78	39.09	48.87	68.20	-19.33	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5700MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

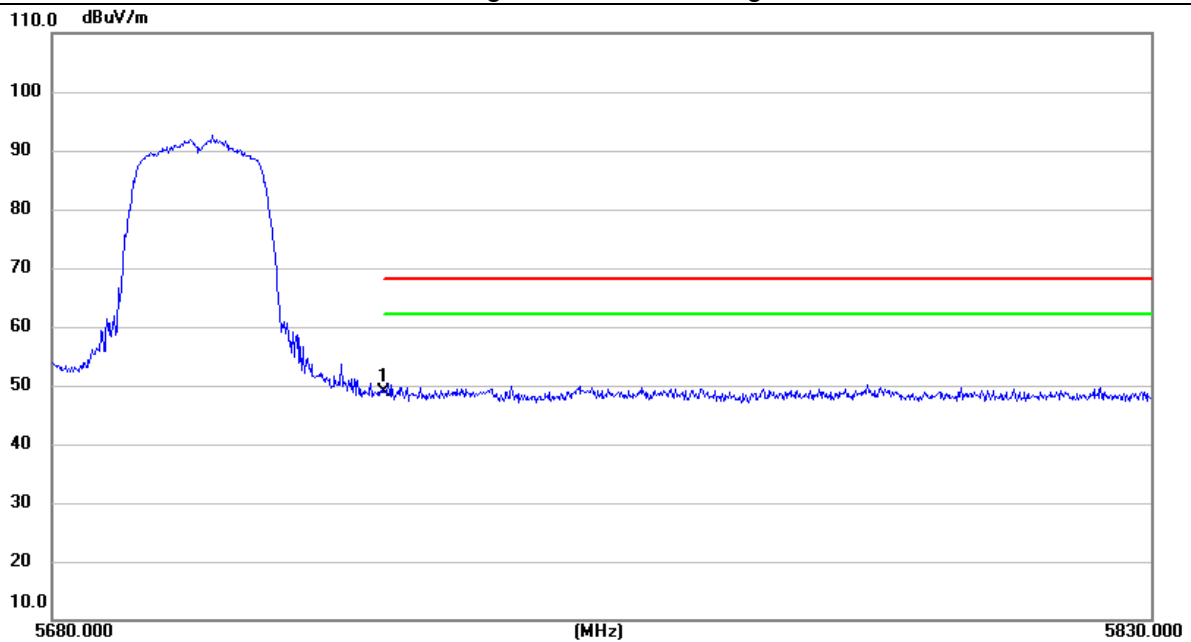

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	11.05	39.09	50.14	68.20	-18.06	peak


Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5700MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

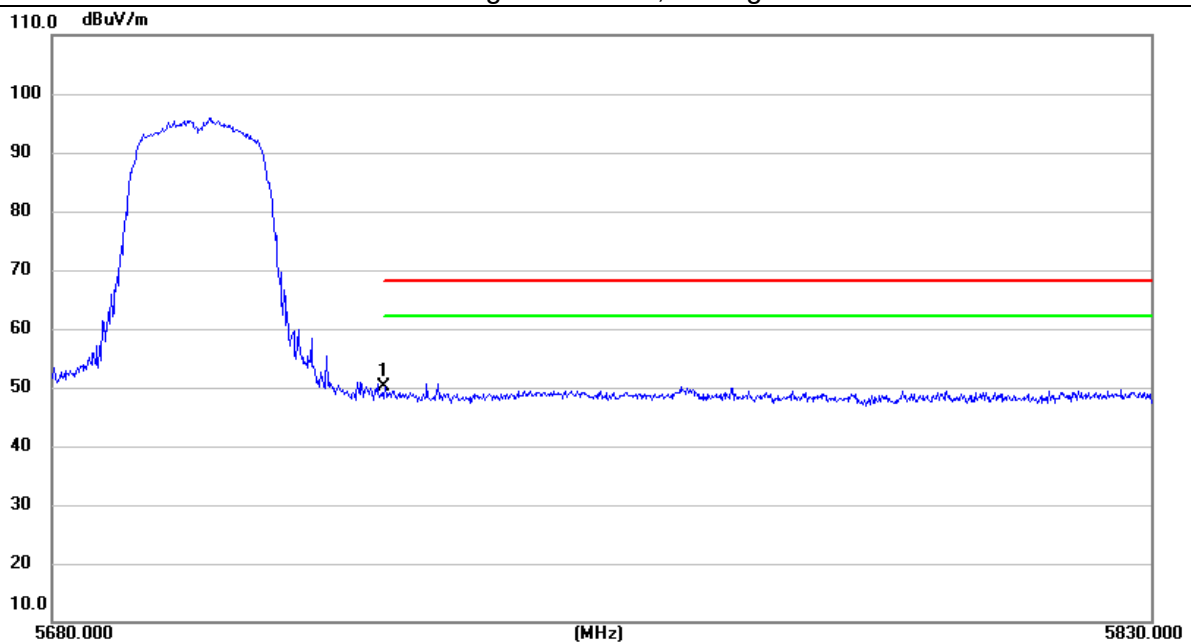

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	5609.610	-100.37	50.42	-49.95	-27.00	-22.95	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5745MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

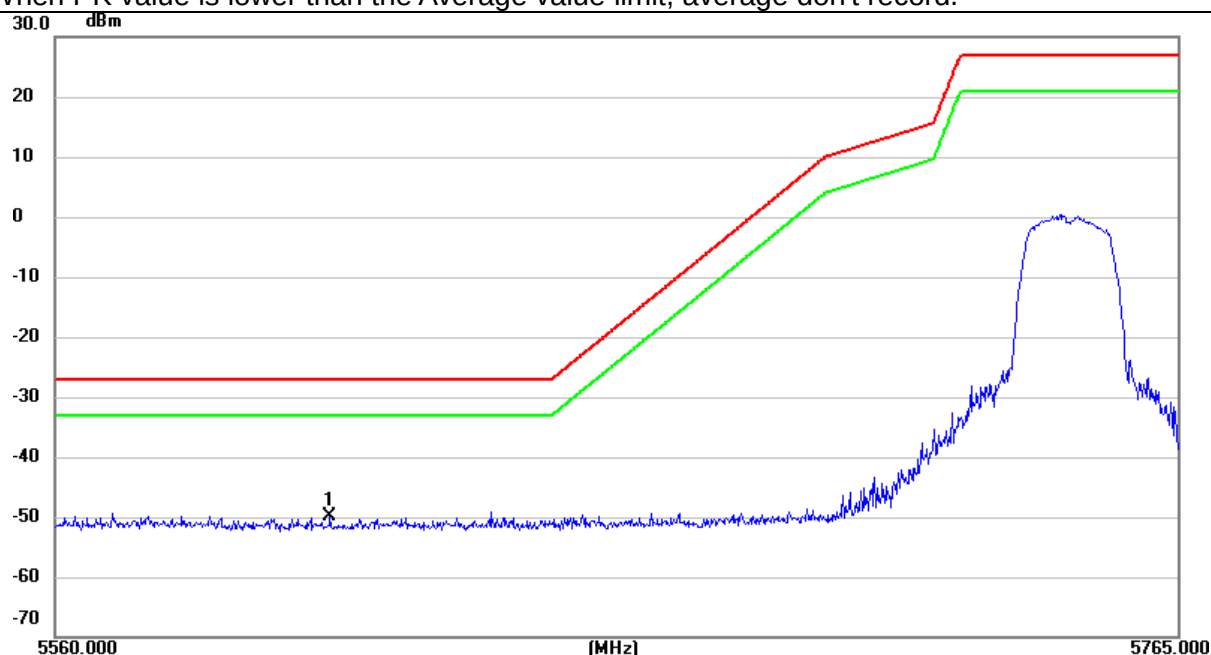

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5637.285	-100.28	50.53	-49.75	-27.00	-22.75	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5745MHz.
Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

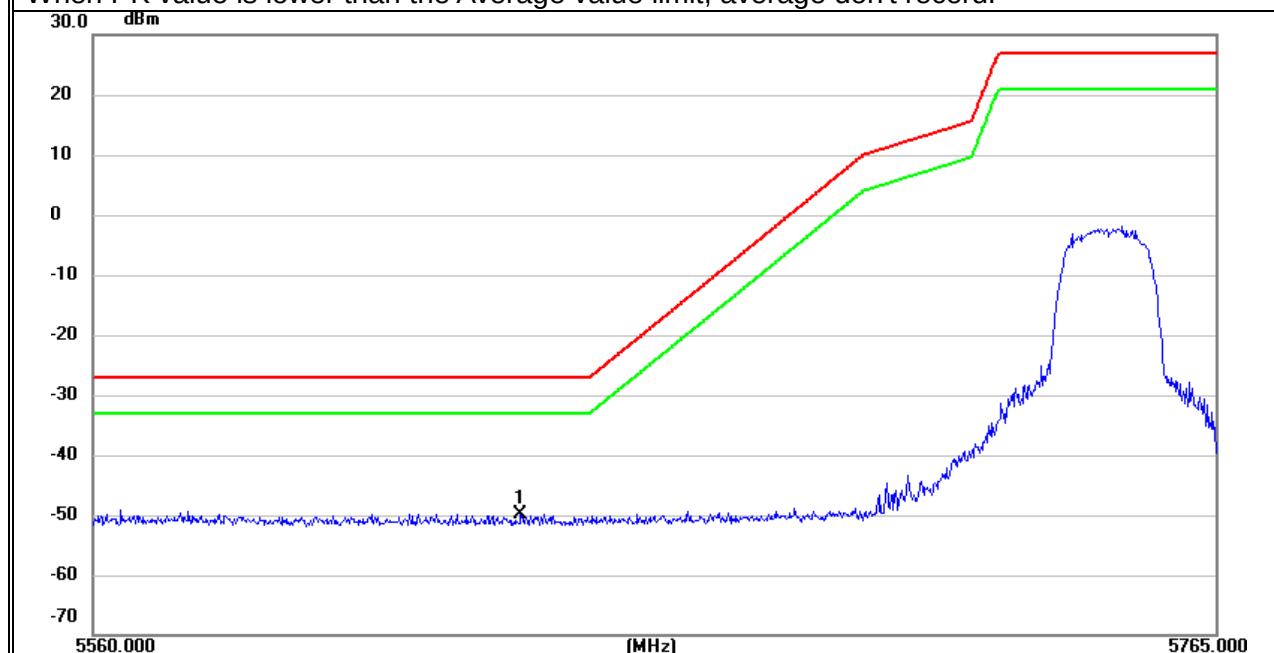

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5950.502	-99.01	51.91	-47.10	-27.00	-20.10	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5825MHz.
Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

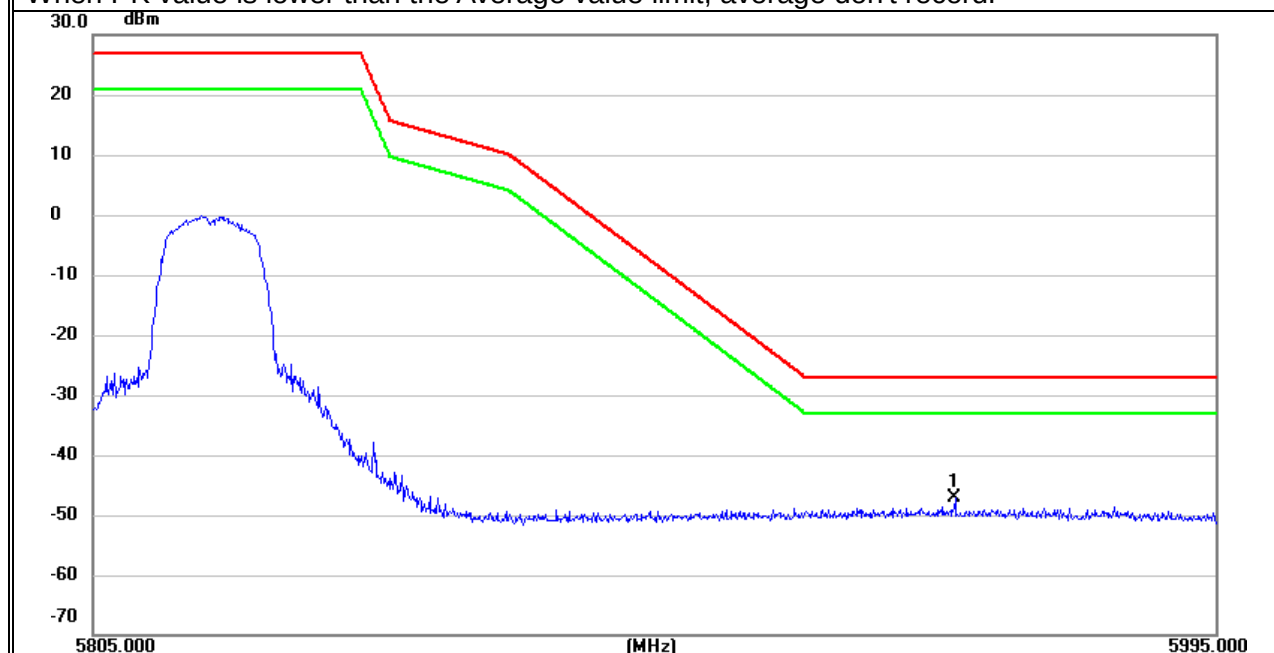

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5947.215	-100.47	51.89	-48.58	-27.00	-21.58	peak

Remark:


Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

All the modulation modes have been tested, and the worst-case result was 802.11a 5825MHz.

Only the worst-case mode reported

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

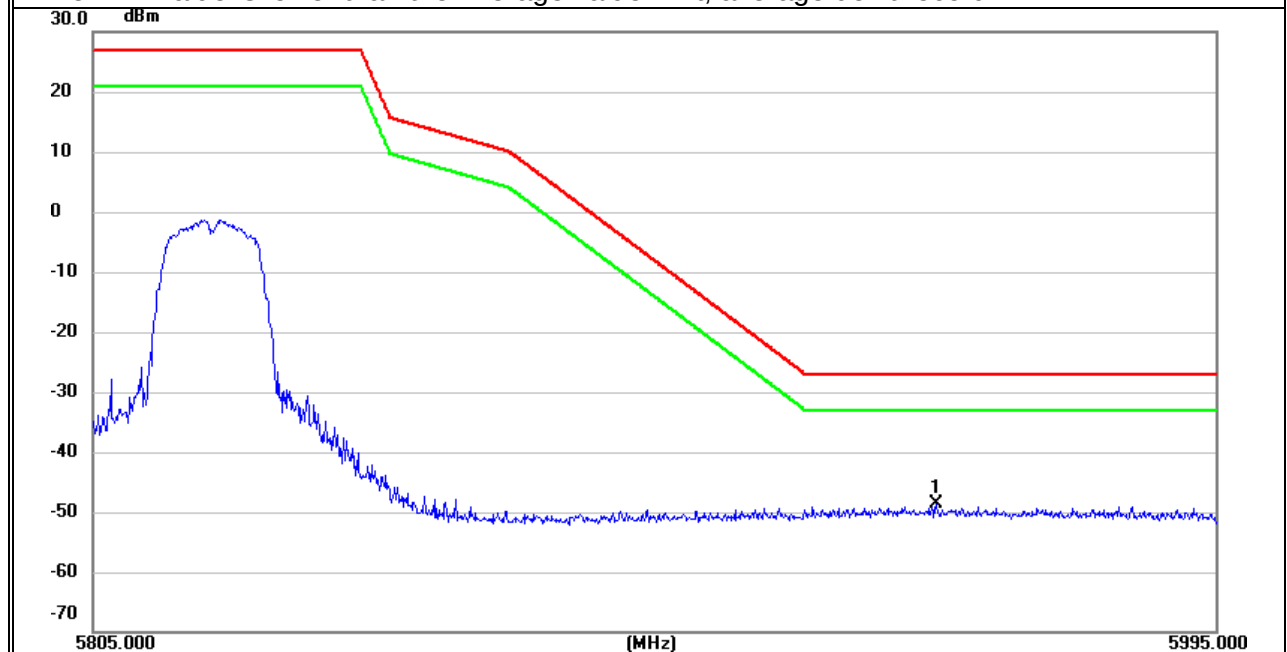

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Measure the duty cycle D of the transmitter output signal as described in 12.2.
- b) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- c) Set RBW = 1 MHz.
- d) Set VBW ≥ 3 MHz.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6$ dB if the duty cycle is 25%.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP

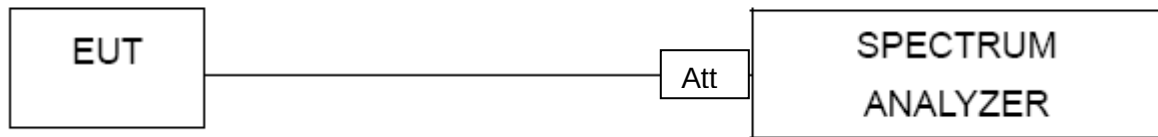

3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

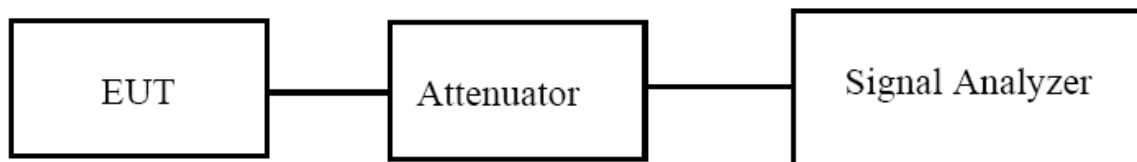

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

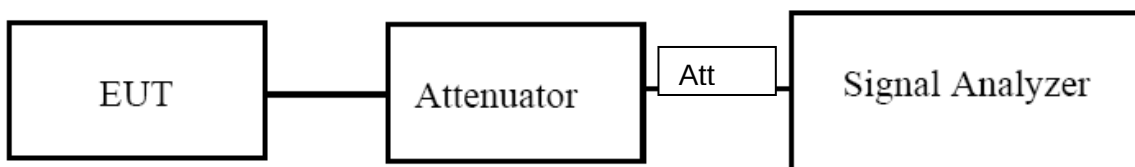

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

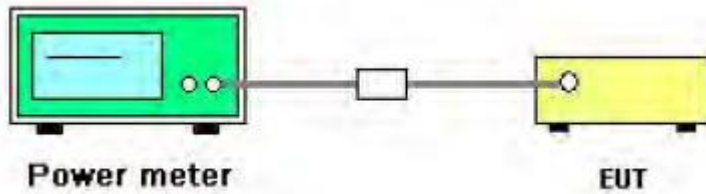

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	AUTO Smart Diagnostic Tool	Model Name :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

7. Frequency Stability Measurement


7.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

7.3 TEST SETUP LAYOUT

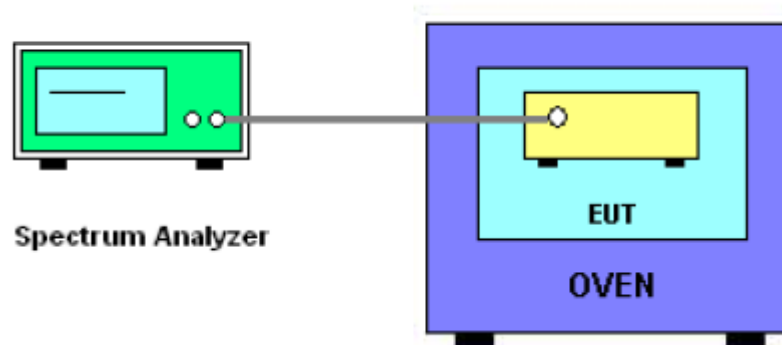

7.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.

7.5 TEST RESULTS

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5180.0253	5180	0.0253	4.8842
		V max (V)	4.26	5180.0110	5180	0.0110	2.1236
		V min (V)	3.15	5180.0332	5180	0.0332	6.4093
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5180.0099	5180	0.0099	1.9112
		T (°C)	-10	5180.0281	5180	0.0281	5.4247
		T (°C)	0	5180.0312	5180	0.0312	6.0232
		T (°C)	10	5180.0119	5180	0.0119	2.2973
		T (°C)	20	5180.0125	5180	0.0125	2.4131
		T (°C)	30	5180.0177	5180	0.0177	3.4170
		T (°C)	40	5180.0351	5180	0.0351	6.7761
		T (°C)	50	5180.0092	5180	0.0092	1.7761
		T (°C)	60	5180.0391	5180	0.0391	7.5483
		T (°C)	70	5180.0269	5180	0.0269	5.1931
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5200.0176	5200	0.0176	3.3846
		V max (V)	4.26	5200.0024	5200	0.0024	0.4615
		V min (V)	3.15	5200.0103	5200	0.0103	1.9808
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5200.0047	5200	0.0047	0.9038
		T (°C)	-10	5200.0219	5200	0.0219	4.2115
		T (°C)	0	5200.0217	5200	0.0217	4.1731
		T (°C)	10	5200.0272	5200	0.0272	5.2308
		T (°C)	20	5200.0218	5200	0.0218	4.1923
		T (°C)	30	5200.0072	5200	0.0072	1.3846
		T (°C)	40	5200.0172	5200	0.0172	3.3077
		T (°C)	50	5200.0396	5200	0.0396	7.6154
		T (°C)	60	5200.0244	5200	0.0244	4.6923
		T (°C)	70	5200.0273	5200	0.0273	5.2500
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5240.0179	5240	0.0179	3.4160
		V max (V)	4.26	5240.0122	5240	0.0122	2.3282
		V min (V)	3.15	5240.0118	5240	0.0118	2.2519
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5240.0195	5240	0.0195	3.7214
		T (°C)	-10	5240.0145	5240	0.0145	2.7672
		T (°C)	0	5240.0238	5240	0.0238	4.5420
		T (°C)	10	5240.0216	5240	0.0216	4.1221
		T (°C)	20	5240.0184	5240	0.0184	3.5115
		T (°C)	30	5240.0225	5240	0.0225	4.2939
		T (°C)	40	5240.0340	5240	0.0340	6.4885
		T (°C)	50	5240.0351	5240	0.0351	6.6985
		T (°C)	60	5240.0080	5240	0.0080	1.5267
		T (°C)	70	5240.0103	5240	0.0103	1.9656
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5260.0067	5260	0.00670	1.2738
		V max (V)	4.26	5260.0199	5260	0.01990	3.7833
		V min (V)	3.15	5260.0136	5260	0.01360	2.5856
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5260.0193	5260	0.01930	3.6692
		T (°C)	-10	5260.0078	5260	0.00780	1.4829
		T (°C)	0	5260.0333	5260	0.03330	6.3308
		T (°C)	10	5260.0145	5260	0.01450	2.7567
		T (°C)	20	5260.0348	5260	0.03480	6.6160
		T (°C)	30	5260.0067	5260	0.00670	1.2738
		T (°C)	40	5260.0103	5260	0.01030	1.9582
		T (°C)	50	5260.0320	5260	0.03200	6.0837
		T (°C)	60	5260.0384	5260	0.03840	7.3004
		T (°C)	70	5260.0198	5260	0.01980	3.7643
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5280.0180	5280	0.01800	3.4091
		V max (V)	4.26	5280.0341	5280	0.03410	6.4583
		V min (V)	3.15	5280.0211	5280	0.02110	3.9962
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5280.0202	5280	0.02020	3.8258
		T (°C)	-10	5280.0088	5280	0.00880	1.6667
		T (°C)	0	5280.0129	5280	0.01290	2.4432
		T (°C)	10	5280.0340	5280	0.03400	6.4394
		T (°C)	20	5280.0259	5280	0.02590	4.9053
		T (°C)	30	5280.0327	5280	0.03270	6.1932
		T (°C)	40	5280.0098	5280	0.00980	1.8561
		T (°C)	50	5280.0316	5280	0.03160	5.9848
		T (°C)	60	5280.0225	5280	0.02250	4.2614
		T (°C)	70	5280.0241	5280	0.02410	4.5644
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5320.0270	5320	0.02700	5.0752
		V max (V)	4.26	5320.0154	5320	0.01540	2.8947
		V min (V)	3.15	5320.0230	5320	0.02300	4.3233
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5320.0351	5320	0.03510	6.5977
		T (°C)	-10	5320.0165	5320	0.01650	3.1015
		T (°C)	0	5320.0221	5320	0.02210	4.1541
		T (°C)	10	5320.0345	5320	0.03450	6.4850
		T (°C)	20	5320.0211	5320	0.02110	3.9662
		T (°C)	30	5320.0303	5320	0.03030	5.6955
		T (°C)	40	5320.0126	5320	0.01260	2.3684
		T (°C)	50	5320.0104	5320	0.01040	1.9549
		T (°C)	60	5320.0110	5320	0.01100	2.0677
		T (°C)	70	5320.0021	5320	0.00210	0.3947
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5500.0153	5500	0.01530	2.7818
		V max (V)	4.26	5500.0034	5500	0.00340	0.6182
		V min (V)	3.15	5500.0230	5500	0.02300	4.1818
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5500.0082	5500	0.00820	1.4909
		T (°C)	-10	5500.0236	5500	0.02360	4.2909
		T (°C)	0	5500.0161	5500	0.01610	2.9273
		T (°C)	10	5500.0219	5500	0.02190	3.9818
		T (°C)	20	5500.0119	5500	0.01190	2.1636
		T (°C)	30	5500.0207	5500	0.02070	3.7636
		T (°C)	40	5500.0394	5500	0.03940	7.1636
		T (°C)	50	5500.0160	5500	0.01600	2.9091
		T (°C)	60	5500.0122	5500	0.01220	2.2182
		T (°C)	70	5500.0185	5500	0.01850	3.3636
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5600.0210	5600	0.02100	3.7500
		V max (V)	4.26	5600.0459	5600	0.04590	8.1964
		V min (V)	3.15	5600.0035	5600	0.00350	0.6250
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5600.0294	5600	0.02940	5.2500
		T (°C)	-10	5600.0265	5600	0.02650	4.7321
		T (°C)	0	5600.0250	5600	0.02500	4.4643
		T (°C)	10	5600.0159	5600	0.01590	2.8393
		T (°C)	20	5600.0067	5600	0.00670	1.1964
		T (°C)	30	5600.0050	5600	0.00500	0.8929
		T (°C)	40	5600.0026	5600	0.00260	0.4643
		T (°C)	50	5600.0095	5600	0.00950	1.6964
		T (°C)	60	5600.0299	5600	0.02990	5.3393
		T (°C)	70	5600.0353	5600	0.03530	6.3036
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5700.0097	5700	0.00970	1.7018
		V max (V)	4.26	5700.0475	5700	0.04750	8.3333
		V min (V)	3.15	5700.0301	5700	0.03010	5.2807
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5700.0338	5700	0.03380	5.9298
		T (°C)	-10	5700.0221	5700	0.02210	3.8772
		T (°C)	0	5700.0161	5700	0.01610	2.8246
		T (°C)	10	5700.0168	5700	0.01680	2.9474
		T (°C)	20	5700.0064	5700	0.00640	1.1228
		T (°C)	30	5700.0289	5700	0.02890	5.0702
		T (°C)	40	5700.0096	5700	0.00960	1.6842
		T (°C)	50	5700.0033	5700	0.00330	0.5789
		T (°C)	60	5700.0165	5700	0.01650	2.8947
		T (°C)	70	5700.0281	5700	0.02810	4.9298
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	AUTO Smart Diagnostic Tool	Model Name. :	X-431 PRO ELITE V2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

Page 107 Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5745.0155	5745	0.01550	2.6980
		V max (V)	4.26	5745.0374	5745	0.03740	6.5100
		V min (V)	3.15	5745.0208	5745	0.02080	3.6205
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5745.0284	5745	0.02840	4.9434
		T (°C)	-10	5745.0316	5745	0.03160	5.5004
		T (°C)	0	5745.0048	5745	0.00480	0.8355
		T (°C)	10	5745.0191	5745	0.01910	3.3246
		T (°C)	20	5745.0266	5745	0.02660	4.6301
		T (°C)	30	5745.0072	5745	0.00720	1.2533
		T (°C)	40	5745.0379	5745	0.03790	6.5970
		T (°C)	50	5745.0196	5745	0.01960	3.4117
		T (°C)	60	5745.0170	5745	0.01700	2.9591
		T (°C)	70	5745.0133	5745	0.01330	2.3151
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5785.0125	5785	0.01250	2.1608
		V max (V)	4.26	5785.0169	5785	0.01690	2.9213
		V min (V)	3.15	5785.0033	5785	0.00330	0.5704
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5785.0294	5785	0.02940	5.0821
		T (°C)	-10	5785.0385	5785	0.03850	6.6551
		T (°C)	0	5785.0211	5785	0.02110	3.6474
		T (°C)	10	5785.0262	5785	0.02620	4.5290
		T (°C)	20	5785.0110	5785	0.01100	1.9015
		T (°C)	30	5785.0086	5785	0.00860	1.4866
		T (°C)	40	5785.0149	5785	0.01490	2.5756
		T (°C)	50	5785.0111	5785	0.01110	1.9188
		T (°C)	60	5785.0111	5785	0.01110	1.9188
		T (°C)	70	5785.0360	5785	0.03600	6.2230
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5825.0295	5825	0.02950	5.0644
		V max (V)	4.26	5825.0492	5825	0.04920	8.4464
		V min (V)	3.15	5825.0393	5825	0.03930	6.7468
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5825.0080	5825	0.00800	1.3734
		T (°C)	-10	5825.0123	5825	0.01230	2.1116
		T (°C)	0	5825.0182	5825	0.01820	3.1245
		T (°C)	10	5825.0102	5825	0.01020	1.7511
		T (°C)	20	5825.0087	5825	0.00870	1.4936
		T (°C)	30	5825.0132	5825	0.01320	2.2661
		T (°C)	40	5825.0405	5825	0.04050	6.9528
		T (°C)	50	5825.0185	5825	0.01850	3.1760
		T (°C)	60	5825.0093	5825	0.00930	1.5966
		T (°C)	70	5825.0171	5825	0.01710	2.9356
Limits				Within 5745-5850MHz			
Result				Complies			

8. DYNAMIC FREQUENCY SELECTION(DFS)

8.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

8.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

8.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

8.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{min}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

8.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

8.6 CONDUCTED CALIBRATION SETUP

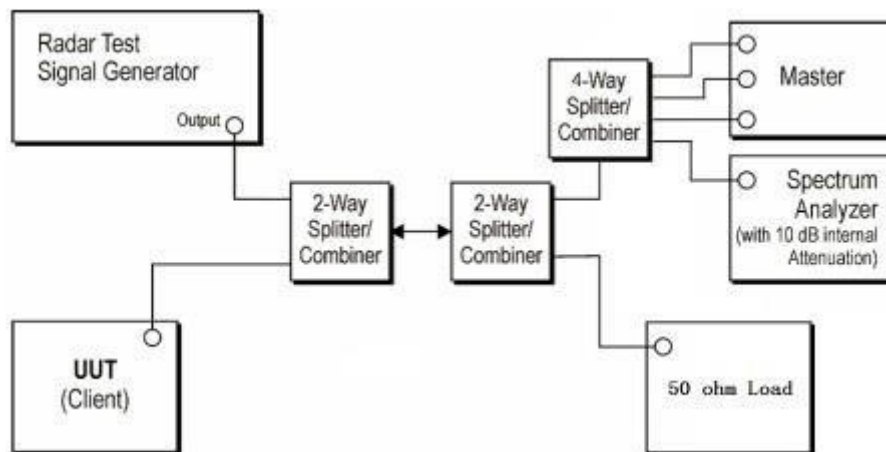

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.

2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.

3. The time required for the master and slave devices to fully start up is 120s.

4. EUT does not support TPC.


8.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

8.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

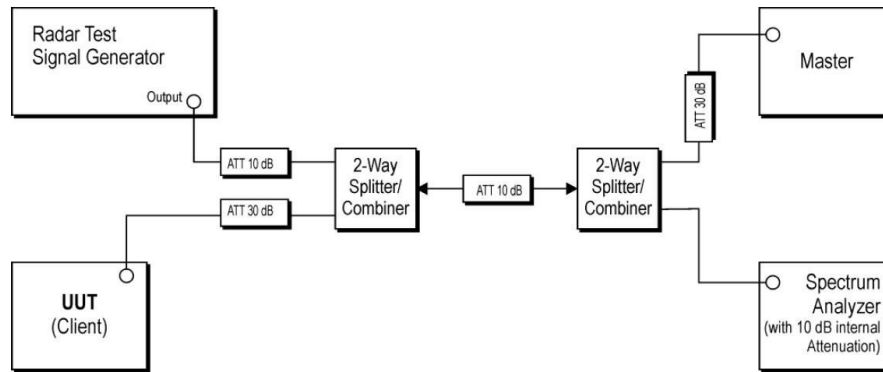

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Mode	Frequency (MHz)
ac80	5290
ac80	5530
n40	5310
n40	5510
a	5320
a	5500

8.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

Test data reference attachment.

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is permanent attached FPC Antenna (Gain: 3.94dBi). It comply with the standard requirement.

END OF REPORT