

47 CFR PART 15 SUBPART C / IC RSS-210 TEST REPORT

for

TPMS

Model No.: US1-006

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

of

Applicant: Standard Motor Products, Inc.

Address: 37-18 Northern Boulevard, Long Island City,
New York 11101, United States

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

A2LA Accredited No.: 2732.01



Report No.: W6M22005-19900-C-1


6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS.....	4
1.5	TEST ITEM.....	4
1.6	TEST STANDARDS	4
2	TECHNICAL TEST	5
2.1	SUMMARY OF TEST RESULTS.....	5
2.2	TEST ENVIRONMENT	5
2.3	TEST MODE	6
2.4	TEST EQUIPMENT UTILIZED.....	7
2.5	GENERAL TEST PROCEDURE.....	10
3	TEST RESULTS (ENCLOSURE)	11
3.1	TRANSMISSION REQUIREMENTS	12
3.1.1	Limit of Transmission Time.....	12
3.1.2	Results for the duration and silent period measurement.....	12
3.2	OUTPUT POWER (FIELD STRENGTH)	13
3.3	OUT OF BAND RADIATED EMISSIONS	21
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....	22
3.5	SPURIOUS EMISSION RADIATED, TRANSMITTER.....	23
3.6	CHANNEL BANDWIDTH.....	24
3.7	ANTENNA REQUIREMENT.....	27
3.8	DUTY CYCLE	28
3.9	CONDUCTED MEASUREMENT AT (AC) POWER LINE.....	29
3.10	EQUIPMENT MODIFICATION.....	30
	APPENDIX	31



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services (Taiwan) Co., Ltd.

Tester:

July 17, 2020

Leon Chueh

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

July 17, 2020


Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL: 886-2-6613-0228

FAX: 886-2-2791-5046

Company

Worldwide Testing Services (Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: Standard Motor Products, Inc.


Street: 37-18 Northern Boulevard,

Town: Long Island City, New York 11101,

Country: United States

Telephone: 718-316-4571

Fax: 718-786-8247



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

1.4 Application details

Date of receipt of test item: May 27, 2020
Date of test: from May 27, 2020 to July 06, 2020

1.5 Test item

Description of test item: TPMS
Type identification: US1-006
Brand name: SMP

Multi-listing model number: RB2-001, US1-006x, RB1-xxx (For FCC)
For the marketing purpose, Where " X " may be any alpha character "a"-"z", "A"-"Z",
or numeric character "0"-"9", or -, (,) , or blank or combination of alpha and numeric characters.
RB2-001 (For IC)

Transmitting frequency: 315 MHz & 433.92 MHz
Operation mode: Simplex
Voltage supply: Battery 3VDC (CR2050HR)

(The device is tested under fresh battery condition.)


Antenna type: Incorporated antenna
Photos: ./.

Manufacturer (if applicable)

Name: Orange Electronic Co., Ltd
Street: 5F., No.29, Keya Rd., Daya Dist.,
Town: Taichung City 428,
Country: Taiwan

1.6 Test standards

Technical standard: 47 CFR PART 15 SUBPART C § 15.231 (e) (2019-10) /
IC RSS-210 Issue 10: December 2019



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

or

The deviations were ascertained in the course of the tests performed. ☐

2.2 Test environment


Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply: Battery 3VDC (CR2050HR)

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty : AMN : 1.06 dB Voltage probe : 1.12 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty : 0.009-30 MHz : 1.88 dB 30-1000 MHz : 2.79 dB 1-18 GHz : 2.36 dB 18-40 GHz : 1.55 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement Frequency stability	Expanded Uncertainty : 6.11 Hz
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty : 1.01 dBc

The decision rule is : Measurement uncertainty is not included in the calculation of test results.



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

2.3 Test Mode

This EUT is the portable device. So the EUT was tested on three different axes. Please see assessment test results as section 3 of this test report.



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

2.4 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2020/6/11	2021/6/10
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2019/11/1	2020/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2019/9/24	2020/9/23
ETSTW-CE 008	HF-EICHELITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2019/7/23	2020/7/22
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2019/10/3	2020/10/2
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2019/7/18	2020/7/17
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2020/6/12	2021/6/11
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2020/5/26	2021/5/25
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2019/7/25	2020/7/24
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2019/7/22	2020/7/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2020/4/22	2021/4/21
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2020/2/18	2021/2/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2020/5/8	2021/5/7
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2020/5/8	2021/5/7
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2020/3/6	2021/3/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2020/2/20	2021/2/19
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2020/5/8	2021/5/7
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2019/9/23	2020/9/22
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2019/9/18	2020/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2020/5/22	2021/5/21
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2020/1/13	2021/1/12
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2020/6/11	2021/6/10
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2020/2/20	2021/2/19
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2020/5/8	2021/5/7
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2020/4/9	2021/4/8
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2020/6/9	2021/6/8
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2020/5/21	2021/5/20
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2020/3/9	2021/3/8
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2020/4/20	2021/4/19
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2019/10/25	2020/10/24
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2019/9/12	2020/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2020/3/27	2021/3/26
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2019/8/9	2020/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2020/7/1	2021/6/30
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2020/2/20	2021/2/19
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2020/7/3	2021/7/2
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2020/6/5	2021/6/4




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2020/6/5	2021/6/4
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2020/5/8	2021/5/7
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 001	Thermohygrometer	608-H1	45204316	Testo	2019/9/9	2020/9/8
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2019/9/9	2020/9/8



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

2.5 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.10-2013 6.3 using a spectrum analyzer. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was the 100 kHz and the video bandwidth was 300 kHz.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB/m + 6 dB = 36.36 dB μ V/m @3m

ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

3 Test results (enclosure)


☒ 1st test

☐ test after modification

☐ production test

TEST CASE	Para. Number	Required	Test passed	Test failed
Transmission Requirements	FCC 15.231(e) IC RSS-210 Annex A A.1.1 & A.1.4	☒	☒	☐
Radiated Emission	FCC 15.231(e) IC RSS-210 Annex A A.1.2	☒	☒	☐
Bandwidth of Emission	FCC 15.231(c) IC RSS-210 Annex A A.1.3	☒	☒	☐
Frequency Tolerance	FCC 15.231(d)	☐	☐	☐
Period Alternate Field Strength Requirements	FCC 15.231(e) IC RSS-210 Annex A A.1.4 Table A2	☒	☒	☐
Antenna Requirement	FCC 15.203 IC RSS-Gen	☒	☒	☐
Conducted Measurement at (AC) Power Line	FCC 15.207 IC RSS-Gen	☐	☐	☐

The following is intentionally left blank.



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.1 Transmission Requirements

FCC 15.231(e)

Test date: June 03, 2020

Temperature: 23.8 °C

Humidity: 47.1 %

Tester: Leon

3.1.1 Limit of Transmission Time

Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

3.1.2 Results for the duration and silent period measurement

☐ This manually operated transmitter employs software to control the duration of each transmission and silent period between transmissions. The real measured result for the duration of each transmission is _____ ms, and the result for silent period between transmissions is _____ second.

315MHz

ASK

☒ This transmitter is operated by automatic activation, and the duration of each transmission and silent period between transmissions will be controlled by software. The real measured result for the duration of each transmission is 560.897436ms, and the result for silent period between transmissions is 60.240385 second.

FSK

☒ This transmitter is operated by automatic activation, and the duration of each transmission and silent period between transmissions will be controlled by software. The real measured result for the duration of each transmission is 448.717949ms, and the result for silent period between transmissions is 29.615385 second.

433.92MHz

ASK


☒ This transmitter is operated by automatic activation, and the duration of each transmission and silent period between transmissions will be controlled by software. The real measured result for the duration of each transmission is 448.717949ms, and the result for silent period between transmissions is 30.064103 second.

FSK

☒ This transmitter is operated by automatic activation, and the duration of each transmission and silent period between transmissions will be controlled by software. The real measured result for the duration of each transmission is 412.461538ms, and the result for silent period between transmissions is 30.140026 second.

Explanation: See attached diagrams in appendix.

Test equipment used : ETSTW-RE 004 ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M22005-19900-C-1


FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.2 Output Power (Field Strength)

315MHz

ASK

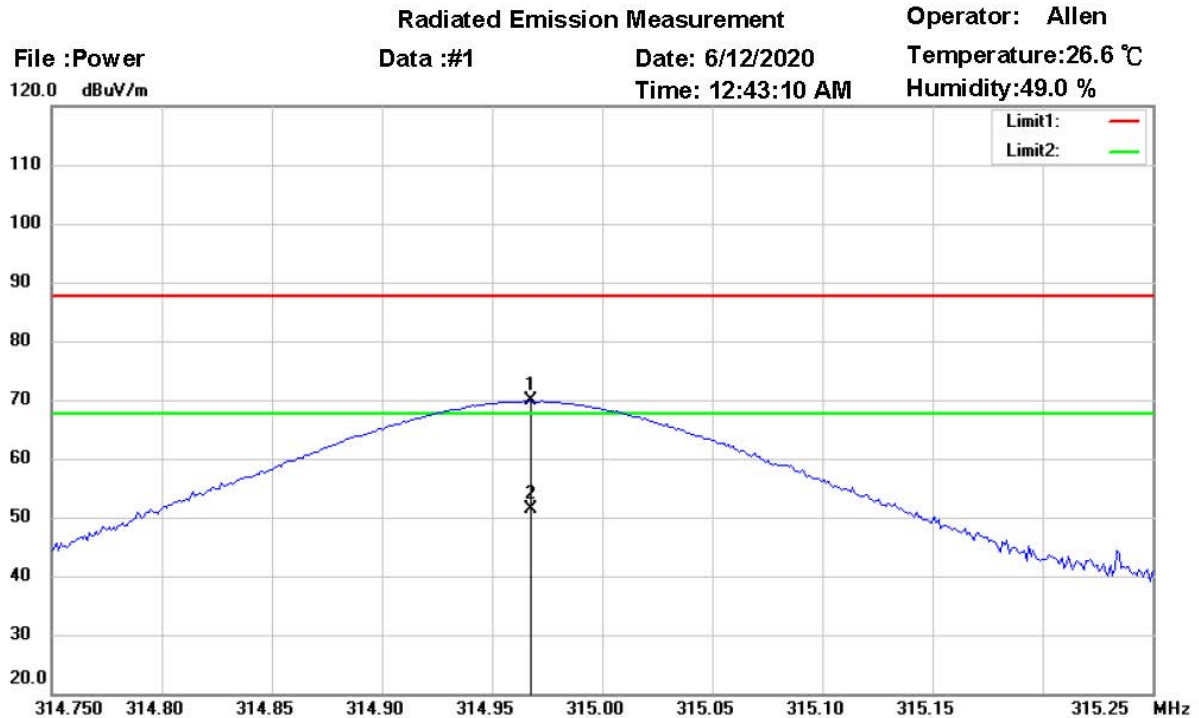

Site : Chamber

Condition : FCC 15.231(315MHz)Power(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)


Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	314.9674	48.01	peak	21.77	69.78	87.66	230	275	-17.88	
*	314.9674	29.49	AVG	21.77	51.26	67.66	230	275	-16.40	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

Radiated Emission Measurement

Operator: Allen

File :Power

Data :#2


Date: 6/12/2020

Temperature:26.6 °C

120.0 dBuV/m

Time: 12:56:03 AM

Humidity:49.0 %

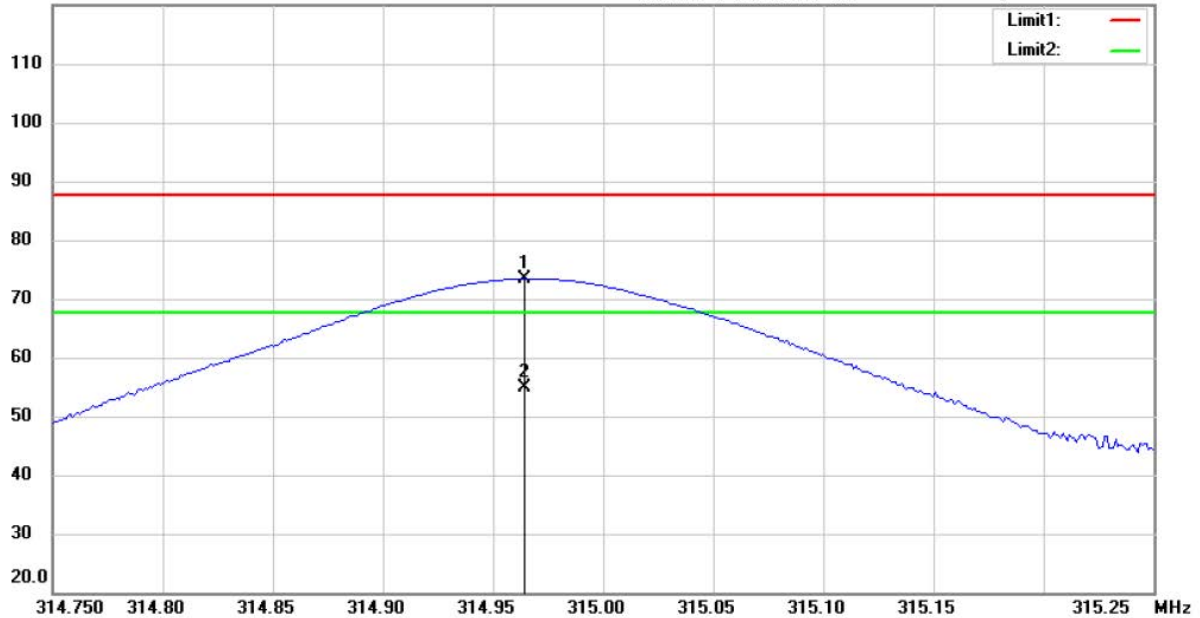

Site : Chamber

Condition : FCC 15.231(315MHz)Power(PK)<e>

Polarization: *Vertical*

EUT : W6M22005-19900

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz (ASK)


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	314.9644	51.65	peak	21.77	73.42	87.66	165	160	-14.24	
*	314.9644	33.13	AVG	21.77	54.90	67.66	165	160	-12.76	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1
FSK

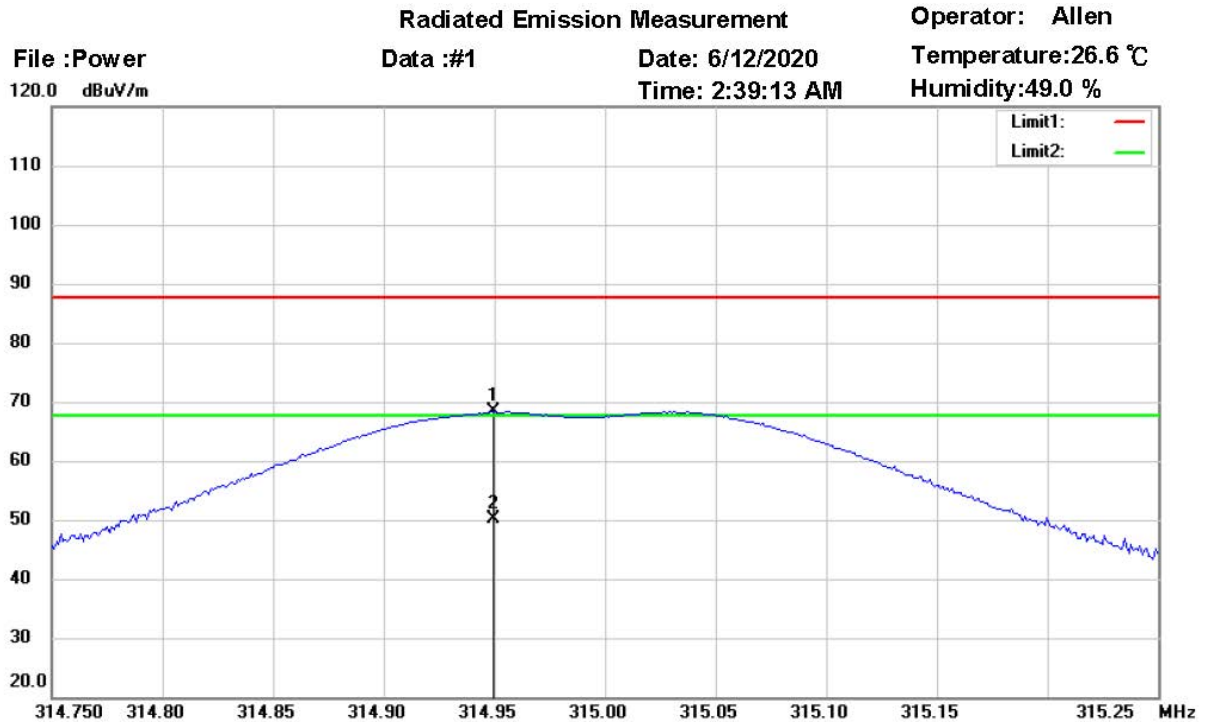

Site : Chamber

Condition : FCC 15.231(315MHz)Power(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)


Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	314.9494	46.66	peak	21.77	68.43	87.66	240	109	-19.23	
*	314.9494	28.26	AVG	21.77	50.03	67.66	240	109	-17.63	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

Radiated Emission Measurement

Operator: Allen

File :Power
120.0 dBuV/m


Data :#2

Date: 6/12/2020

Time: 2:46:28 AM

Temperature:26.6 °C

Humidity:49.0 %

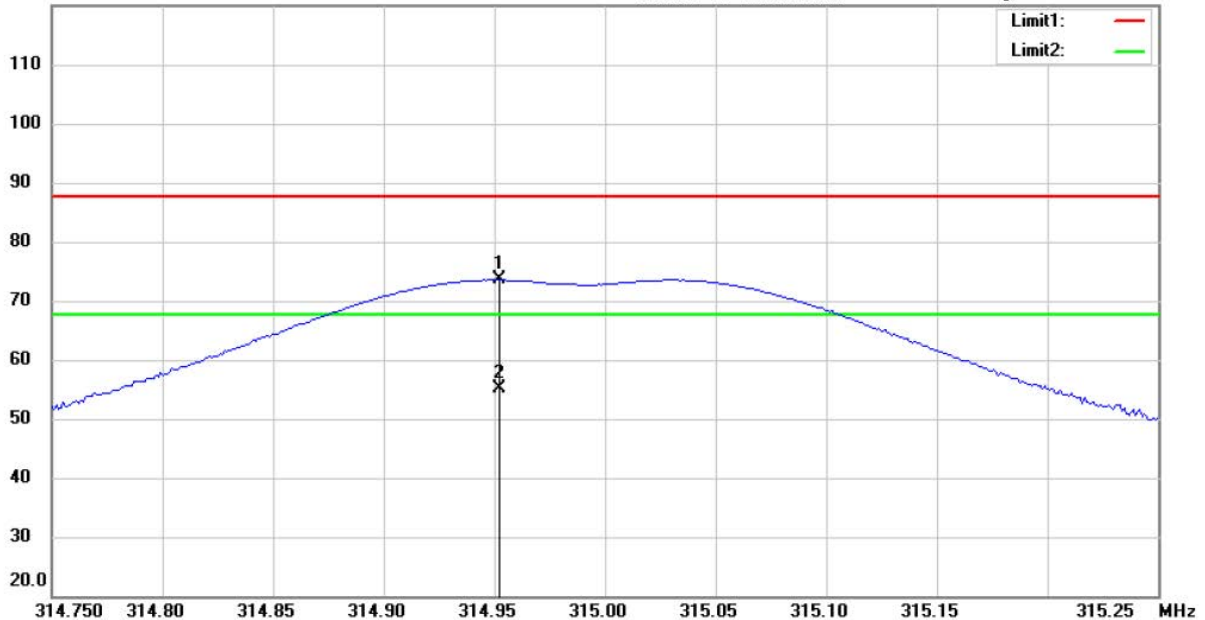

Site : Chamber

Condition : FCC 15.231(315MHz)Power(PK)<e>

Polarization: *Vertical*

EUT : W6M22005-19900

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz (FSK)


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	314.9524	51.78	peak	21.77	73.55	87.66	180	190	-14.11	
*	314.9524	33.38	AVG	21.77	55.15	67.66	180	190	-12.51	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1
433.92MHz
ASK

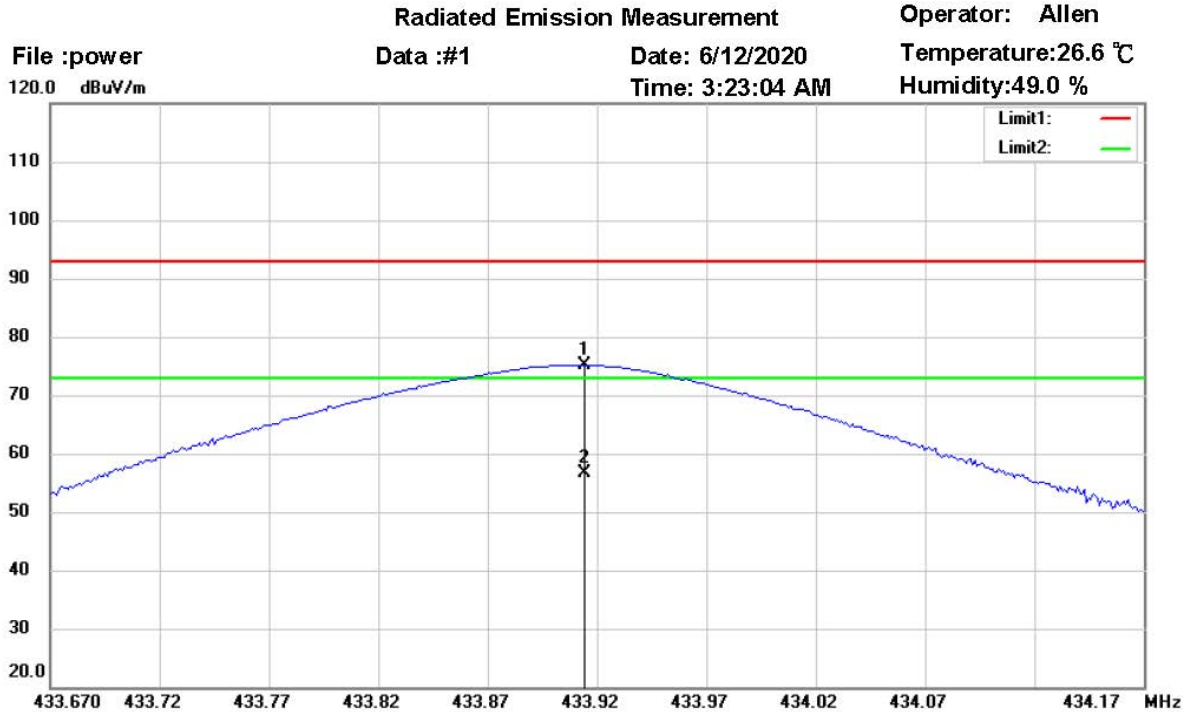

Site : Chamber

Condition : FCC 15.231(433.92MHz)Power(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (ASK)


Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	433.9145	50.32	peak	24.89	75.21	92.80	170	90	-17.59	
*	433.9145	31.80	AVG	24.89	56.69	72.80	170	90	-16.11	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

Radiated Emission Measurement

Operator: Allen

File :power

Data :#2


Date: 6/12/2020

Temperature:26.6 °C

120.0 dBuV/m

Time: 3:26:55 AM

Humidity:49.0 %

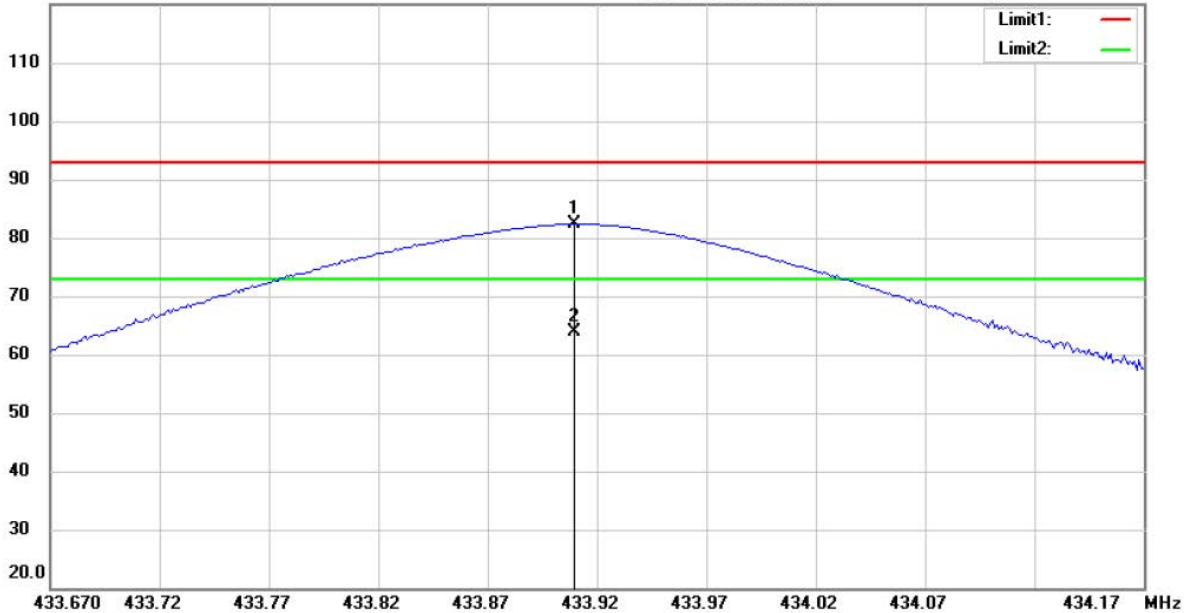

Site : Chamber

Condition : FCC 15.231(433.92MHz)Power(PK)<e>

Polarization: **Vertical**

EUT : W6M22005-19900

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	433.9095	57.47	peak	24.89	82.36	92.80	145	359	-10.44	
*	433.9095	38.95	AVG	24.89	63.84	72.80	145	359	-8.96	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

FSK

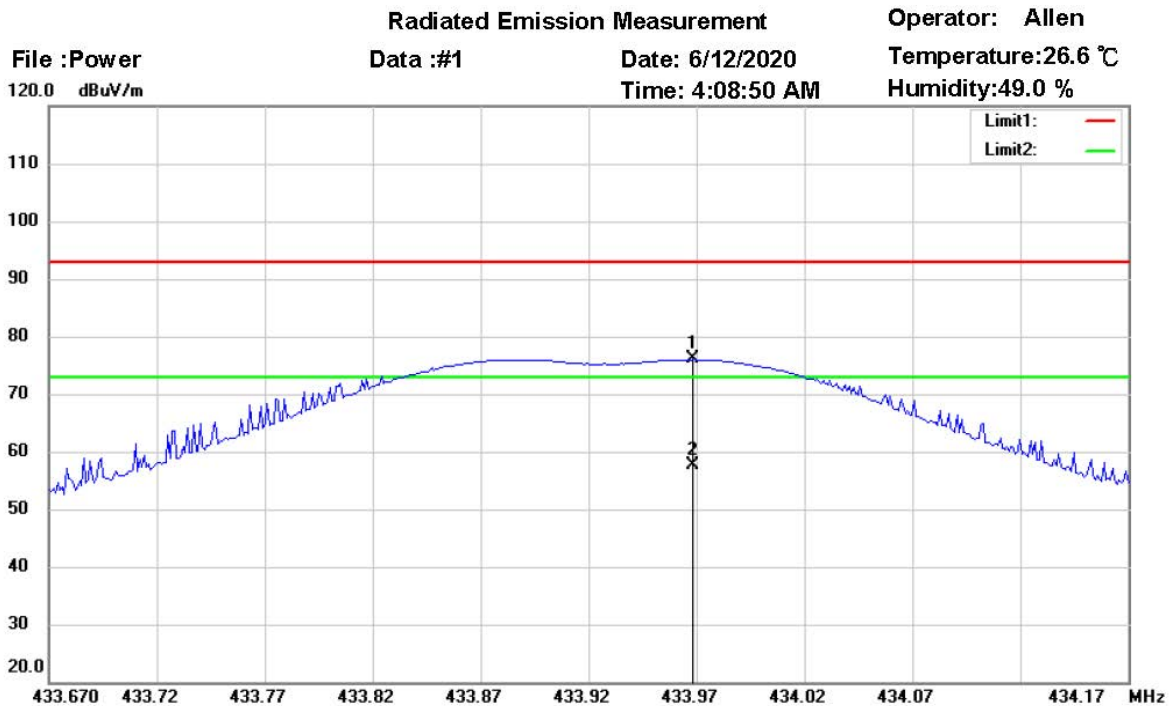

Site : Chamber

Condition : FCC 15.231(433.92MHz)Power(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (FSK)


Note :

Polarization: *Horizontal*

Power : 3 Vd.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	433.9686	51.12	peak	24.89	76.01	92.80	170	75	-16.79	
*	433.9686	32.72	AVG	24.89	57.61	72.80	170	75	-15.19	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

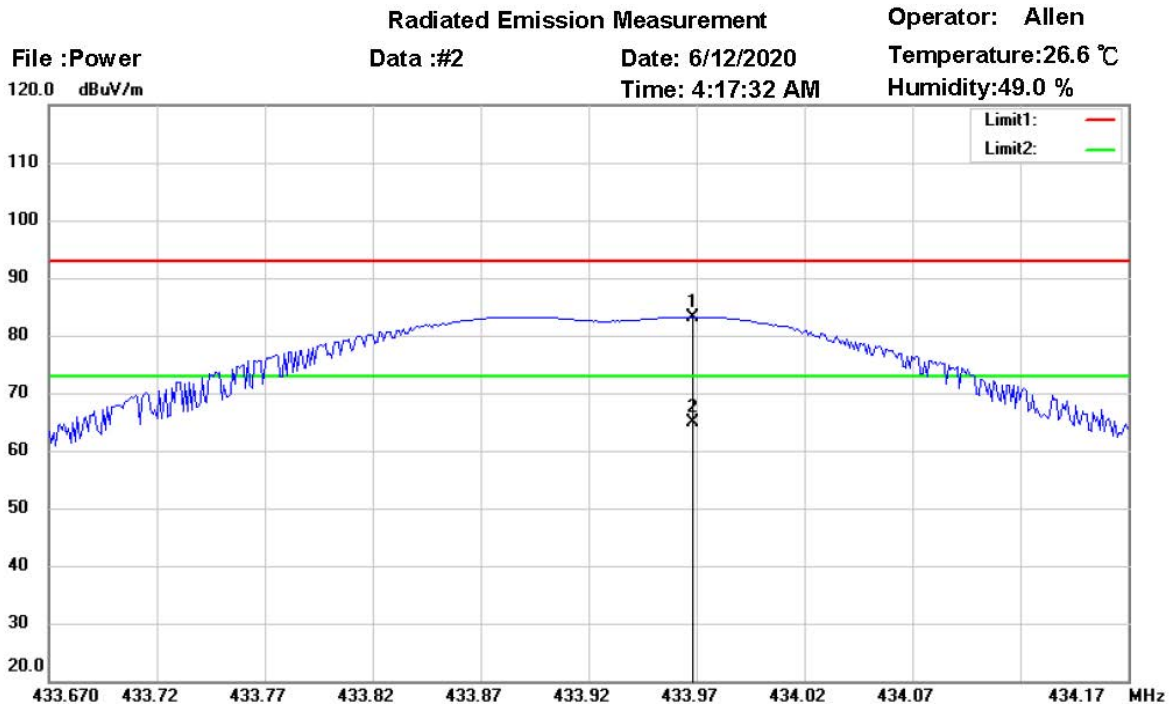

Site : Chamber

Condition : FCC 15.231(433.92MHz)Power(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (FSK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	433.9686	58.35	peak	24.89	83.24	92.80	140	359	-9.56	
*	433.9686	39.95	AVG	24.89	64.84	72.80	140	359	-7.96	


Limit 15.231(e)

Fundamental Frequency (MHz)	Field strength of fundamental, limit $\mu\text{V/m}$
40.66 – 40.70	1,000
70 – 130	500
130 – 174	500 to 1,500
174 – 260	1,500
260 – 470	1,500 to 5,000** (315 MHz: 67.66 dB $\mu\text{V/m}$ = 2416.677 $\mu\text{V/m}$) (433.92 MHz: 72.87 dB $\mu\text{V/m}$ = 4398.681 $\mu\text{V/m}$)
Above 470	5,000

** linear interpolation

Explanation: See attached diagrams in appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.3 Out of Band Radiated Emissions

FCC Rule: 15.231(e), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Guidance on Measurement of pulsed emission: 15.35(c)

“the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.”

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms or one period})$

Limits:

For frequencies (Average measurements)

Correction factor conform 15.35 (c) (Average measurements)

Duty cycle correction :

Max. Peak reading – duty cycle correction

Max permitted average Limits = Max permitted Fundamental limit – 20 dB

For example for 315 fundamental carrier:


Max permitted average Limit: $67.66 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 47.66 \text{ dB}\mu\text{V/m}$

For example for 433.92 fundamental carrier:

Max permitted average Limit: $72.87 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 52.87 \text{ dB}\mu\text{V/m}$

For frequencies above 1GHz (Peak measurements).

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.4 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.231 (b), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 8000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of pulsed emission:

“If the emission is pulsed, modify the unit for continues operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

For frequencies above 1GHz (Average measurements).

The correction factor, based on the channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time}/100\text{ms})$


No duty cycle correction was added to the reading

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

Above 960 MHz

For mode DSSS CW: $54 \text{ dB}\mu\text{V/m} + 20 \text{ dB} = 74 \text{ dB}\mu\text{V/m}$

Explanation: See attached diagrams in appendix.



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

3.5 Spurious Emission radiated, Transmitter

Spurious emission was measured with modulation (declared by manufacturer).

The limits on the field strength of the spurious emission in the table § 15.231(e) are based on the fundamental frequency of the intentional radiator. Spurious emission shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

In addition, radiated emission which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

Summary table with radiated data of the test plots

Model: US1-006 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Reading + Correction Factor
 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. Up Line: PK Limit Line, Down Line: Ave Limit Line.

All other not noted test plots do not contain significant test results in relation to the limits

Test results: The unit meets the FCC requirements.

Explanation: See attached diagrams in appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.6 Channel Bandwidth

Measurement of Necessary Bandwidth (BN)

Test date: May 27, 2020

Temperature: 25.2 °C

Humidity: 55.4 %

Tester: Leon

315MHz

ASK

Used frequency	Bandwidth	Limit
315 MHz	75.320512821 kHz	0.7875 MHz

FSK

Used frequency	Bandwidth	Limit
315 MHz	139.423076923 kHz	0.7875 MHz

433.92MHz

ASK

Used frequency	Bandwidth	Limit
433.92 MHz	107.371794872 kHz	1.0848 MHz

FSK


Used frequency	Bandwidth	Limit
433.92 MHz	133.012820513 kHz	1.0848 MHz

Explanation: The bandwidth fulfills the requirements of FCC § 15.231,
See attached diagrams in appendix.

Limits:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test equipment used: ETSTW-RE 004



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1


FCC ID: XVBU1FC1

IC: 9368A-U1FC1

Occupied Bandwidth


315MHz

ASK

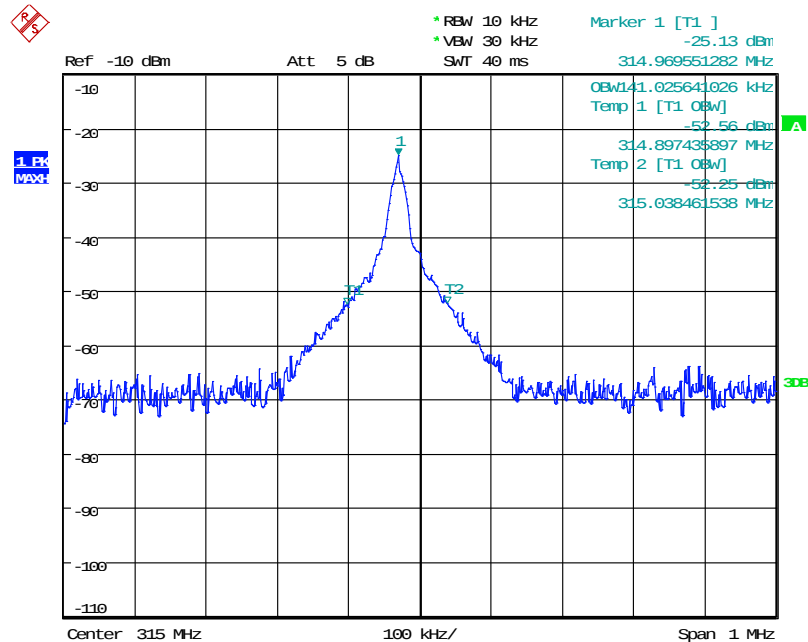


Date: 3.JUN.2020 20:47:55

FSK

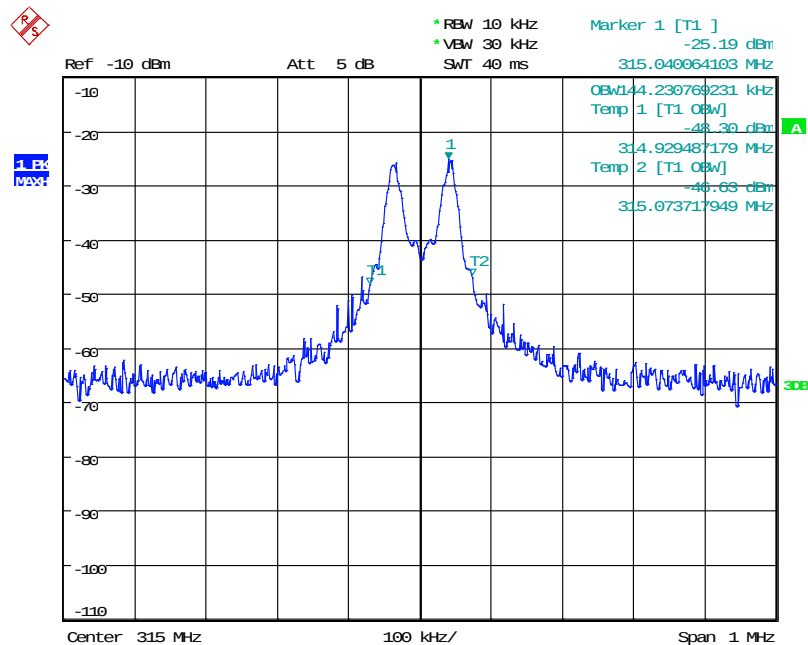


Date: 3.JUN.2020 20:48:46




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1
433.92MHz
ASK

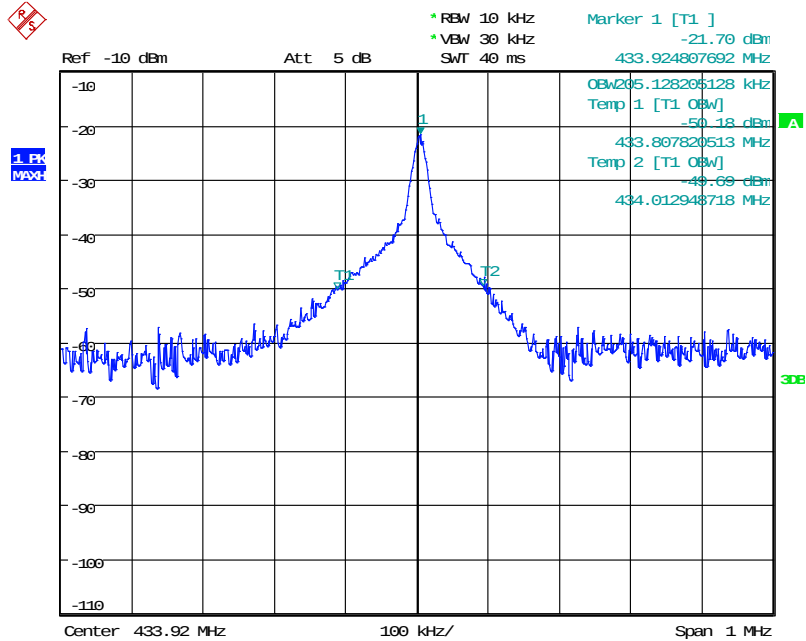


Date: 3.JUN.2020 20:50:42

FSK

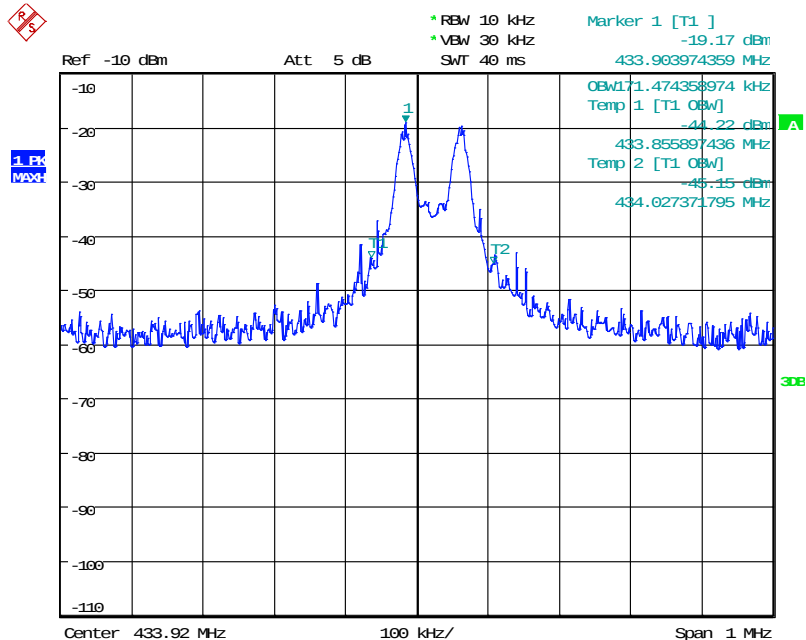

Date: 3.JUN.2020 20:49:37




Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

3.7 Antenna requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This Incorporated antenna is integral antenna which passes antenna requirement.

The equipment meets the requirements	yes ☒	no ☐
--------------------------------------	--	--------------------------------



Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.8 Duty Cycle

The correction factor, based on the channel dwell time in a 100ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the measured value.

Average Reading = Peak Reading (dBuV/m) + Duty Cycle Correction

Test date: June 03, 2020

Temperature: 23.8 °C

Humidity: 47.1 %

Tester: Leon

Duty Cycle Correction = 20 log (Cycle)

In order to determine the Duty Cycle, the EUT is measured as:

315MHz

ASK

Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction 20*log(Duty Cycle)
Transmitting mode	100	11.85897	0.11858974	-18.52

FSK

Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction 20*log(Duty Cycle)
Transmitting mode	100	12.01923	0.12019231	-18.40

433.92MHz

ASK


Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction 20*log(Duty Cycle)
Transmitting mode	100	11.85897	0.11858974	-18.52

FSK

Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction 20*log(Duty Cycle)
Transmitting mode	100	12.01923	0.12019231	-18.40

Explanation: See attached diagrams in appendix.

Test equipment used: ETSTW-RE 004



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1

3.9 Conducted Measurement at (AC) Power Line

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Model: US1-006 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: N Humidity: -- %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: L1

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Note

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. This test is not required because the EUT is battery-used.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.




Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1

3.10 Equipment Modification

No modification was made by Worldwide Testing Services (Taiwan) Co., Ltd..



Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1


Appendix

A. Pictures

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission

B. Measurement diagrams

1. Active Time
2. Bandwidth
3. Duty Cycle
4. Spurious Emissions radiated



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1


FCC ID: XVBU1FC1

IC: 9368A-U1FC1


Active Time

315MHz

ASK

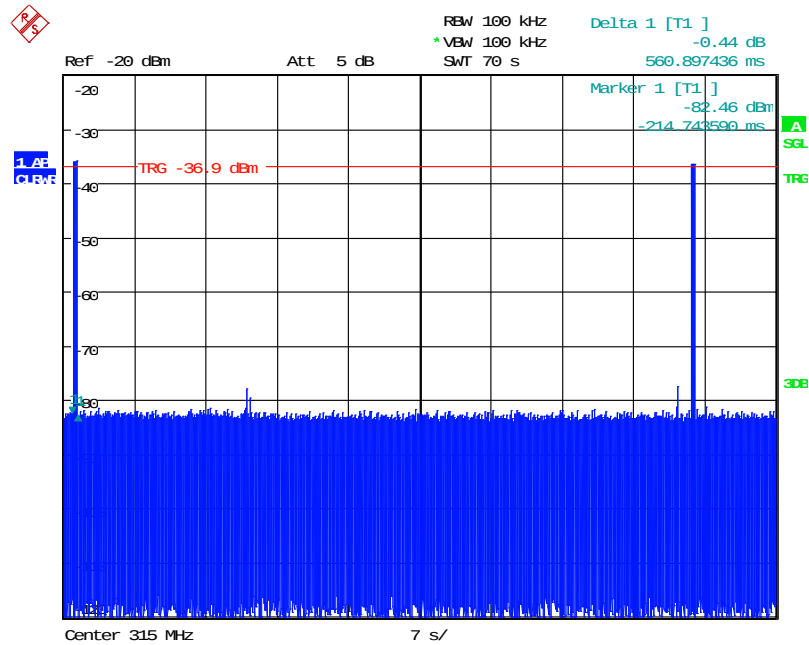


Date: 3.JUN.2020 19:50:54

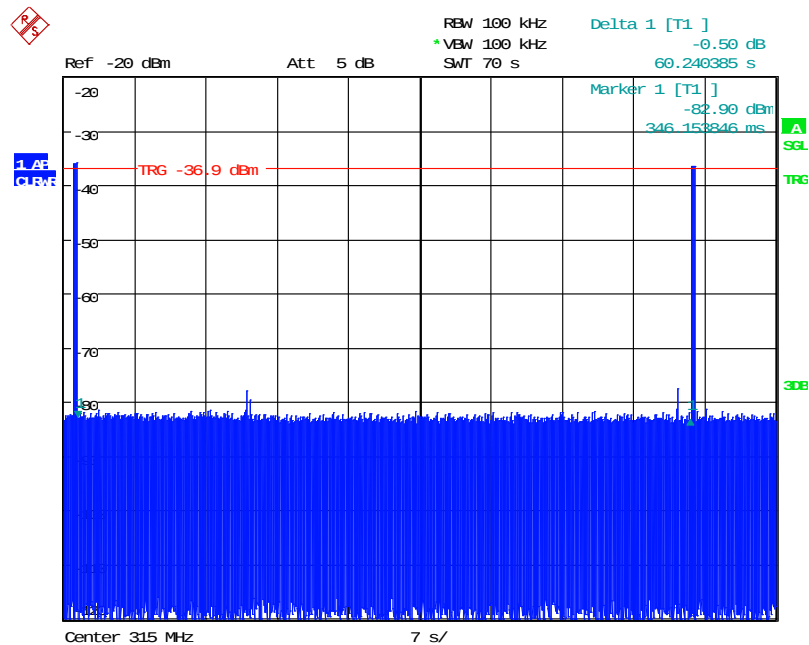

Date: 3.JUN.2020 19:51:42



FSK



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1


IC: 9368A-U1FC1

433.92MHz


ASK

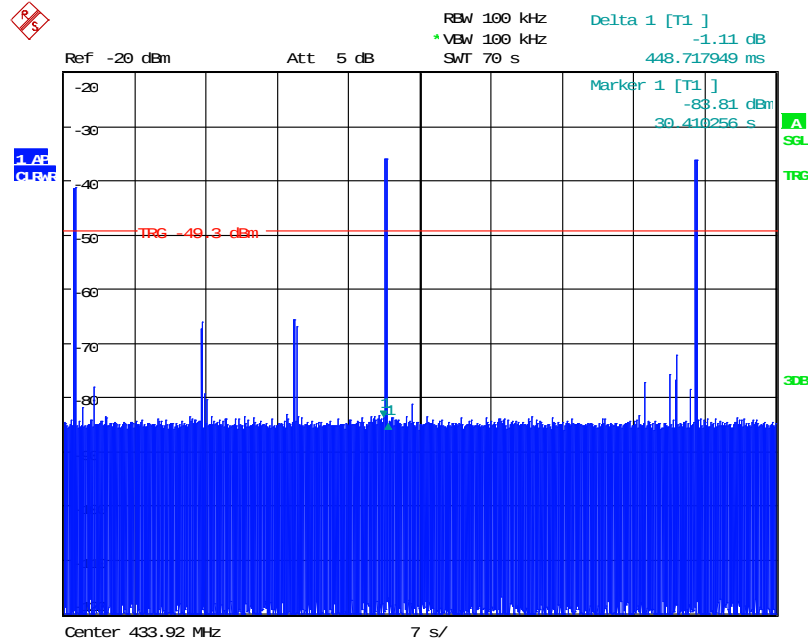

Date: 27.MAY.2020 17:46:53

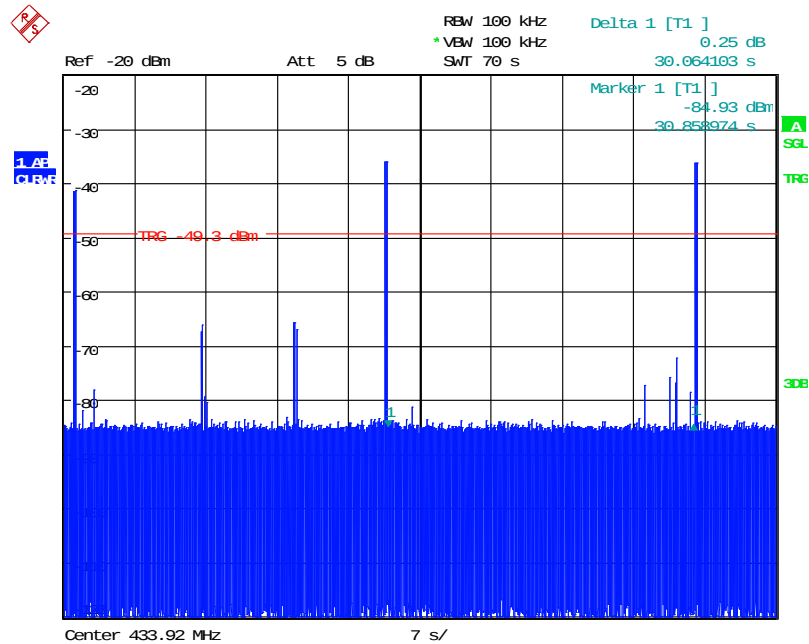

Date: 27.MAY.2020 17:47:22




Registration number: W6M22005-19900-C-1


FCC ID: XVBU1FC1

IC: 9368A-U1FC1


FSK

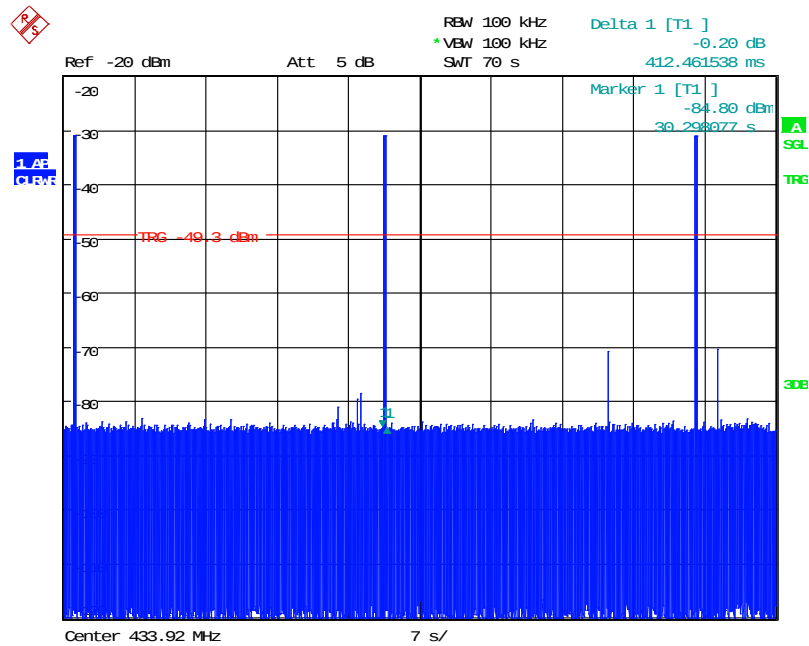

Date: 27.MAY.2020 17:38:05

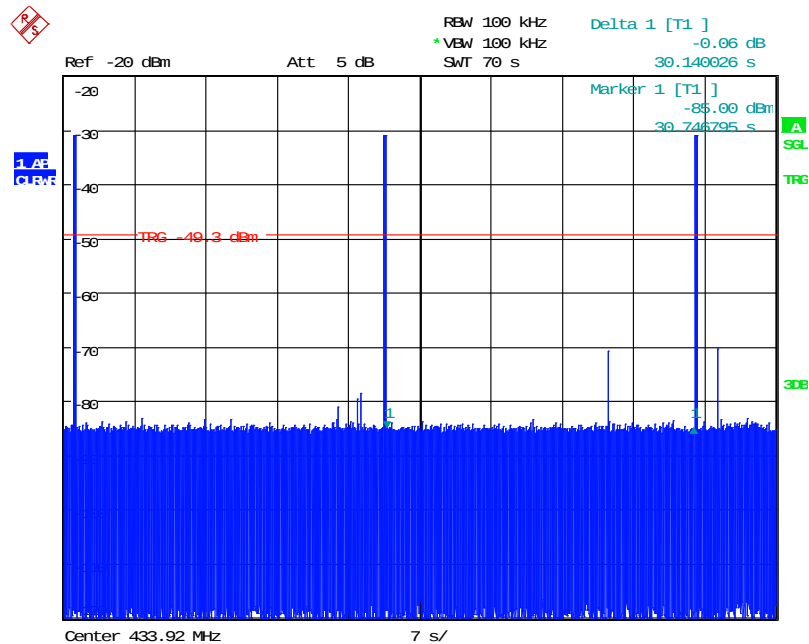

Date: 27.MAY.2020 17:38:40



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1


FCC ID: XVBU1FC1

IC: 9368A-U1FC1

Bandwidth


315MHz

ASK

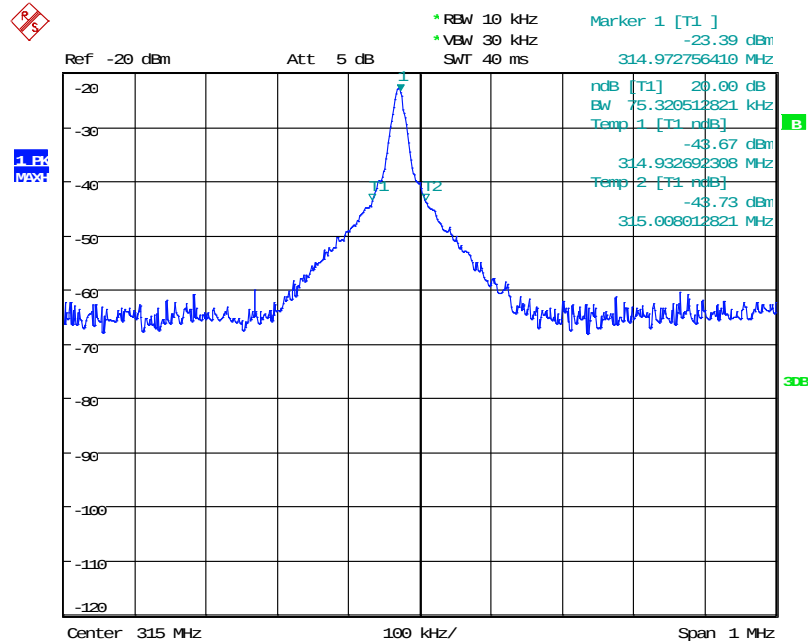


Date: 27.MAY.2020 18:12:38

FSK

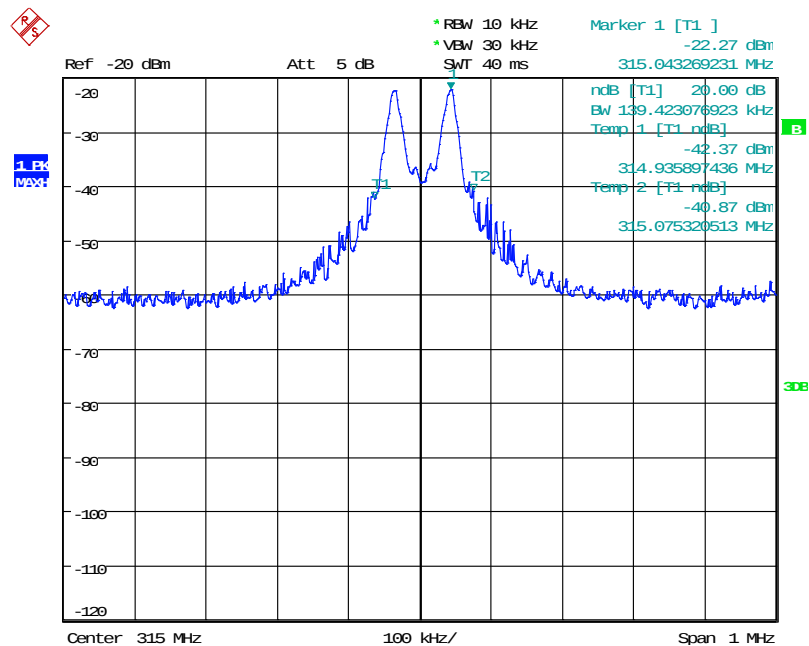

Date: 27.MAY.2020 17:52:38




Registration number: W6M22005-19900-C-1

FCC ID: XVBU1FC1

IC: 9368A-U1FC1


433.92MHz

ASK

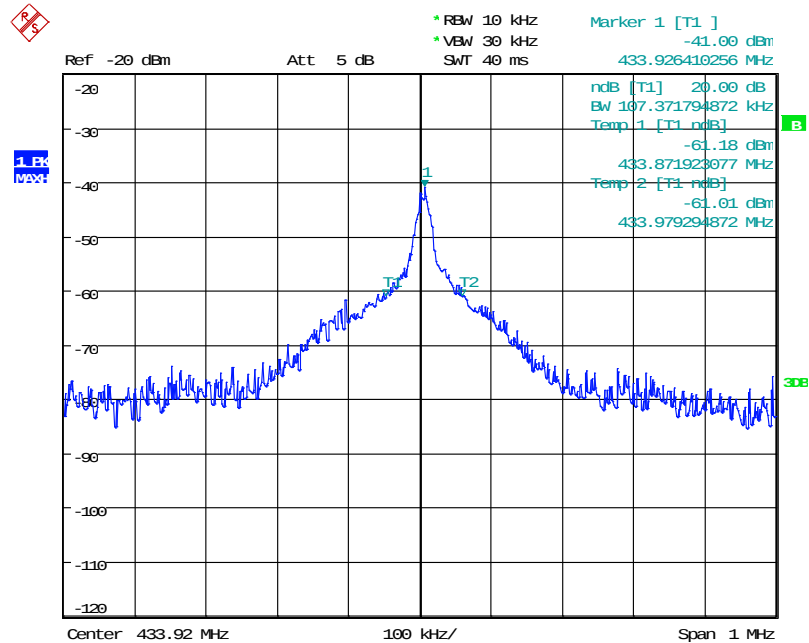


Date: 27.MAY.2020 17:49:06

FSK

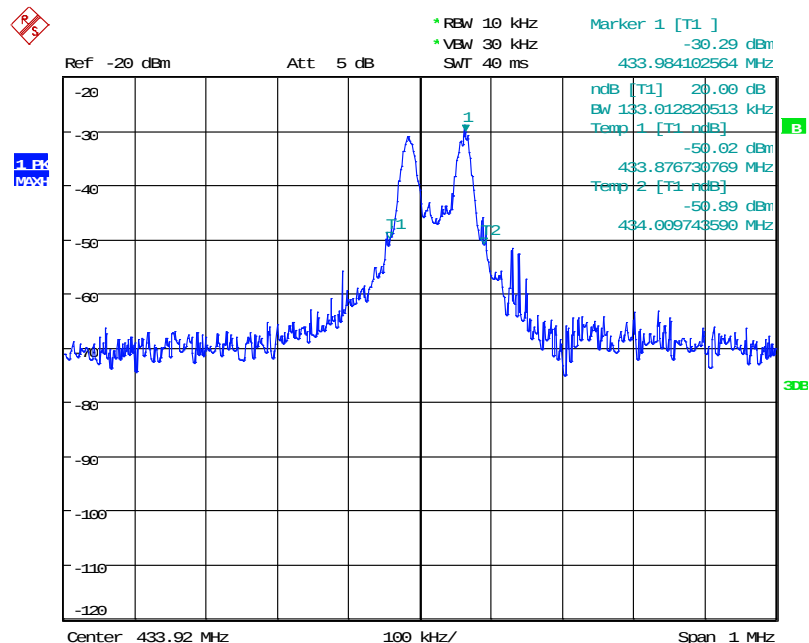

Date: 27.MAY.2020 17:42:07



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22005-19900-C-1


FCC ID: XVBU1FC1

IC: 9368A-U1FC1

Duty Cycle


315MHz

ASK

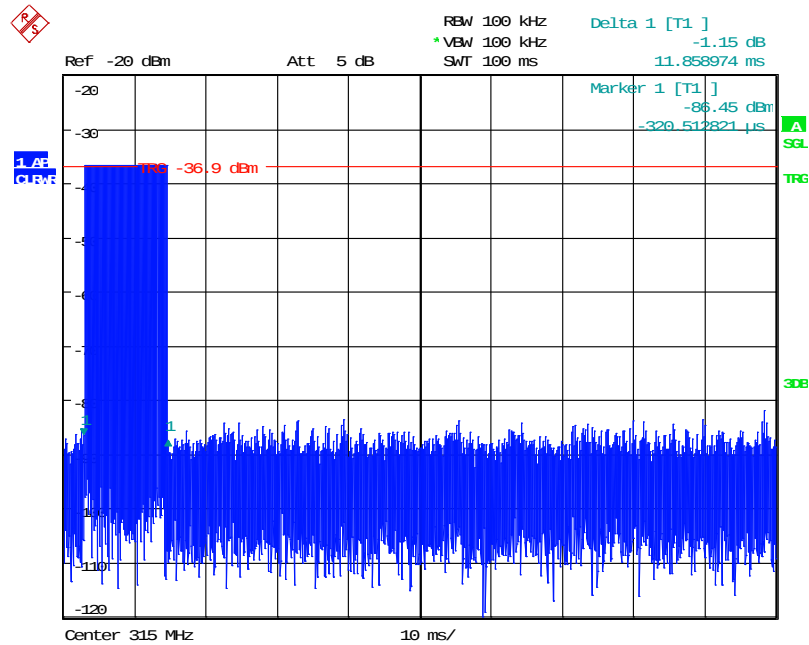


Date: 3.JUN.2020 19:53:44


FSK

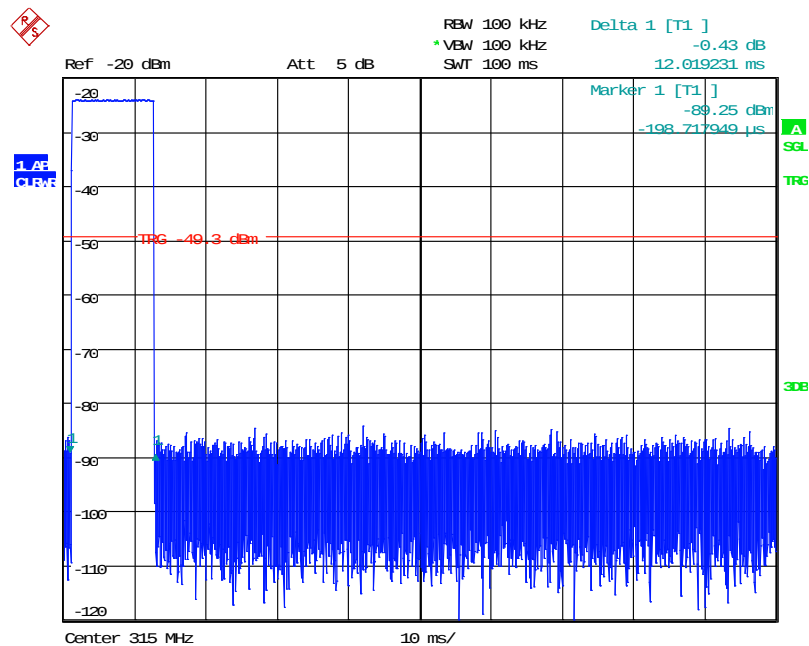

Date: 27.MAY.2020 17:59:07




Registration number: W6M22005-19900-C-1
FCC ID: XVBU1FC1
IC: 9368A-U1FC1
433.92MHz
ASK

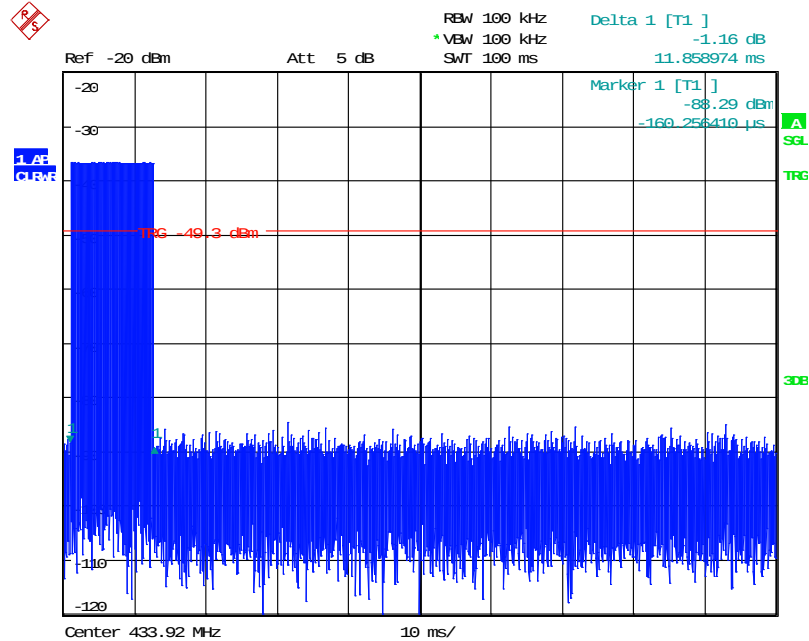

Date: 27.MAY.2020 17:44:22

FSK

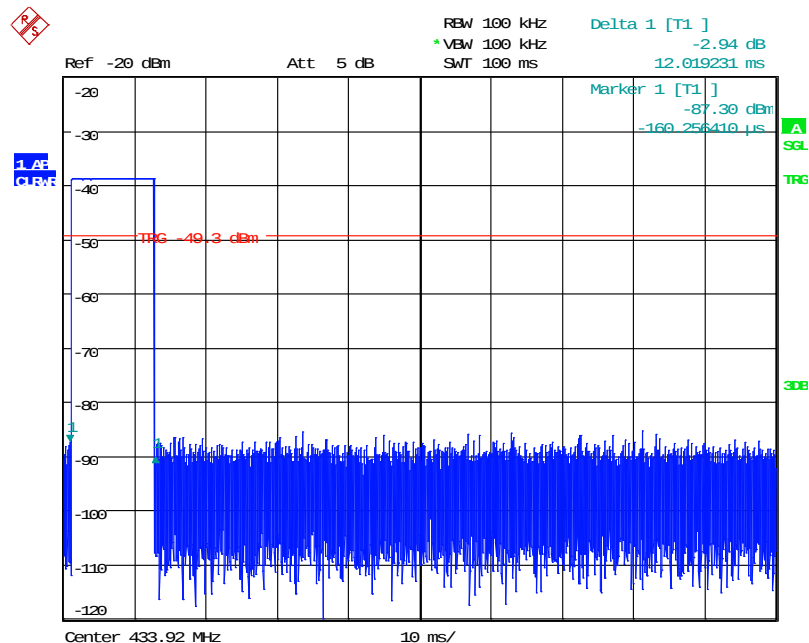

Date: 27.MAY.2020 17:39:37



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 2:12:13 AM

Humidity: 49.0 %

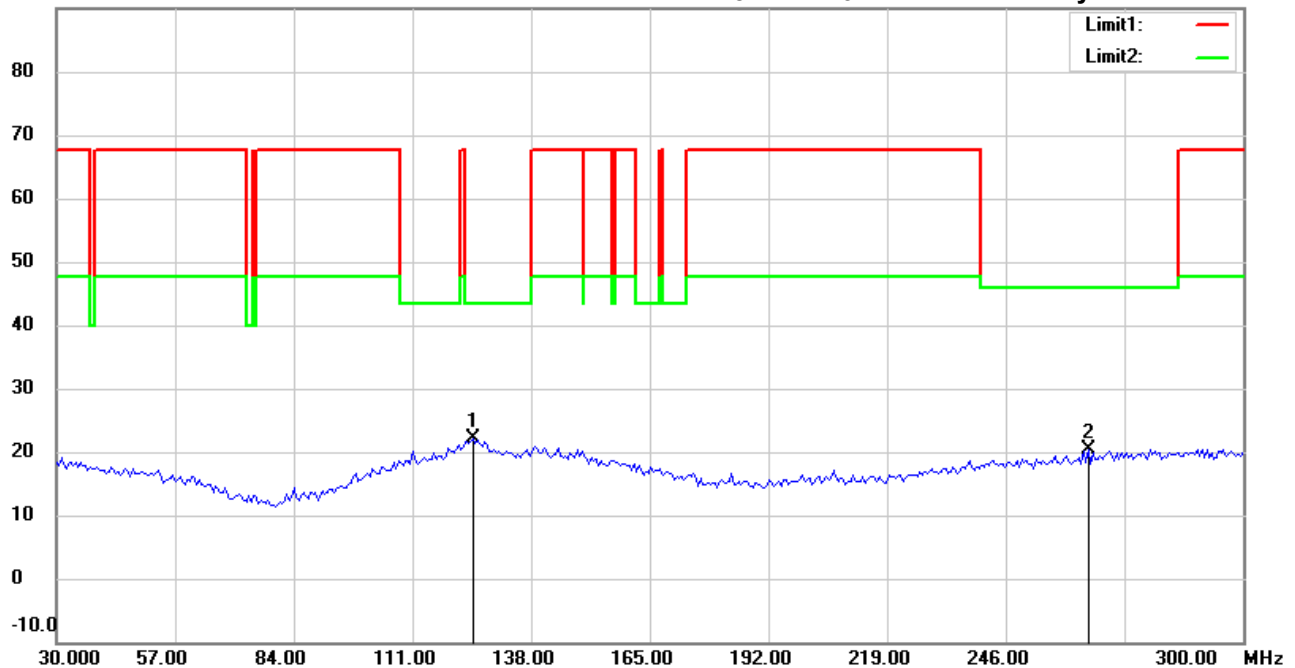

Site : Chamber

Condition : FCC 15.231(315MHz) 30-300(PK)<e>

Polarization: *Horizontal*

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 315MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	124.6894	29.32	peak	-7.15	22.17	43.50	100	215	-21.33	
	264.8297	27.43	peak	-7.00	20.43	46.00	100	340	-25.57	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 2:18:04 AM

Humidity: 49.0 %

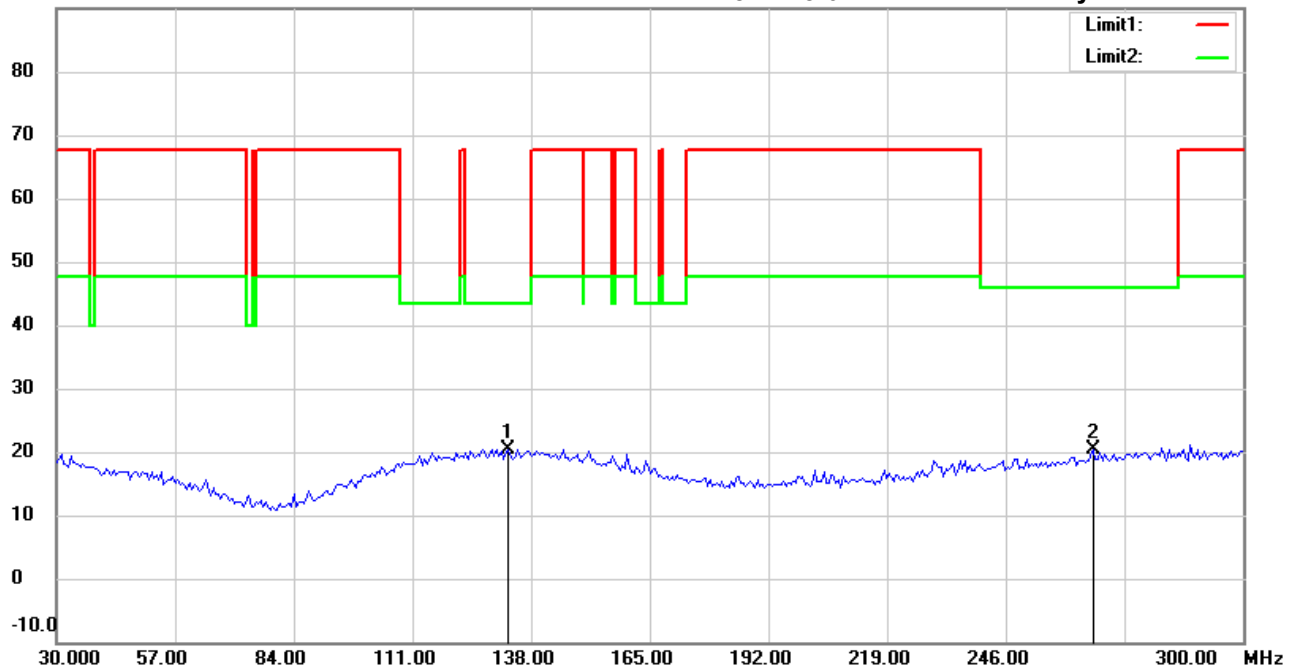

Site : Chamber

Condition : FCC 15.231(315MHz) 30-300(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	132.8056	27.34	peak	-6.84	20.50	43.50	100	68	-23.00	
	265.9118	27.22	peak	-6.92	20.30	46.00	100	109	-25.70	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 2:19:43 AM

Humidity: 49.0 %

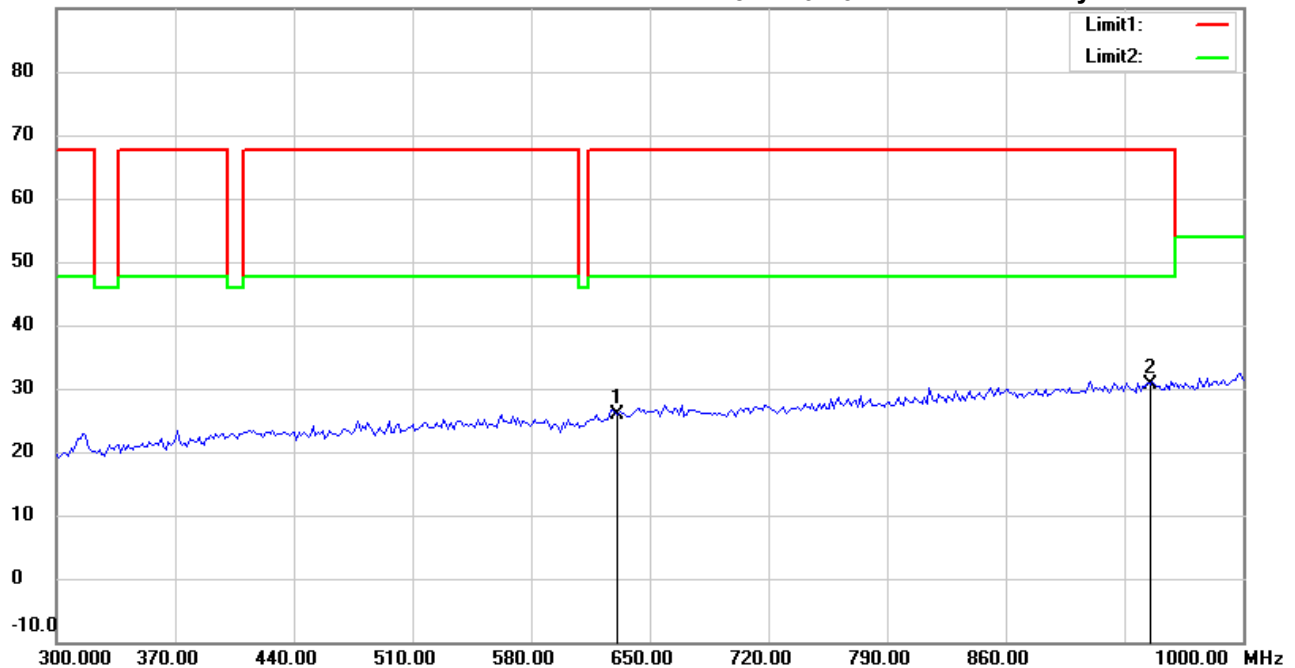

Site : Chamber

Condition : FCC 15.231(315MHz) 300-1000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	630.0000	27.02	peak	-1.07	25.95	67.66	100	327	-41.71	
*	945.0000	26.27	peak	4.33	30.60	67.66	100	64	-37.06	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :2

Data :#2


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 2:21:13 AM

Humidity:49.0 %

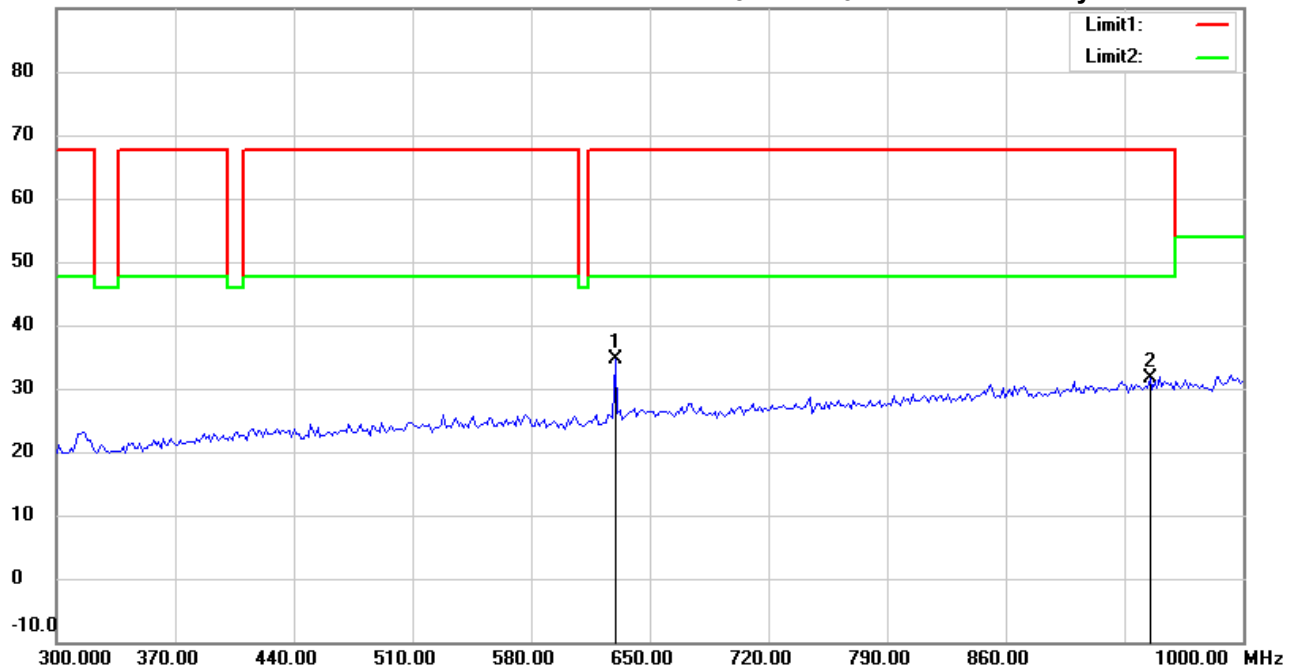

Site : Chamber

Condition : FCC 15.231(315MHz) 300-1000(PK)<e>

Polarization: Vertical

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 315MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	629.6593	35.66	peak	-1.08	34.58	67.66	100	76	-33.08	
	945.0000	27.27	peak	4.33	31.60	67.66	100	228	-36.06	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 6:11:27 AM

Humidity: 49.0 %

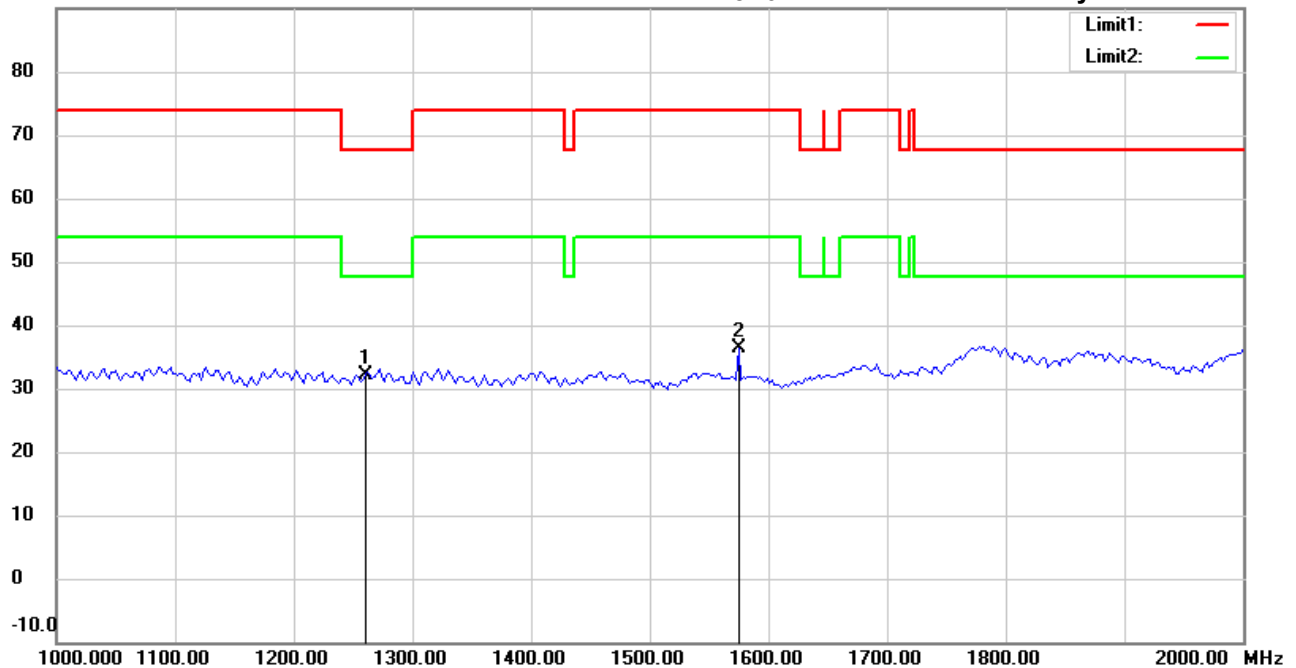

Site : Chamber

Condition : FCC 15.231(315MHz) 1000-2000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1260.000	41.86	peak	-9.70	32.16	67.66	150	48	-35.50	
	1575.150	46.79	peak	-10.42	36.37	74.00	150	100	-37.63	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 6:13:29 AM

Humidity:49.0 %

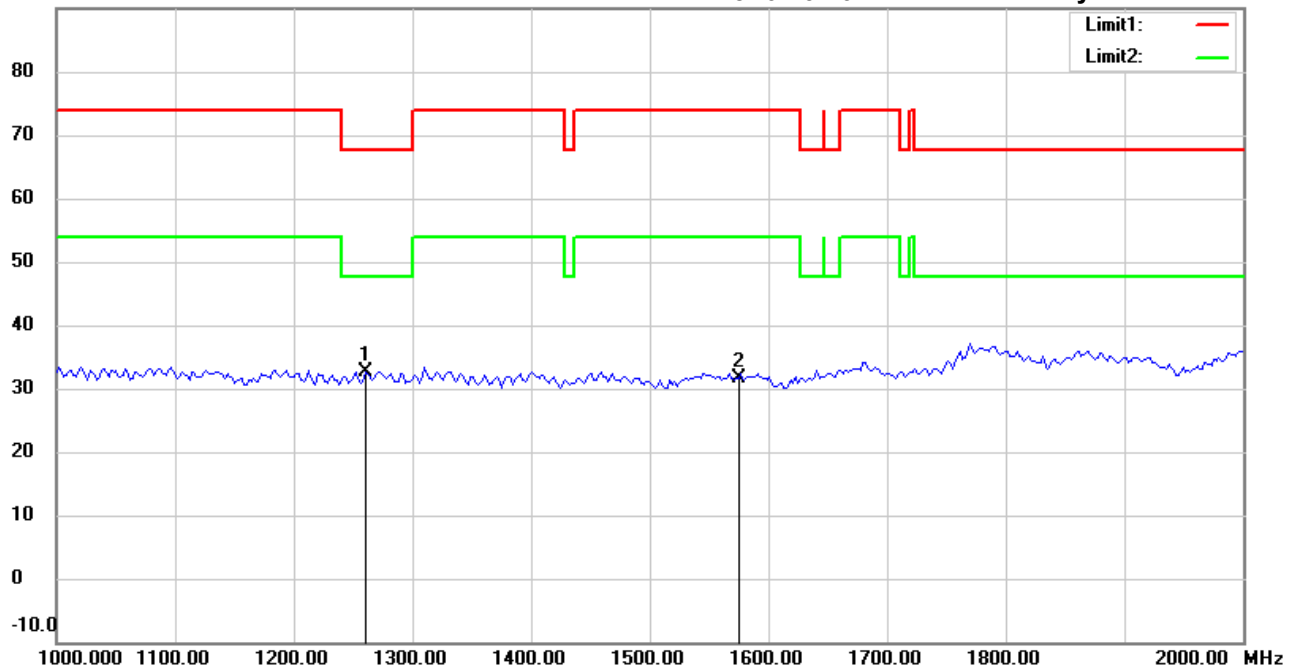

Site : Chamber

Condition : FCC 15.231(315MHz) 1000-2000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1260.000	42.33	peak	-9.70	32.63	67.66	150	270	-35.03	
	1575.000	42.00	peak	-10.42	31.58	74.00	150	14	-42.42	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 6:12:28 AM

Humidity: 49.0 %

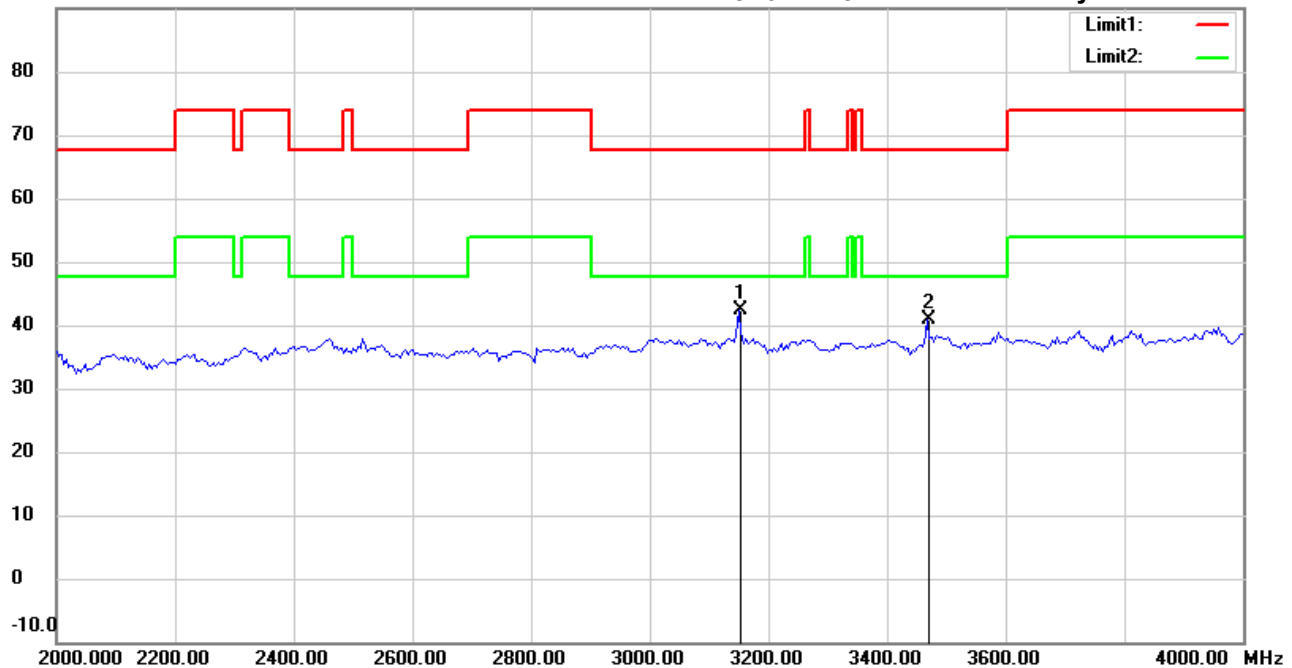

Site : Chamber

Condition : FCC 15.231(315MHz) 2000-4000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	3150.301	46.35	peak	-3.88	42.47	67.66	150	73	-25.19	
	3466.934	44.27	peak	-3.47	40.80	67.66	150	216	-26.86	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 6:14:30 AM

Humidity: 49.0 %

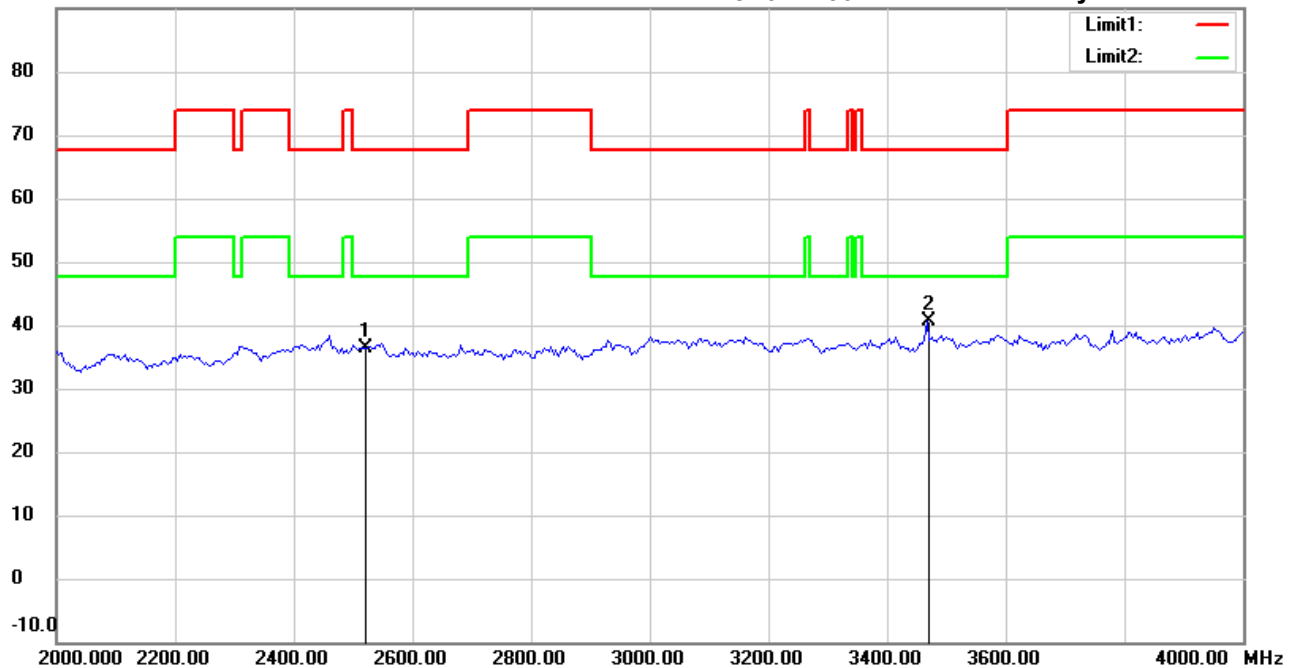

Site : Chamber

Condition : FCC 15.231(315MHz) 2000-4000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (ASK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2520.000	41.35	peak	-4.90	36.45	67.66	150	166	-31.21	
*	3466.934	44.03	peak	-3.47	40.56	67.66	150	313	-27.10	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 2:51:51 AM

Humidity: 49.0 %

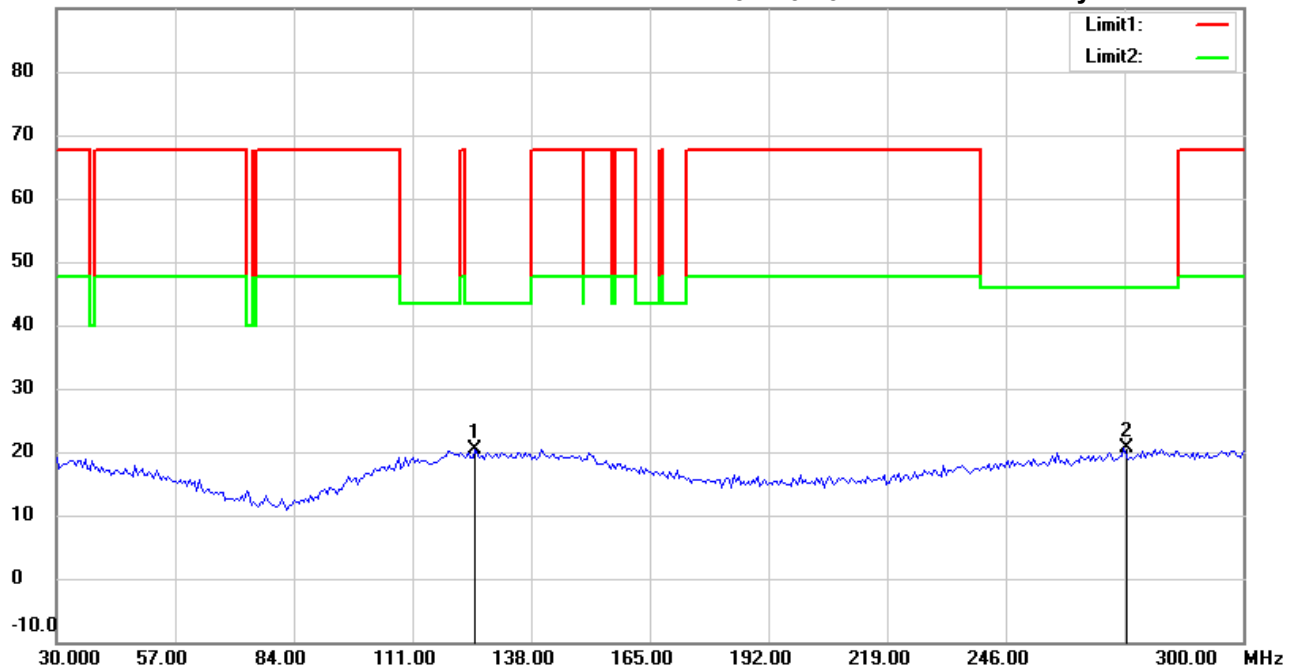

Site : Chamber

Condition : FCC 15.231(315MHz) 30-300(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.2305	27.53	peak	-7.12	20.41	43.50	100	175	-23.09	
	272.9460	27.14	peak	-6.51	20.63	46.00	100	30	-25.37	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 2:58:49 AM

Humidity: 49.0 %

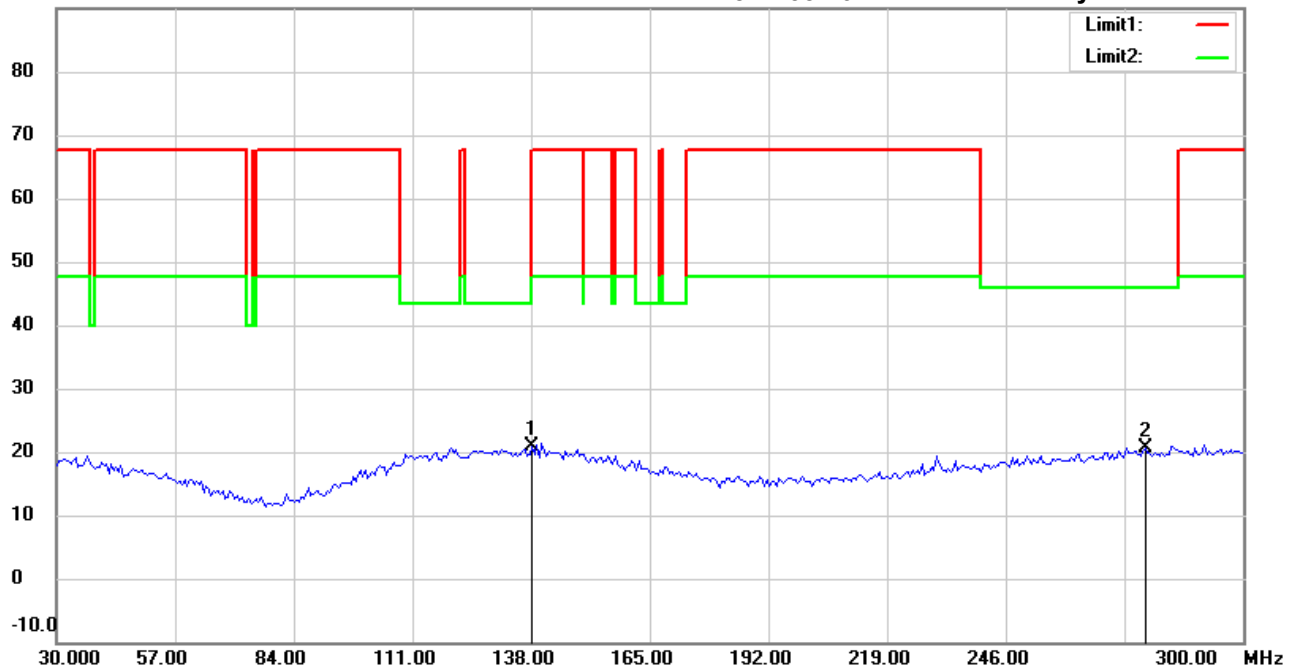

Site : Chamber

Condition : FCC 15.231(315MHz) 30-300(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	138.2164	27.62	peak	-6.73	20.89	67.66	100	242	-46.77	
*	277.8156	27.05	peak	-6.31	20.74	46.00	100	168	-25.26	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

80.0 dBuV/m

Time: 3:03:33 AM

Humidity: 49.0 %

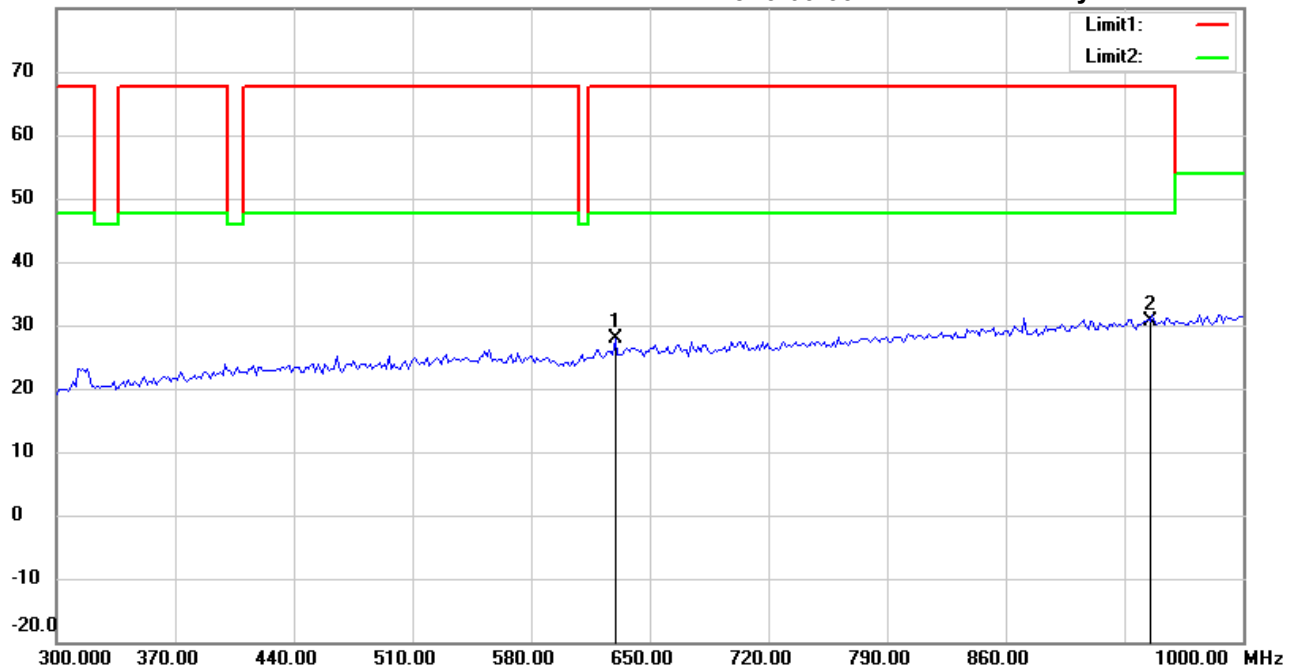

Site : Chamber

Condition : FCC 15.231(315MHz) 300-1000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	629.6593	29.07	peak	-1.08	27.99	67.66	100	94	-39.67	
*	945.0000	26.28	peak	4.33	30.61	67.66	100	210	-37.05	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #2


Date: 6/12/2020

Temperature: 26.6 °C

80.0 dBuV/m

Time: 3:06:39 AM

Humidity: 49.0 %

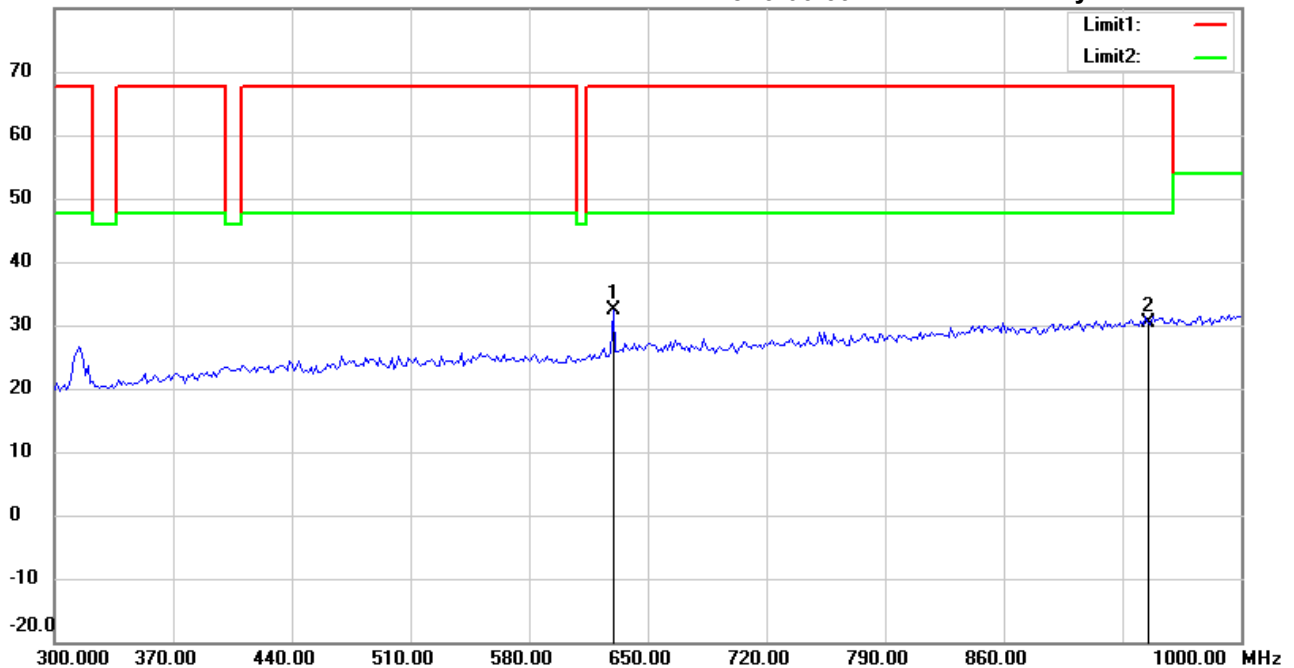

Site : Chamber

Condition : FCC 15.231(315MHz) 300-1000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	629.6593	33.41	peak	-1.08	32.33	67.66	100	137	-35.33	
	945.0000	26.10	peak	4.33	30.43	67.66	100	55	-37.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 5:47:35 AM

Humidity: 49.0 %

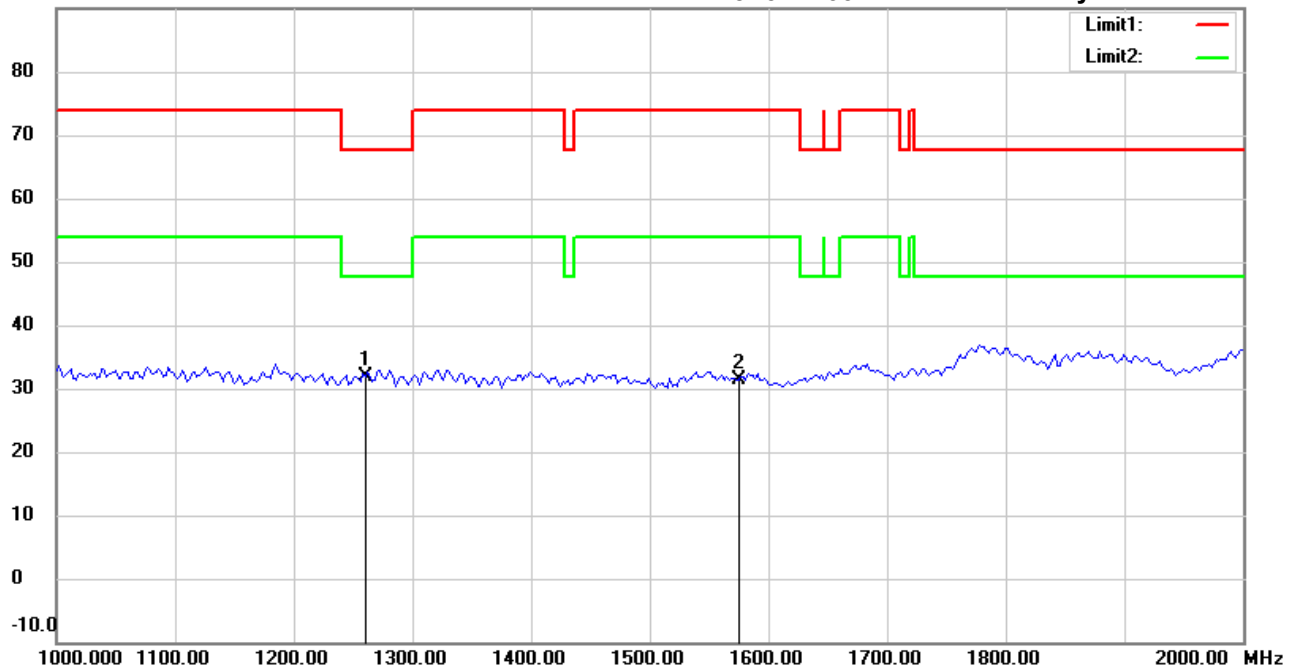

Site : Chamber

Condition : FCC 15.231(315MHz) 1000-2000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1260.000	41.52	peak	-9.70	31.82	67.66	150	111	-35.84	
	1575.000	41.78	peak	-10.42	31.36	74.00	150	269	-42.64	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 5:49:37 AM

Humidity:49.0 %

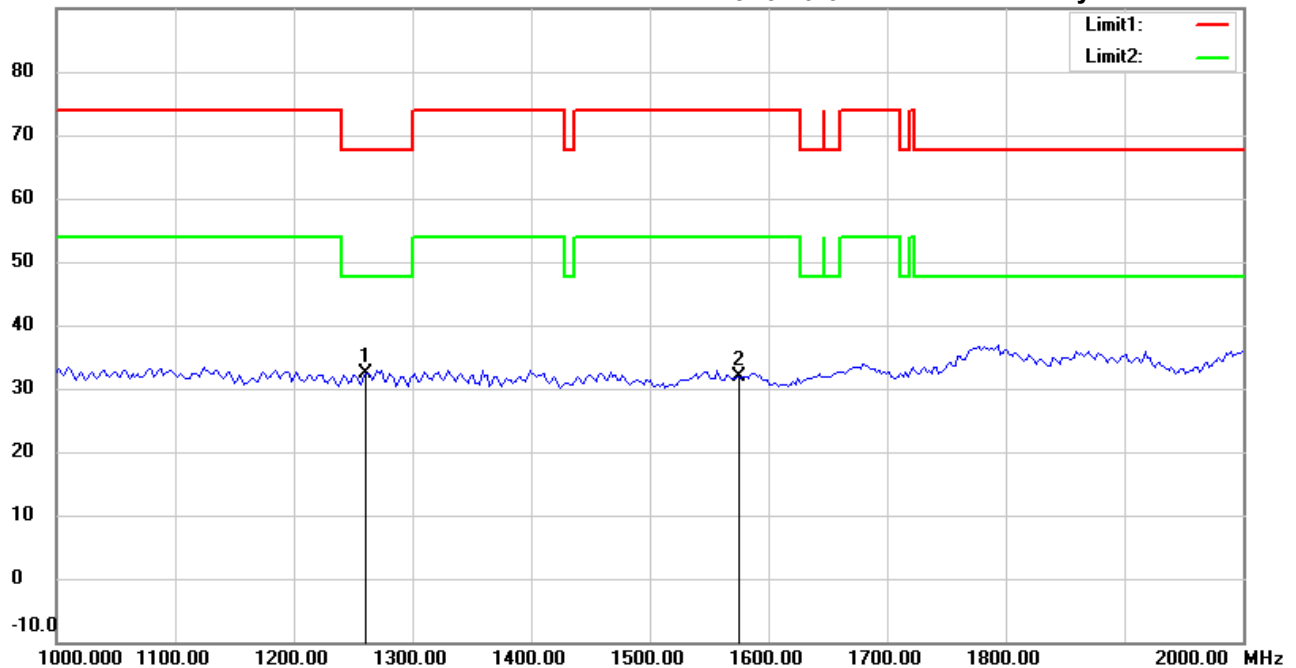

Site : Chamber

Condition : FCC 15.231(315MHz) 1000-2000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1260.000	42.04	peak	-9.70	32.34	67.66	150	165	-35.32	
	1575.000	42.27	peak	-10.42	31.85	74.00	150	22	-42.15	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 5:48:36 AM

Humidity: 49.0 %

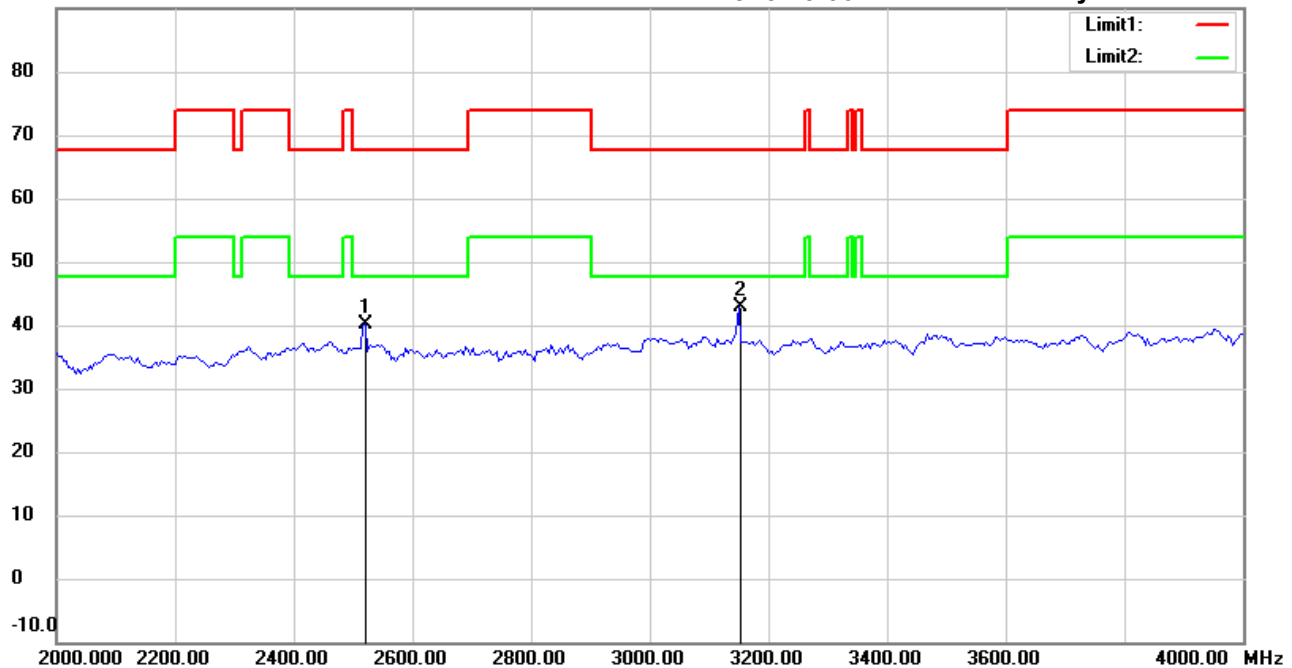

Site : Chamber

Condition : FCC 15.231(315MHz) 2000-4000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2521.042	45.06	peak	-4.91	40.15	67.66	150	180	-27.51	
*	3150.301	46.67	peak	-3.88	42.79	67.66	150	214	-24.87	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #4


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 5:50:38 AM

Humidity: 49.0 %

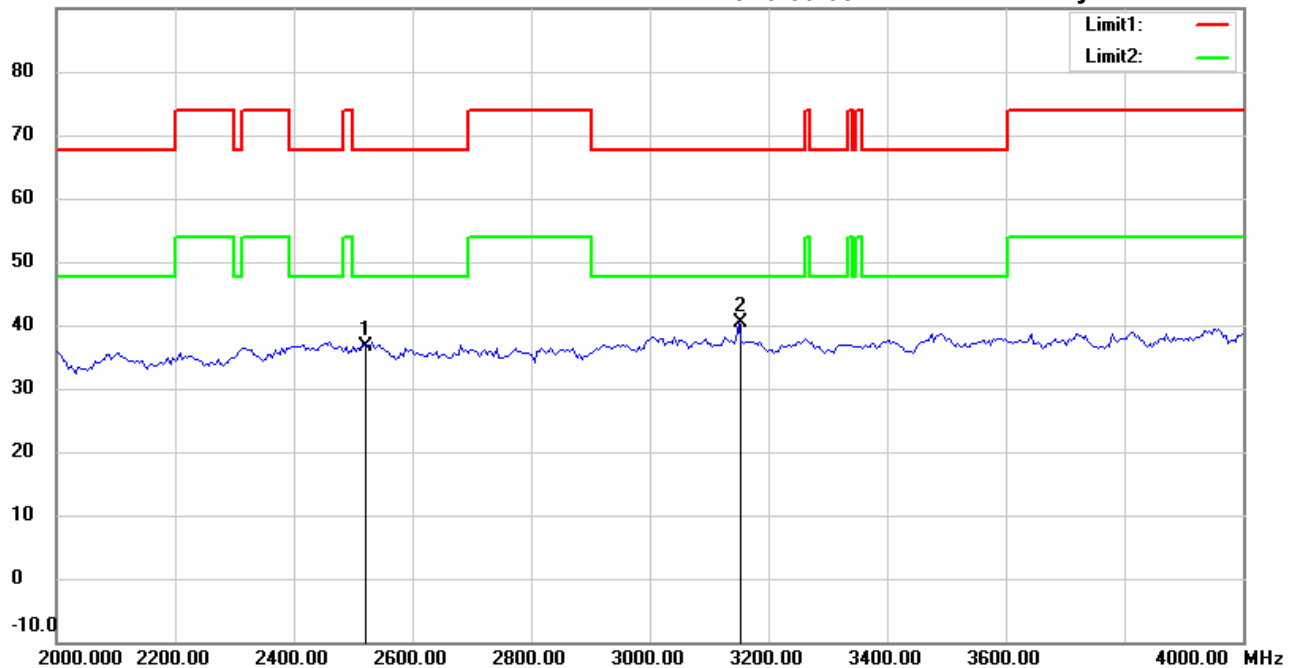

Site : Chamber

Condition : FCC 15.231(315MHz) 2000-4000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 315MHz (FSK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2520.000	41.41	peak	-4.90	36.51	67.66	150	342	-31.15	
*	3150.301	44.37	peak	-3.88	40.49	67.66	150	89	-27.17	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 3:31:59 AM

Humidity: 49.0 %

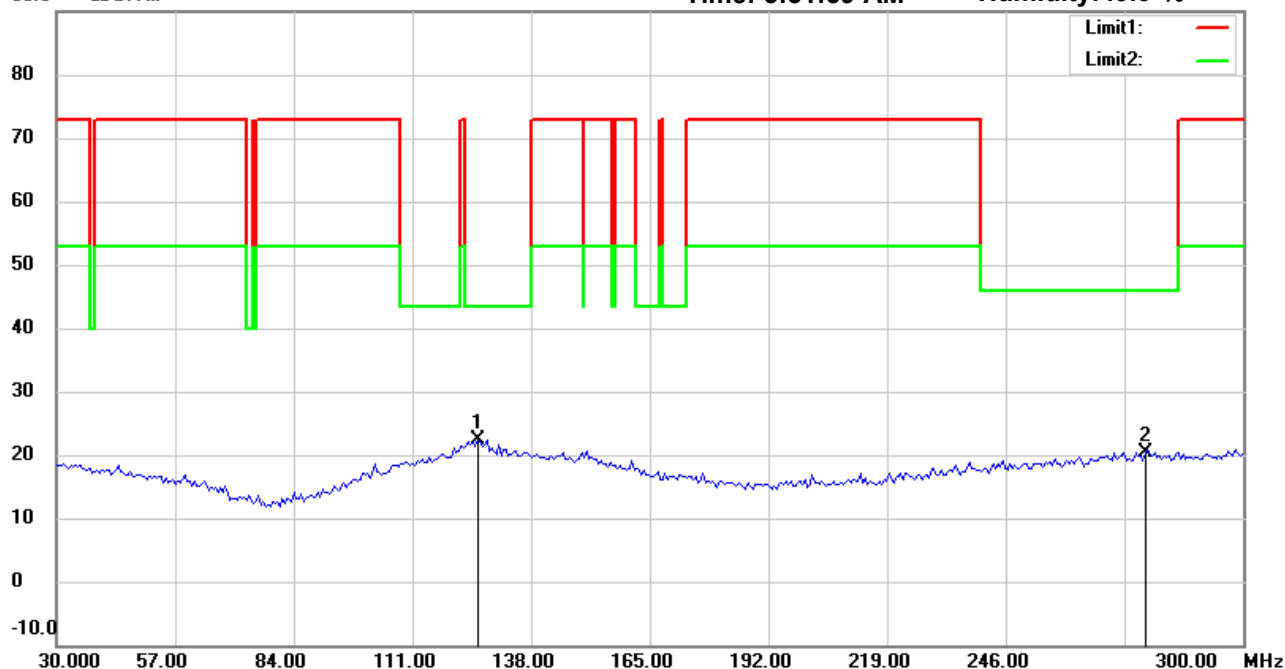

Site : Chamber

Condition : FCC 15.231(433.92MHz) 30-300(PK)<e>

Polarization: *Horizontal*

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.7715	29.58	peak	-7.10	22.48	43.50	100	66	-21.02	
	277.8156	26.76	peak	-6.31	20.45	46.00	100	271	-25.55	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 3:33:17 AM

Humidity: 49.0 %

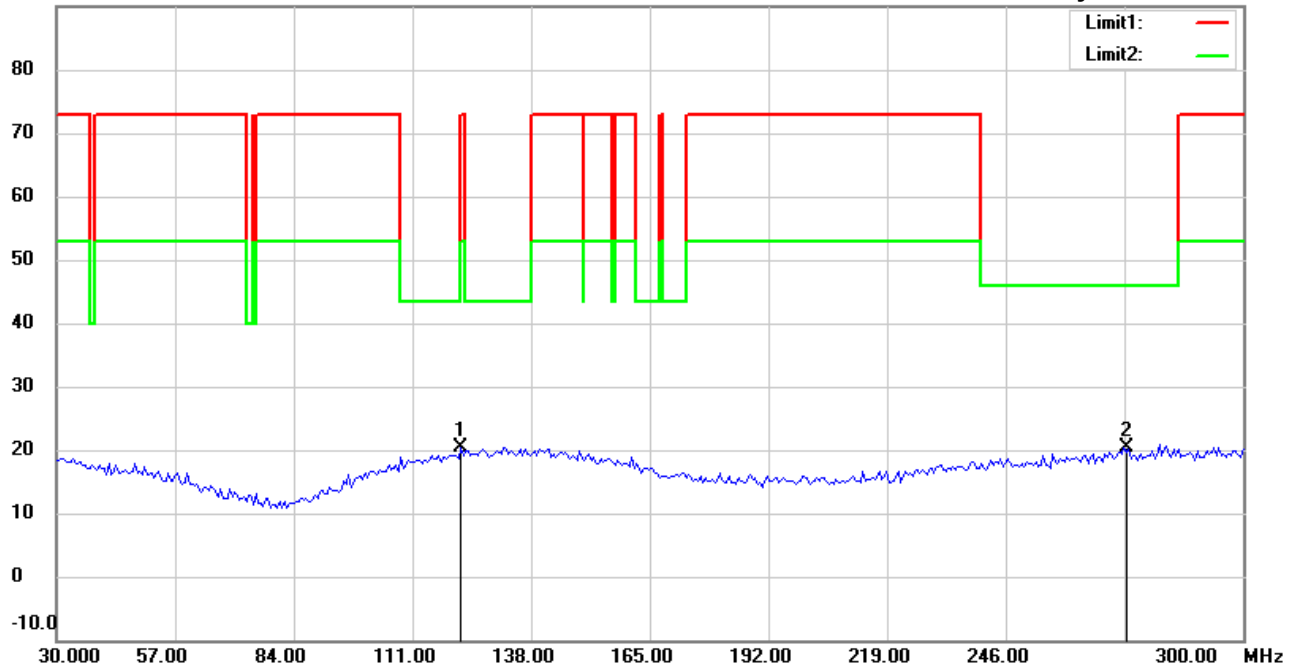

Site : Chamber

Condition : FCC 15.231(433.92MHz) 30-300(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (ASK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	121.9840	27.71	peak	-7.28	20.43	72.80	100	176	-52.37	
*	272.9460	26.78	peak	-6.51	20.27	46.00	100	212	-25.73	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :2

Data :#1


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 3:44:46 AM

Humidity:49.0 %

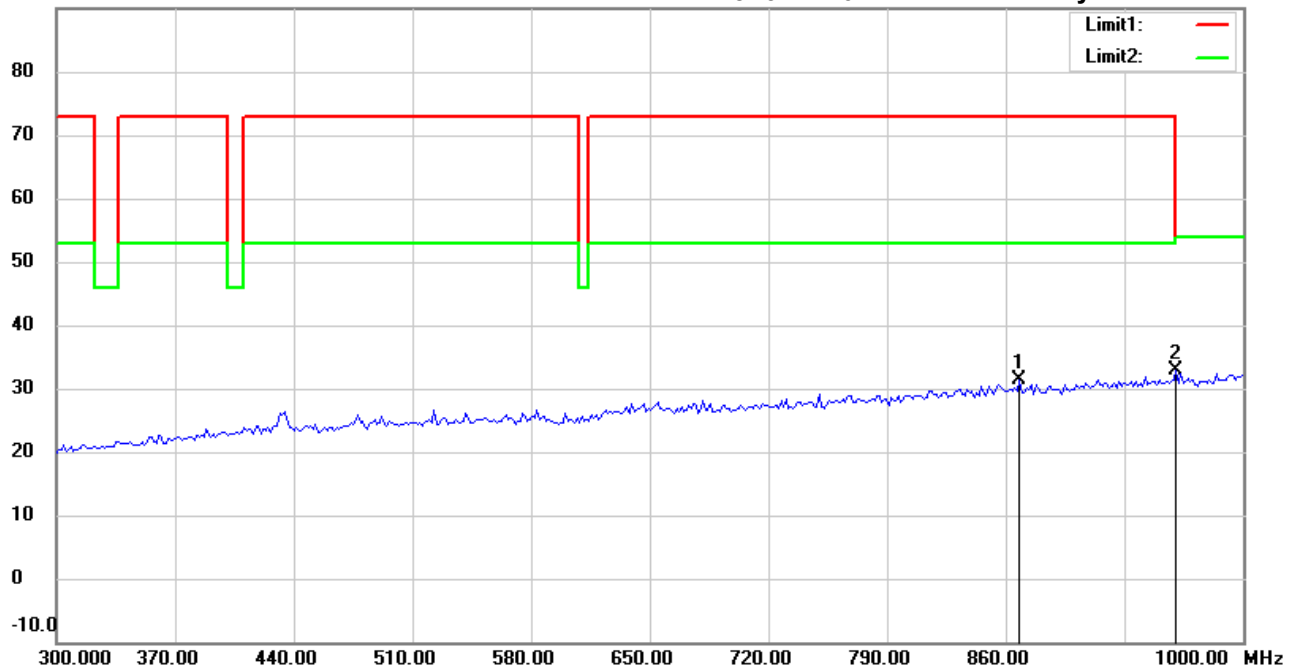

Site : Chamber

Condition : FCC 15.231(433.92MHz) 300-1000(PK)<e>

Polarization: Horizontal

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	867.8400	28.44	peak	3.01	31.45	72.80	100	88	-41.35	
*	960.7214	28.21	peak	4.57	32.78	54.00	100	147	-21.22	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 3:48:12 AM

Humidity: 49.0 %

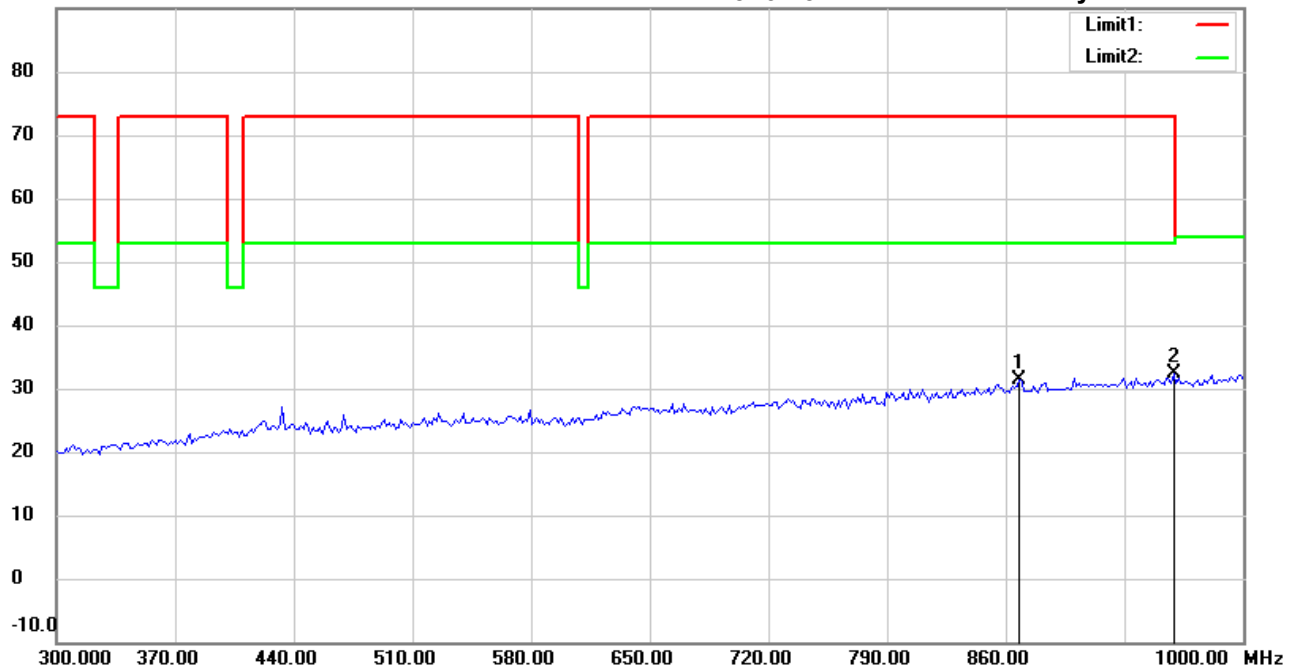

Site : Chamber

Condition : FCC 15.231(433.92MHz) 300-1000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (ASK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	867.8400	28.37	peak	3.01	31.38	72.80	100	235	-41.42	
*	959.3186	27.71	peak	4.55	32.26	72.80	100	99	-40.54	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 5:15:37 AM

Humidity: 49.0 %

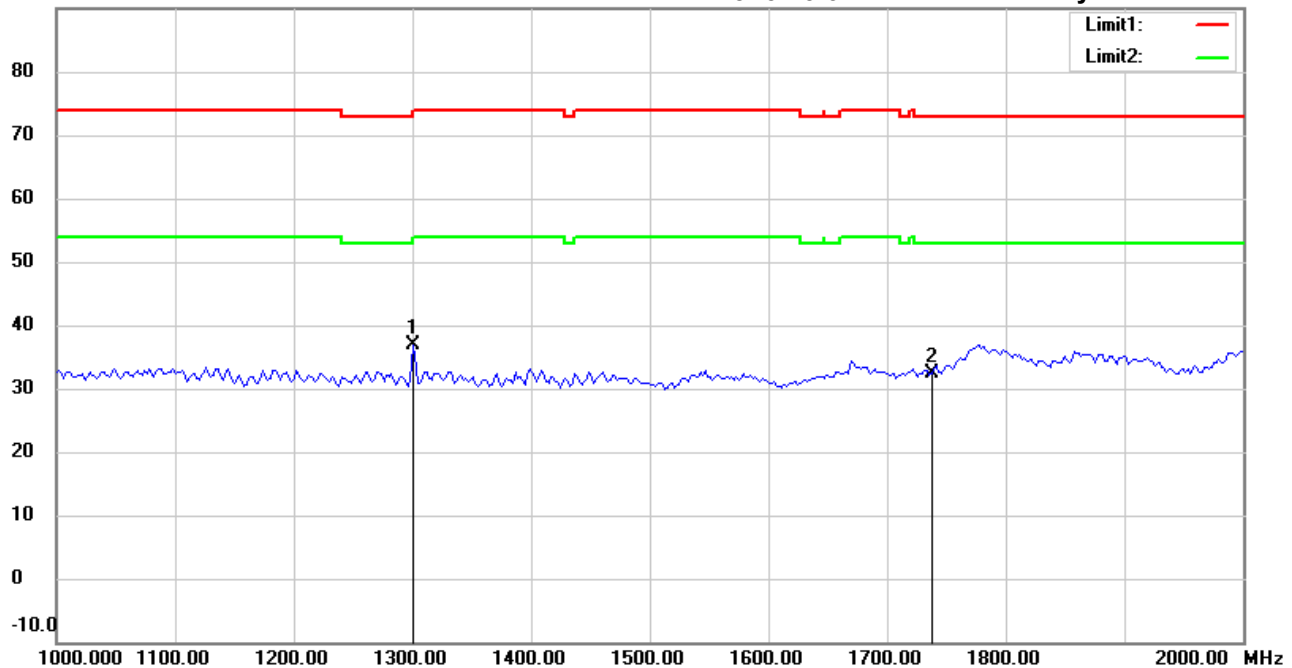

Site : Chamber

Condition : FCC 15.231(433.92MHz) 1000-2000(PK)<e>

Polarization: Horizontal

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1300.601	46.52	peak	-9.56	36.96	74.00	150	103	-37.04	
	1735.680	40.72	peak	-8.38	32.34	72.80	150	60	-40.46	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 5:18:41 AM

Humidity:49.0 %

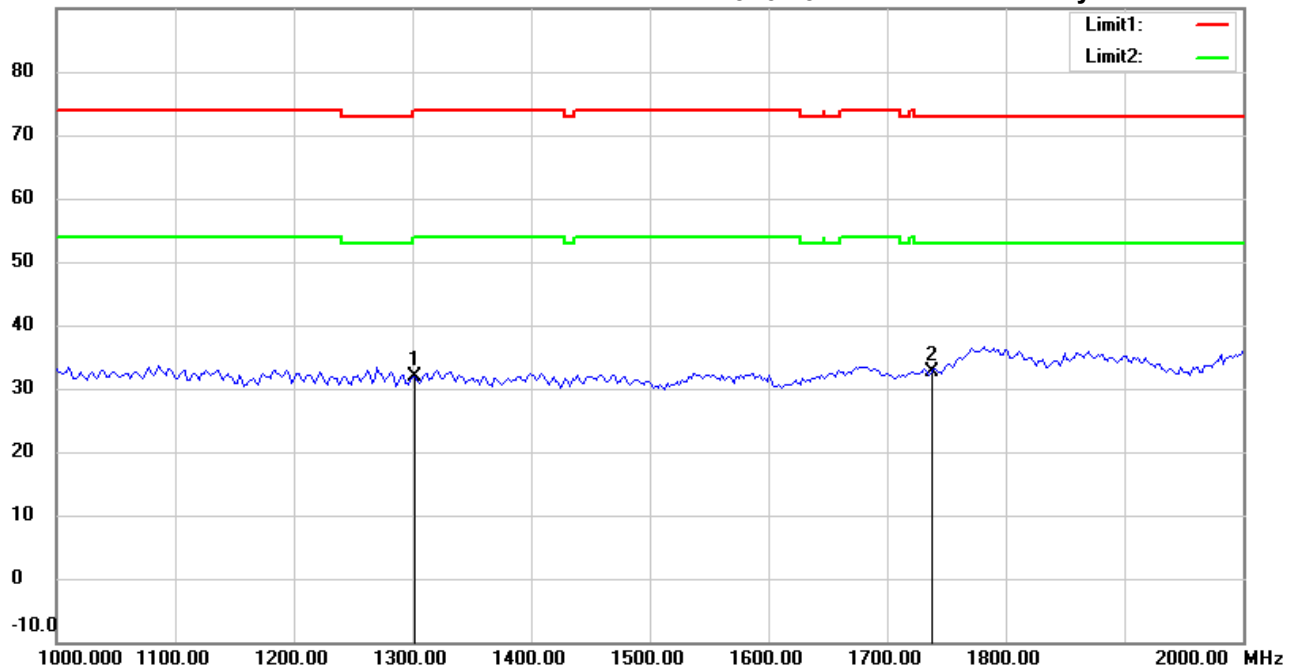

Site : Chamber

Condition : FCC 15.231(433.92MHz) 1000-2000(PK)<e>

Polarization: **Vertical**

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1301.760	41.37	peak	-9.57	31.80	74.00	150	95	-42.20	
*	1735.680	41.06	peak	-8.38	32.68	72.80	150	216	-40.12	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 5:16:38 AM

Humidity: 49.0 %

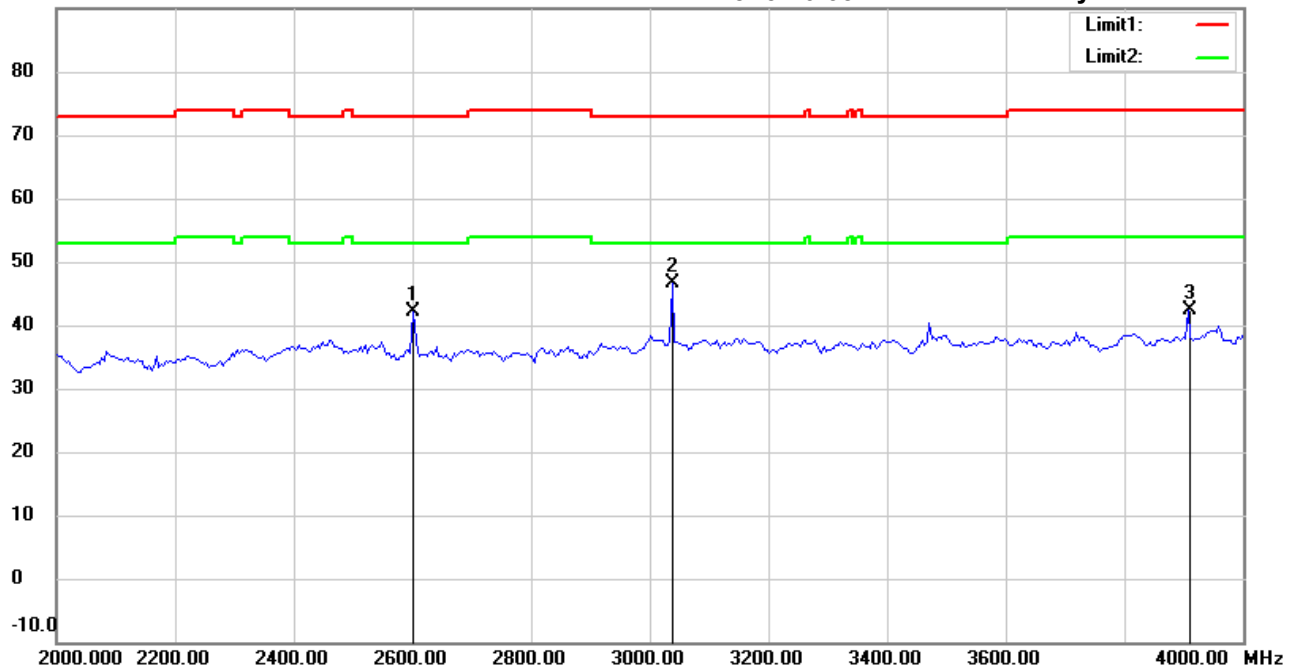

Site : Chamber

Condition : FCC 15.231(433.92MHz) 2000-4000(PK)<e>

Polarization: *Horizontal*

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2601.202	47.65	peak	-5.46	42.19	72.80	150	79	-30.61	
*	3038.076	50.54	peak	-3.87	46.67	72.80	150	340	-26.13	
	3907.816	44.59	peak	-2.29	42.30	74.00	150	187	-31.70	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 5:19:42 AM

Humidity: 49.0 %

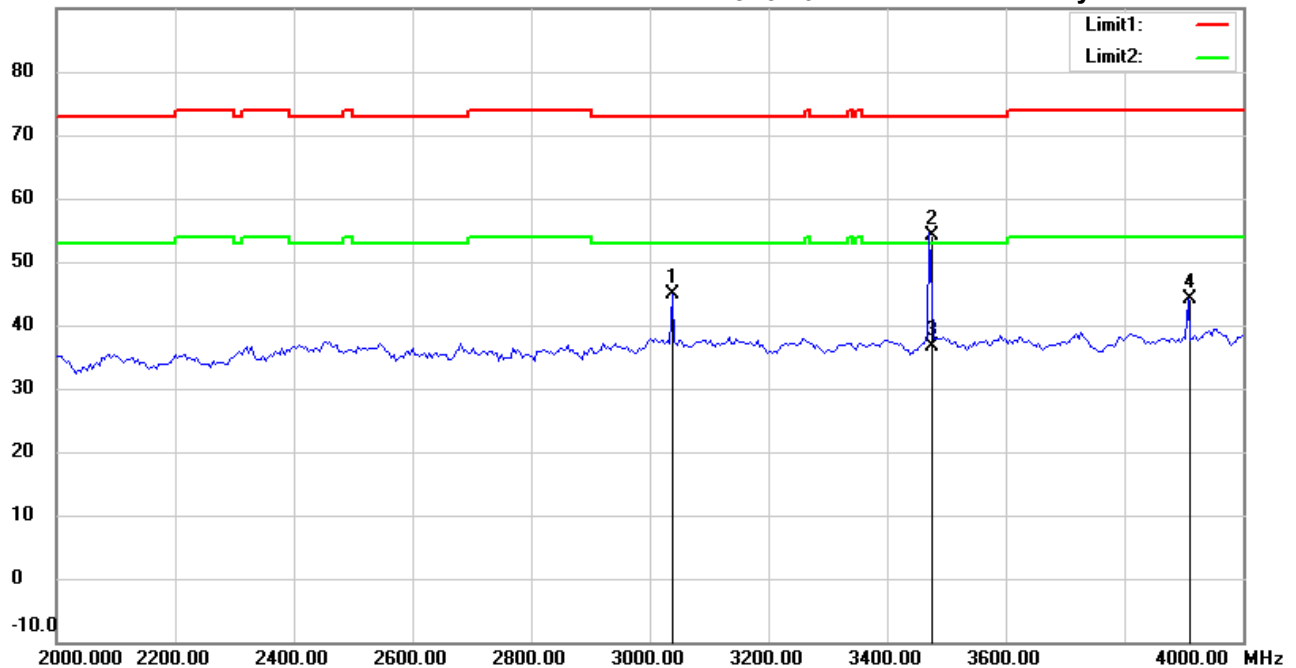

Site : Chamber

Condition : FCC 15.231(433.92MHz) 2000-4000(PK)<e>

Polarization: Vertical

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3038.076	48.70	peak	-3.87	44.83	72.80	150	100	-27.97	
	3471.208	57.68	peak	-3.45	54.23	72.80	165	210	-18.57	
*	3471.208	40.16	AVG	-3.45	36.71	52.80	165	210	-16.09	
	3907.816	46.52	peak	-2.29	44.23	74.00	150	48	-29.77	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 5:17:40 AM

Humidity:49.0 %

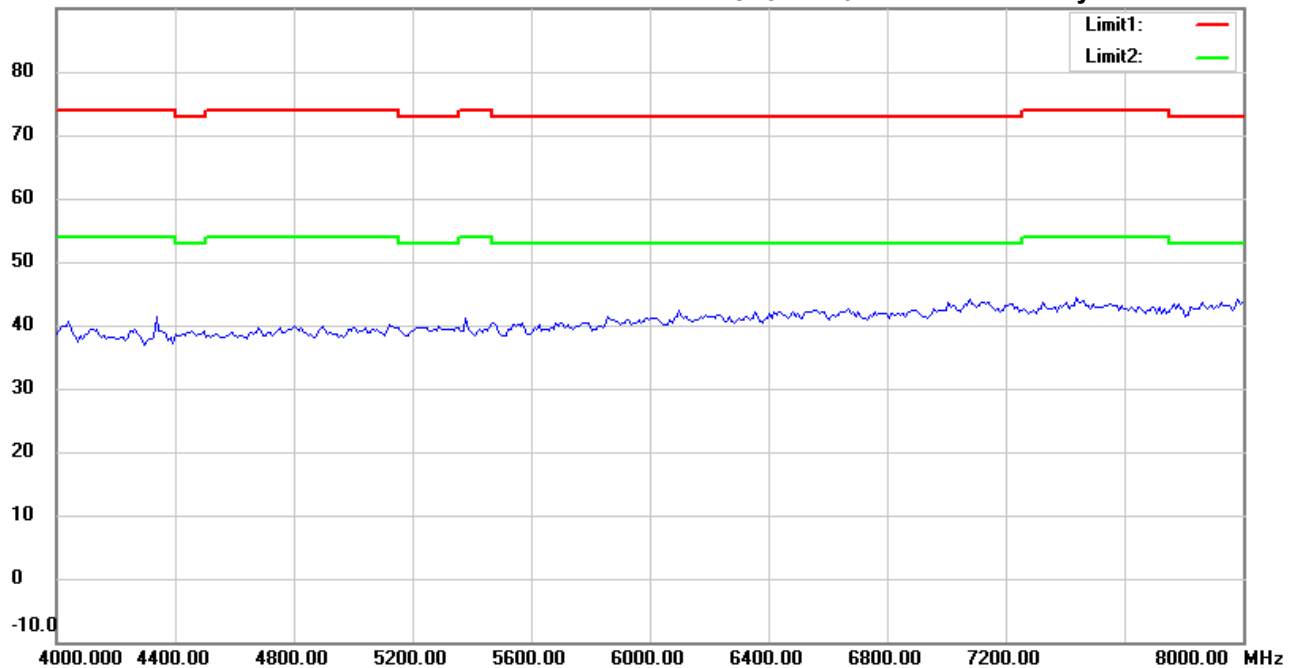

Site : Chamber

Condition : FCC 15.231(433.92MHz) 4000-8000(PK)<e>

Polarization: Horizontal

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 5:20:43 AM

Humidity:49.0 %

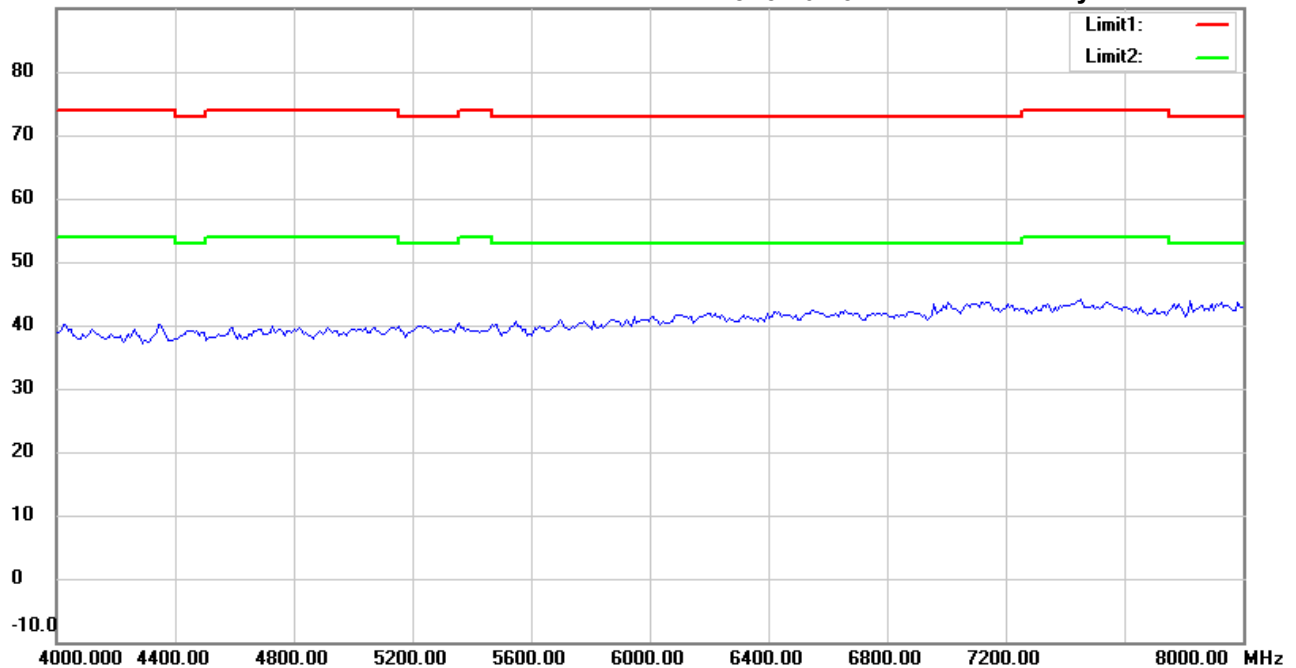

Site : Chamber

Condition : FCC 15.231(433.92MHz) 4000-8000(PK)<e>

Polarization: Vertical

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (ASK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:21:47 AM

Humidity: 49.0 %

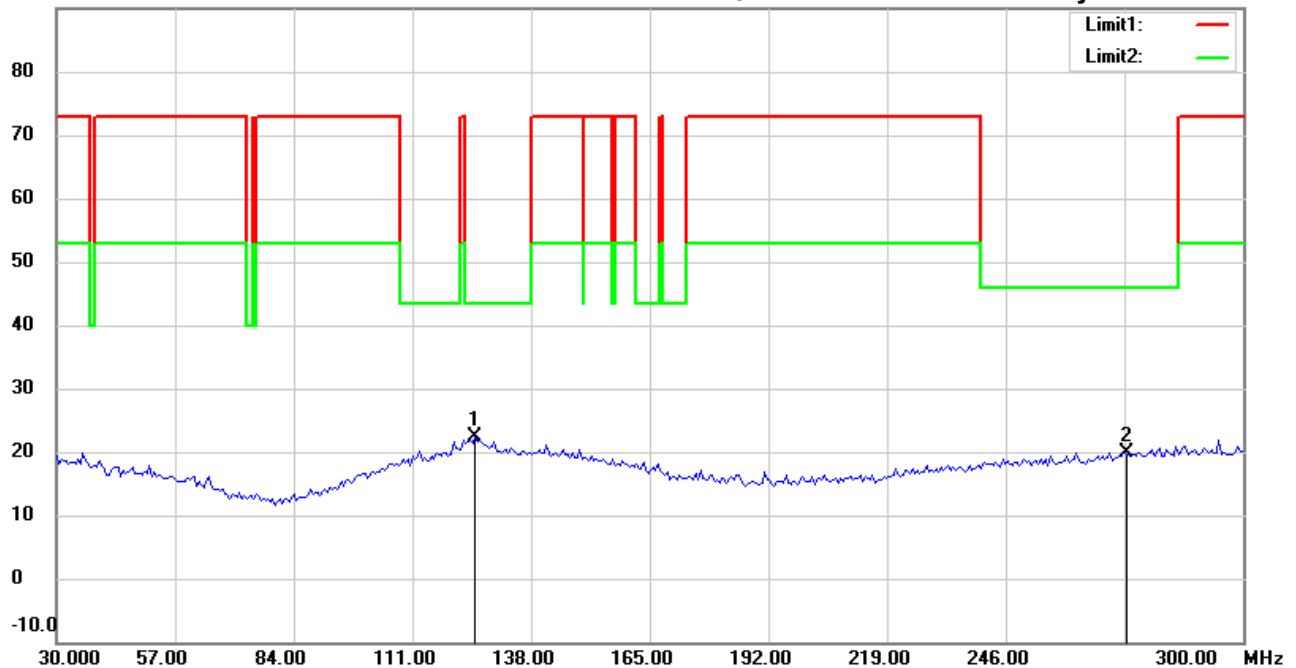

Site : Chamber

Condition : FCC 15.231(433.92MHz) 30-300(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (FSK)

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.2305	29.51	peak	-7.12	22.39	43.50	100	63	-21.11	
	272.9460	26.50	peak	-6.51	19.99	46.00	100	240	-26.01	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:24:45 AM

Humidity: 49.0 %

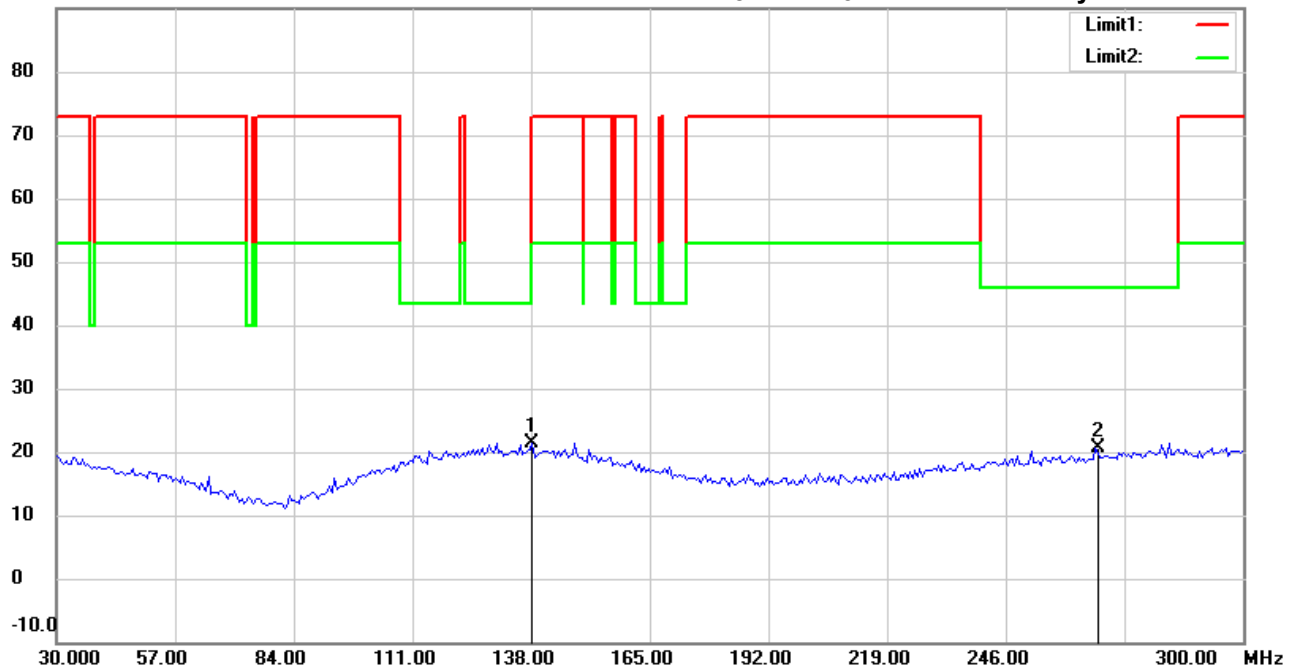

Site : Chamber

Condition : FCC 15.231(433.92MHz) 30-300(PK)<e>

Polarization: Vertical

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	138.2164	28.01	peak	-6.73	21.28	72.80	100	23	-51.52	
*	266.4530	27.44	peak	-6.89	20.55	46.00	100	197	-25.45	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:27:32 AM

Humidity: 49.0 %

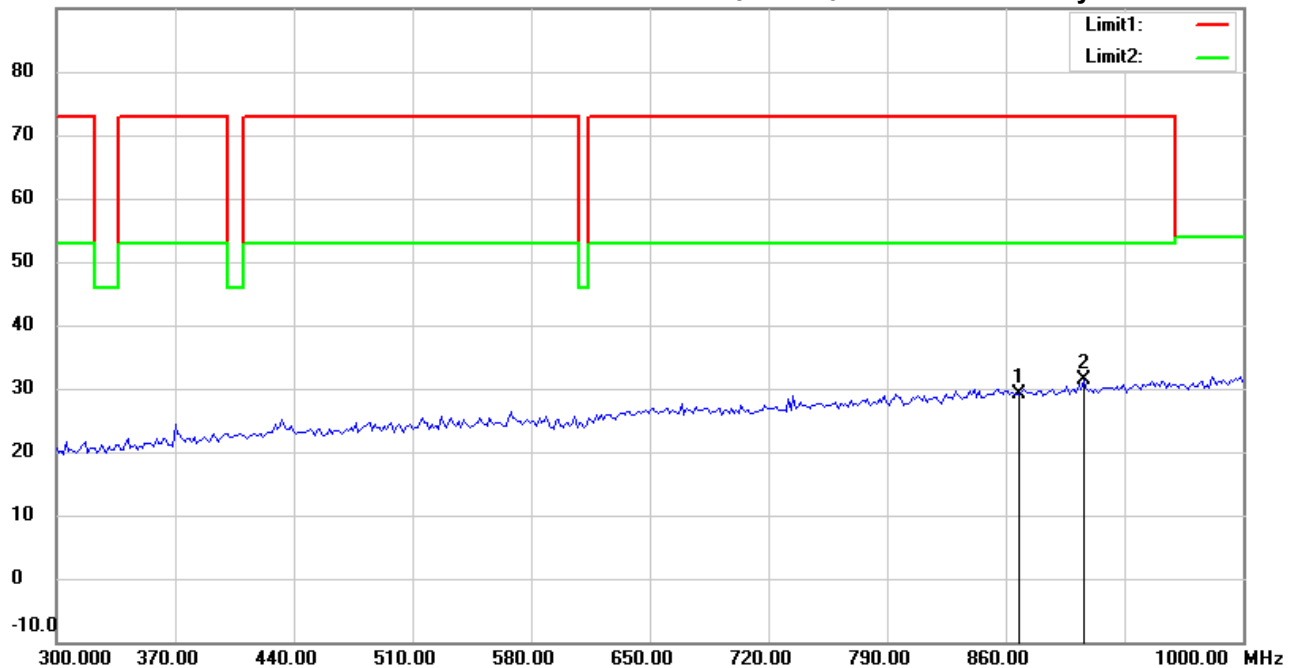

Site : Chamber

Condition : FCC 15.231(433.92MHz) 300-1000(PK)<e>

Polarization: Horizontal

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	867.8400	26.20	peak	3.01	29.21	72.80	100	153	-43.59	
*	906.0120	27.68	peak	3.62	31.30	72.80	100	200	-41.50	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :2

Data :#2


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 4:30:58 AM

Humidity:49.0 %

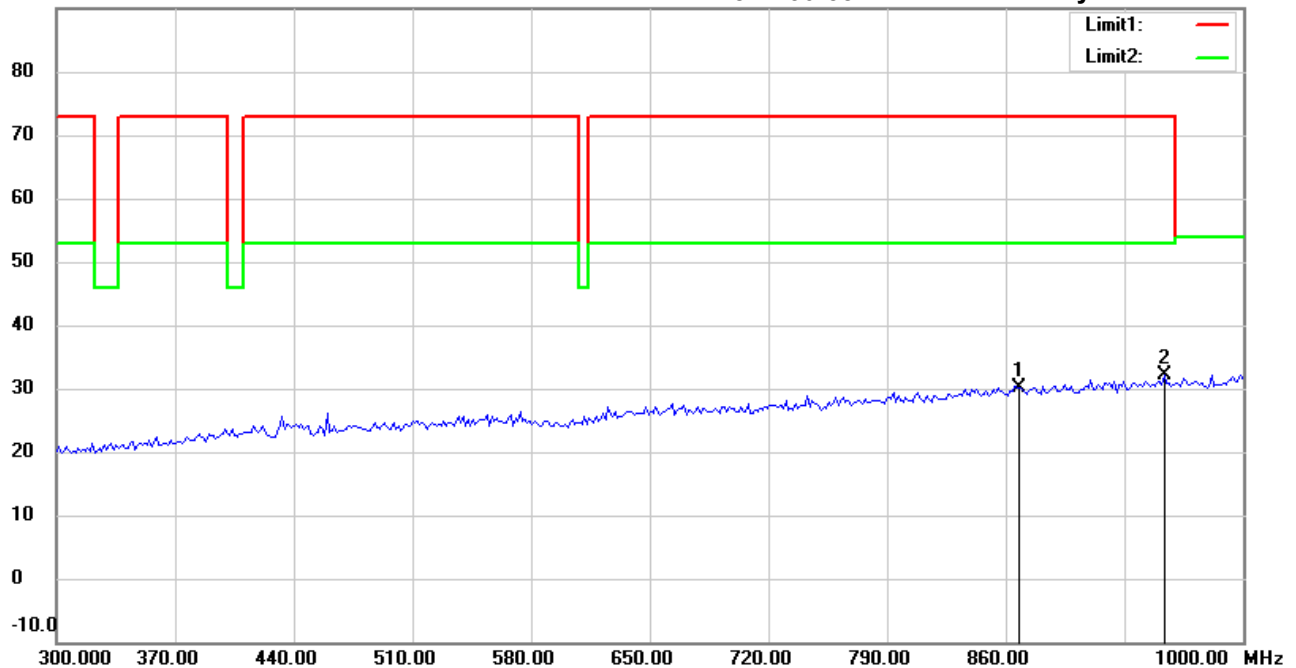

Site : Chamber

Condition : FCC 15.231(433.92MHz) 300-1000(PK)<e>

EUT : W6M22005-19900

M/N:

Test Mode : TX 433.92MHz (FSK)

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	867.8400	27.08	peak	3.01	30.09	72.80	100	322	-42.71	
*	953.7074	27.71	peak	4.47	32.18	72.80	100	230	-40.62	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #1


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:47:19 AM

Humidity: 49.0 %

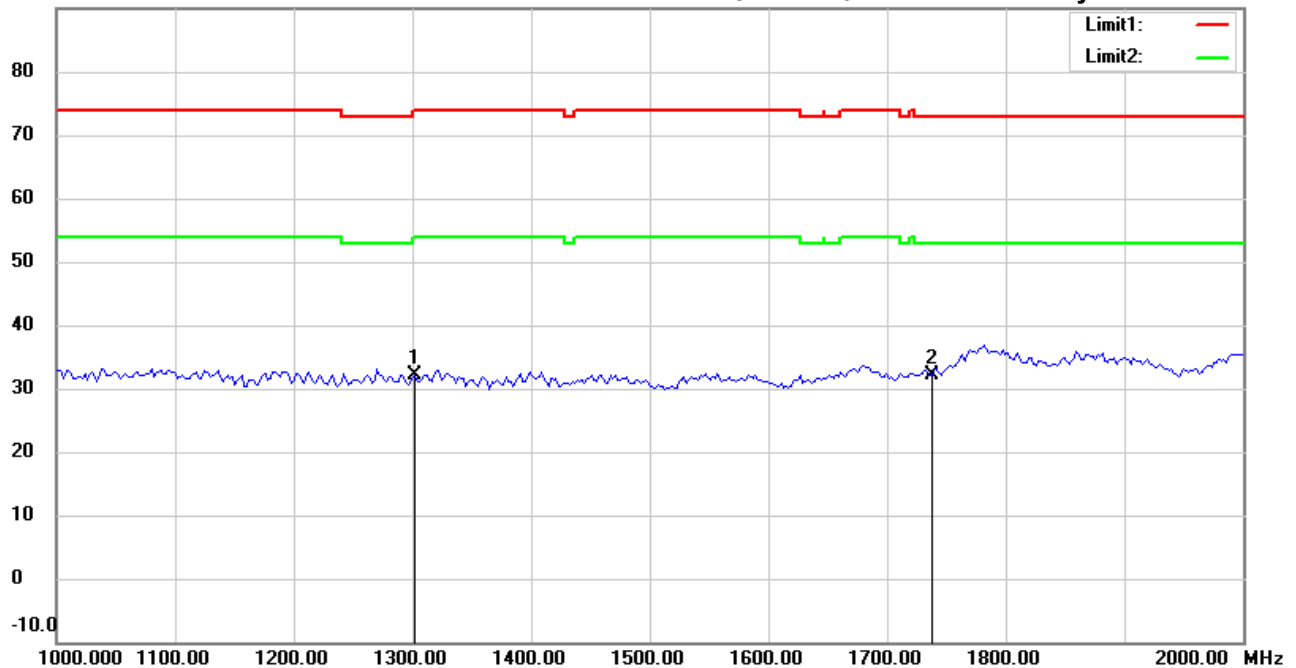

Site : Chamber

Condition : FCC 15.231(433.92MHz) 1000-2000(PK)<e>

Polarization: **Horizontal**

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1301.760	41.62	peak	-9.57	32.05	74.00	150	83	-41.95	
*	1735.680	40.60	peak	-8.38	32.22	72.80	150	146	-40.58	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:52:12 AM

Humidity: 49.0 %

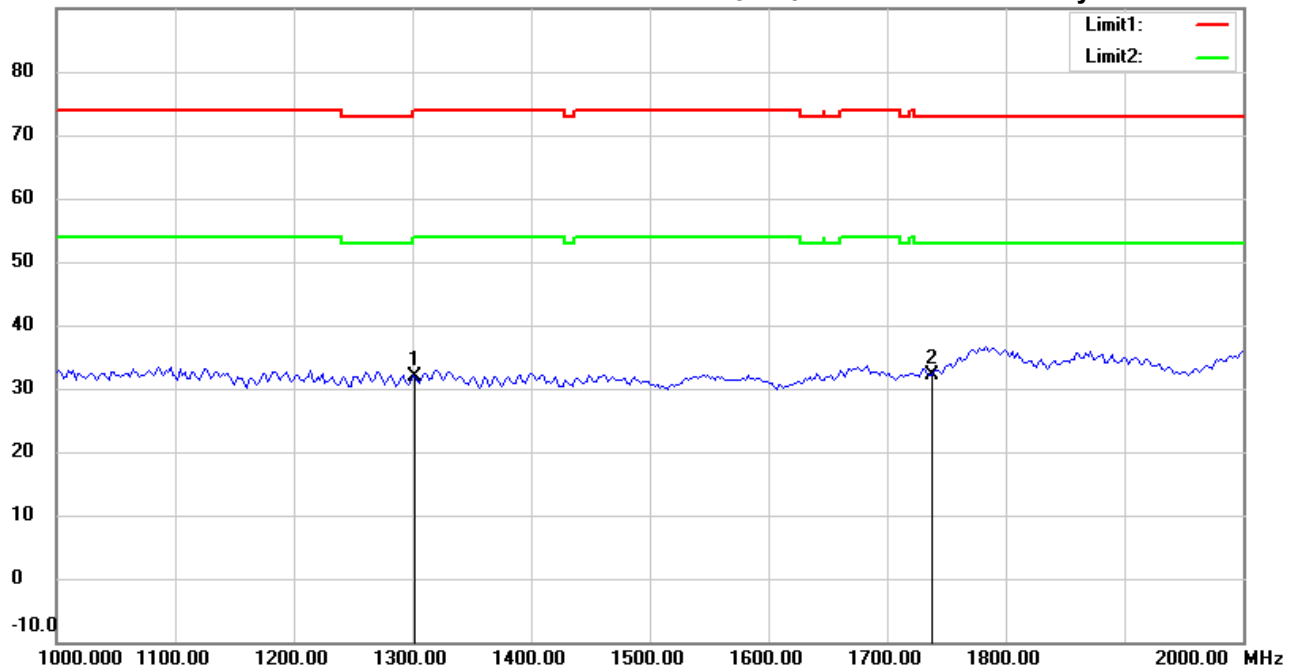

Site : Chamber

Condition : FCC 15.231(433.92MHz) 1000-2000(PK)<e>

Polarization: **Vertical**

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1301.760	41.47	peak	-9.57	31.90	74.00	150	22	-42.10	
*	1735.680	40.60	peak	-8.38	32.22	72.80	150	359	-40.58	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:48:20 AM

Humidity: 49.0 %

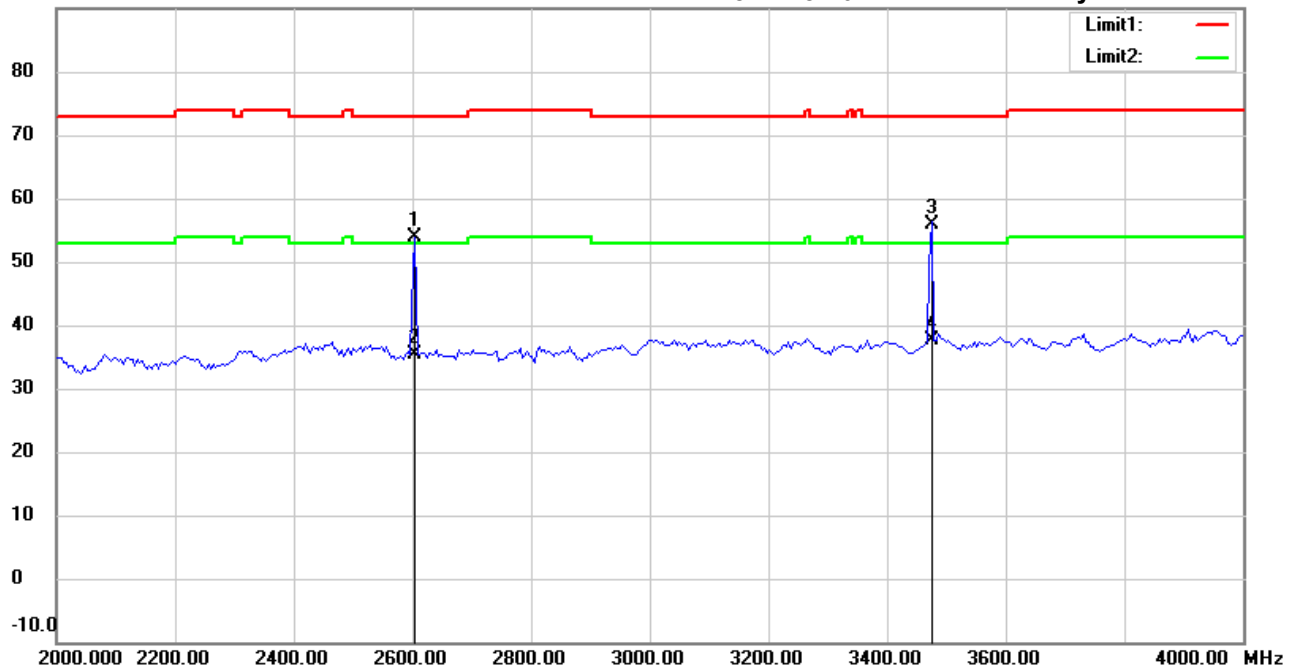

Site : Chamber

Condition : FCC 15.231(433.92MHz) 2000-4000(PK)<e>

Polarization: *Horizontal*

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2603.872	59.31	peak	-5.47	53.84	72.80	150	359	-18.96	
	2603.872	40.91	AVG	-5.47	35.44	52.80	150	359	-17.36	
	3471.618	59.42	peak	-3.45	55.97	72.80	150	10	-16.83	
*	3471.618	41.02	AVG	-3.45	37.57	52.80	150	10	-15.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:53:14 AM

Humidity: 49.0 %

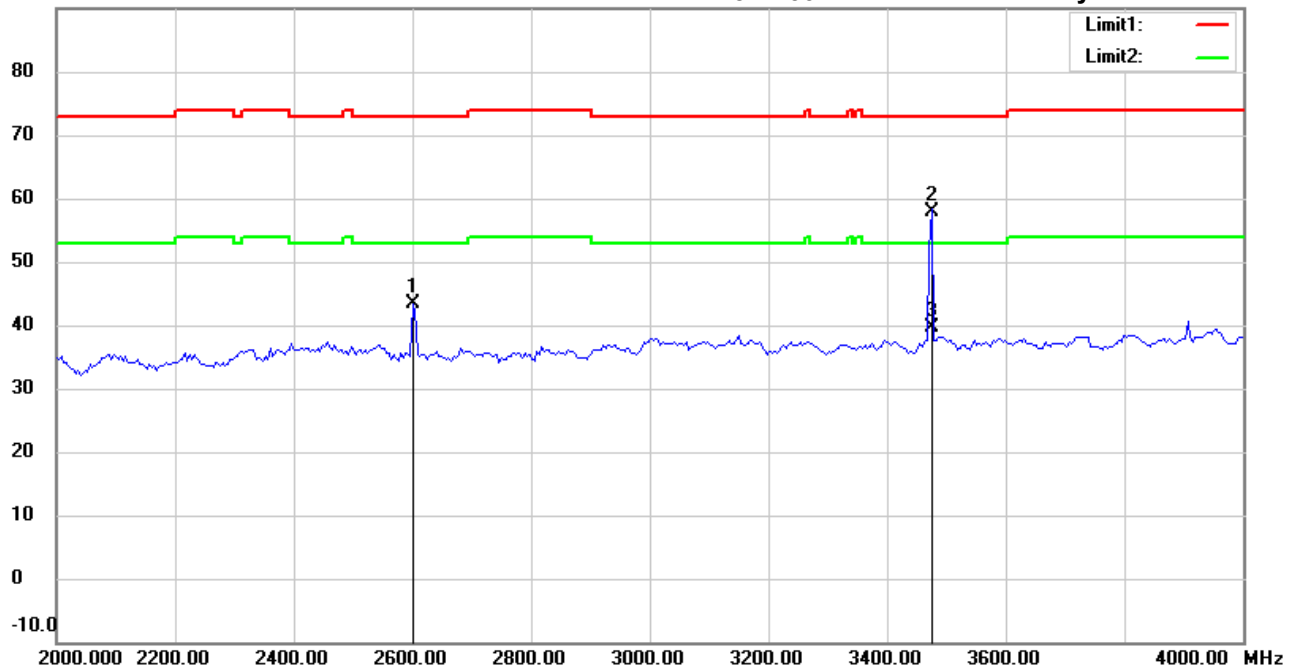

Site : Chamber

Condition : FCC 15.231(433.92MHz) 2000-4000(PK)<e>

Polarization: **Vertical**

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2601.202	48.73	peak	-5.46	43.27	72.80	150	72	-29.53	
	3471.638	61.41	peak	-3.45	57.96	72.80	150	170	-14.84	
*	3471.638	43.01	AVG	-3.45	39.56	52.80	150	170	-13.24	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #3


Date: 6/12/2020

Temperature: 26.6 °C

90.0 dBuV/m

Time: 4:49:22 AM

Humidity: 49.0 %

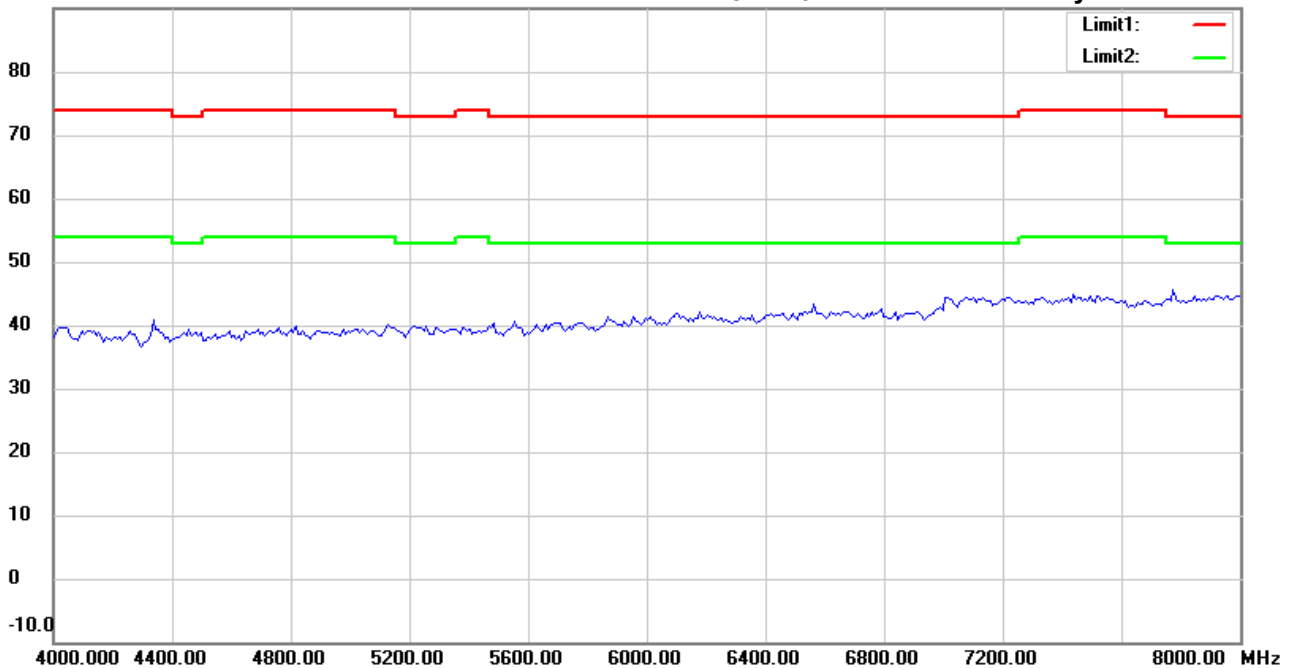

Site : Chamber

Condition : FCC 15.231(433.92MHz) 4000-8000(PK)<e>

Polarization: Horizontal

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 6/12/2020

Temperature:26.6 °C

90.0 dBuV/m

Time: 4:54:15 AM

Humidity:49.0 %

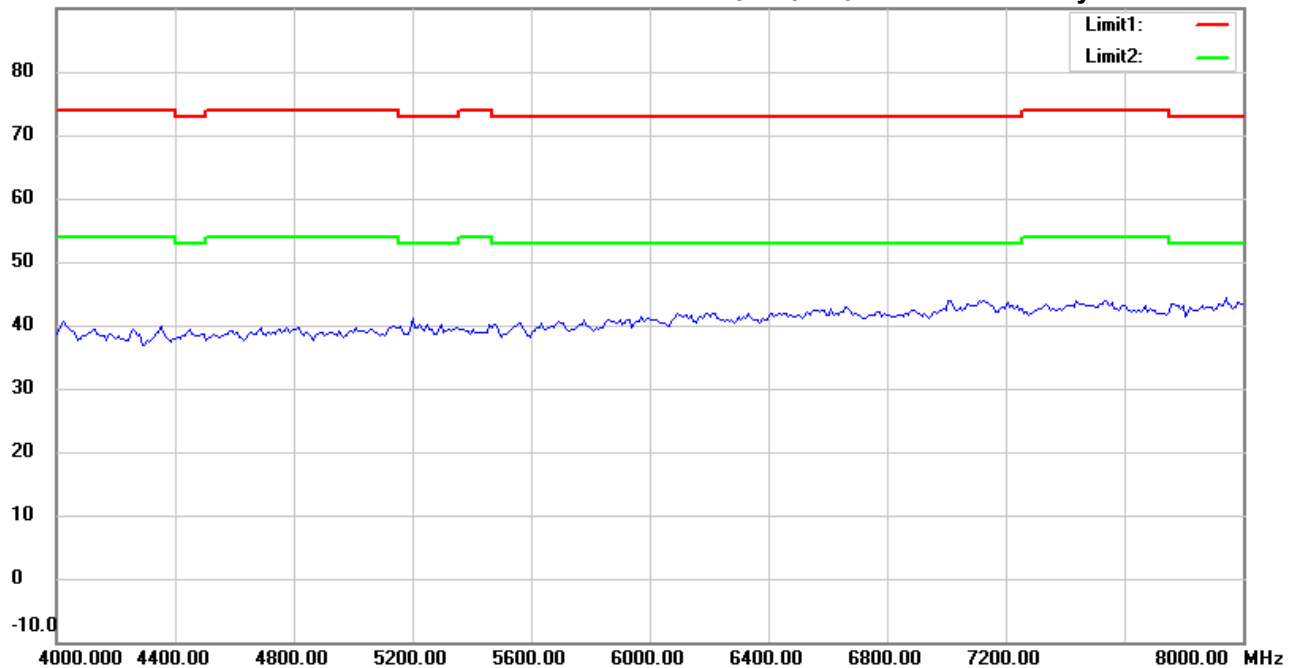

Site : Chamber

Condition : FCC 15.231(433.92MHz) 4000-8000(PK)<e>

Polarization: Vertical

EUT : W6M22005-19900

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz (FSK)

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin