






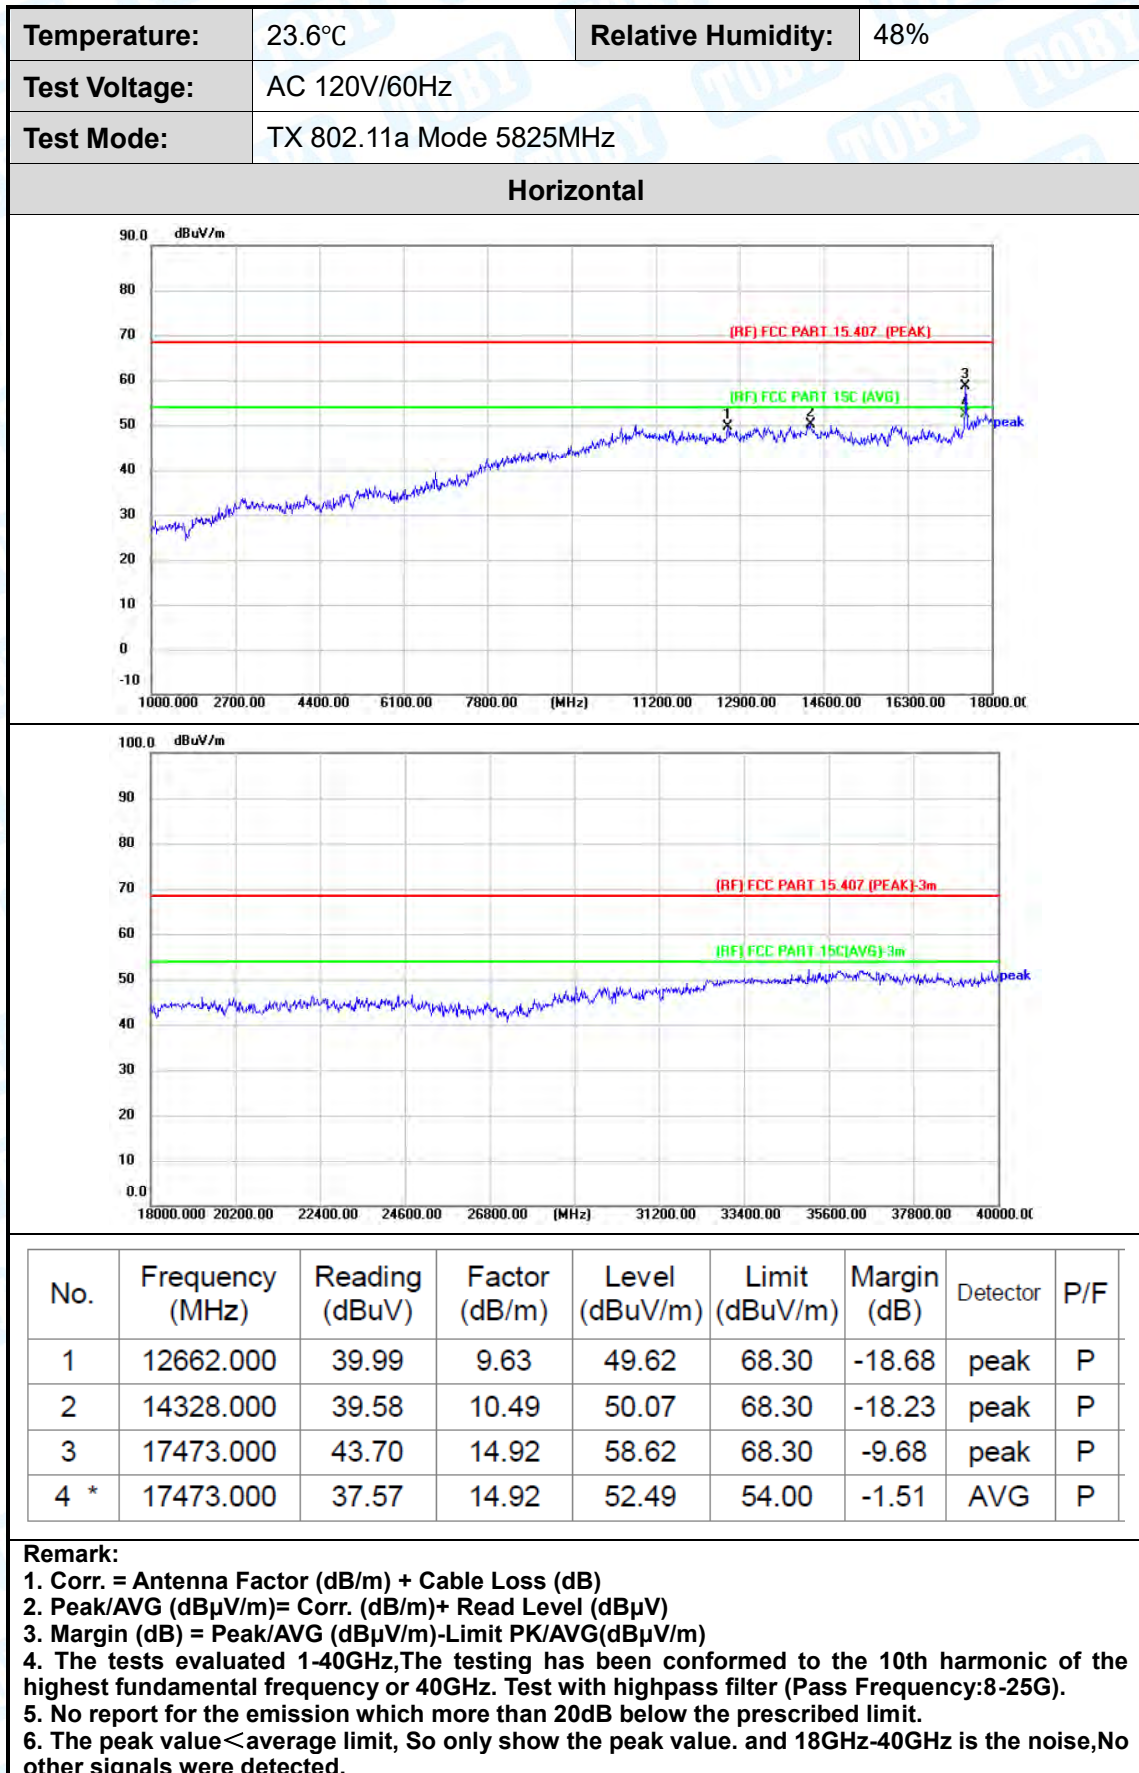


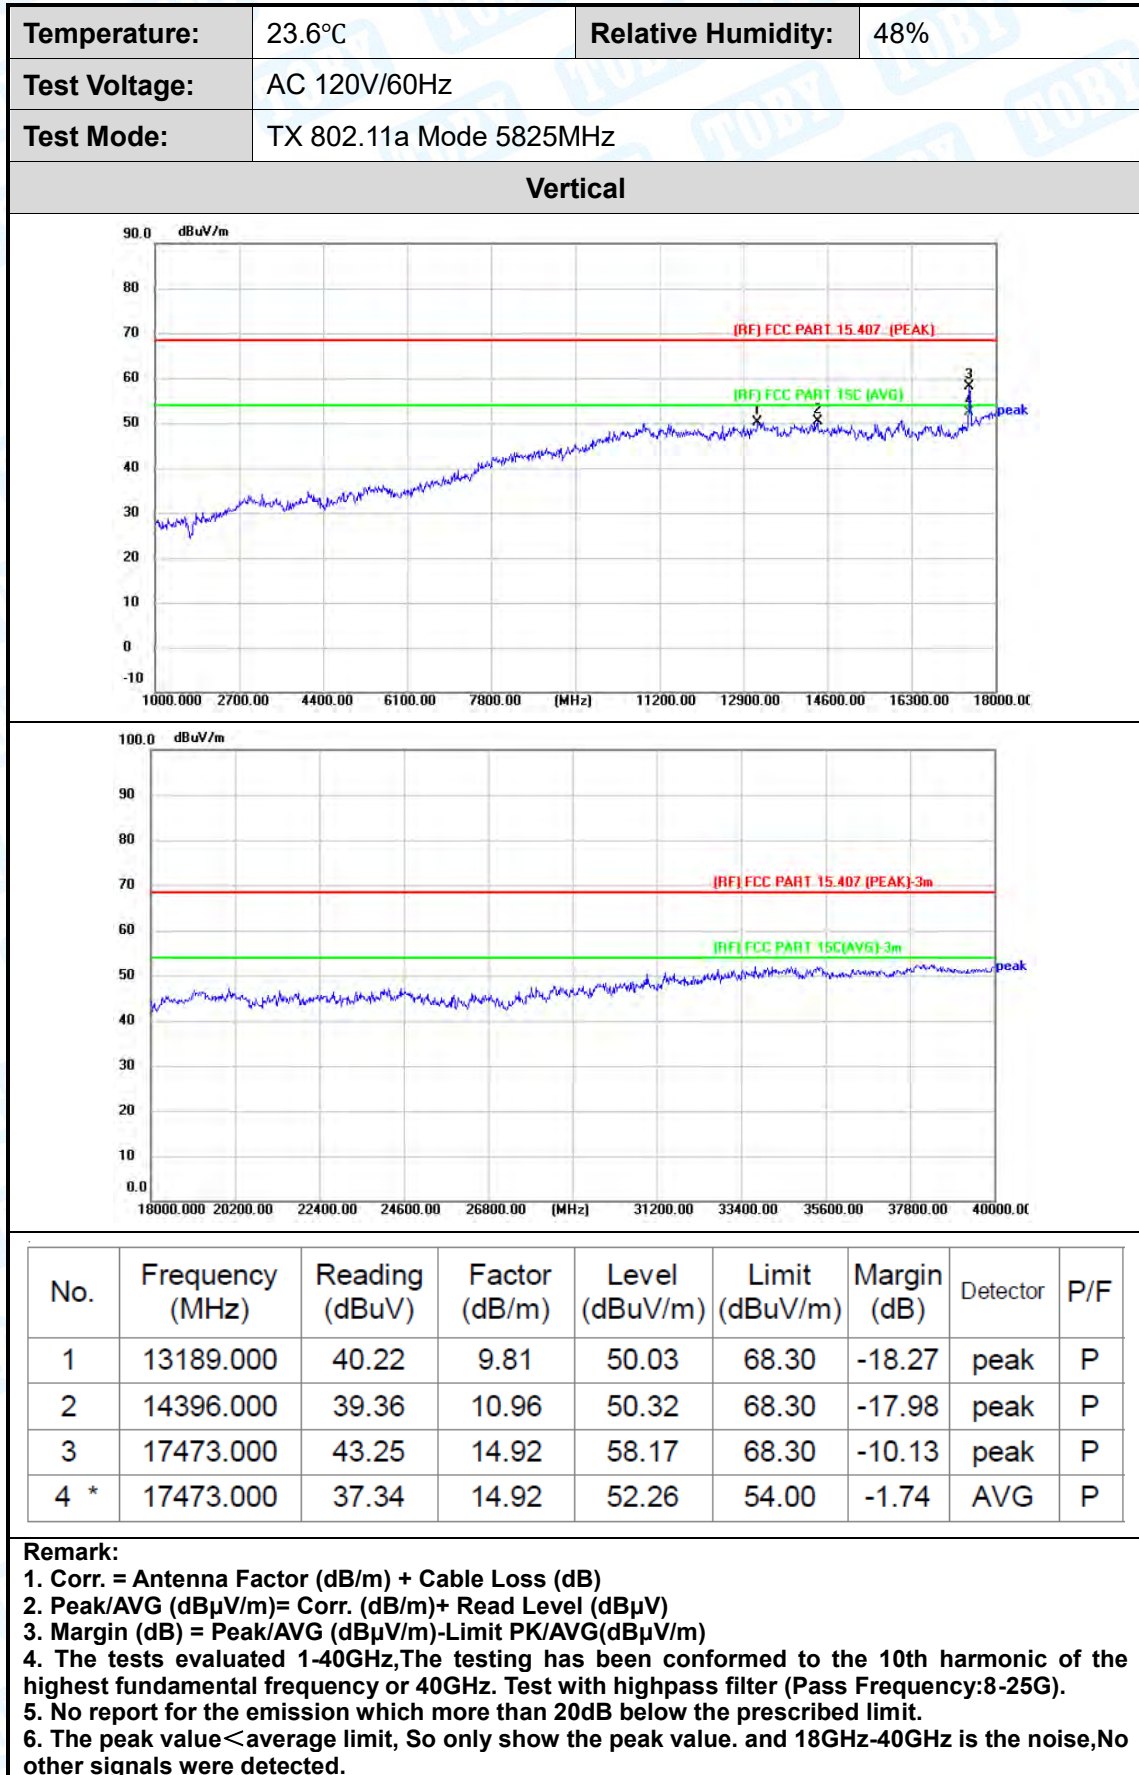


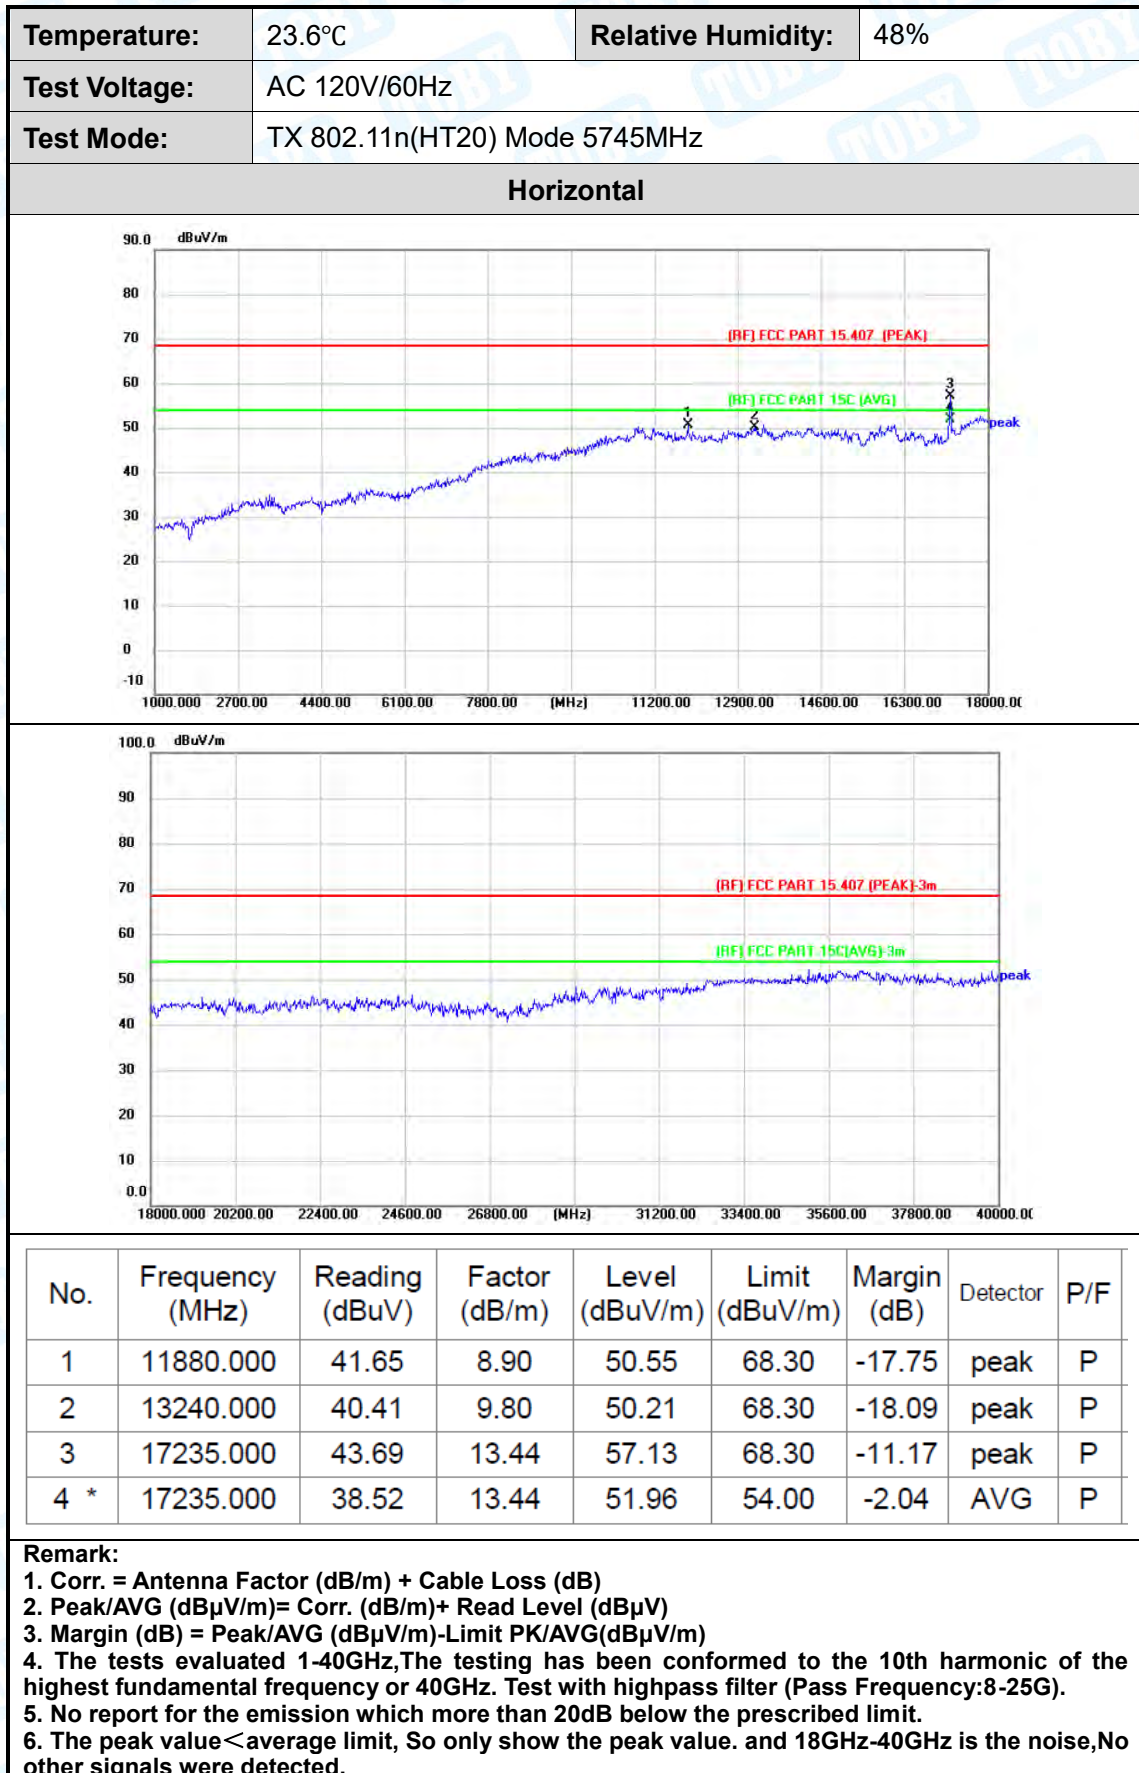


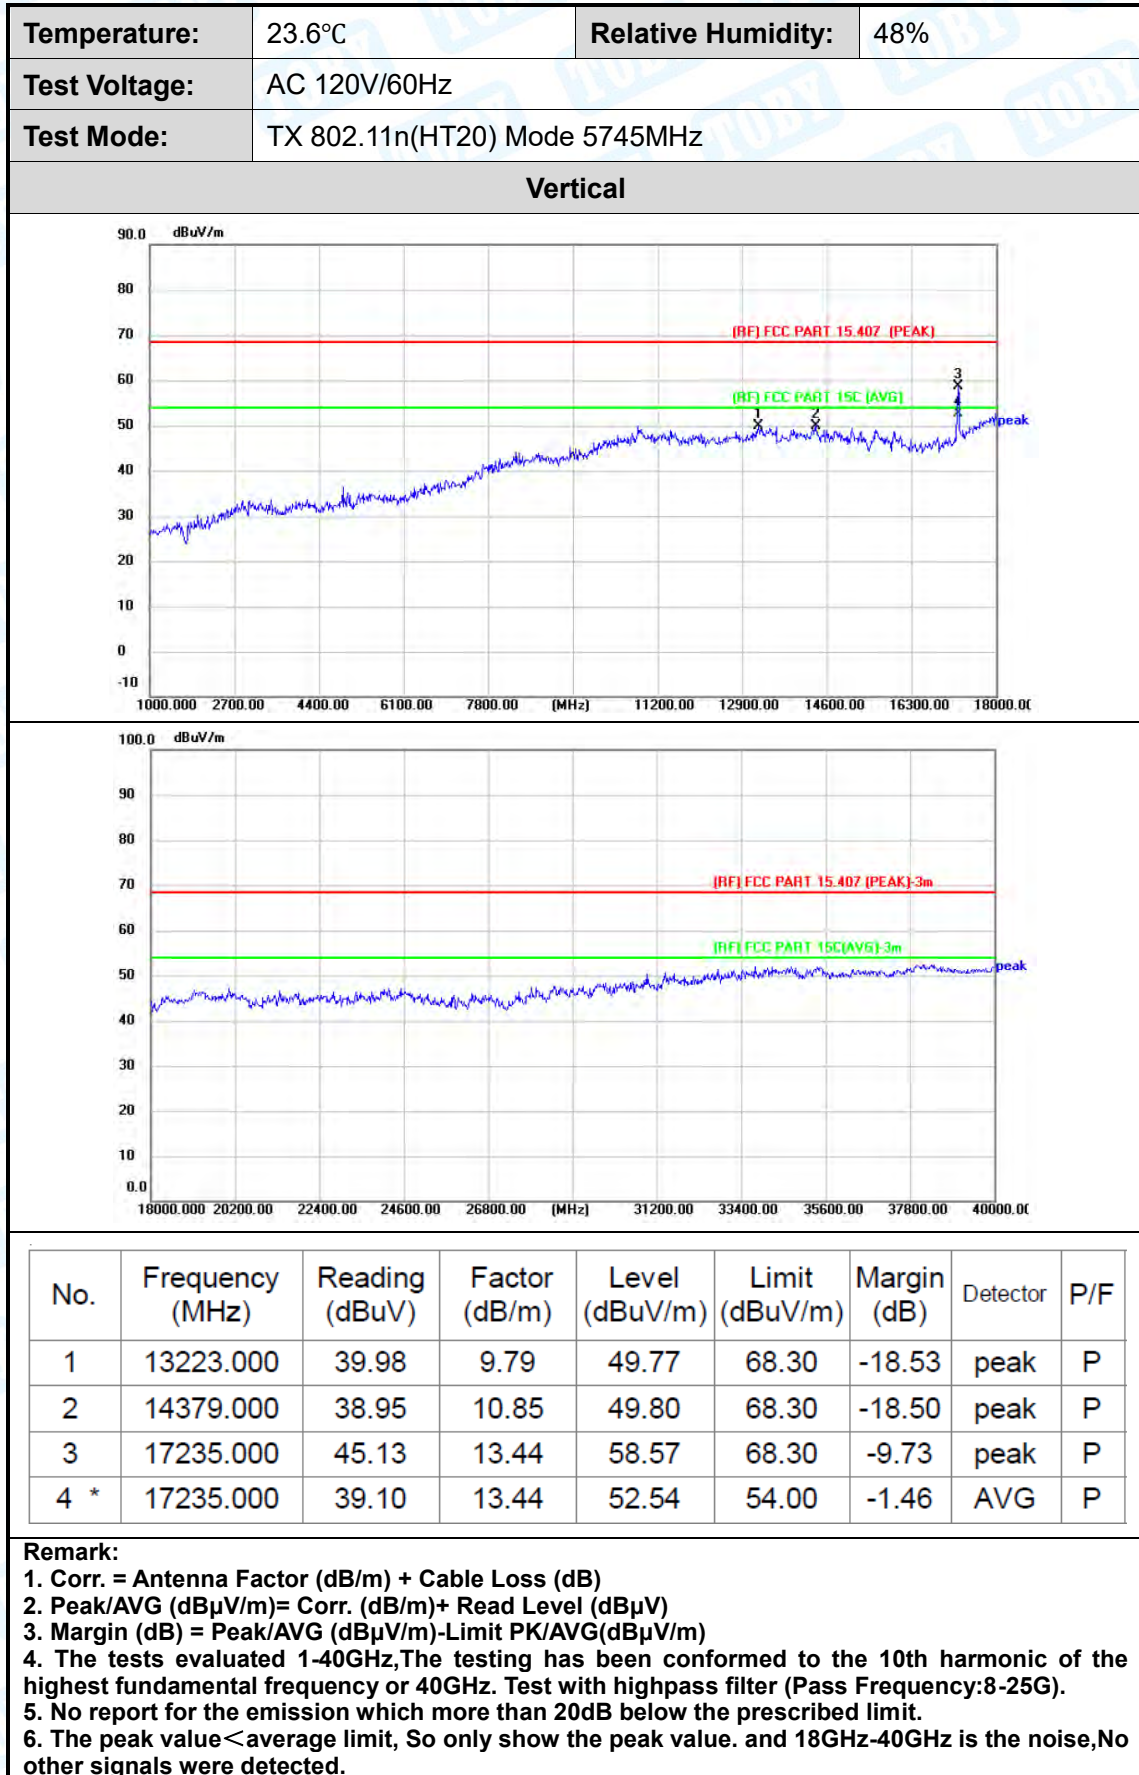


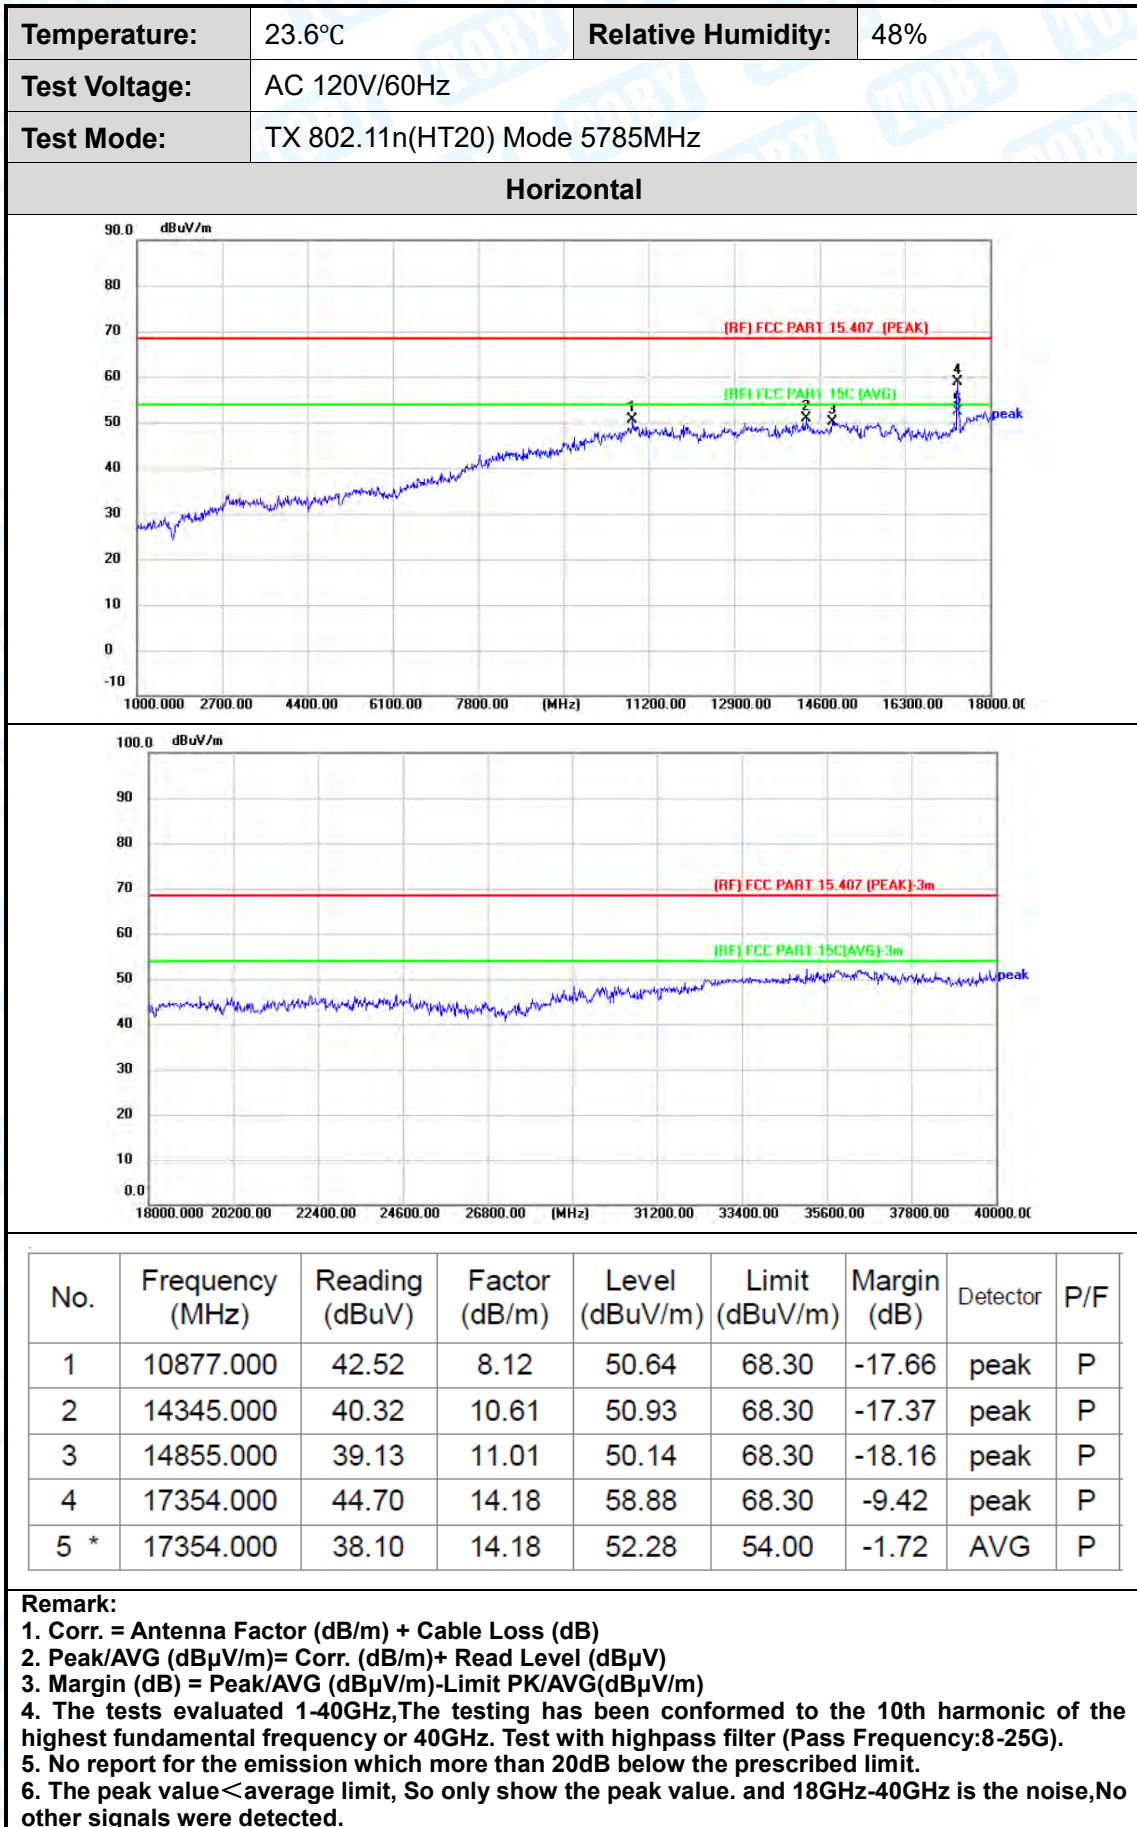



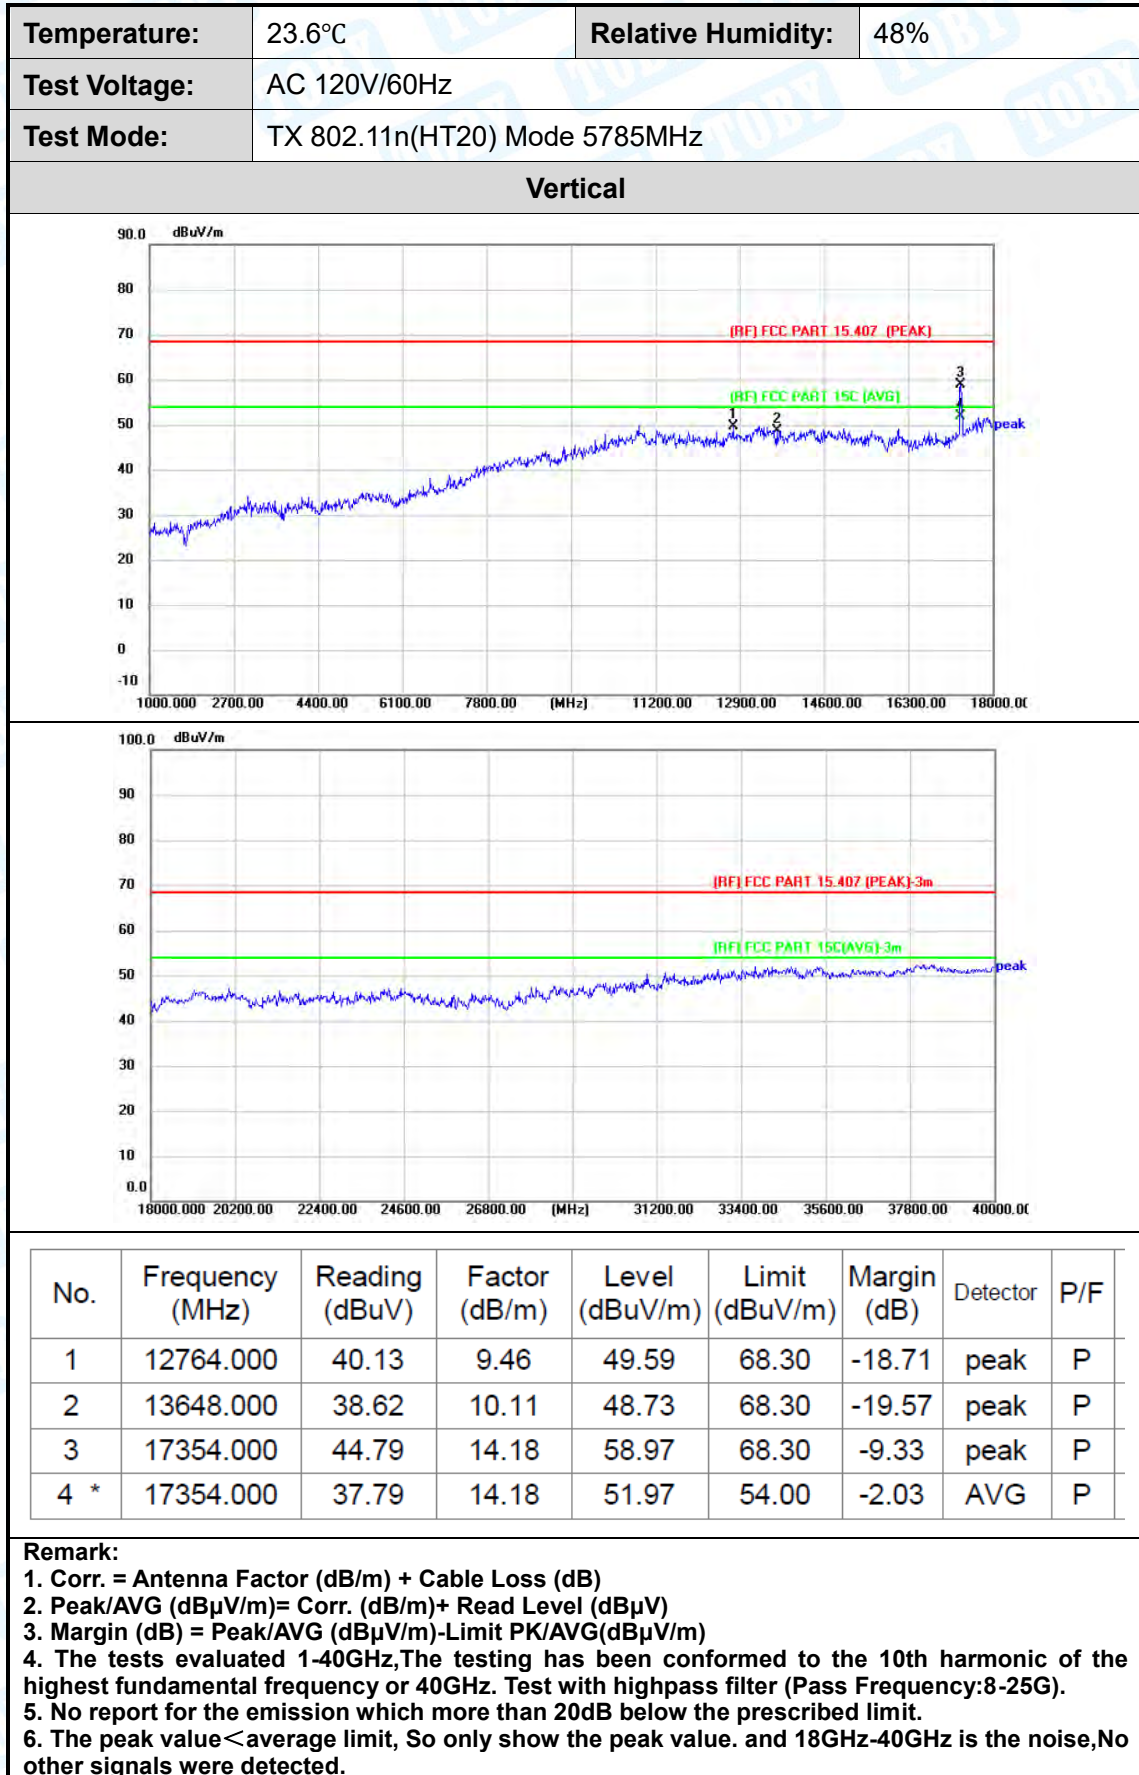


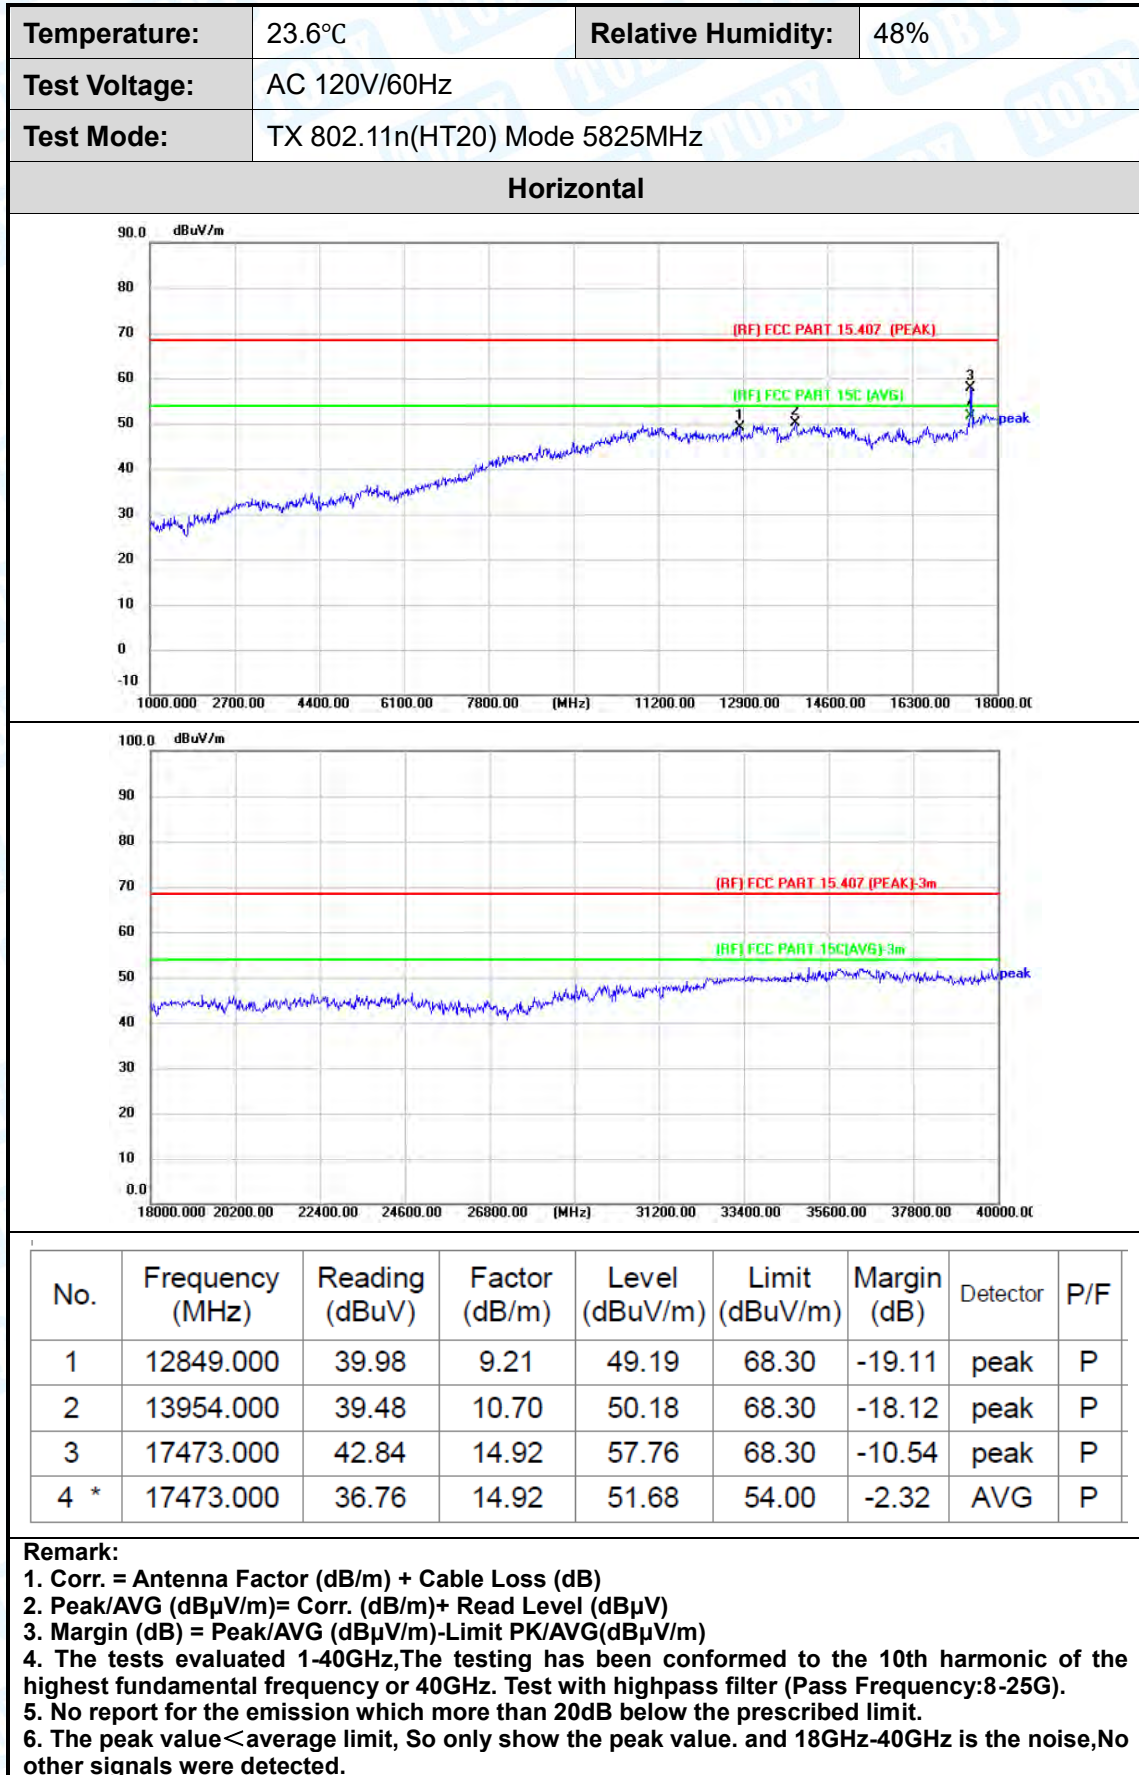

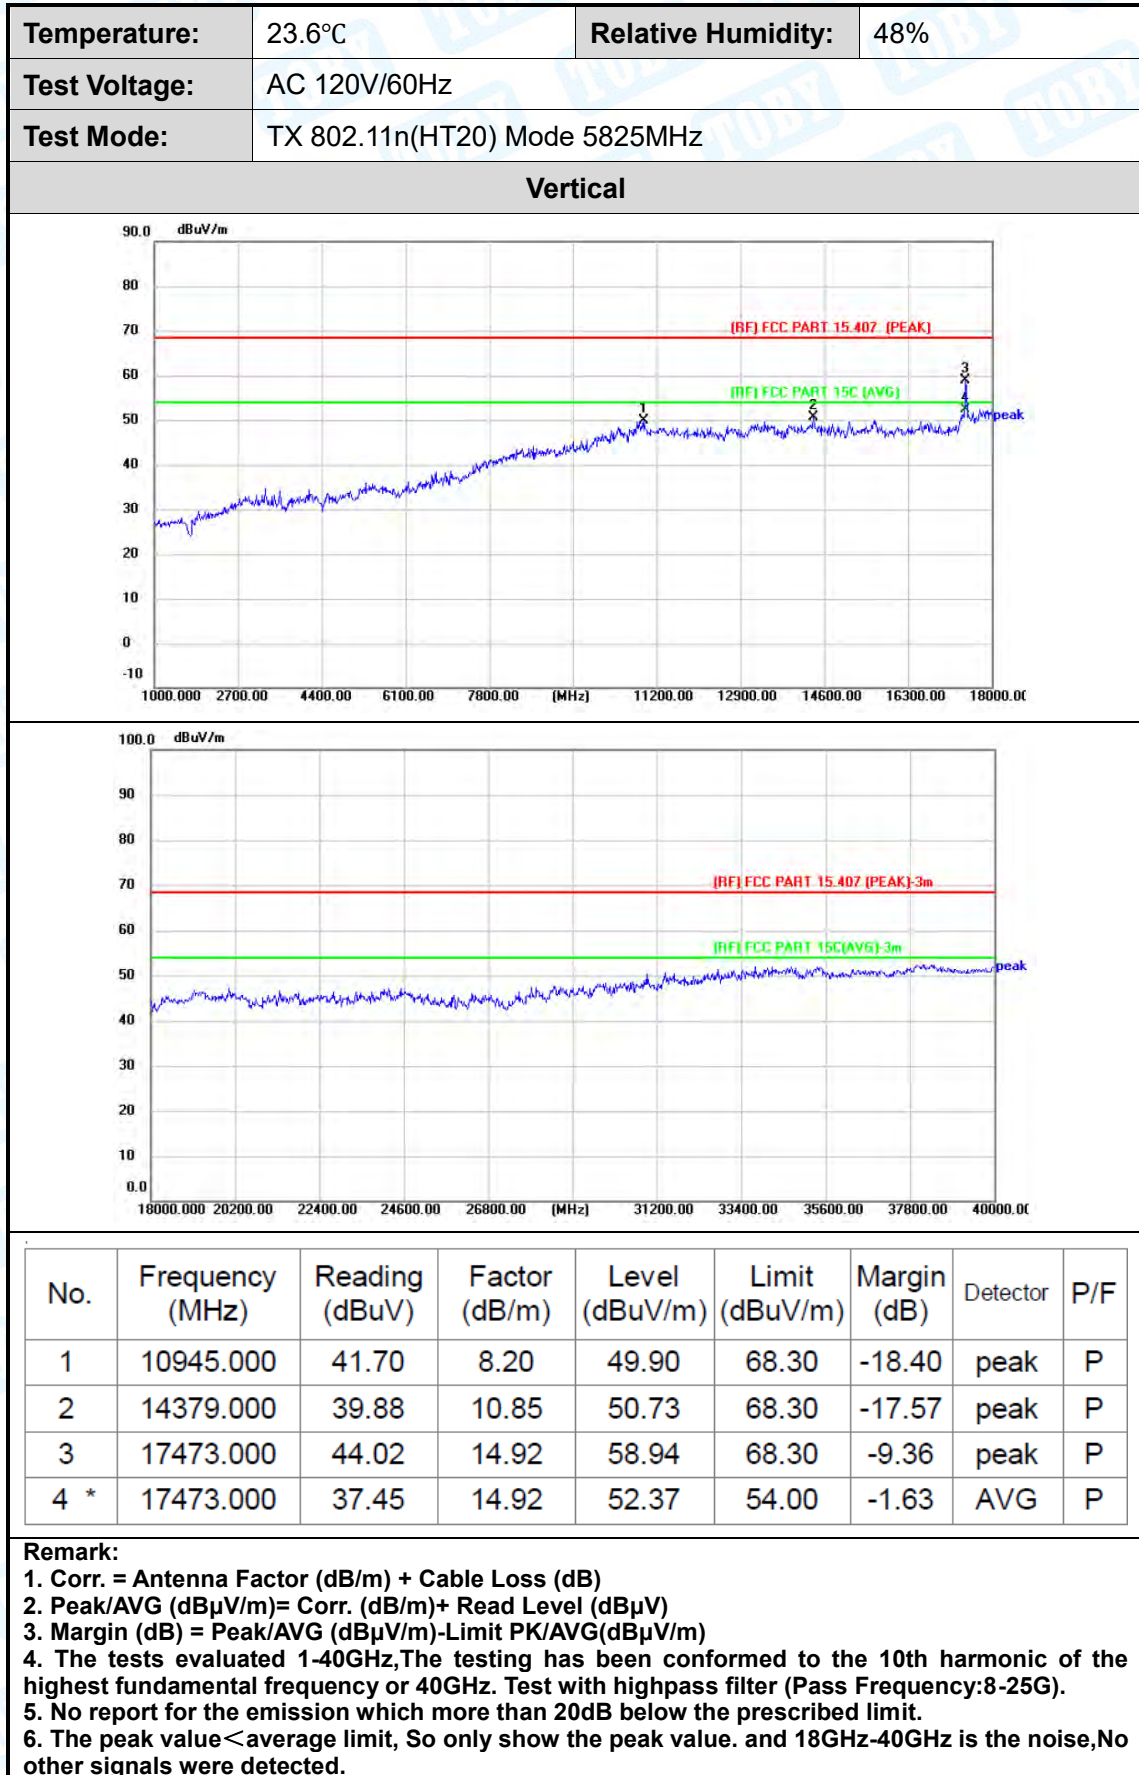


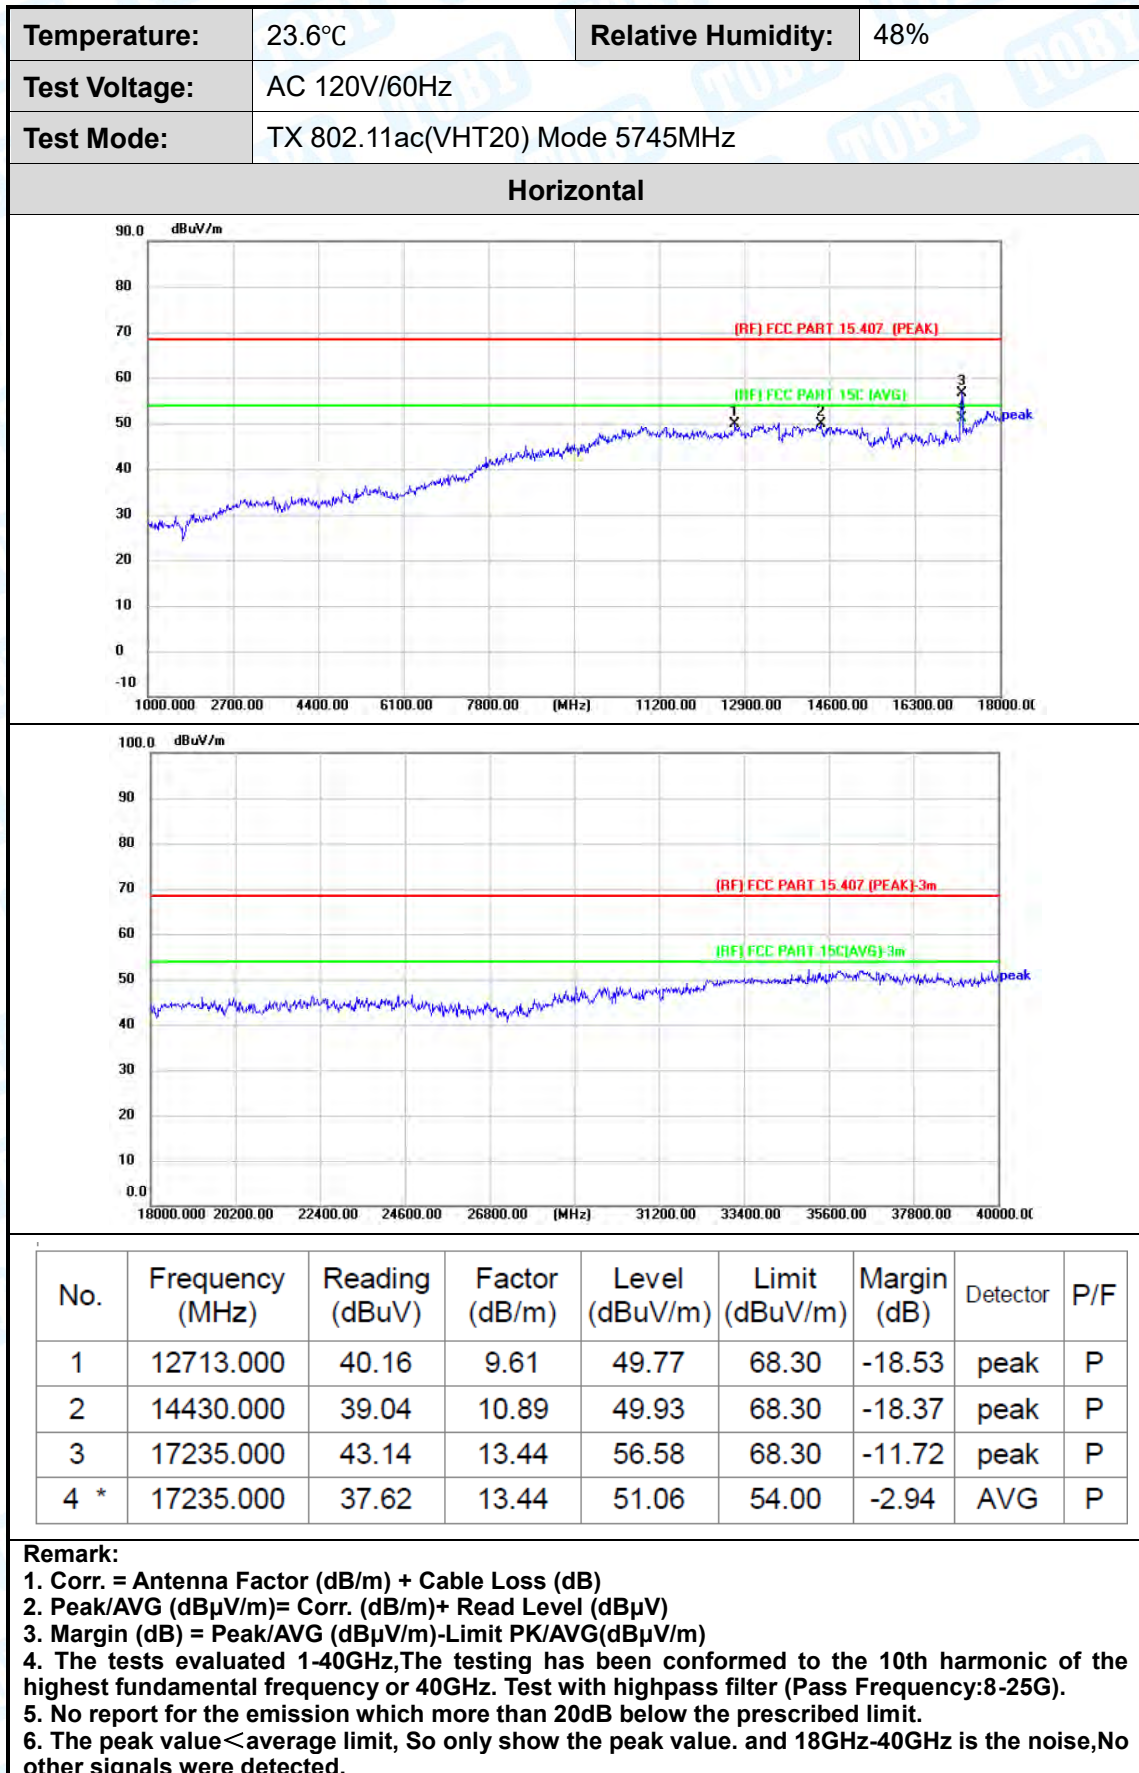


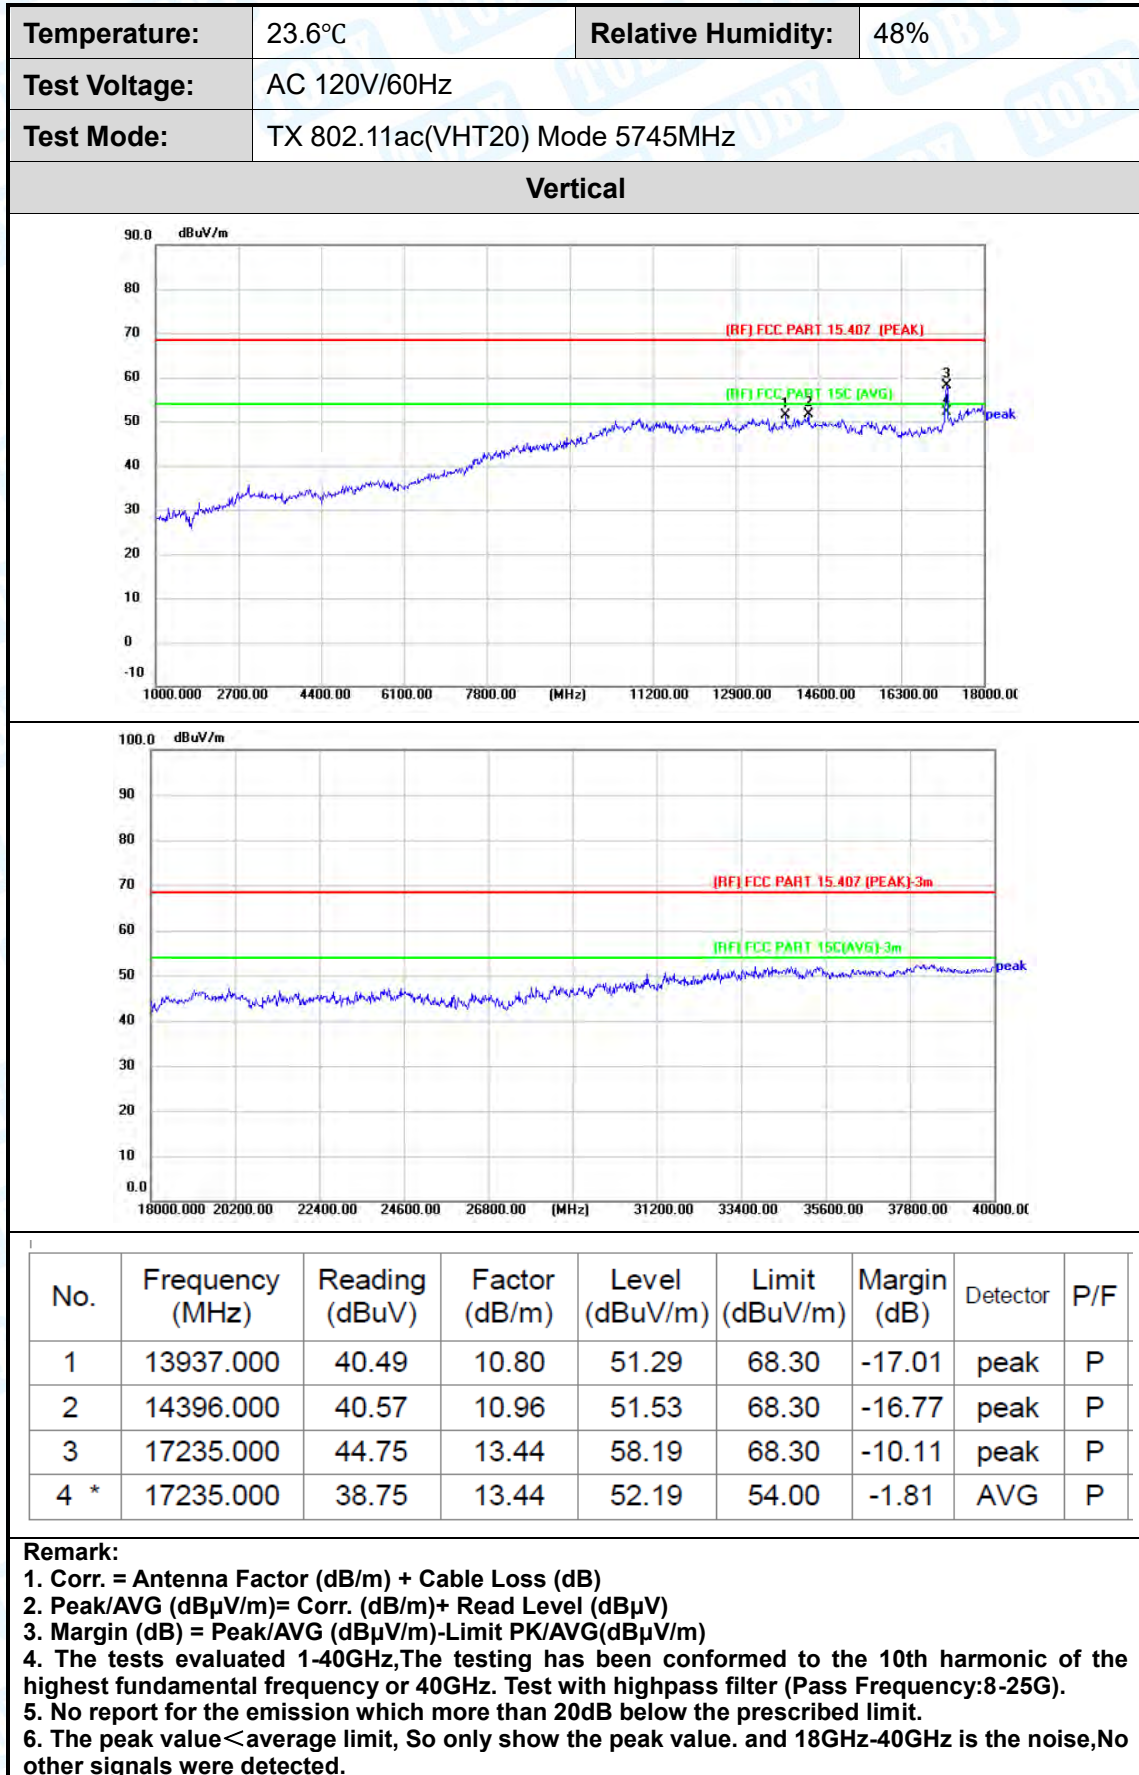


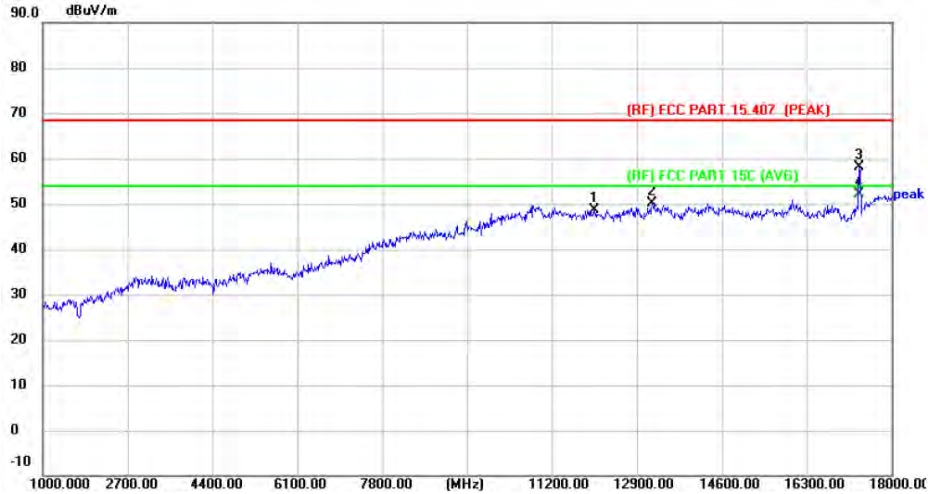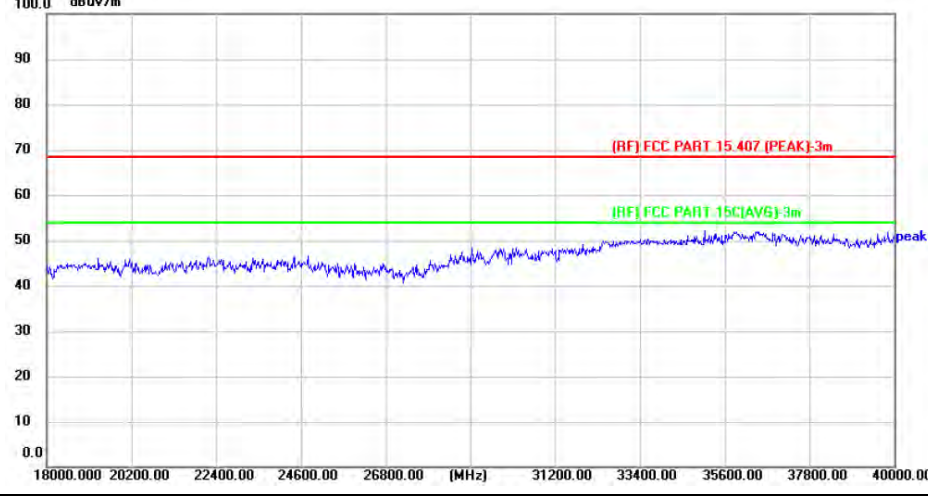
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12050.000	39.42	9.29	48.71	68.30	-19.59	peak	P
2	13206.000	40.44	9.80	50.24	68.30	-18.06	peak	P
3	17354.000	43.93	14.18	58.11	68.30	-10.19	peak	P
4 *	17354.000	37.91	14.18	52.09	54.00	-1.91	AVG	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								




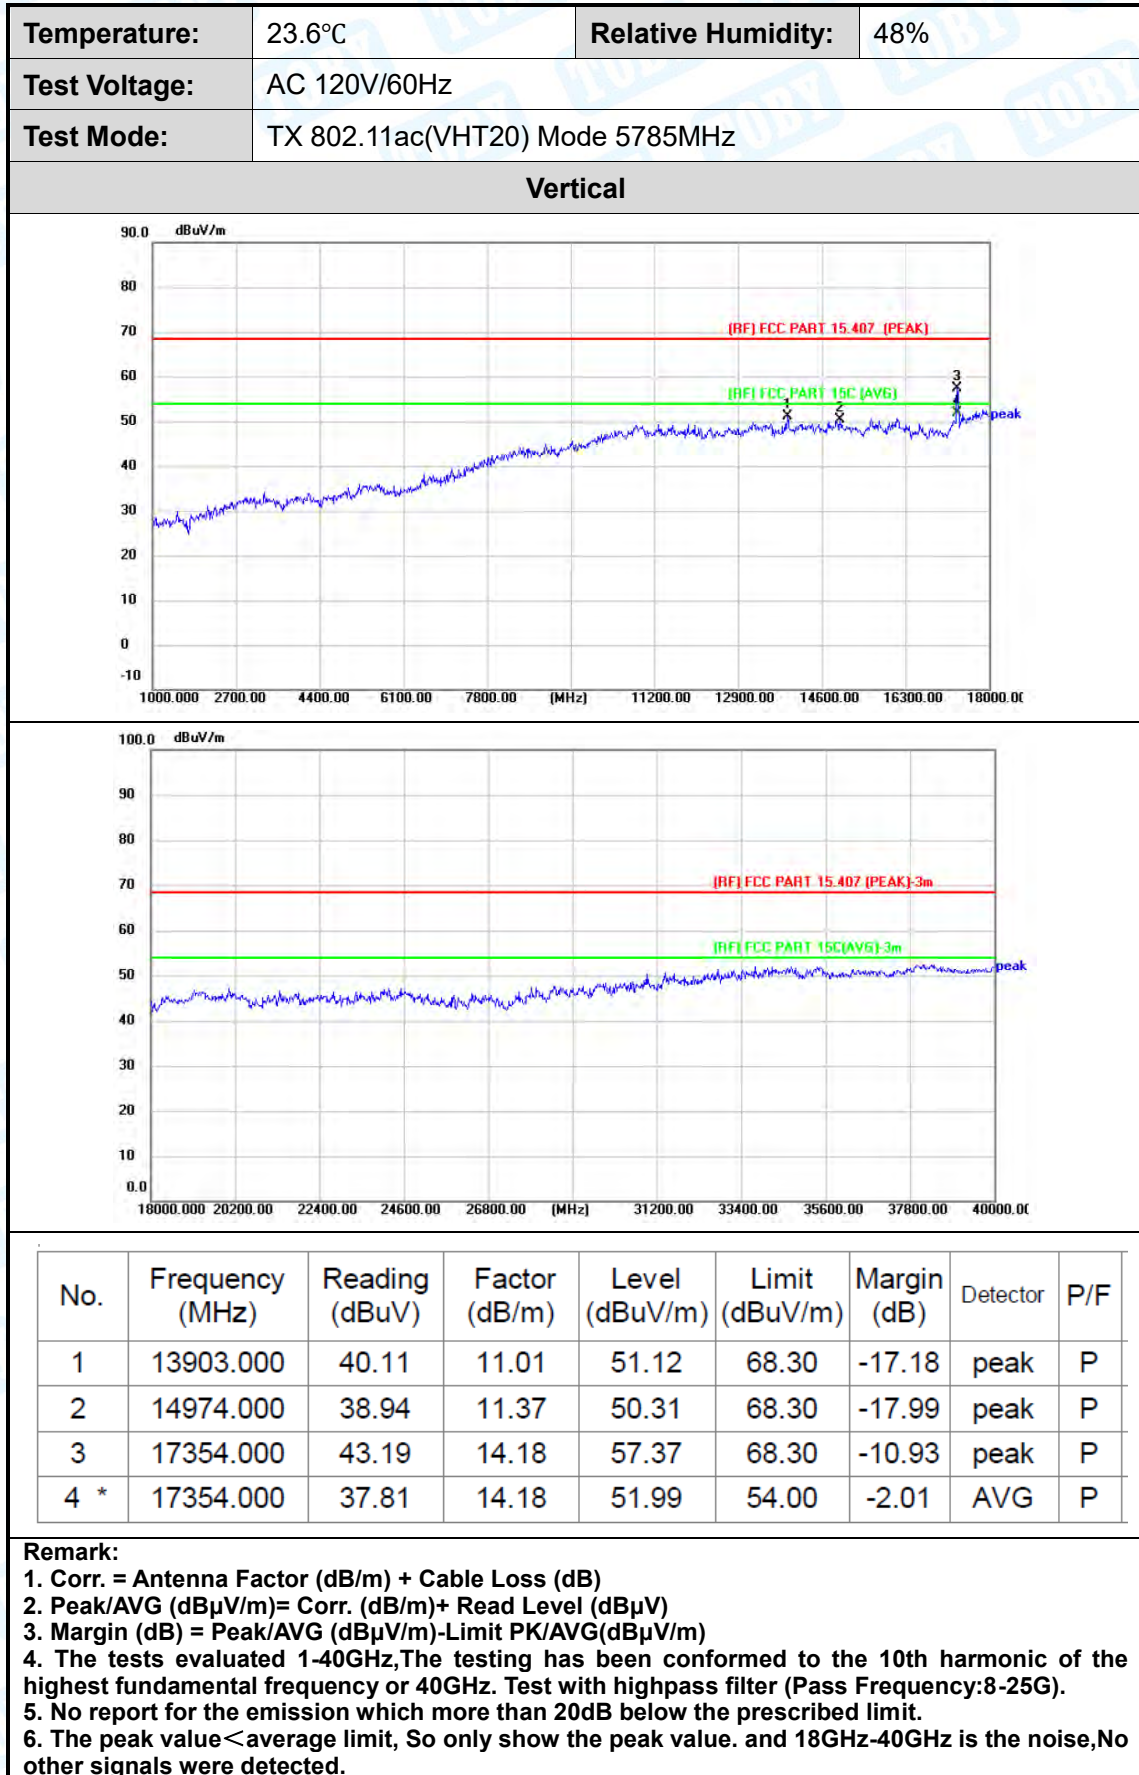


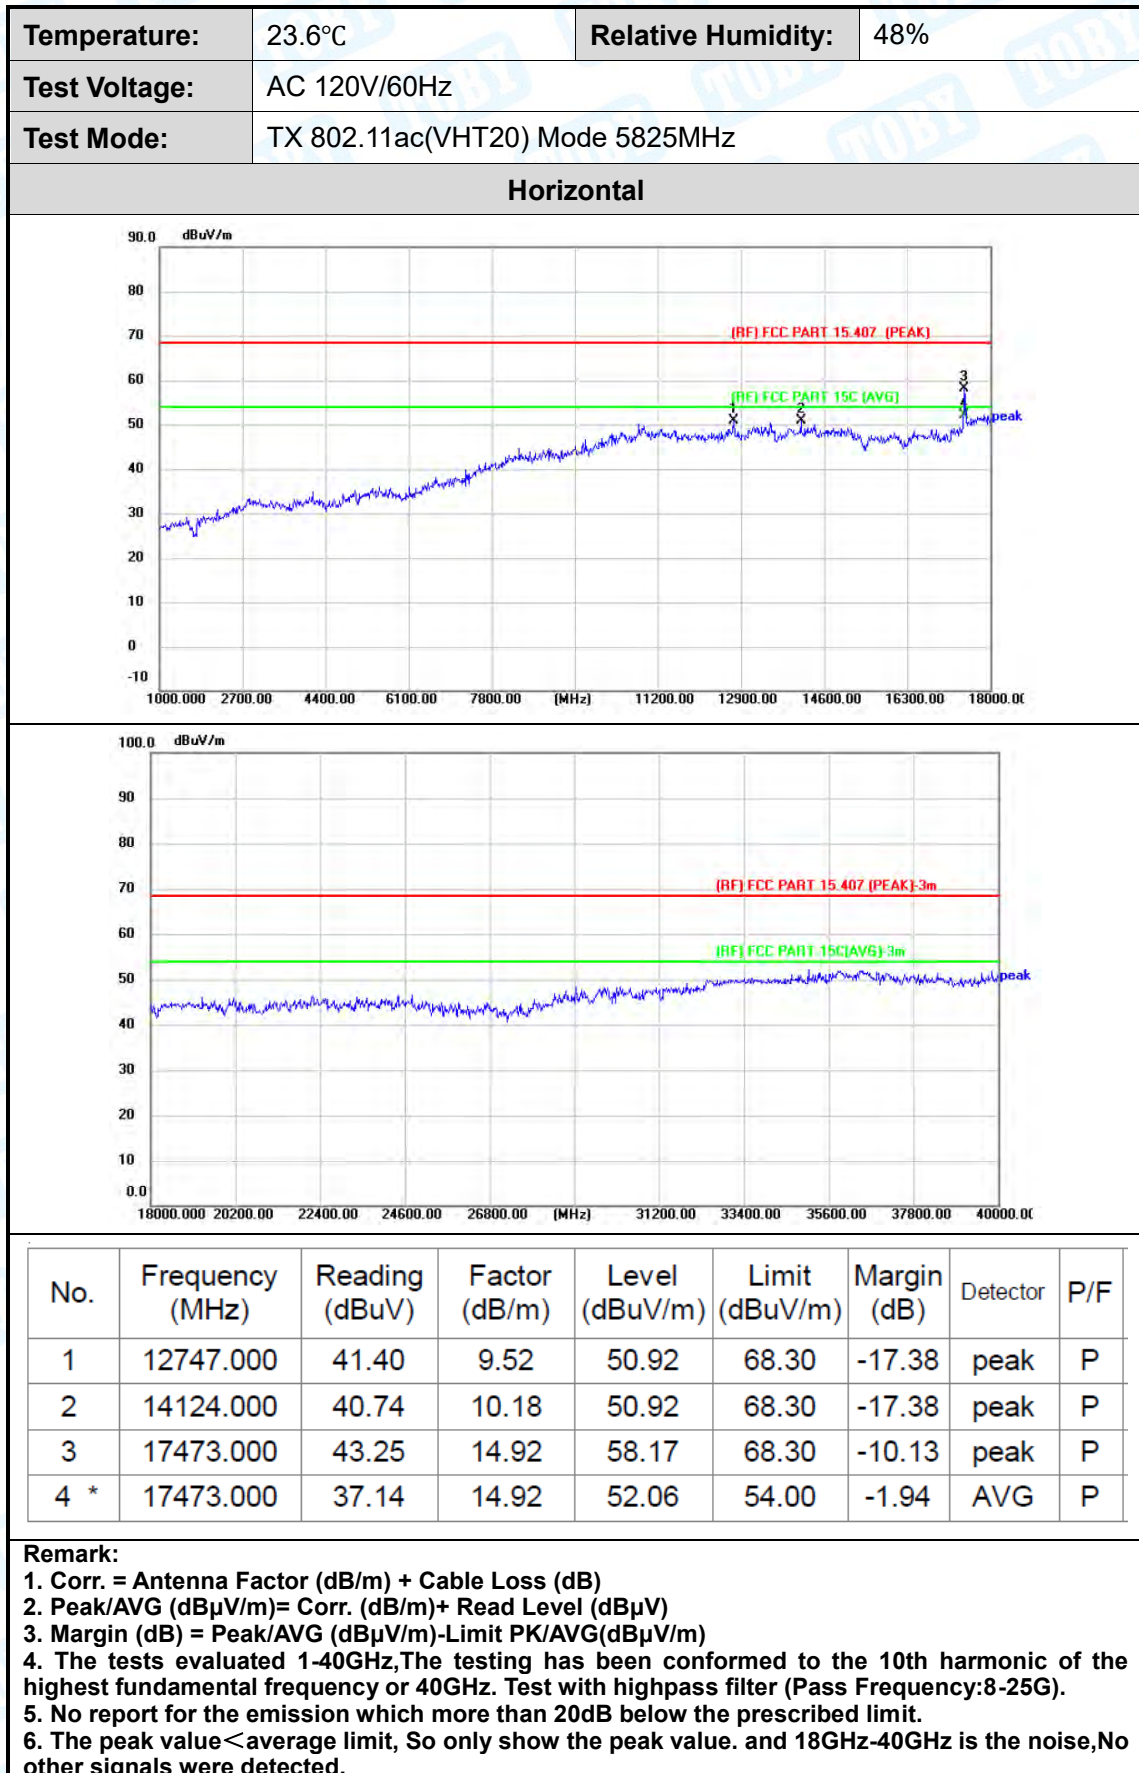


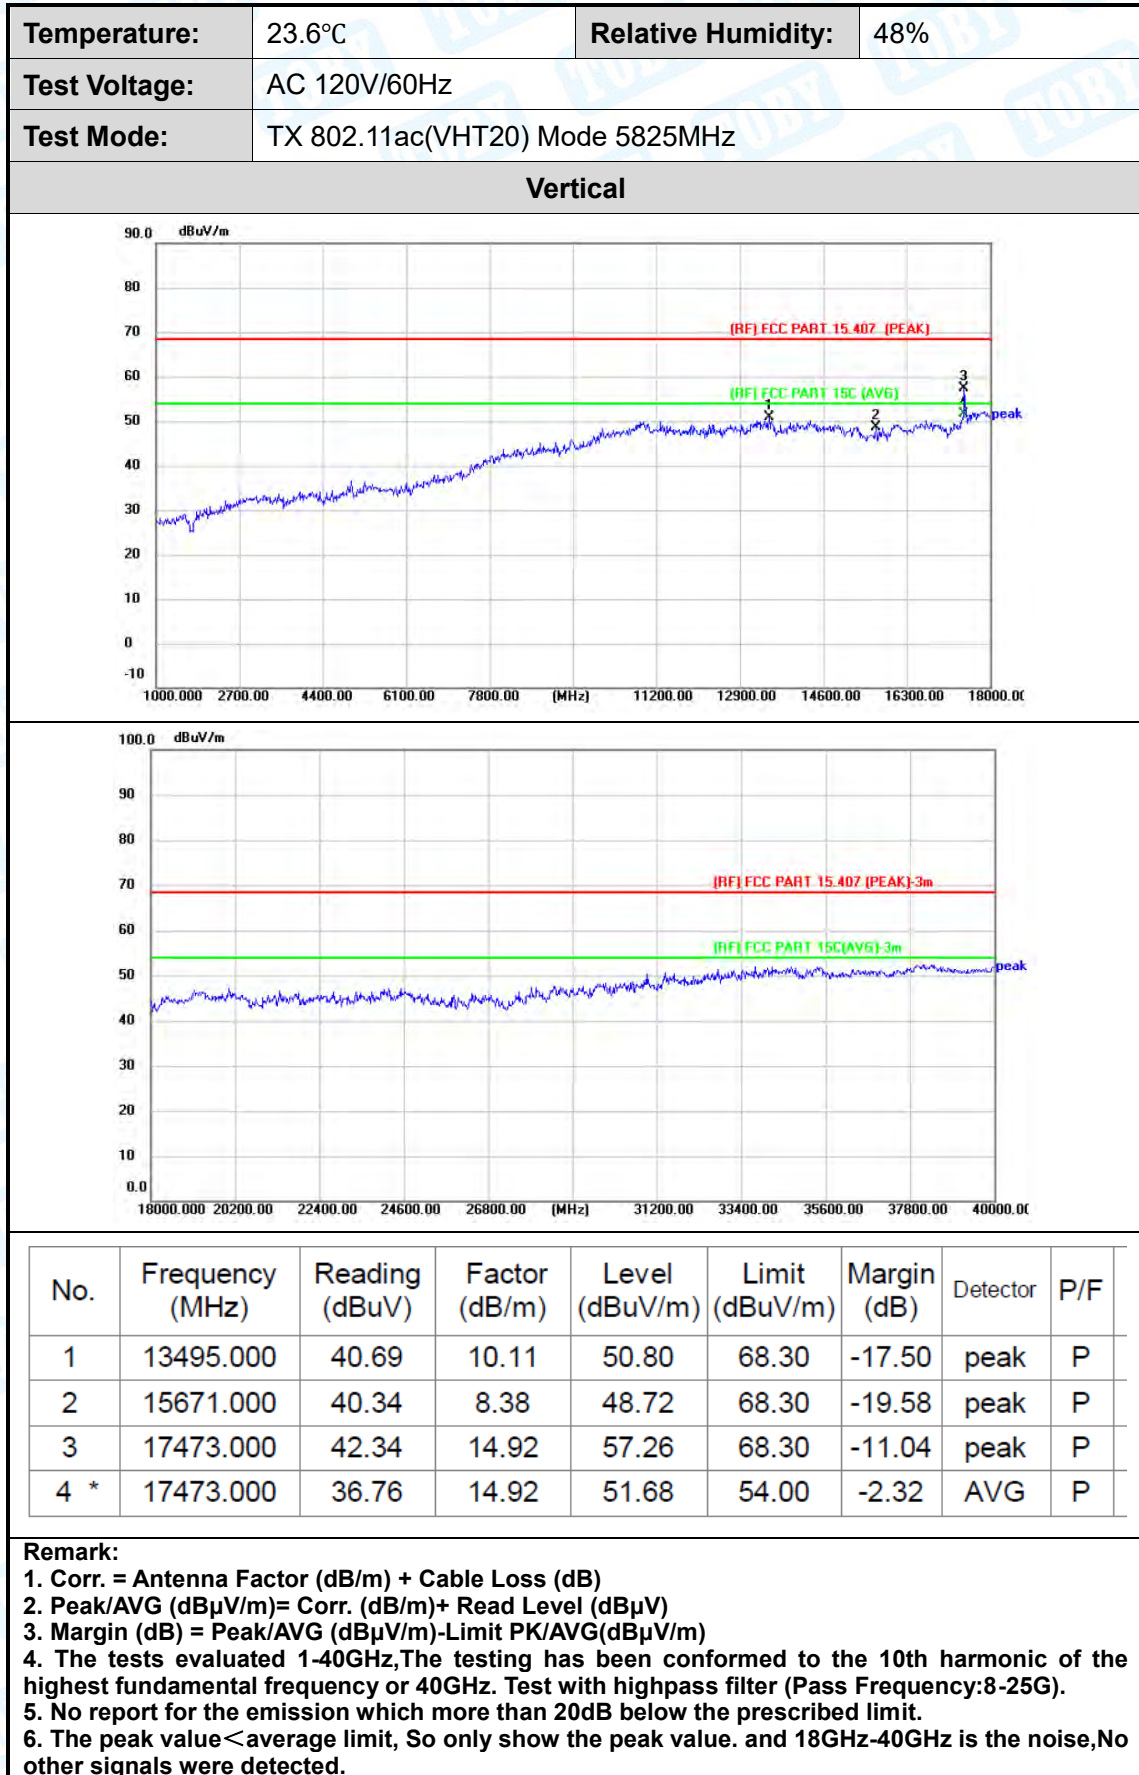


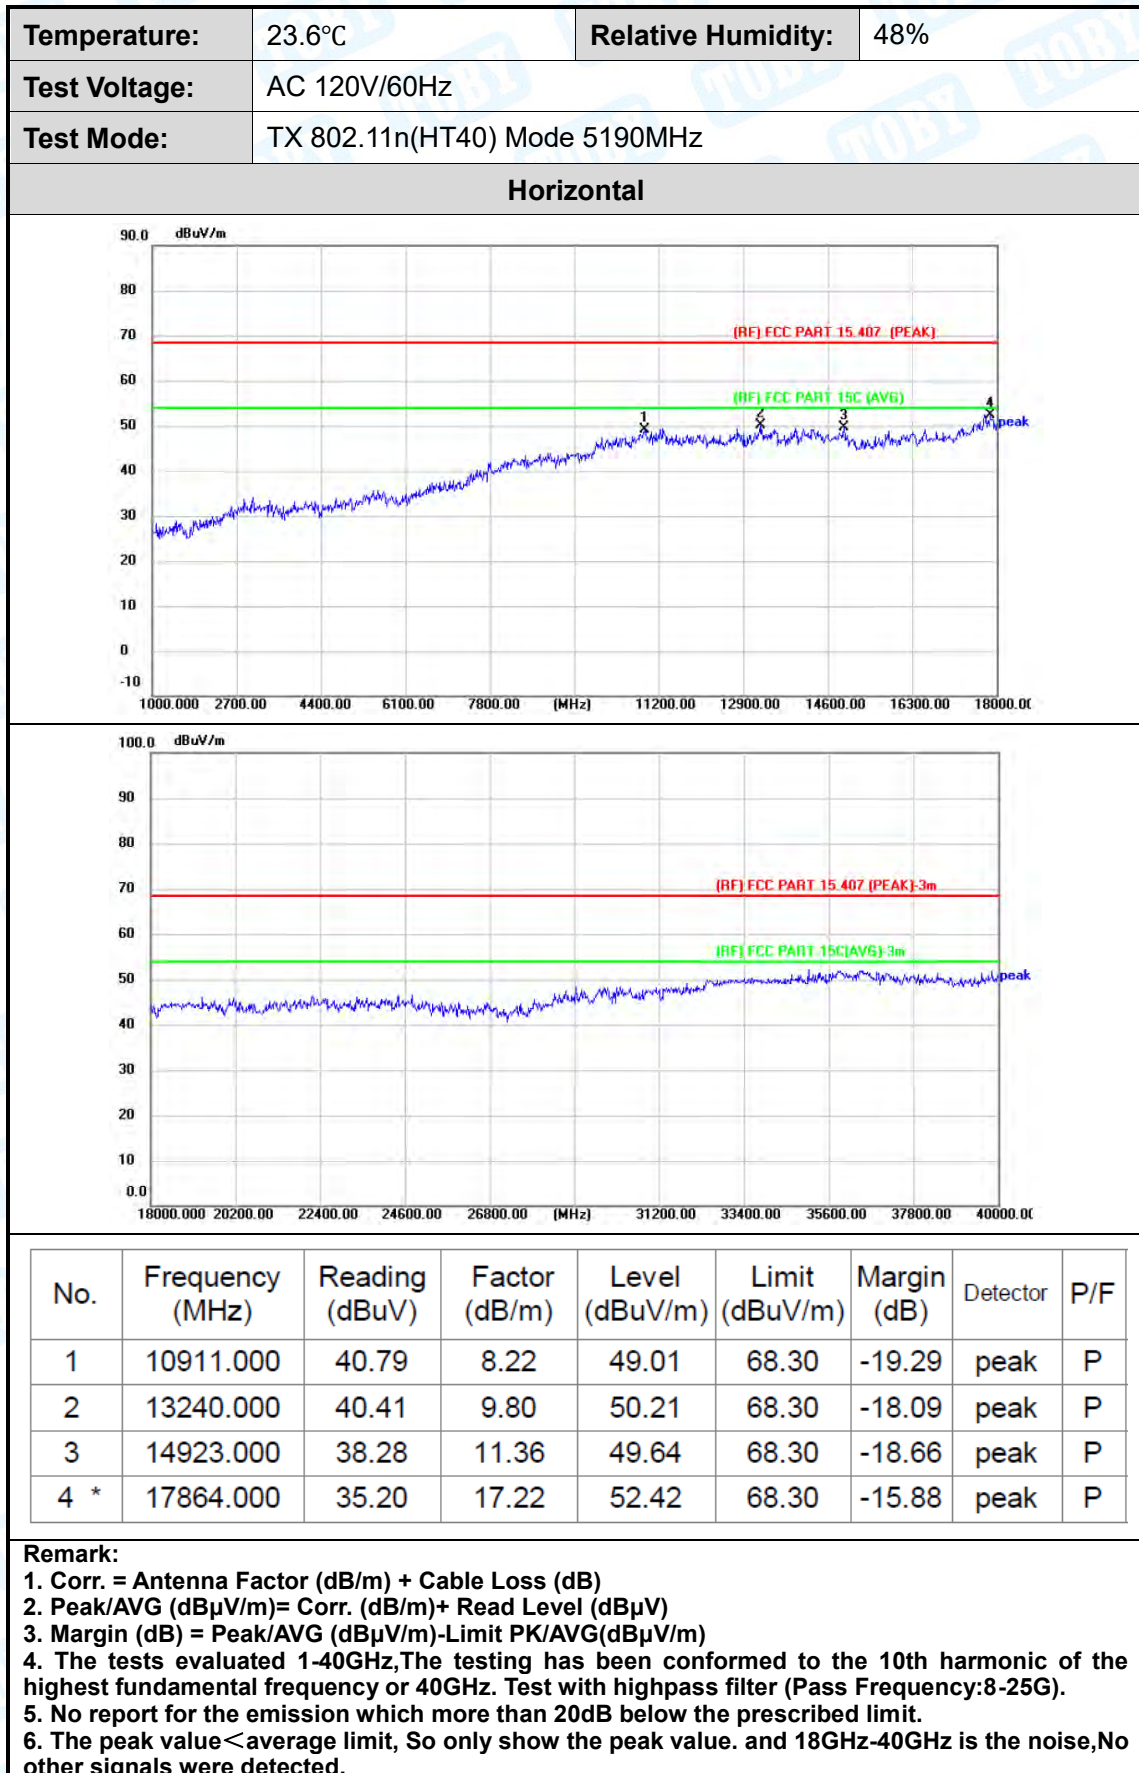


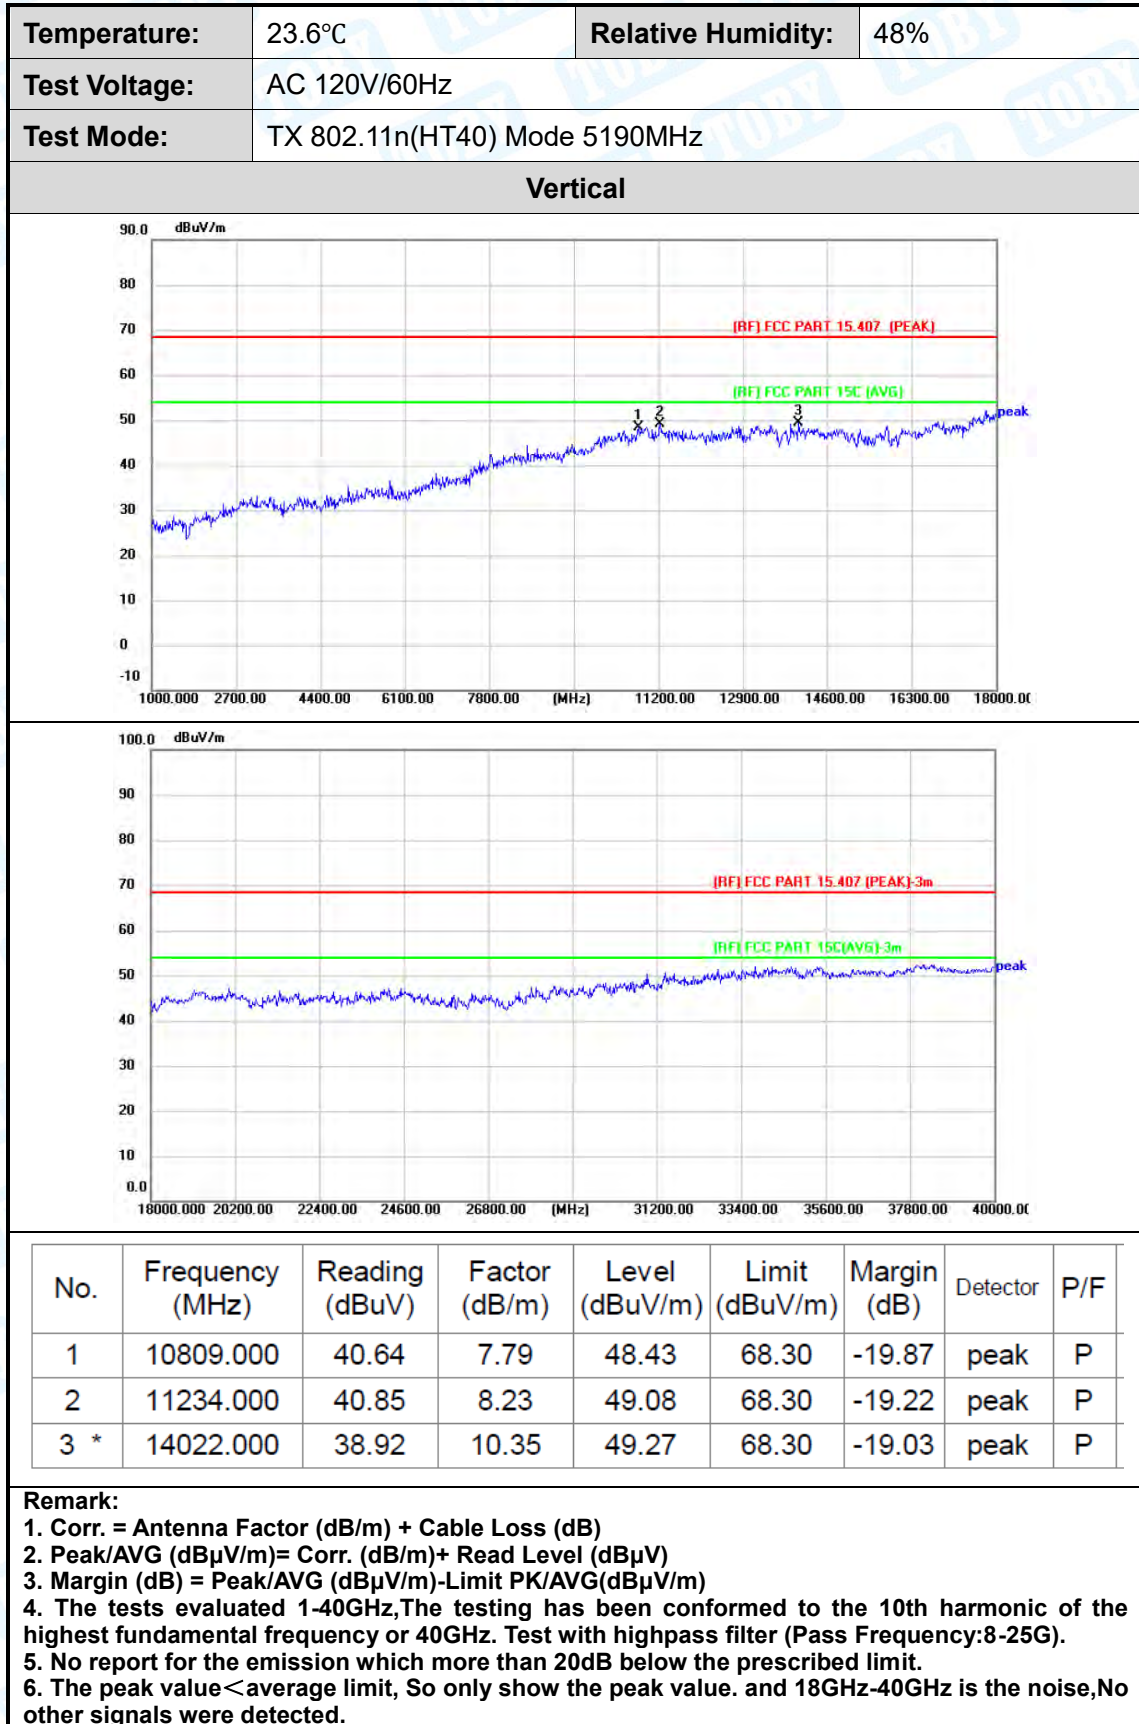


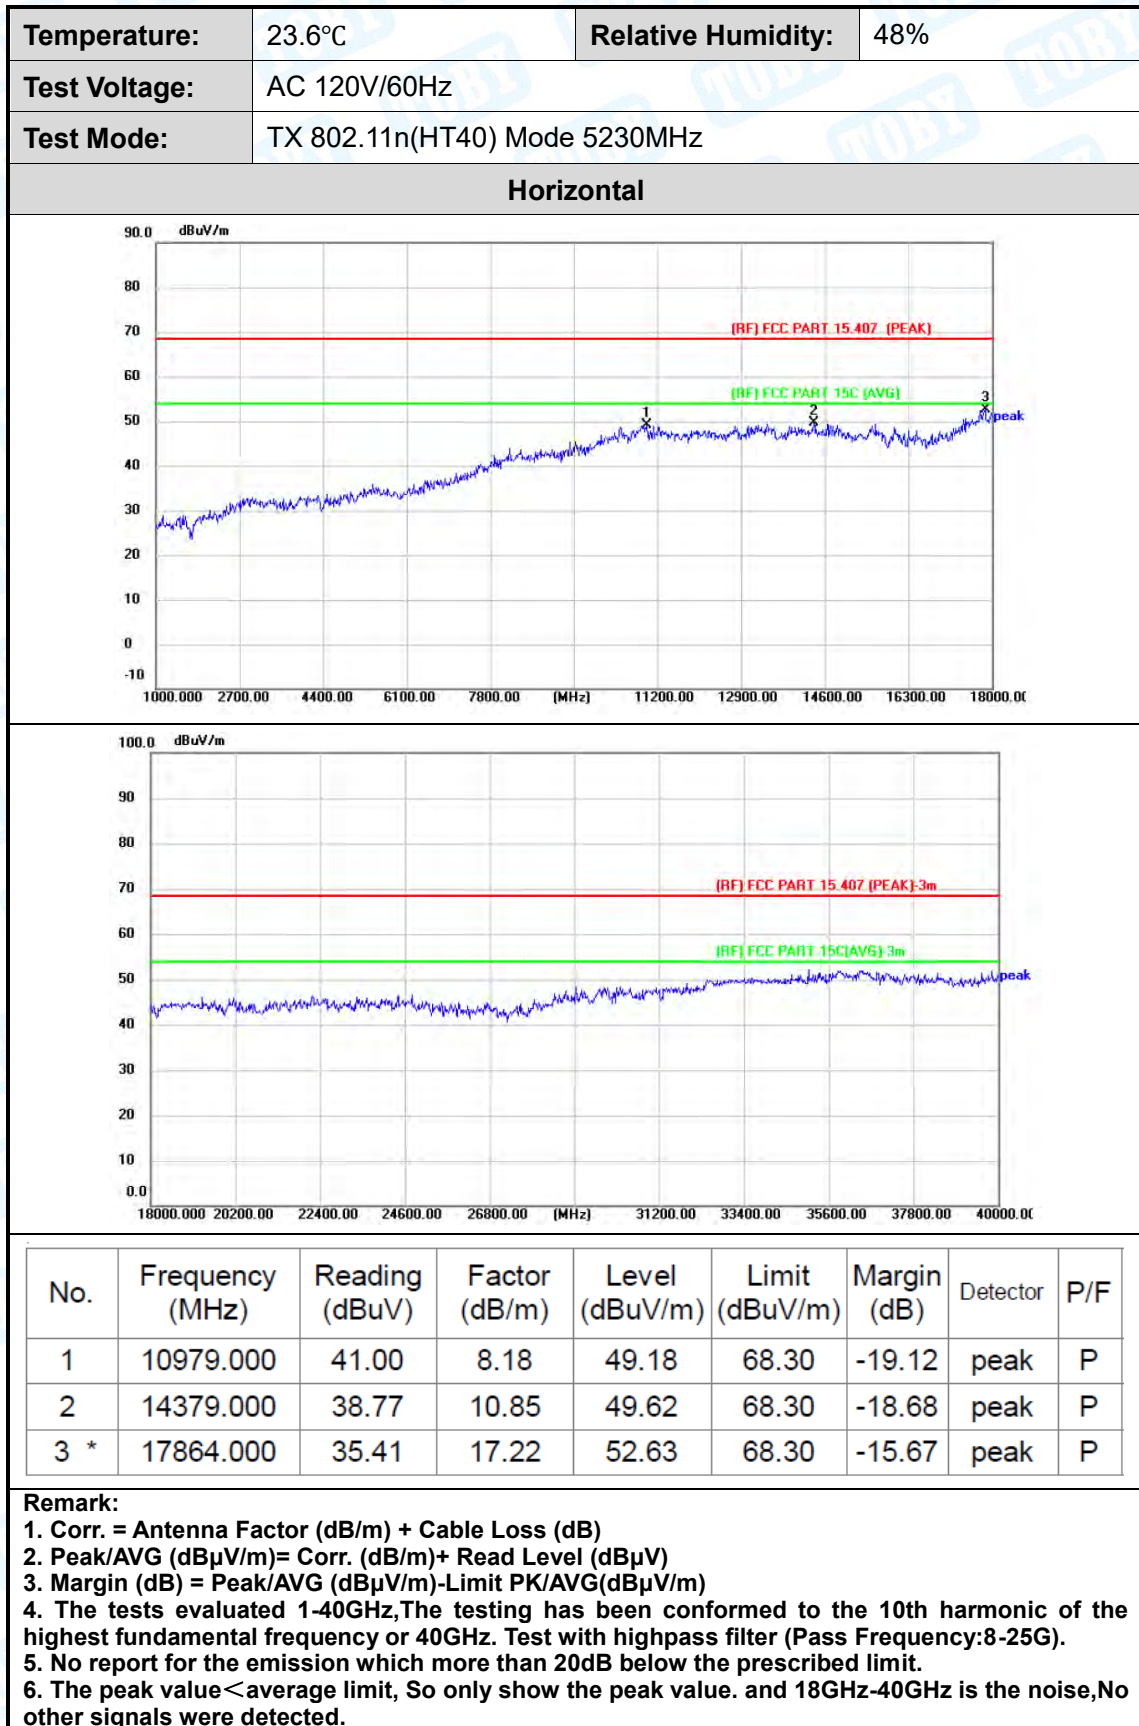


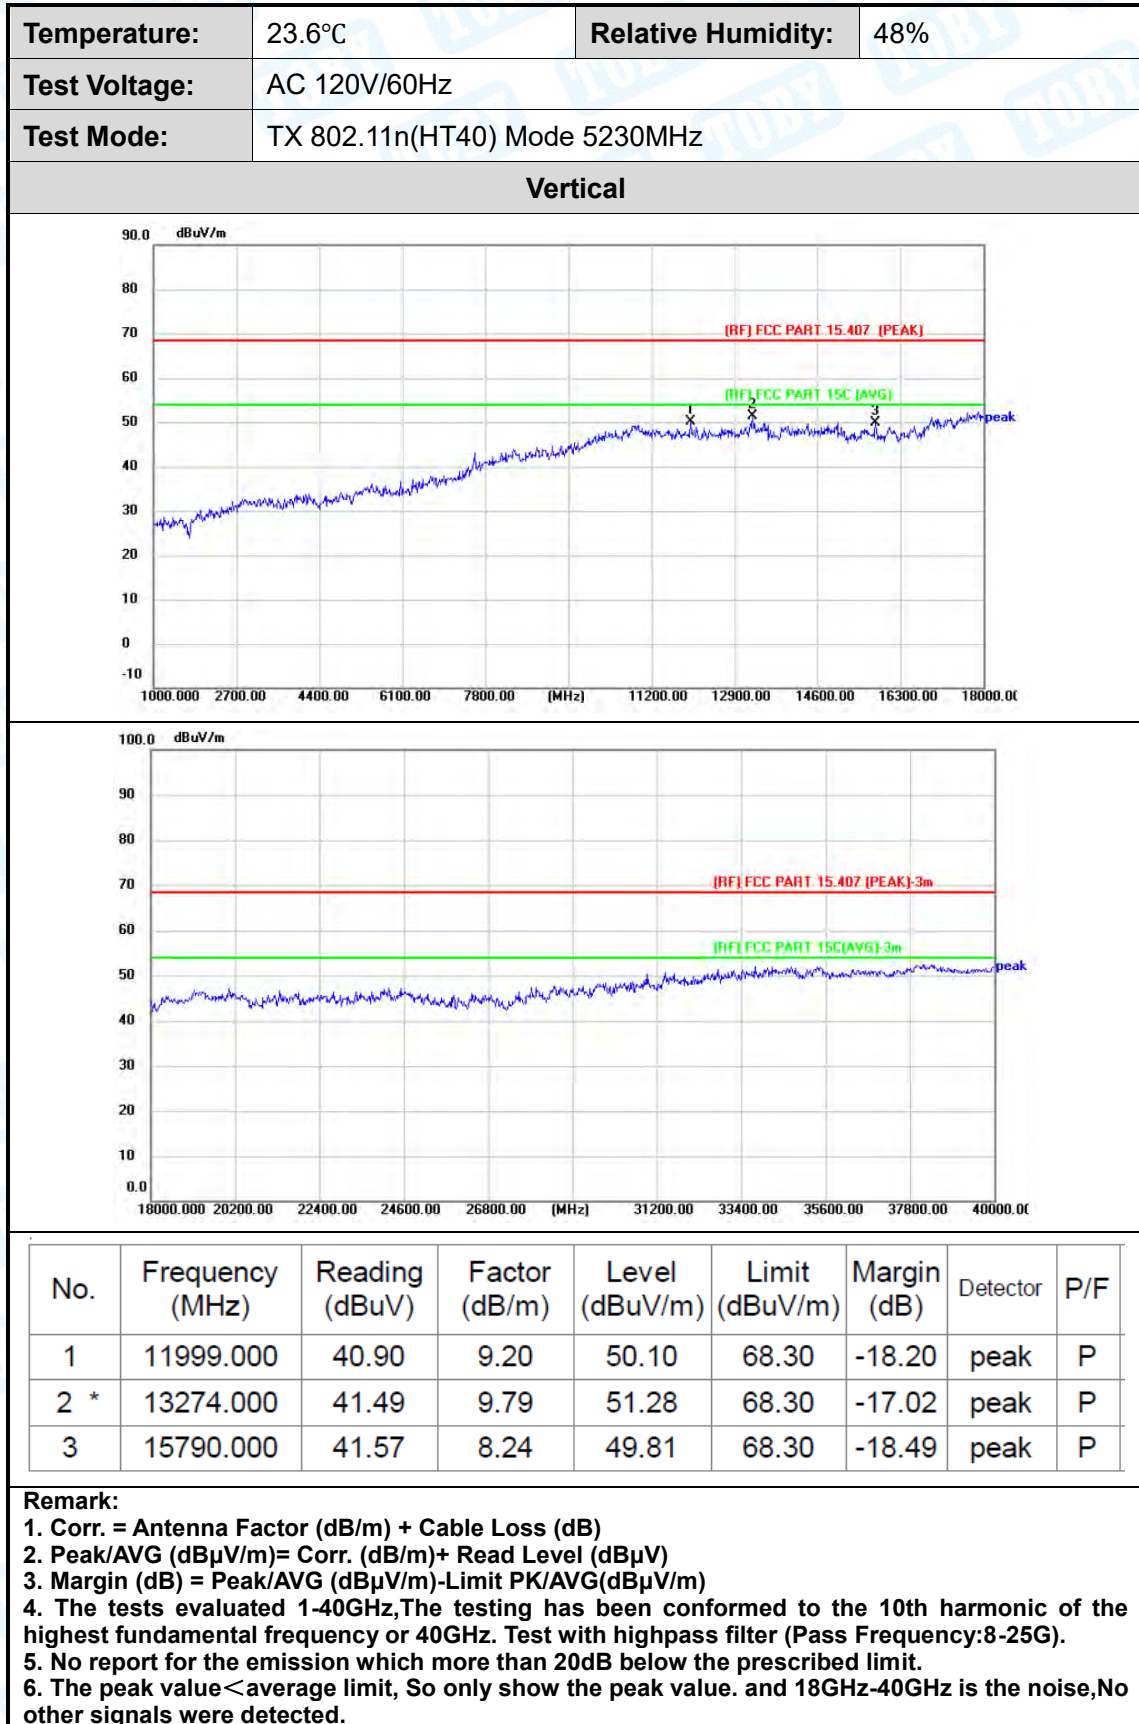


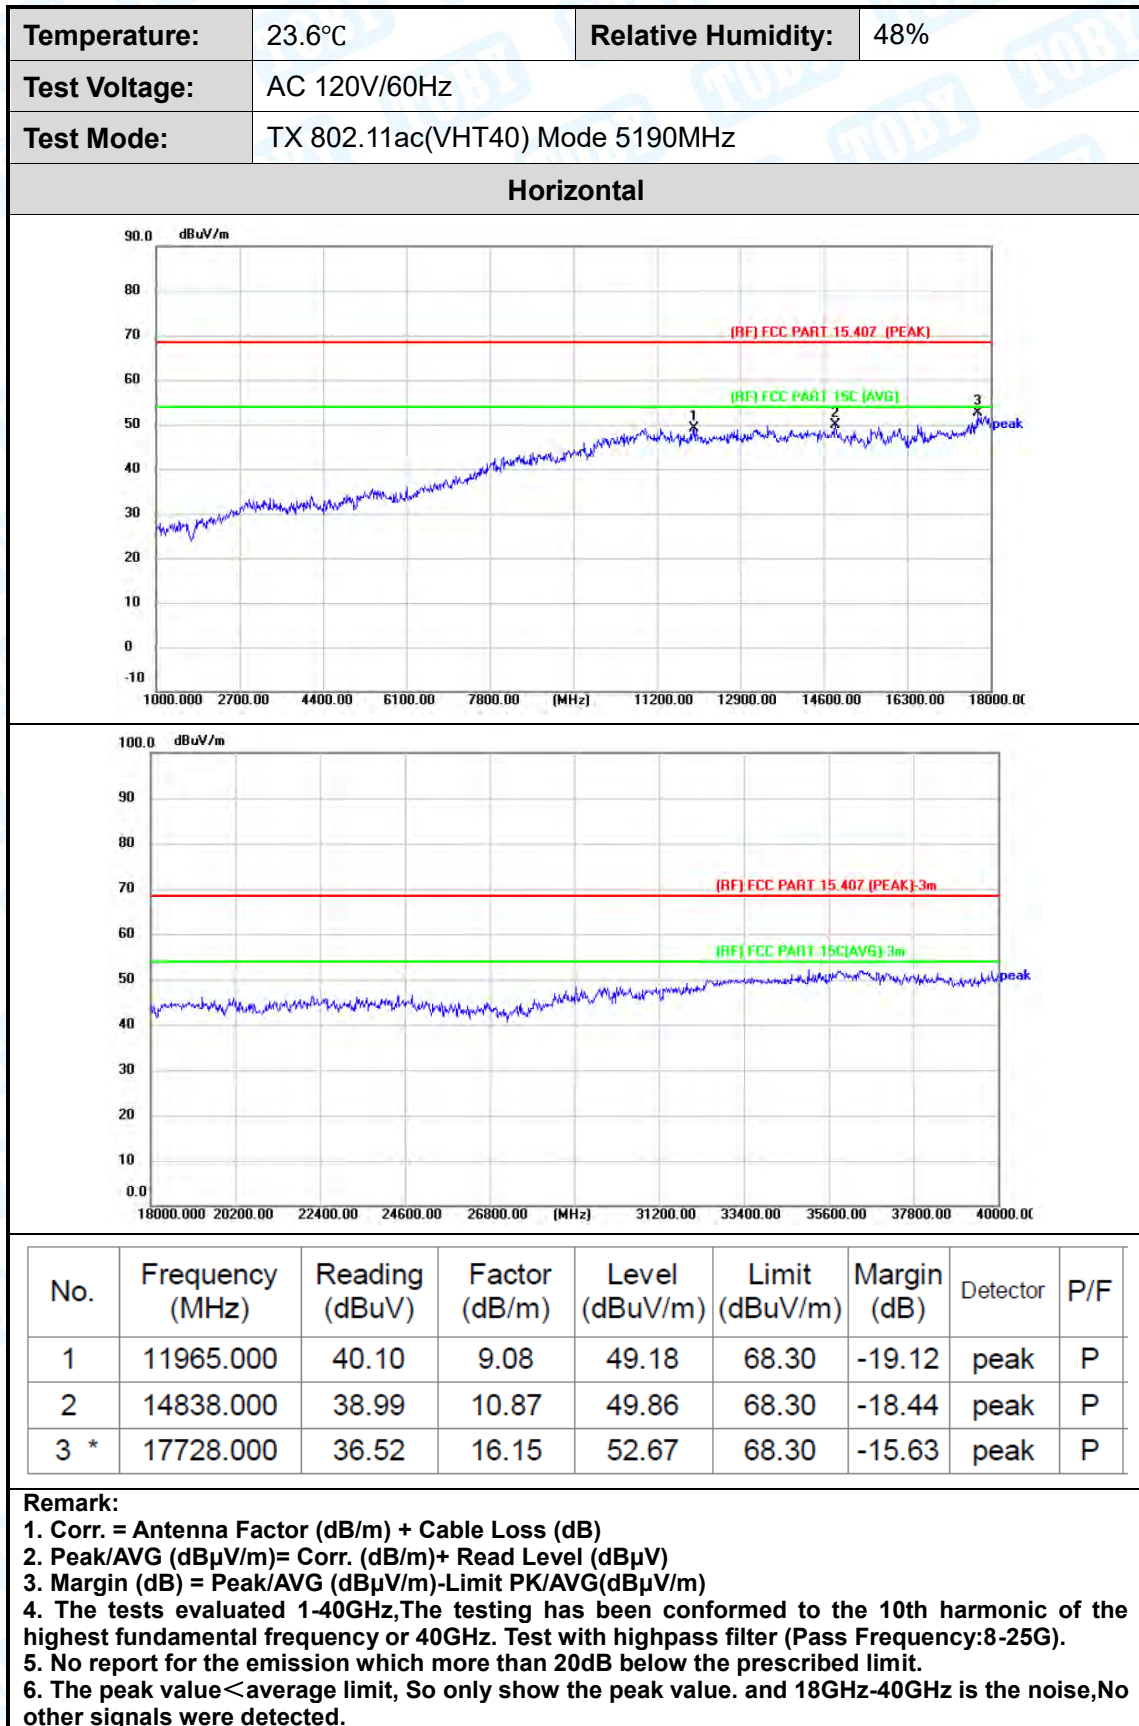

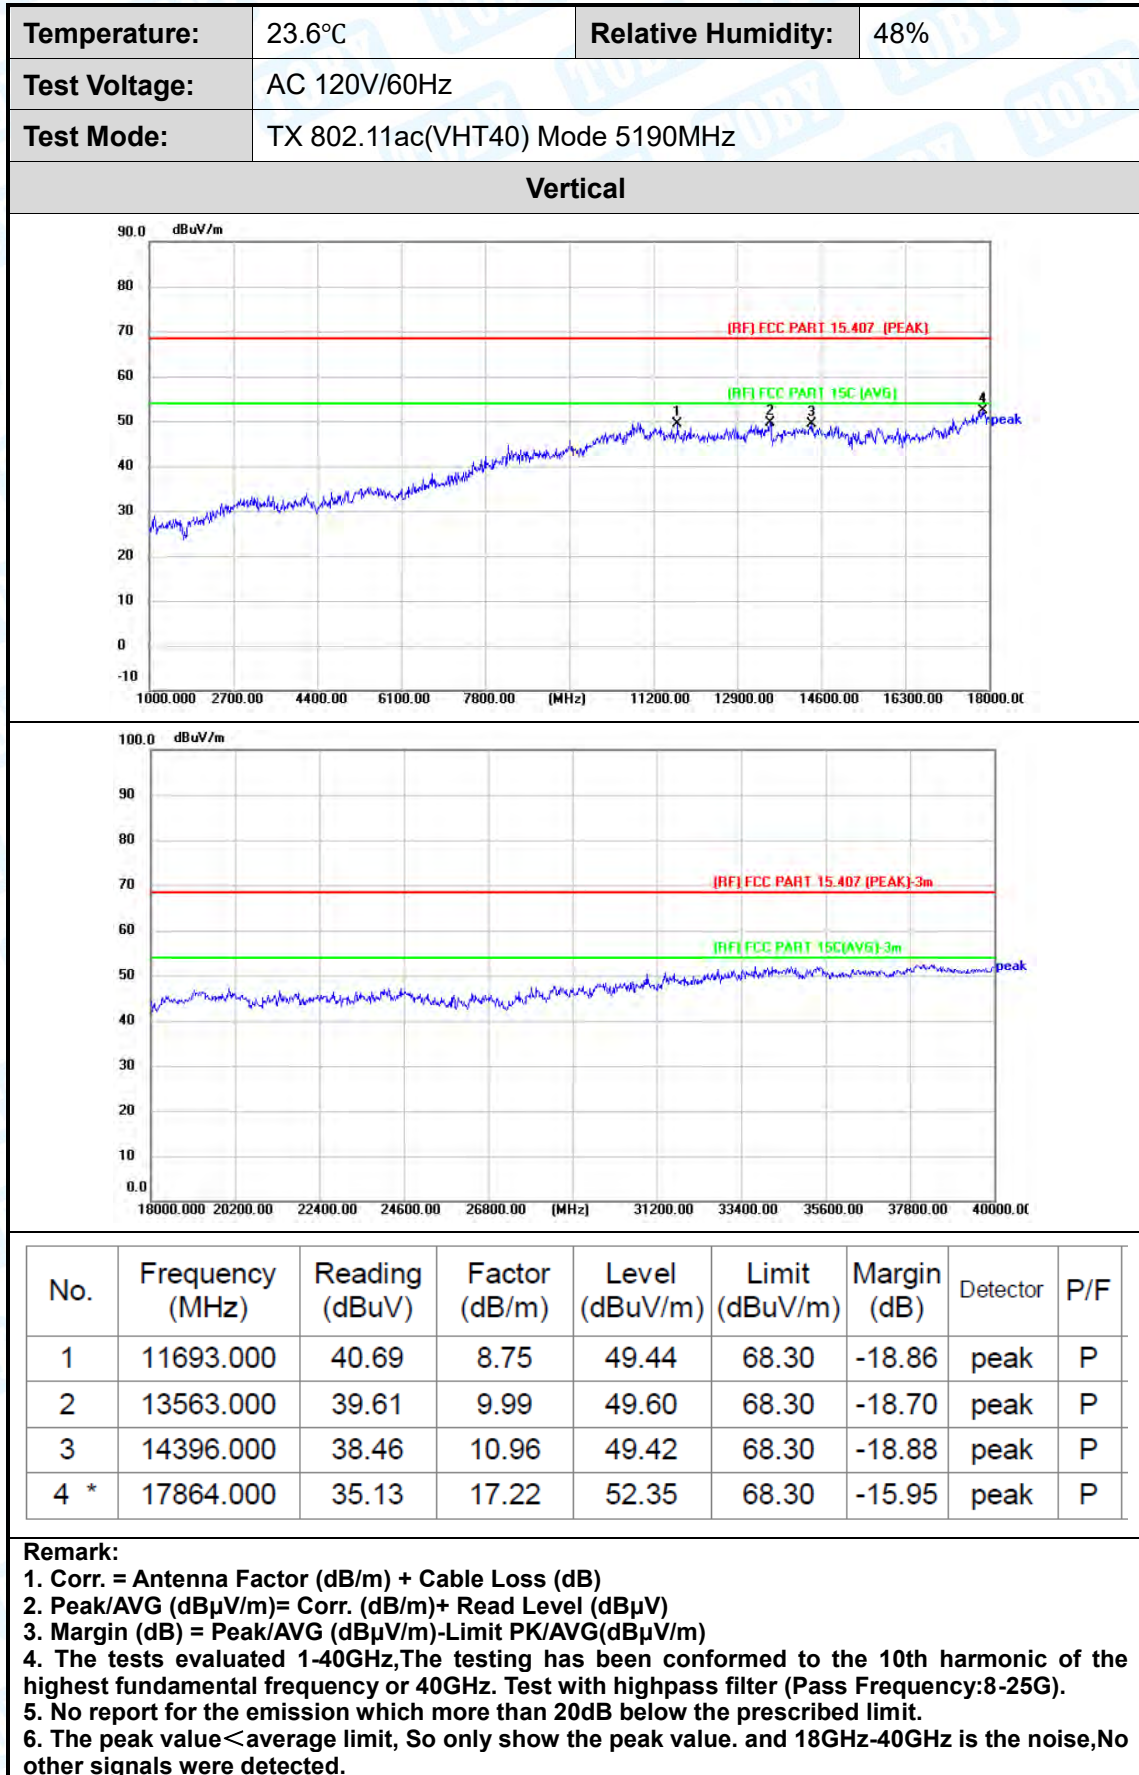


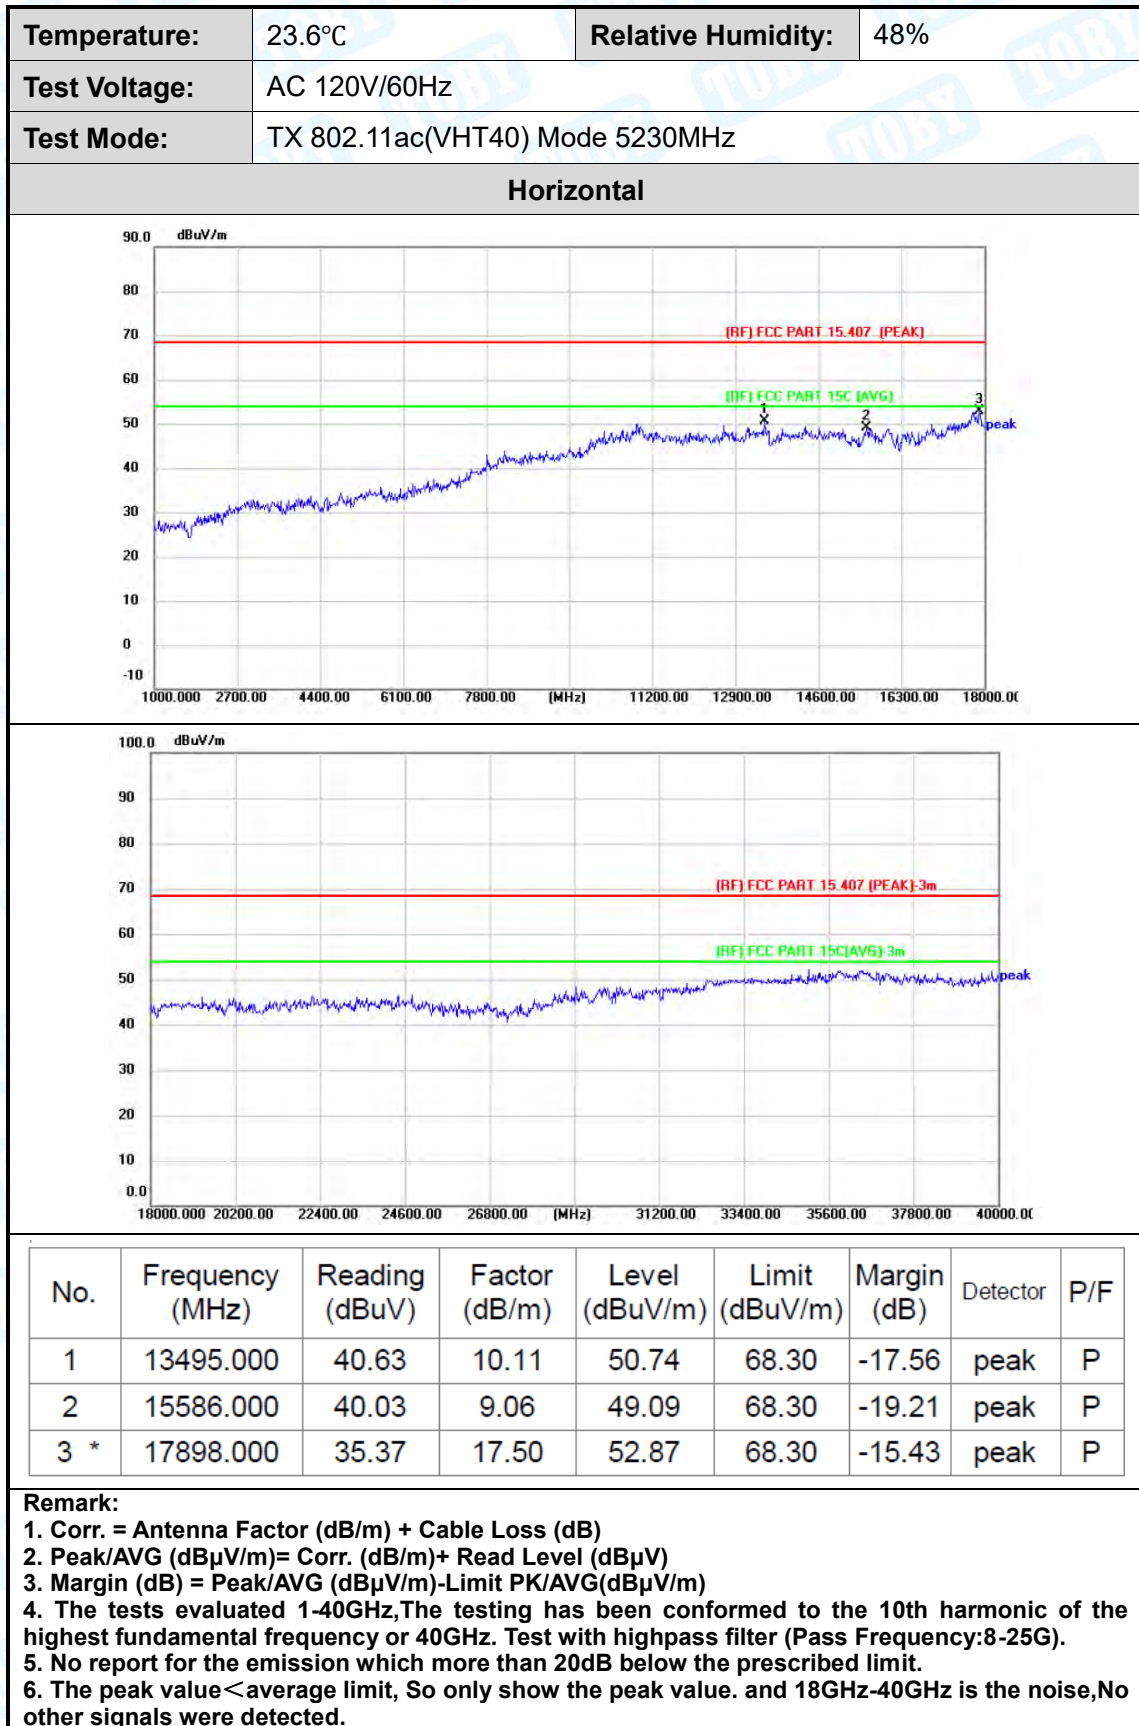


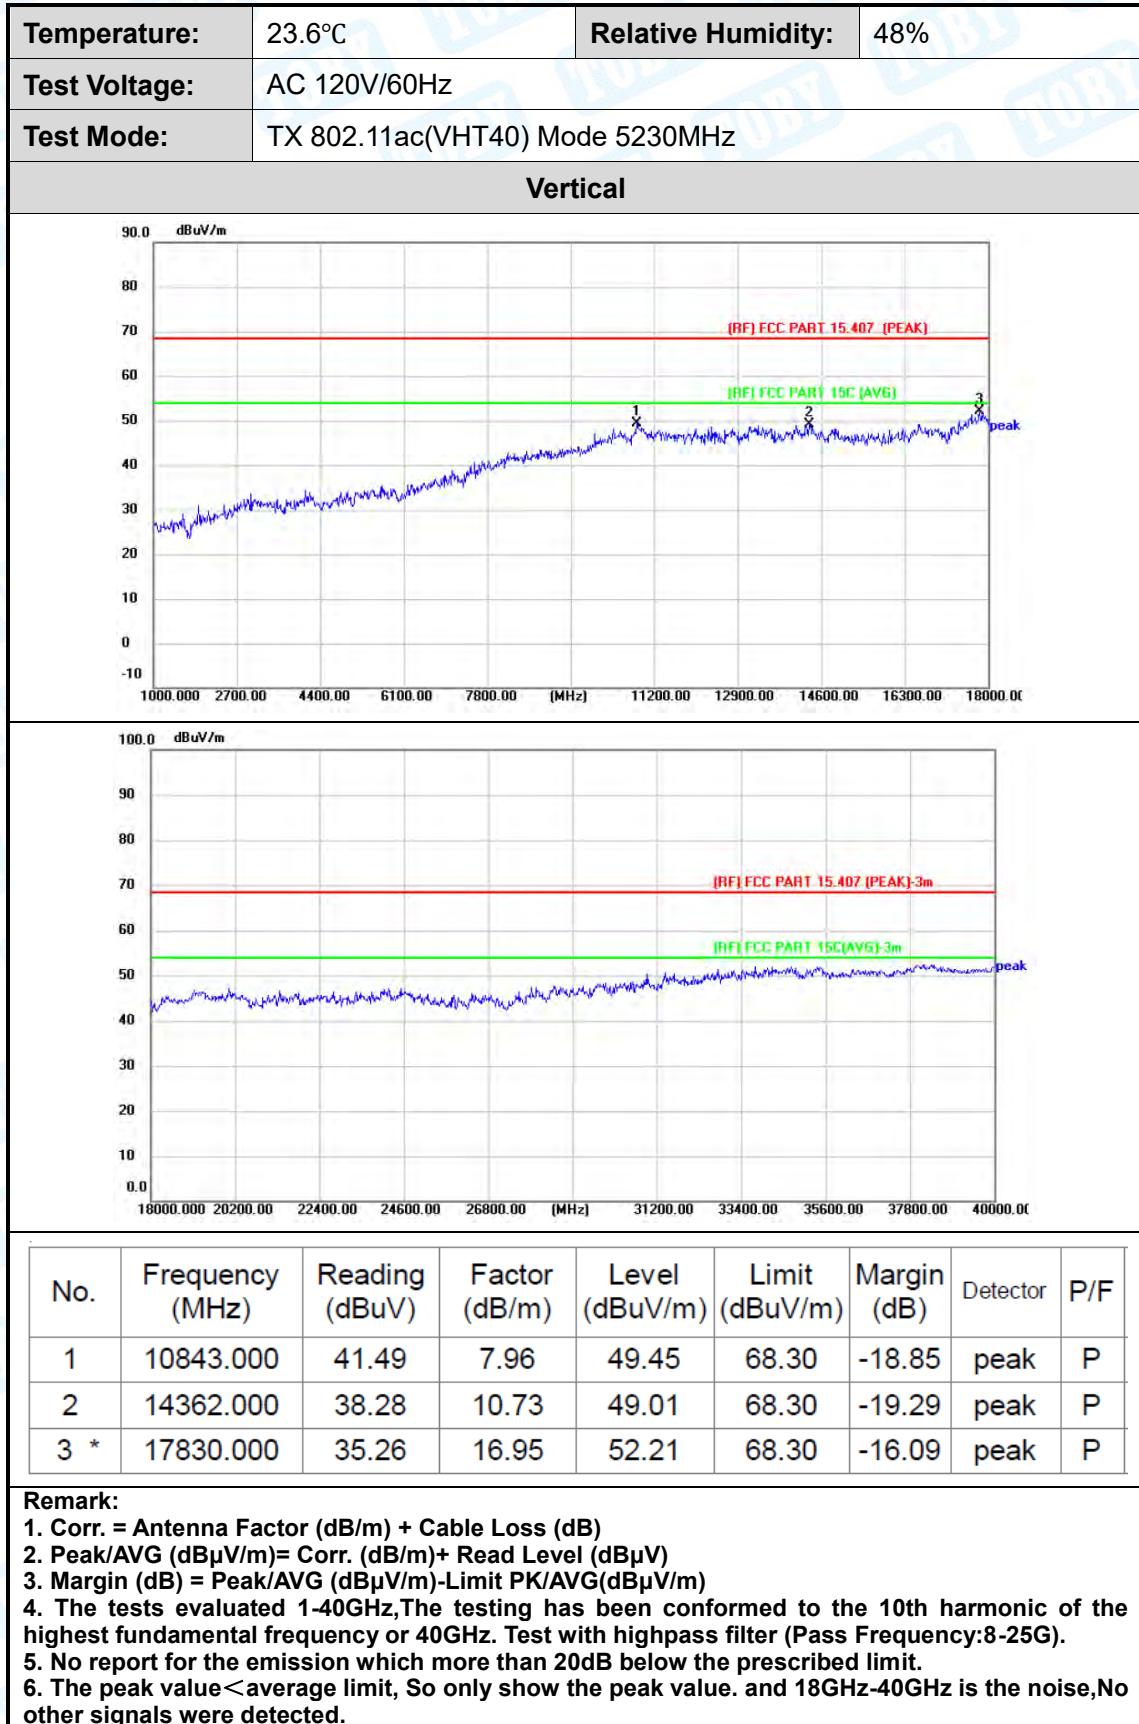


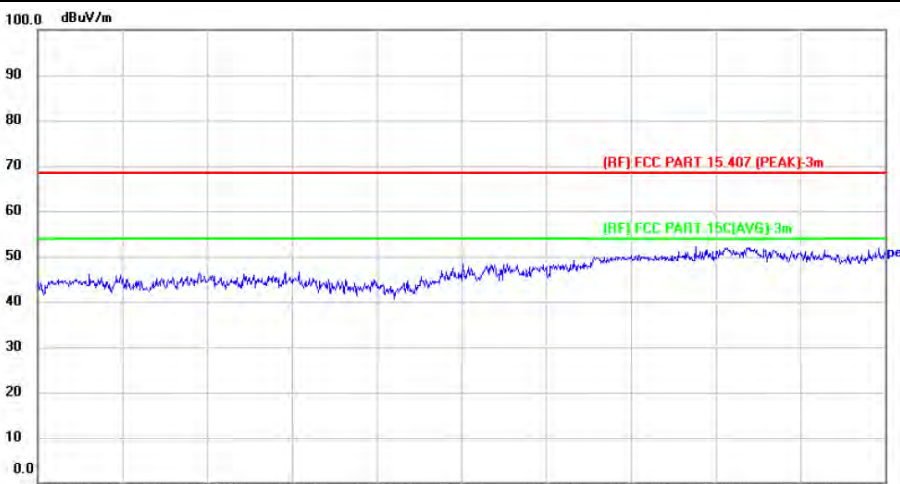
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ax(HE40) Mode 5190MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10928.000	41.96	8.21	50.17	68.30	-18.13	peak	P
2	13325.000	39.93	9.89	49.82	68.30	-18.48	peak	P
3 *	17847.000	35.93	17.08	53.01	68.30	-15.29	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV) 3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								




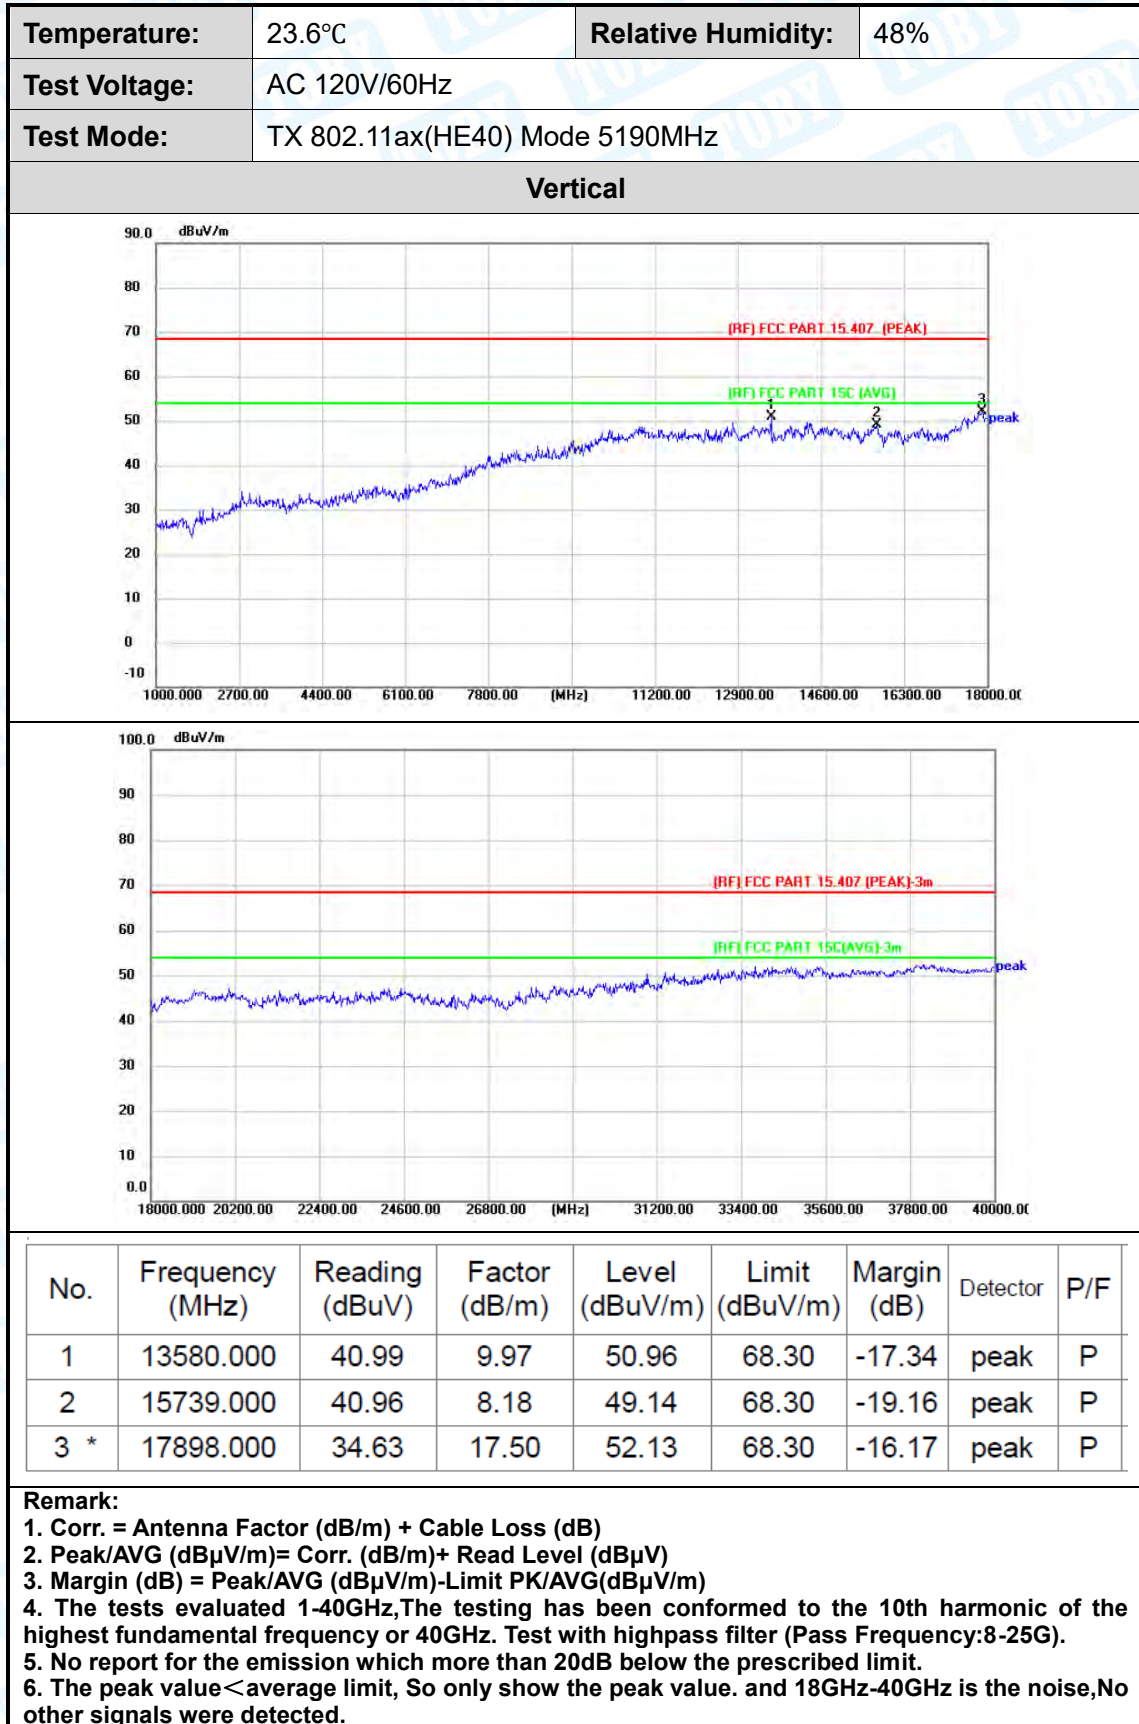


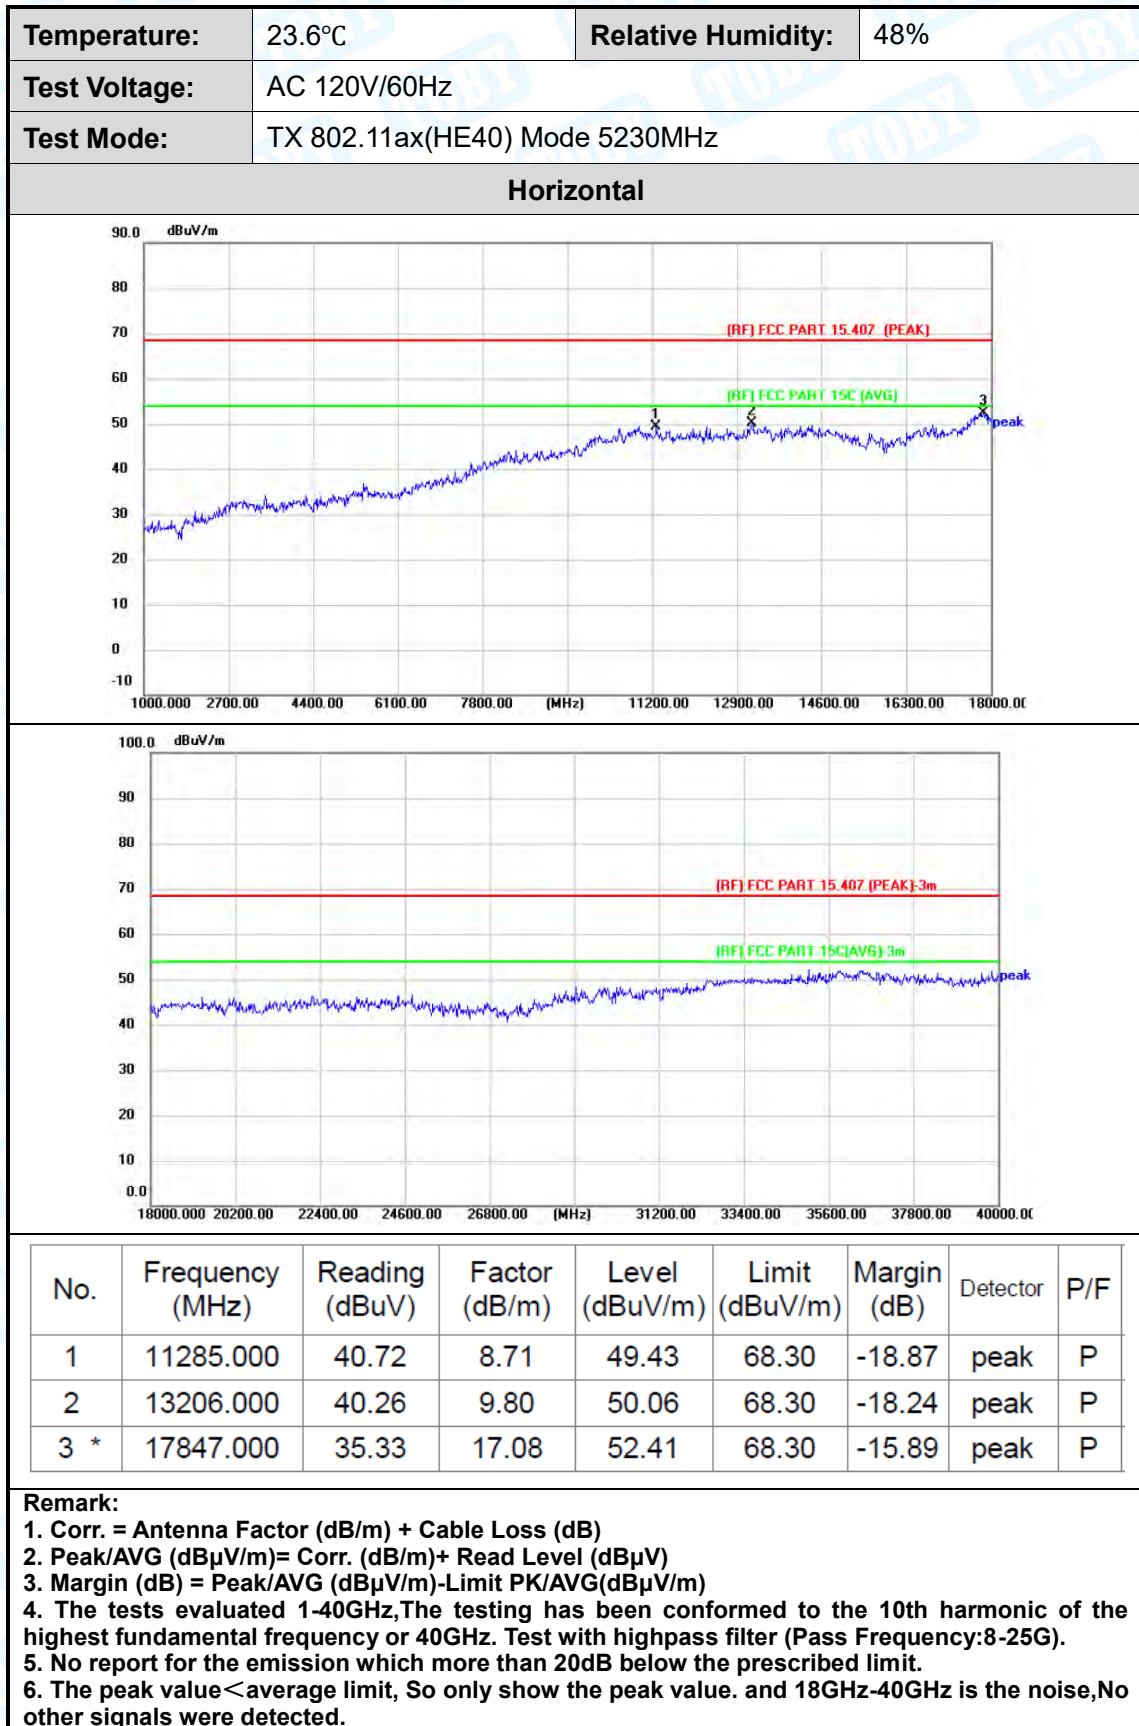



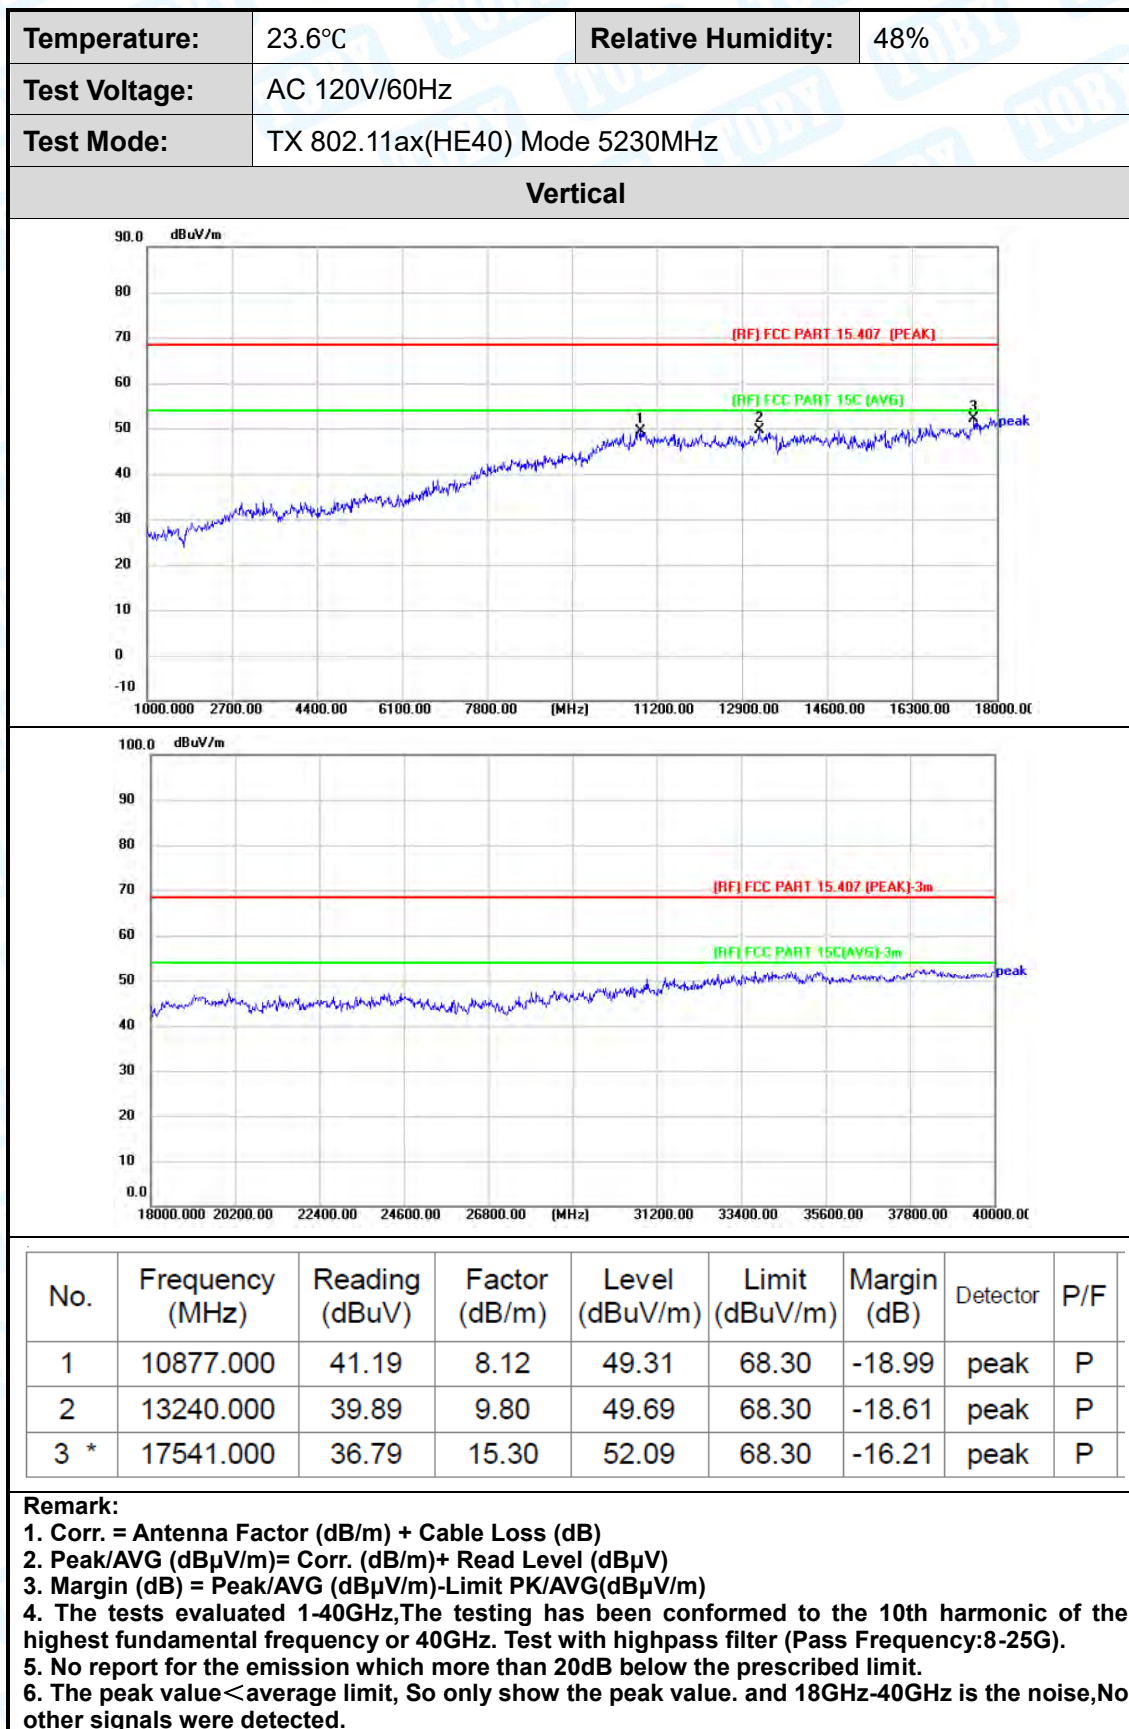


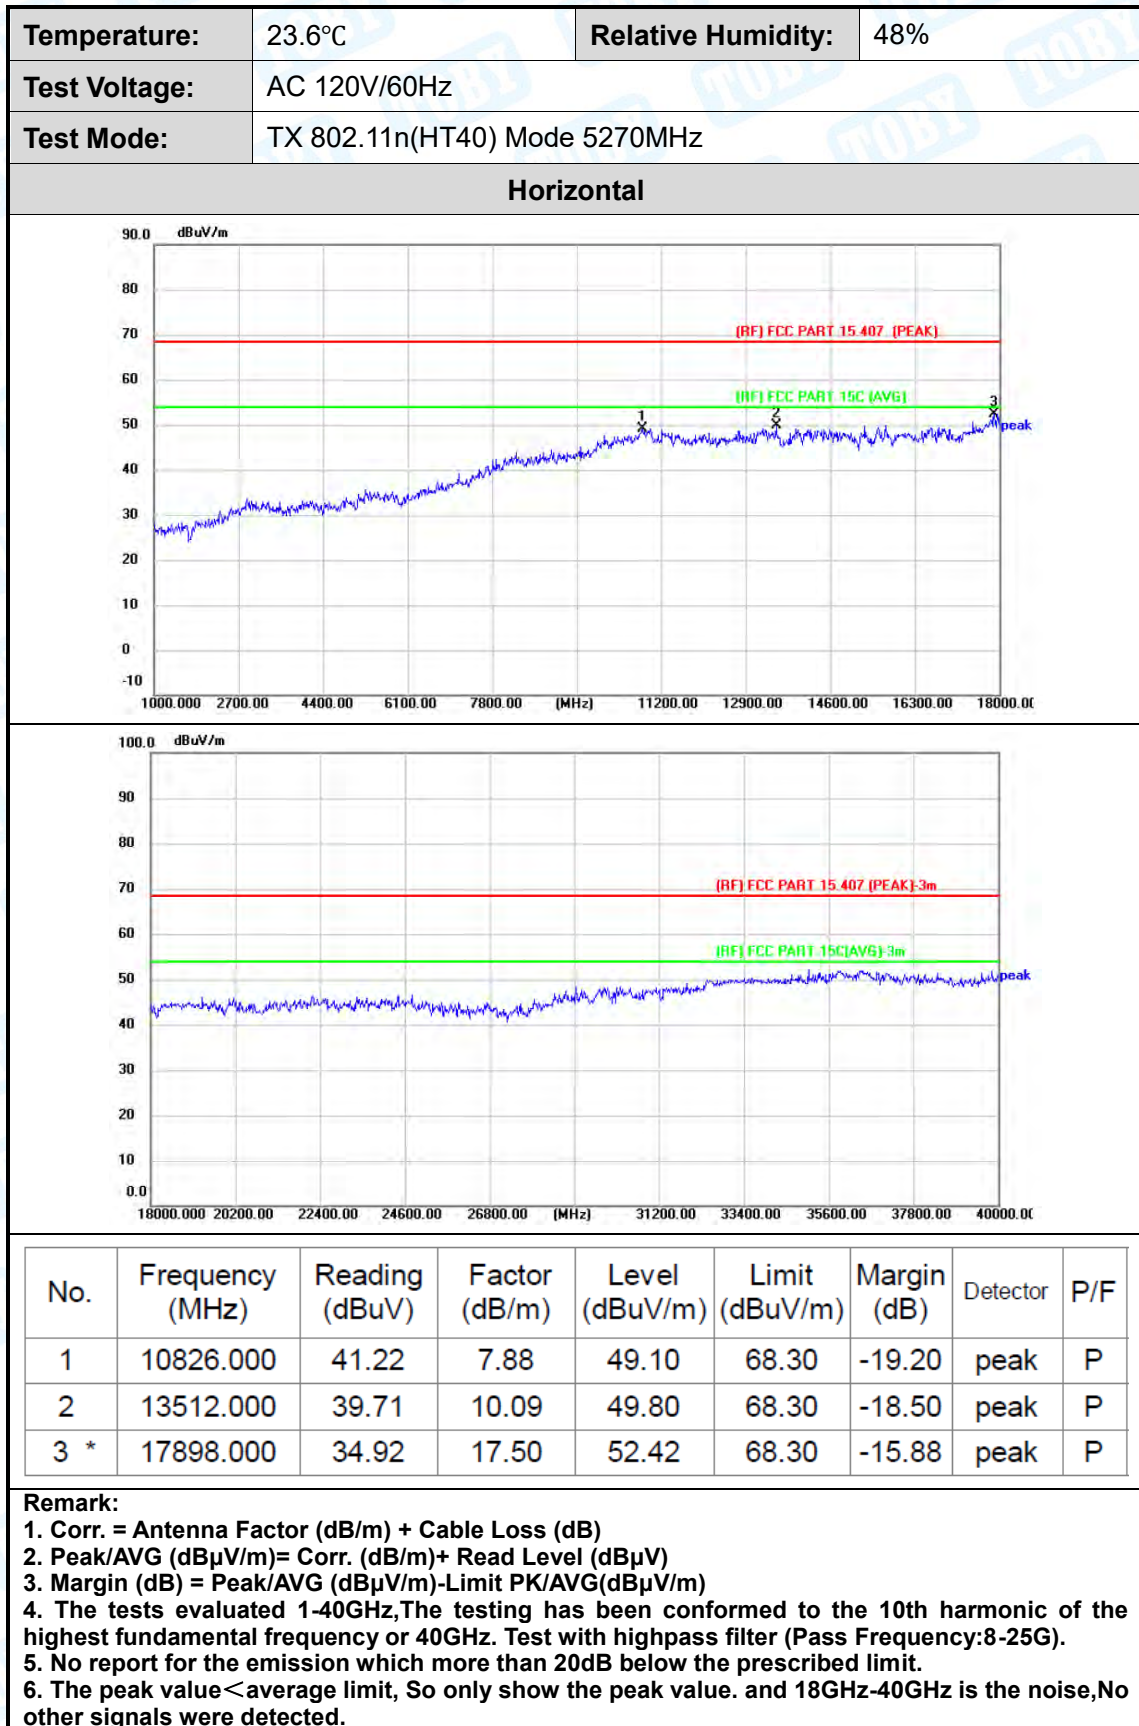

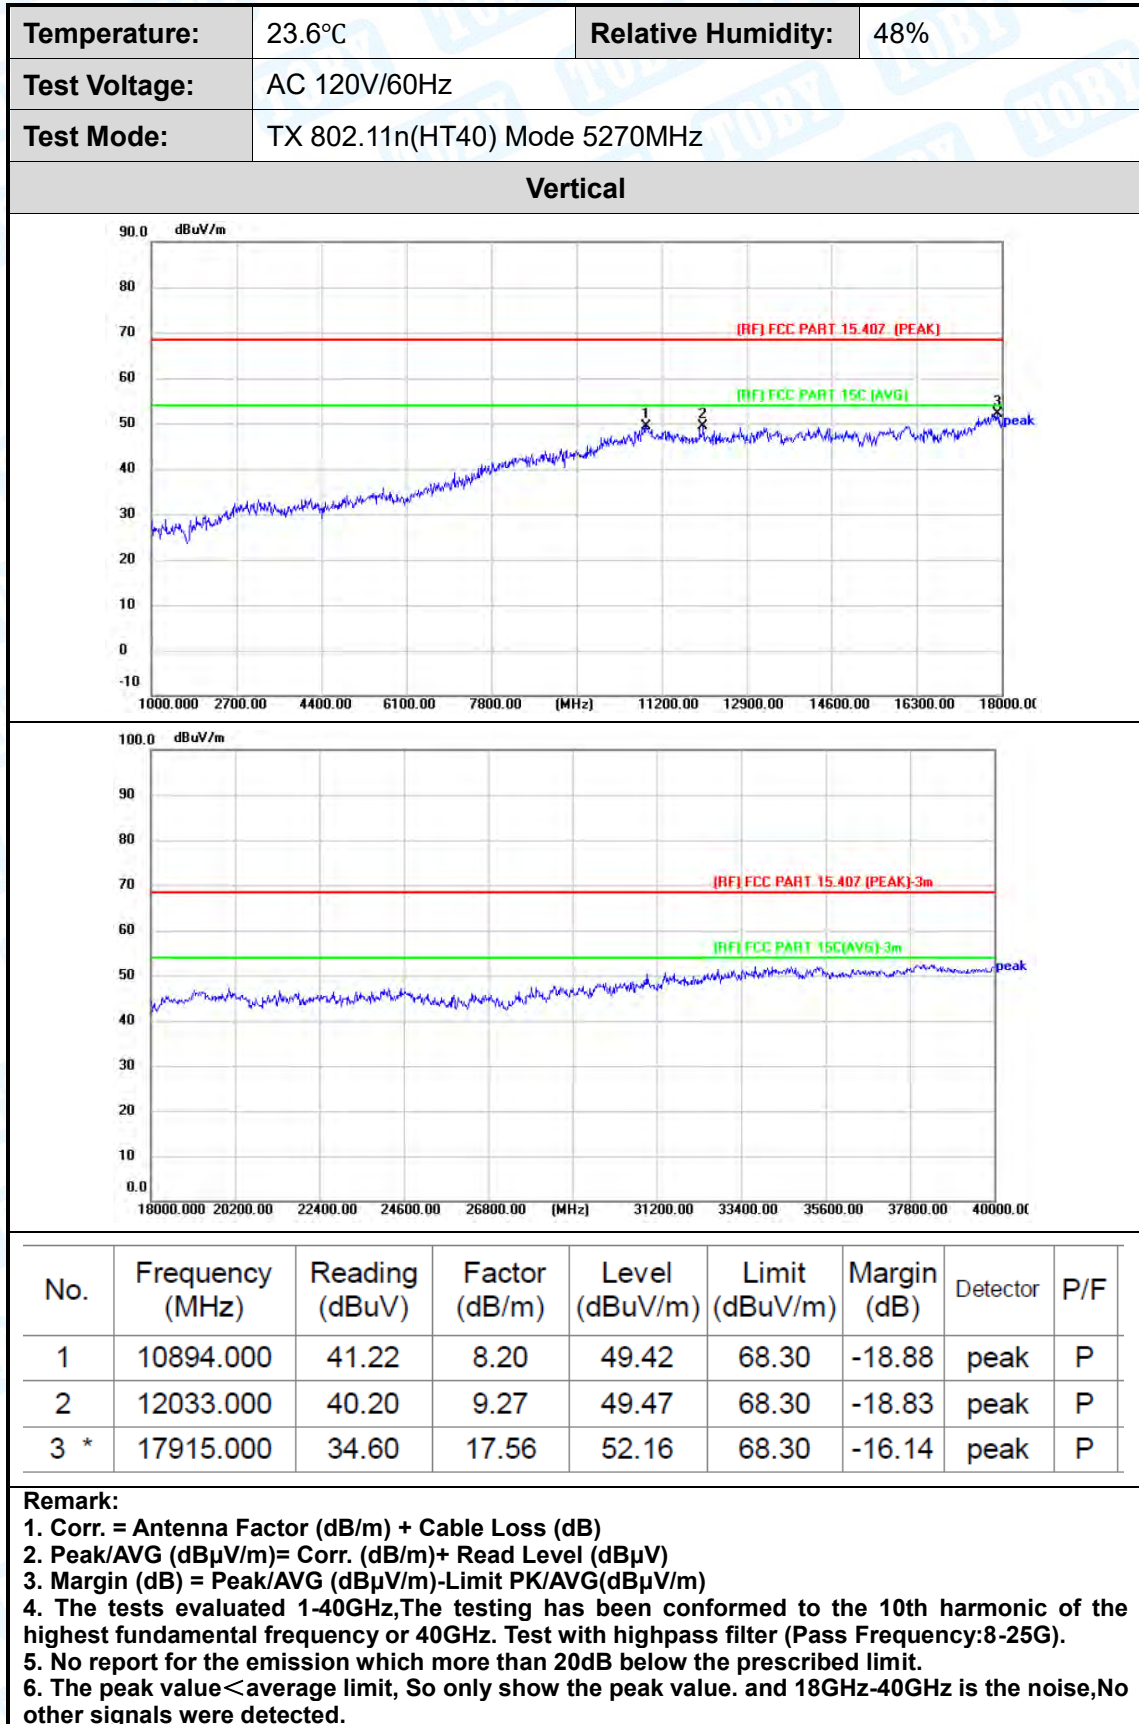


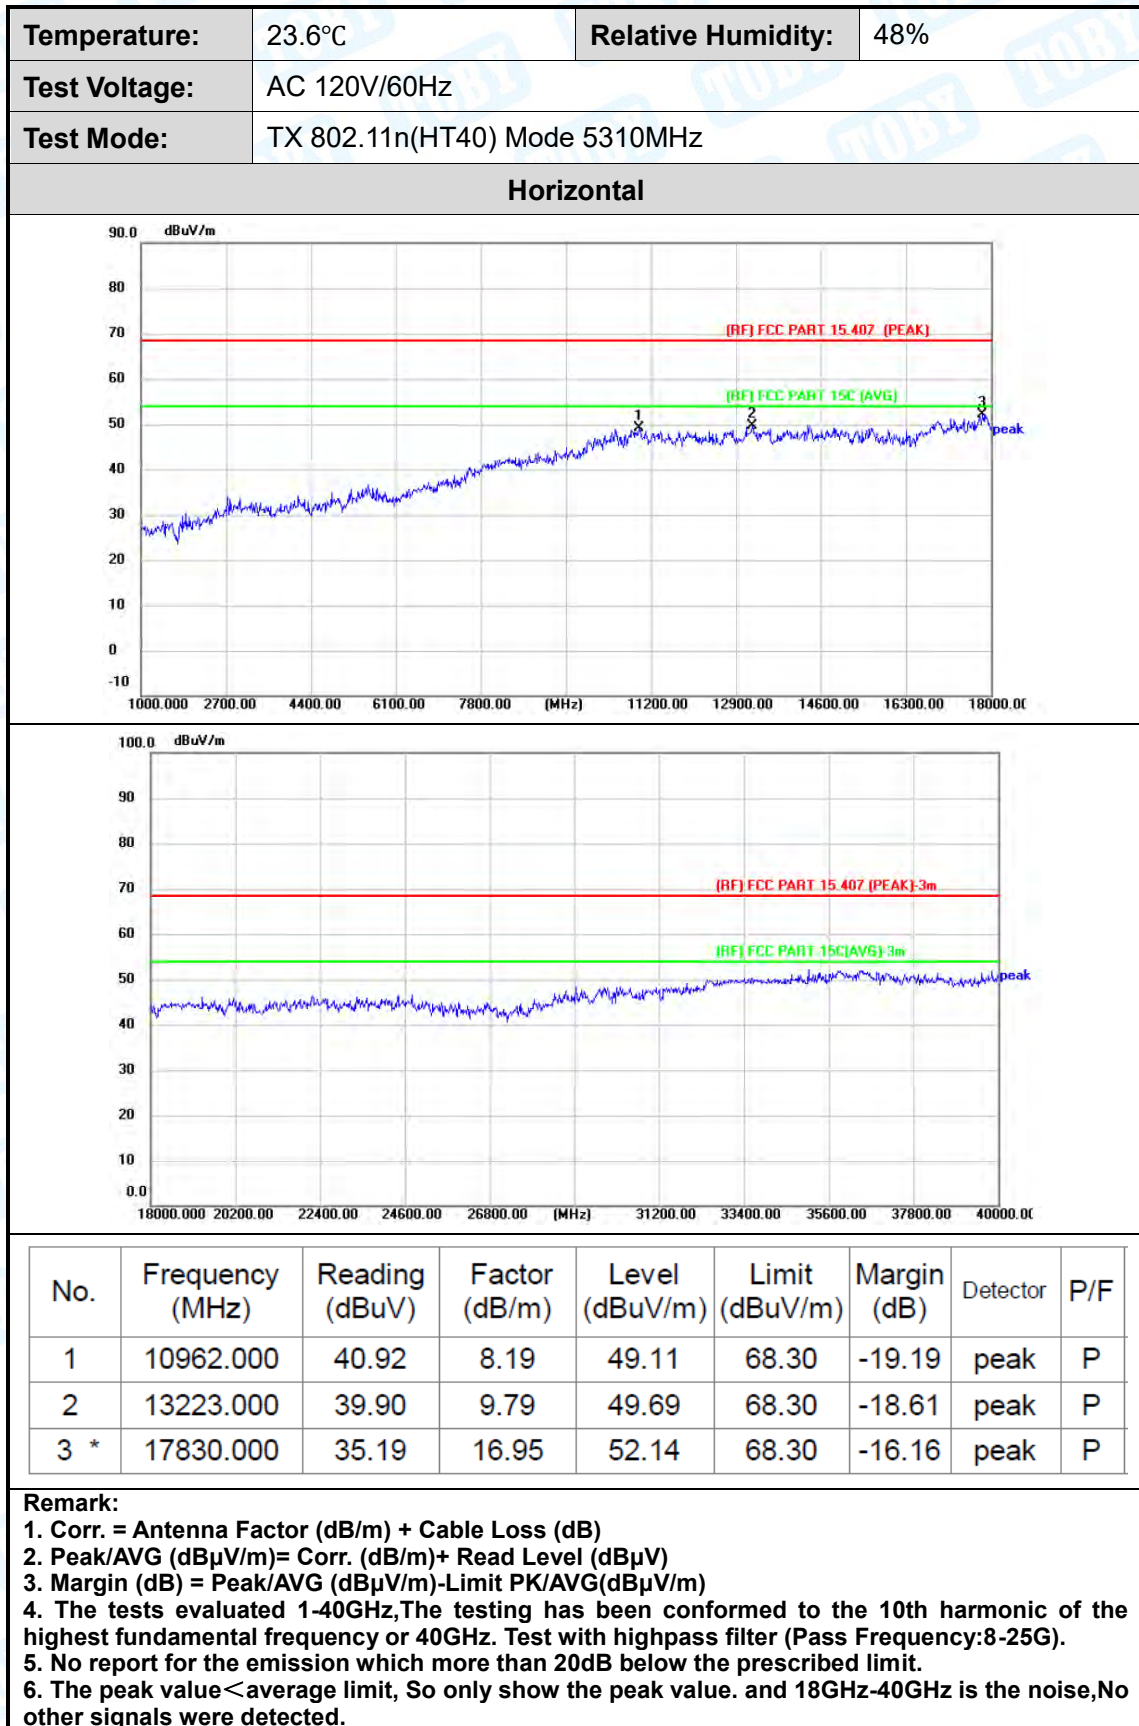


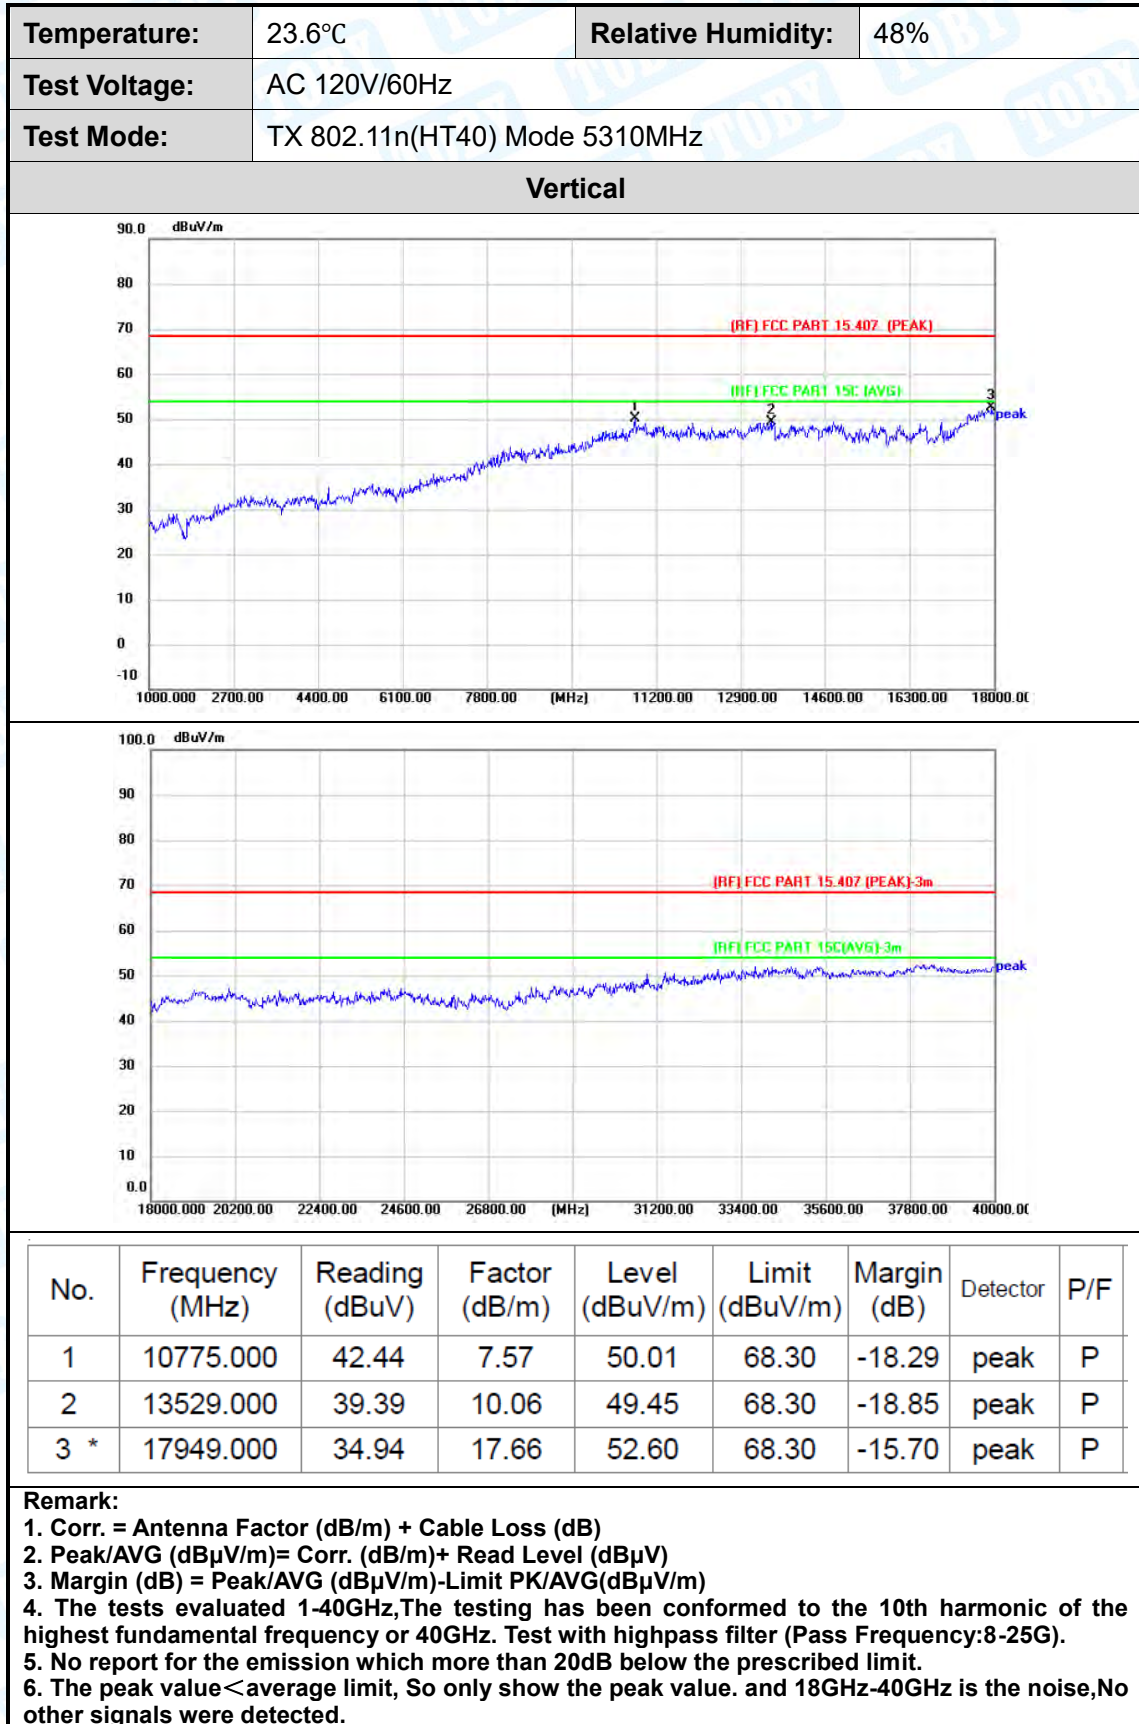


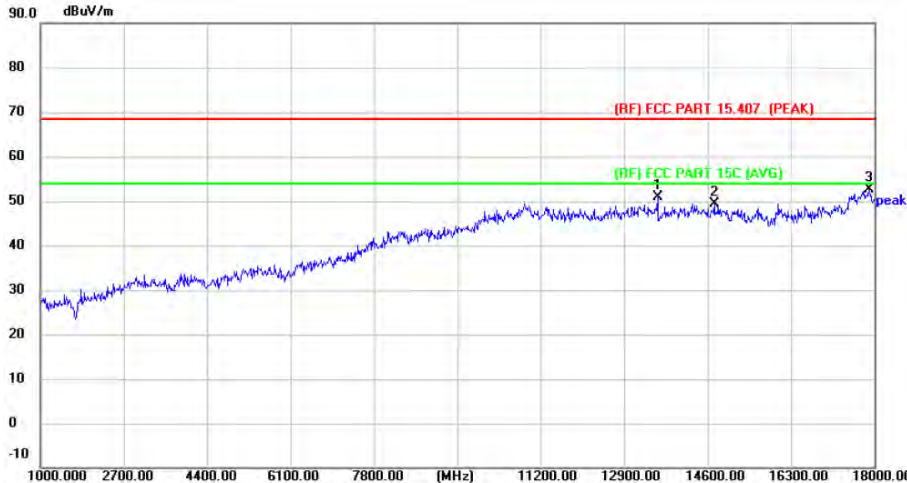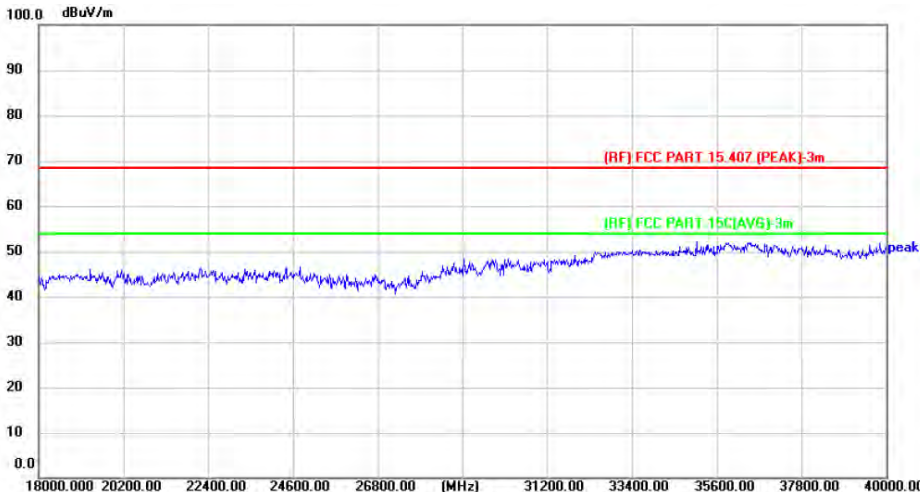
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13580.000	40.88	9.97	50.85	68.30	-17.45	peak	P
2	14736.000	38.70	10.77	49.47	68.30	-18.83	peak	P
3 *	17898.000	35.16	17.50	52.66	68.30	-15.64	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								




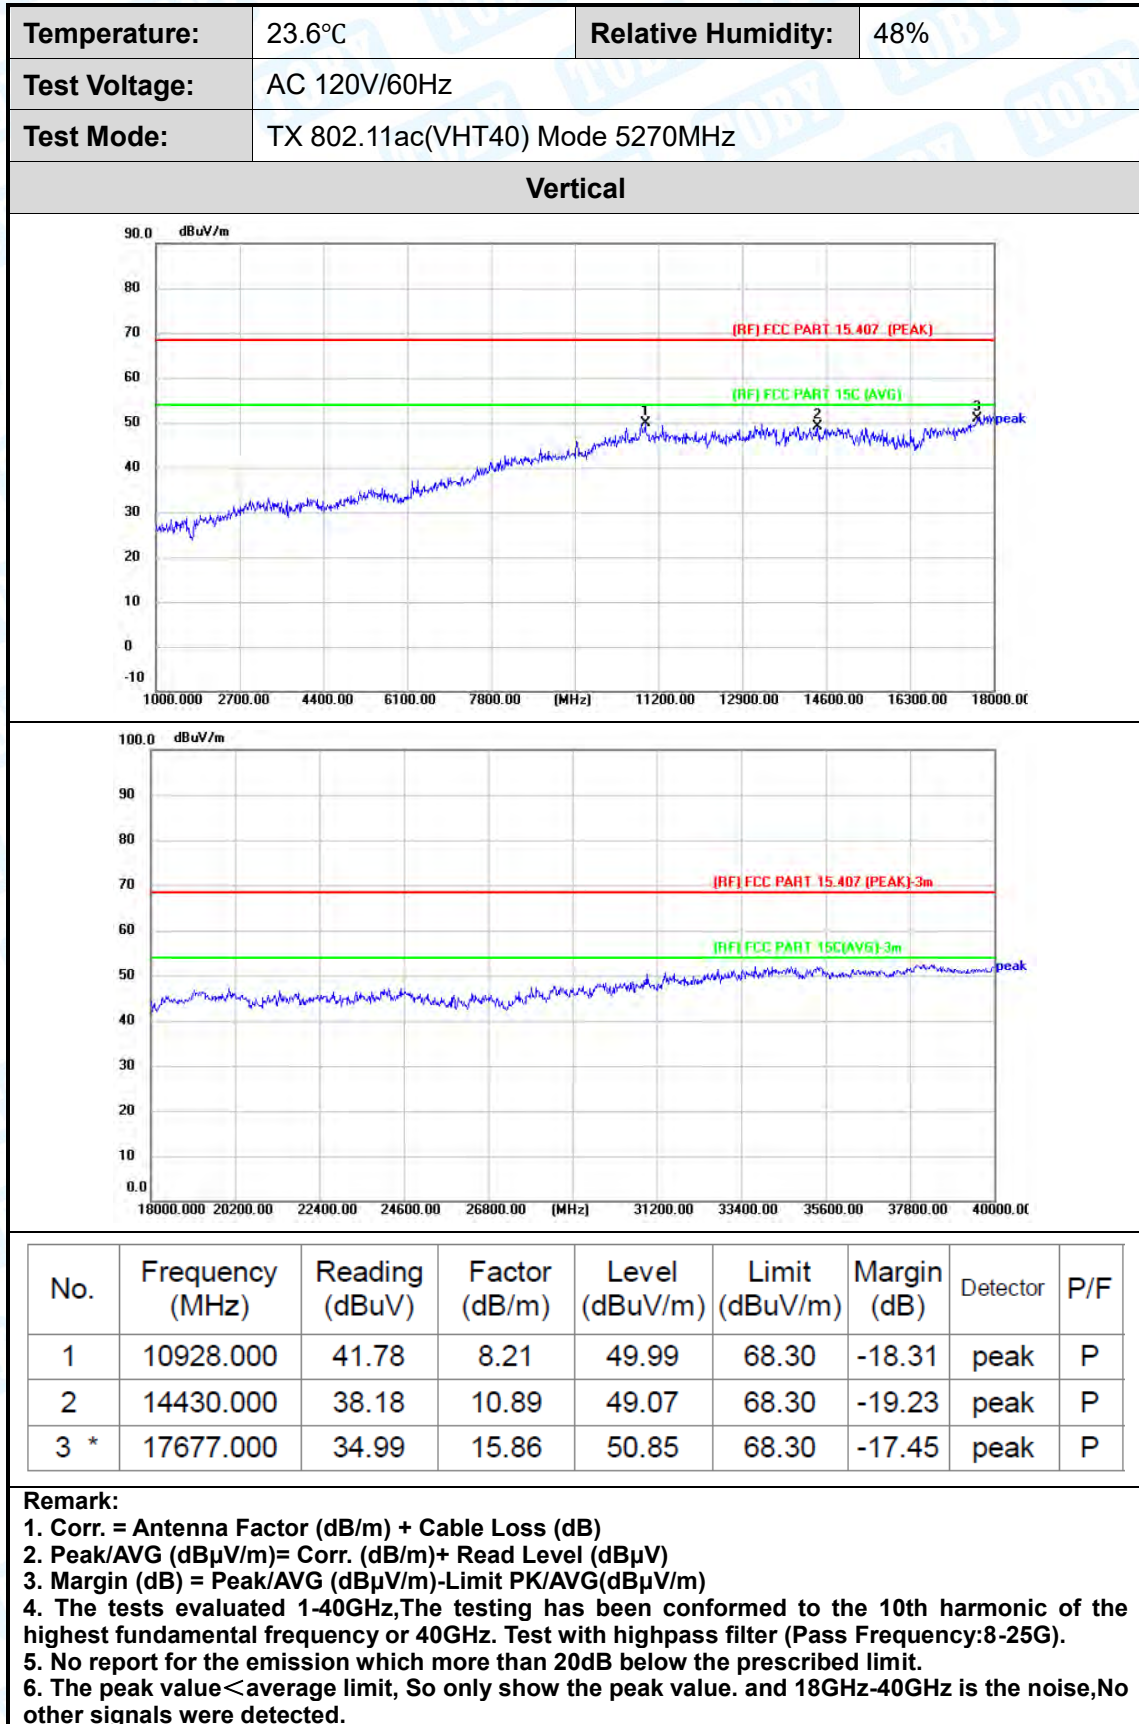


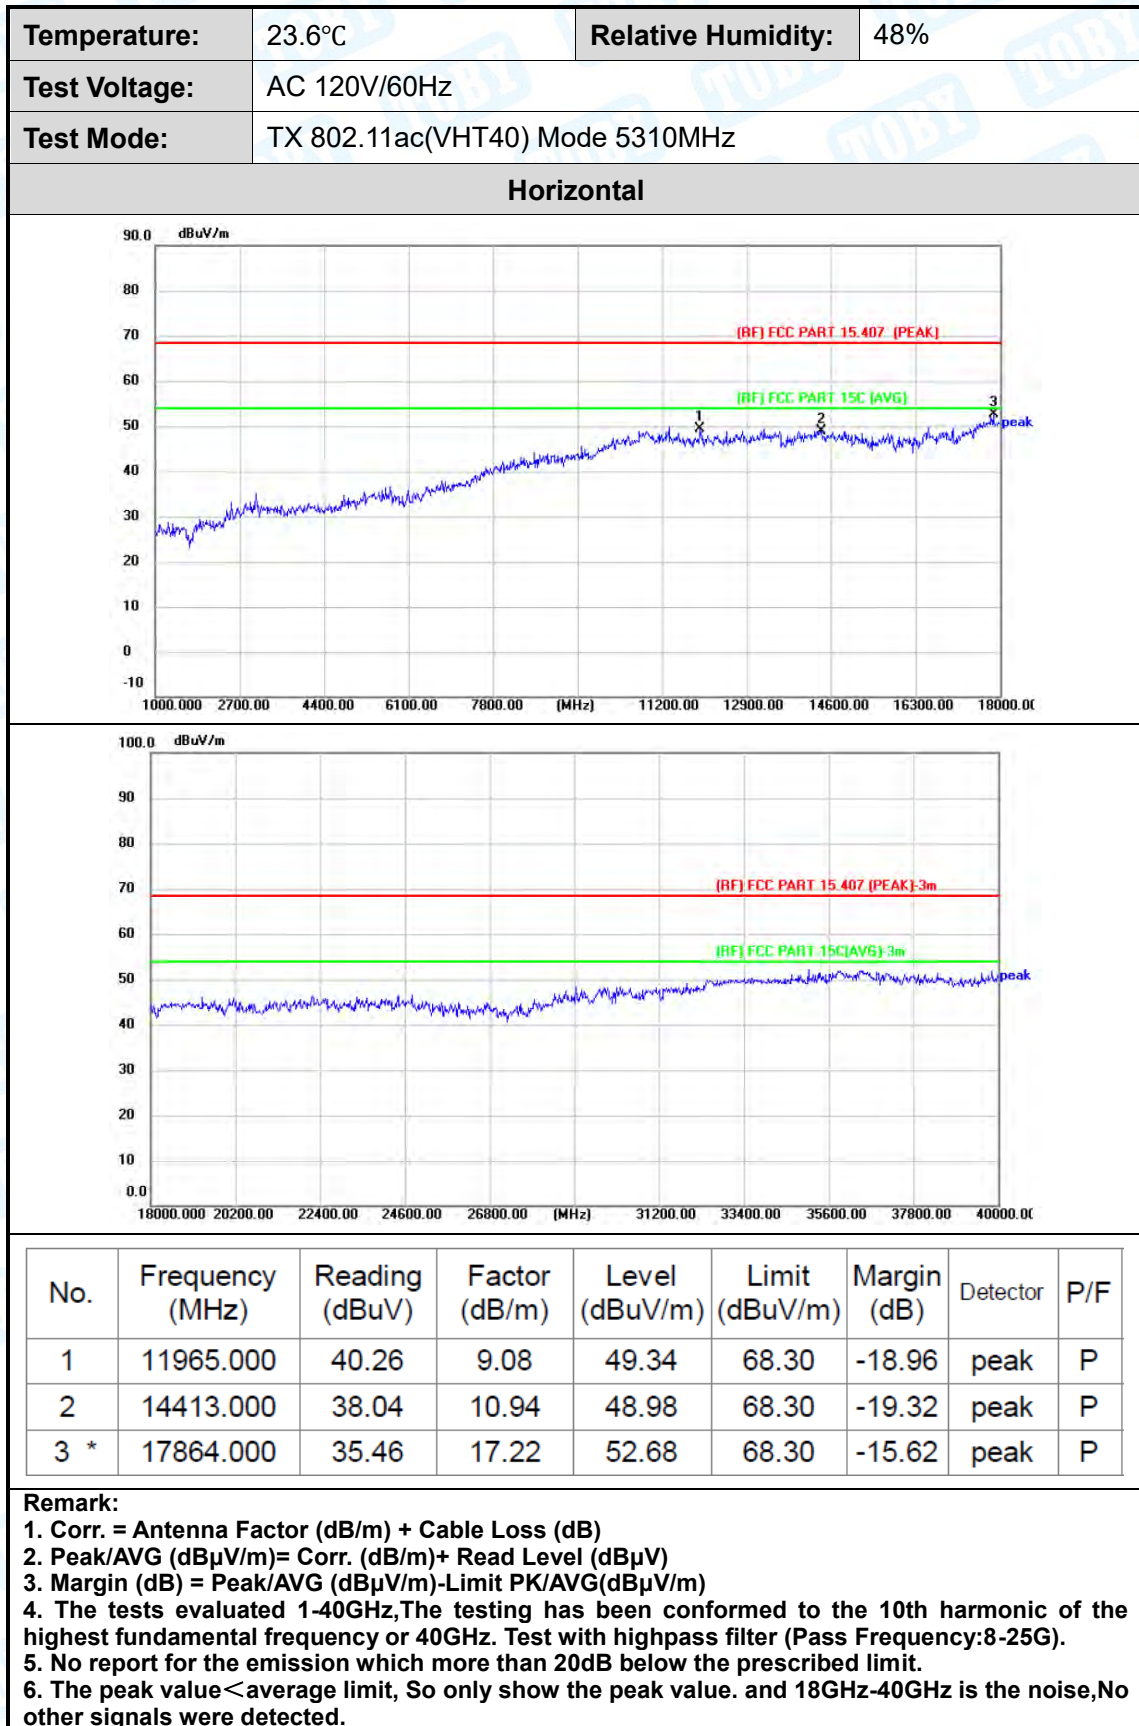


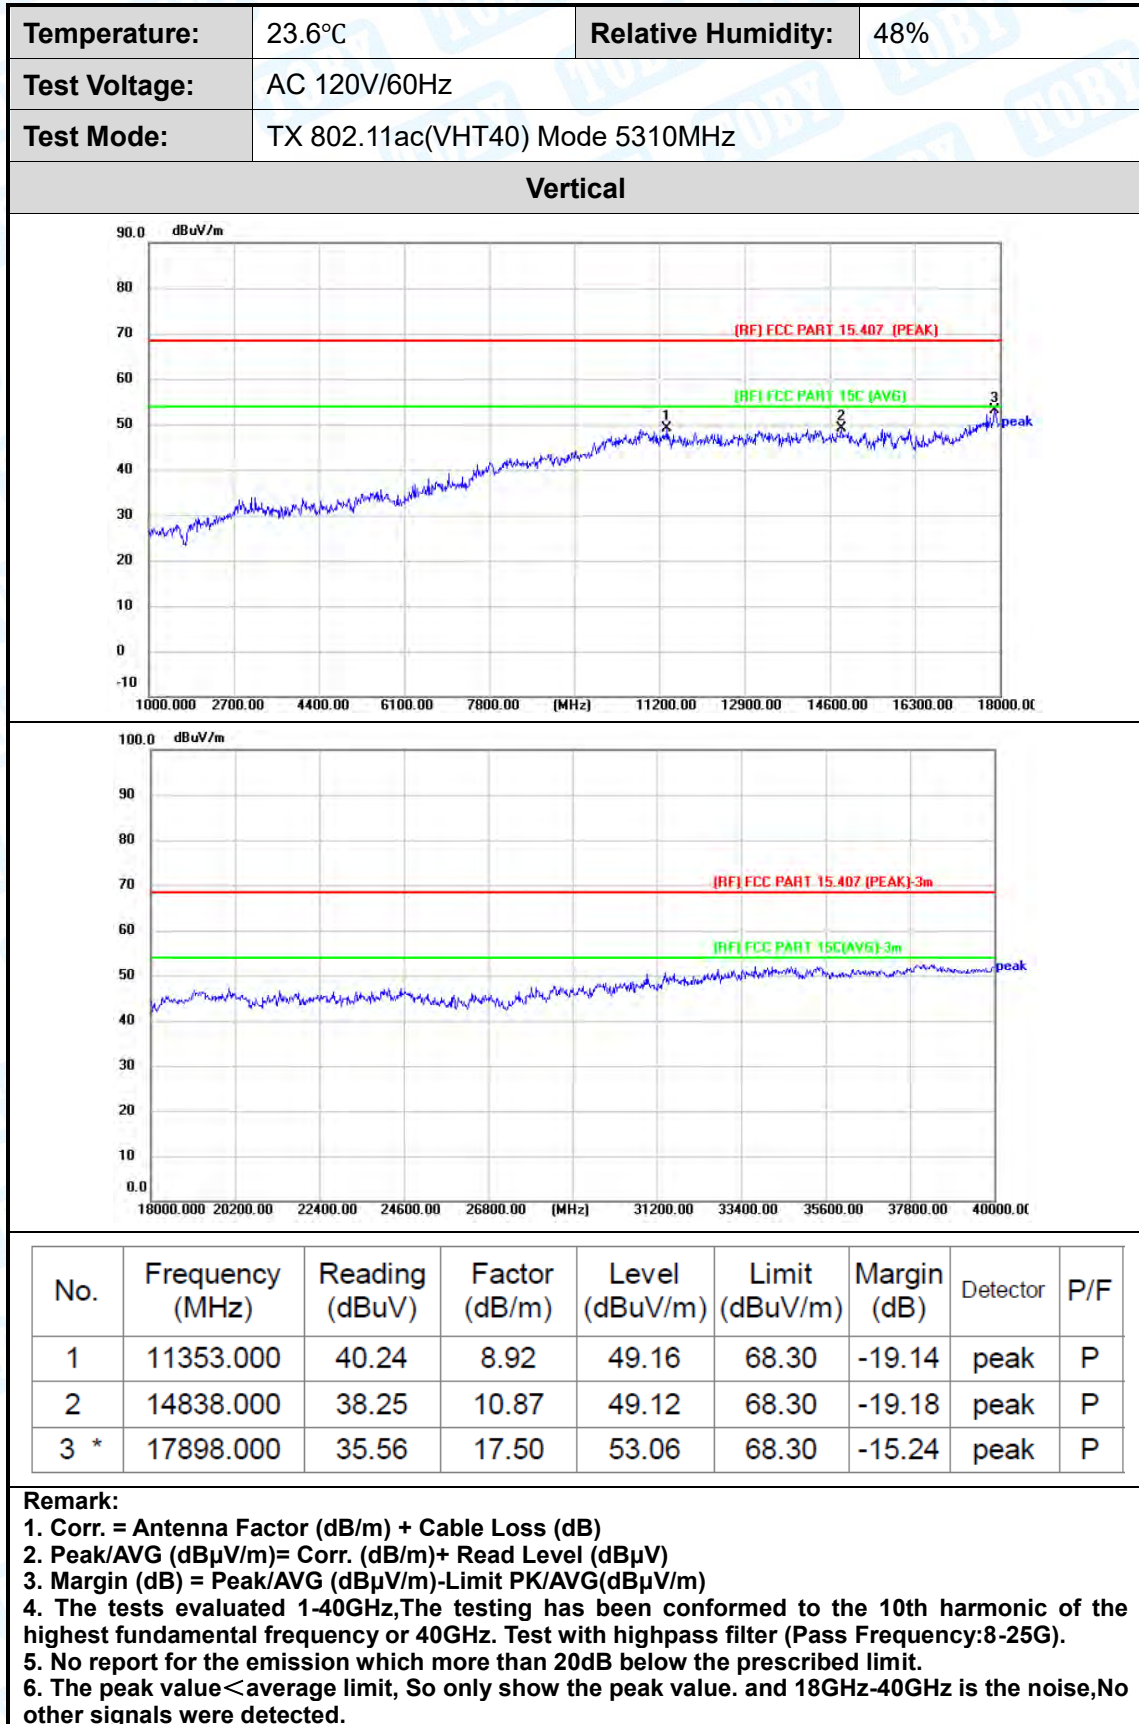


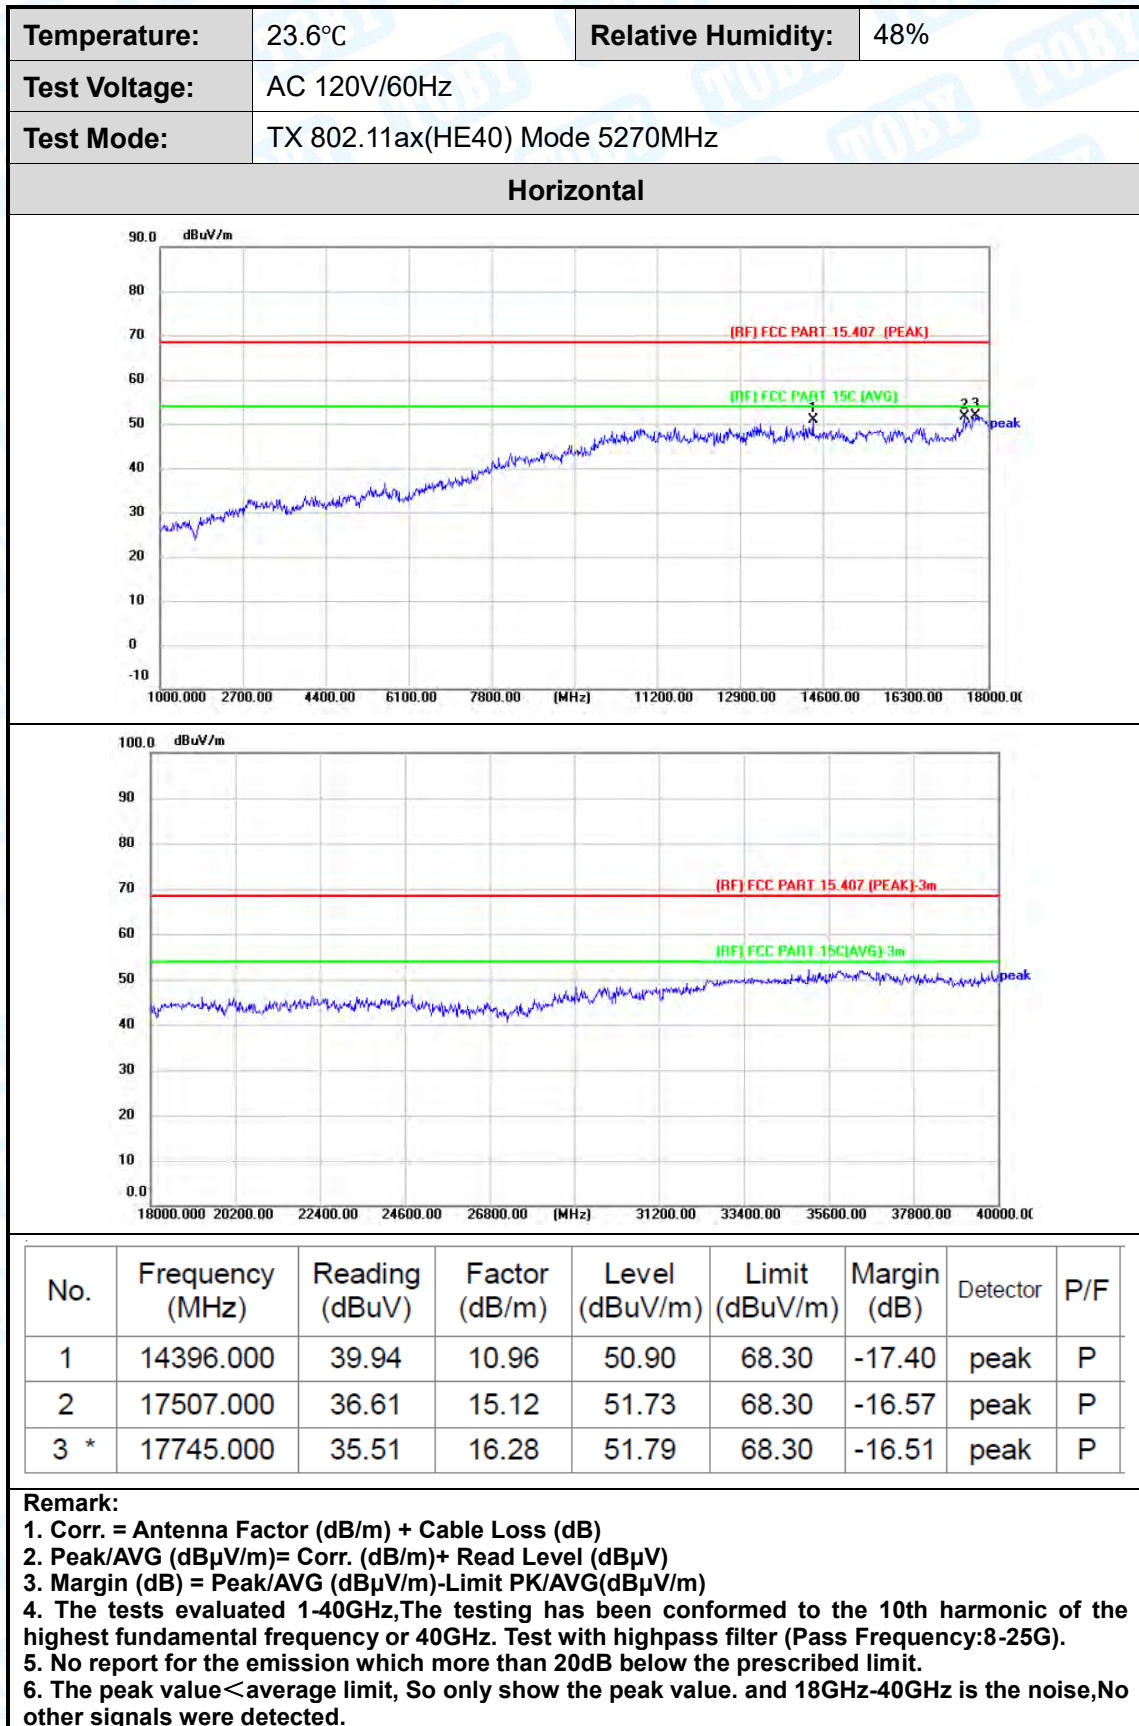


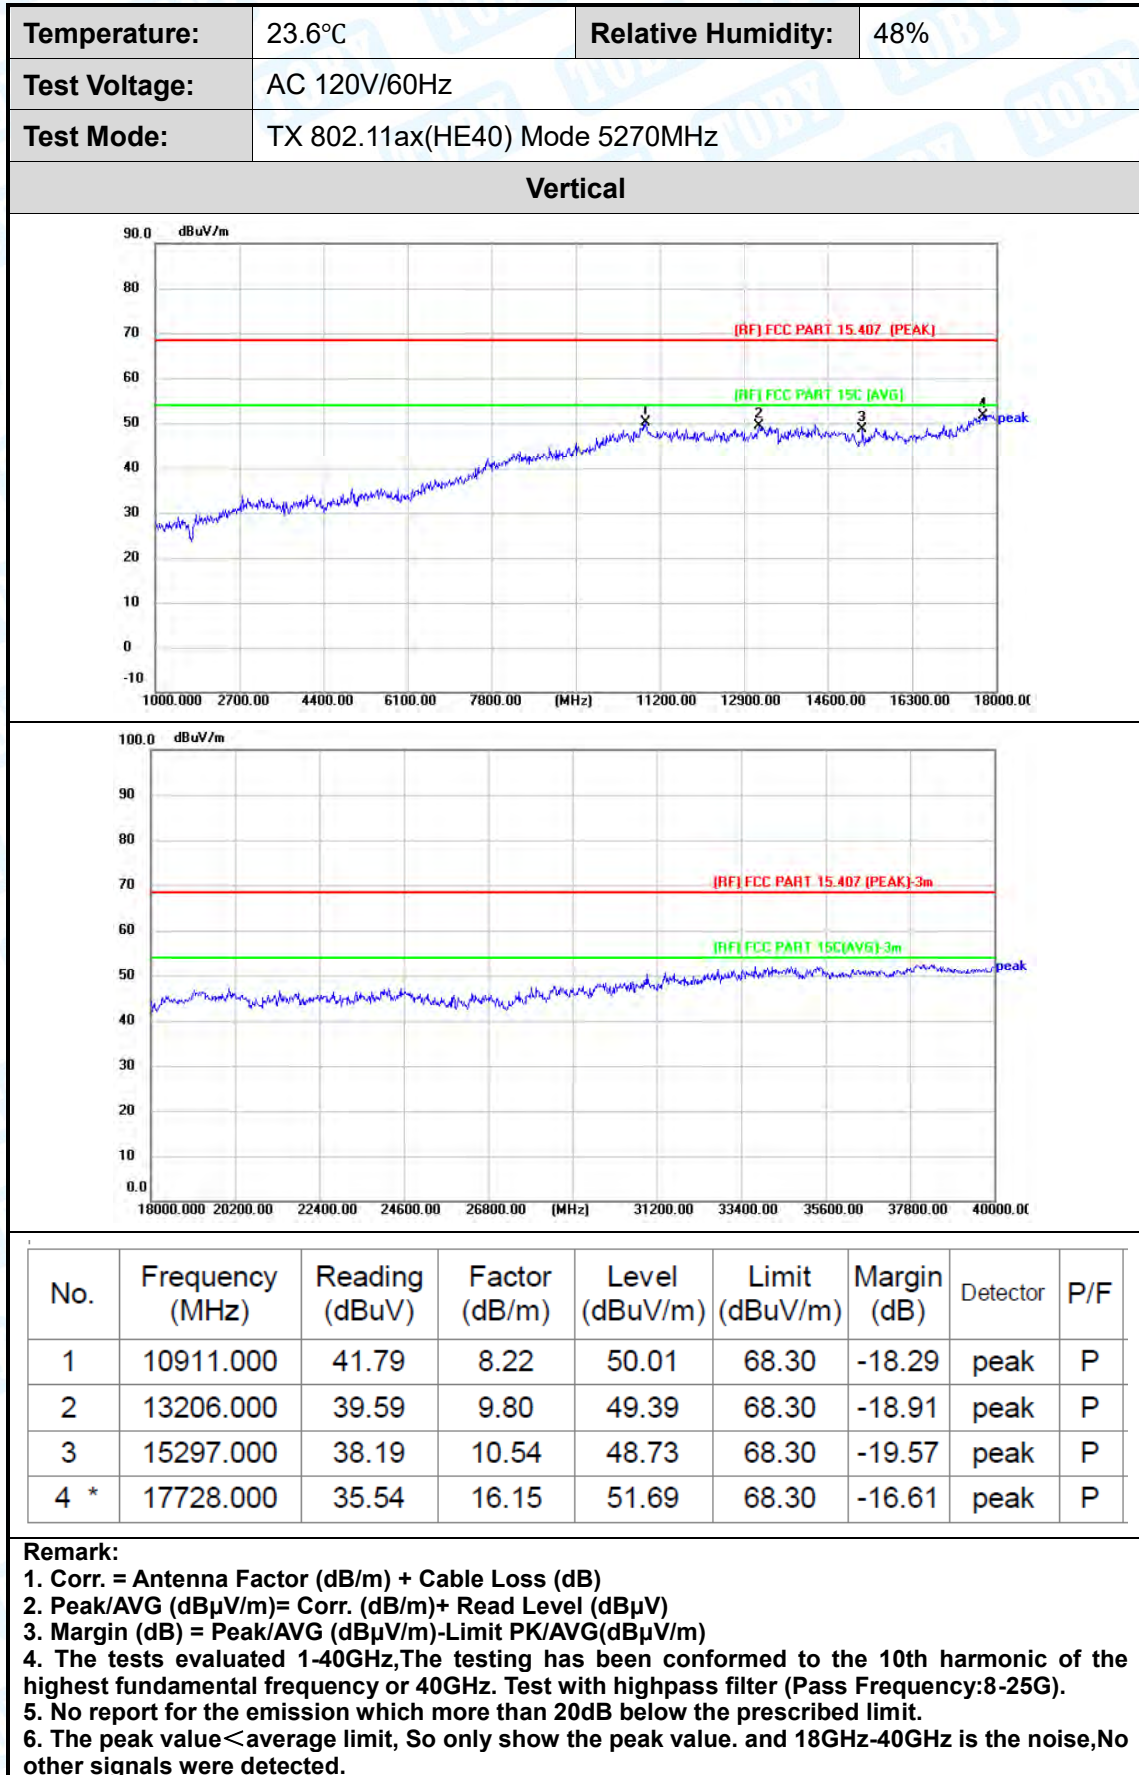


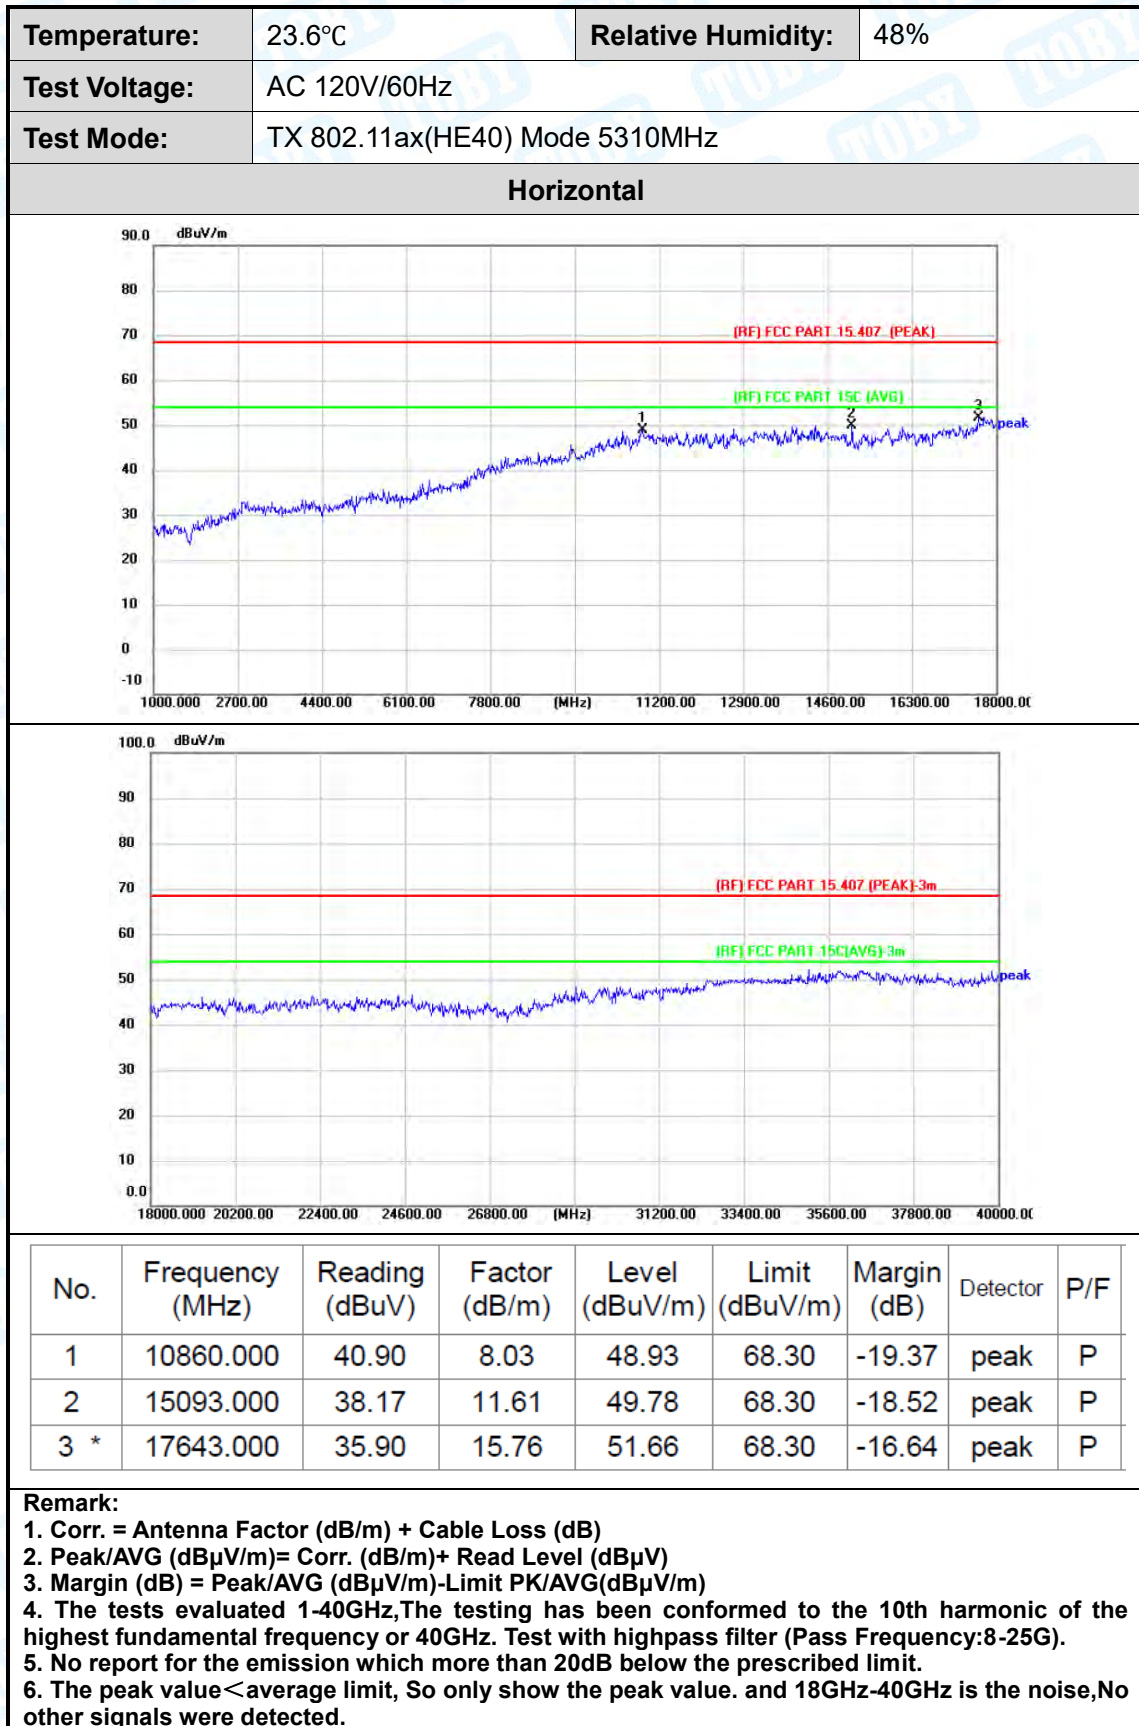



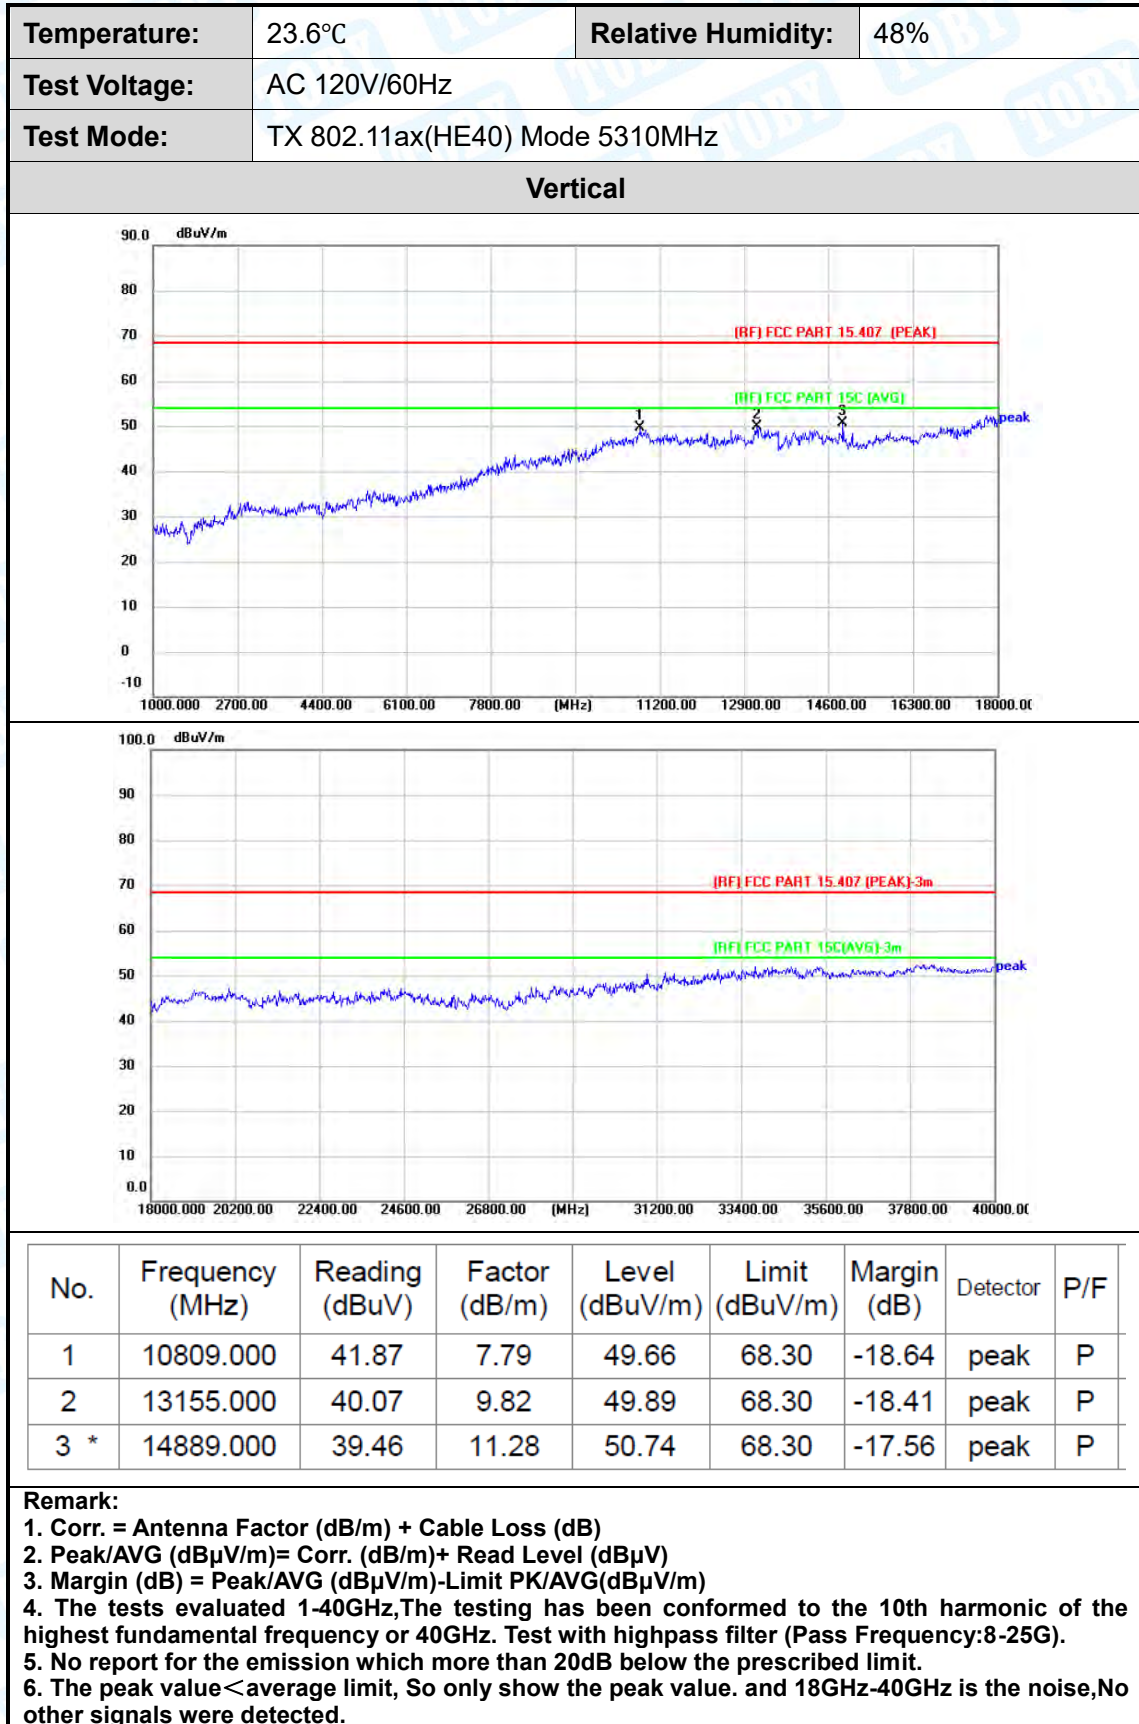


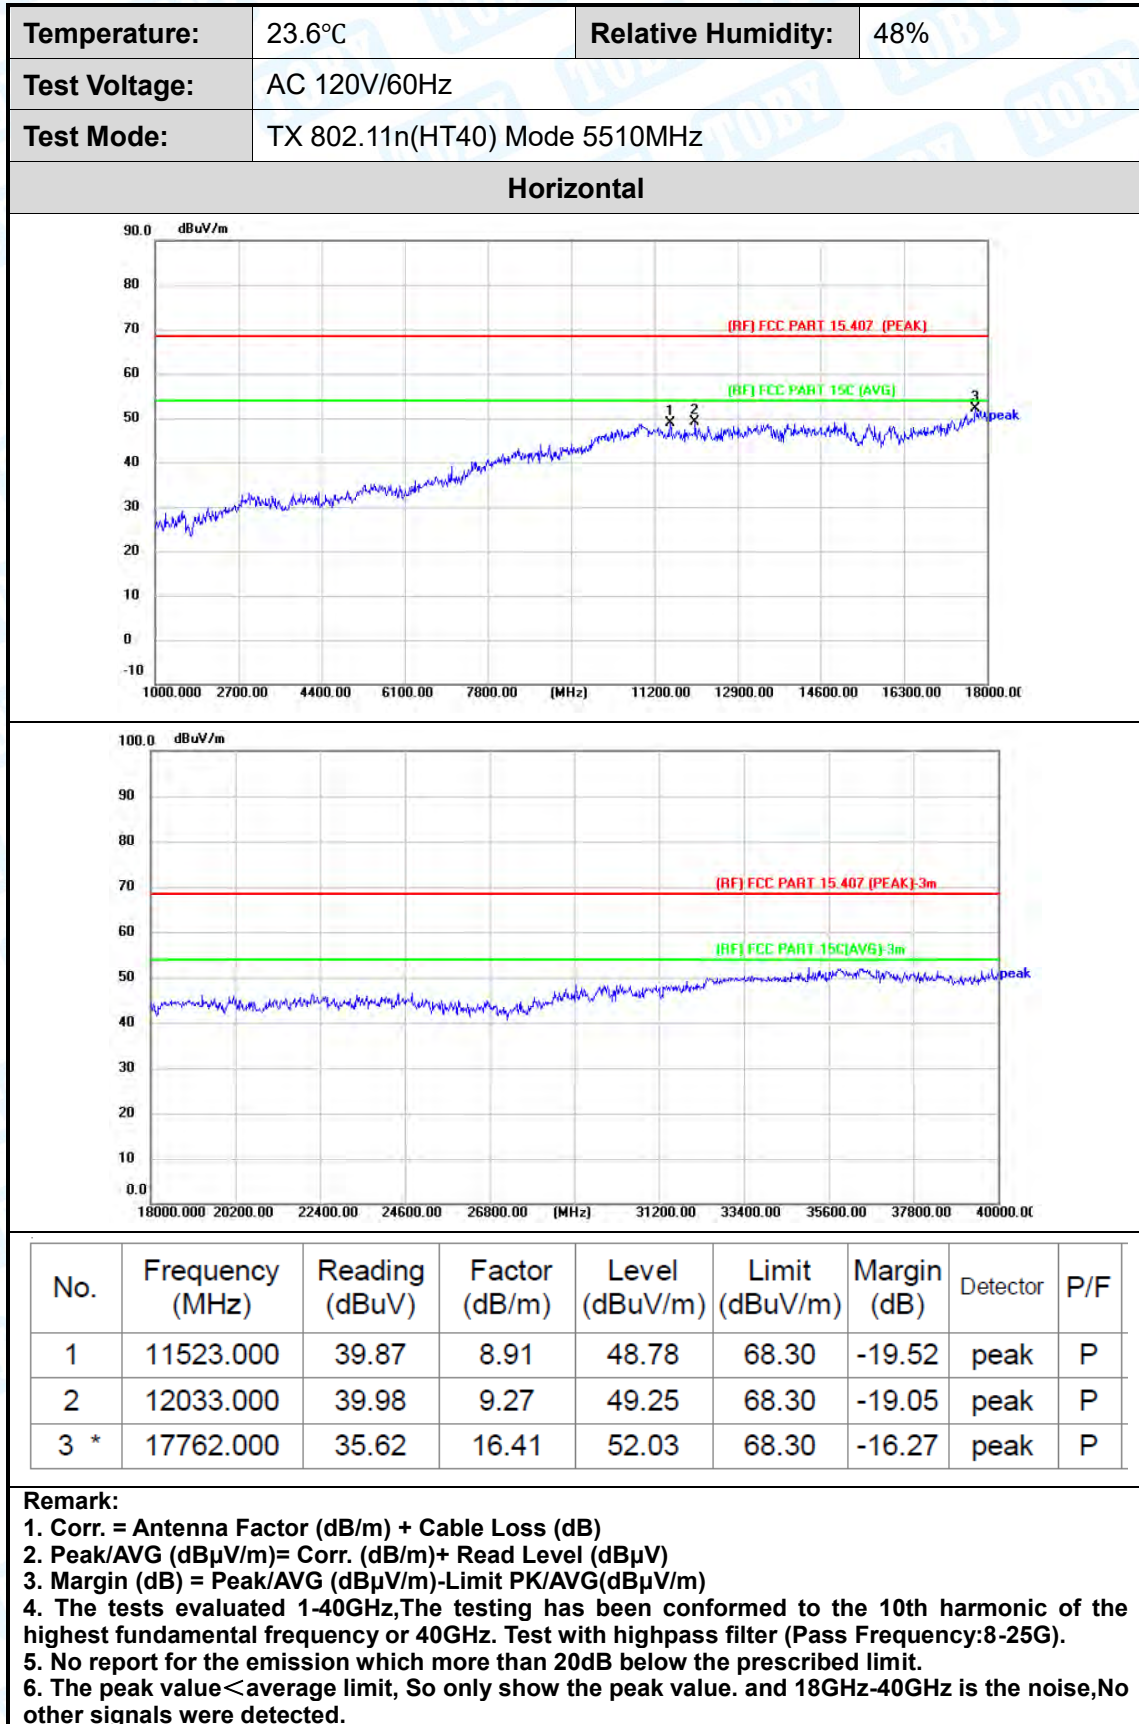

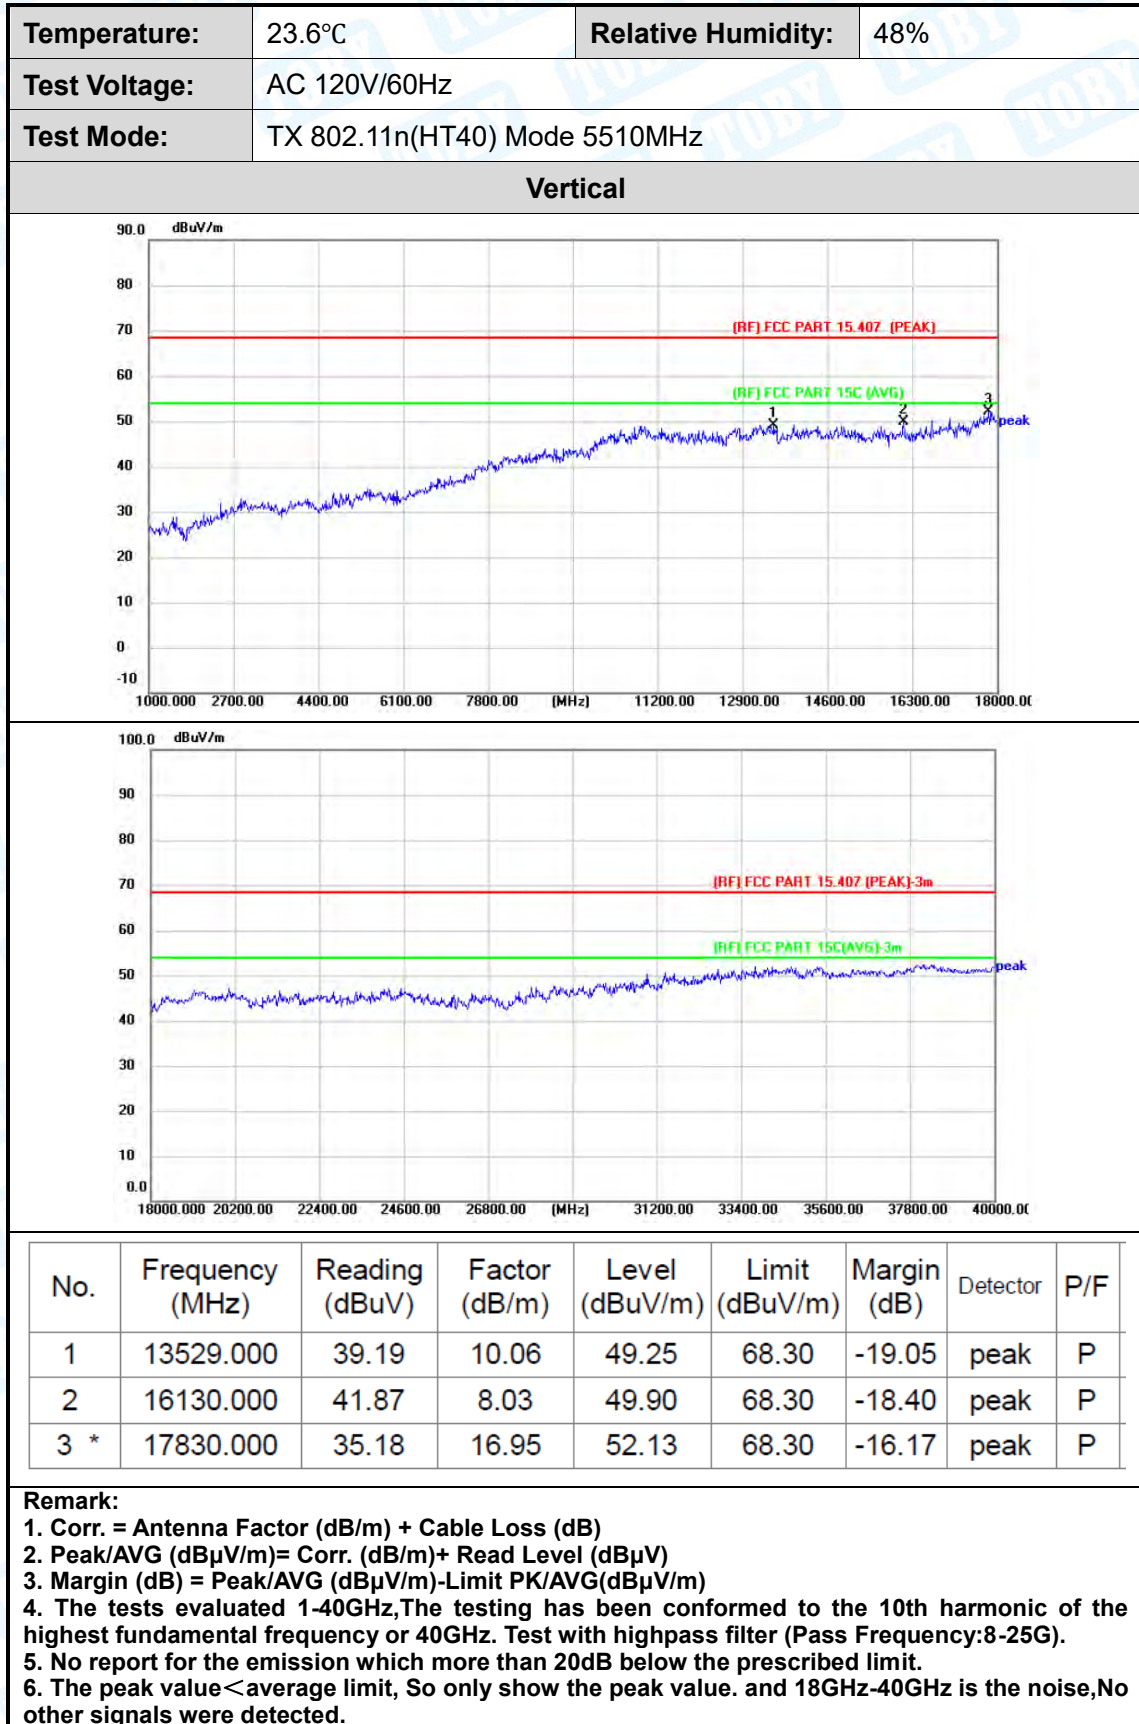


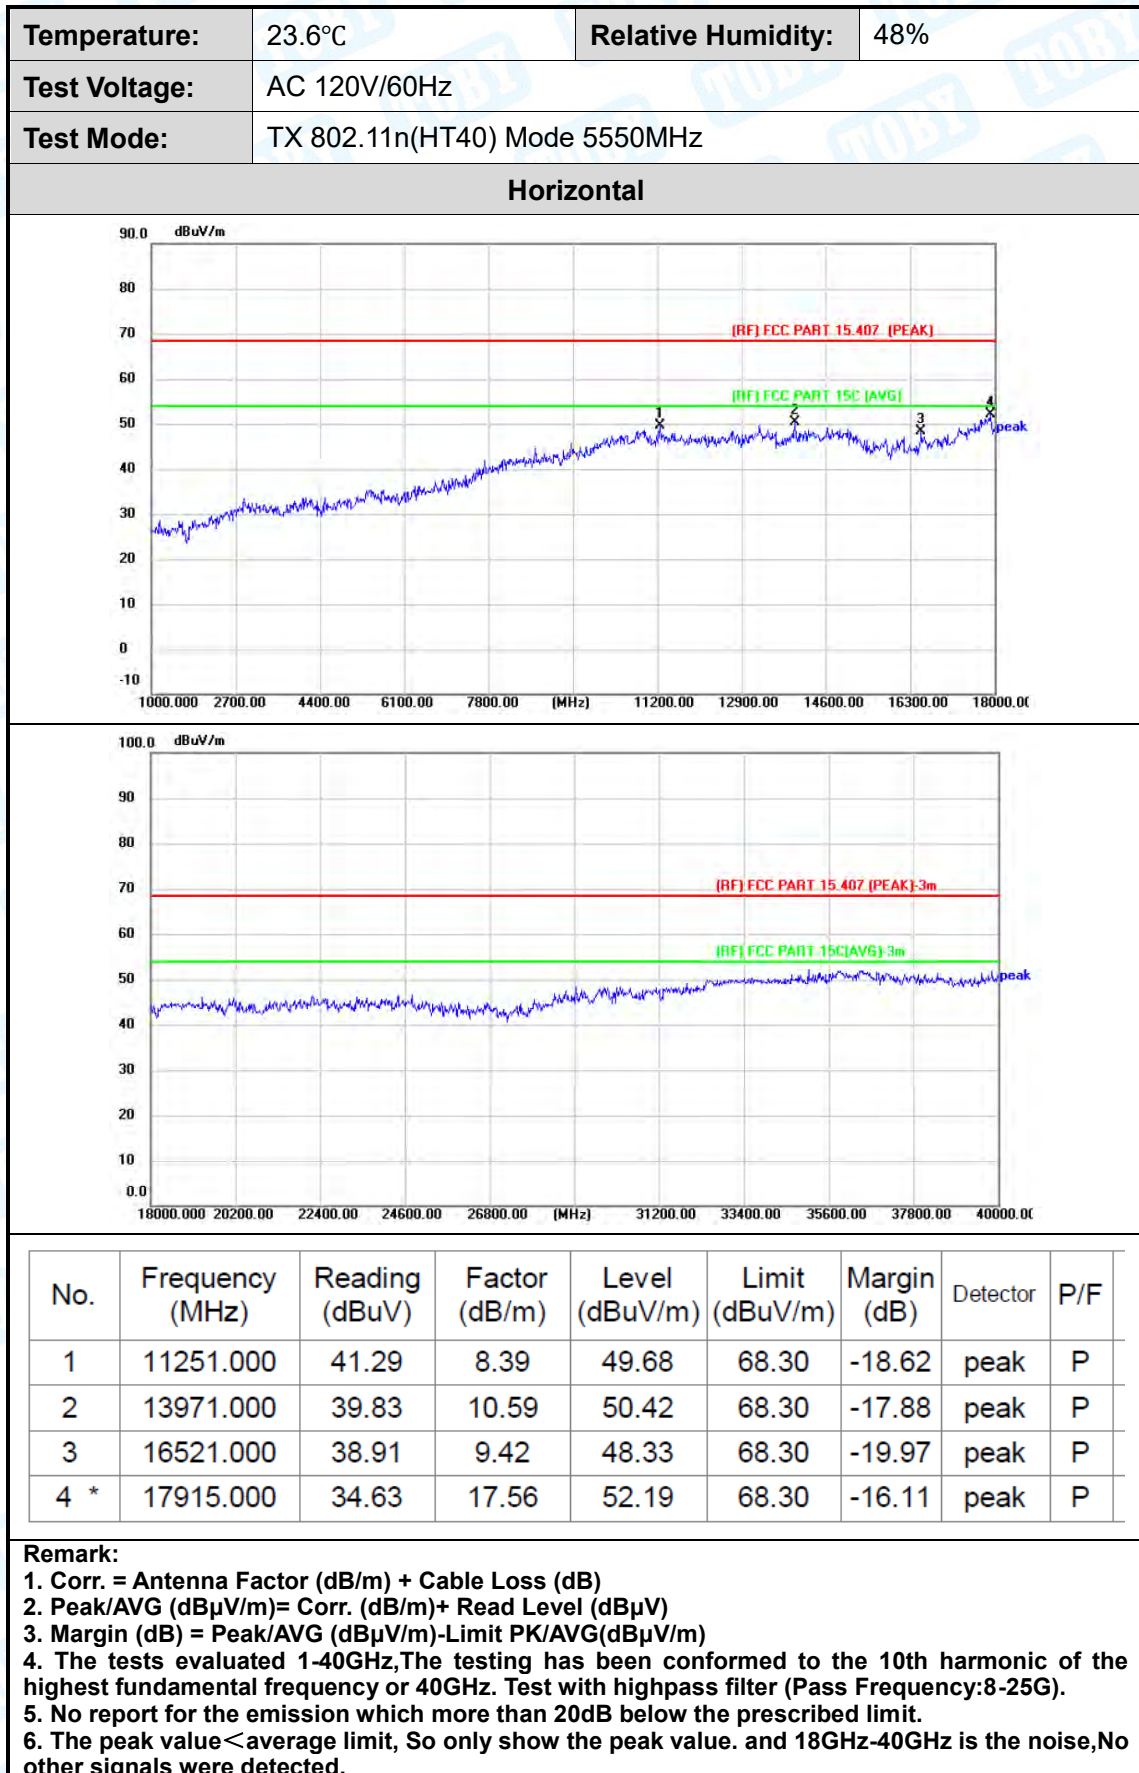


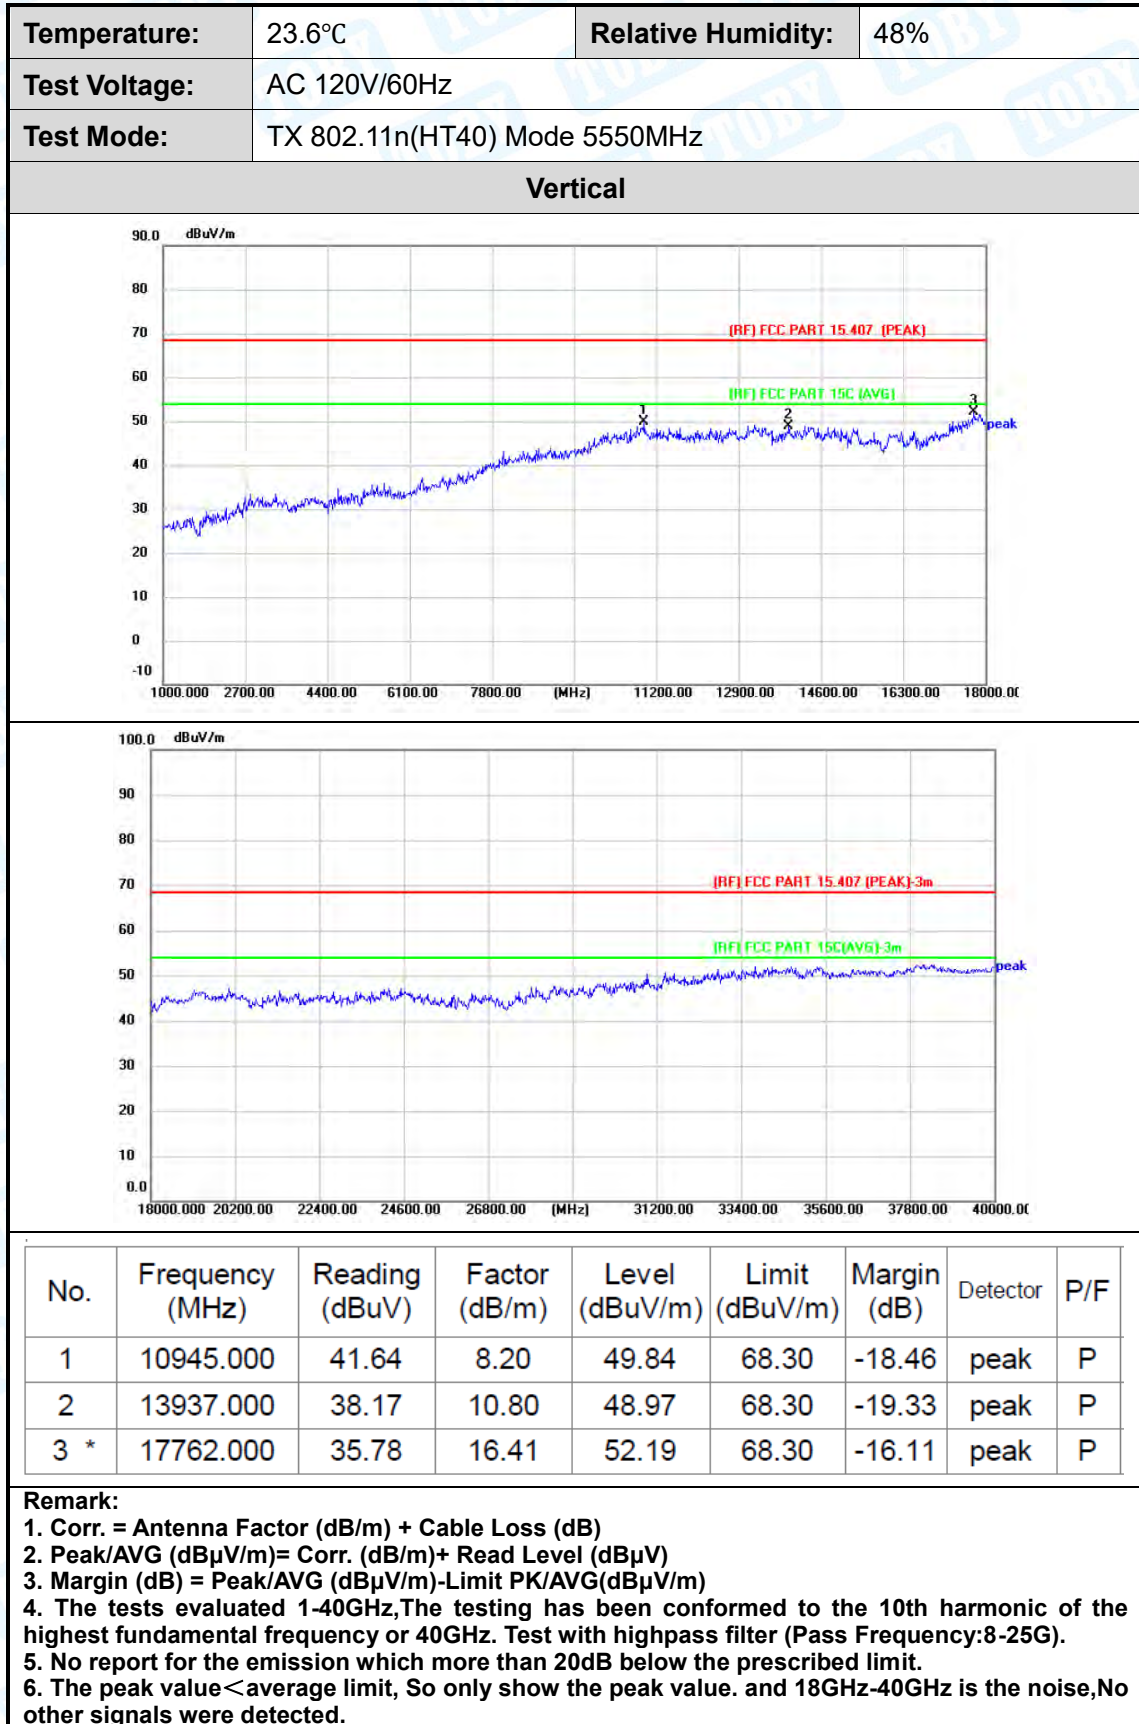


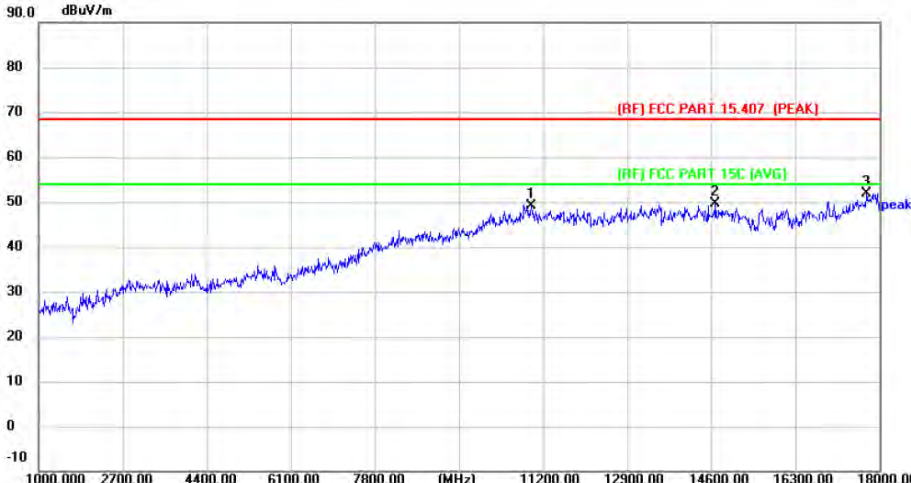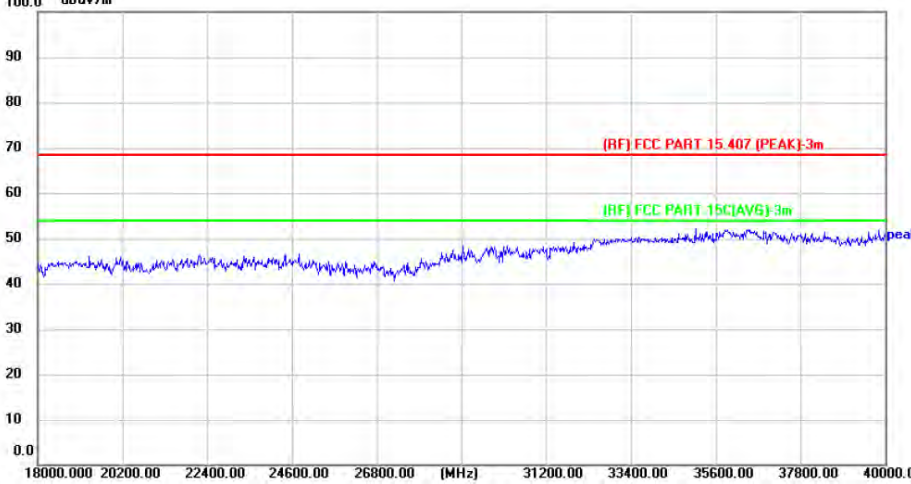
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11n(HT40) Mode 5710MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10962.000	40.93	8.19	49.12	68.30	-19.18	peak	P
2	14685.000	38.82	10.89	49.71	68.30	-18.59	peak	P
3 *	17745.000	35.55	16.28	51.83	68.30	-16.47	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								




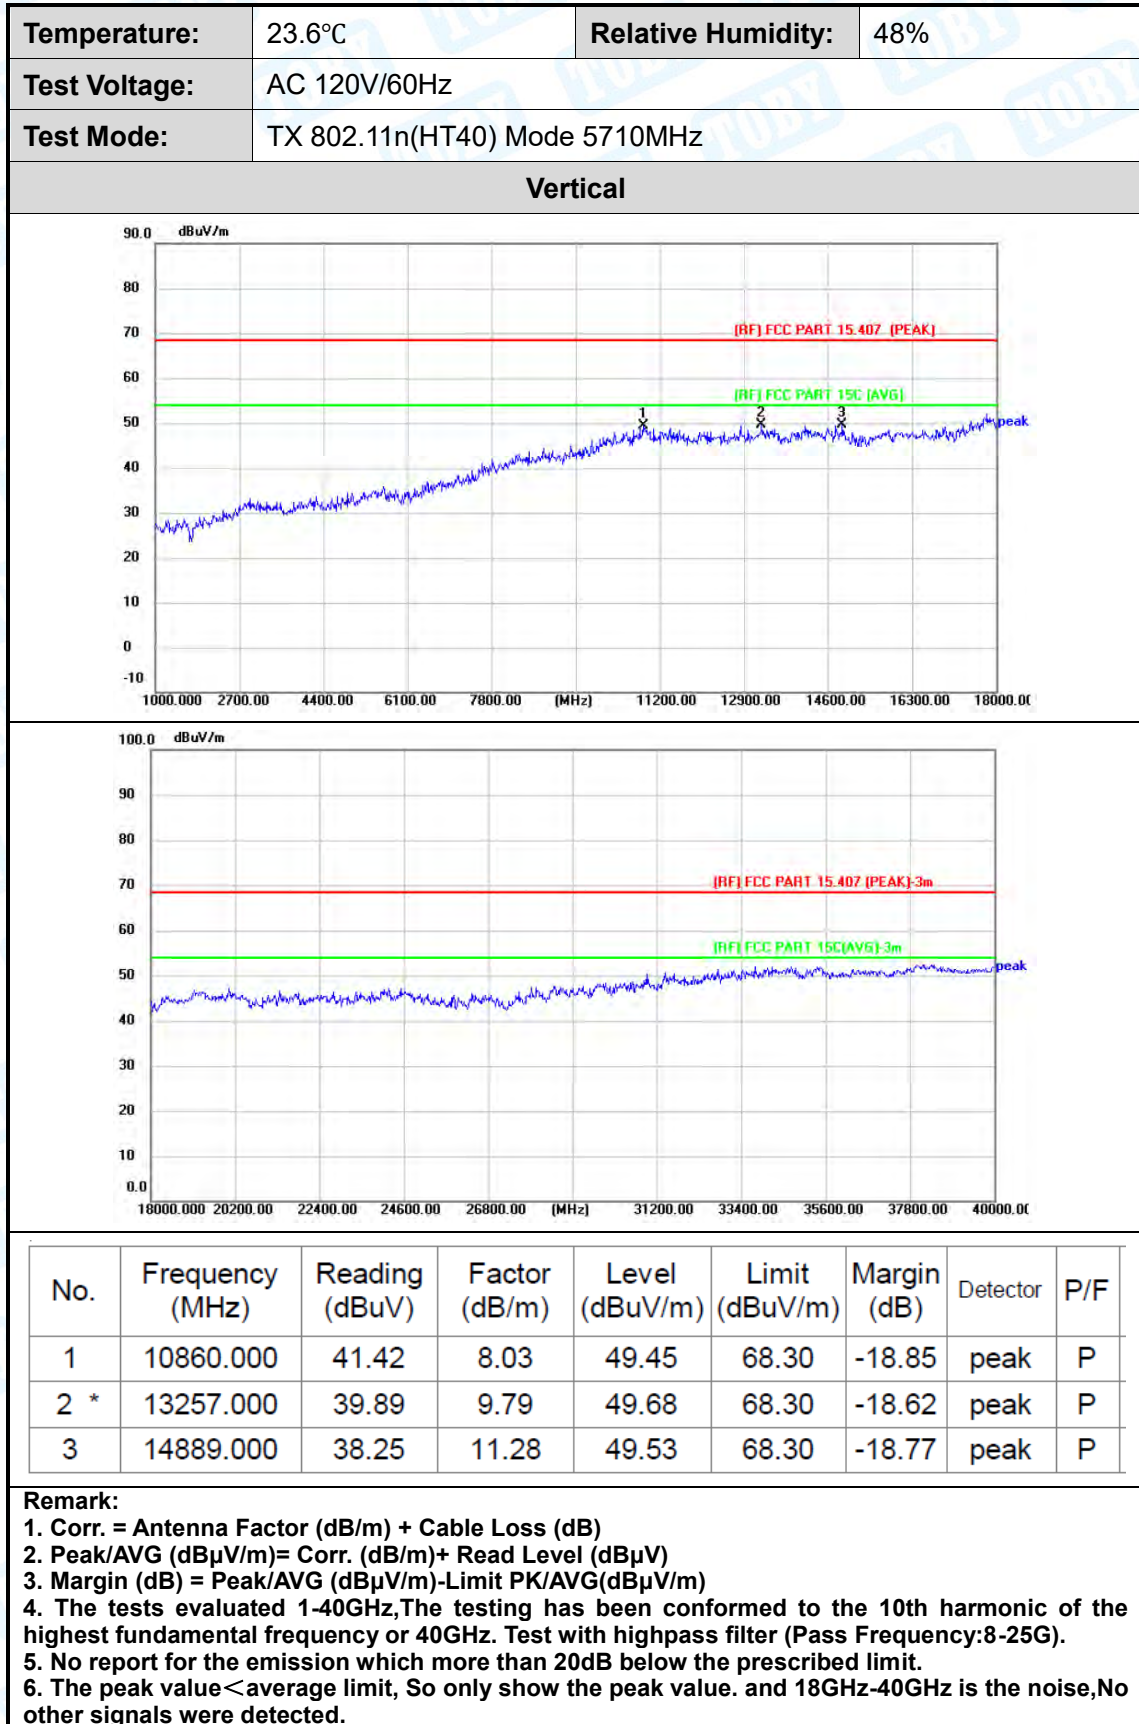


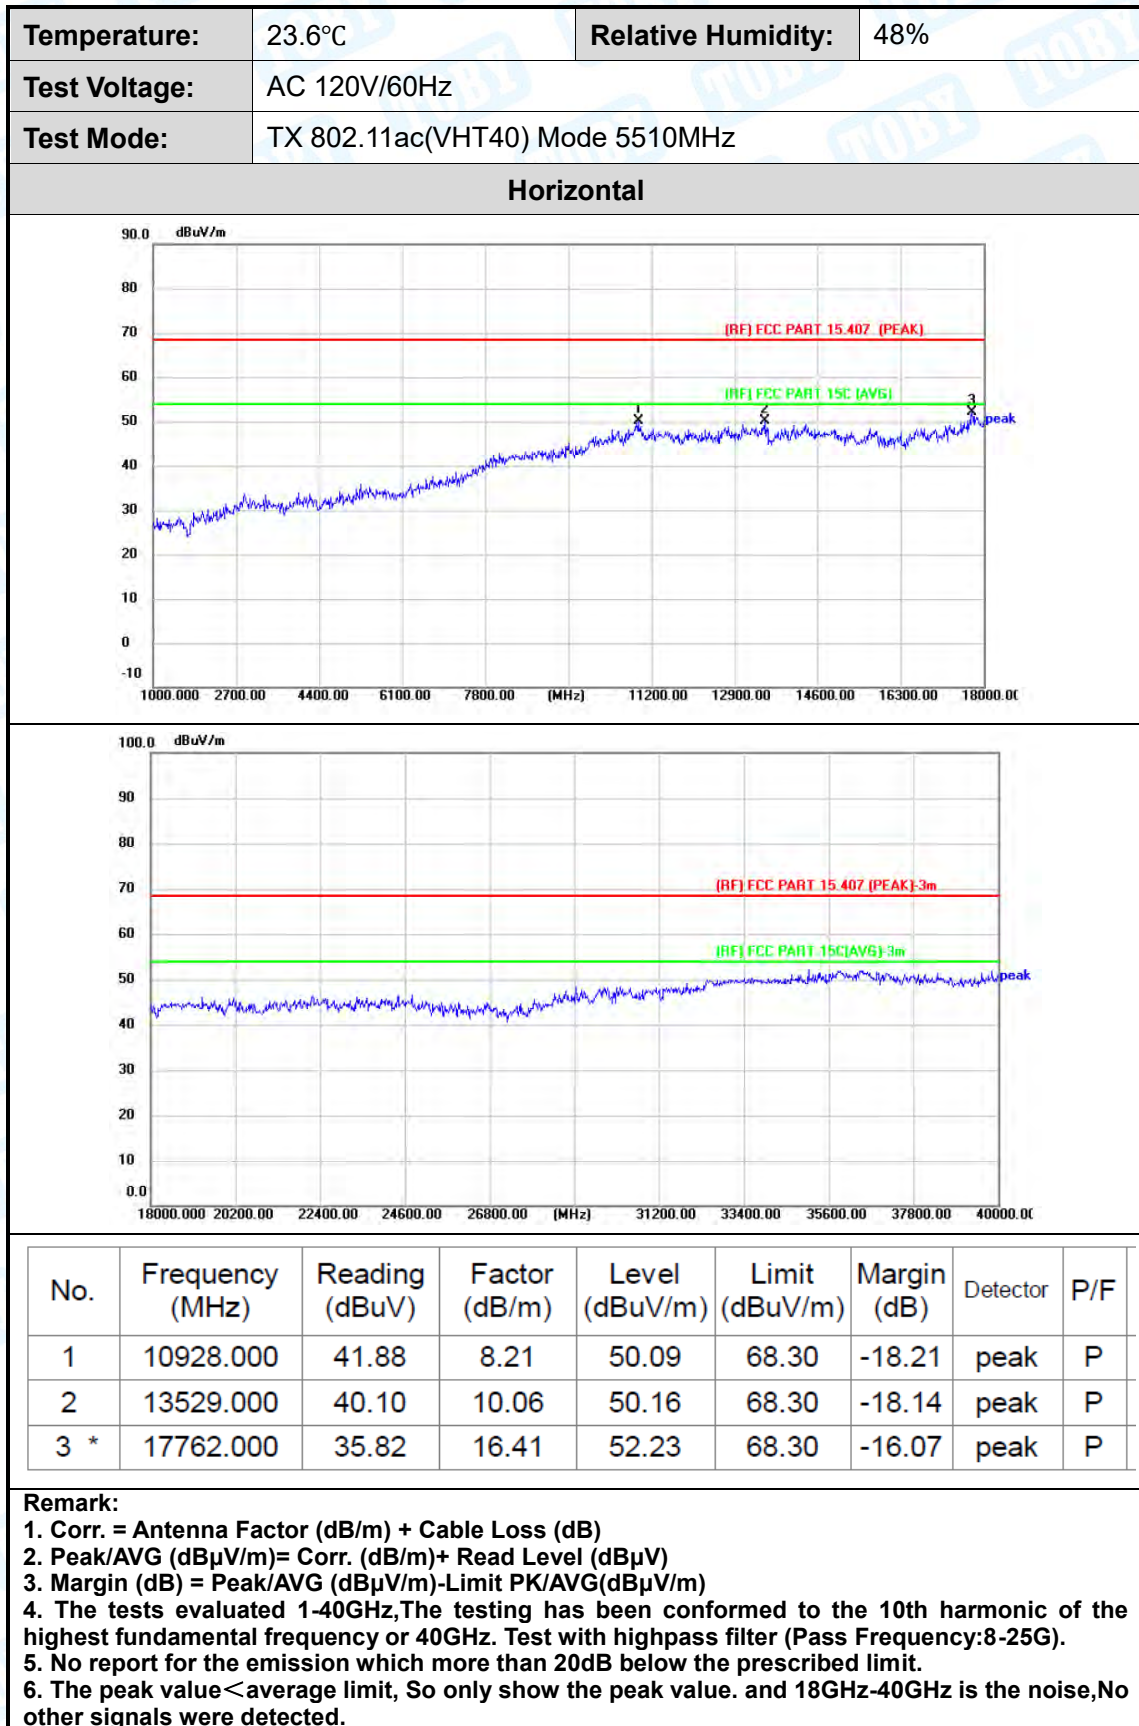


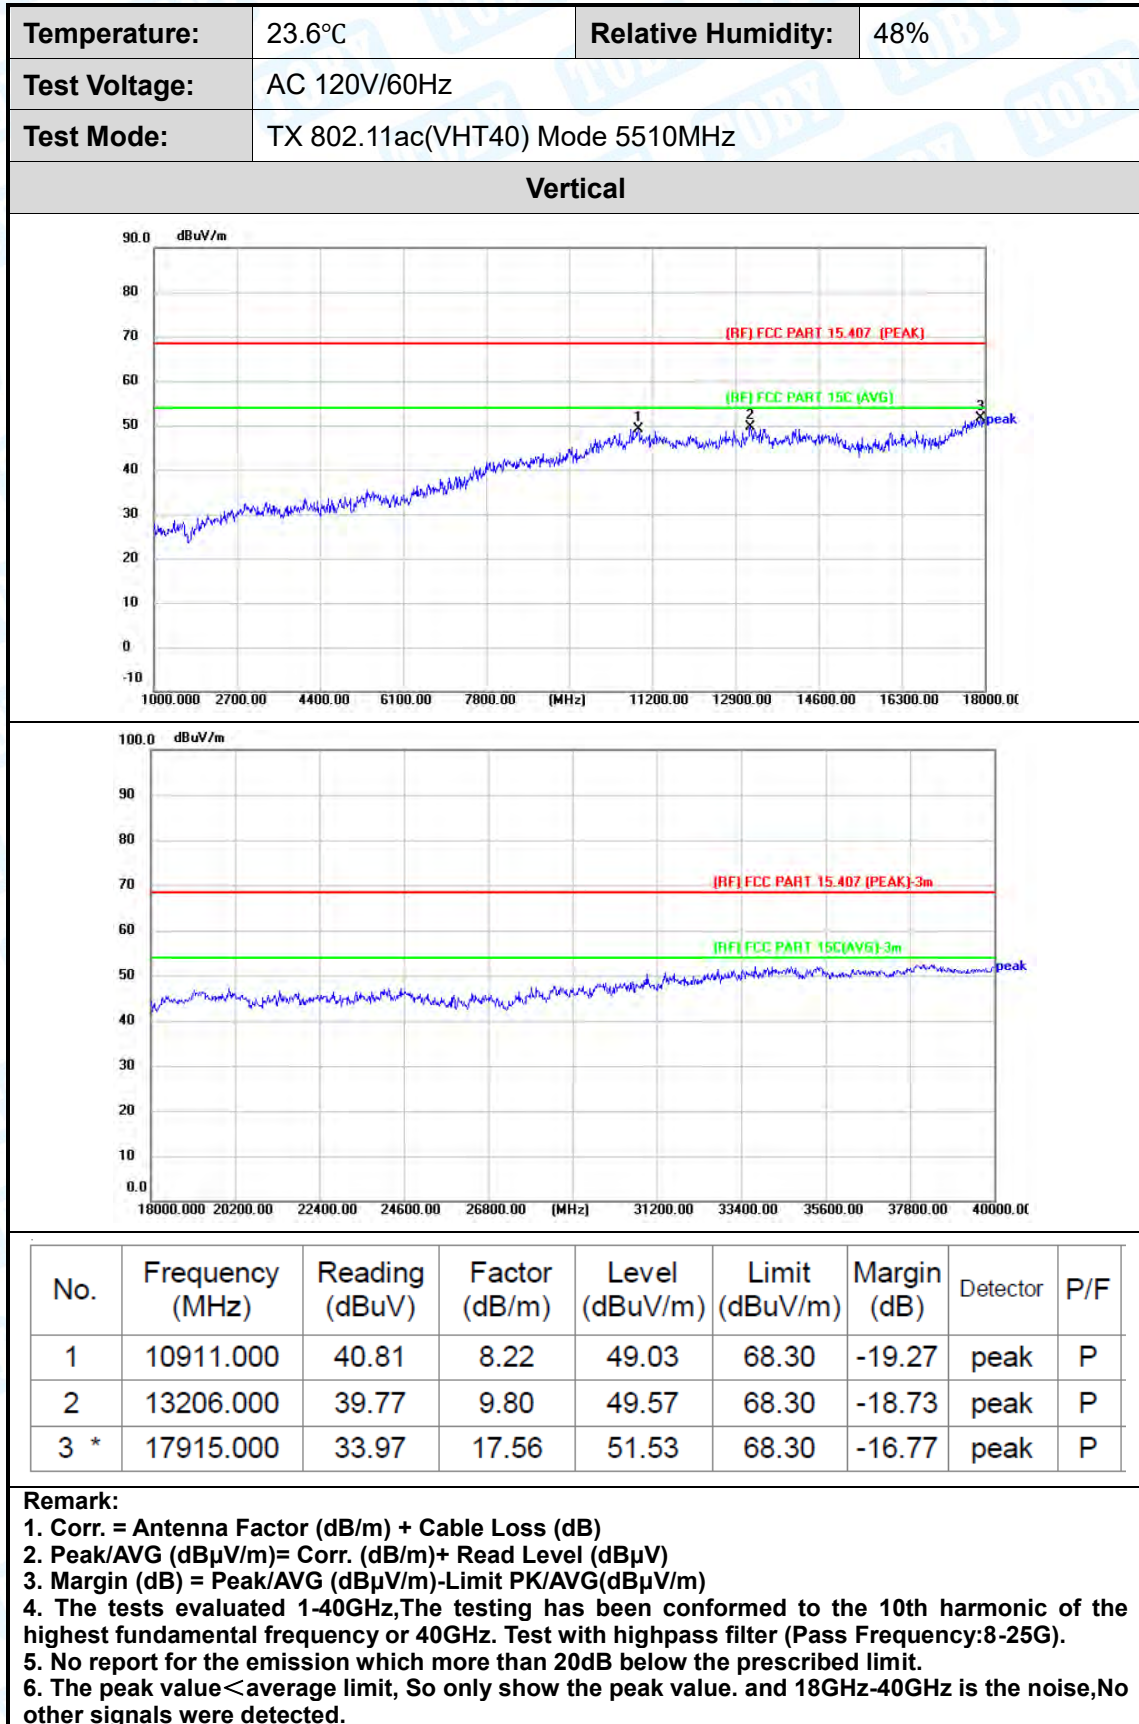


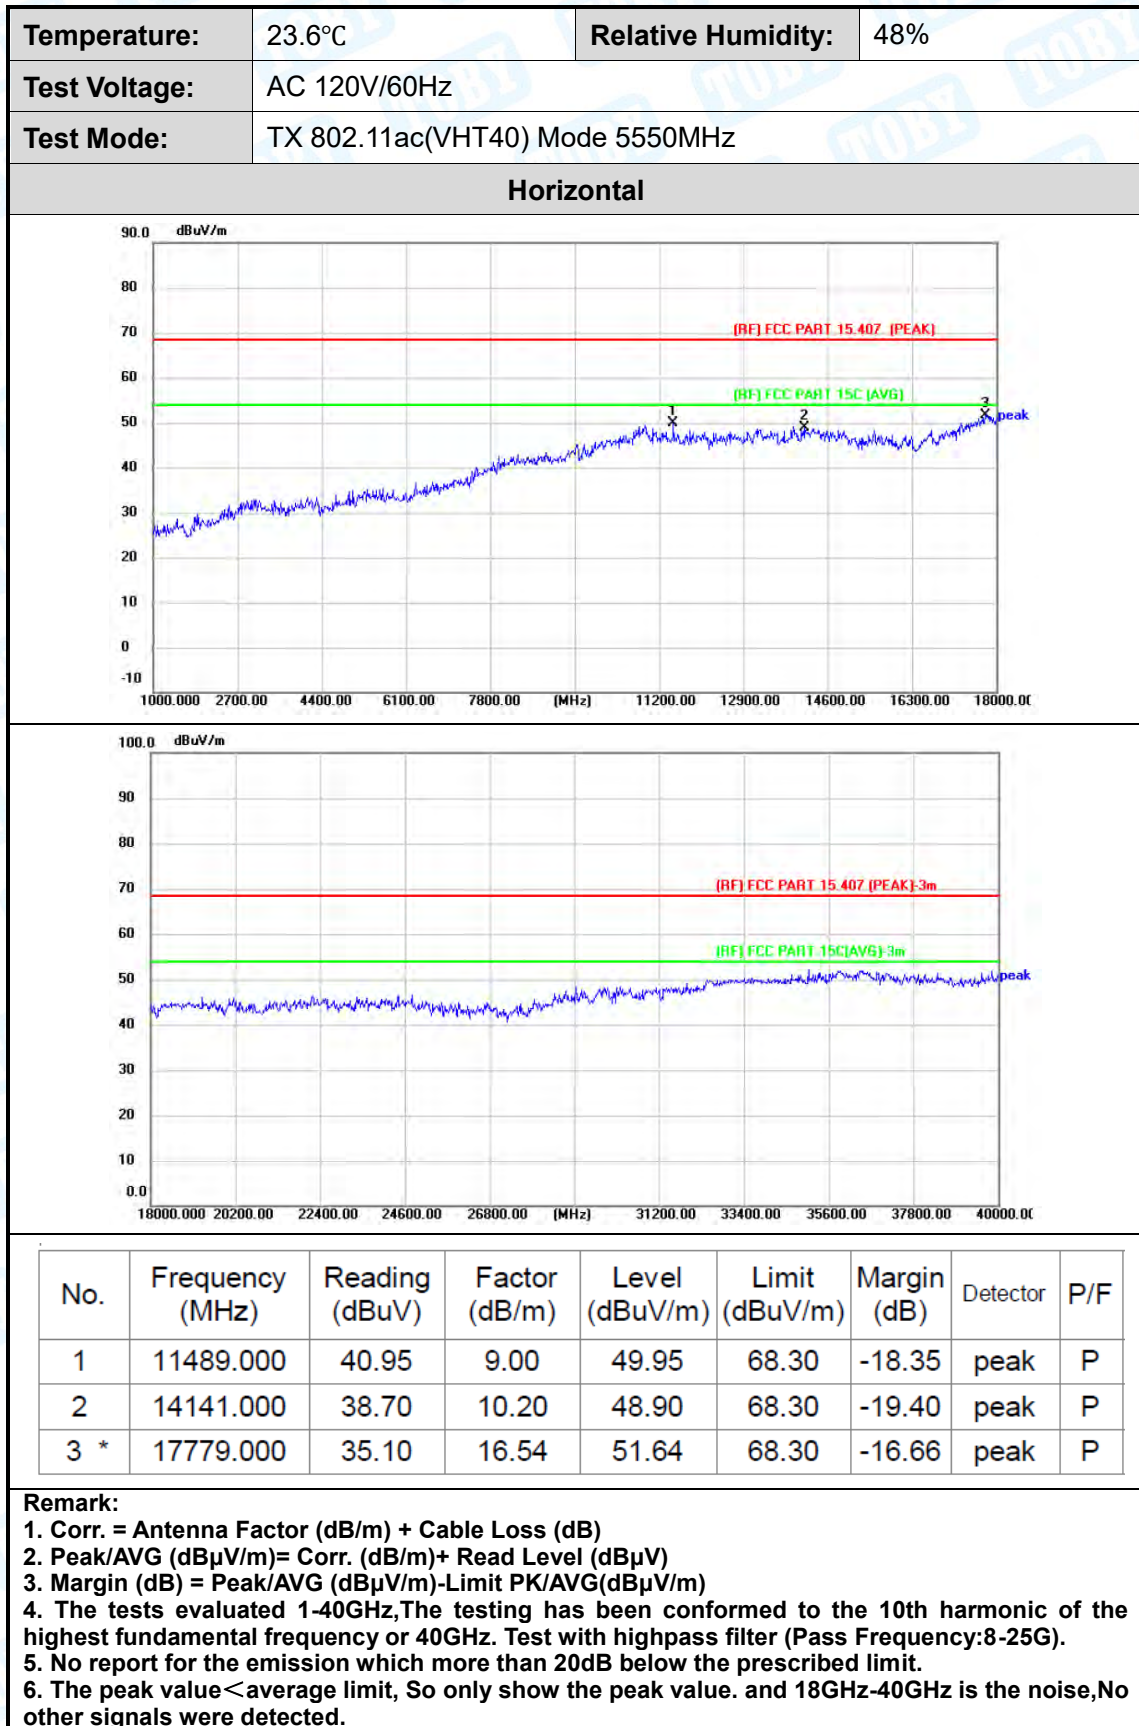


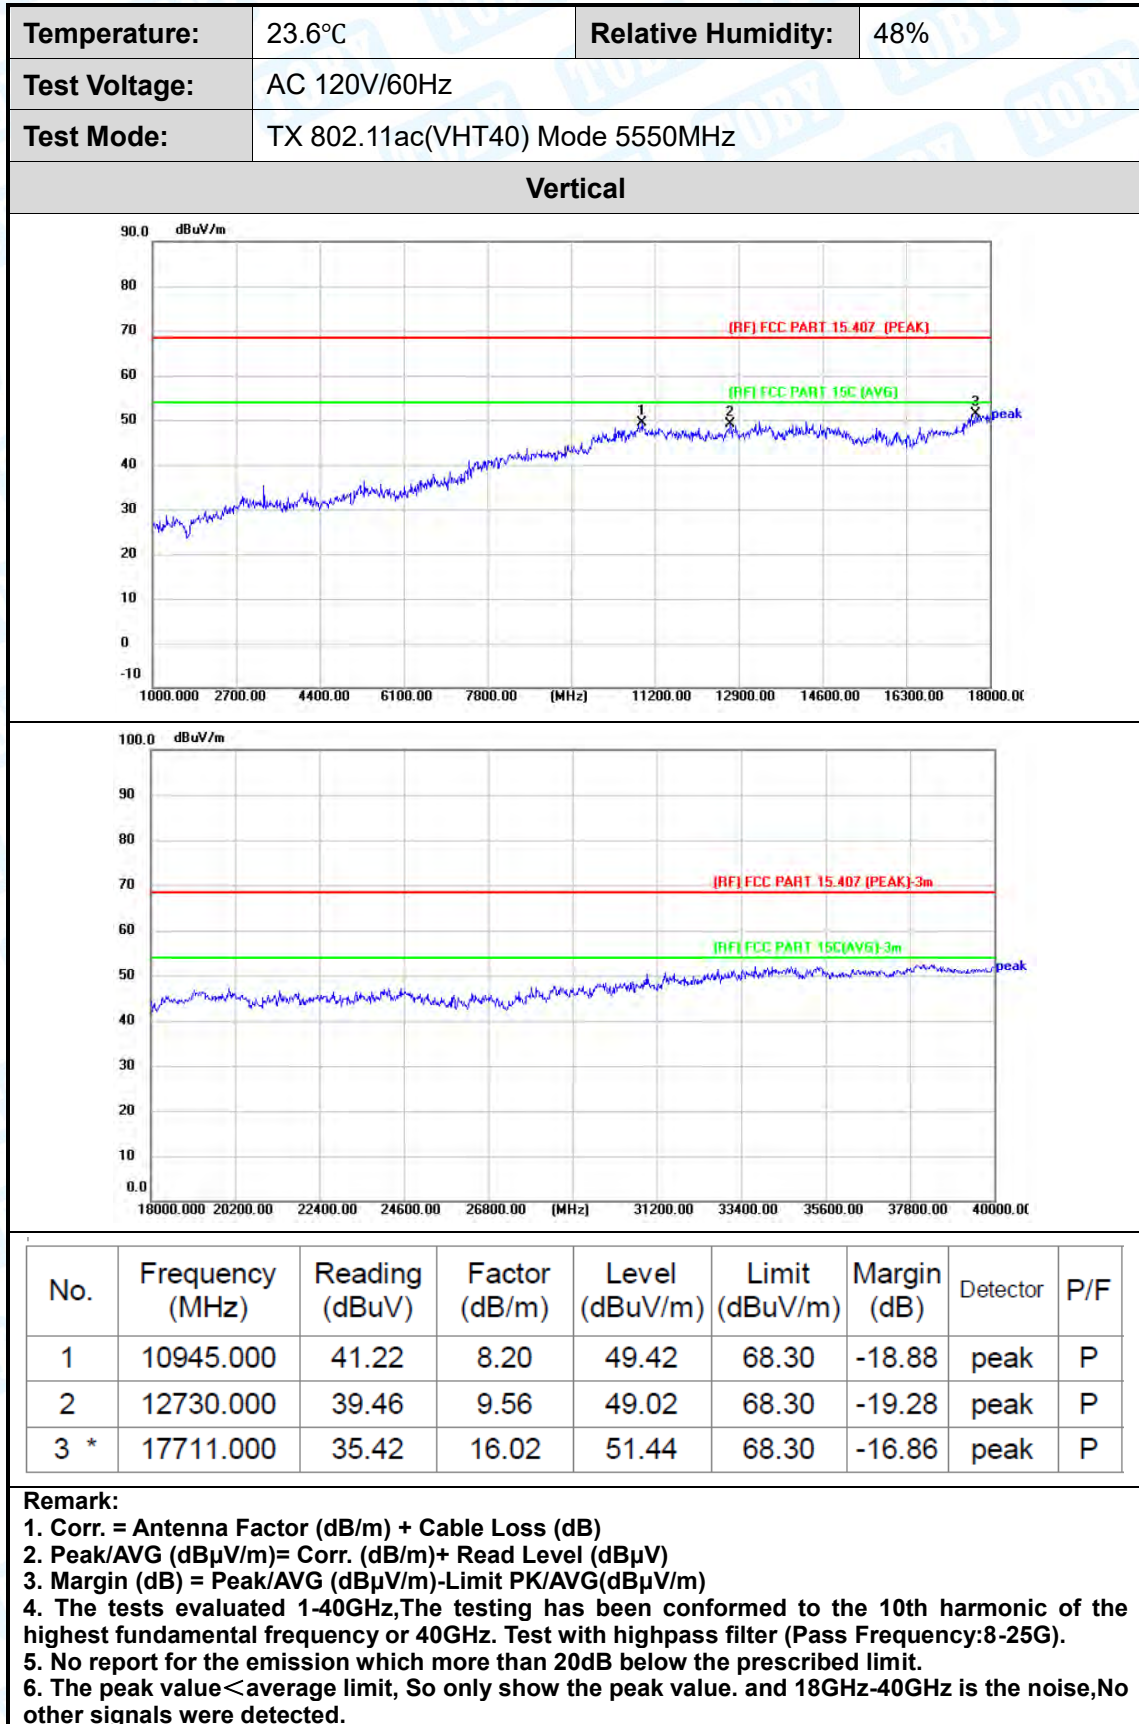


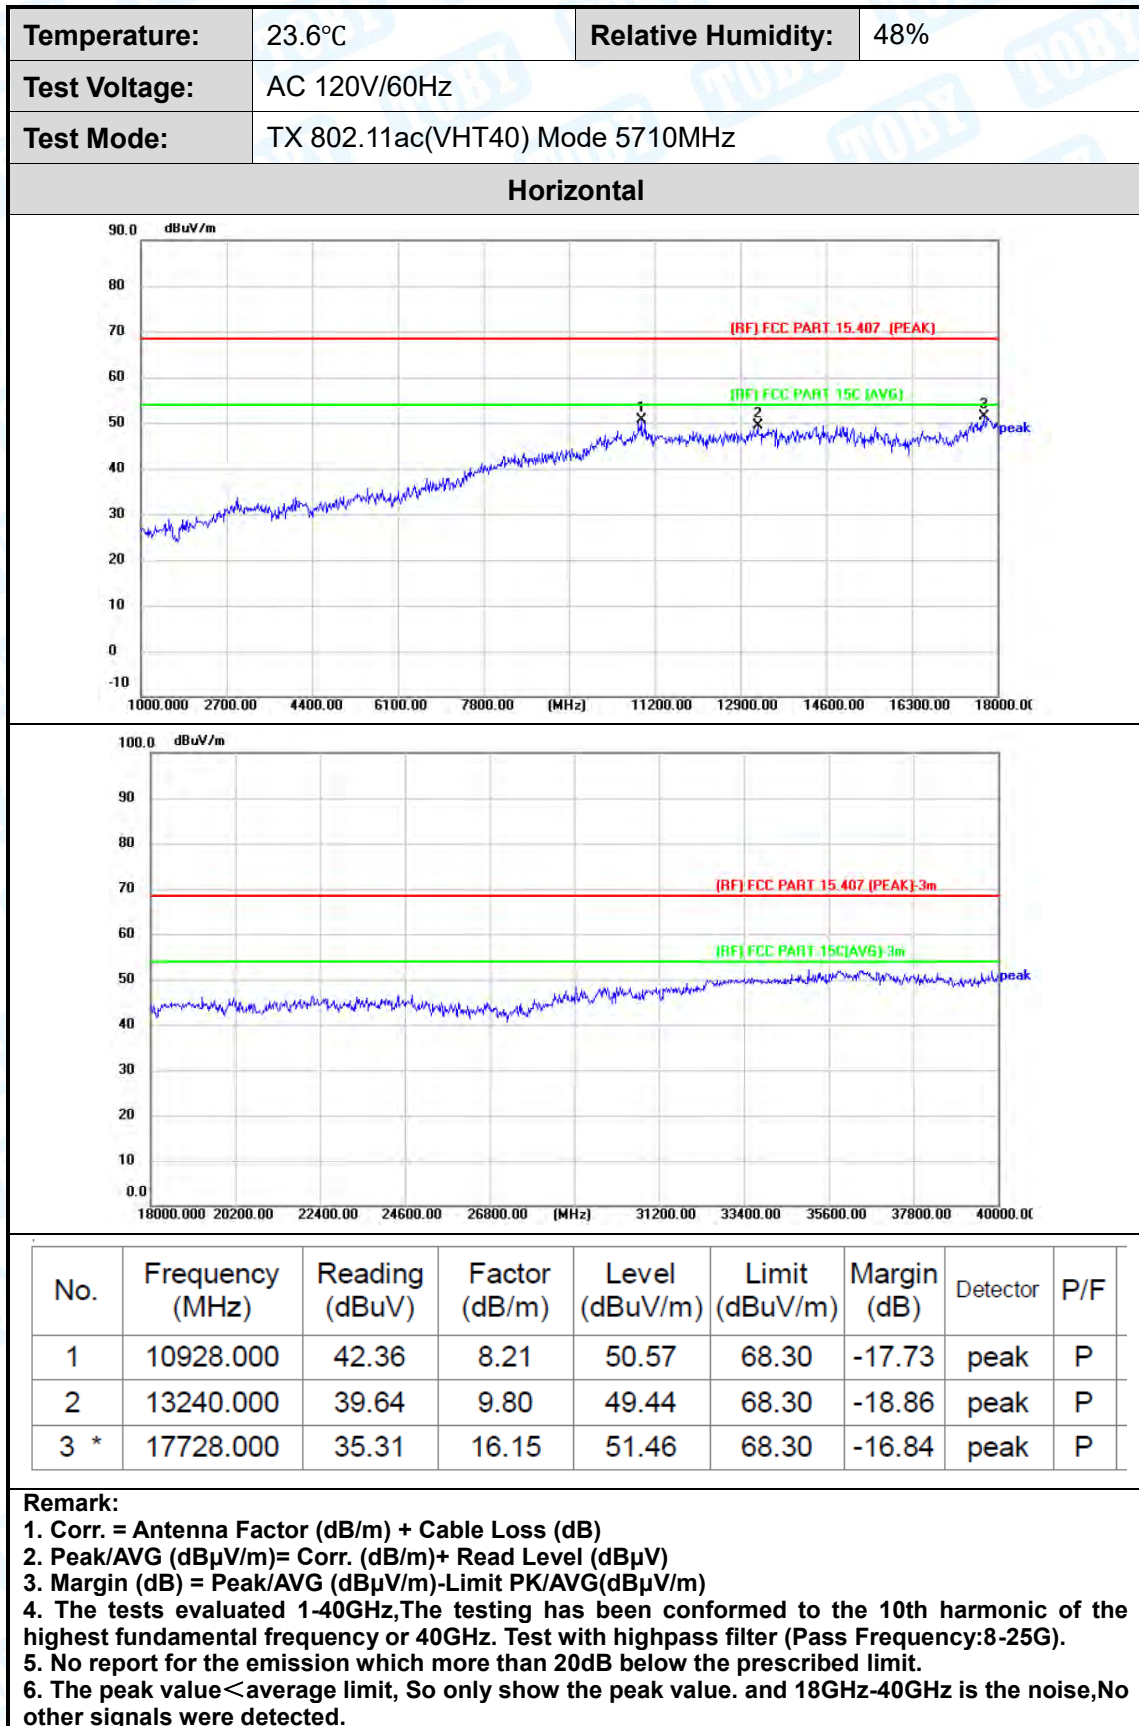

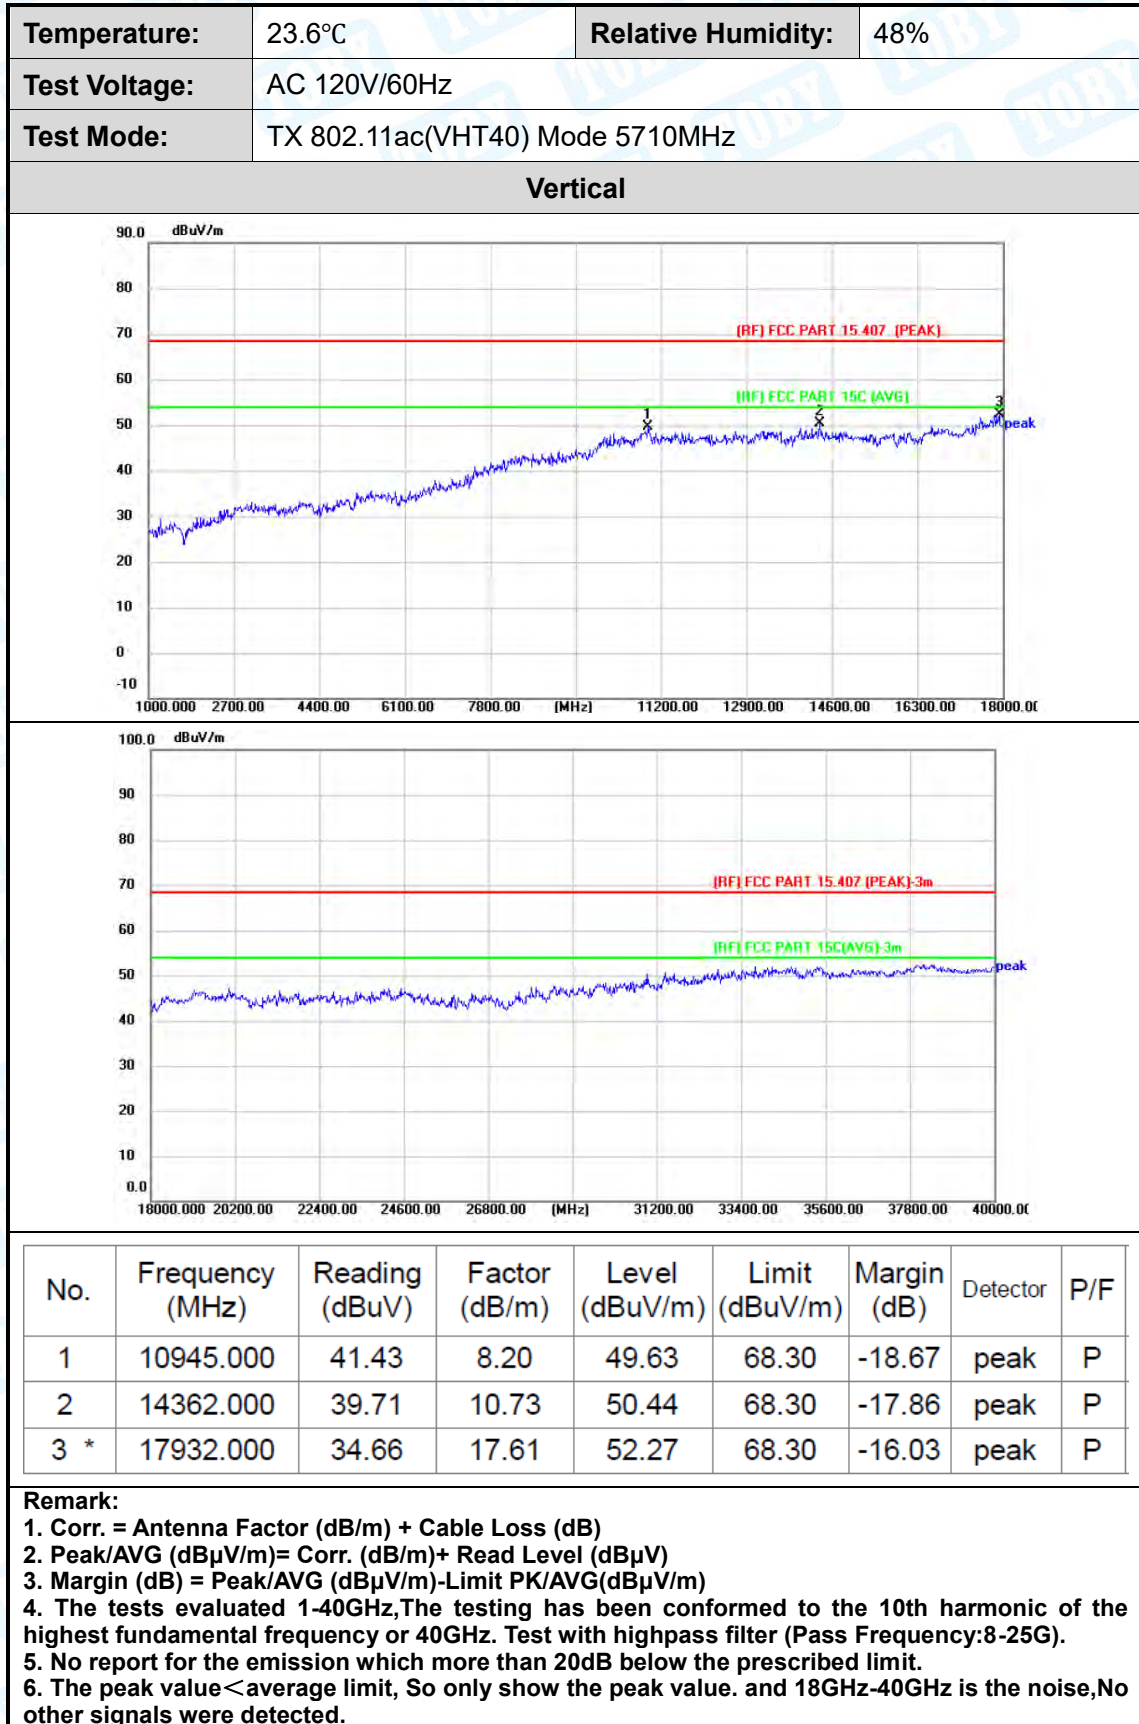


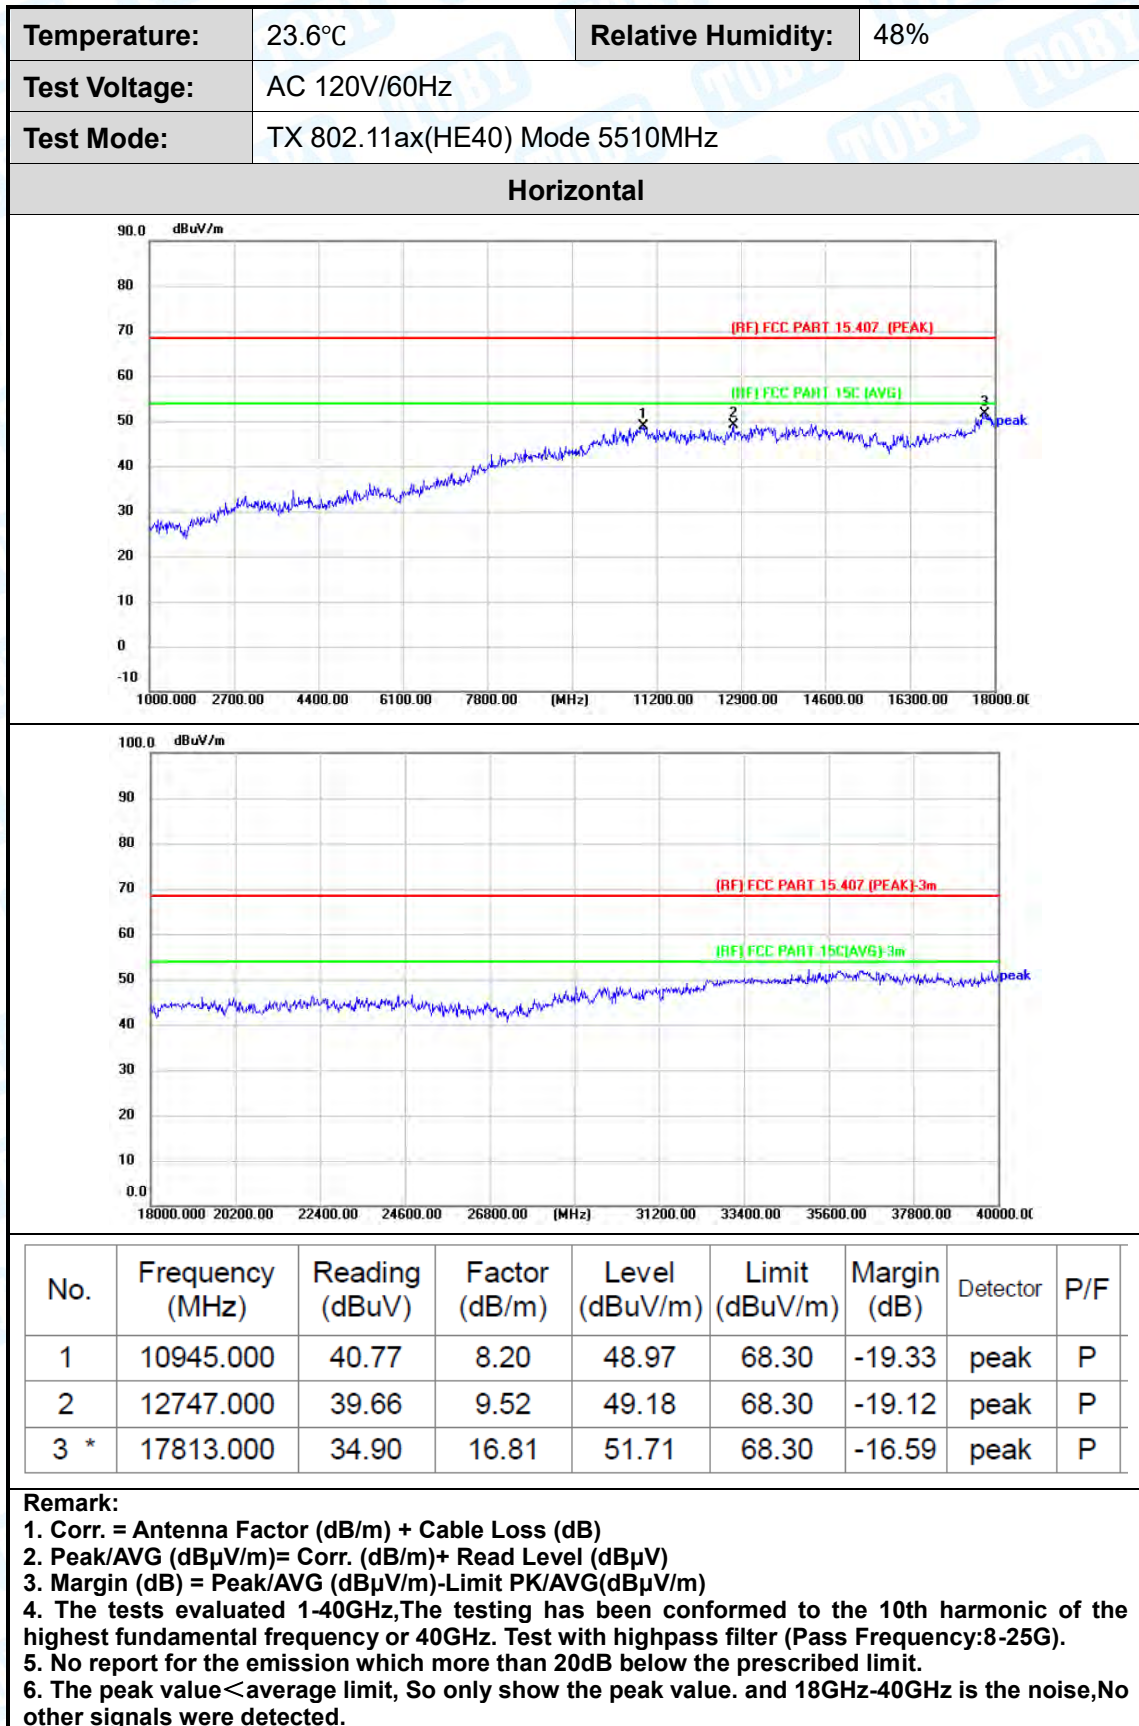


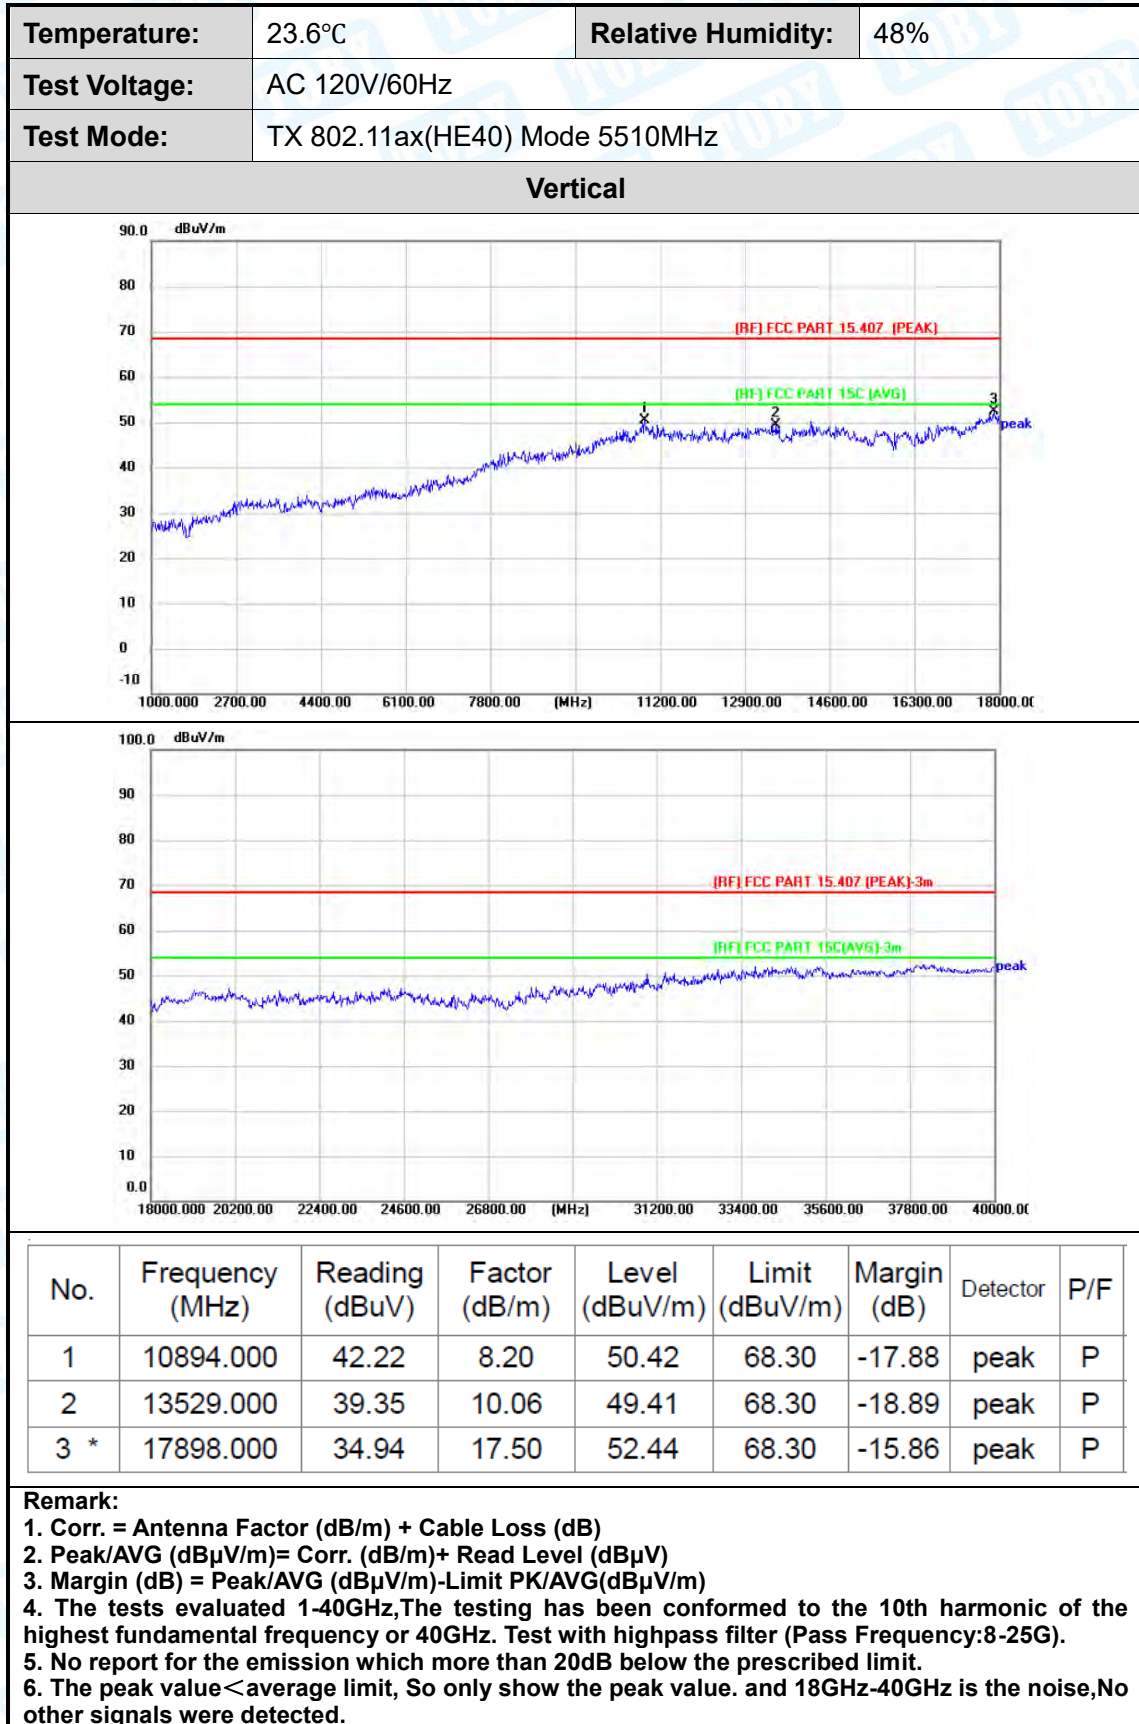


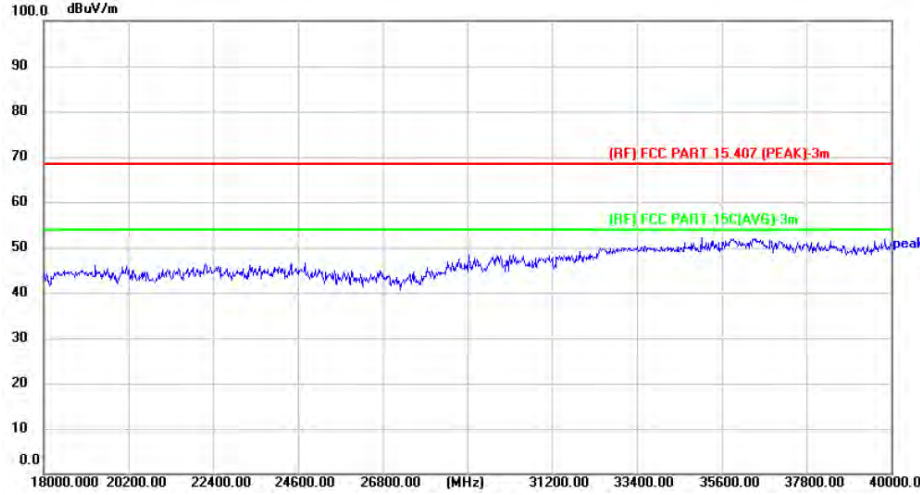
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11234.000	40.83	8.23	49.06	68.30	-19.24	peak	P
2	13325.000	39.69	9.89	49.58	68.30	-18.72	peak	P
3 *	17847.000	35.38	17.08	52.46	68.30	-15.84	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								




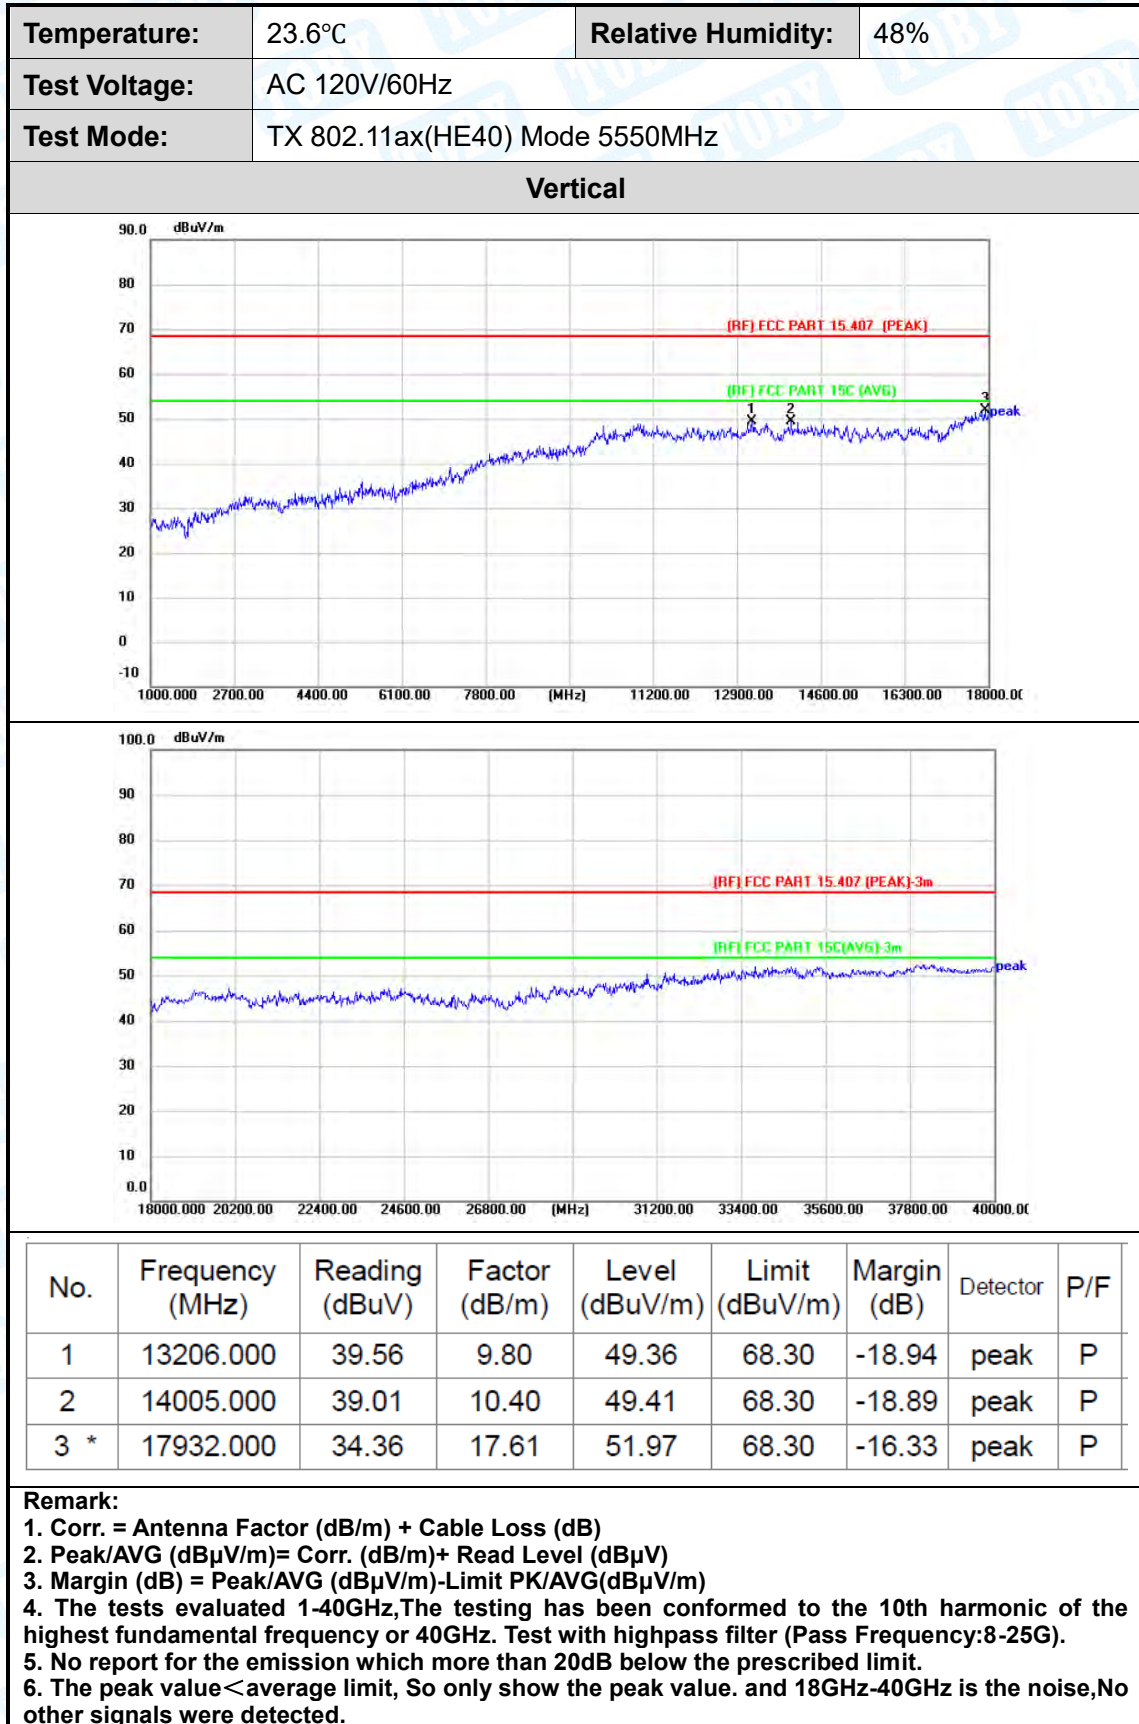


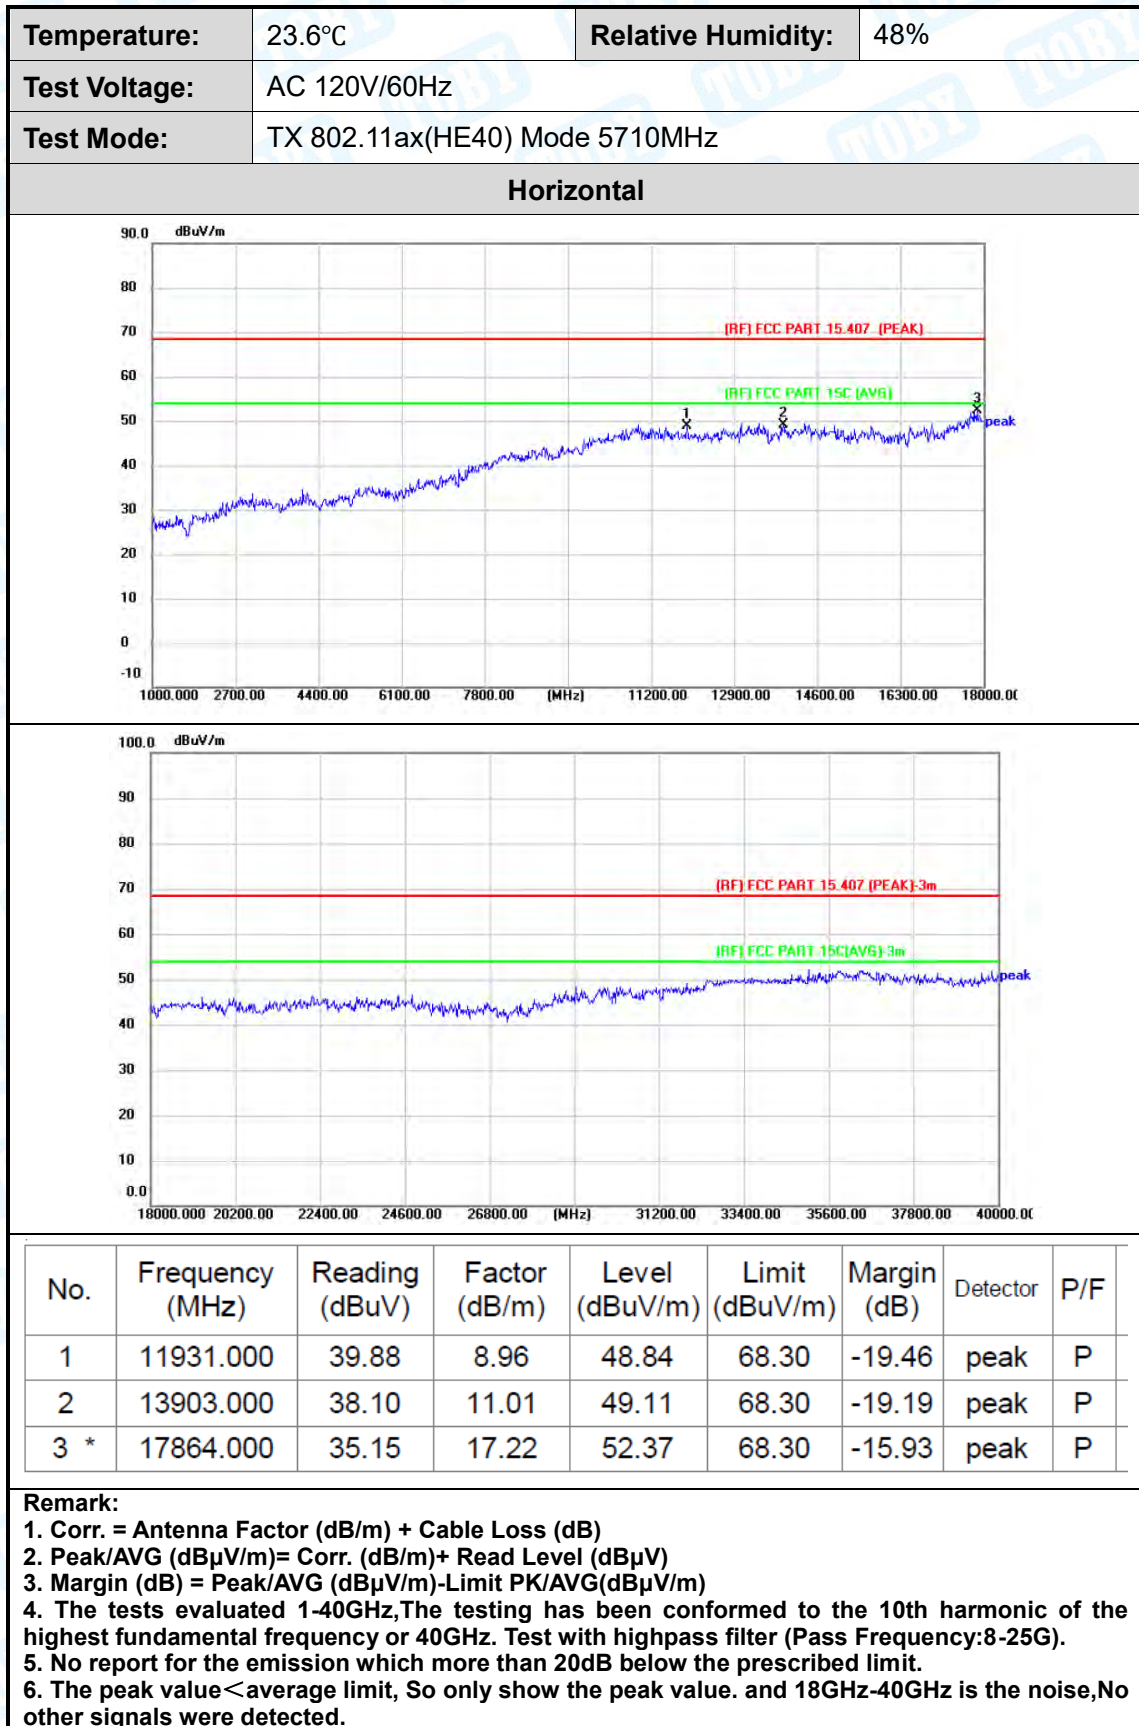


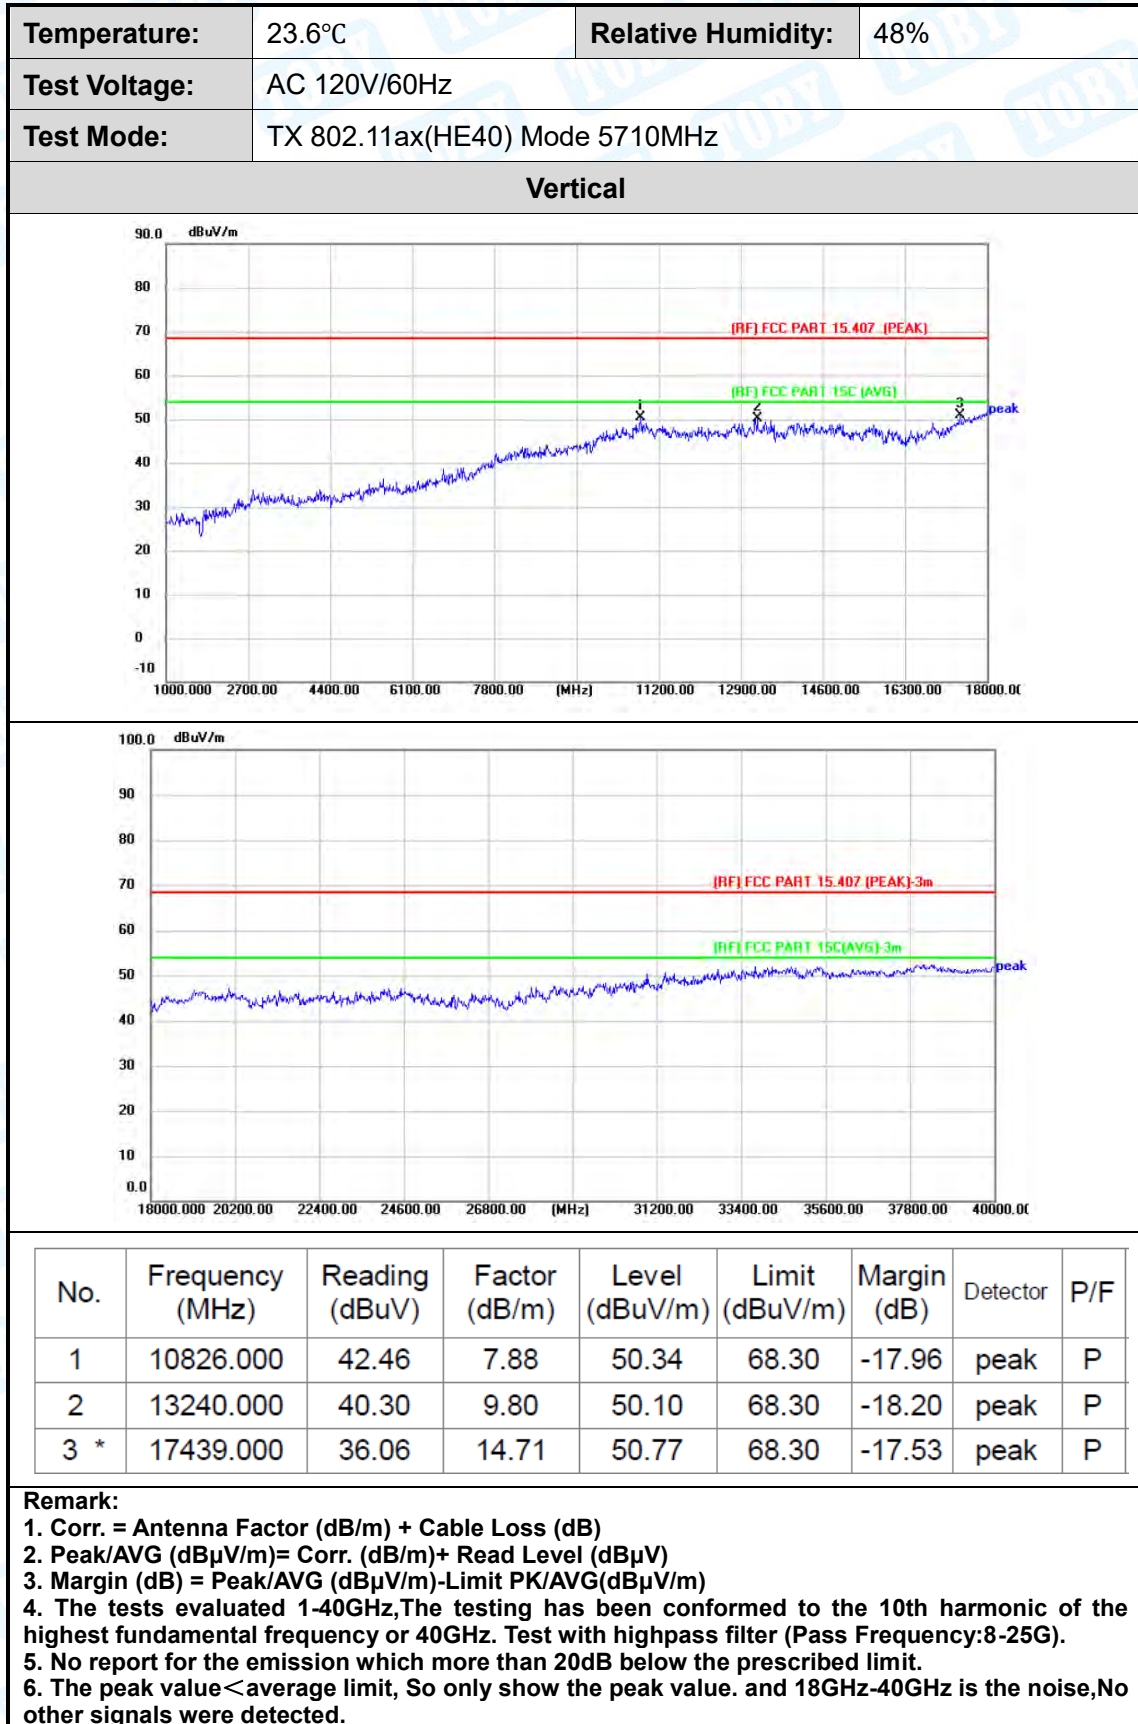


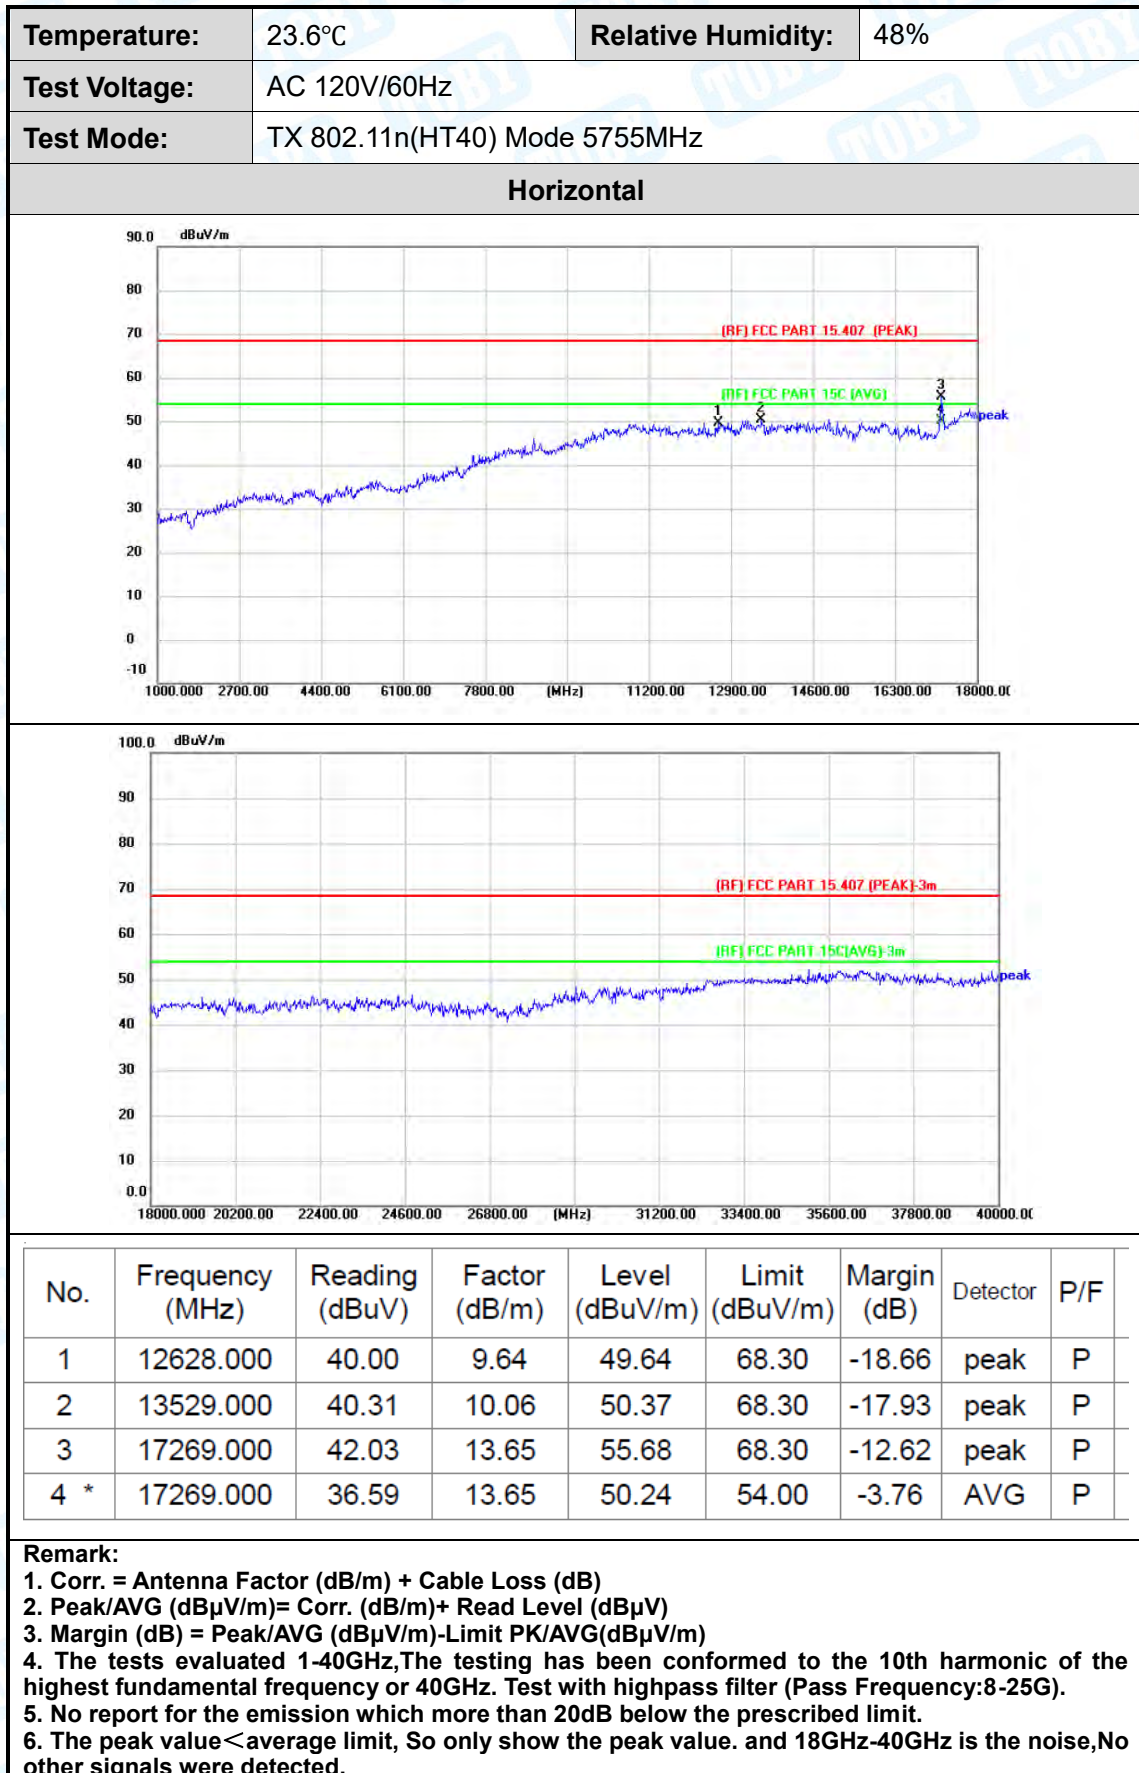


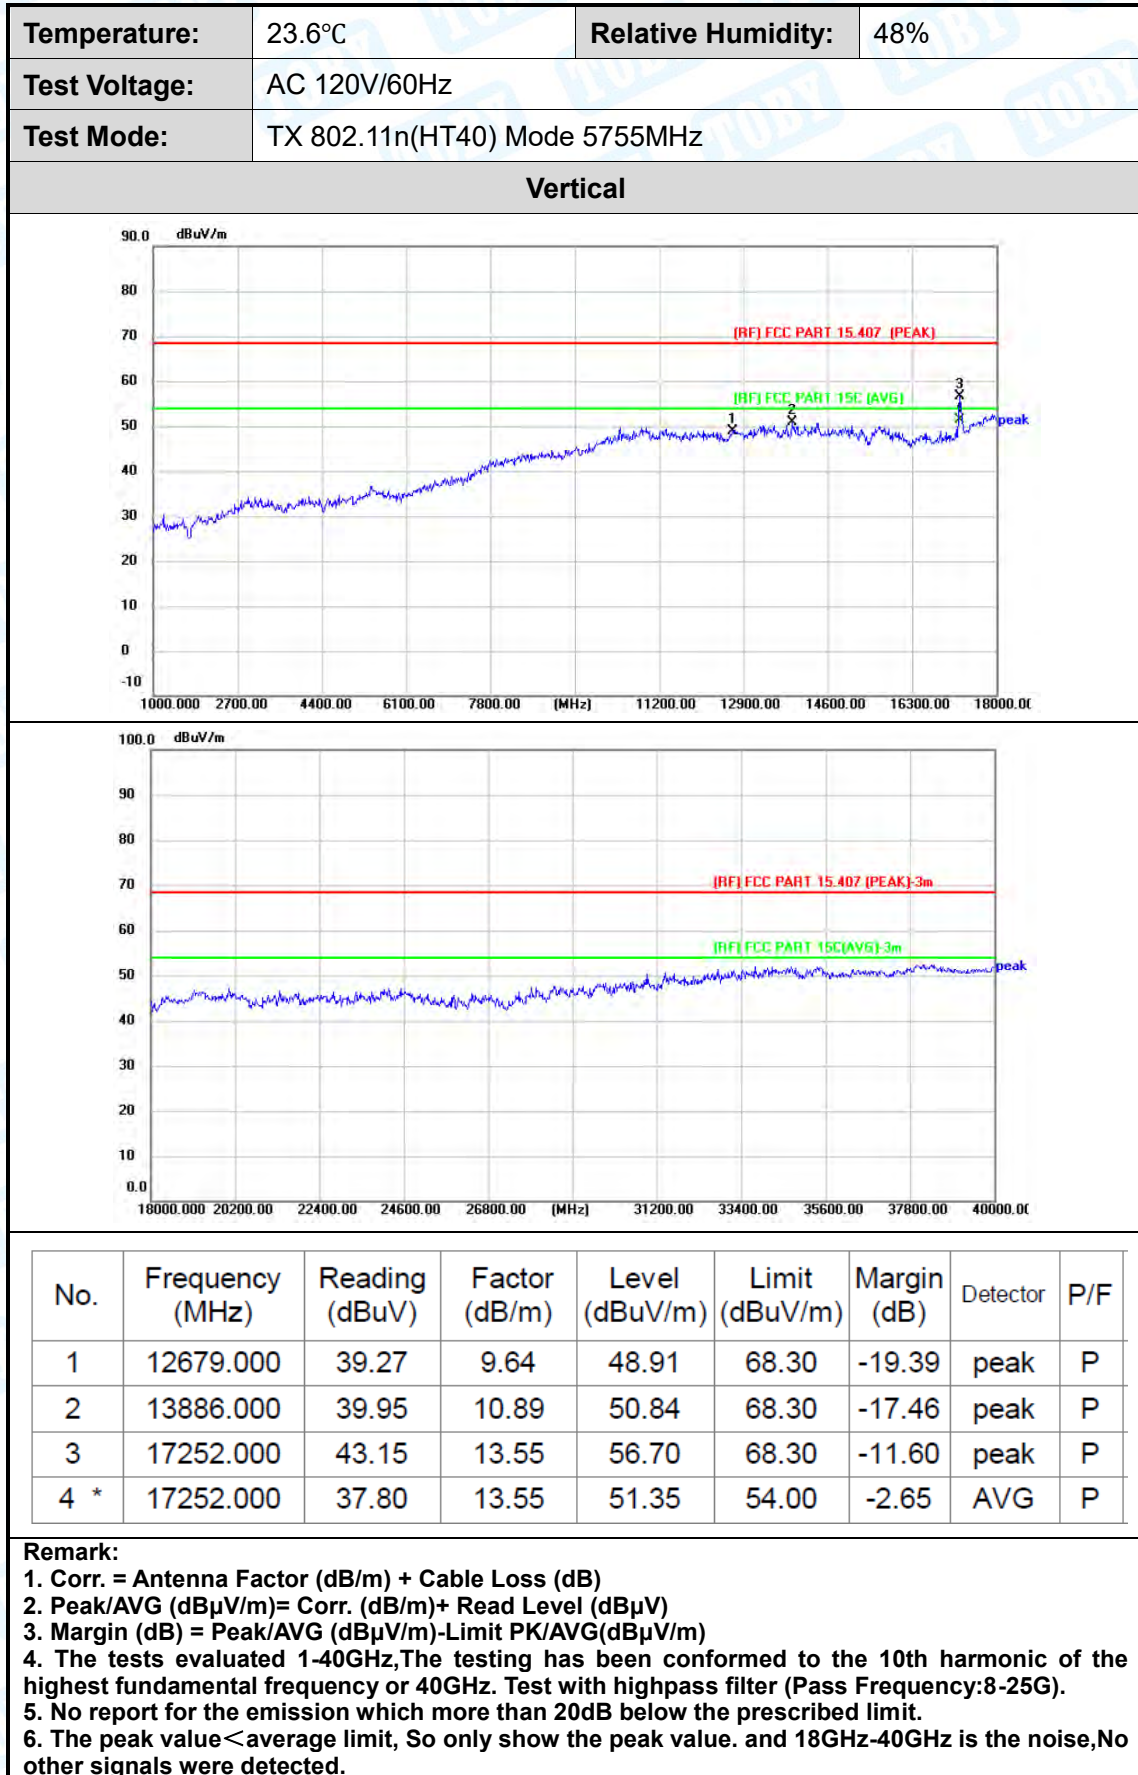


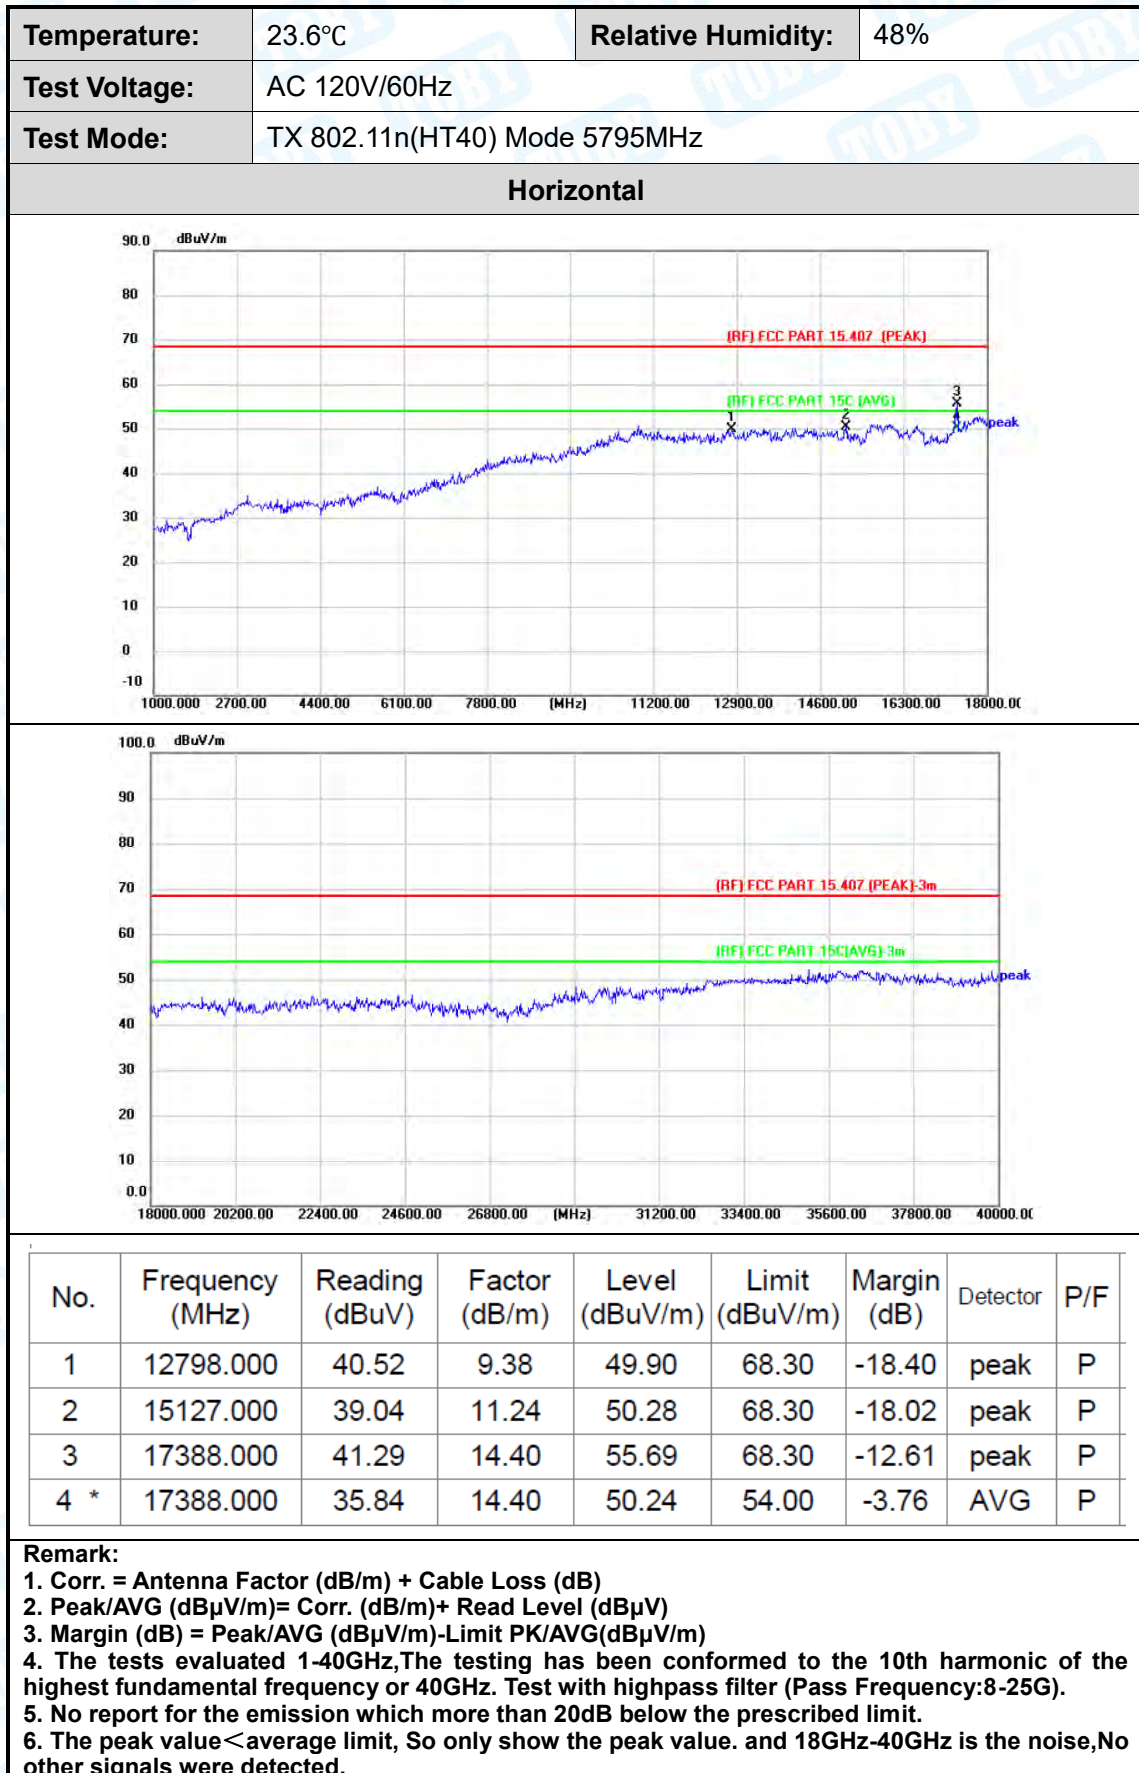


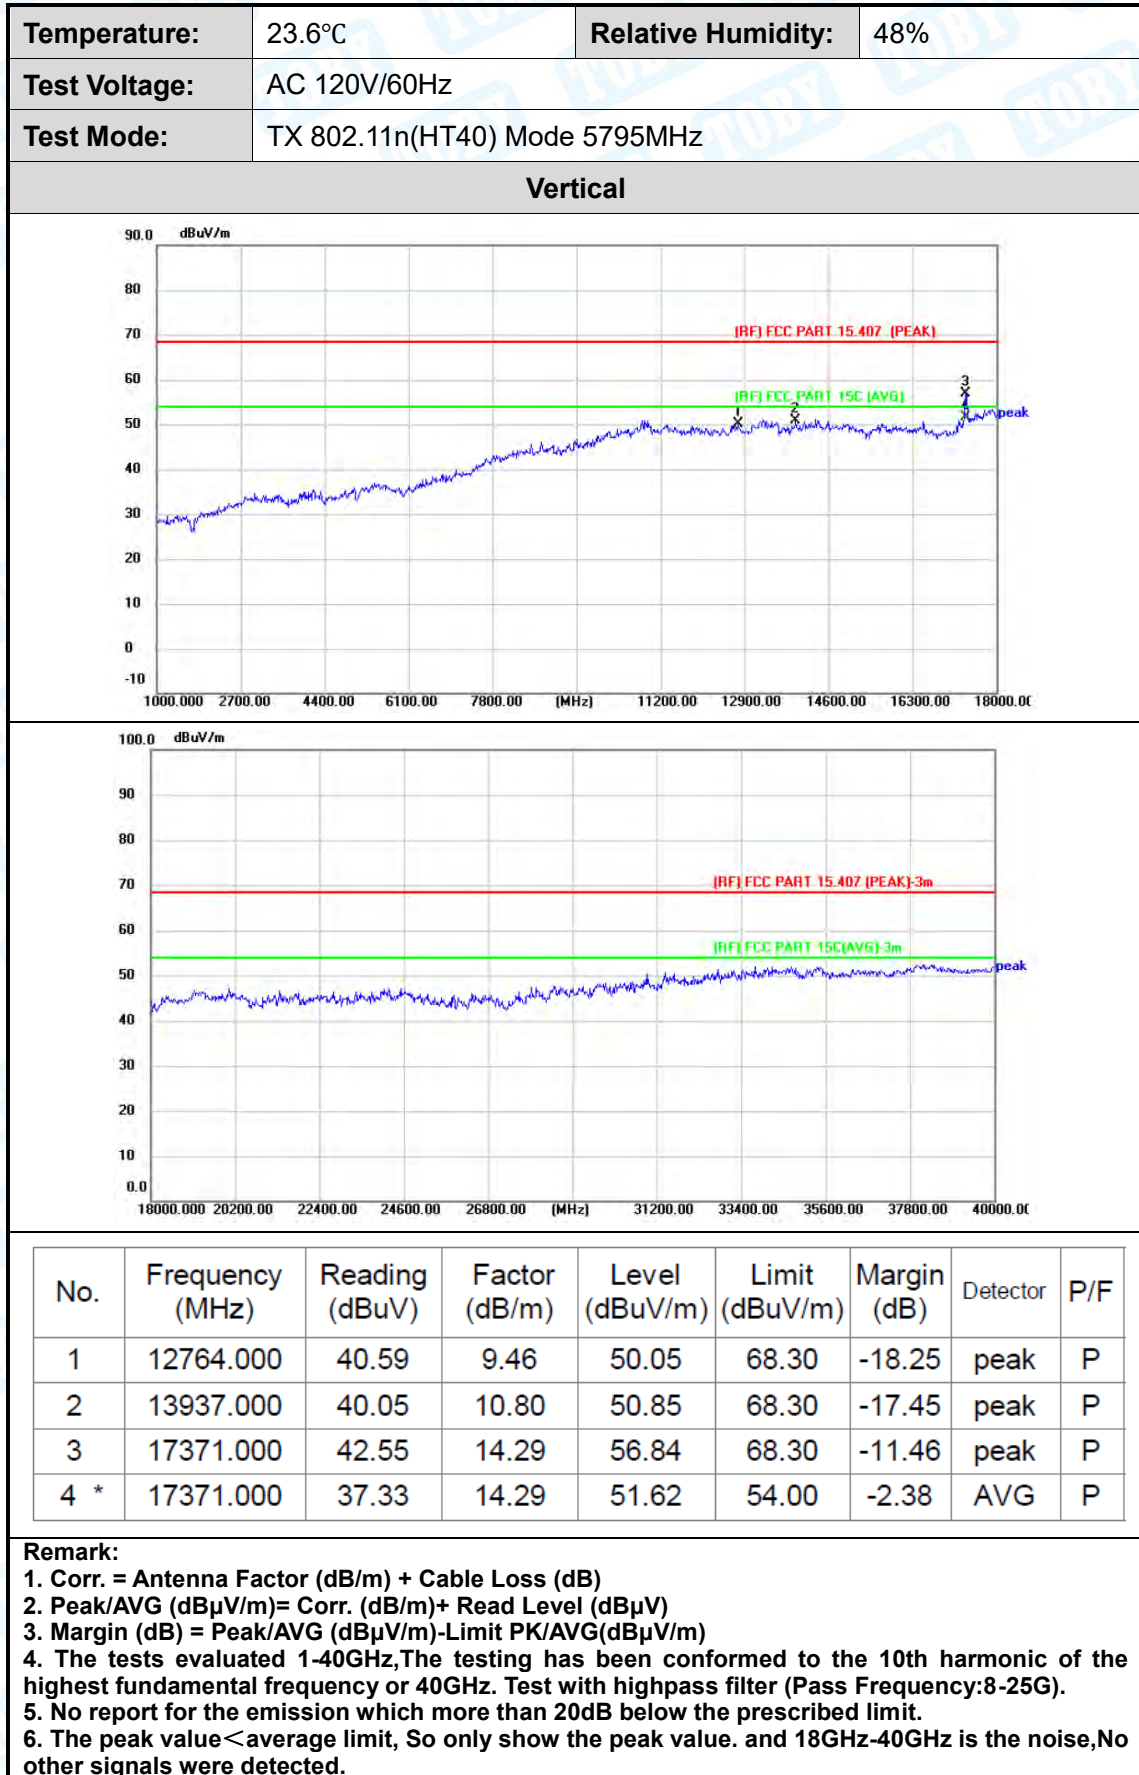


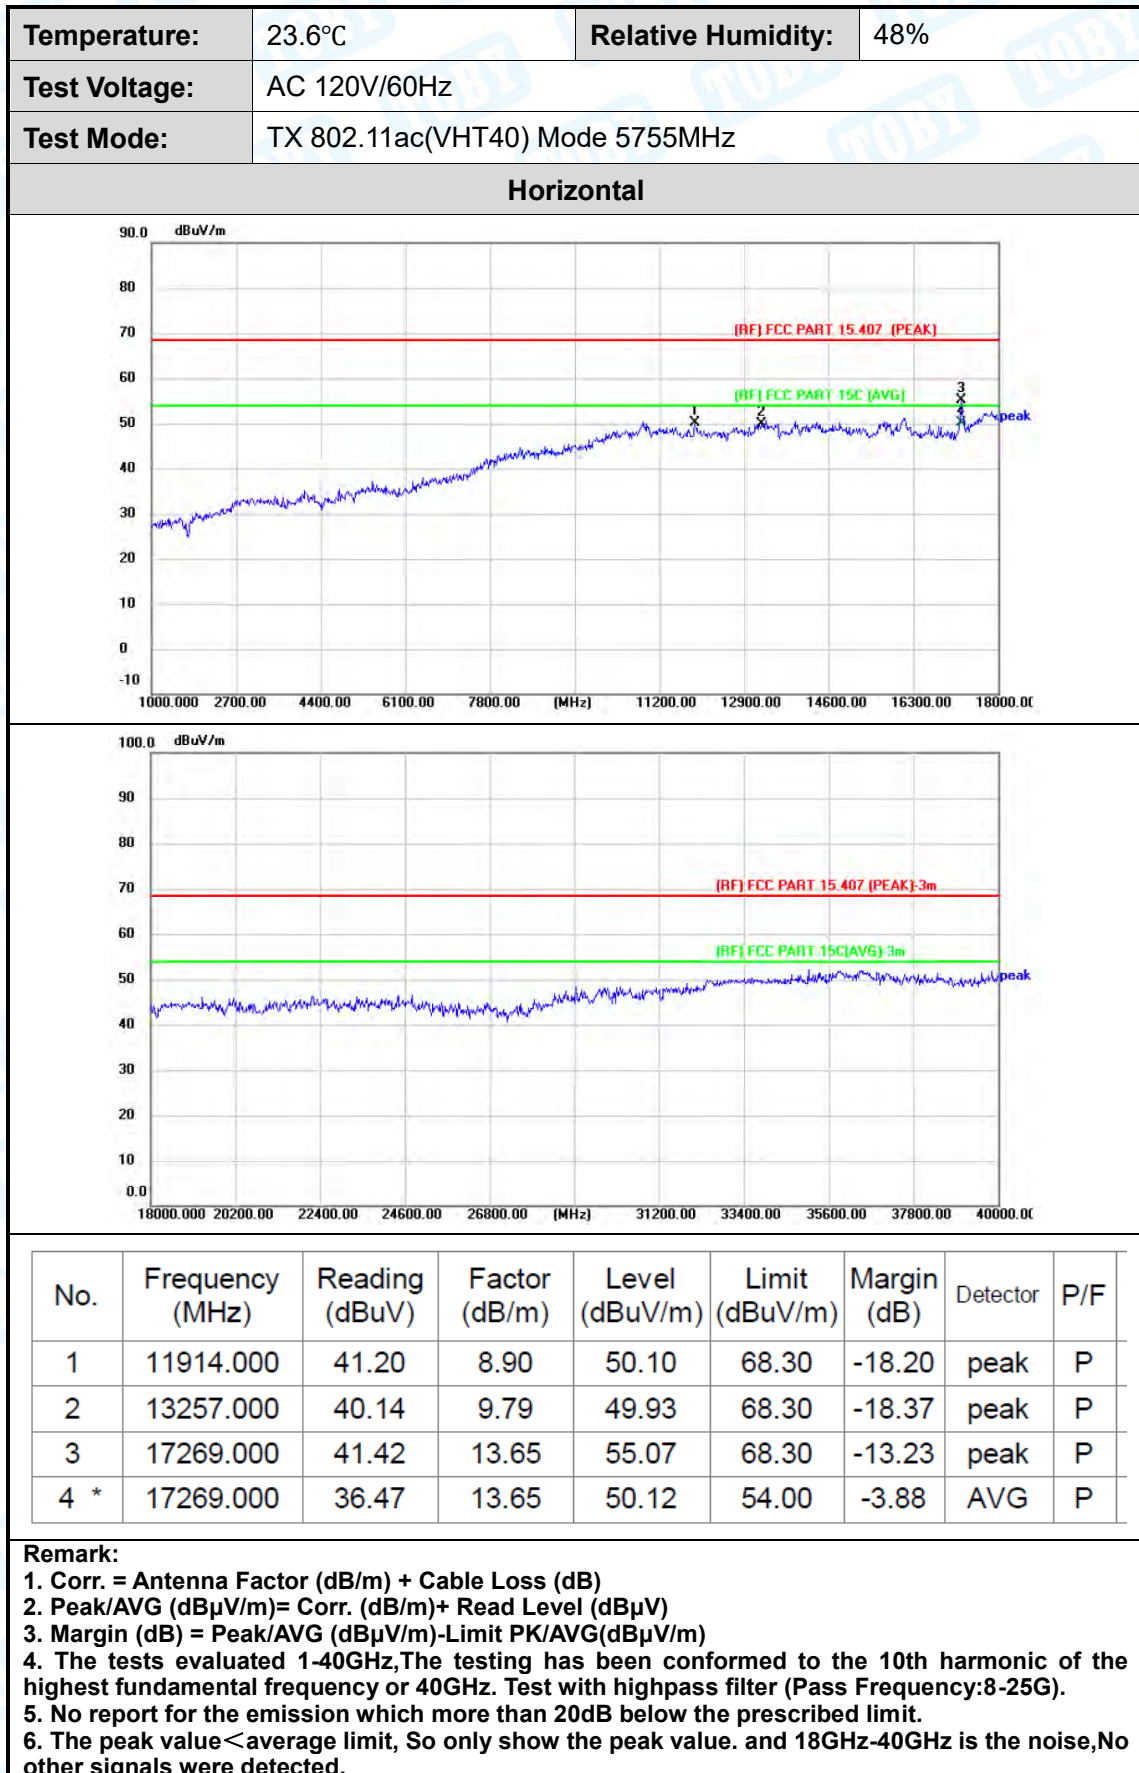



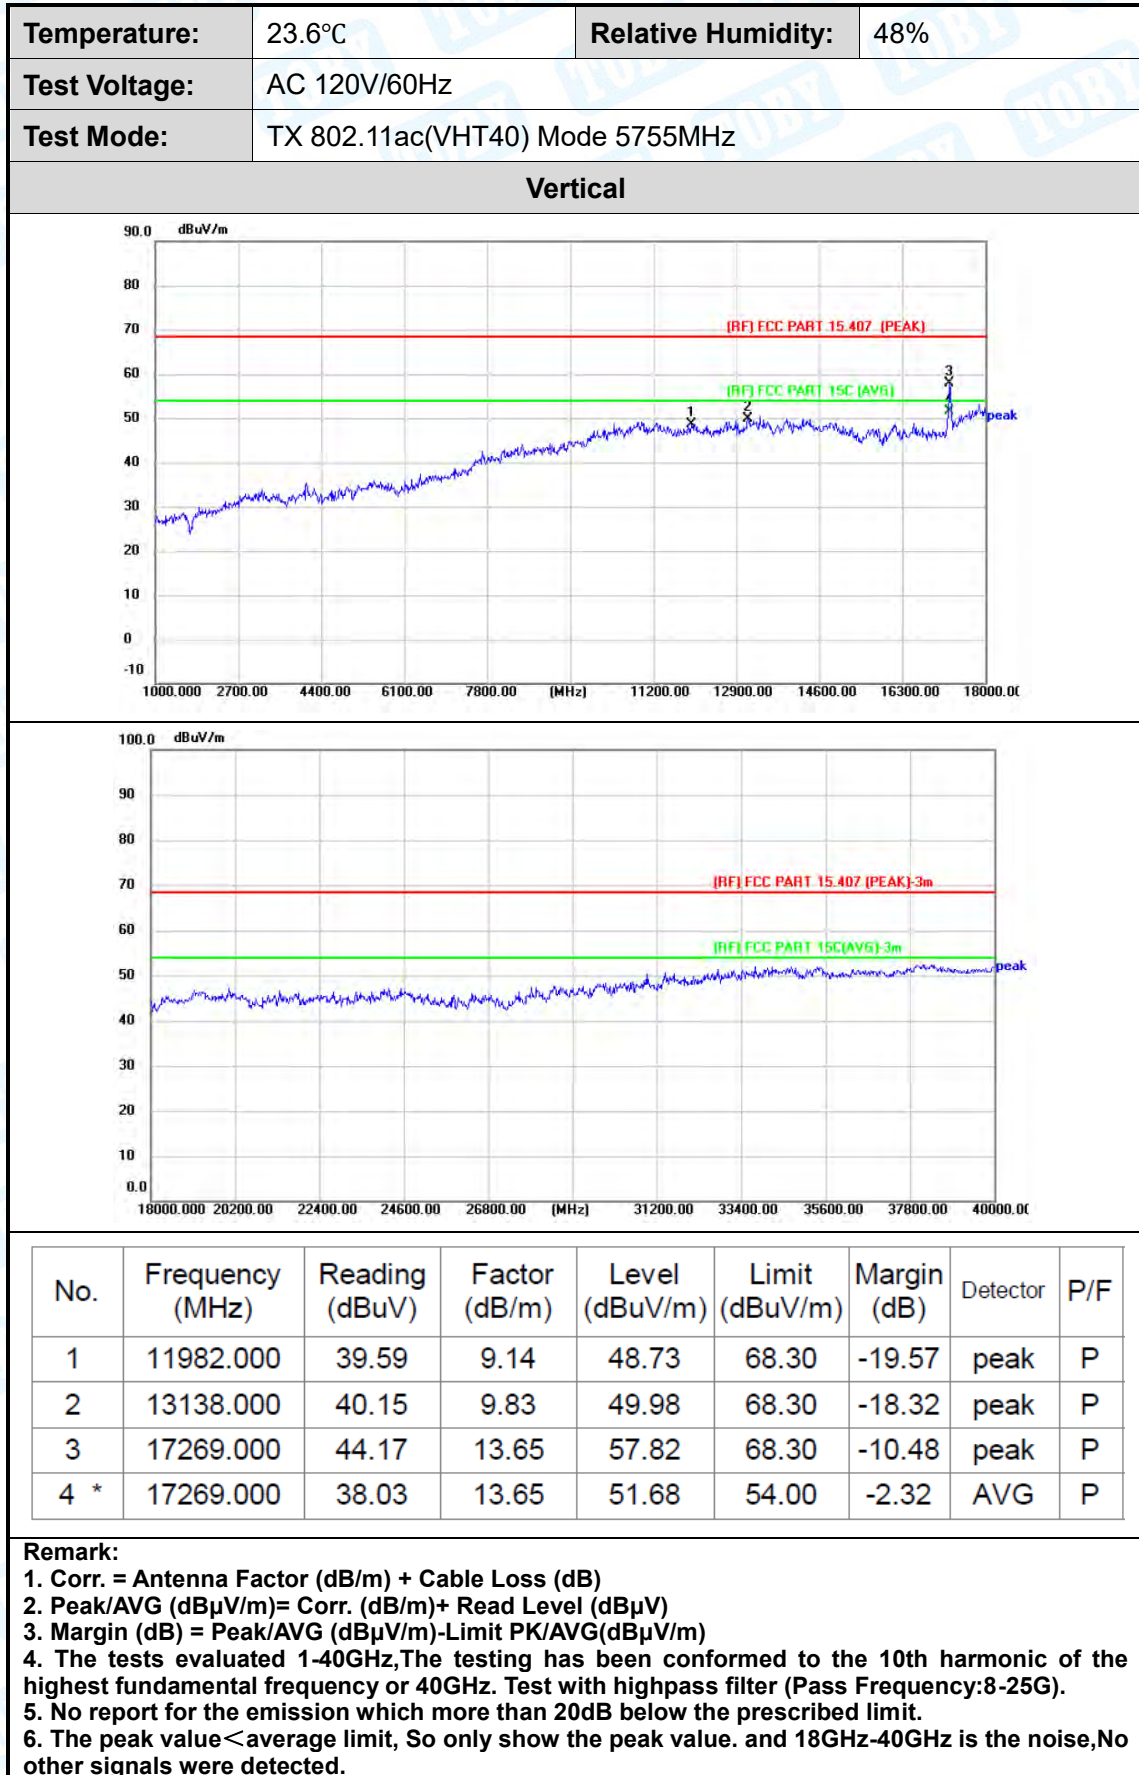


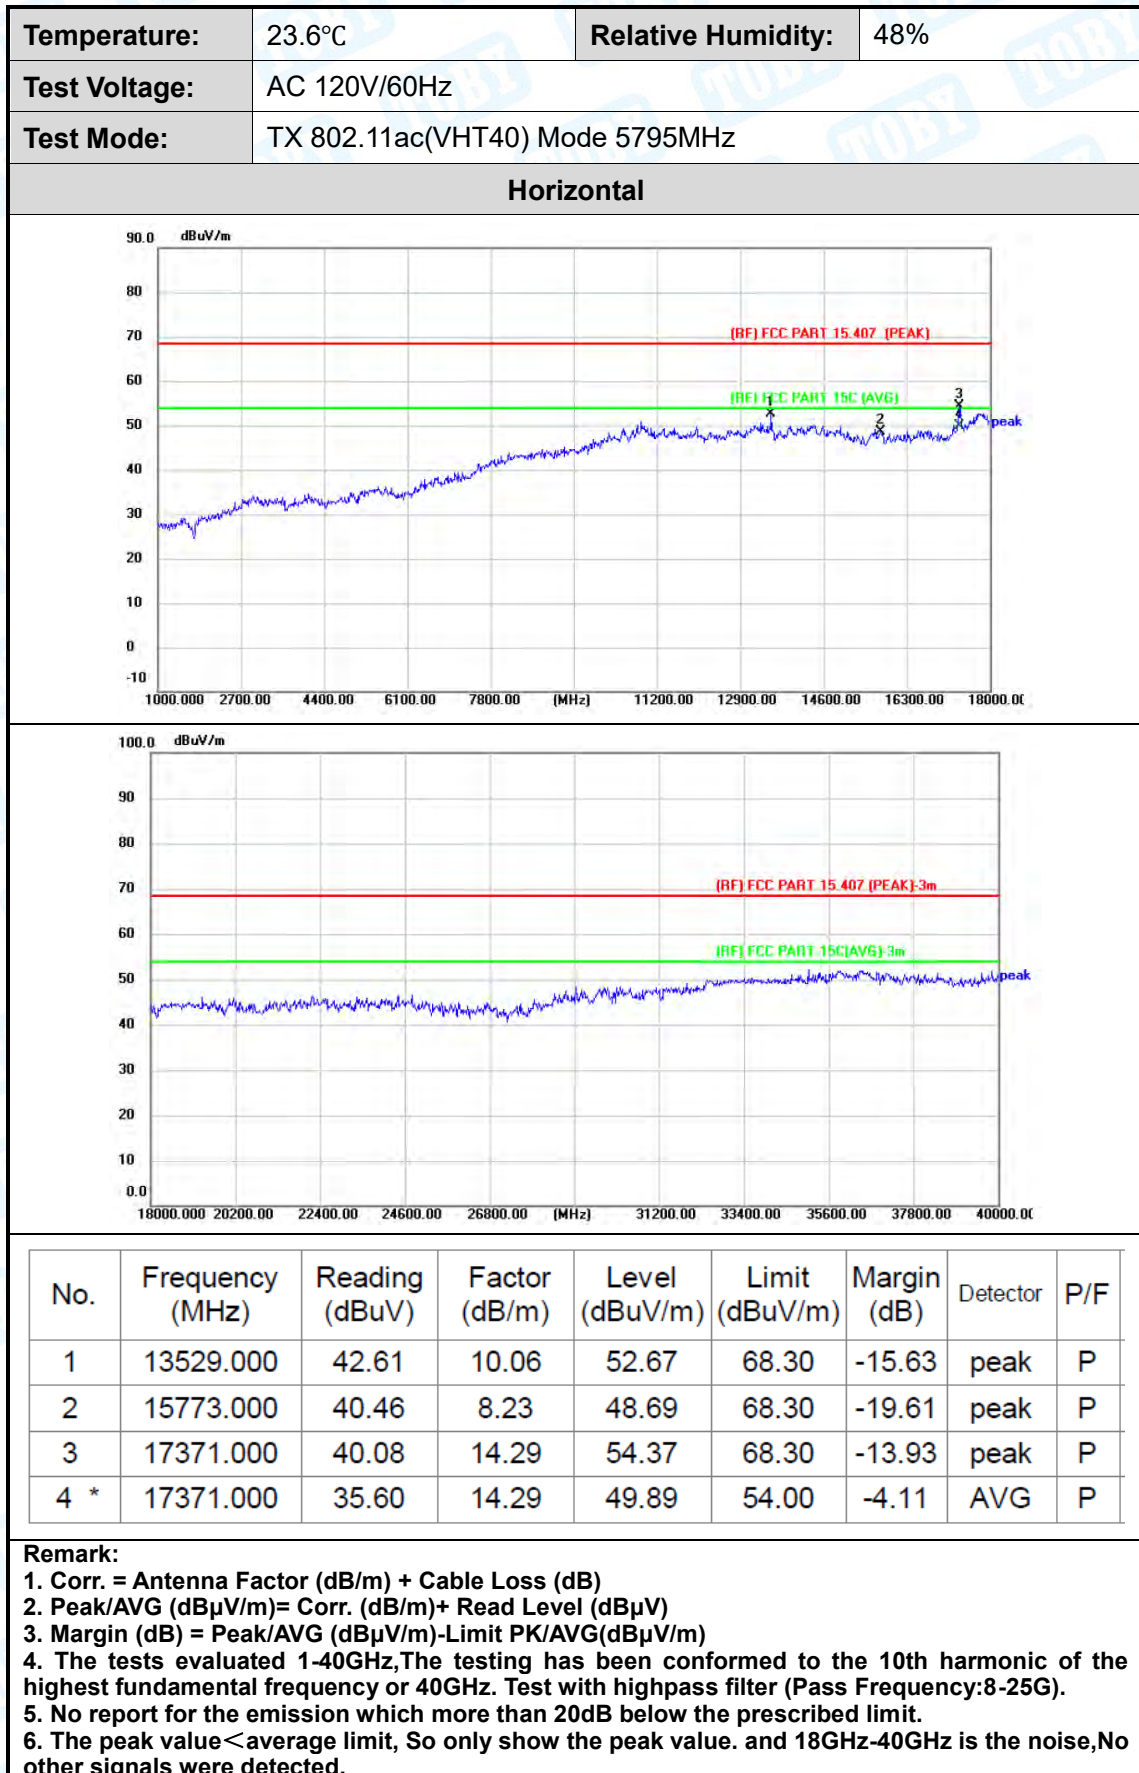

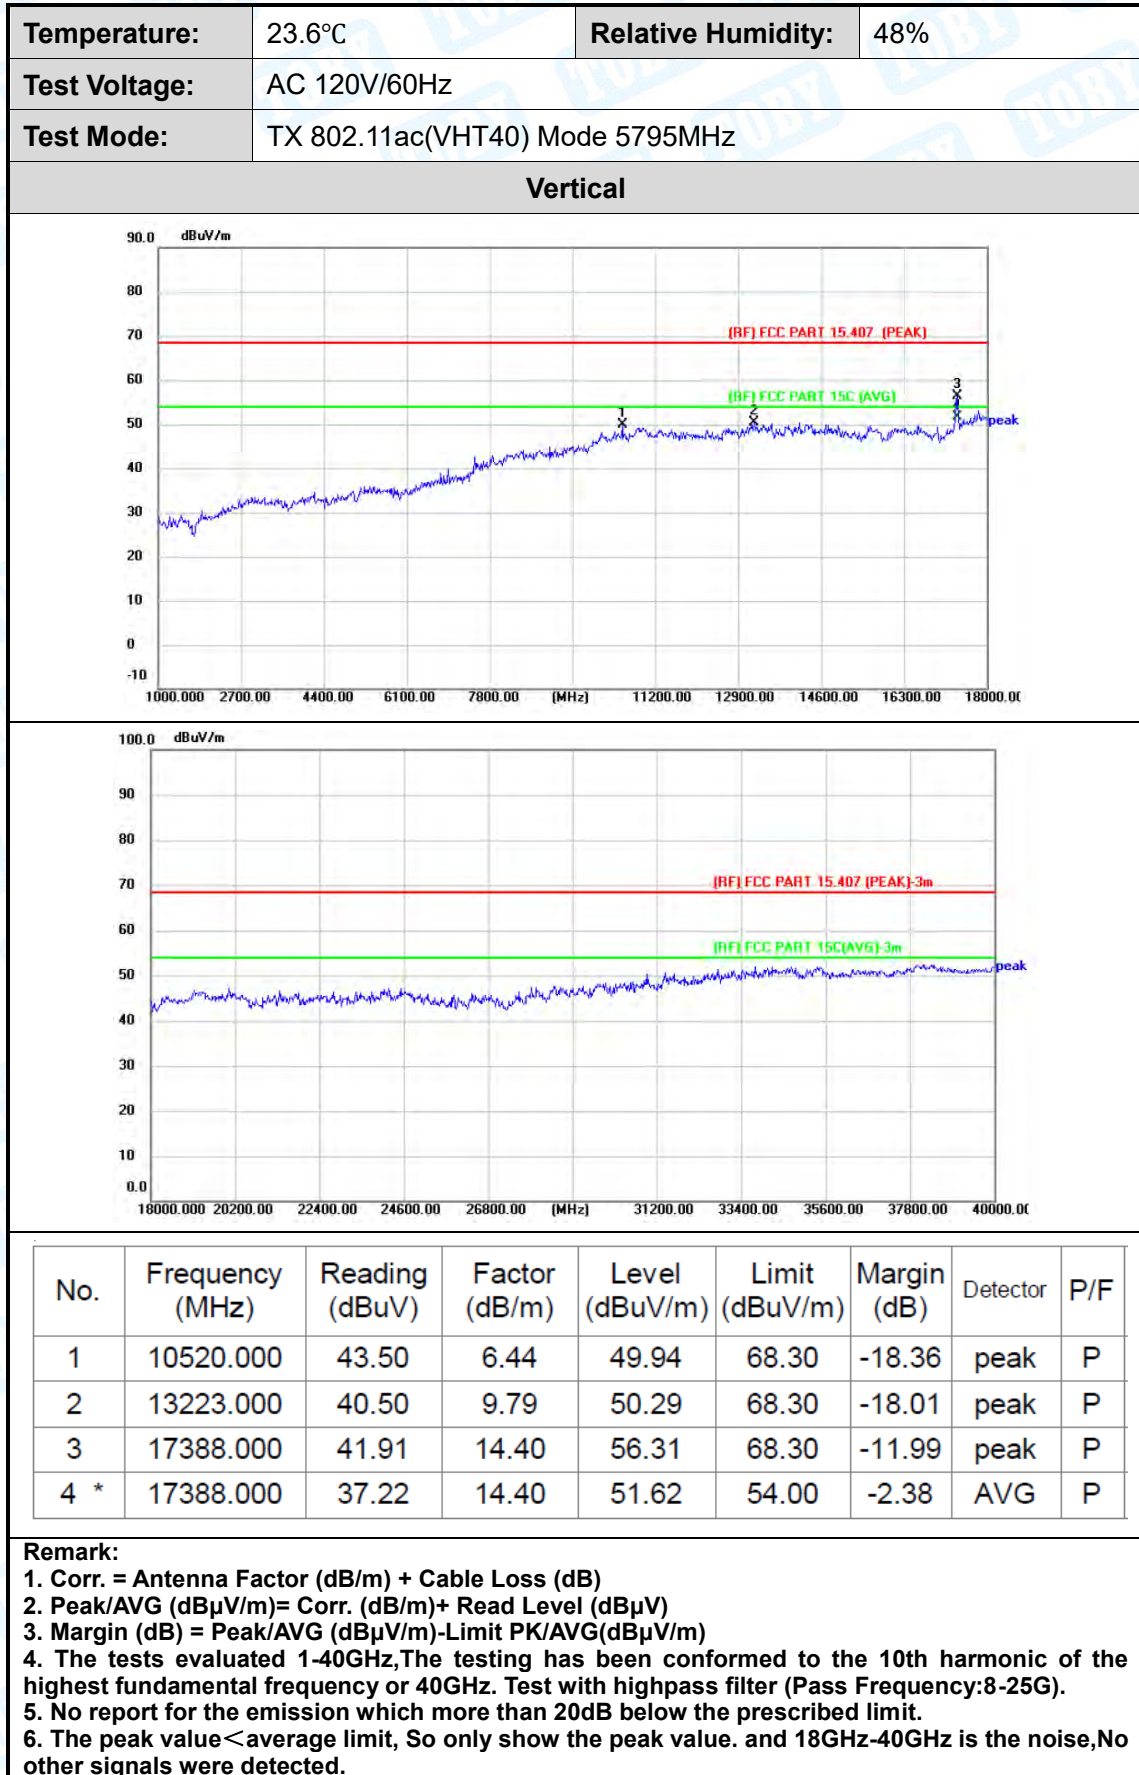



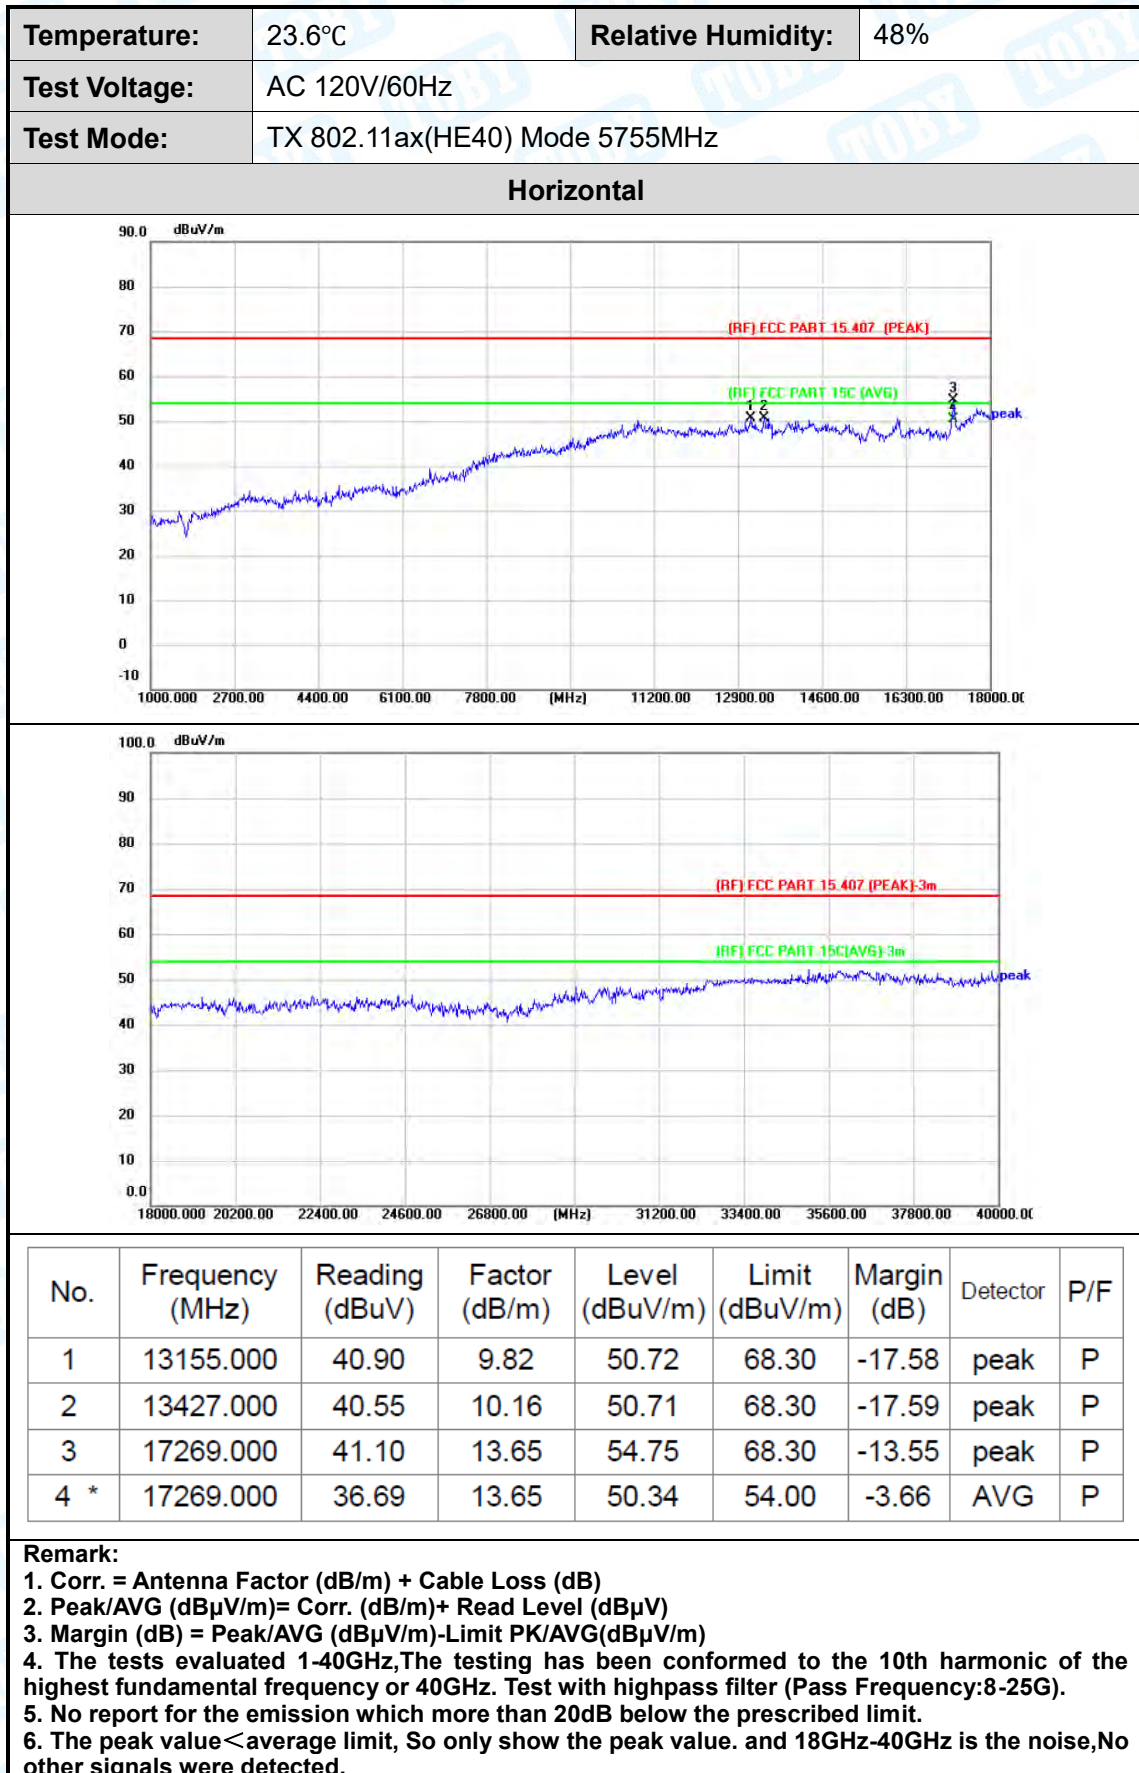


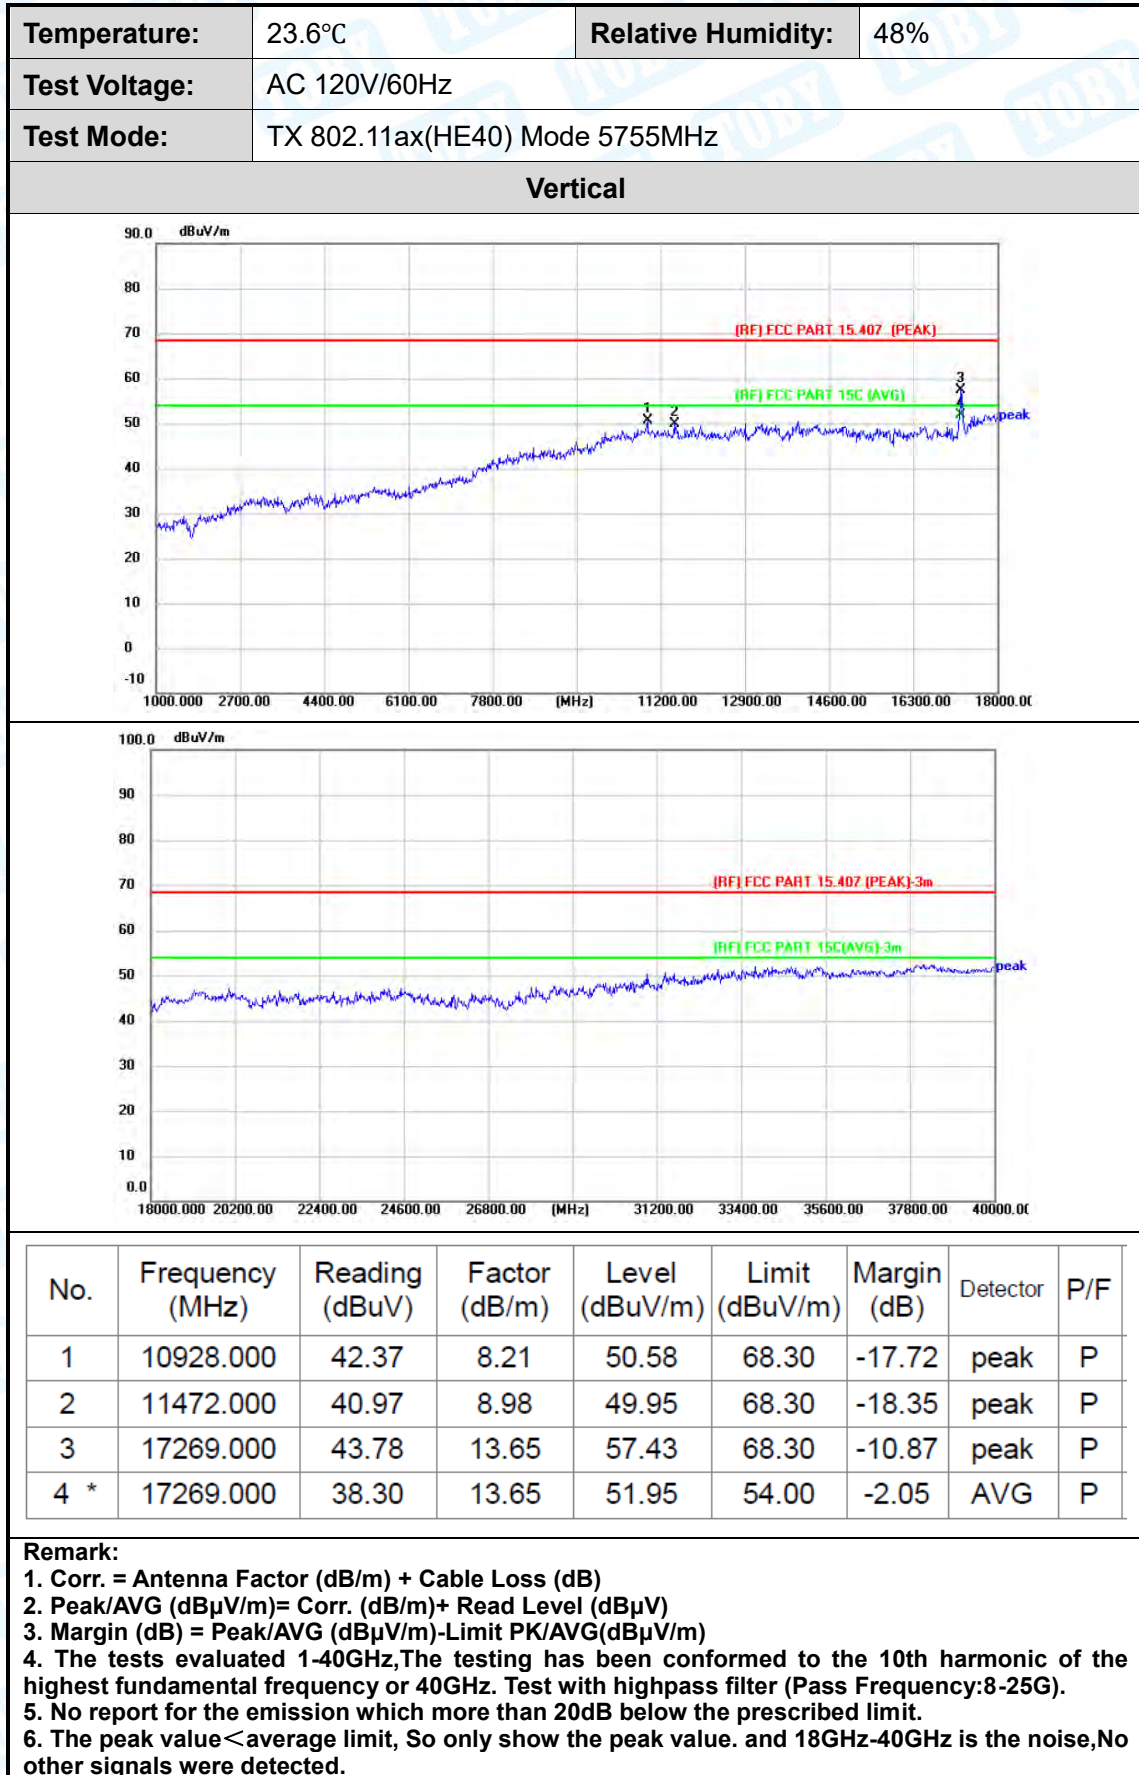

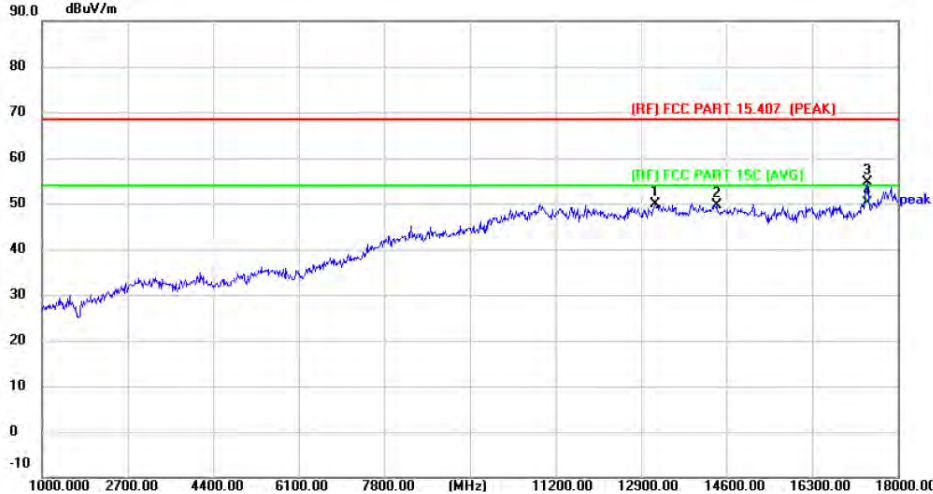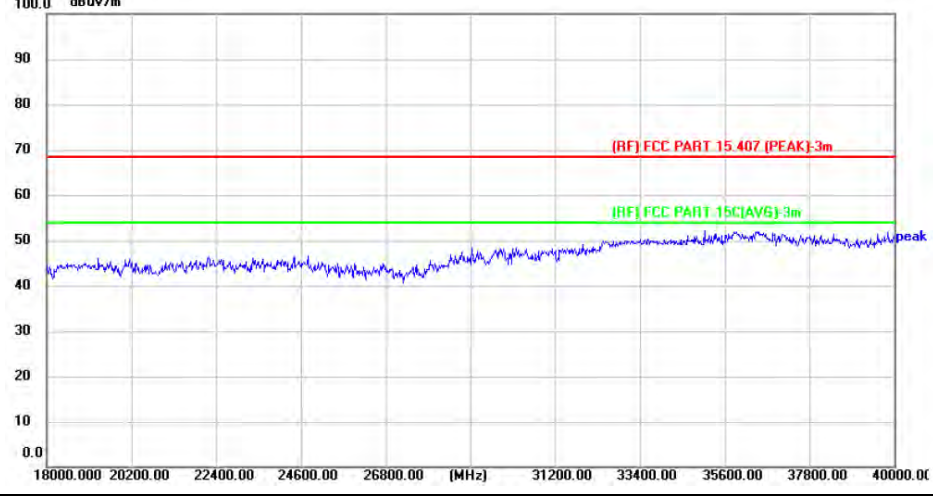
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13189.000	40.09	9.81	49.90	68.30	-18.40	peak	P
2	14396.000	38.75	10.96	49.71	68.30	-18.59	peak	P
3	17388.000	40.13	14.40	54.53	68.30	-13.77	peak	P
4 *	17388.000	35.69	14.40	50.09	54.00	-3.91	AVG	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								




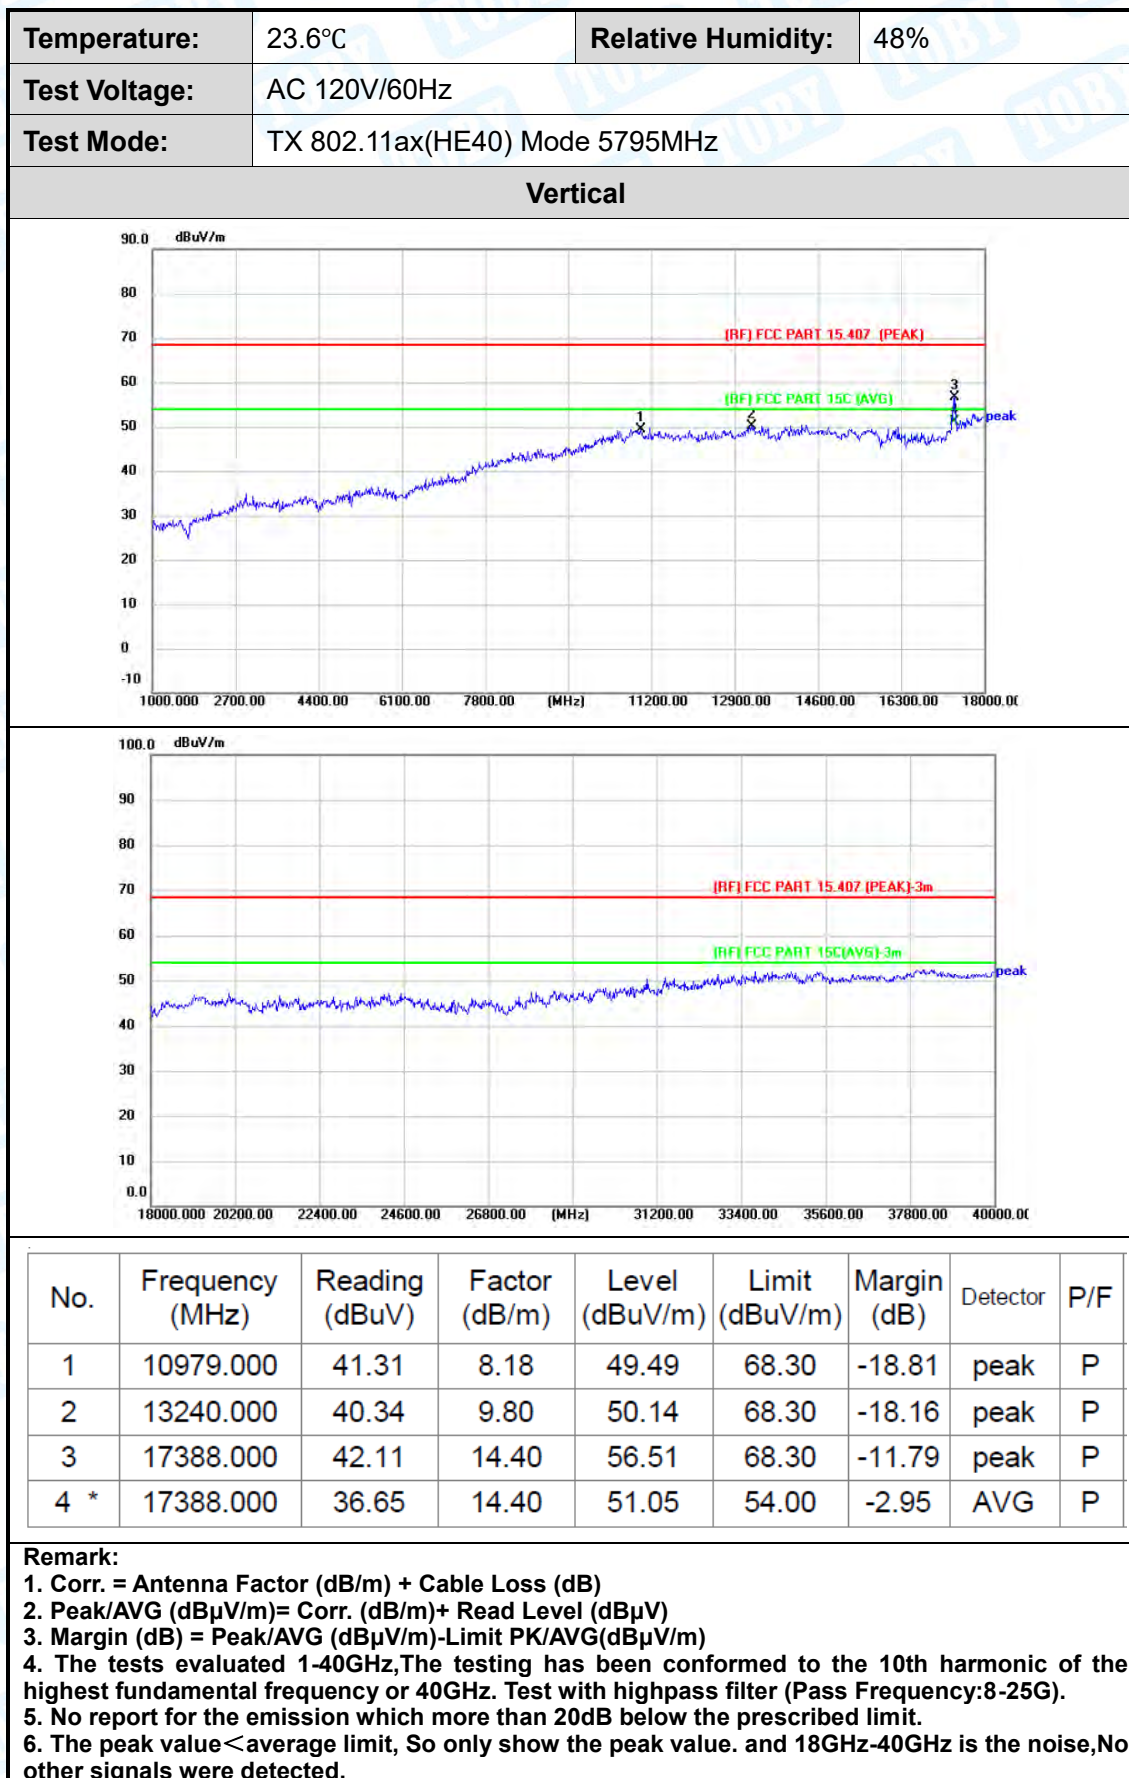

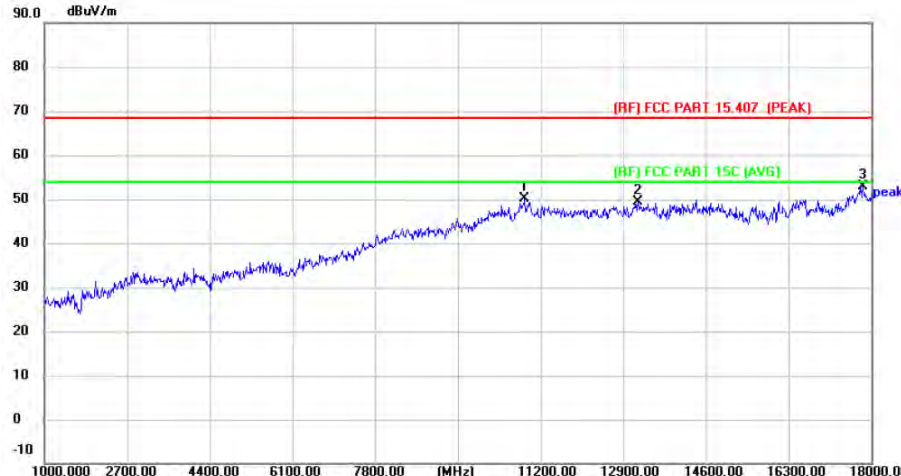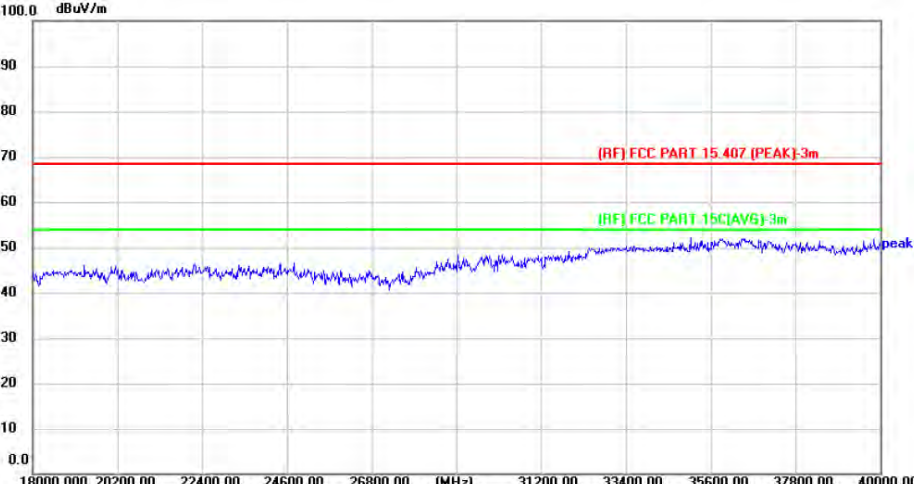
Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10877.000	41.95	8.12	50.07	68.30	-18.23	peak	P
2	13206.000	39.70	9.80	49.50	68.30	-18.80	peak	P
3 *	17830.000	36.04	16.95	52.99	68.30	-15.31	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								





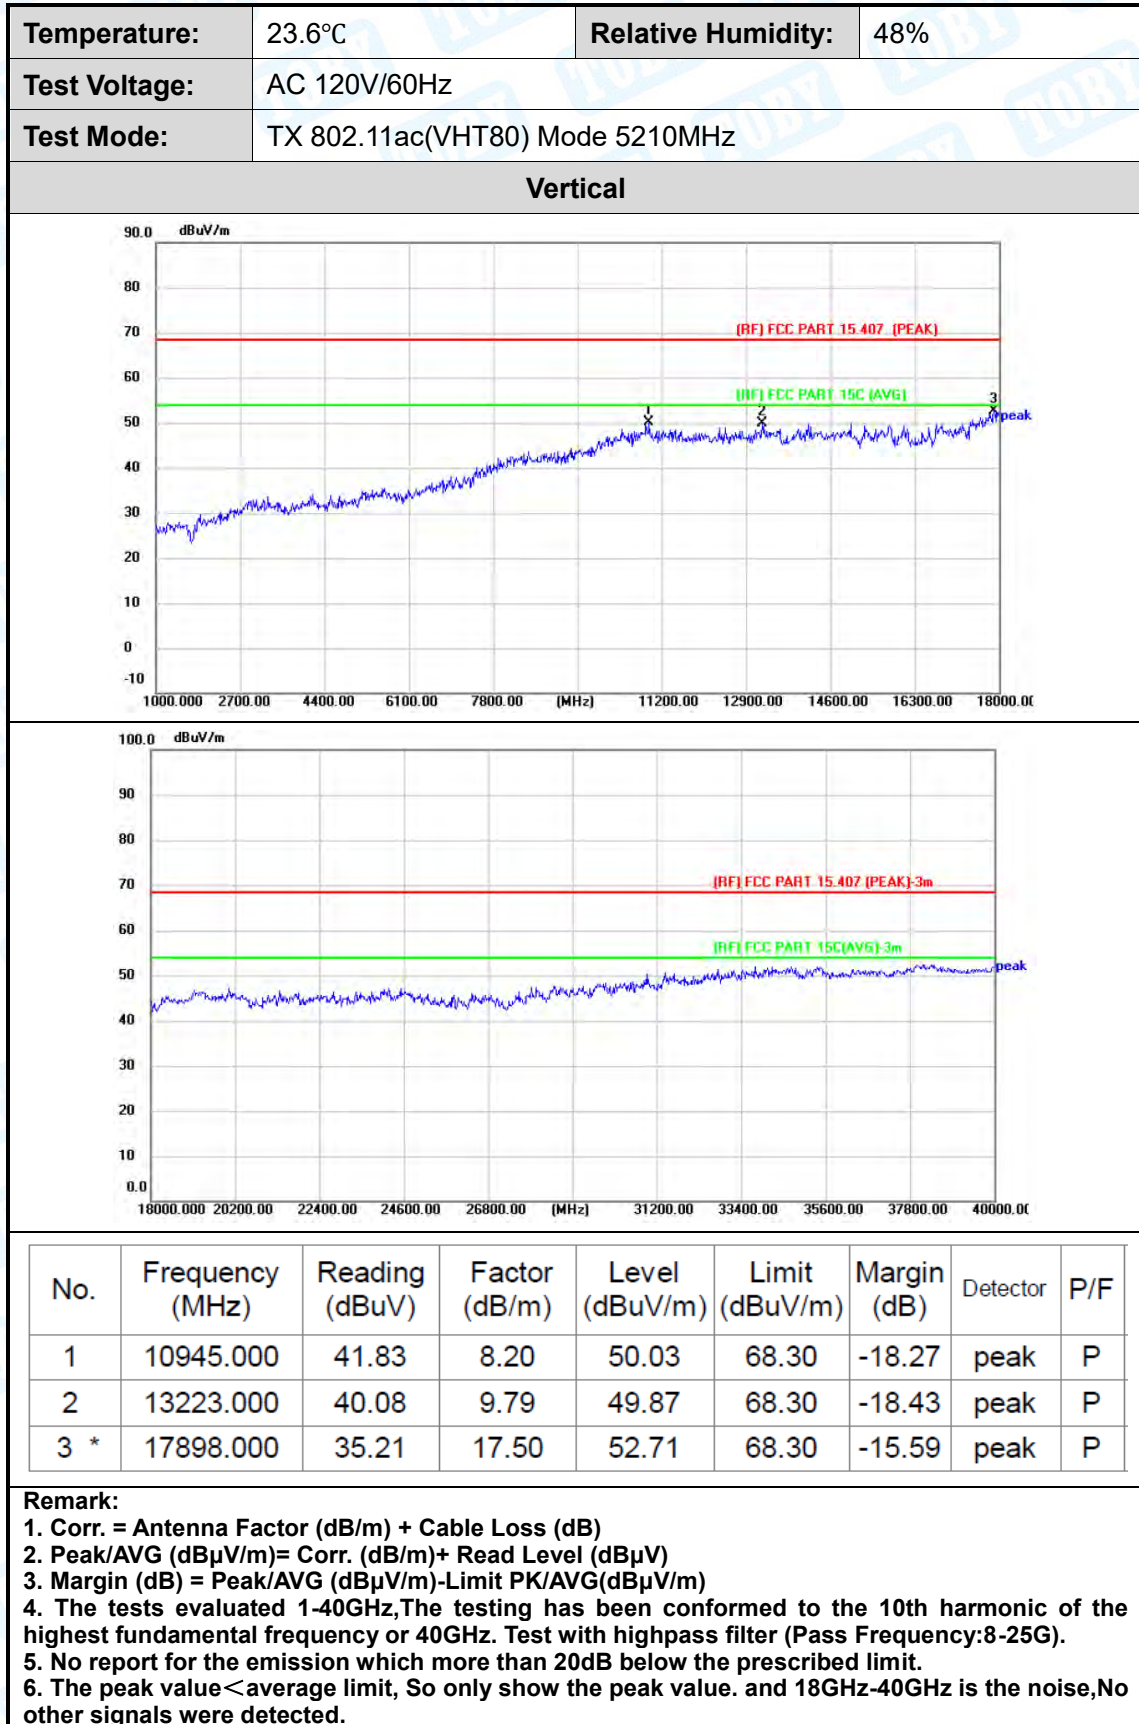

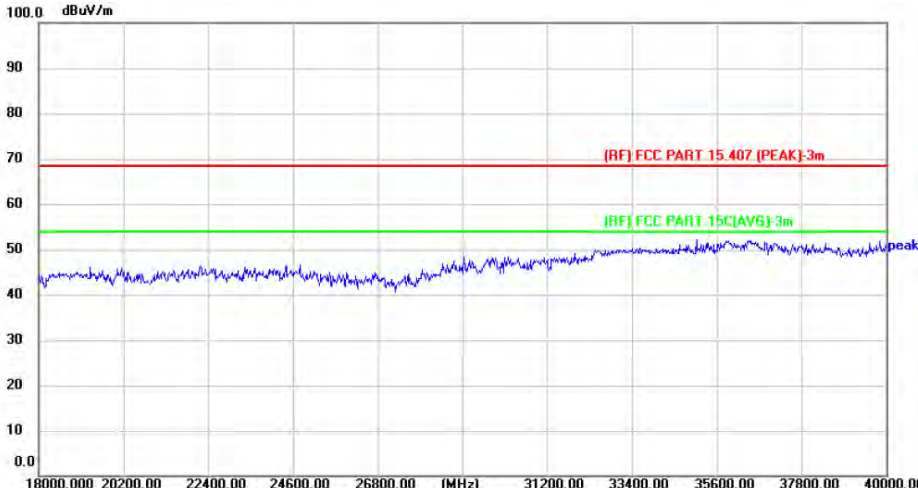Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ax(HE80) Mode 5210MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	13495.000	41.45	10.11	51.56	68.30	-16.74	peak	P
2	15756.000	41.82	8.20	50.02	68.30	-18.28	peak	P
3 *	17830.000	35.81	16.95	52.76	68.30	-15.54	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								



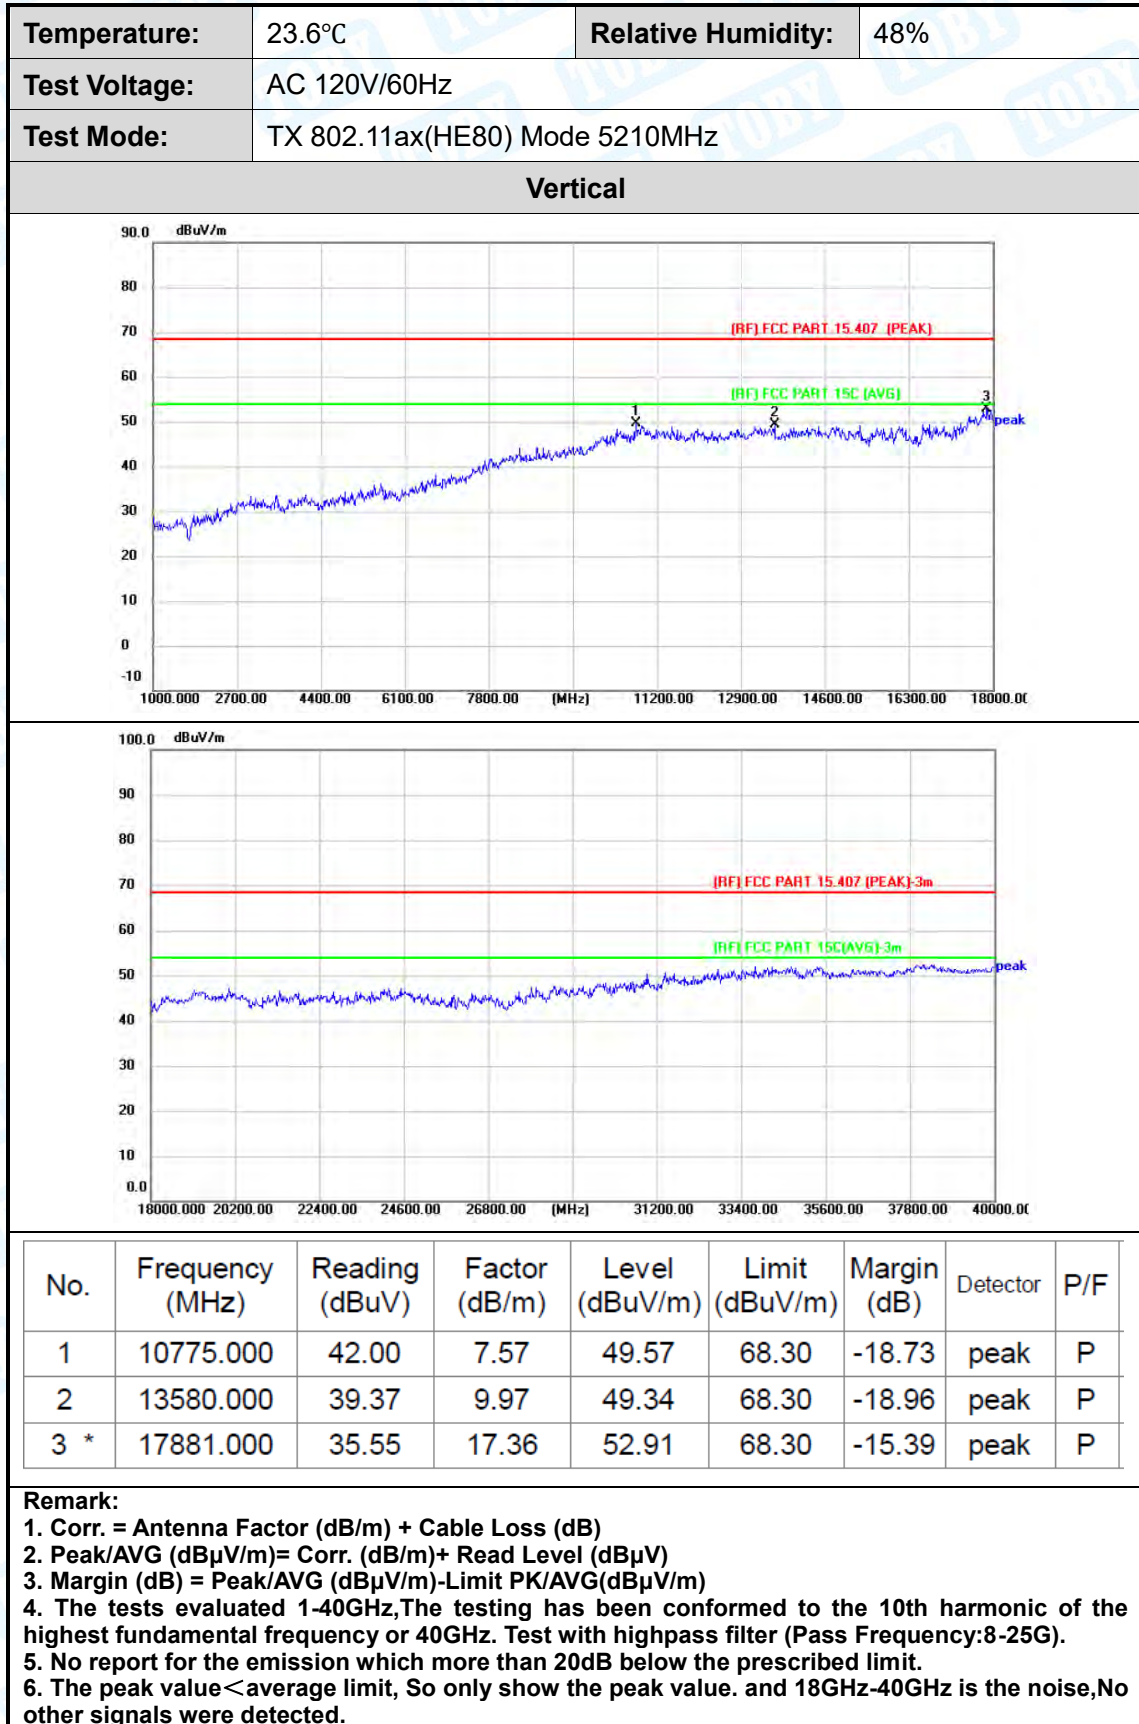

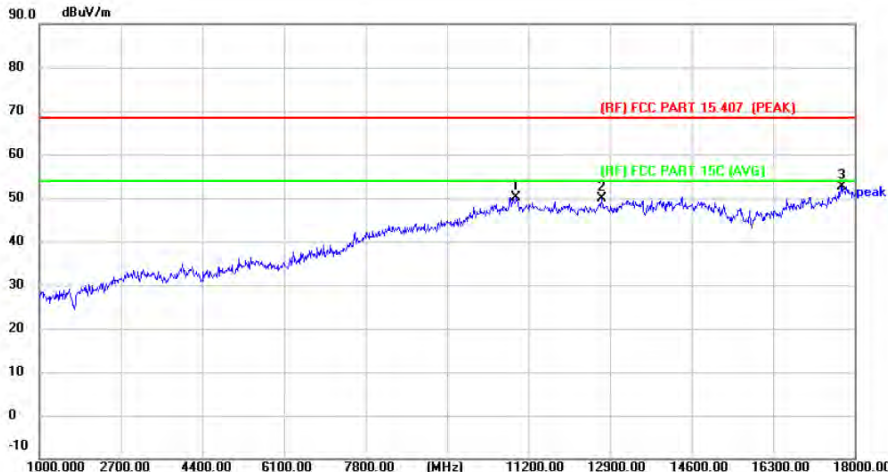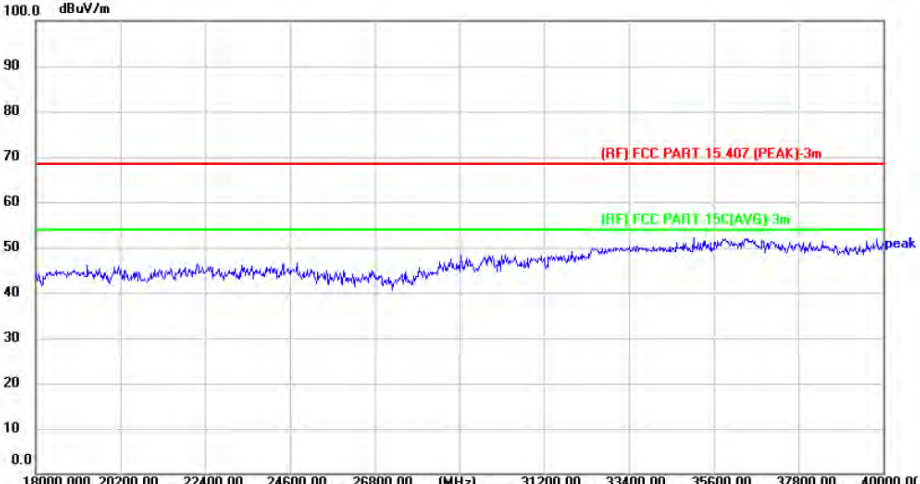Temperature:	23.6°C	Relative Humidity:	48%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10945.000	41.96	8.20	50.16	68.30	-18.14	peak	P
2	12730.000	40.20	9.56	49.76	68.30	-18.54	peak	P
3 *	17745.000	36.38	16.28	52.66	68.30	-15.64	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G). 5. No report for the emission which more than 20dB below the prescribed limit. 6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.								



