

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5G\65

Memo:

Sample Number:S25120216-004;Power Setting:12

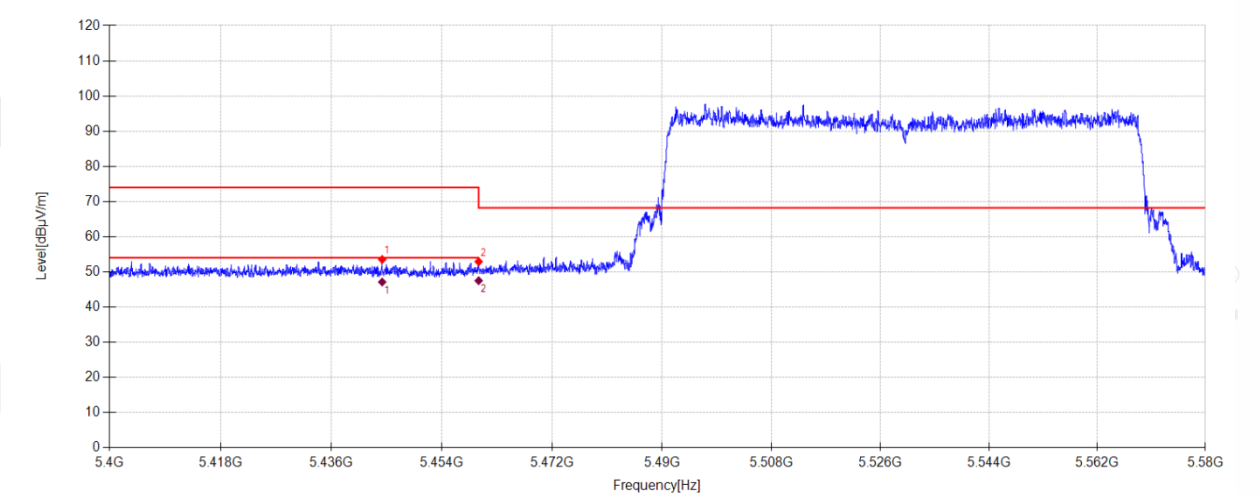

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5444.262	45.25	32.81	5.18	-29.71	53.53	74.00	20.47	PK	Horizontal
2	5460.000	44.53	32.90	5.19	-29.71	52.91	68.20	15.29	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5444.262	38.84	32.81	5.18	47.12	54.00	6.88	AV	Horizontal	
2	5460.000	39.12	32.90	5.19	47.50	54.00	6.50	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5G\66

Memo:

Sample Number:S25120216-004;Power Setting:12

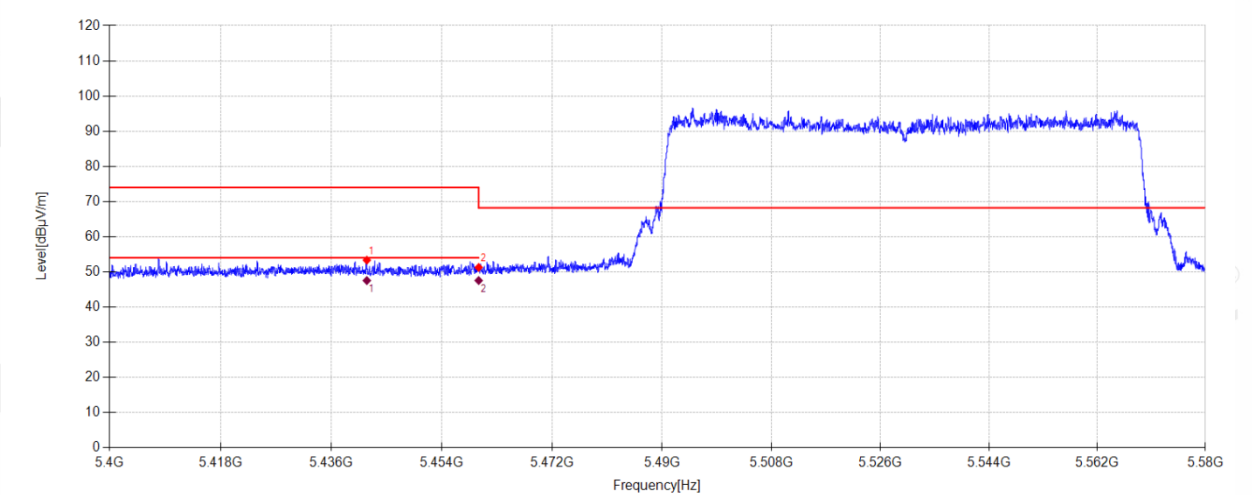

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5441.760	45.04	32.82	5.18	-29.71	53.33	74.00	20.67	PK	Vertical
2	5460.000	42.89	32.90	5.19	-29.71	51.27	68.20	16.93	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5441.760	39.25	32.82	5.18	47.54	54.00	6.46	AV	Vertical	
2	5460.000	39.16	32.90	5.19	47.54	54.00	6.46	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5G\67

Memo:

Sample Number:S25120216-004;Power Setting:12

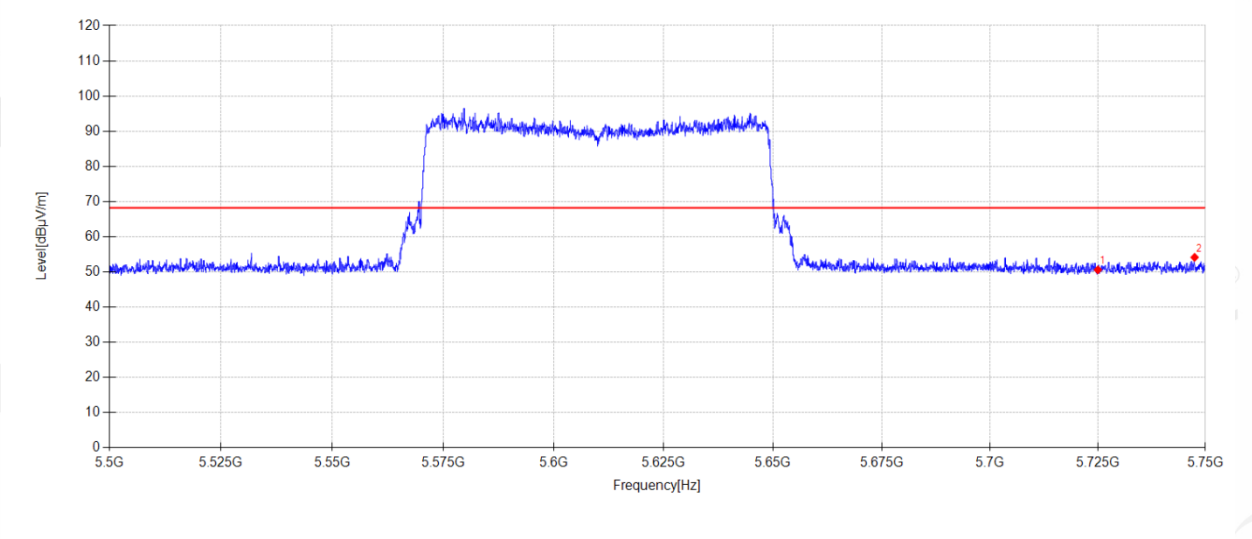

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.48	33.45	5.32	-29.66	50.59	68.20	17.61	PK	Horizontal
2	5747.500	44.69	33.77	5.33	-29.65	54.14	68.20	14.06	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5G\68

Memo:

Sample Number:S25120216-004;Power Setting:12

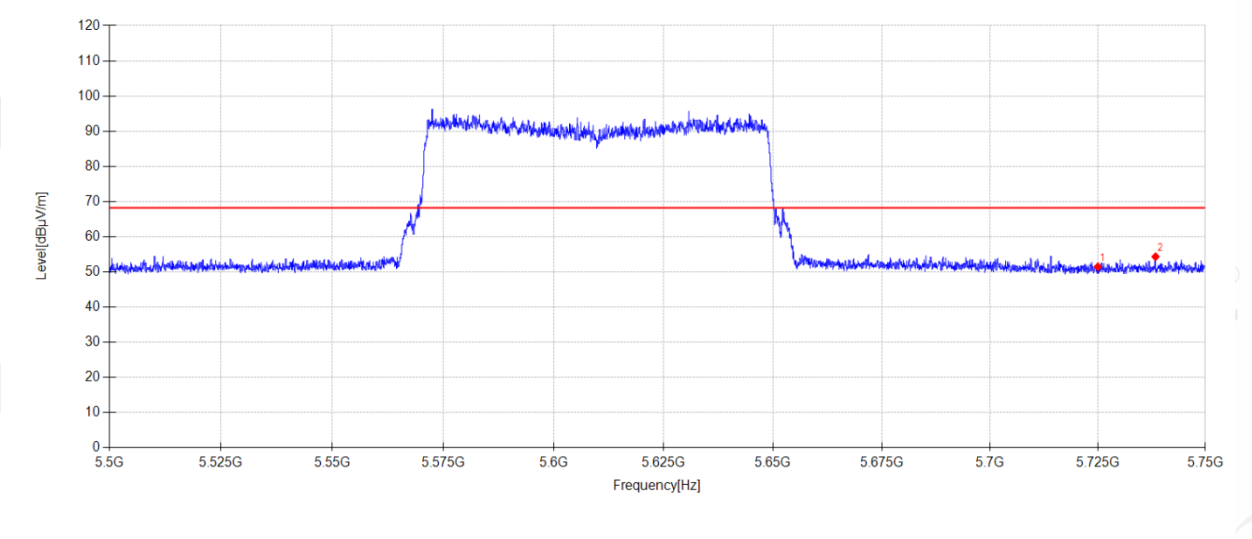

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.35	33.45	5.32	-29.66	51.46	68.20	16.74	PK	Vertical
2	5738.400	45.00	33.64	5.33	-29.65	54.32	68.20	13.88	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongb

Test Mode:ANT1 TX 11A 5720MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\3

Memo:Sample Number:S25120216-004;Power Setting:17

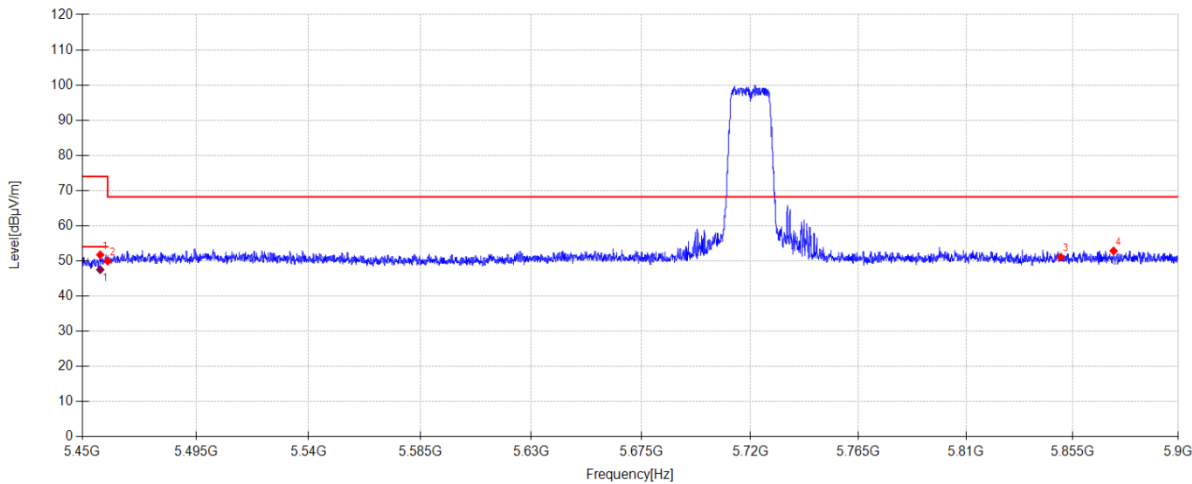

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.065	43.38	32.87	5.19	-29.71	51.73	74.00	22.27	PK	Horizontal
2	5460.000	41.57	32.90	5.19	-29.71	49.95	68.20	18.25	PK	Horizontal
3	5850.000	41.42	33.90	5.39	-29.63	51.08	68.20	17.12	PK	Horizontal
4	5872.415	42.99	34.08	5.40	-29.63	52.84	68.20	15.36	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.065	39.14	32.87	5.19	47.49	54.00	6.51	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongbin

Test Mode:ANT1 TX 11A 5720MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE4

Memo:Sample Number:S25120216-004;Power Setting:17

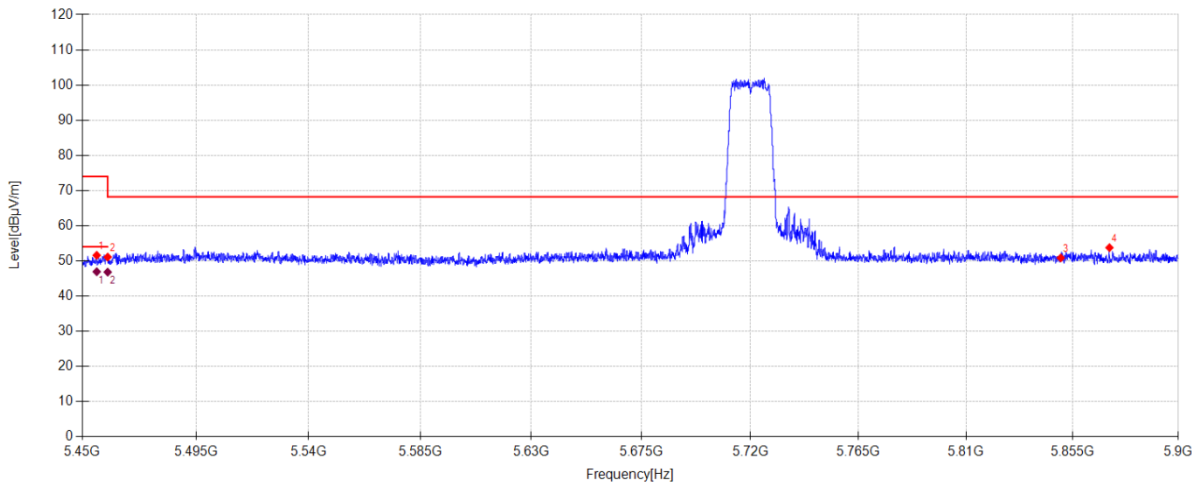

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.670	43.25	32.86	5.19	-29.71	51.59	74.00	22.41	PK	Vertical
2	5460.000	42.71	32.90	5.19	-29.71	51.09	68.20	17.11	PK	Vertical
3	5850.000	41.20	33.90	5.39	-29.63	50.86	68.20	17.34	PK	Vertical
4	5870.660	43.92	34.07	5.40	-29.63	53.76	68.20	14.44	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.670	38.59	32.86	5.19	46.93	54.00	7.07	AV	Vertical	
2	5460.000	38.43	32.90	5.19	46.81	54.00	7.19	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongbin

Test Mode:ANT2 TX 11A 5720MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\1

Memo:Sample Number:S25120216-004;Power Setting:17

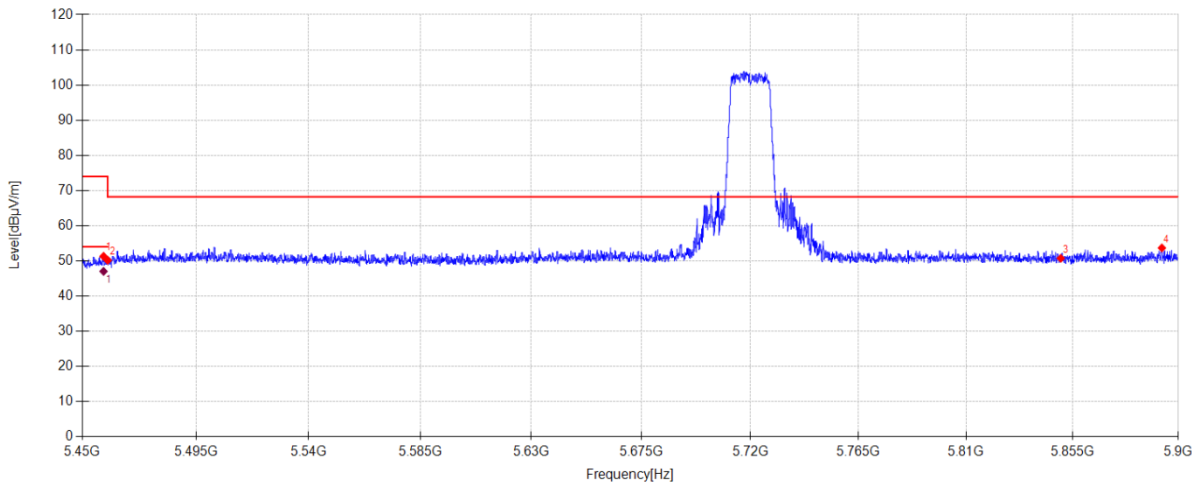

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.370	42.95	32.88	5.19	-29.71	51.31	74.00	22.69	PK	Horizontal
2	5460.000	41.79	32.90	5.19	-29.71	50.17	68.20	18.03	PK	Horizontal
3	5850.000	41.07	33.90	5.39	-29.63	50.73	68.20	17.47	PK	Horizontal
4	5892.980	43.65	34.24	5.41	-29.62	53.68	68.20	14.52	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.370	38.67	32.88	5.19	47.03	54.00	6.97	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\2

Memo:

Sample Number:S25120216-004;Power Setting:17

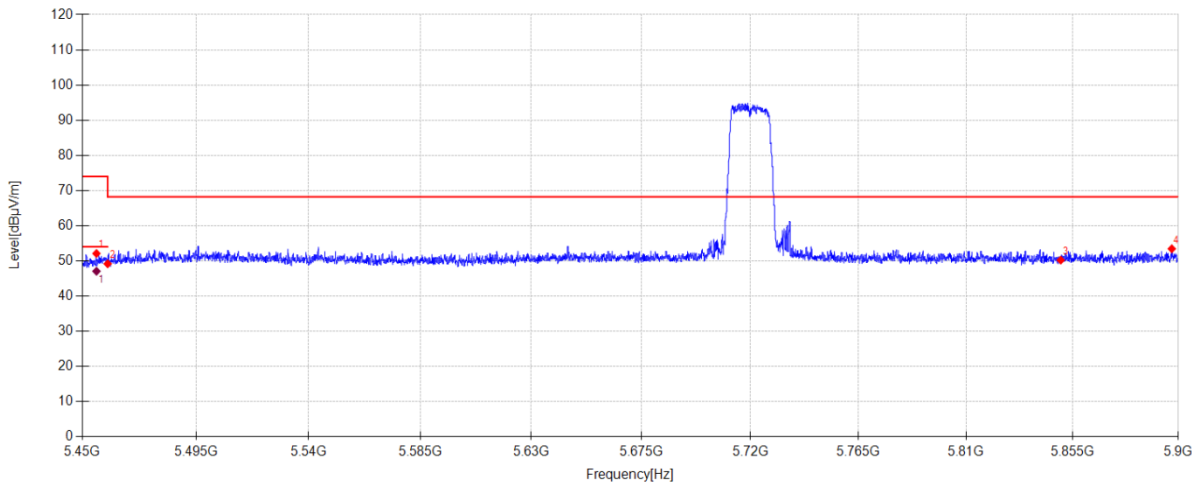

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.580	43.76	32.86	5.19	-29.71	52.10	74.00	21.90	PK	Vertical
2	5460.000	40.79	32.90	5.19	-29.71	49.17	68.20	19.03	PK	Vertical
3	5850.000	40.55	33.90	5.39	-29.63	50.21	68.20	17.99	PK	Vertical
4	5897.210	43.37	34.28	5.41	-29.62	53.44	68.20	14.76	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.580	38.72	32.86	5.19	47.06	54.00	6.94	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\5

Memo:

Sample Number:S25120216-004;Power Setting:16

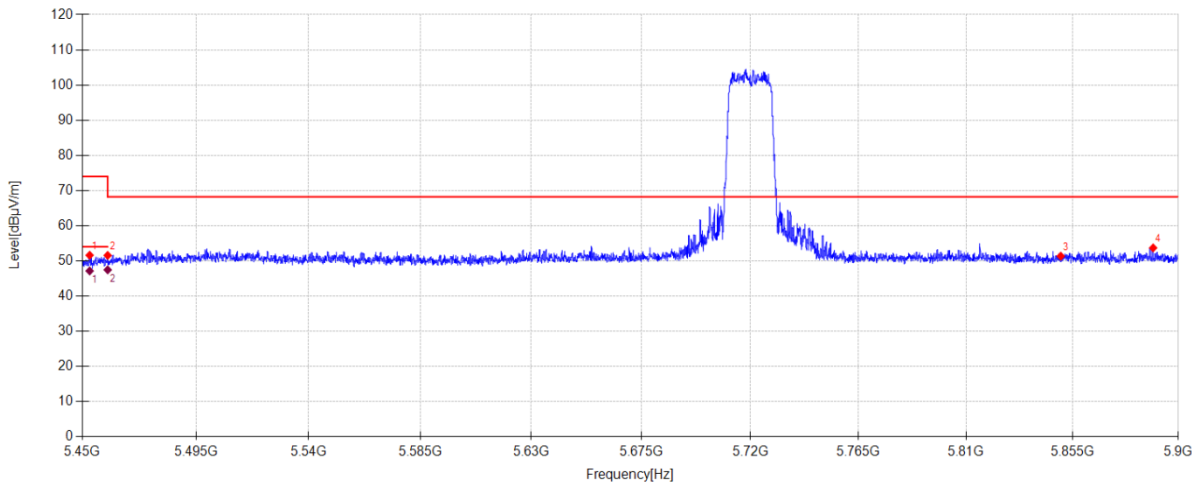

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.880	43.30	32.83	5.19	-29.71	51.61	74.00	22.39	PK	Horizontal
2	5460.000	43.18	32.90	5.19	-29.71	51.56	68.20	16.64	PK	Horizontal
3	5850.000	41.70	33.90	5.39	-29.63	51.36	68.20	16.84	PK	Horizontal
4	5889.245	43.71	34.21	5.40	-29.62	53.70	68.20	14.50	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5452.880	38.84	32.83	5.19	47.15	54.00	6.85	AV	Horizontal	
2	5460.000	39.07	32.90	5.19	47.45	54.00	6.55	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\6

Memo:

Sample Number:S25120216-004;Power Setting:16

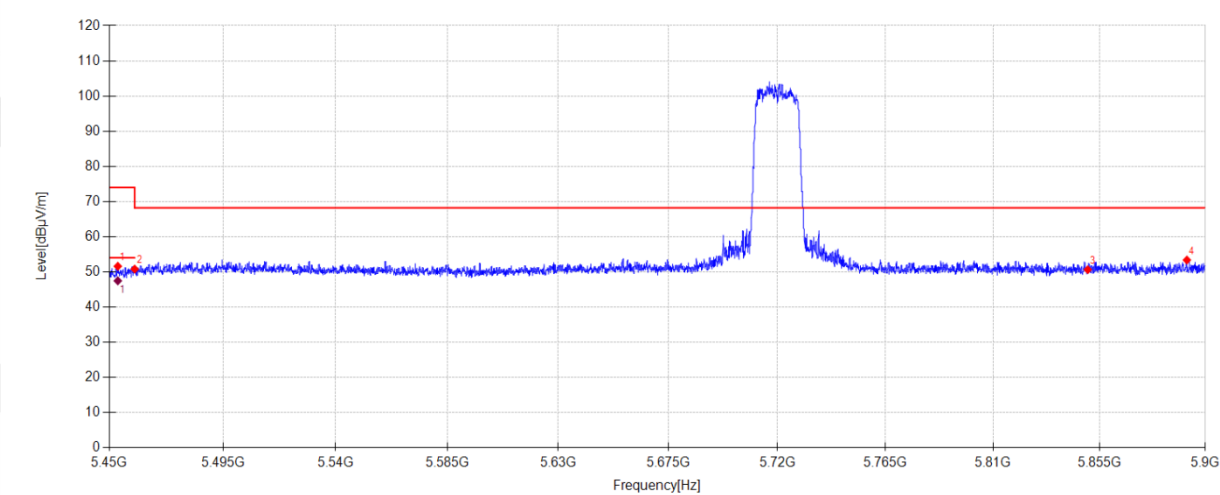

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.330	43.29	32.83	5.19	-29.71	51.60	74.00	22.40	PK	Vertical
2	5460.000	42.42	32.90	5.19	-29.71	50.80	68.20	17.40	PK	Vertical
3	5850.000	40.99	33.90	5.39	-29.63	50.65	68.20	17.55	PK	Vertical
4	5892.125	43.35	34.24	5.41	-29.62	53.38	68.20	14.82	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.330	39.15	32.83	5.19	47.46	54.00	6.54	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\7

Memo:

Sample Number:S25120216-004;Power Setting:15

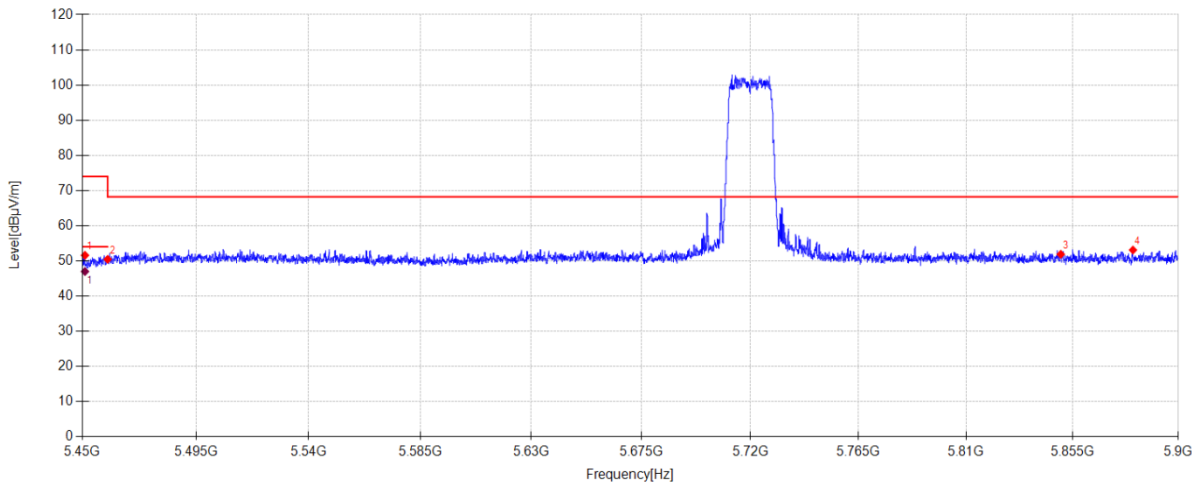

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.035	43.29	32.81	5.19	-29.71	51.58	74.00	22.42	PK	Horizontal
2	5460.000	42.07	32.90	5.19	-29.71	50.45	68.20	17.75	PK	Horizontal
3	5850.000	42.22	33.90	5.39	-29.63	51.88	68.20	16.32	PK	Horizontal
4	5880.650	43.17	34.15	5.40	-29.62	53.10	68.20	15.10	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5451.035	38.70	32.81	5.19	46.99	54.00	7.01	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongb

Test Mode:MIMO TX 11AC20 5720MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\8

Memo:Sample Number:S25120216-004;Power Setting:15

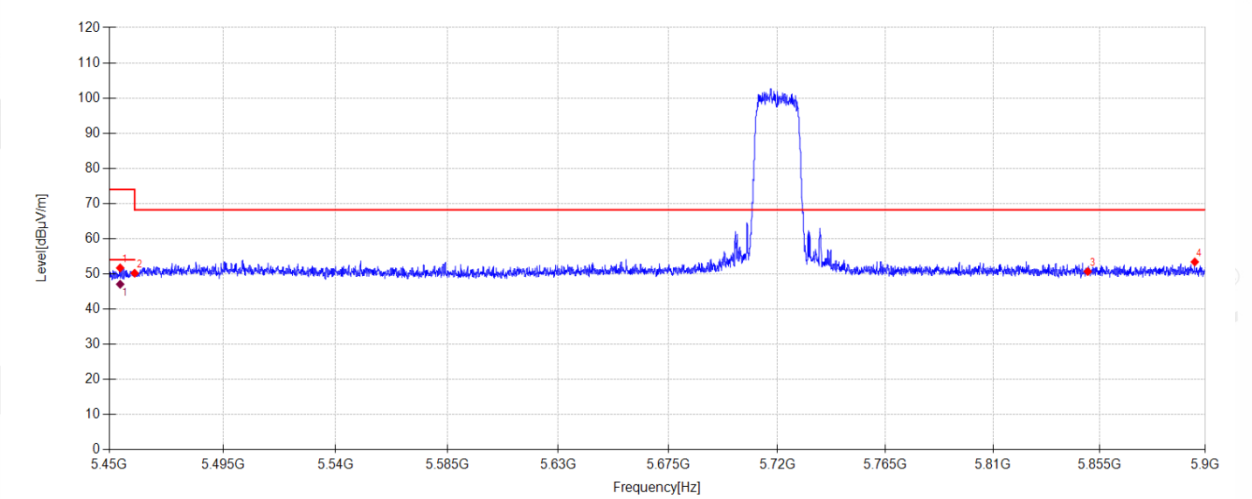

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.275	43.37	32.84	5.19	-29.71	51.69	74.00	22.31	PK	Vertical
2	5460.000	41.81	32.90	5.19	-29.71	50.19	68.20	18.01	PK	Vertical
3	5850.000	41.02	33.90	5.39	-29.63	50.68	68.20	17.52	PK	Vertical
4	5895.500	43.35	34.26	5.41	-29.62	53.40	68.20	14.80	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.275	38.75	32.84	5.19	47.07	54.00	6.93	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\9

Memo:

Sample Number:S25120216-004;Power Setting:14

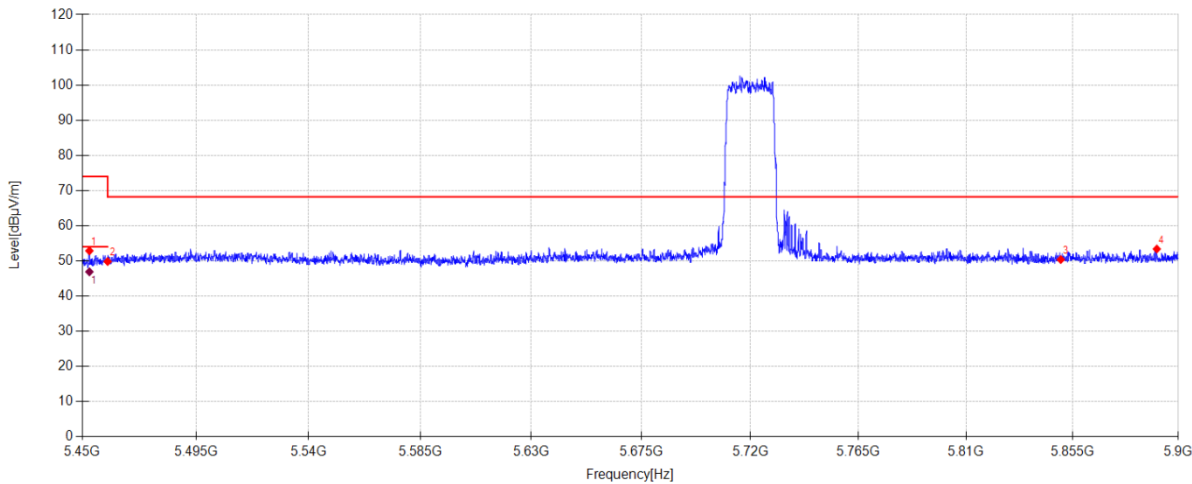

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.790	44.56	32.83	5.19	-29.71	52.87	74.00	21.13	PK	Horizontal
2	5460.000	41.44	32.90	5.19	-29.71	49.82	68.20	18.38	PK	Horizontal
3	5850.000	40.73	33.90	5.39	-29.63	50.39	68.20	17.81	PK	Horizontal
4	5890.820	43.36	34.23	5.41	-29.62	53.38	68.20	14.82	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5452.790	38.59	32.83	5.19	46.90	54.00	7.10	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\10

Memo:

Sample Number:S25120216-004;Power Setting:14

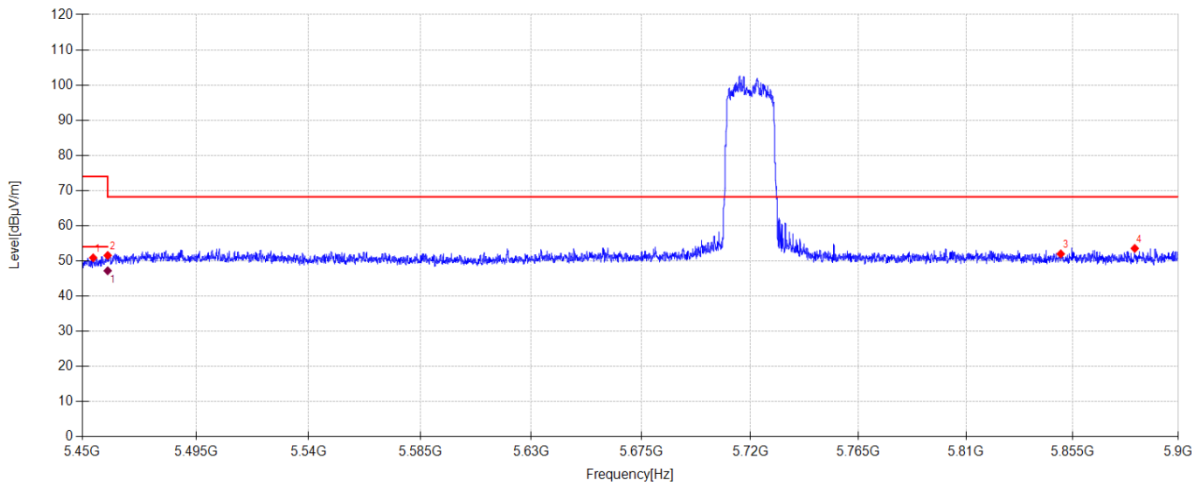

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.275	42.57	32.84	5.19	-29.71	50.89	74.00	23.11	PK	Vertical
2	5460.000	43.17	32.90	5.19	-29.71	51.55	68.20	16.65	PK	Vertical
3	5850.000	42.33	33.90	5.39	-29.63	51.99	68.20	16.21	PK	Vertical
4	5881.415	43.62	34.15	5.40	-29.62	53.55	68.20	14.65	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5460.000	38.82	32.90	5.19	47.20	54.00	6.80	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\15

Memo:

Sample Number:S25120216-004;Power Setting:14

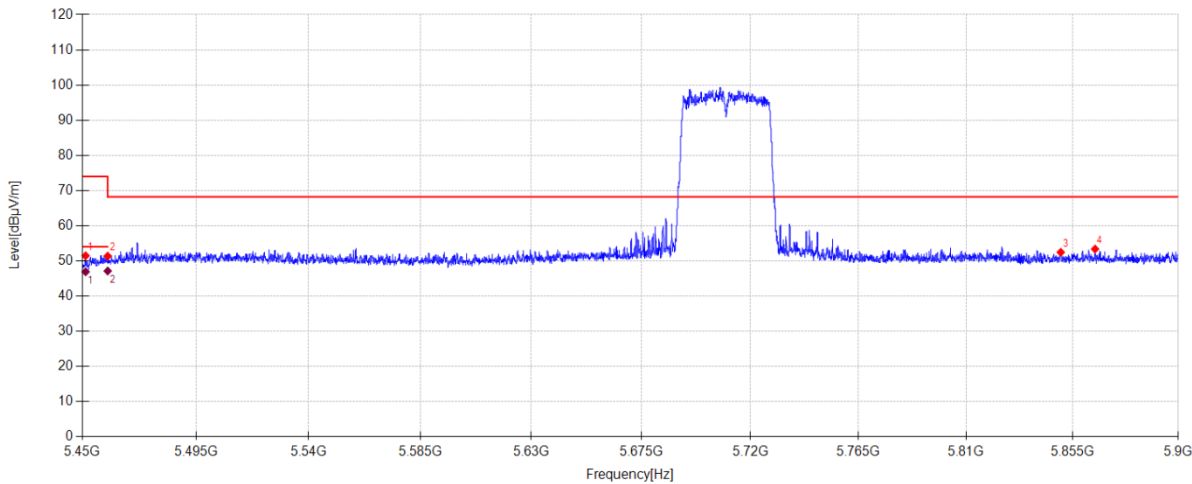

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5451.305	43.17	32.81	5.19	-29.71	51.46	74.00	22.54	PK	Horizontal
2	5460.000	42.99	32.90	5.19	-29.71	51.37	68.20	16.83	PK	Horizontal
3	5850.000	42.80	33.90	5.39	-29.63	52.46	68.20	15.74	PK	Horizontal
4	5864.540	43.59	34.02	5.39	-29.63	53.37	68.20	14.83	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5451.305	38.62	32.81	5.19	46.91	54.00	7.09	AV	Horizontal	
2	5460.000	38.76	32.90	5.19	47.14	54.00	6.86	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\16

Memo:

Sample Number:S25120216-004;Power Setting:14

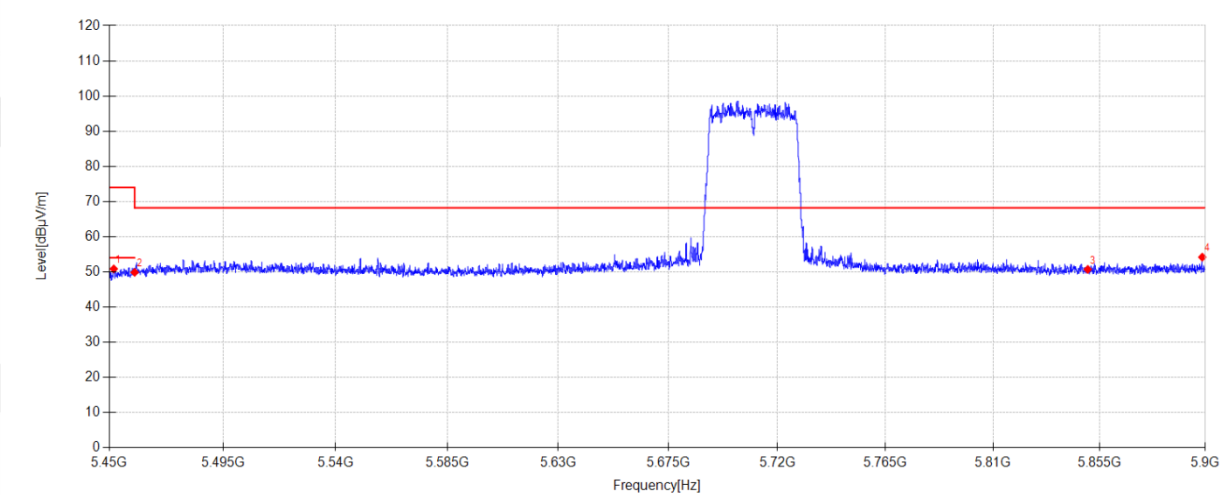

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.755	42.55	32.82	5.19	-29.71	50.85	74.00	23.15	PK	Vertical
2	5460.000	41.49	32.90	5.19	-29.71	49.87	68.20	18.33	PK	Vertical
3	5850.000	41.06	33.90	5.39	-29.63	50.72	68.20	17.48	PK	Vertical
4	5898.695	44.11	34.29	5.41	-29.62	54.19	68.20	14.01	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\13

Memo:

Sample Number:S25120216-004;Power Setting:14

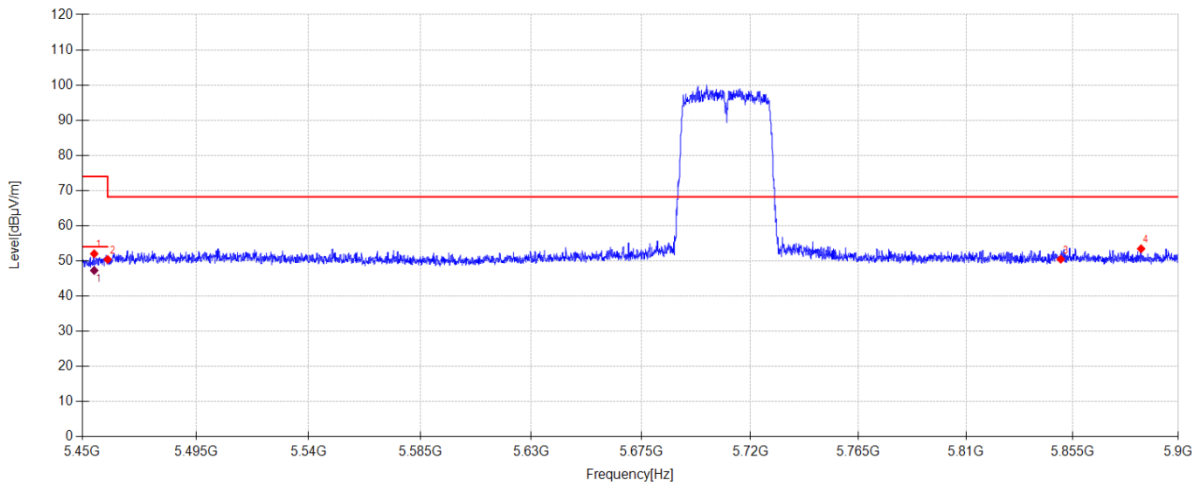

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5454.680	43.70	32.85	5.19	-29.71	52.03	74.00	21.97	PK	Horizontal
2	5460.000	42.04	32.90	5.19	-29.71	50.42	68.20	17.78	PK	Horizontal
3	5850.000	40.82	33.90	5.39	-29.63	50.48	68.20	17.72	PK	Horizontal
4	5884.115	43.50	34.17	5.40	-29.62	53.45	68.20	14.75	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5454.680	38.95	32.85	5.19	47.28	54.00	6.72	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\14

Memo:

Sample Number:S25120216-004;Power Setting:14

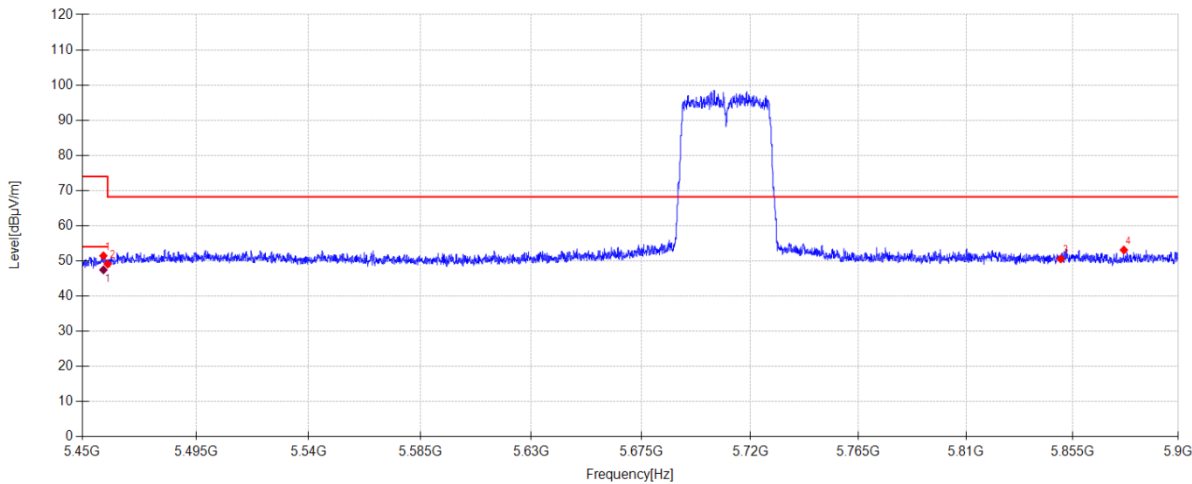

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5458.325	43.09	32.88	5.19	-29.71	51.45	74.00	22.55	PK	Vertical
2	5460.000	40.75	32.90	5.19	-29.71	49.13	68.20	19.07	PK	Vertical
3	5850.000	40.91	33.90	5.39	-29.63	50.57	68.20	17.63	PK	Vertical
4	5876.780	43.22	34.11	5.40	-29.62	53.11	68.20	15.09	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5458.325	39.09	32.88	5.19	47.45	54.00	6.55	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongbin

Test Mode:MIMO TX 11AX40 5710MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\11

Memo:Sample Number:S25120216-004;Power Setting:14

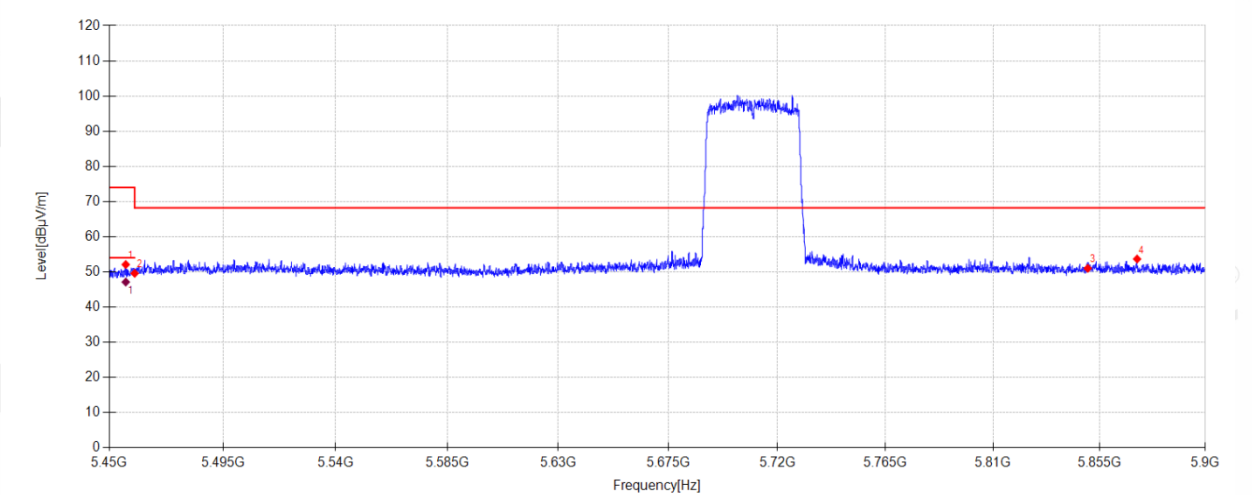

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.480	43.75	32.86	5.19	-29.71	52.09	74.00	21.91	PK	Horizontal
2	5460.000	41.21	32.90	5.19	-29.71	49.59	68.20	18.61	PK	Horizontal
3	5850.000	41.37	33.90	5.39	-29.63	51.03	68.20	17.17	PK	Horizontal
4	5870.930	43.82	34.07	5.40	-29.63	53.66	68.20	14.54	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.480	38.78	32.86	5.19	47.12	54.00	6.88	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\12

Memo:

Sample Number:S25120216-004;Power Setting:14

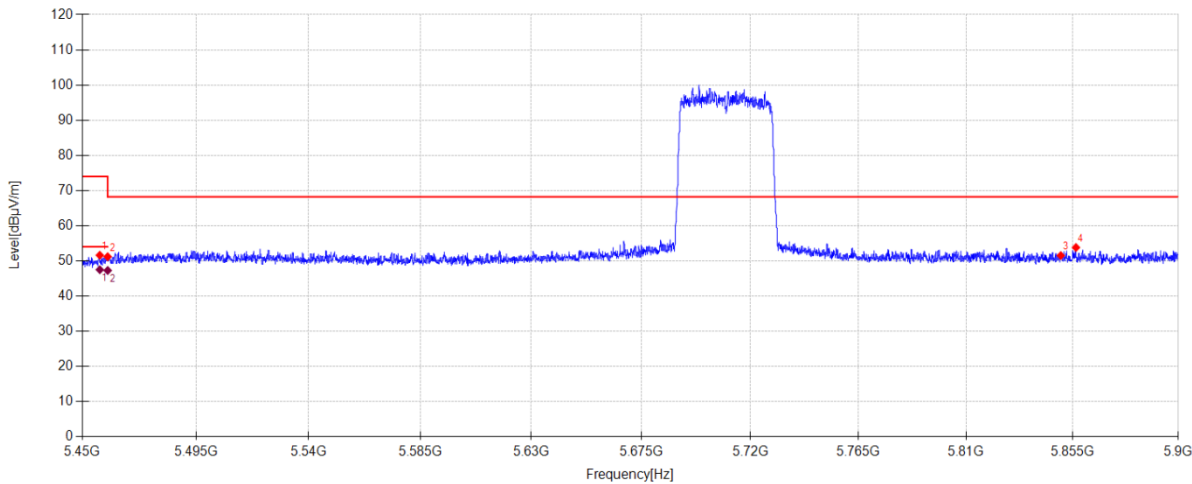

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.885	43.26	32.87	5.19	-29.71	51.61	74.00	22.39	PK	Vertical
2	5460.000	42.81	32.90	5.19	-29.71	51.19	68.20	17.01	PK	Vertical
3	5850.000	41.86	33.90	5.39	-29.63	51.52	68.20	16.68	PK	Vertical
4	5856.440	44.10	33.95	5.39	-29.63	53.81	68.20	14.39	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.885	39.15	32.87	5.19	47.50	54.00	6.50	AV	Vertical	
2	5460.000	38.90	32.90	5.19	47.28	54.00	6.72	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%


Test Site:

DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\17

Memo: Sample Number:S25120216-004;Power Setting:12

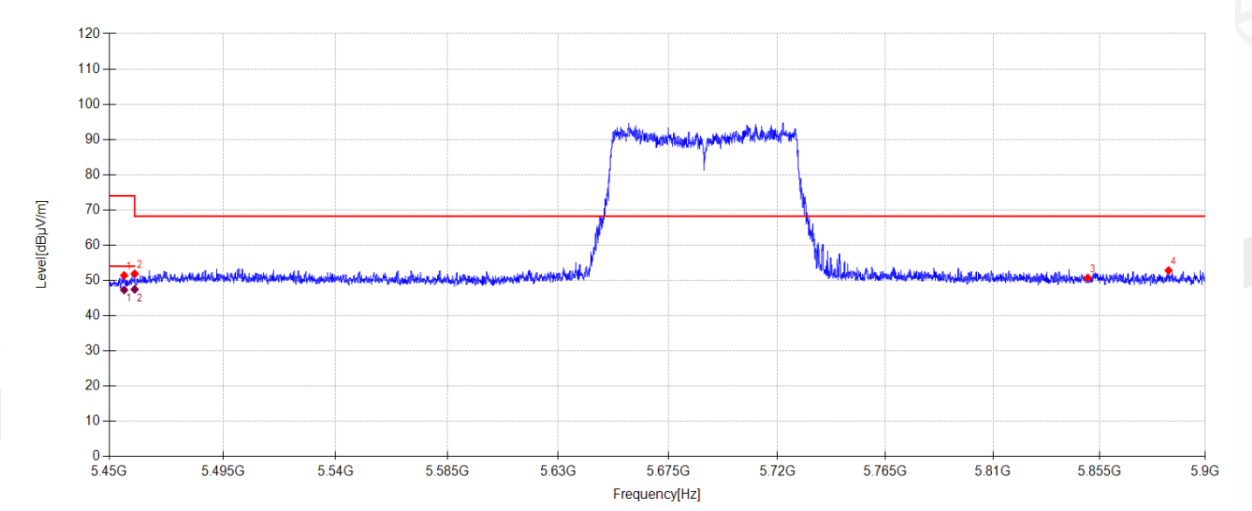

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.850	43.07	32.86	5.19	-29.71	51.41	74.00	22.59	PK	Horizontal
2	5460.000	43.49	32.90	5.19	-29.71	51.87	68.20	16.33	PK	Horizontal
3	5850.000	41.05	33.90	5.39	-29.63	50.71	68.20	17.49	PK	Horizontal
4	5884.340	42.87	34.17	5.40	-29.62	52.82	68.20	15.38	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.850	38.95	32.86	5.19	47.29	54.00	6.71	AV	Horizontal	
2	5460.000	39.07	32.90	5.19	47.45	54.00	6.55	AV	Horizontal	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\18

Memo:

Sample Number:S25120216-004;Power Setting:12

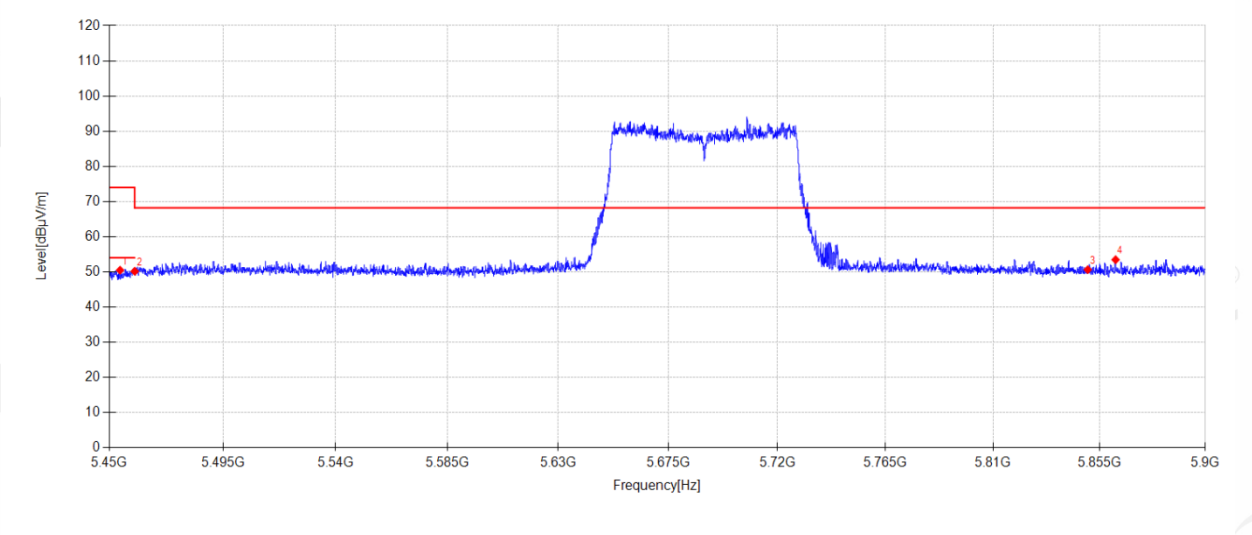

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.230	42.17	32.84	5.19	-29.71	50.49	74.00	23.51	PK	Vertical
2	5460.000	41.79	32.90	5.19	-29.71	50.17	68.20	18.03	PK	Vertical
3	5850.000	40.99	33.90	5.39	-29.63	50.65	68.20	17.55	PK	Vertical
4	5861.795	43.71	33.99	5.39	-29.63	53.46	68.20	14.74	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongbin

Test Mode:MIMO TX 11AX80 5690MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\19

Memo:Sample Number:S25120216-004;Power Setting:12

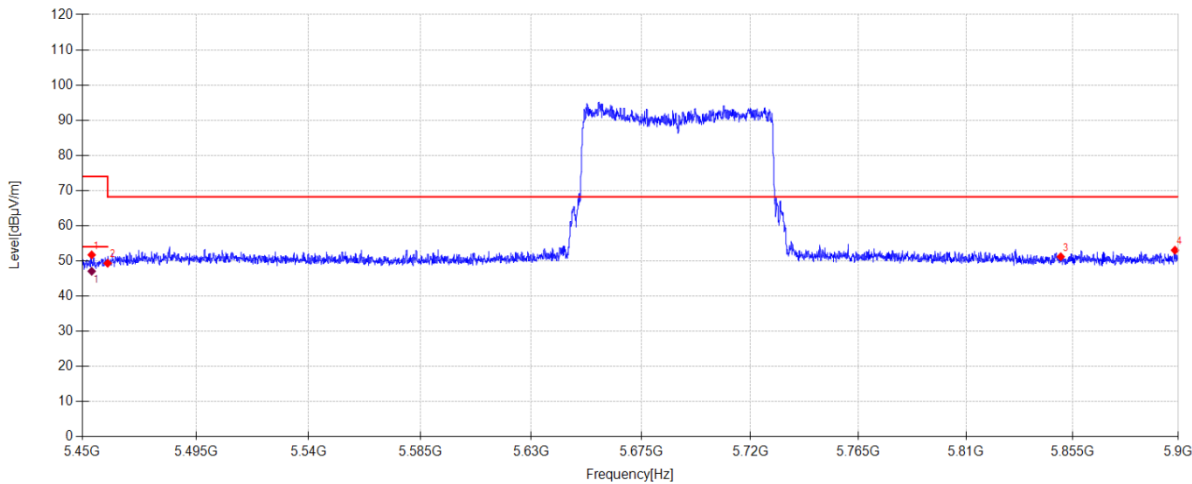

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.690	43.40	32.84	5.19	-29.71	51.72	74.00	22.28	PK	Horizontal
2	5460.000	40.95	32.90	5.19	-29.71	49.33	68.20	18.87	PK	Horizontal
3	5850.000	41.53	33.90	5.39	-29.63	51.19	68.20	17.01	PK	Horizontal
4	5898.560	42.95	34.29	5.41	-29.62	53.03	68.20	15.17	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.690	38.74	32.84	5.19	47.06	54.00	6.94	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G KUAYUE\20

Memo:

Sample Number:S25120216-004;Power Setting:12

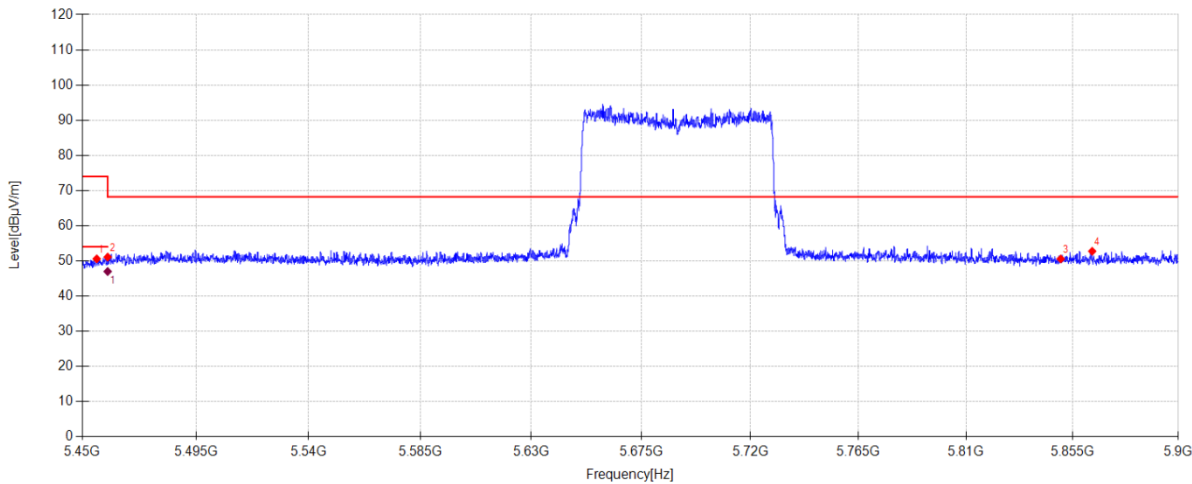

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5455.670	42.24	32.86	5.19	-29.71	50.58	74.00	23.42	PK	Vertical
2	5460.000	42.71	32.90	5.19	-29.71	51.09	68.20	17.11	PK	Vertical
3	5850.000	40.90	33.90	5.39	-29.63	50.56	68.20	17.64	PK	Vertical
4	5863.325	42.98	34.01	5.39	-29.63	52.75	68.20	15.45	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5460.000	38.61	32.90	5.19	46.99	54.00	7.01	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\7

Memo:

Sample Number:S25120216-004;Power Setting:17

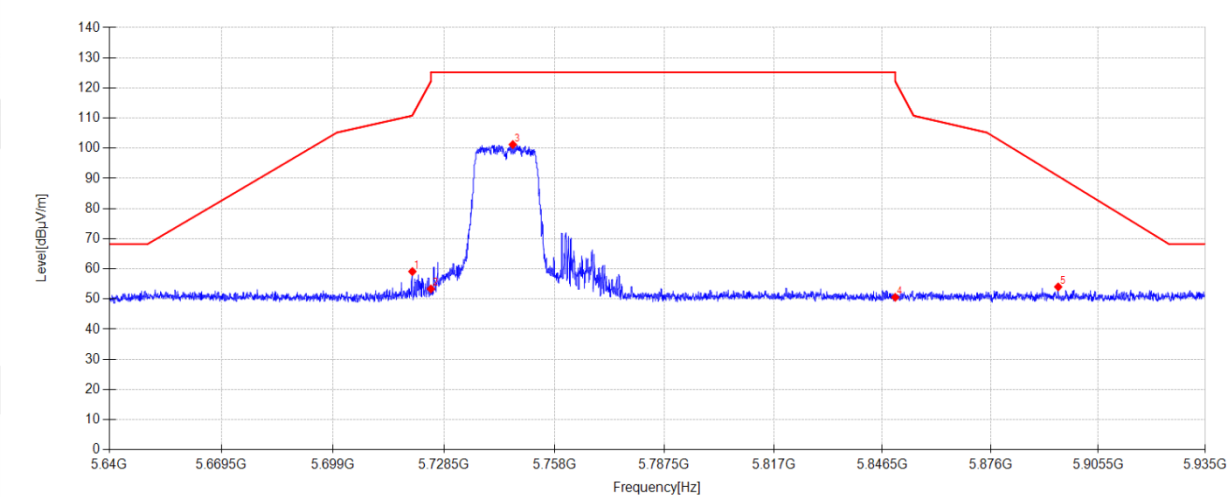

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.063	50.14	33.38	5.26	-29.66	59.12	110.94	51.82	PK	Horizontal
2	5725.000	44.29	33.45	5.26	-29.65	53.35	122.20	68.85	PK	Horizontal
3	5746.849	91.84	33.76	5.27	-29.65	101.22	125.20	23.98	PK	Horizontal
4	5850.000	40.99	33.90	5.31	-29.63	50.57	122.20	71.63	PK	Horizontal
5	5894.526	44.06	34.26	5.33	-29.62	54.03	90.75	36.72	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\8

Memo:

Sample Number:S25120216-004;Power Setting:17

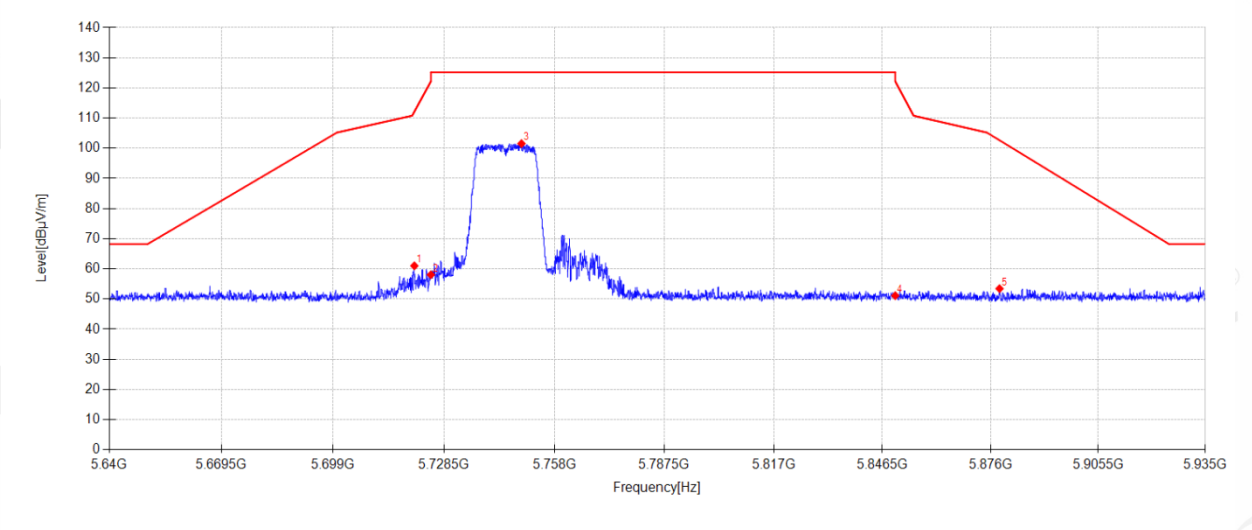

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.594	52.02	33.39	5.26	-29.66	61.01	112.15	51.14	PK	Vertical
2	5725.000	49.00	33.45	5.26	-29.65	58.06	122.20	64.14	PK	Vertical
3	5749.180	92.13	33.79	5.27	-29.65	101.54	125.20	23.66	PK	Vertical
4	5850.000	41.54	33.90	5.31	-29.63	51.12	122.20	71.08	PK	Vertical
5	5878.449	43.62	34.13	5.32	-29.62	53.45	102.65	49.20	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\9

Memo:

Sample Number:S25120216-004;Power Setting:17

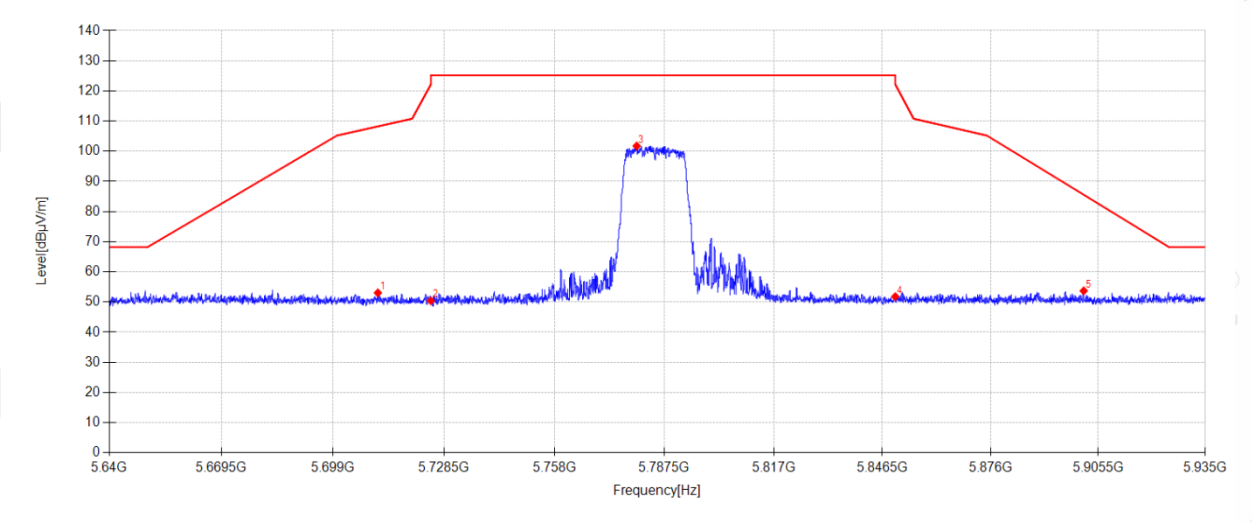

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5710.889	44.21	33.25	5.25	-29.66	53.05	108.25	55.20	PK	Horizontal
2	5725.000	41.34	33.45	5.26	-29.65	50.40	122.20	71.80	PK	Horizontal
3	5780.066	92.25	33.86	5.28	-29.64	101.75	125.20	23.45	PK	Horizontal
4	5850.000	42.21	33.90	5.31	-29.63	51.79	122.20	70.41	PK	Horizontal
5	5901.518	43.70	34.30	5.33	-29.62	53.71	85.58	31.87	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\10

Memo:

Sample Number:S25120216-004;Power Setting:17

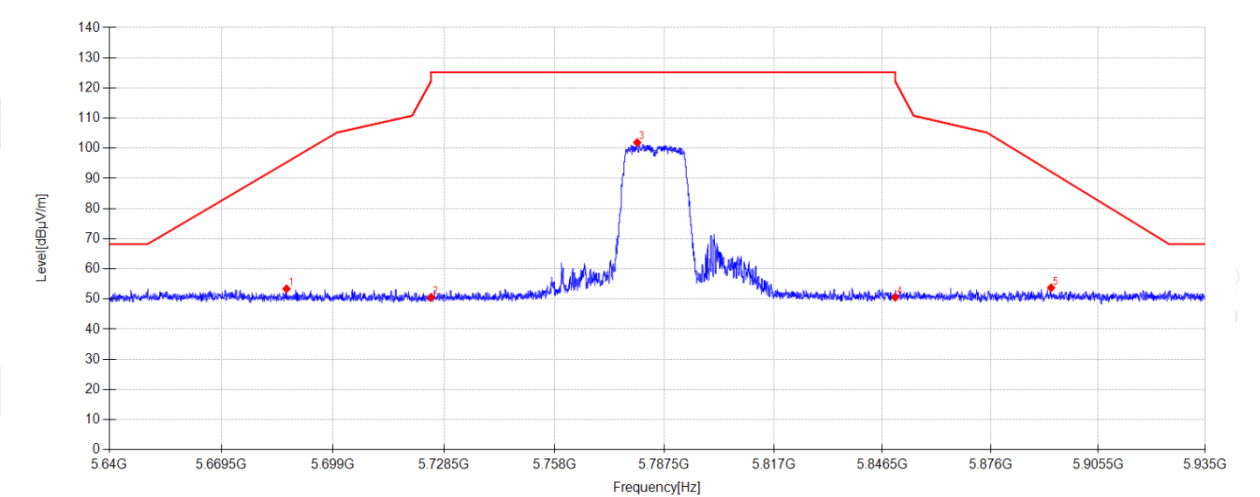

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5686.669	44.59	33.21	5.24	-29.66	53.38	95.34	41.96	PK	Vertical
2	5725.000	41.44	33.45	5.26	-29.65	50.50	122.20	71.70	PK	Vertical
3	5780.214	92.40	33.86	5.28	-29.64	101.90	125.20	23.30	PK	Vertical
4	5850.000	41.01	33.90	5.31	-29.63	50.59	122.20	71.61	PK	Vertical
5	5892.579	43.79	34.24	5.33	-29.62	53.74	92.19	38.45	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\11

Memo:

Sample Number:S25120216-004;Power Setting:17

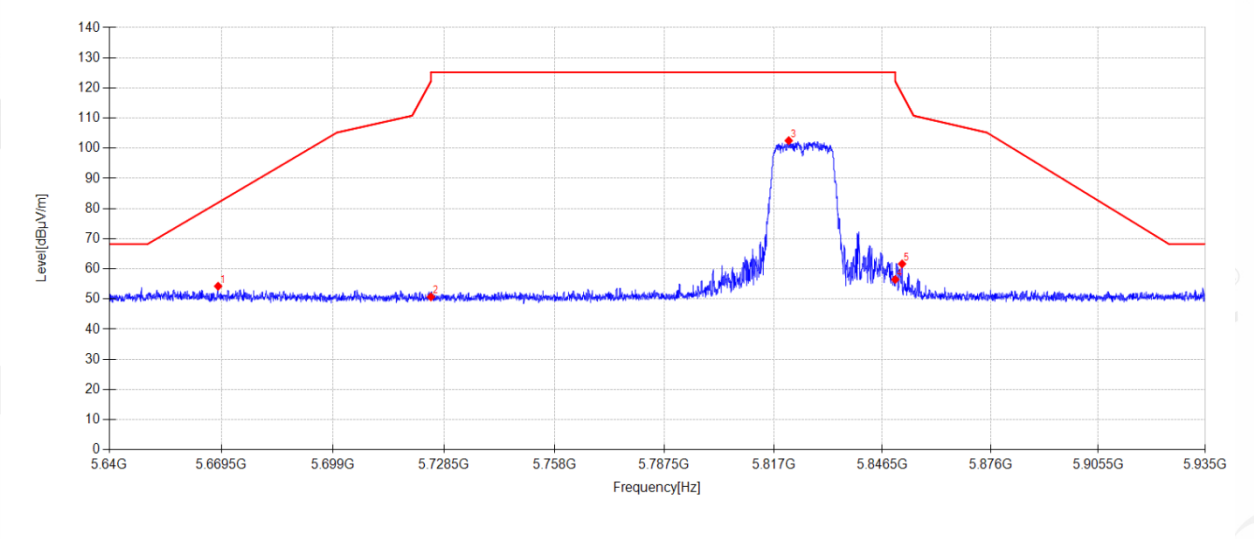

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5668.615	45.34	33.35	5.24	-29.67	54.26	81.98	27.72	PK	Horizontal
2	5725.000	41.64	33.45	5.26	-29.65	50.70	122.20	71.50	PK	Horizontal
3	5821.101	92.96	33.90	5.30	-29.64	102.52	125.20	22.68	PK	Horizontal
4	5850.000	46.90	33.90	5.31	-29.63	56.48	122.20	65.72	PK	Horizontal
5	5851.869	52.06	33.91	5.31	-29.63	61.65	117.94	56.29	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\12

Memo:

Sample Number:S25120216-004;Power Setting:17

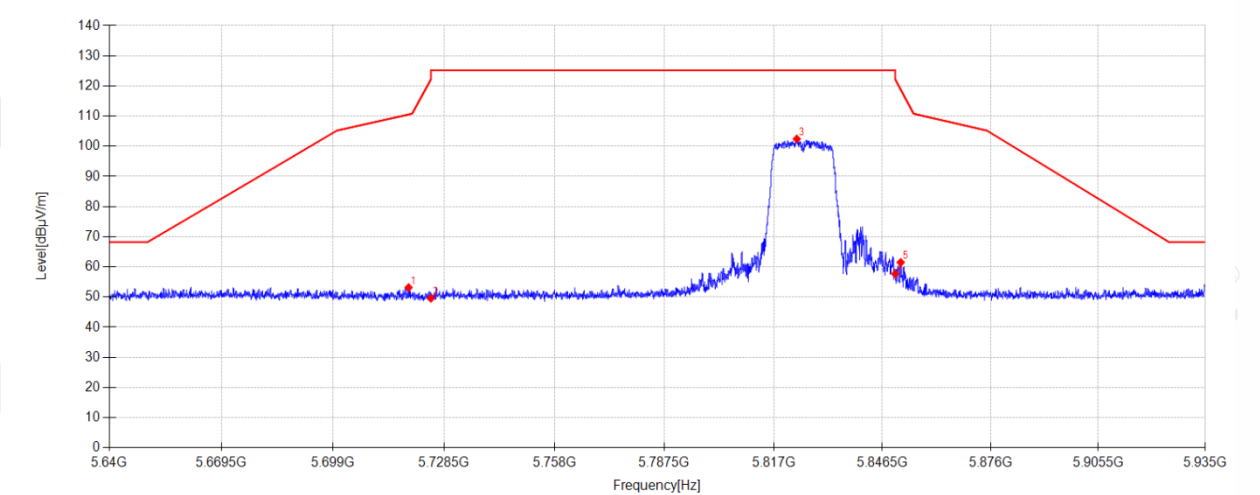

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.060	44.17	33.37	5.26	-29.66	53.14	110.54	57.40	PK	Vertical
2	5725.000	40.51	33.45	5.26	-29.65	49.57	122.20	72.63	PK	Vertical
3	5823.284	92.86	33.90	5.30	-29.64	102.42	125.20	22.78	PK	Vertical
4	5850.000	48.10	33.90	5.31	-29.63	57.68	122.20	64.52	PK	Vertical
5	5851.486	51.89	33.91	5.31	-29.63	61.48	118.81	57.33	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\13

Memo:

Sample Number:S25120216-004;Power Setting:17

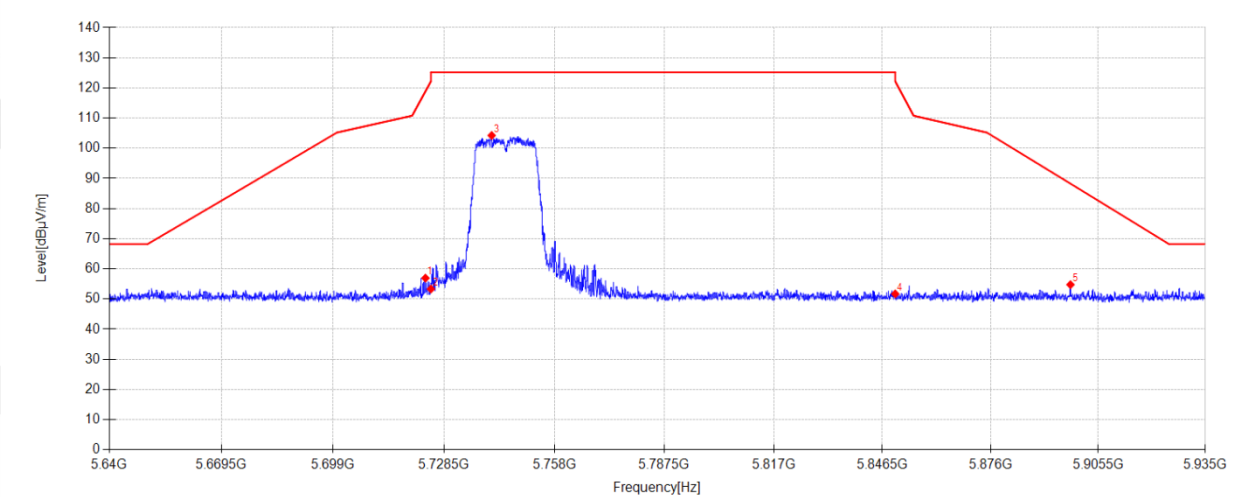

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.544	47.92	33.43	5.26	-29.66	56.95	118.88	61.93	PK	Horizontal
2	5725.000	44.27	33.45	5.26	-29.65	53.33	122.20	68.87	PK	Horizontal
3	5741.215	94.94	33.68	5.27	-29.65	104.24	125.20	20.96	PK	Horizontal
4	5850.000	42.12	33.90	5.31	-29.63	51.70	122.20	70.50	PK	Horizontal
5	5897.889	44.78	34.28	5.33	-29.62	54.77	88.26	33.49	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\14

Memo:

Sample Number:S25120216-004;Power Setting:17

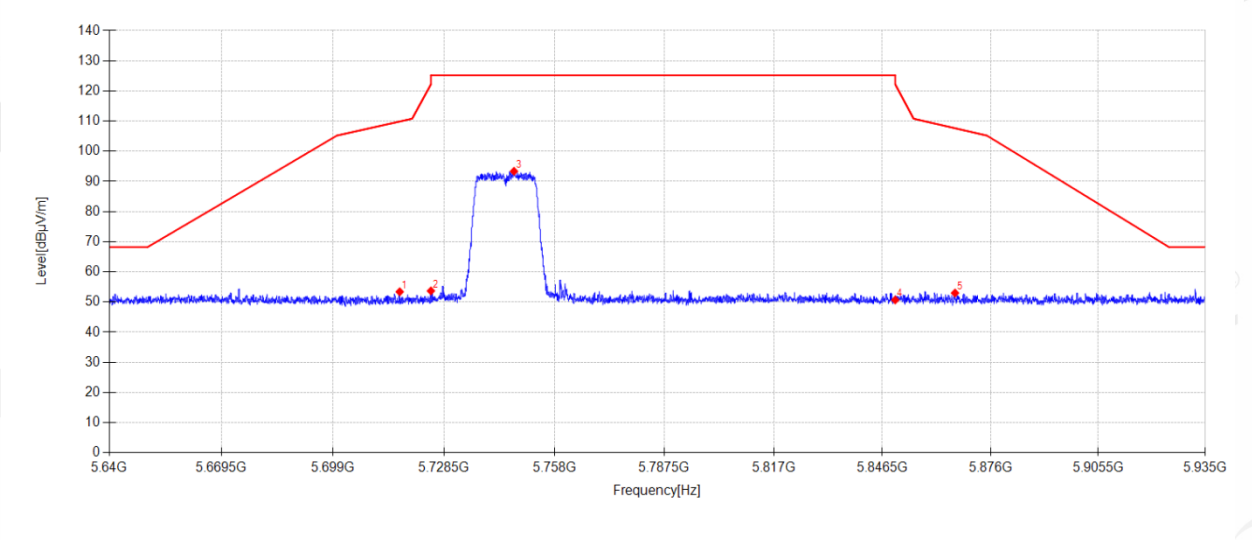

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.700	44.47	33.33	5.26	-29.66	53.40	109.88	56.48	PK	Vertical
2	5725.000	44.64	33.45	5.26	-29.65	53.70	122.20	68.50	PK	Vertical
3	5747.174	84.00	33.76	5.27	-29.65	93.38	125.20	31.82	PK	Vertical
4	5850.000	41.11	33.90	5.31	-29.63	50.69	122.20	71.51	PK	Vertical
5	5866.295	43.28	34.03	5.32	-29.63	53.00	107.64	54.64	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\15

Memo:

Sample Number:S25120216-004;Power Setting:17

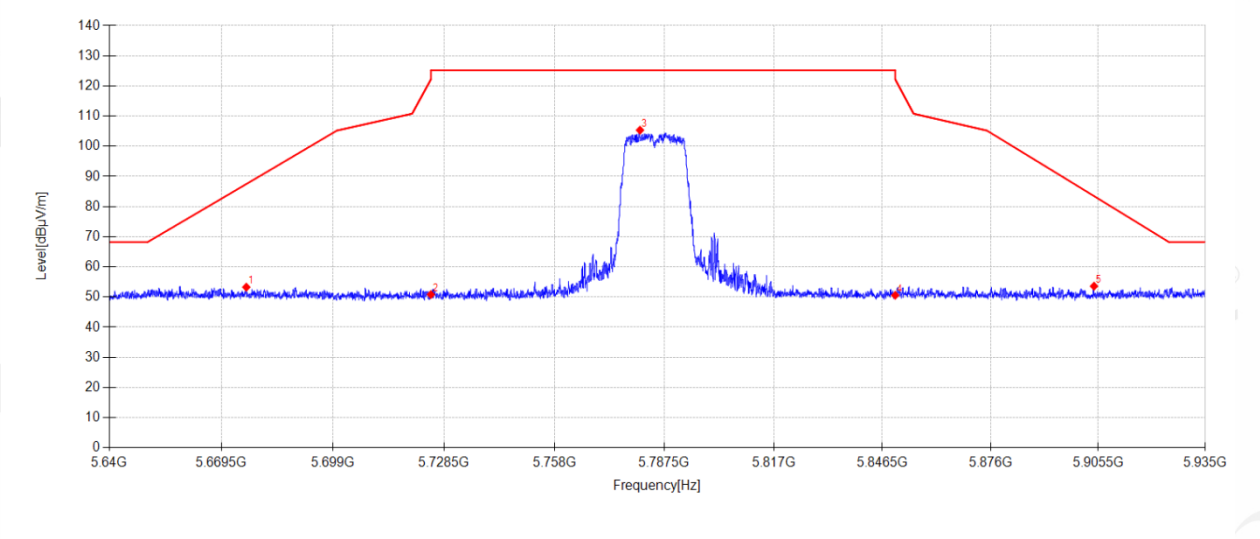

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5676.049	44.40	33.29	5.24	-29.66	53.27	87.48	34.21	PK	Horizontal
2	5725.000	41.78	33.45	5.26	-29.65	50.84	122.20	71.36	PK	Horizontal
3	5780.951	95.85	33.86	5.28	-29.64	105.35	125.20	19.85	PK	Horizontal
4	5850.000	41.00	33.90	5.31	-29.63	50.58	122.20	71.62	PK	Horizontal
5	5904.350	43.59	34.31	5.33	-29.62	53.61	83.48	29.87	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\16

Memo:

Sample Number:S25120216-004;Power Setting:17

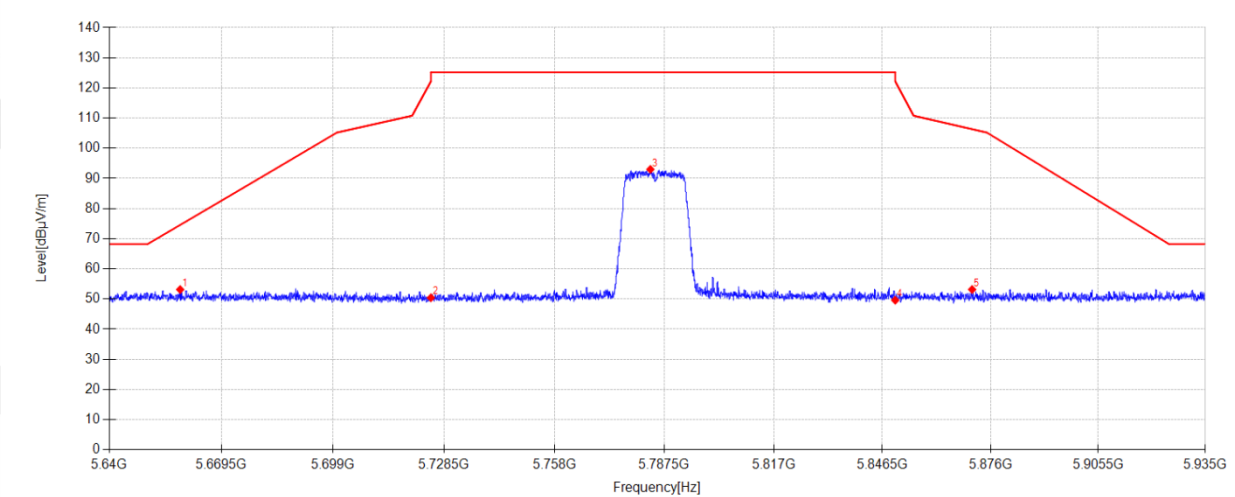

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5658.615	44.16	33.43	5.23	-29.67	53.15	74.57	21.42	PK	Vertical
2	5725.000	41.36	33.45	5.26	-29.65	50.42	122.20	71.78	PK	Vertical
3	5783.754	83.49	33.87	5.28	-29.64	93.00	125.20	32.20	PK	Vertical
4	5850.000	40.03	33.90	5.31	-29.63	49.61	122.20	72.59	PK	Vertical
5	5870.956	43.40	34.07	5.32	-29.63	53.16	106.33	53.17	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\17

Memo:

Sample Number:S25120216-004;Power Setting:17

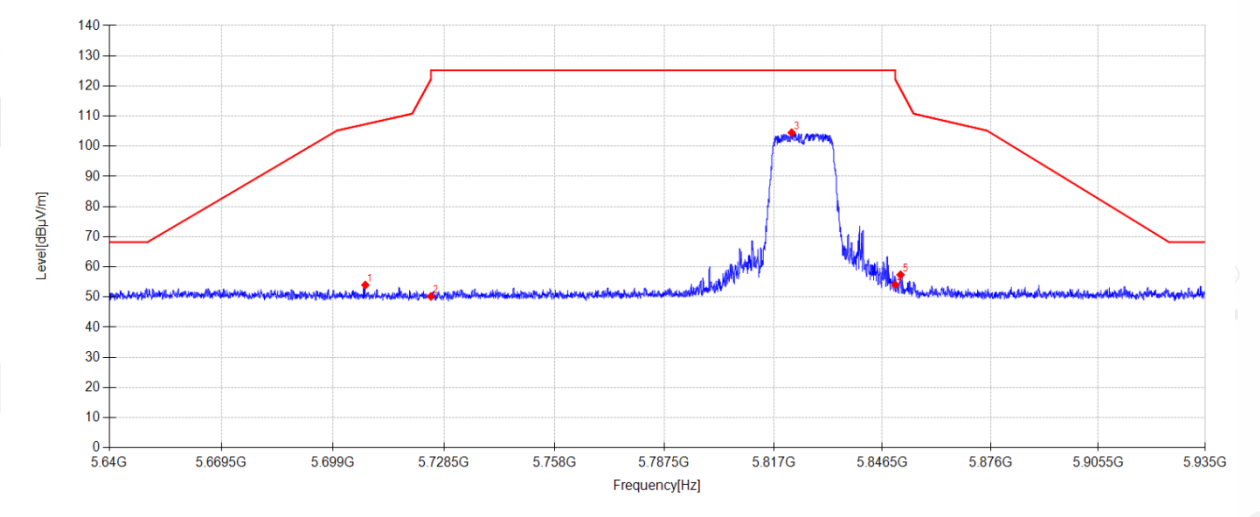

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5707.555	45.18	33.21	5.25	-29.66	53.98	107.32	53.34	PK	Horizontal
2	5725.000	41.13	33.45	5.26	-29.65	50.19	122.20	72.01	PK	Horizontal
3	5821.897	94.93	33.90	5.30	-29.64	104.49	125.20	20.71	PK	Horizontal
4	5850.000	44.50	33.90	5.31	-29.63	54.08	122.20	68.12	PK	Horizontal
5	5851.456	47.79	33.91	5.31	-29.63	57.38	118.88	61.50	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\18

Memo:

Sample Number:S25120216-004;Power Setting:17

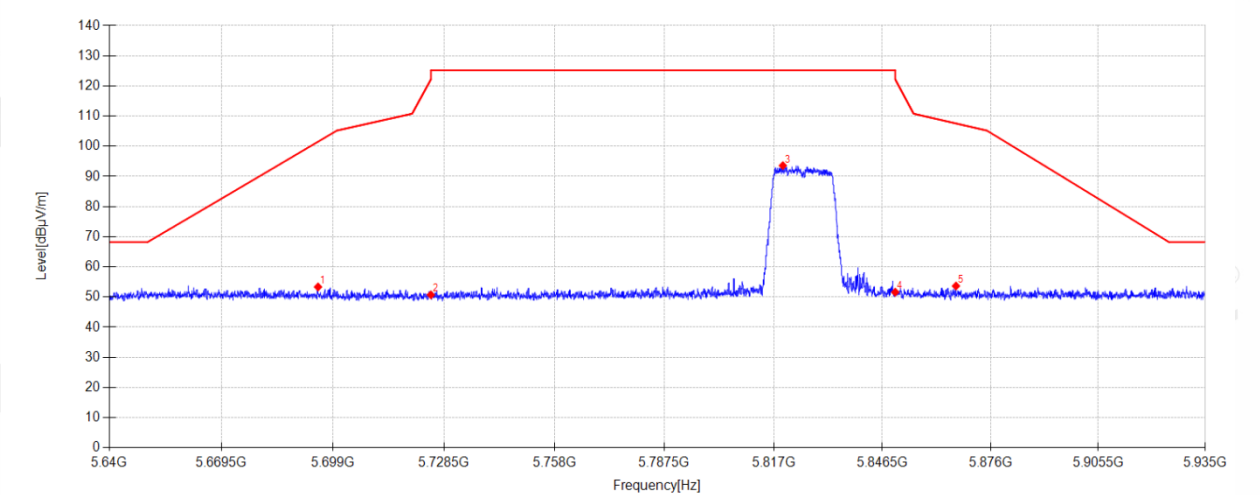

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5695.018	44.62	33.14	5.25	-29.66	53.35	101.51	48.16	PK	Vertical
2	5725.000	41.67	33.45	5.26	-29.65	50.73	122.20	71.47	PK	Vertical
3	5819.508	84.02	33.90	5.30	-29.64	93.58	125.20	31.62	PK	Vertical
4	5850.000	42.03	33.90	5.31	-29.63	51.61	122.20	70.59	PK	Vertical
5	5866.560	43.94	34.03	5.32	-29.63	53.66	107.56	53.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\23

Memo:

Sample Number:S25120216-004;Power Setting:16

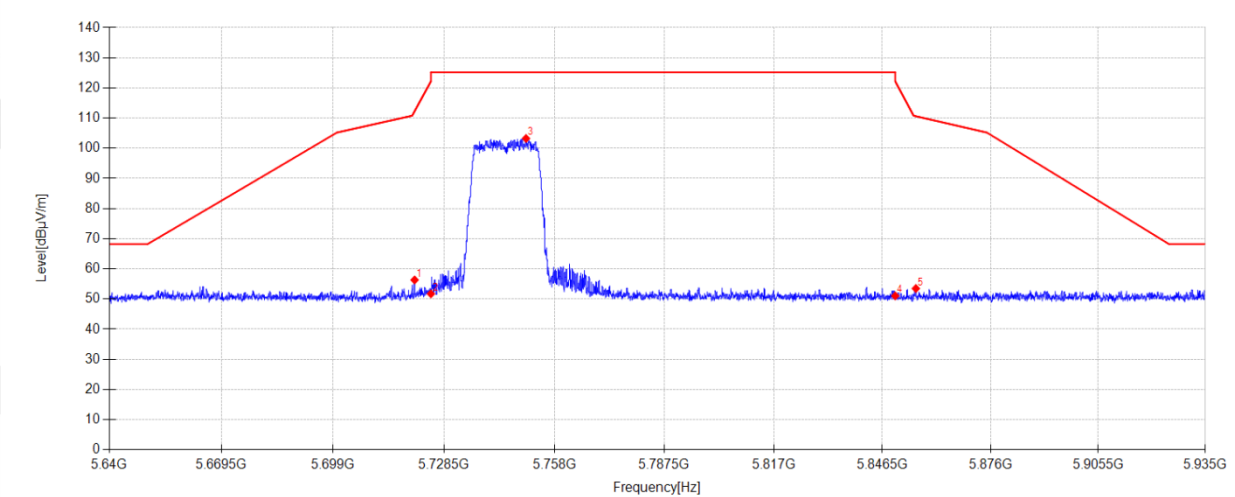

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.653	47.34	33.39	5.26	-29.66	56.33	112.29	55.96	PK	Horizontal
2	5725.000	42.66	33.45	5.26	-29.65	51.72	122.20	70.48	PK	Horizontal
3	5750.389	93.83	33.80	5.27	-29.65	103.25	125.20	21.95	PK	Horizontal
4	5850.000	41.47	33.90	5.31	-29.63	51.05	122.20	71.15	PK	Horizontal
5	5855.616	43.87	33.94	5.31	-29.63	53.49	110.63	57.14	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\24

Memo:

Sample Number:S25120216-004;Power Setting:16

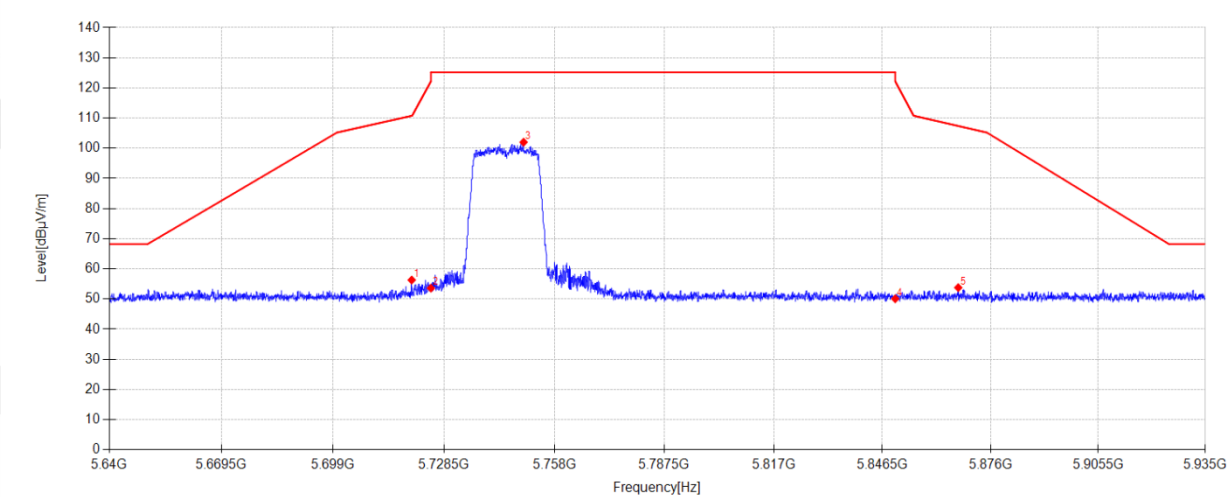

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5719.886	47.33	33.38	5.26	-29.66	56.31	110.77	54.46	PK	Vertical
2	5725.000	44.55	33.45	5.26	-29.65	53.61	122.20	68.59	PK	Vertical
3	5749.740	92.59	33.80	5.27	-29.65	102.01	125.20	23.19	PK	Vertical
4	5850.000	40.51	33.90	5.31	-29.63	50.09	122.20	72.11	PK	Vertical
5	5867.180	44.05	34.04	5.32	-29.63	53.78	107.39	53.61	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2025-12-19Tested By:Li Xiongbिन

Test Mode:MIMO TX 11N20 5785MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.8°C;Humi:54.6%Test Site:DDT 3# Chamber

File Path:d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\21

Memo:Sample Number:S25120216-004;Power Setting:16

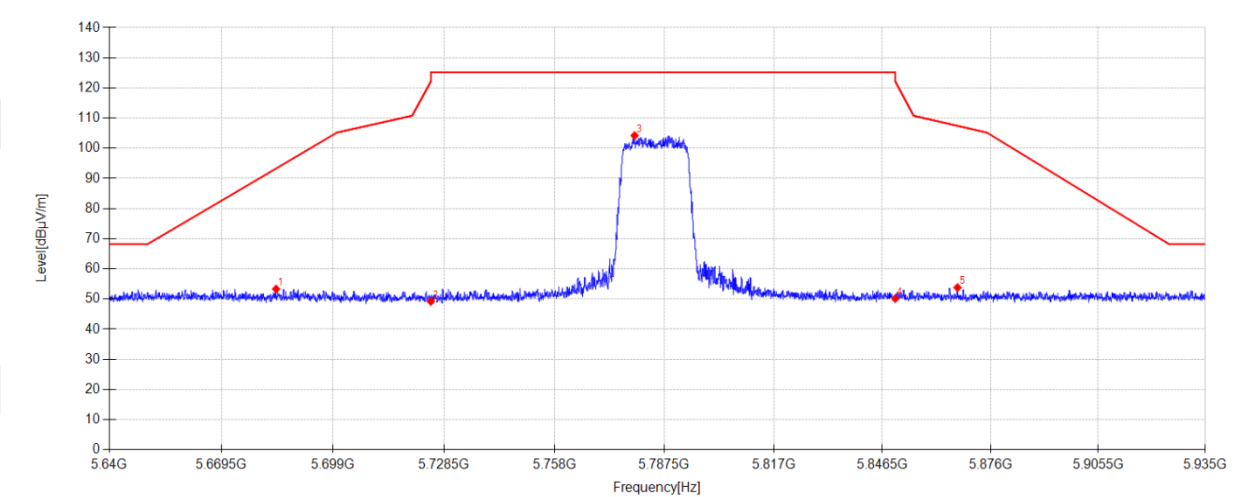

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5683.926	44.51	33.23	5.24	-29.66	53.32	93.30	39.98	PK	Horizontal
2	5725.000	40.12	33.45	5.26	-29.65	49.18	122.20	73.02	PK	Horizontal
3	5779.506	94.71	33.86	5.28	-29.64	104.21	125.20	20.99	PK	Horizontal
4	5850.000	40.57	33.90	5.31	-29.63	50.15	122.20	72.05	PK	Horizontal
5	5866.973	44.08	34.04	5.32	-29.63	53.81	107.45	53.64	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\22

Memo:

Sample Number:S25120216-004;Power Setting:16

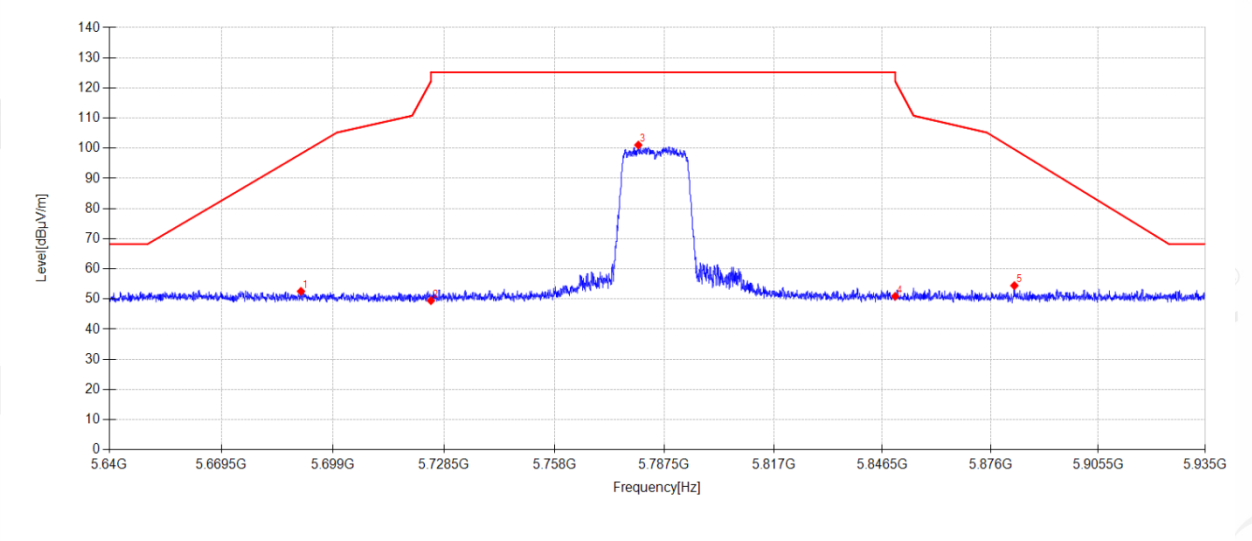

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5690.504	43.77	33.18	5.25	-29.66	52.54	98.17	45.63	PK	Vertical
2	5725.000	40.40	33.45	5.26	-29.65	49.46	122.20	72.74	PK	Vertical
3	5780.509	91.57	33.86	5.28	-29.64	101.07	125.20	24.13	PK	Vertical
4	5850.000	41.31	33.90	5.31	-29.63	50.89	122.20	71.31	PK	Vertical
5	5882.520	44.58	34.16	5.32	-29.62	54.44	99.64	45.20	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\19

Memo:

Sample Number:S25120216-004;Power Setting:16

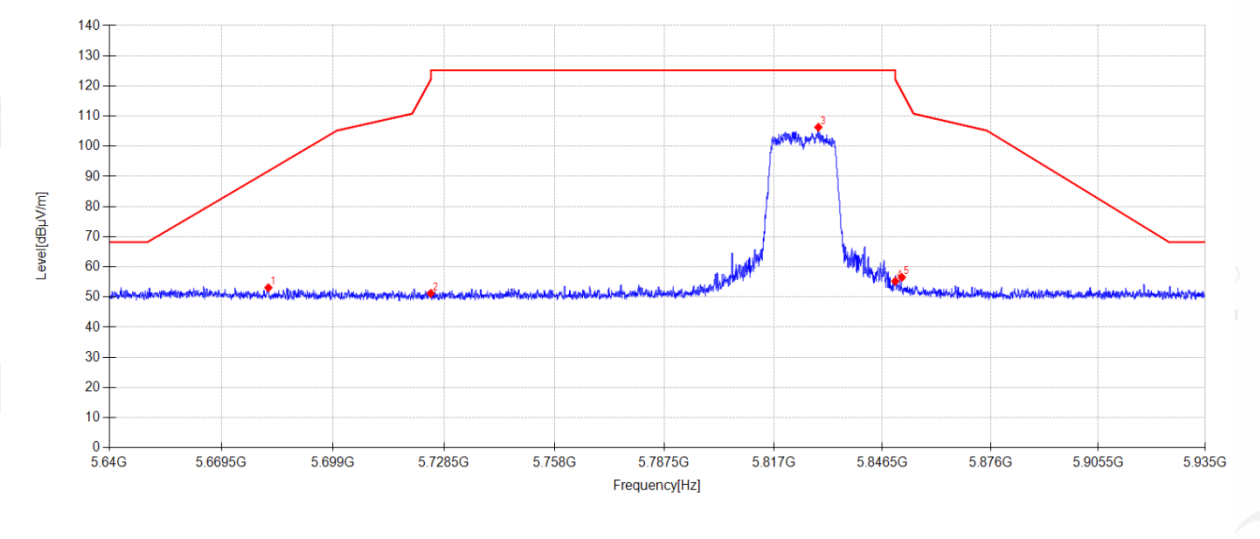

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5681.890	44.28	33.24	5.24	-29.66	53.10	91.80	38.70	PK	Horizontal
2	5725.000	42.16	33.45	5.26	-29.65	51.22	122.20	70.98	PK	Horizontal
3	5829.125	96.73	33.90	5.30	-29.63	106.30	125.20	18.90	PK	Horizontal
4	5850.000	45.65	33.90	5.31	-29.63	55.23	122.20	66.97	PK	Horizontal
5	5851.810	46.93	33.91	5.31	-29.63	56.52	118.07	61.55	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\20

Memo:

Sample Number:S25120216-004;Power Setting:16

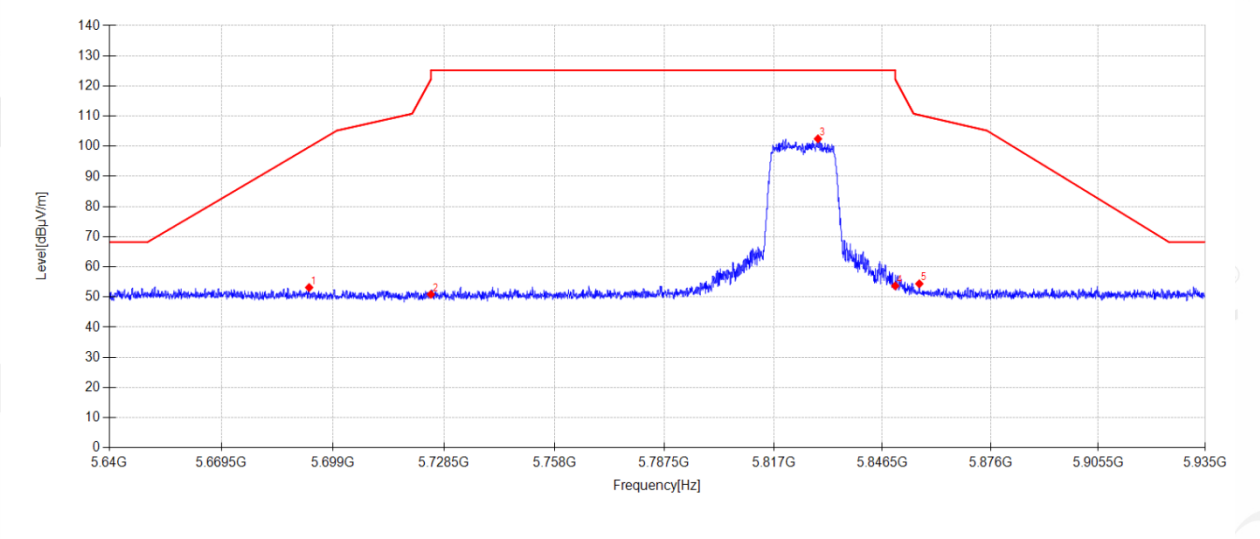

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.658	44.40	33.16	5.25	-29.66	53.15	99.77	46.62	PK	Vertical
2	5725.000	41.83	33.45	5.26	-29.65	50.89	122.20	71.31	PK	Vertical
3	5829.007	92.89	33.90	5.30	-29.63	102.46	125.20	22.74	PK	Vertical
4	5850.000	44.11	33.90	5.31	-29.63	53.69	122.20	68.51	PK	Vertical
5	5856.560	44.76	33.95	5.31	-29.63	54.39	110.36	55.97	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\25

Memo:

Sample Number:S25120216-004;Power Setting:15

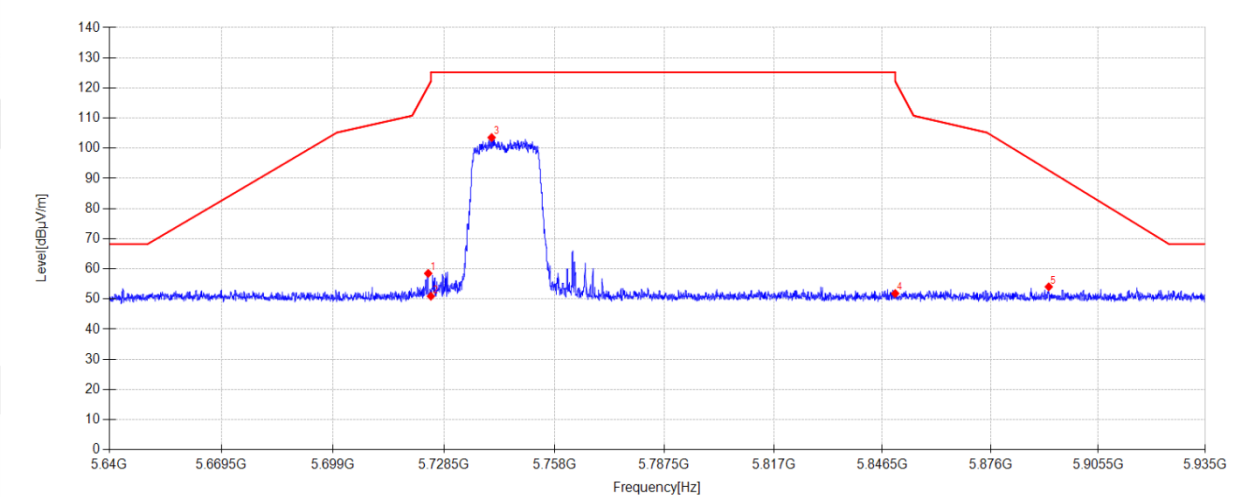

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.282	49.45	33.44	5.26	-29.66	58.49	120.56	62.07	PK	Horizontal
2	5725.000	41.87	33.45	5.26	-29.65	50.93	122.20	71.27	PK	Horizontal
3	5741.185	94.25	33.68	5.27	-29.65	103.55	125.20	21.65	PK	Horizontal
4	5850.000	42.25	33.90	5.31	-29.63	51.83	122.20	70.37	PK	Horizontal
5	5891.930	44.11	34.24	5.33	-29.62	54.06	92.67	38.61	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\26

Memo:

Sample Number:S25120216-004;Power Setting:15

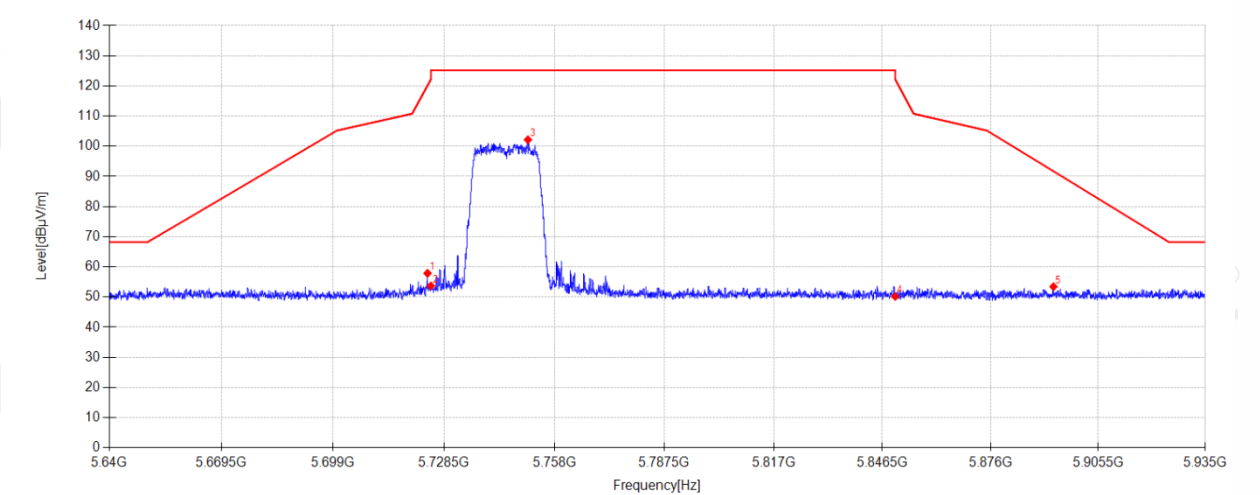

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.105	48.84	33.44	5.26	-29.66	57.88	120.16	62.28	PK	Vertical
2	5725.000	44.64	33.45	5.26	-29.65	53.70	122.20	68.50	PK	Vertical
3	5750.891	92.75	33.80	5.27	-29.65	102.17	125.20	23.03	PK	Vertical
4	5850.000	40.62	33.90	5.31	-29.63	50.20	122.20	72.00	PK	Vertical
5	5893.228	43.48	34.25	5.33	-29.62	53.44	91.71	38.27	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-12-19

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.8°C;Humi:54.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25120216-1E\FCC Above 1G 5.8G\27

Memo:

Sample Number:S25120216-004;Power Setting:15

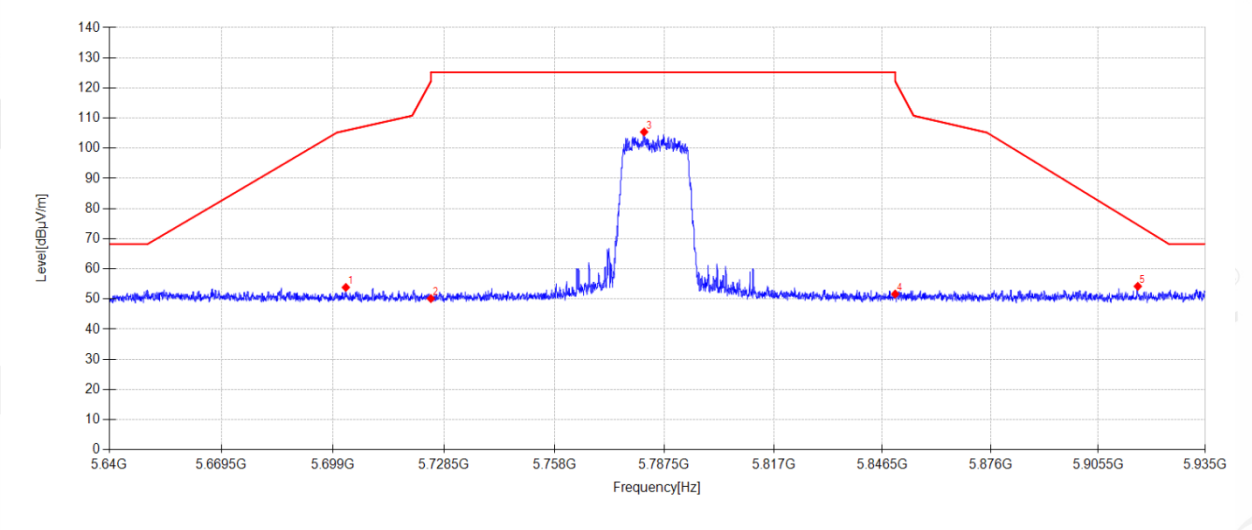

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5702.393	45.14	33.13	5.25	-29.66	53.86	105.87	52.01	PK	Horizontal
2	5725.000	41.09	33.45	5.26	-29.65	50.15	122.20	72.05	PK	Horizontal
3	5782.072	95.91	33.86	5.28	-29.64	105.41	125.20	19.79	PK	Horizontal
4	5850.000	42.08	33.90	5.31	-29.63	51.66	122.20	70.54	PK	Horizontal
5	5916.386	44.17	34.33	5.34	-29.62	54.22	74.57	20.35	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.