


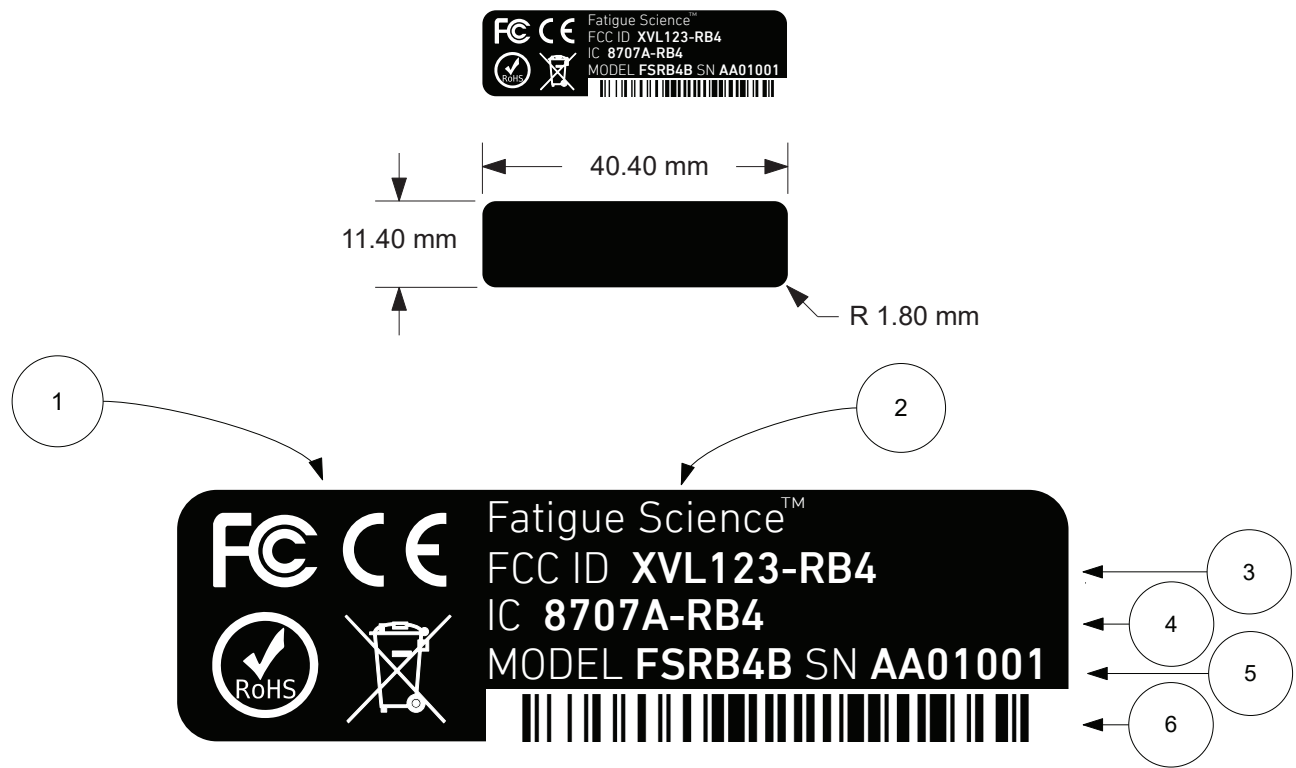

Desired color use:

 Exposed metal
(edge bleed serial bar code)

 Satin process black
(edge bleed label body)

1. Regulatory marks
2. Fatigue Science company ID
3. FCC ID number
4. IC number
5. Serial number generation, starting at 01001
6. Serial number barcode

Fonts:

DIN Next LT Pro Medium

DIN Next LT Pro Light

- 0.2mm maximum thickness (label plus adhesive)
- PSA must adhere permanently to TPE or equivalent
- Label material and inks used must be highly durable
- Label material and inks must be impervious to long-term (years) skin contact, salt water, etc.

MODEL **FSRB4B**

Fatigue Science    

Readiband 4 

Revision letter 

Production batch 

SN **AA01001**

Production batch  

5 digit serial number 

Information for UPC Code 128 barcode:

BAA01001

Revision letter  

Production batch  

5 digit serial number 

Readiband 4 Label
RB4AP0011B8
1/27/2016

Chad Attlesey
Archinoetics LLC
chad@archinoetics.com
507.250.1577



Fatigue Science™

FCC ID XVL123-RB4

IC 8707A-RB4

MODEL FSRB4B SN AA01001

