



TEST REPORT

Number
Composition of document

RADIO

143228-689534A
70 pages

FCC Registration Number
Industry Canada Number

166175 (FAR)
6230B

Standards

47 CFR Part 15.247
RSS-247, Issue 1
RSS-Gen, Issue 4

Issued to

NXP Semiconductors
2 Esplanade Anton Philips, Campus Effiscience, Colombelles
BP20000 14906 - Caen Cedex 9
FRANCE

Apparatus under test

Trade mark
Manufacturer
Type
Serial number
IC
FCC ID

JN5179-001-M10
NXP
NXP Semiconductors
JN5179-001-M10 2
00001-ZbHYWW
8764A-JN5179M1X
XXMJN5179M1X

Test date

2016/07/19 to 2016/08/25

Tests performed by

Mathieu CERISIER

Test site


Fontenay aux Roses

Date of issue

2016/09/23

Written by :
Mathieu CERISIER
Tests operator

Approved by :
Julien BOUTAUD
Technical manager



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document doesn't anticipate any certification decision.



SUMMARY

1. TEST PROGRAM 3

2. EQUIPMENT DESCRIPTION..... 4

3. OCCUPIED BANDWIDTH..... 8

4. -6DB BANDWIDTH 12

5. MAXIMUM CONDUCTED POWER..... 16

6. POWER SPECTRAL DENSITY 20

7. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE 24

8. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS..... 26

9. AC POWER LINE CONDUCTED EMISSIONS..... 29

10. UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS..... 33

11. TEST EQUIPMENT LIST 41

12. UNCERTAINTIES CHART 42



1. TEST PROGRAM

• References

Standards:

- 47 CFR Part 15C
- RSS-247
- RSS-Gen
- CISPR 16-4-2
- ANSI C63.10 (2013)
- DTS measurement guidance 558074 D01 v03r05

Standard Section	Test Description	TEST RESULT - Comments
RSS-Gen § 6.6	Occupied Bandwidth	PASS
CFR 47 § 15.247 (a) (2) RSS-247 § 5.2 (1)	-6dB Bandwidth	PASS
CFR 47 § 15.247 (b) RSS-247 § 5.4 (4)	Maximum Output Power	PASS
CFR 47 § 15.247 (e) RSS-247 § 5.2 (2)	Power Spectral Density	PASS
CFR 47 § 15.247 (d) RSS-247 § 5.5	Conducted Spurious Emission at the Band Edge	PASS
CFR 47 § 15.247 (d) RSS-247 § 5.5	Unwanted Emissions into Non-Restricted Frequency Bands	PASS
CFR 47 § 15.207 RSS-Gen § 8.8	AC Power Line Conducted Emissions	PASS
CFR 47 § 15.209 (a) CFR 47 § 15.205 (a) CFR 47 § 15.247 (d) RSS-Gen § 8.10	Unwanted Emissions into Restricted Frequency Bands	PASS
RSS-Gen § 7.1	Receiver Radiated emissions	PASS (Include in Unwanted Emissions into Restricted Frequency Bands)

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed




2. EQUIPMENT DESCRIPTION

2.1. GENERAL DESCRIPTION

"The JN5179-001-M10 module provides designers with a ready-made component that provides a fully integrated solution for applications, using the IEEE802.15.4 standard in the 2.4 GHz - 2.5 GHz ISM frequency band, including ZigBee Smart Energy, Light Link and Home Automation and can be quickly and easily included in product designs. The module integrates all of the RF components required, removing the need to perform expensive RF design and test. Products can be designed by simply connecting sensors and switches to the module IO pins. The module uses NXP's single chip IEEE802.15.4 wireless microcontroller, allowing designers to make use of the extensive chip development support material.

2.2. HARDWARE & SOFTWARE IDENTIFICATION

- Equipment under test (EUT):**

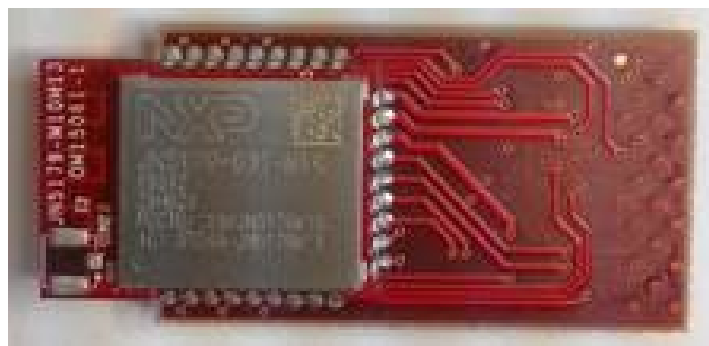

Photograph of EUT

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Carrier board	DR1174	-	To connect the EUT
USB cable	-	-	Interface PC – CMET - Device
Laptop	DELL	-	-



• **Software identification:**

- CMET 5.02

• **Equipment information:**

- Modulation technology: DSSS modulation

- Transmit operating mode: ☒ Single antenna:

- Number of transmit chains: ☒ 1

- Number of receiver chains: ☒ 1

- Antenna type: ☒ Integral ☐ External

- Beamforming gain: ☐ Yes (dB) ☒ No

- Type of the equipment: ☐ Stand-alone equipment ☒ Plug-in radio device ☐ Combined equipment

- Temperature range: Tmin: ☐ -20°C ☐ 0°C ☒ -40°C

Tnom: ☒ 20°C

Tmax: ☐ +35°C ☐ 55°C ☒ +85°C

- Test source voltage : Vnom: ☐ 120V/60Hz ☒ 3.3 Vdc

Note: the mother board is connected to the PC with USB. A LDO on the mother board generates the 3.3V voltage from the USB 5V supply.

- Type of power source: ☐ Battery (Alkaline/Lithium-Ion/Lead acid/Other)

☒ External power supply

☐ Internal power supply

☐ Car Charger

- Test sequence/test software used: See 2.2. Running Mode

- Ad-hoc mode: ☐ Yes ☒ No

- Duty Cycle: ☐ Continuous duty ☐ Intermittent duty ☒ Continuous operation

- Equipment type: ☐ Representative production model ☒ Pre-production model

- Antenna Gain:

M10 Gain (dBi)
1.8

- Operating frequency range:

Frequency Band (MHz)	Available
2400MHz to 2483,5MHz	☒



-Channel plan:

Channel	Frequency (MHz)	Available Channel
Cmin: 11	2405	☒
12	2410	☒
13	2415	☒
14	2420	☒
15	2425	☒
16	2430	☒
17	2435	☒
Cnom: 18	2440	☒
19	2445	☒
20	2450	☒
21	2455	☒
22	2460	☒
23	2465	☒
24	2470	☒
25	2475	☒
Cmax: 26	2480	☒

-Data Rate:

Data Rate (Mbps)	Modulation Type	Worst Case Modulation
0,25	O-QPSK	☒




2.3. RUNNING MODE

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent reception
- The following procedure is used to set the equipment:
- TERATERM : User guide Rev. 01.00 – 2/5/2016

-Channel Power and attenuator configuration:

Channel	Power	2.5dB Att
11	5	☐
18	5	☐
26	4	☒

2.4. EQUIPEMENT LABELLING

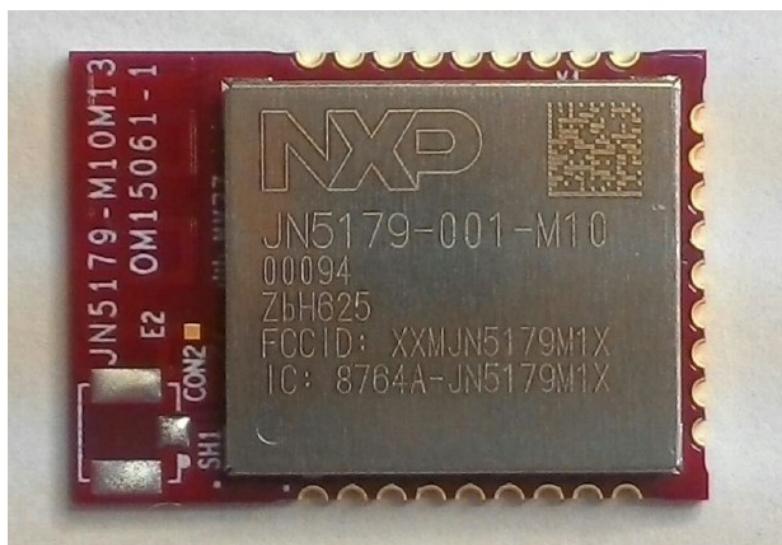

- Line 1** : Brand name
- Line 2** : Product name
- Line 3** : Serial Number (variable)
- Line 4** : Batch number (variable)
- Line 5** : FCC number
- Line 6** : IC number

2.5. EQUIPMENT MODIFICATIONS

No equipment modification has been necessary during testing.



3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS


Test performed by : Mathieu CERISIER
Date of test : 2016/05/12
Ambient temperature : 25°C
Relative humidity : 37%

3.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT conducted access. The product has been tested according to the RSS-GEN § 6.6 reference method.

Spectrum Analyzer Setting:


Center frequency= Cmin or Cnom or Cmax
Span= Above the emission spectrum
Amplitude= Sufficient to observe the signal amplitude
RBW= 1% to 5% of the occupied bandwidth (OBW)
VBW $\geq$ 3*RBW
Sweep= Auto
Trace= Max Hold
Detector= Peak
Occupied Bandwidth 99% activated

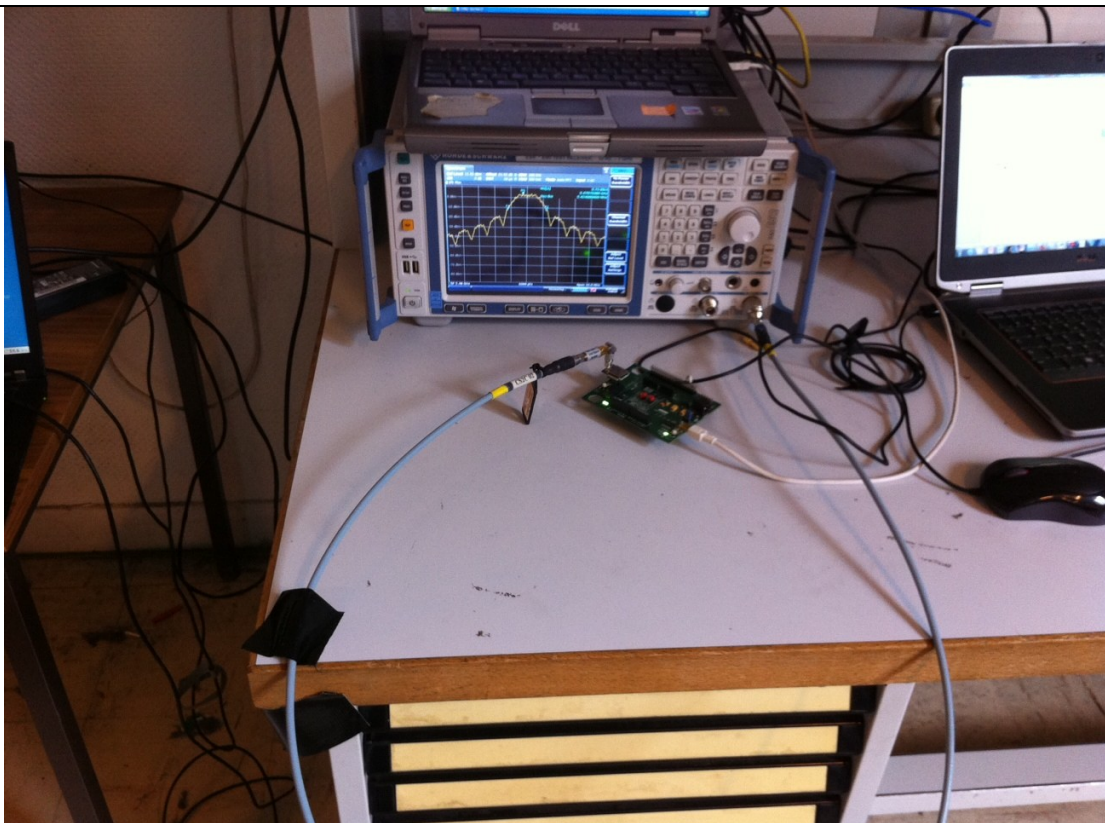


Photograph for Occupied Bandwidth

3.3. GRAPHICS & RESULTS


Cmin

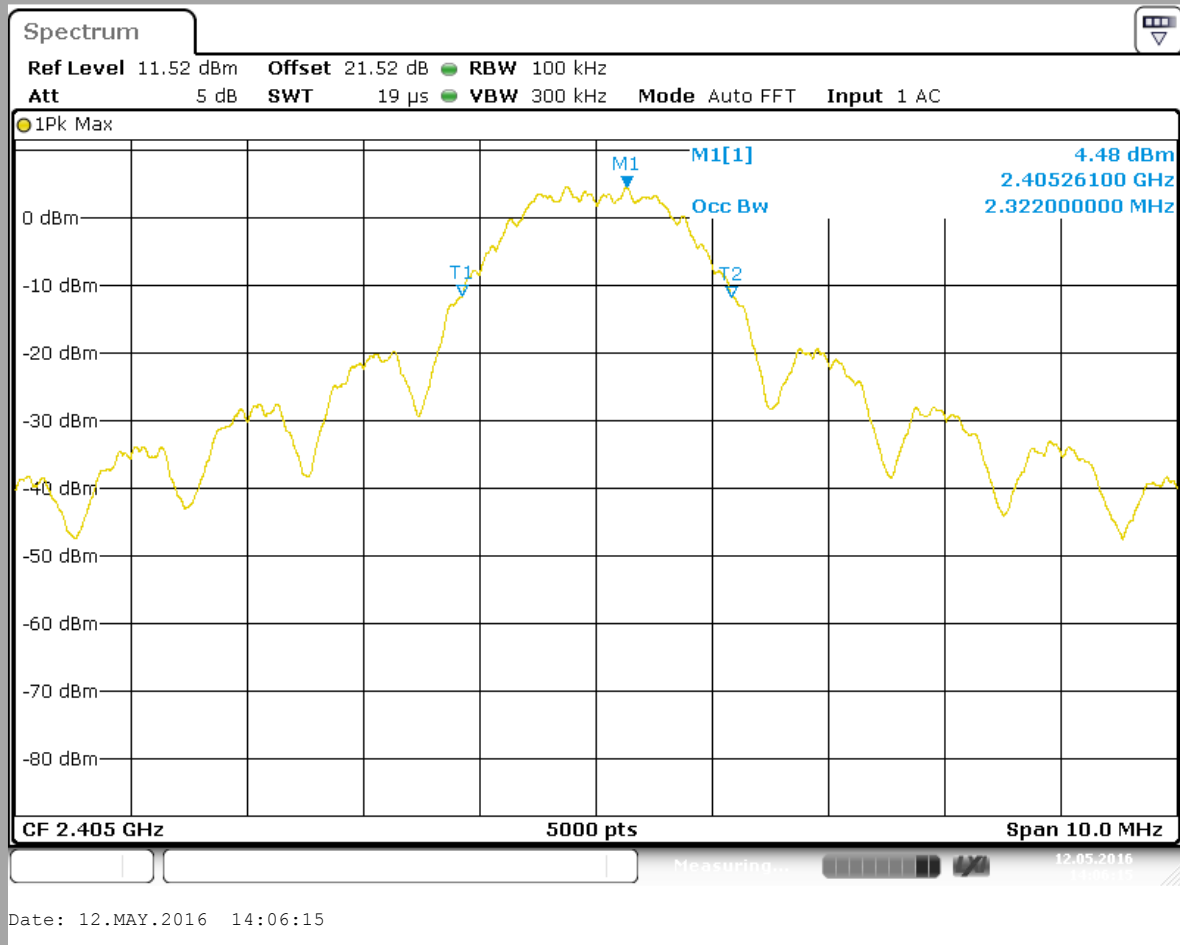

Cnom

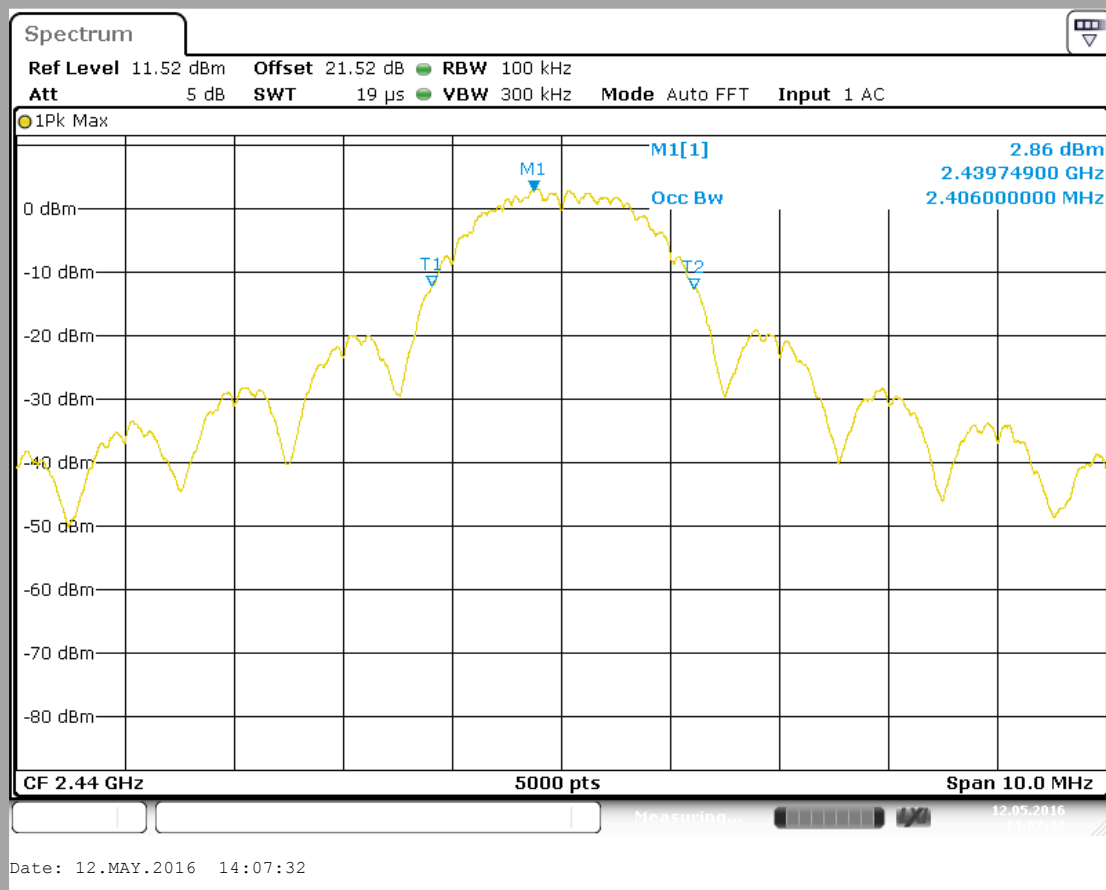

Cmax

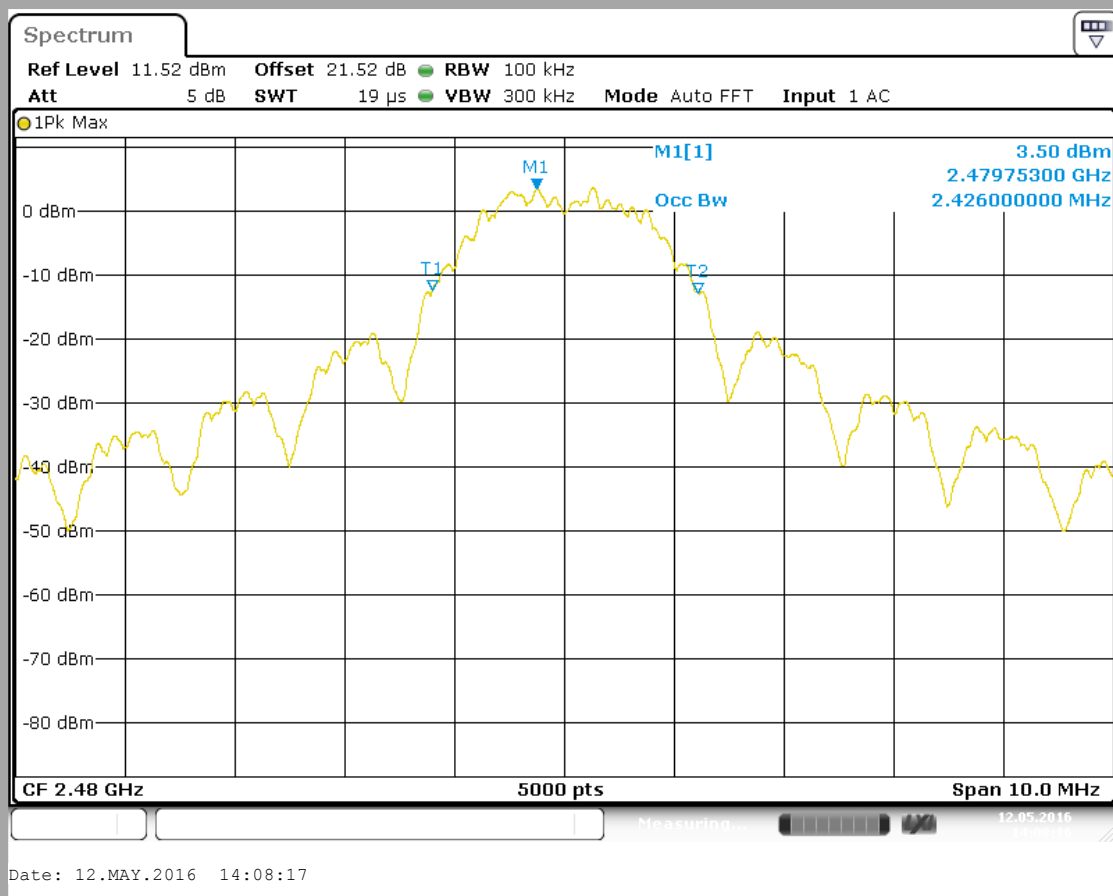

M10			
Temperature	Tnom		
Voltage	Vnom		
Frequency	Cmin	Cnom	Cmax
Occupied Bandwidth (MHz)	2,322	2,406	2,426

Result: **PASS**

Limit: → None



4. -6dB BANDWIDTH

4.1. TEST CONDITIONS


Test performed by : Mathieu CERISIER
Date of test : 2016/05/12
Ambient temperature : 25°C
Relative humidity : 37%

4.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT conducted access. The product has been tested according to the FCC KDB 558074 D01 DTS Meas Guidance v03r05 § 8.1.

Spectrum Analyzer Setting:


Center frequency= Cmin or Cnom or Cmax
Span= At least twice the emission spectrum
Amplitude= Sufficient to observe the signal amplitude
RBW= 100kHz
VBW≥ 300kHz
Sweep= Auto
Trace= Max Hold
Detector= Peak

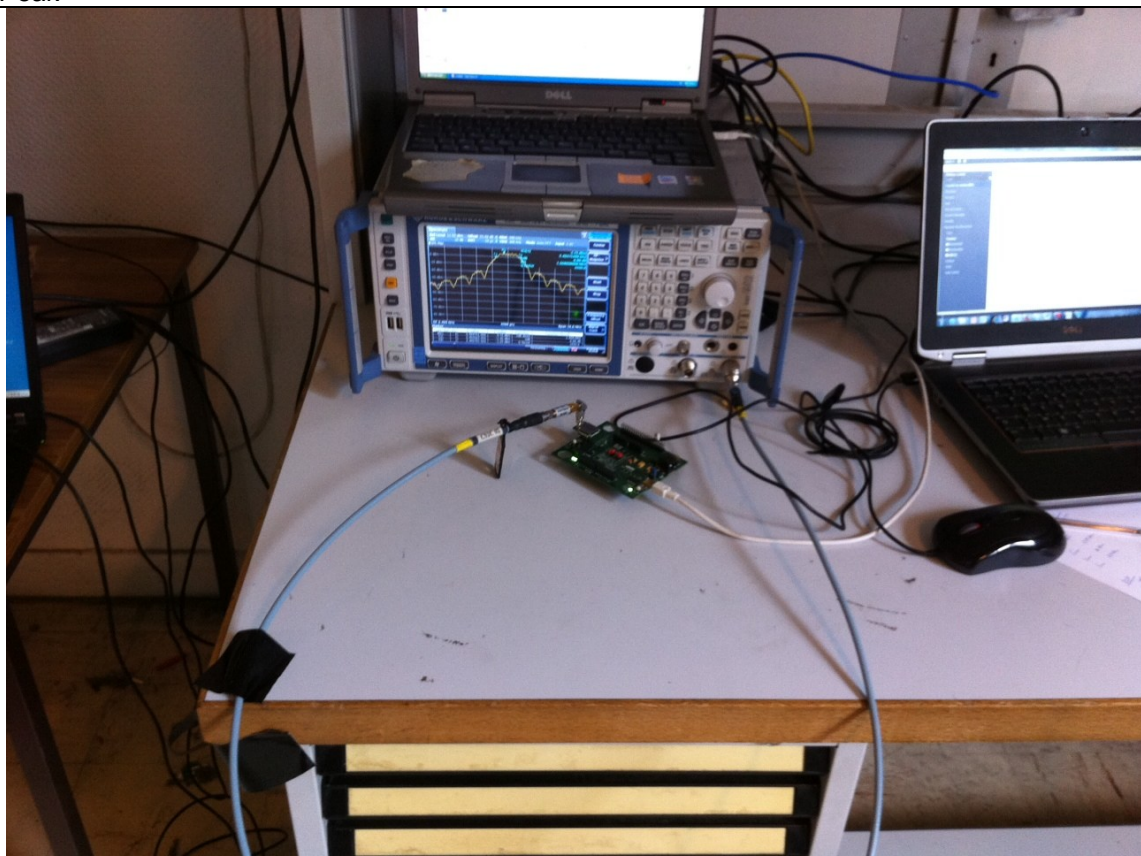


Photograph for -6dB Bandwidth

4.3. GRAPHICS & RESULTS

Cmin

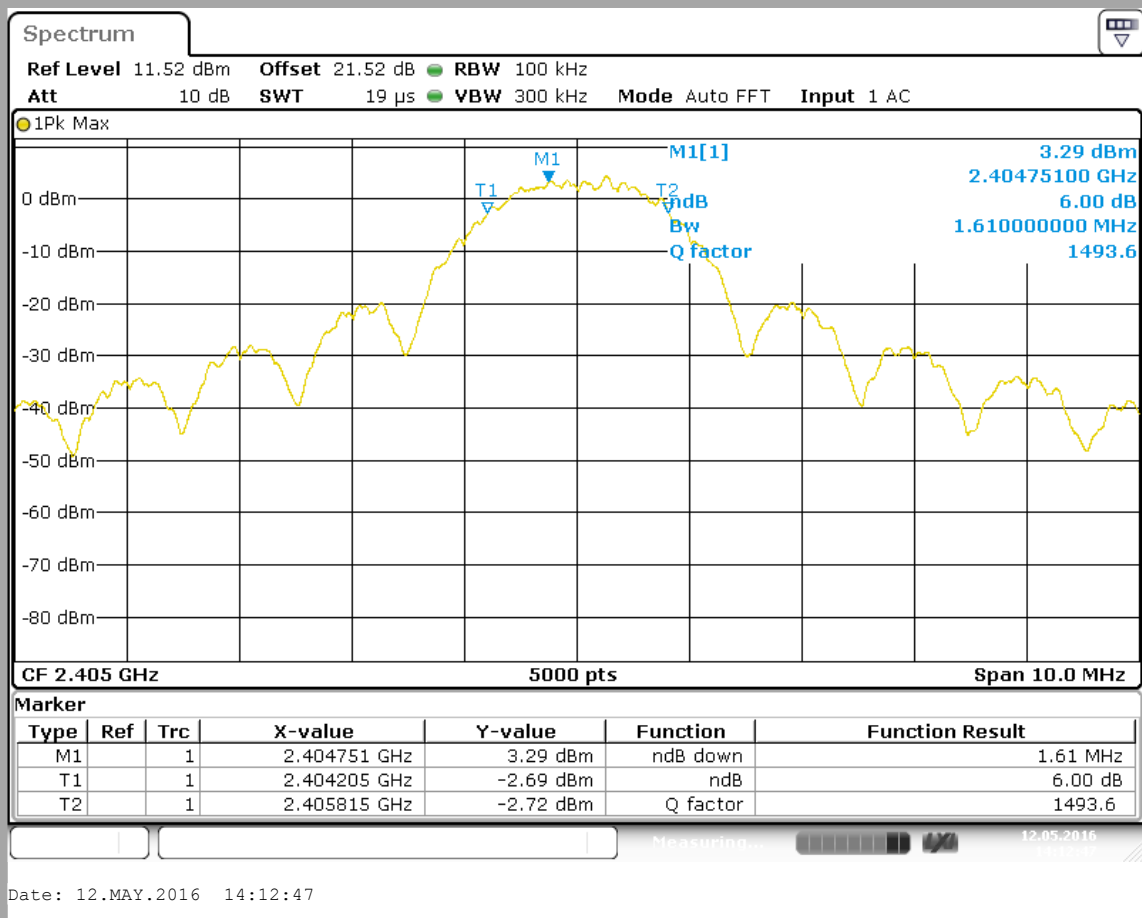


Cnom

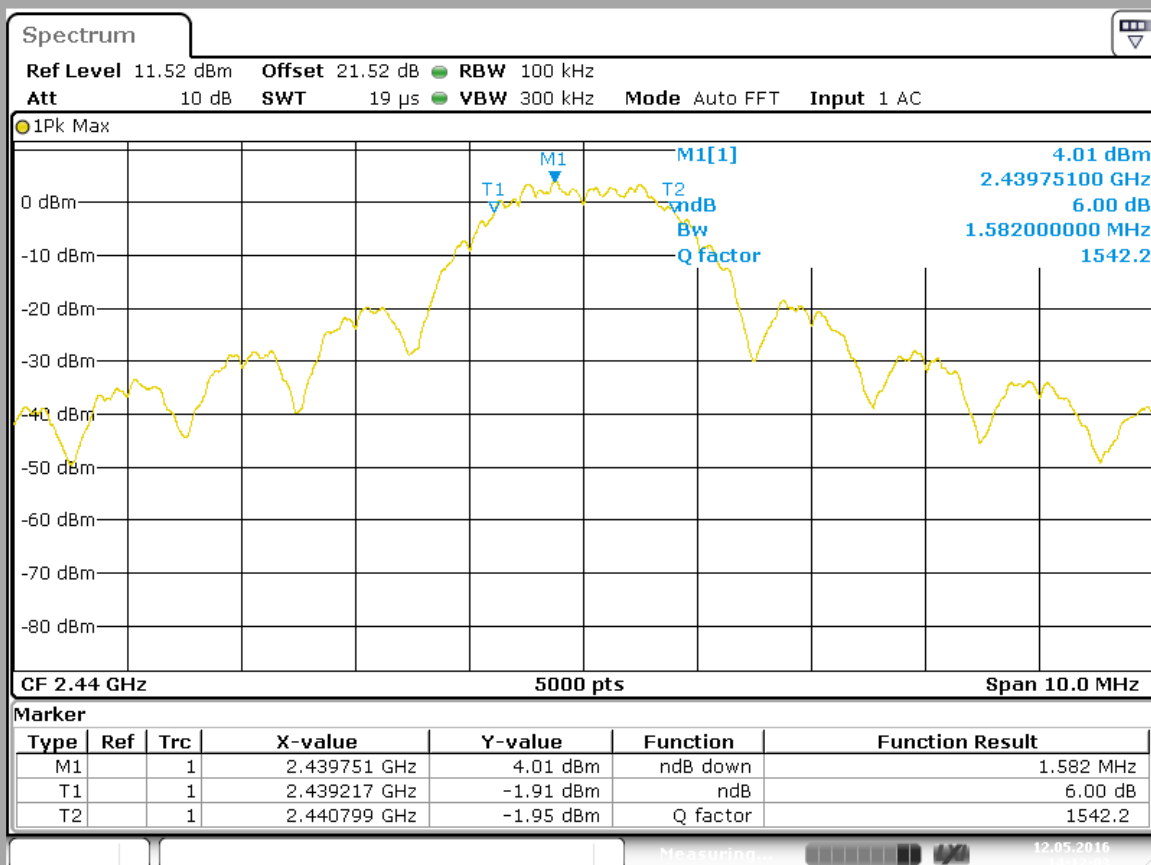

Date: 12.MAY.2016 14:12:04



Cmax

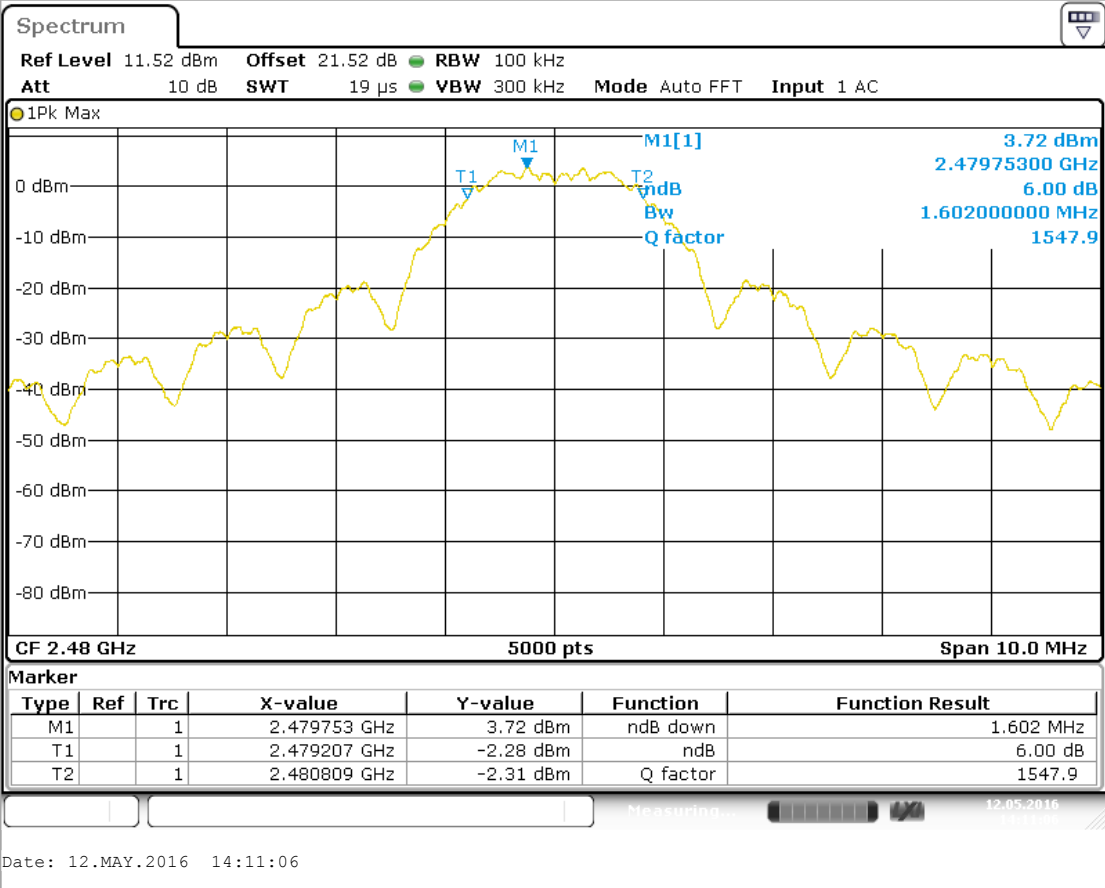

M10			
Temperature	Tnom		
Voltage	Vnom		
Frequency	Cmin	Cnom	Cmax
-6dB Bandwidth (MHz)	1,61	1,582	1,602

Result: PASS

Limit: → The -6dB bandwidth must be greater than 500kHz



5. MAXIMUM CONDUCTED POWER

5.1. TEST CONDITIONS


Test performed by : Mathieu CERISIER
Date of test : 2016/07/19
Ambient temperature : 27°C
Relative humidity : 44%

5.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT conducted access. The product has been tested according to the FCC KDB 558074 D01 DTS Meas Guidance v03r05 § 9.2.2.2

Spectrum Analyzer Setting (Maximum Peak Conducted Power):


Center frequency= Cmin or Cnom or Cmax
Span≥ At least 1.5 times the OBW
Amplitude= Sufficient to observe the signal amplitude
RBW= 1% to 5% of the OBW
VBW≥ 3*RBW
Sweep= Auto
Sweep points= 2*Span/RBW
Trace= RMS
Trigger= Free Run
Detector= Average 100
Meas Fonction= Channel Power inside of the emission spectrum

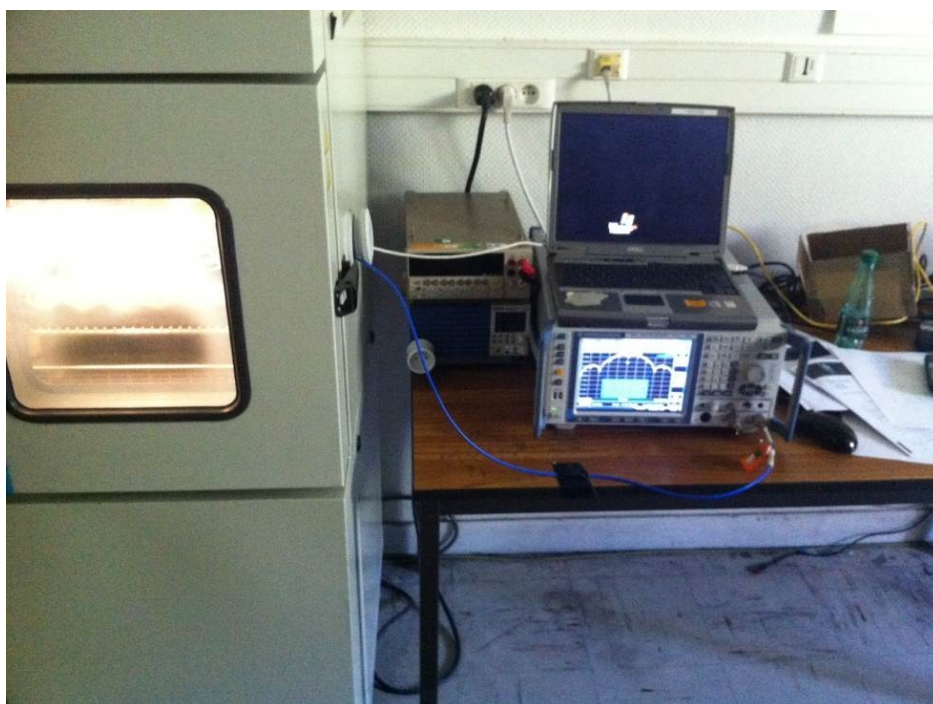

Photograph for Maximum Conducted Power




5.3. GRAPHICS & RESULTS

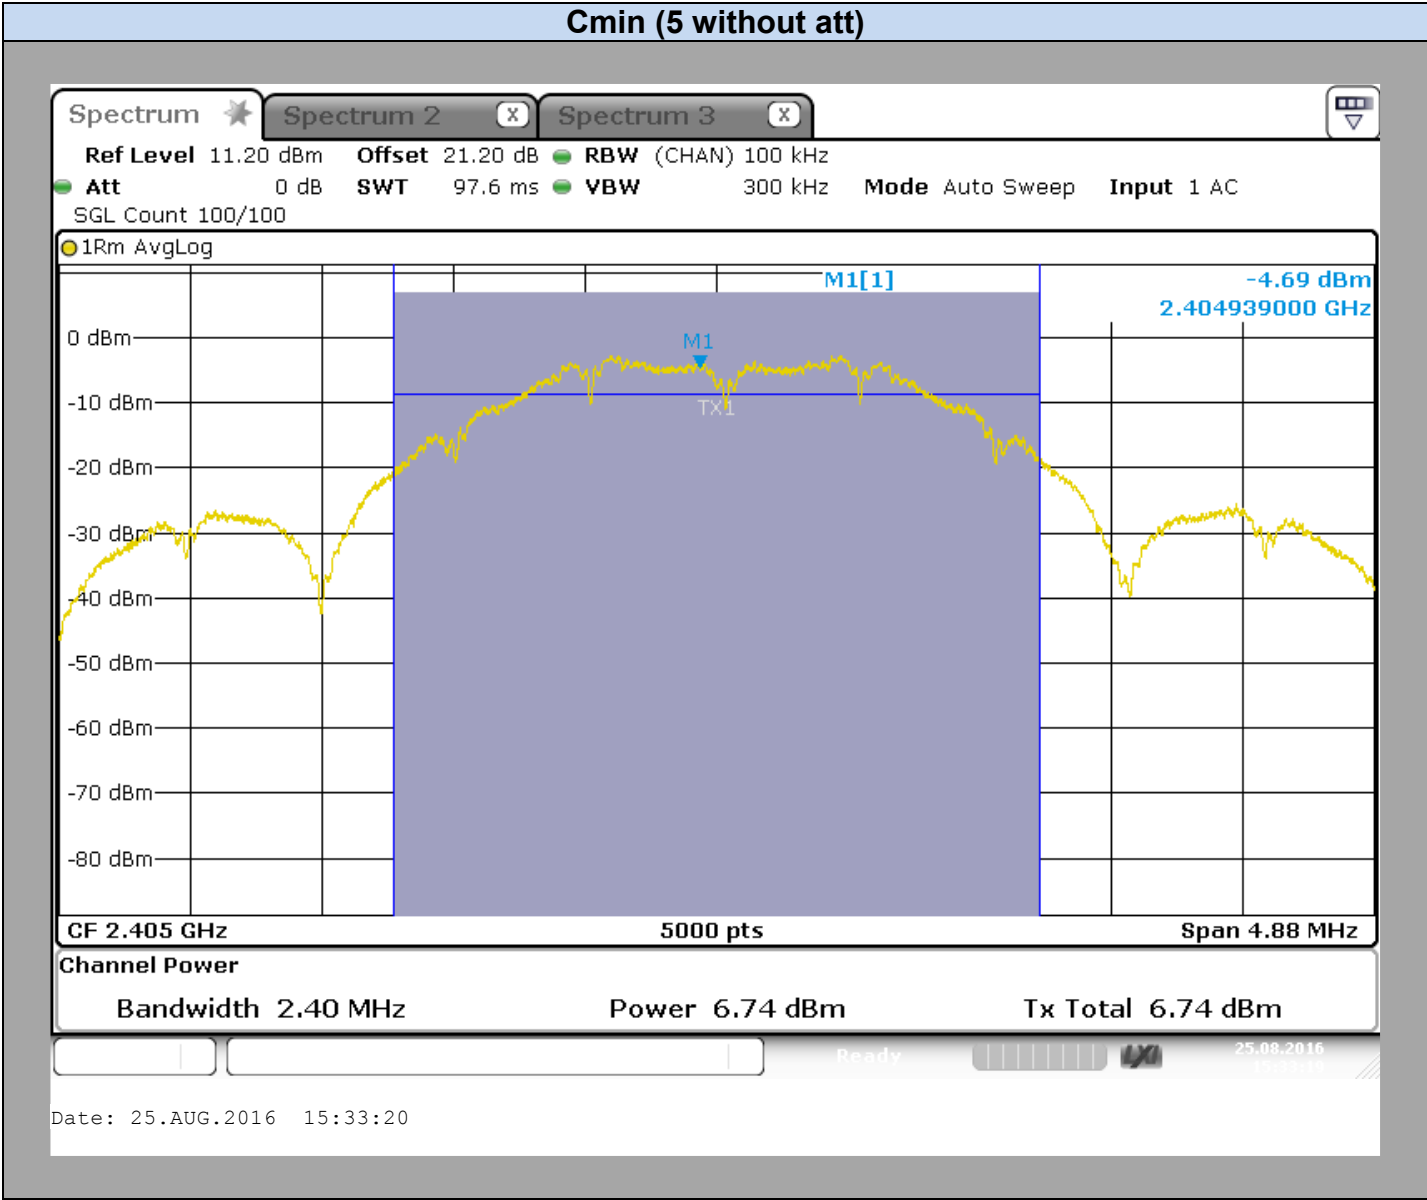




Cnom (5 without att)

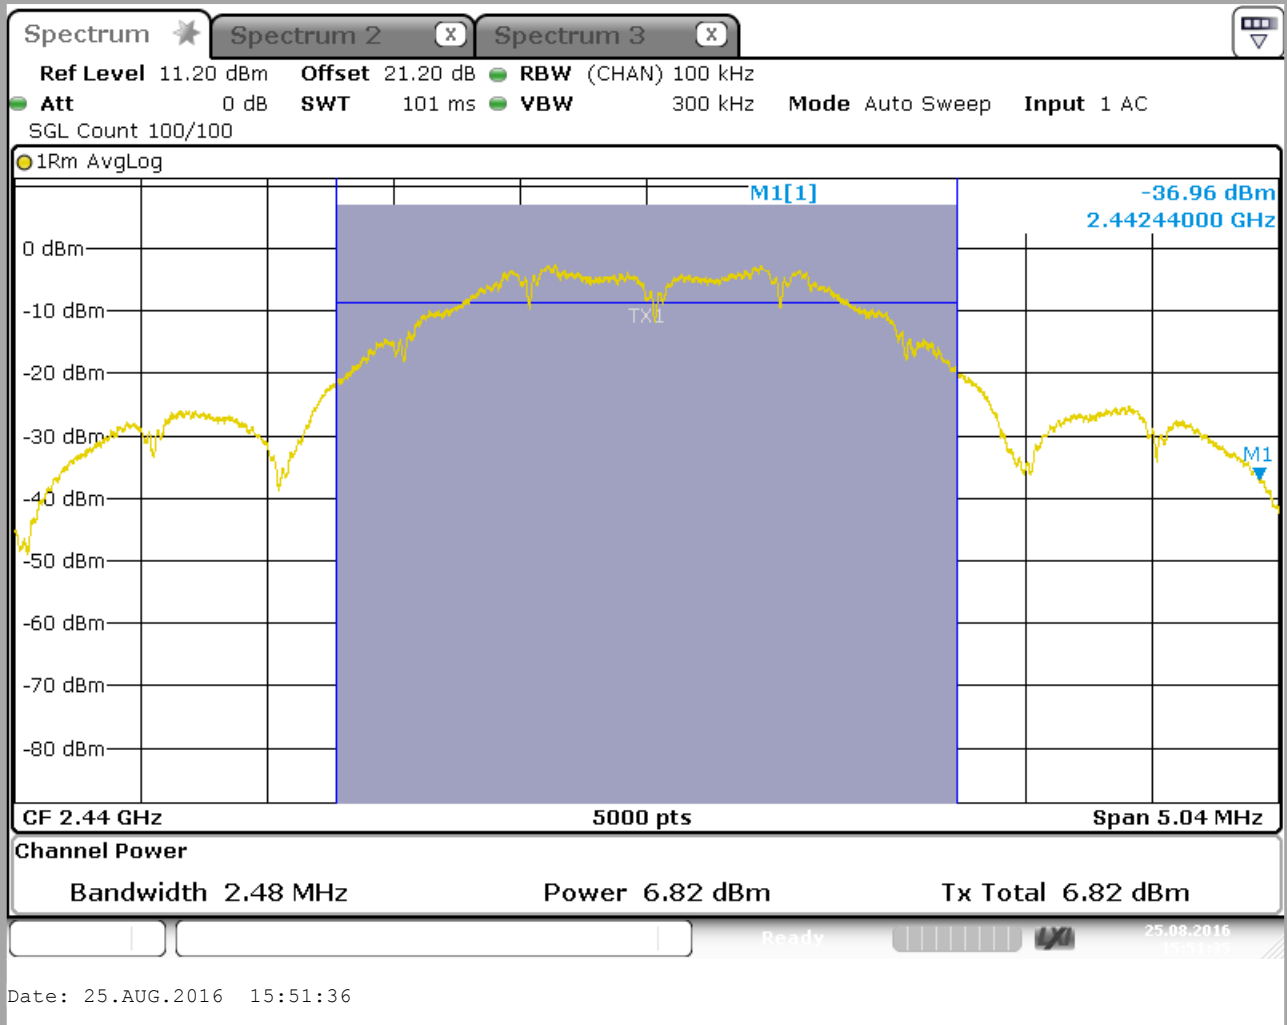



Cmax (4 with att 2.5)

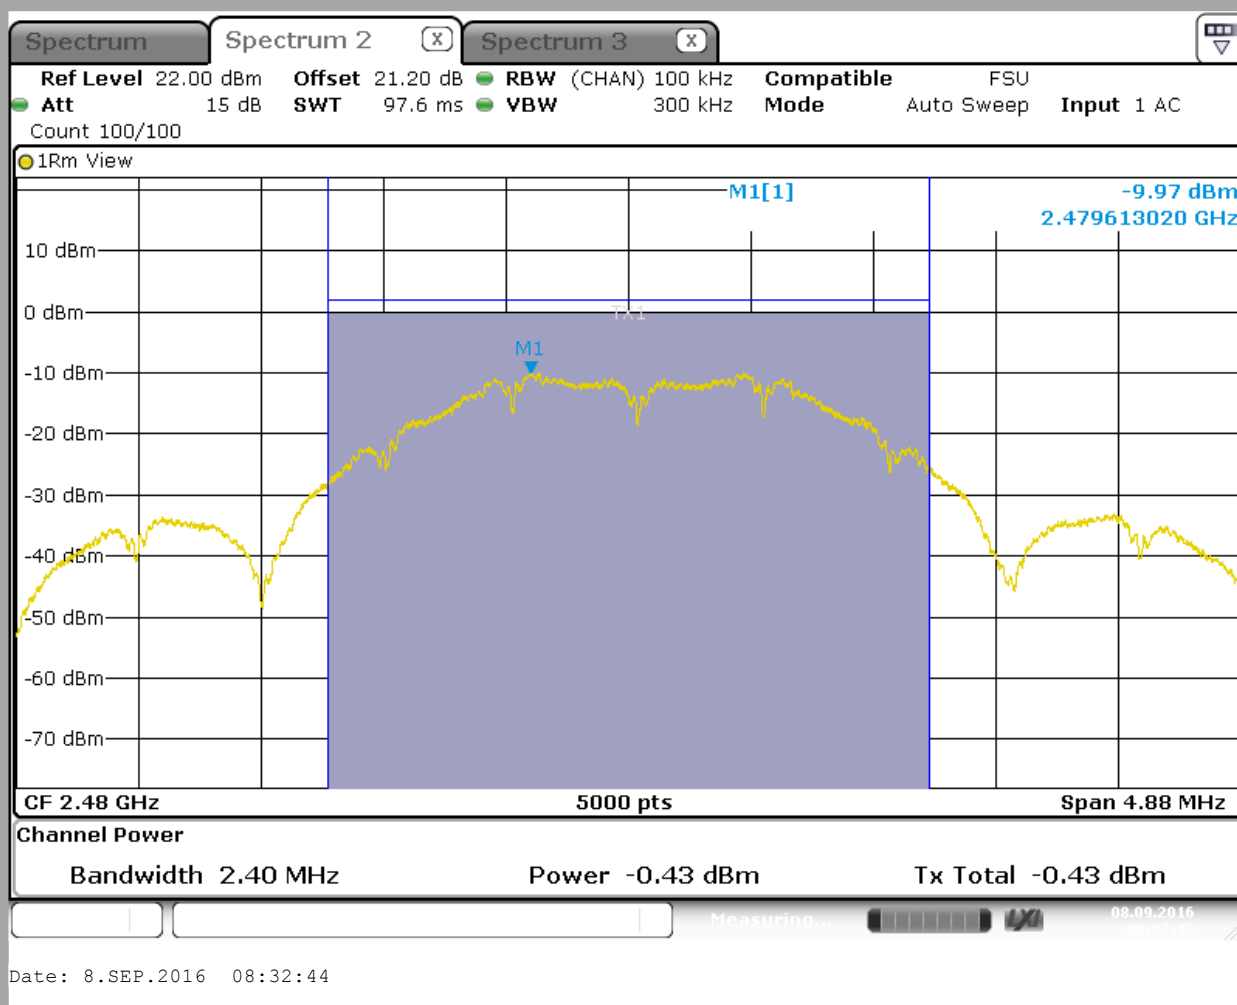

Spectrum Analyzer Offset:
Cable Loss + Attenuator= **21,2dB**

M10			
Channel	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	1.8	6,74	30
Cnom	1.8	6,82	30
Cmax	1.8	-0.43	30

Result: PASS

Limit: → The Maximum Conducted Power must be lower than 30dBm
Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi



6. POWER SPECTRAL DENSITY

6.1. TEST CONDITIONS


Test performed by : Mathieu CERISIER
Date of test : 2016/07/19
Ambient temperature : 27°C
Relative humidity : 44%

6.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT conducted access. The product has been tested according to the FCC KDB 558074 D01 DTS Meas Guidance v03r05 § 10.3.

Spectrum Analyzer Setting:


Center frequency= Cmin or Cnom or Cmax
Span $\geq$ At least 1.5 times the OBW
Amplitude= Sufficient to observe the signal amplitude
 $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz} := 3\text{kHz}$
 $\text{VBW} \geq 3 \times \text{RBW} = 10\text{kHz}$
Sweep= Auto
Sweep points $\geq 2 \times \text{Span} / \text{RBW}$
Trace= Average 100
Detector= RMS

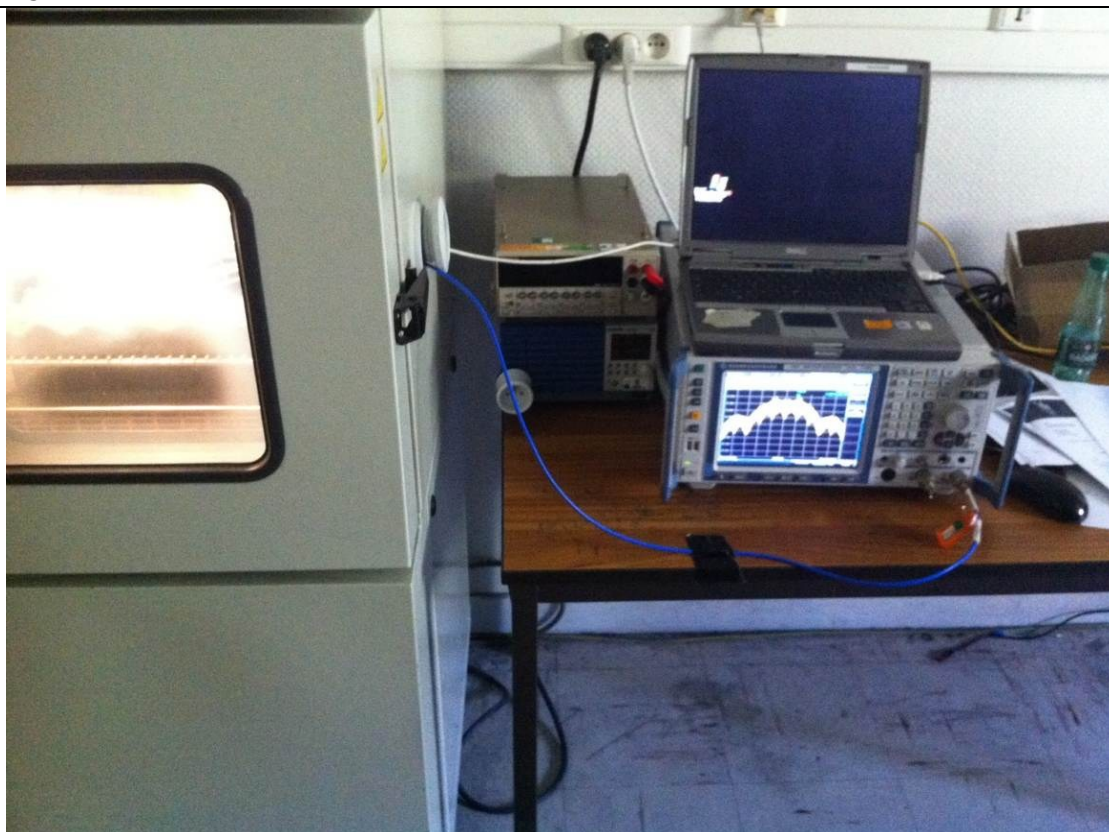

Photograph for Power Spectral Density




6.3. GRAPHICS & RESULTS

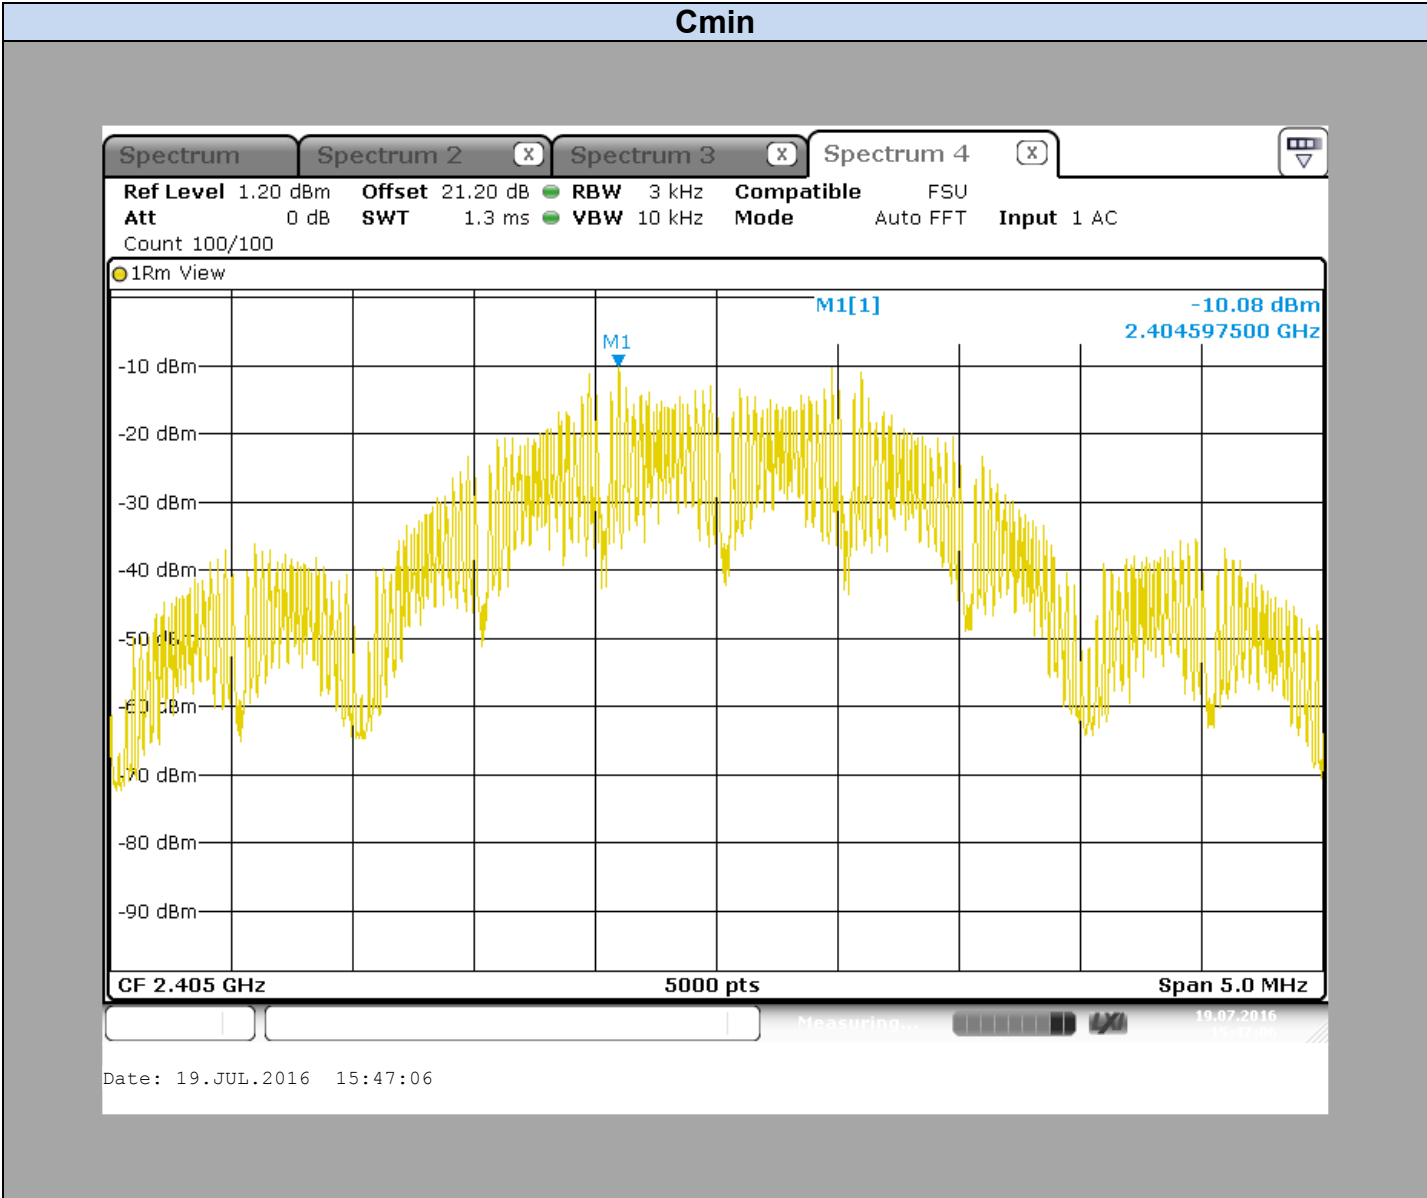




Cnom

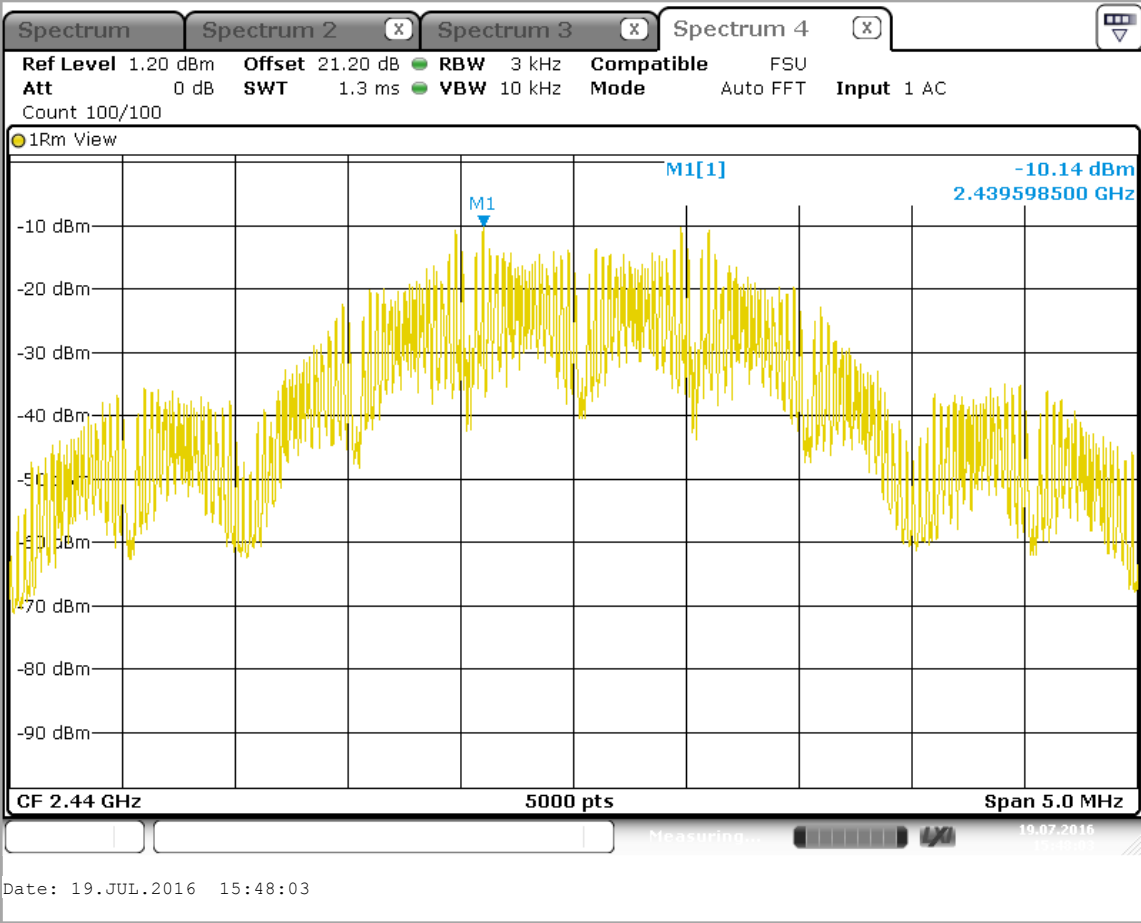



Cmax

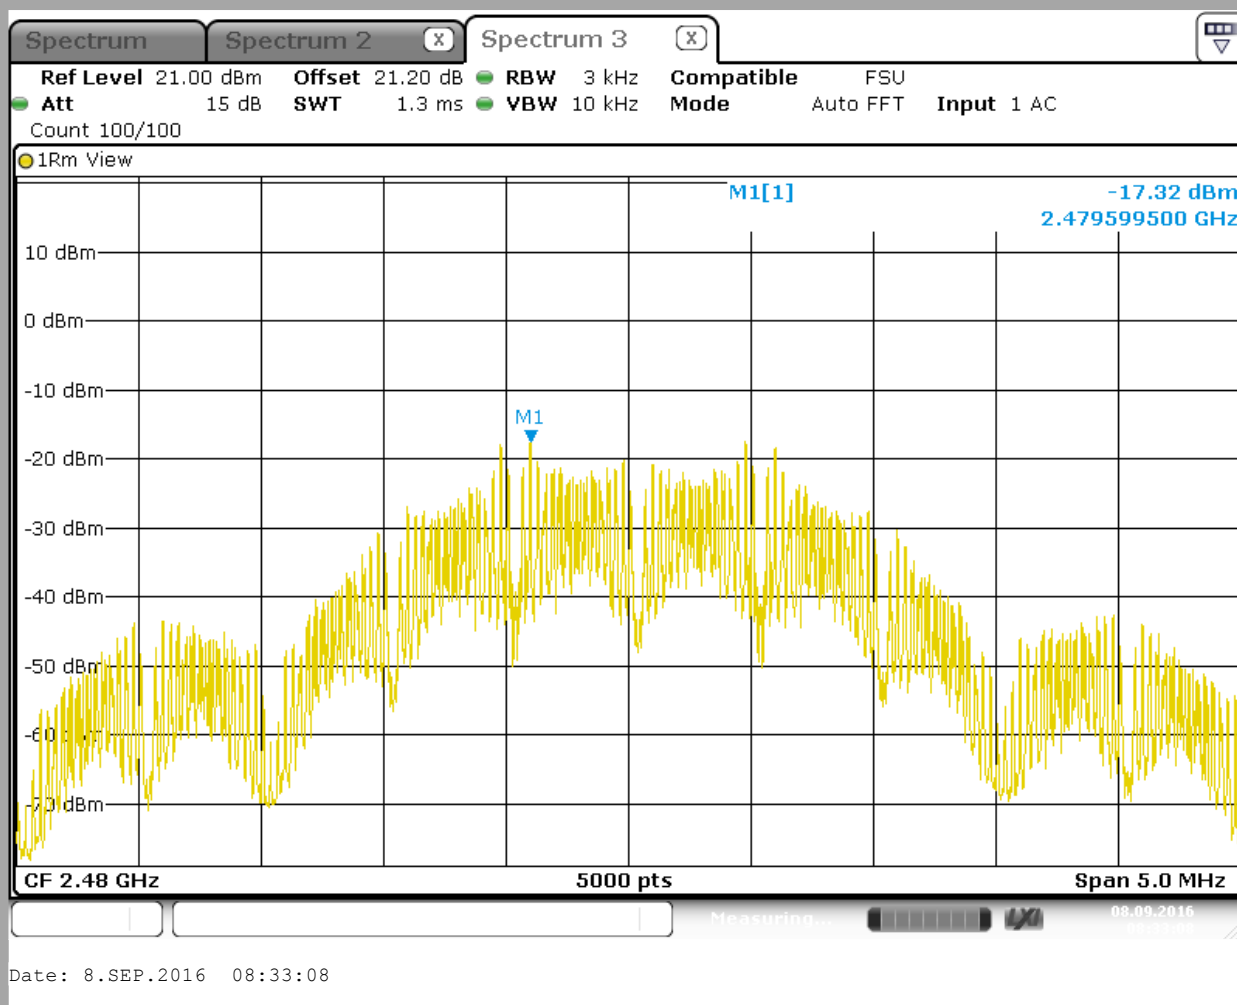

Spectrum Analyzer Offset:
Cable Loss + Attenuator= **21,2dB**

M10

Channel	Antenna Gain (dBi)	Power spectral density (dBm/3kHz)	Limit (dBm)
Cmin	1.8	-10,08	8
Cnom	1.8	-10,14	8
Cmax	1.8	-17.32	8

Result: PASS

Limit: → The Power Spectral Density must be lower than 8dBm/3kHz
Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi



7. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE

7.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : 2016/09/15
Ambient temperature : 26°C
Relative humidity : 42%

7.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT conducted access. The product has been tested according to the FCC KDB 558074 D01 DTS Meas Guidance v03r05 § 11.0.

Spectrum Analyzer Setting:


Start frequency= 2380MHz
Stop frequency= 2500MHz
span $\geq$ 1.5 times the DTS Bandwidth
Amplitude= Sufficient to observe the signal amplitude
RBW= 100kHz
VBW $\geq$ 300kHz
Sweep Time= Auto Couple
Detector= Peak
Trace= Max Hold



Photograph for Unwanted Emissions into Non-Restricted Frequency Bands At the Band Edge



7.3. GRAPHICS & RESULTS

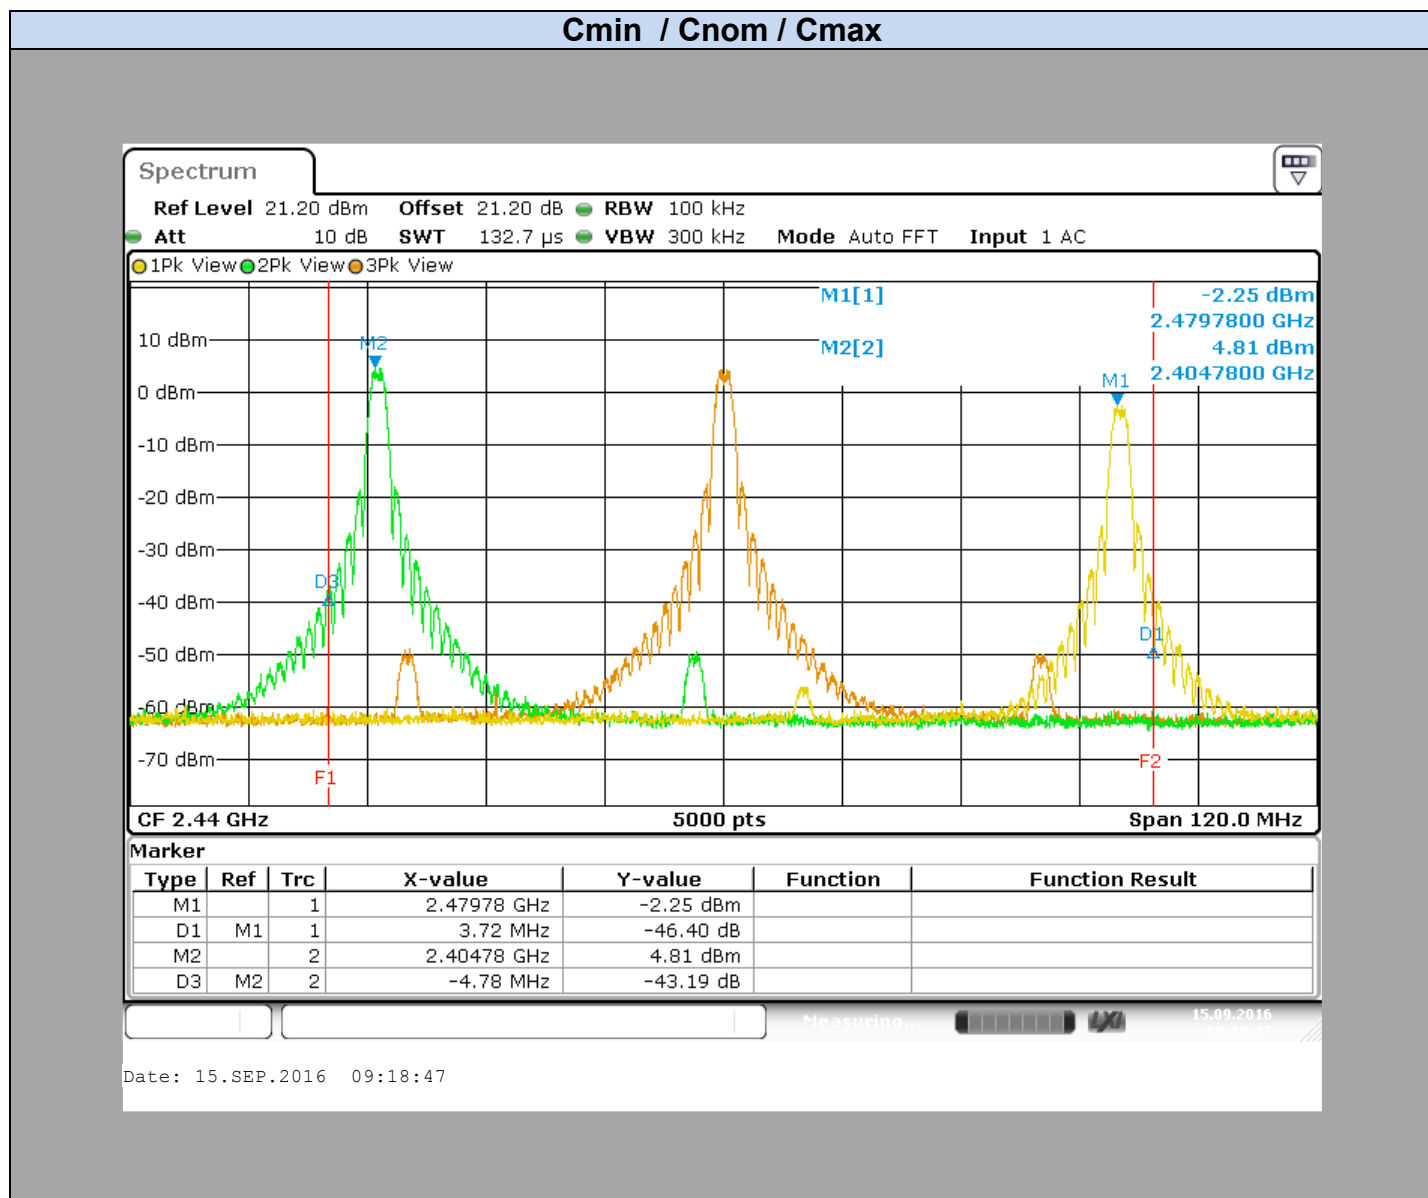

M10

Temperature	Tnom	
Voltage	Vnom	
Conducted Spurious Emission at the Band Edge (MHz)	2400	2483,5
Spurious Level (dBc)	-43.19	-46.40

Result: PASS

Limit: → All Spurious Emissions must be at least 30dB (Average Conducted Power) below the Fundamental Radiator Level at the Band Edge Edge "2400MHz & 2483,5MHz"



8. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS


Test performed by : Mathieu CERISIER
Date of test : 2016/05/11
Ambient temperature : 24°C
Relative humidity : 41%

8.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT conducted access. The product has been tested according to the FCC KDB 558074 D01 DTS Meas Guidance v03r05 § 11.0.

Spectrum Analyzer Setting:


Start frequency= 30MHz
Stop frequency= 25GHz
Amplitude= Sufficient to observe the signal amplitude
RBW= 100kHz
VBW= 300kHz
Sweep Time= Auto
Sweep Point= 249700
Trace= Max Hold
Detector= Peak

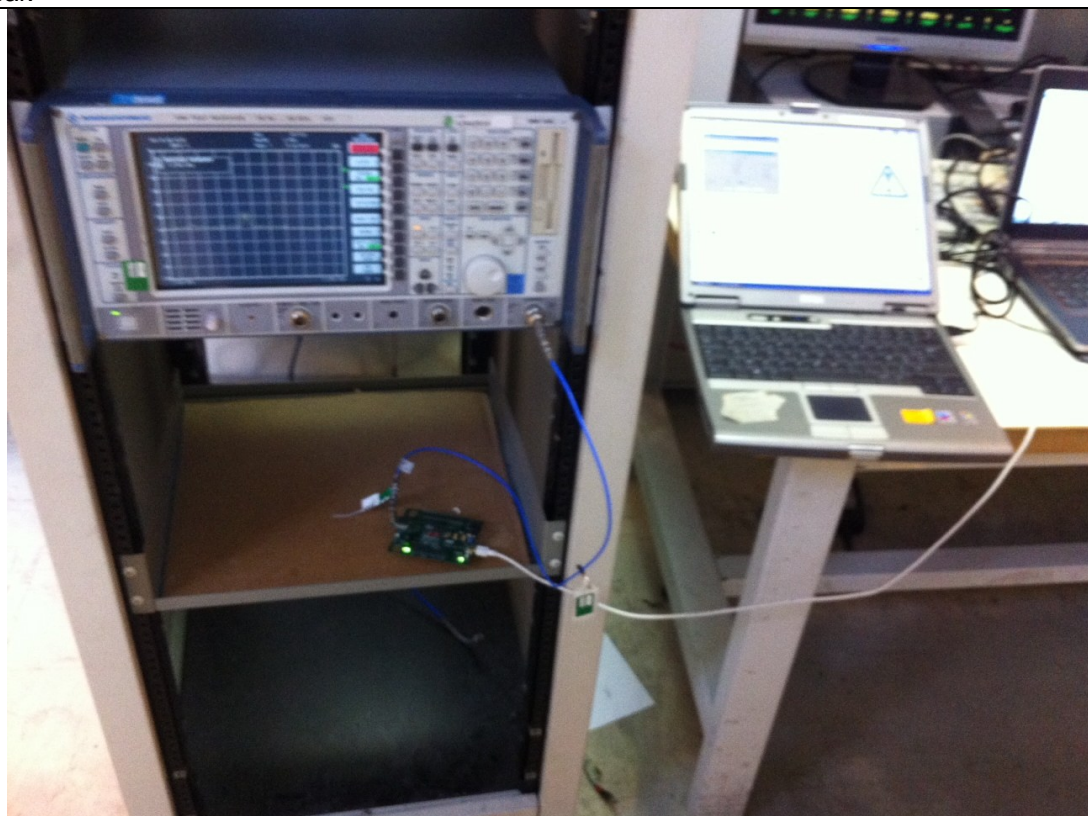

Photograph for Unwanted Emissions into Non-Restricted Frequency Bands



8.3. GRAPHICS & RESULTS

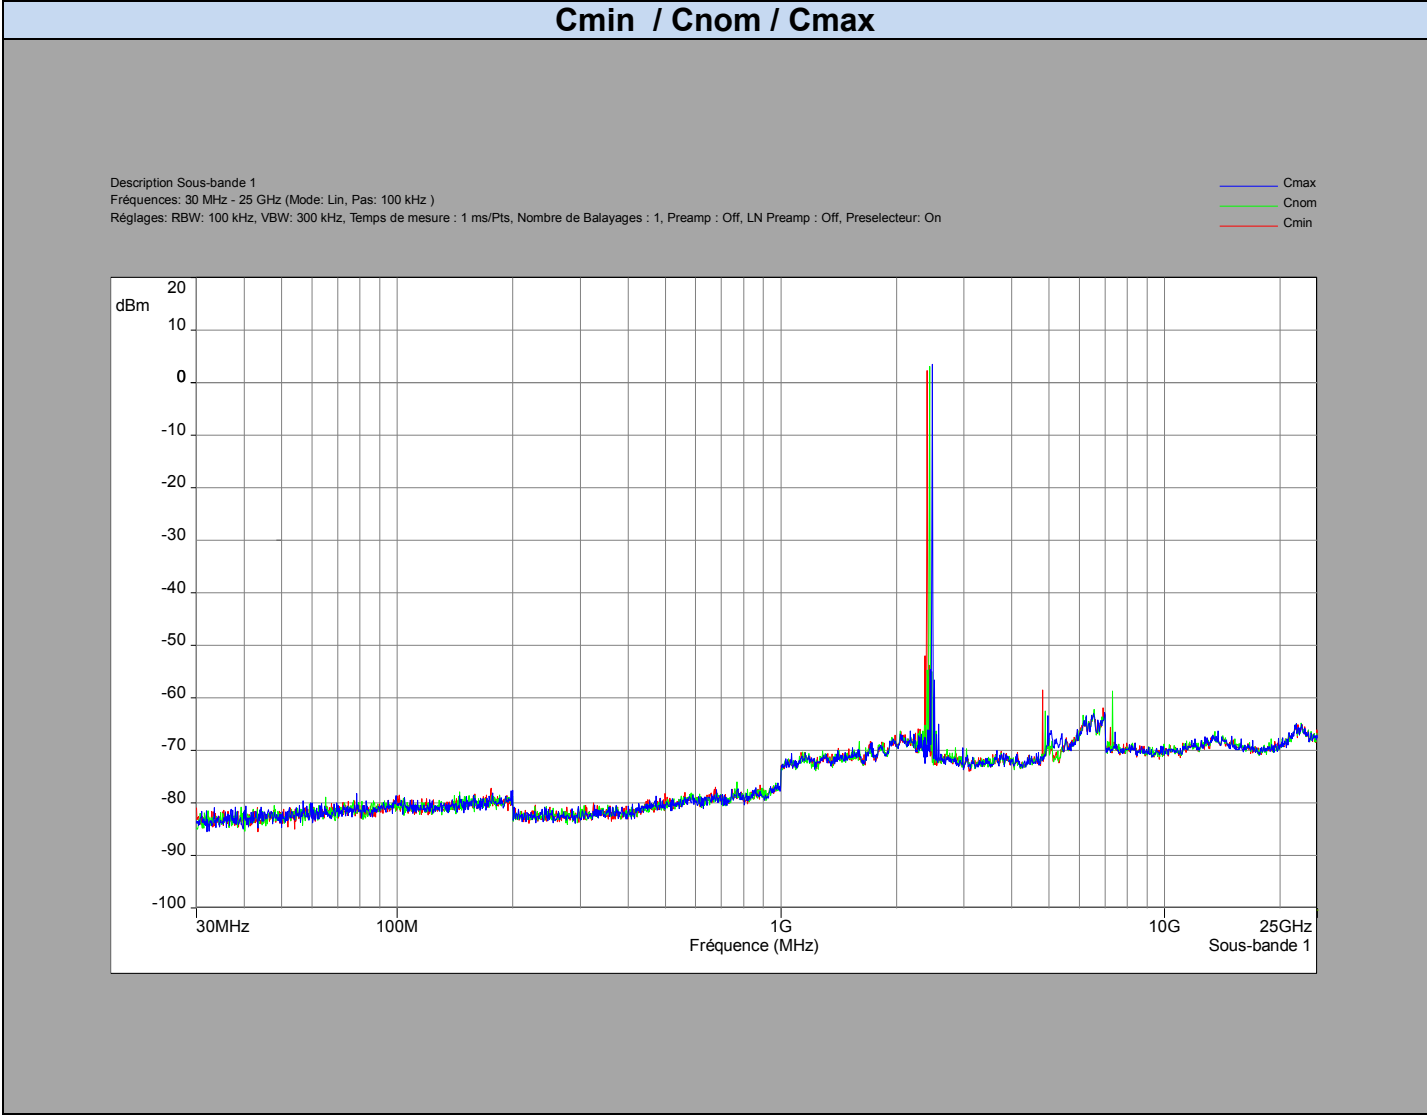



M10		
Frequency (MHz)	Spurious Level (dBm)	Spurious Level (dBc)
4809	-58,439	60,806
4879	-62,486	65,544
4959	-63,376	66,865
7213,4	-65,63	67,947
7321,3	-58,712	61,77
7442,1	-66,481	69,97

Result: **PASS**

Limit: → All Spurious Emissions must be at least 30dB (Average Conducted Power) below the Fundamental Radiator Level outside of the 2400MHz-2483,5MHz band



9. AC POWER LINE CONDUCTED EMISSIONS

9.1. TEST CONDITIONS

Test performed by : Laurent Deneux
Date of test : July 25th, 2016
Ambient temperature : 20°C
Relative humidity : 40%

9.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013) method. The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm. Auxiliaries are powered by another LISN. The cable has been shorted to 1meter length. The EUT is powered through the LISN. Measurement is made with a receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is $50\Omega / 50\mu\text{H}$. Interconnecting cables and equipment's were moved to position that maximized emission.




Photograph for AC Power Line Conducted Emissions (product)




Photograph for AC Power Line Conducted Emissions (Rear view)

9.3. RESULTS

Phase Line

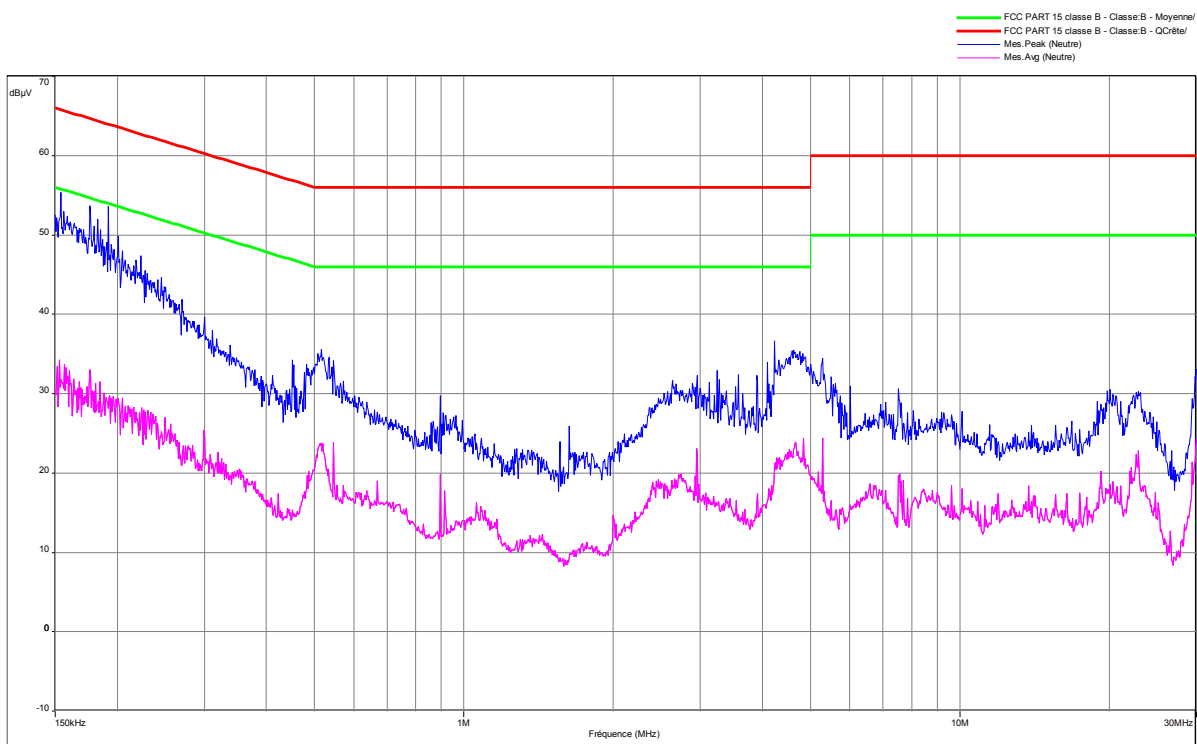

Neutral Line

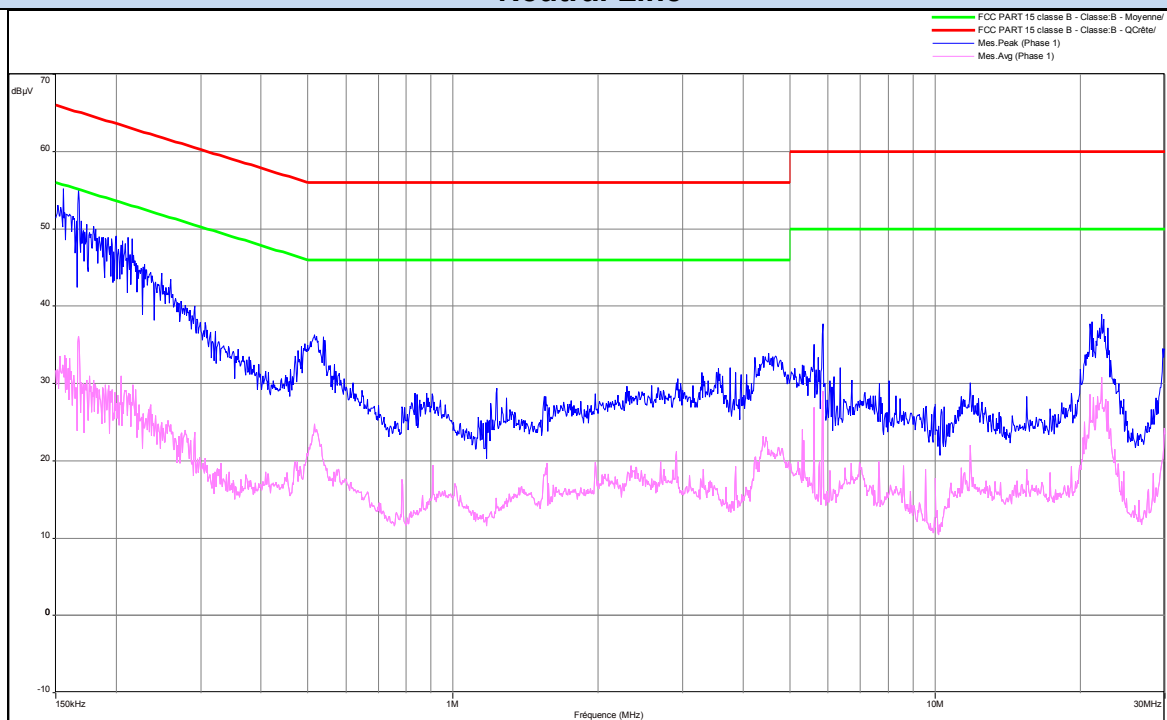



Frequency kHz	Phase conducted level dBμV			
	peak detection	Quasi peak limit	Average value	average value limit
176.5	53.7	64.6	33	54.6
517	35.5	56	24	46
4236	36.6	56	34	46
20000	30.4	60	20	50
29393	29.3	60	21.5	50

Frequency kHz	Neural conducted level dBμV			
	peak detection	Quasi peak limit	Average value	average value limit
167	55.2	65.2	24.7	55.2
516	36.2	56	24.8	46
4232	33.4	56	20.5	46
22146	39	60	30.7	50
29860	34.3	60	21.6	50

Result: PASS

Limit: → Quasi-Peak
0,15kHz to 0,5MHz: 66dBμV to 56dBμV*
0,5MHz to 5MHz: 56dBμV
5MHz to 30MHz: 60dBμV

Average
0,15kHz to 0,5MHz: 56dBμV to 46dBμV*
0,5MHz to 5MHz: 46dBμV
5MHz to 30MHz: 50dBμV

*Decreases with the logarithm of the frequency



10. UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS

10.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : August 5th, 2016
Ambient temperature : 22°C
Relative humidity : 39%

10.2. TEST SETUP


The product has been tested according to ANSI C63.10 (2013). The EUT is placed in an OATS between 30MHz to 1000MHz and in a semi-anechoic chamber between 1GHz to 26GHz. Distance between measuring antenna and the EUT is 10m. Test is performed in horizontal (H) and vertical (V) polarization with bilog antenna below 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 120kHz below 1GHz and 1MHz above 1GHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m. The EUT is place at 1.5m high above 1GHz and at 0.8m high under 1GHz.



Photograph for Unwanted Emissions into Restricted Frequency Bands



Photograph for Unwanted Emissions into Restricted Frequency Bands

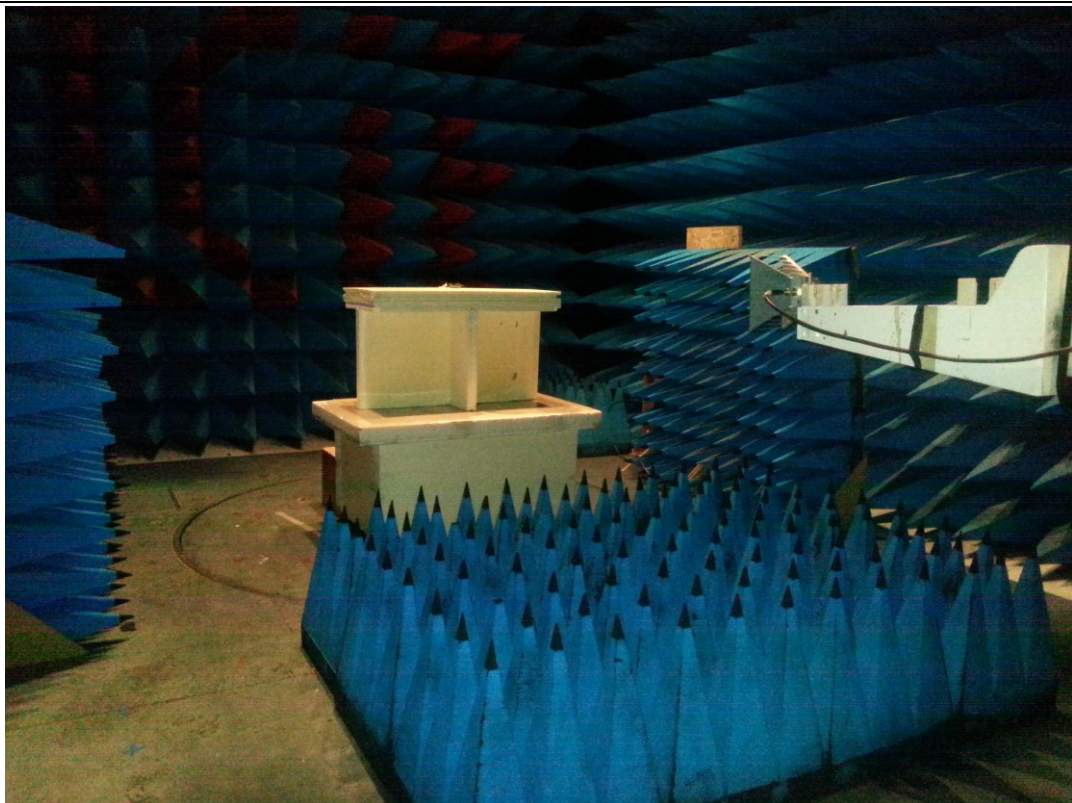


Photograph for Unwanted Emissions into Restricted Frequency Bands



10.3. RESULTS

Below 1GHz

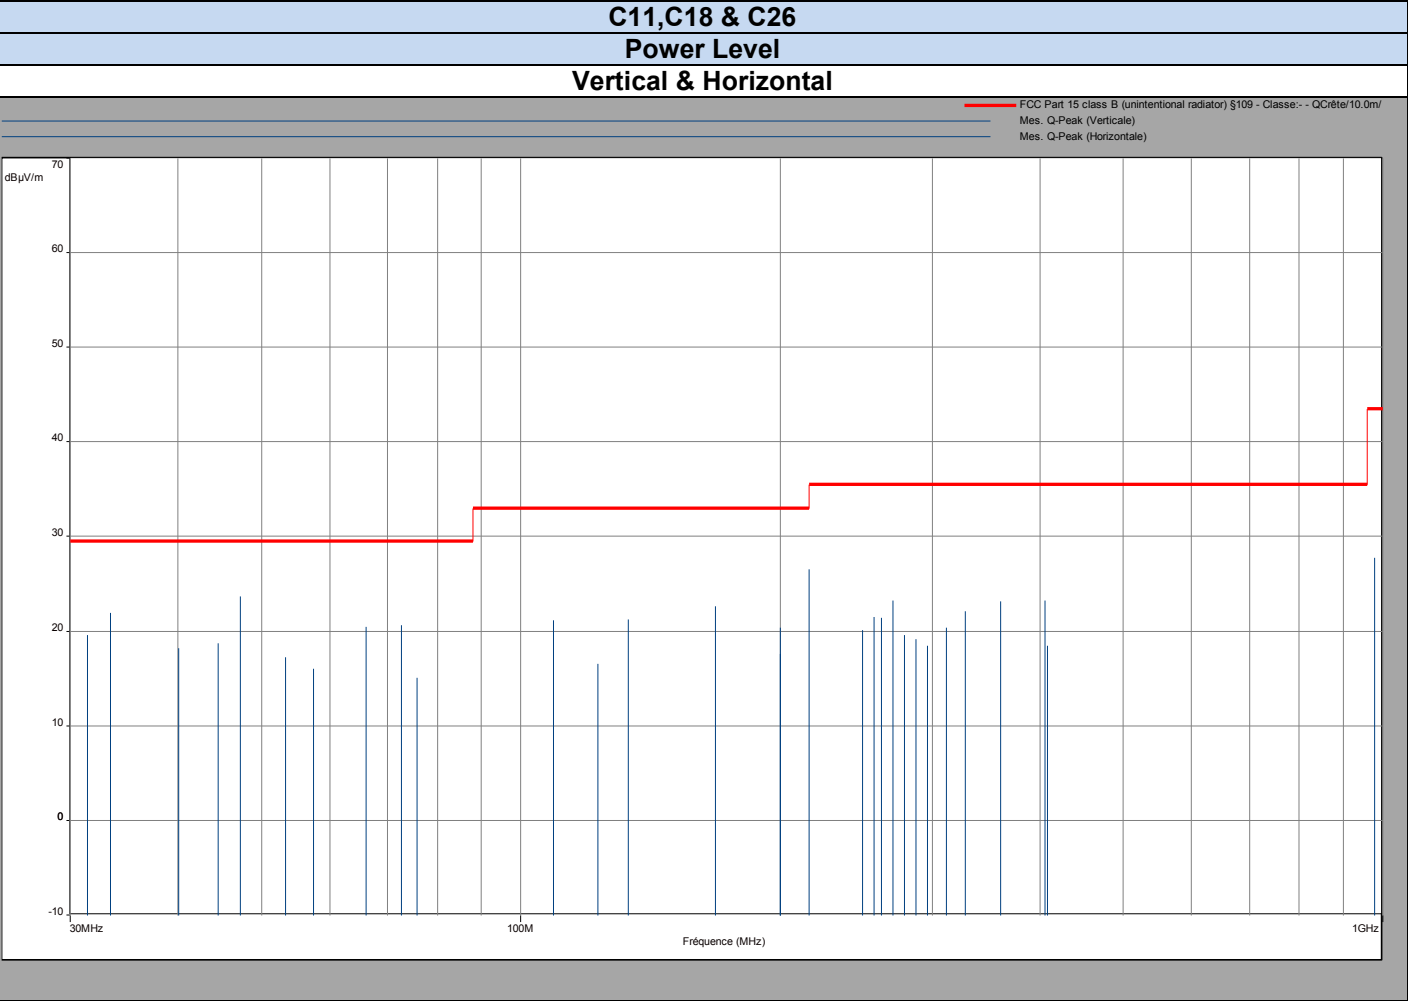




Channel Low = C11

Power Level =5


Vertical

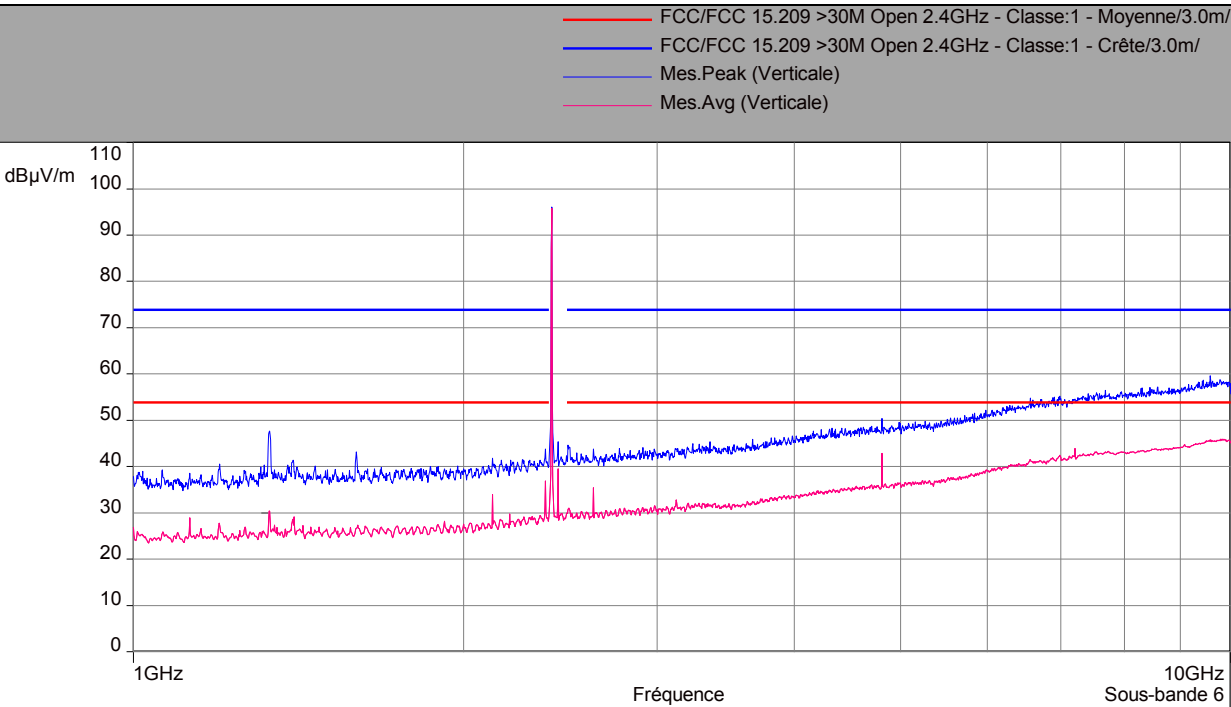

No spurious has been observed between 10GHz to 26GHz

Power Level =5


Horizontal

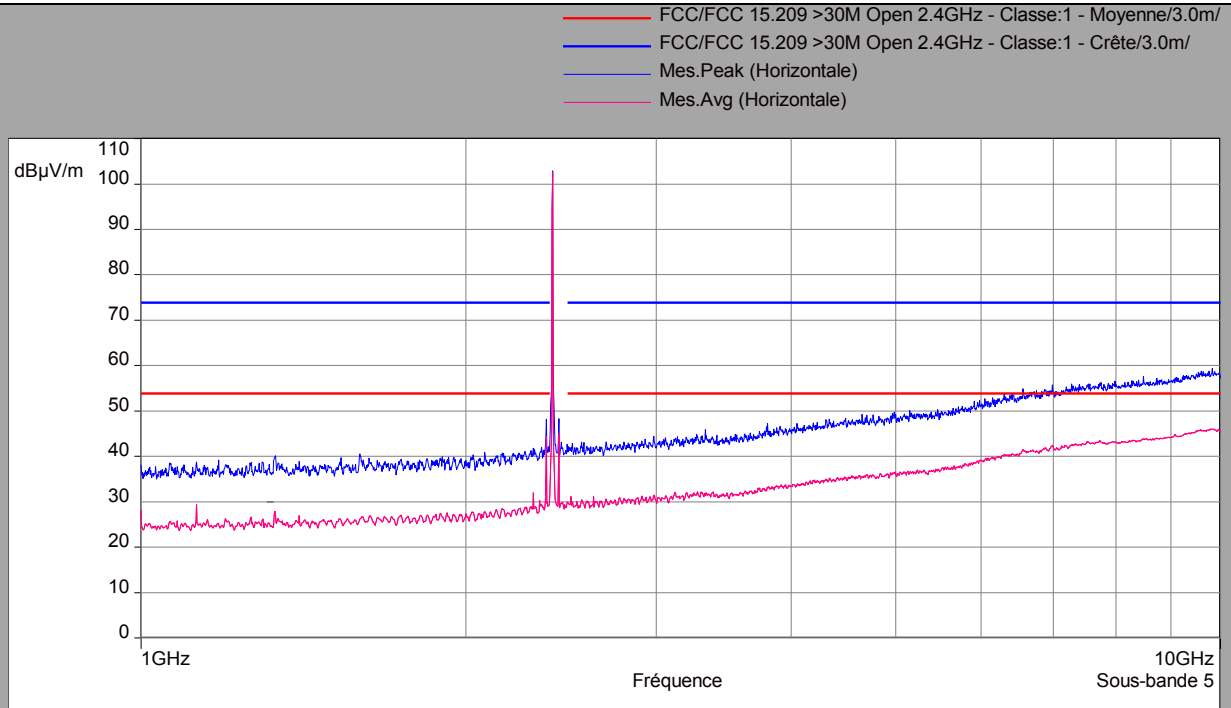


No spurious has been observed between 10GHz to 26GHz



Above 1GHz – M13

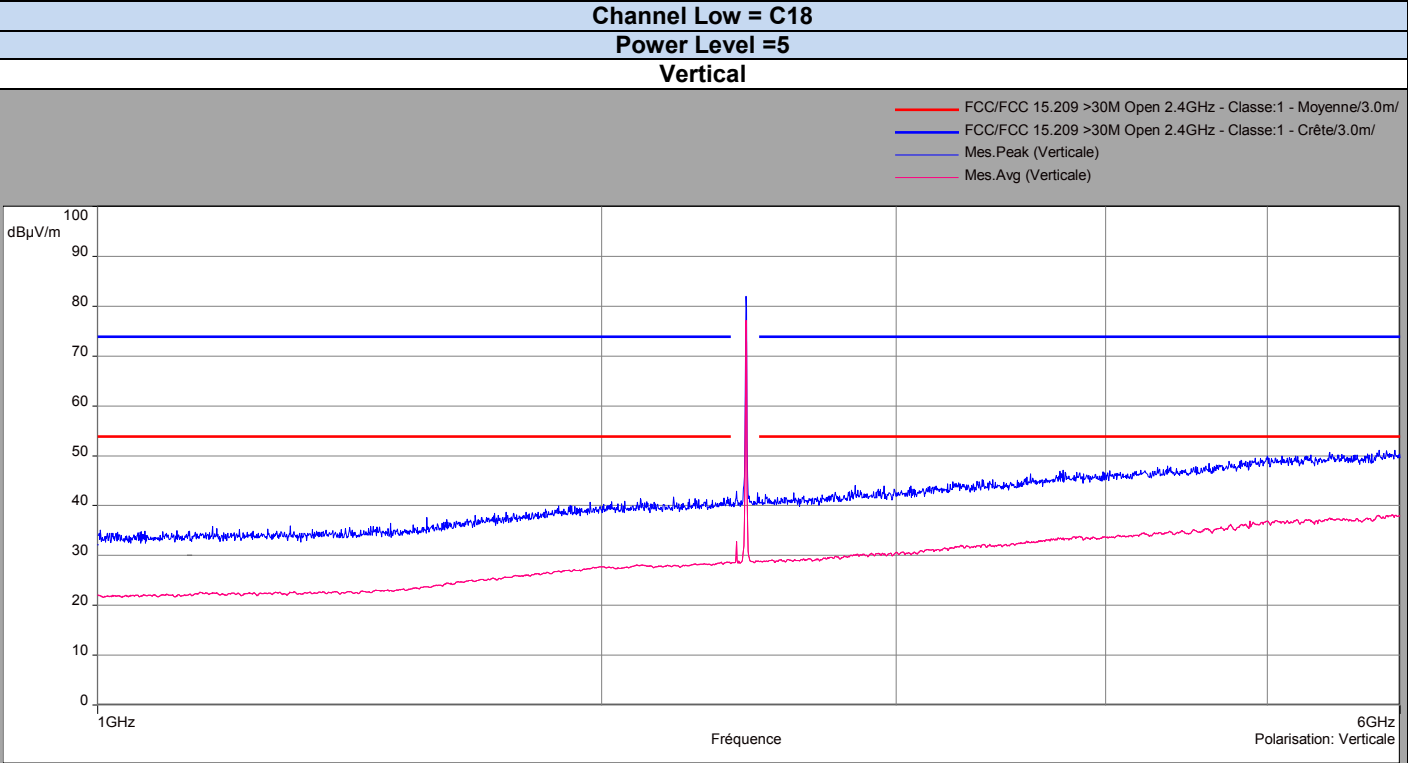


No spurious has been observed between 6GHz to 26GHz

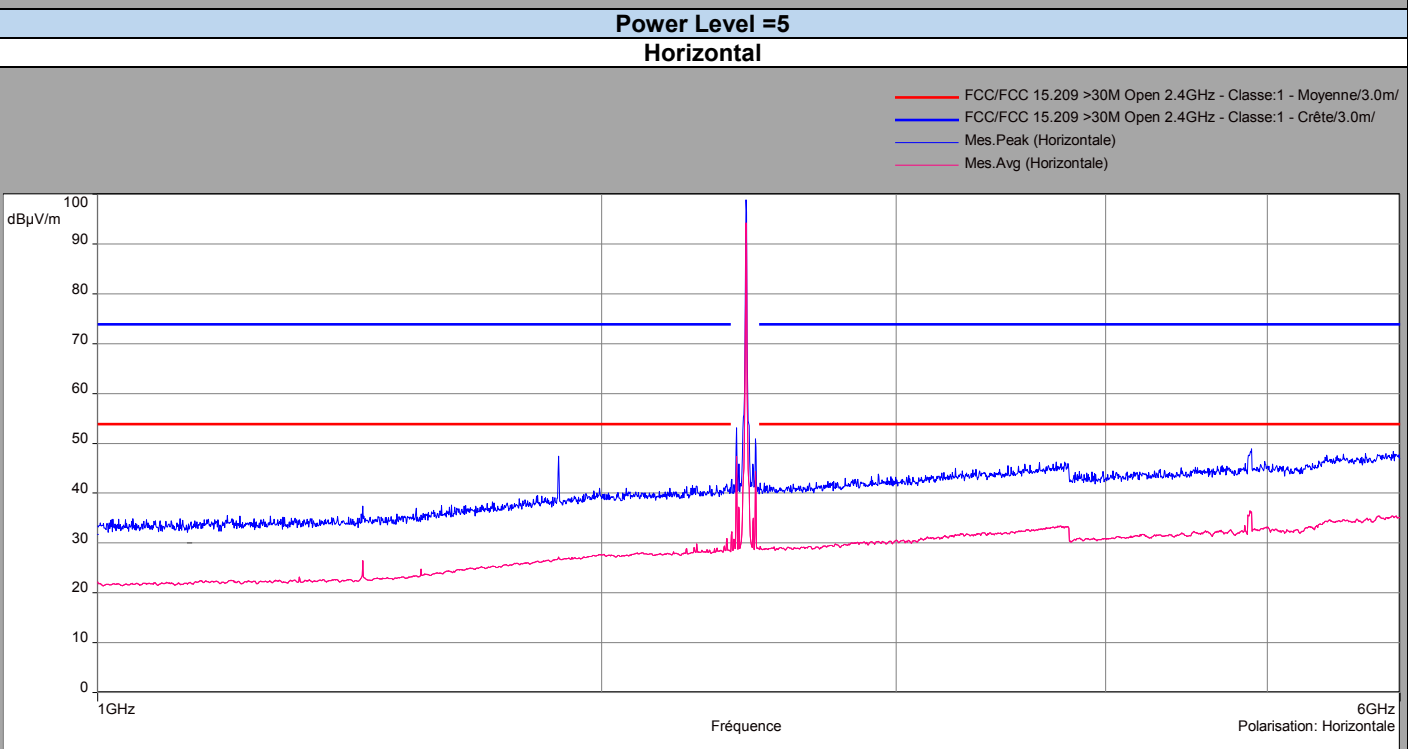


No spurious has been observed between 6GHz to 26GHz



Above 1GHz – M10

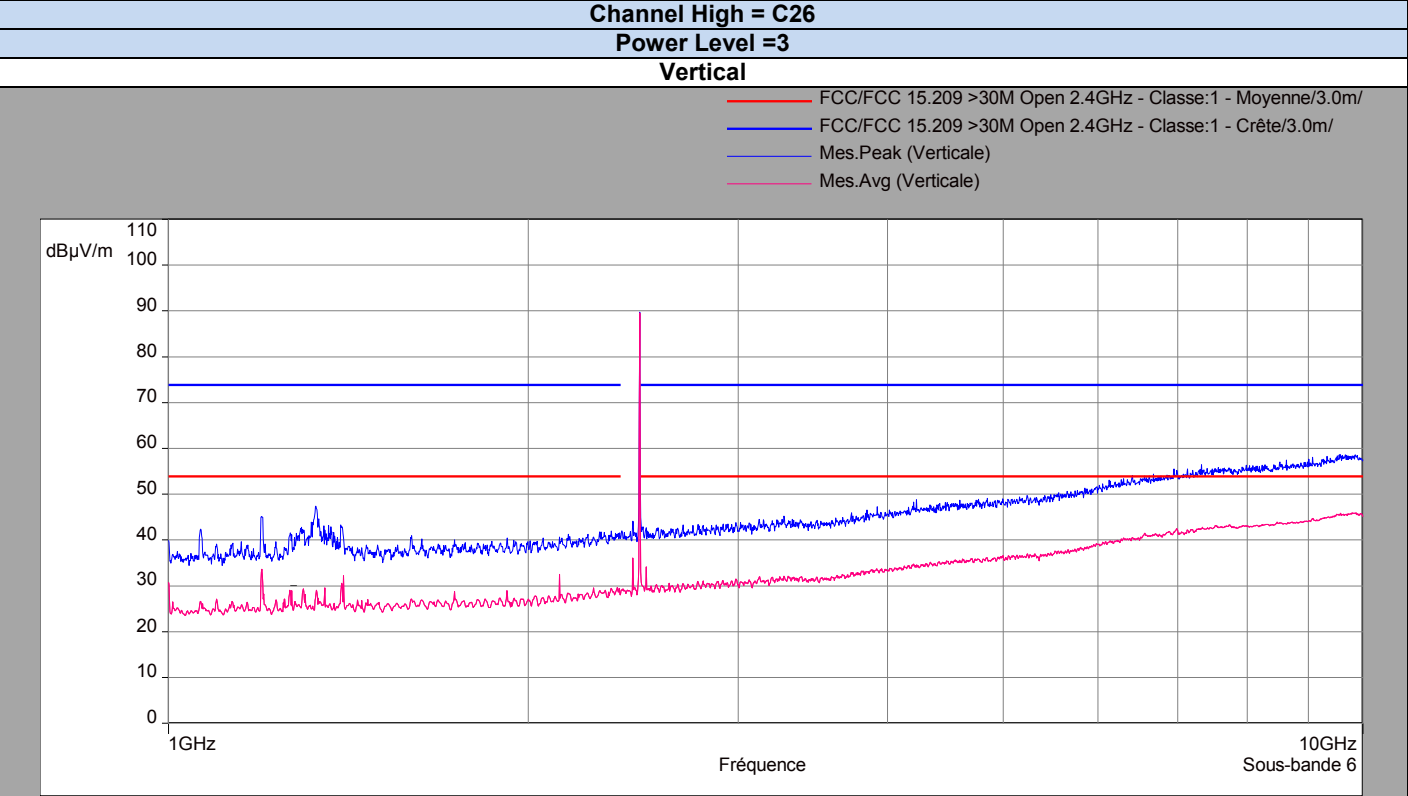

No spurious has been observed between 10GHz to 26GHz

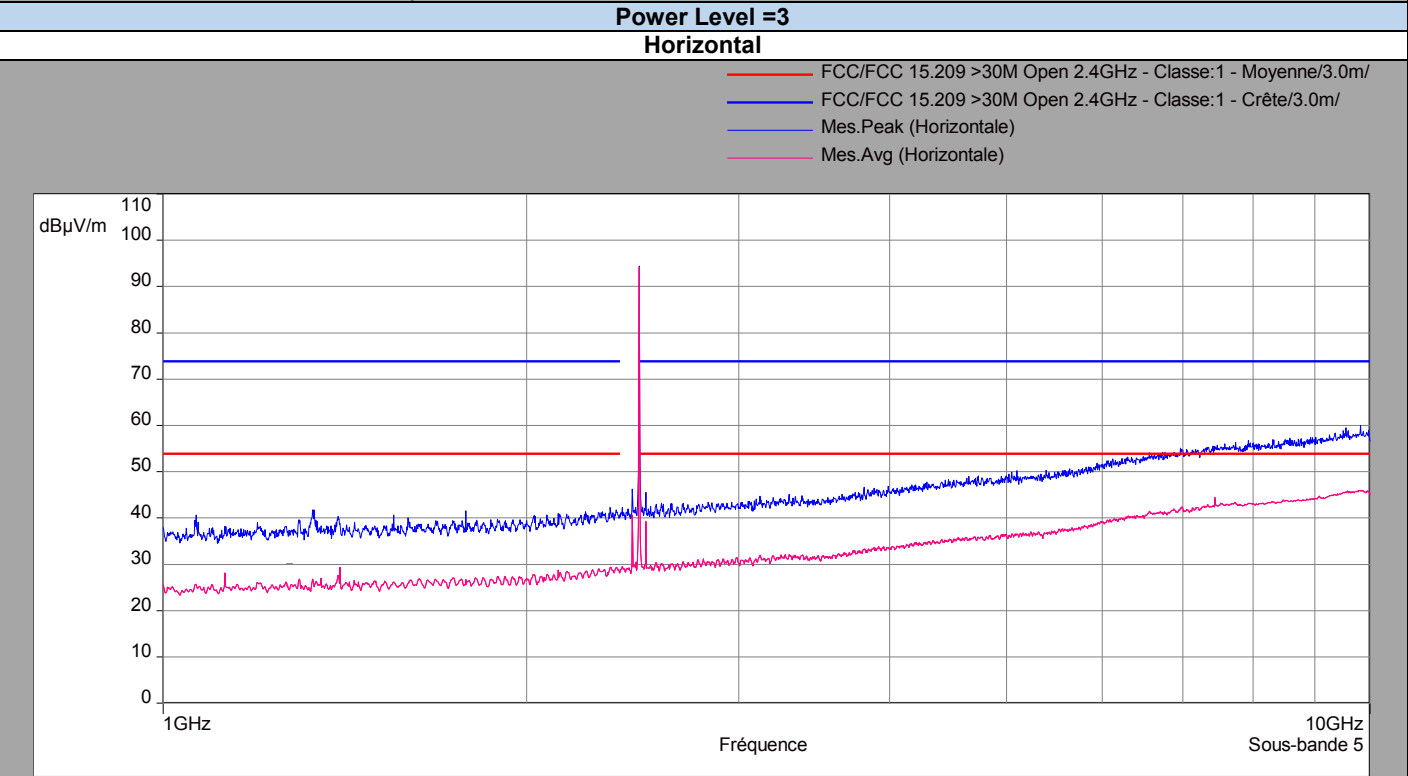

No spurious has been observed between 10GHz to 26GHz



Characterization in an OATS (1GHz to 26GHz):

Frequency MHz	Level measured QPeak Level dBµV/m	Limit level FCC Part.15 class B
33.4	22	29.5
47.3	23.7	29.5
168	22.7	33
216	26.5	33
978	27.7	43.5

Characterization in a semi anechoic chamber (1GHz to 26GHz):

Channel Low = C11

Polarisation	Frequency (MHz)	Average Level (dBµV/m)	Average Limit (dBµV/m)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)
Vertical	1125	30.20	53.9	38.53	73.9
Vertical	1197	28.74	53.9	41.37	73.9
Horizontal	1398	28.04	53.9	40.95	73.9
Vertical	1593	32.63	53.9	46.16	73.9
Horizontal	1607	29.15	53.9	41.08	73.9
Horizontal	2309.5	32.84	53.9	42.37	73.9
Horizontal	2390	29.46	53.9	40.07	73.9
Vertical	2390	28.31	53.9	39.68	73.9
Vertical	2625	34.50	53.9	43.05	73.9
Horizontal	3203	37.22	53.9	48.68	73.9
Horizontal	4012	40.39	53.9	52.24	73.9
Vertical	4811	38.76	53.9	49.45	73.9
Horizontal	5608	46.61	53.9	59.22	73.9
Horizontal	6208	44.67	53.9	56.85	73.9
Vertical	7213.5	49.73	53.9	59.11	73.9

Channel High = C18

Polarisation	Frequency (MHz)	Average Level (dBµV/m)	Average Limit (dBµV/m)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)
Horizontal	2390	29.18	53.9	40.04	73.9
Vertical	2390	28.15	53.9	38.75	73.9
Horizontal	2483.5	27.55	53.9	40.32	73.9
Vertical	2483.5	29.05	53.9	40.95	73.9



Channel High = C26

Polarisation	Frequency (MHz)	Average Level (dBµV/m)	Average Limit (dBµV/m)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)
Vertical	1125.5	29.54	53.9	38.42	73.9
Horizontal	1329.5	29.34	53.9	45.66	73.9
Vertical	1330	27.83	53.9	45.65	73.9
Vertical	1399	33.89	53.9	46.73	73.9
Horizontal	1596	27.94	53.9	40.68	73.9
Vertical	1596	32.33	53.9	45.90	73.9
Vertical	2125	35.16	53.9	42.41	73.9
Horizontal	2483.5	50.79	53.9	60.43	73.9
Vertical	2483.5	40.11	53.9	50.99	73.9
Vertical	2625	35.01	53.9	43.05	73.9

Result: **PASS**

Limit: → 30MHz to 88MHz: 40dBµV/m QPeak
88MHz to 216MHz: 43,5dBµV/m QPeak
216MHz to 960MHz: 46dBµV/m QPeak
960MHz to 1000MHz: 54dBµV/m QPeak
Above 1000MHz: 74dBµV/m Peak
54dBµV/m Average



11. TEST EQUIPMENT LIST

Occupied Bandwidth, -6dB Bandwidth, Maximum Peak Output Power, Power Spectral Density and Unwanted Emissions into Non-Restricted Frequency Bands					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
RF cable	CABLES & CONNECTIQUES	3.5MD/CSU528AA/3.5MD/1500	A5329356	2015/07	2016/07
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642024	2016/03	2017/03
Spectrum analyzer	ROHDE & SCHWARZ	FSL6	A4060032	2015/04	2017/04
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329675	2015/10	2016/10
Attenuator 20 dB	-	SA 4016	A7122211	2015/11	2016/11
Unwanted Emissions into Restricted Frequency Bands & Receiver Spurious Emissions					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
Full anechoic chamber	SIEPEL	-	D3044019	2013/05	2017/05
EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018	2016-03	2017-03
Measurement RF cable	-	Cordon 082-5454-1.5mtr	A5329624	2015/10	2017/10
Measurement RF cable	-	082-0404-1MTR	A5329625	2015/12	2016/12
Measurement RF cable	-	-	A5329626	2015/12	2016/12
Preamplifier	HELWETT PACKARD	8449B	A7080071	2016-01	2017-01
Horn	EMCO	3115	C2042016	2016-01	2017-01
Rejector filter 2,4GHz	-	2.45GHz	A7484048	2015/12	2016/12
Bilog antenna	CHASE	CBL 6112A	C2040040	2016-01	2017-01
AC Power Line Conducted Emissions					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
EMI receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015/12	2016/12
Cable	-	Câble RF type Emission conduite	A5329257	2015/06	2016/06
Cable	CABLES & CONNECTIQUES		A5329411	2015/06	2016/06
V LISN	ROHDE & SCHWARZ	ENV216	C2320162	2015/06	2016/06
Semi anechoic chamber	SIEPEL	-	D3044008	2014/05	2017/05
Unwanted Emissions into Restricted Frequency Bands					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
EMI receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015/12	2016/12
Cable	sans; ATEM	SMA 0.5m	A5329645	2015/08	2016/08
Rejector filter 2,4GHz	-	2.45GHz	A7484048	2015/12	2016/12

In our qualification system the calibration due is more or less 2 months



12. UNCERTAINTIES CHART

Kind of test	Measurement uncertainties (k=2) $\pm x(\text{dB})$ / (Hz)	Limit for uncertainties $\pm y(\text{dB})$
TRANSMITTER REQUIREMENTS		
Radio frequency	$\pm 2 \cdot 10^{-8}$ Hz	$\pm 1 \cdot 10^{-7}$ Hz
RF Conducted power	± 0.6 dB	± 1.5 dB
Spurious emissions - Frequency < 1000 MHz - Frequency > 1000 MHz	± 3.9 dB ± 3.1 dB	± 6 dB
Spurious in conduction	± 1.6 dB	± 3 dB
Temperature	$\pm 0.5^{\circ}\text{C}$	$\pm 1^{\circ}\text{C}$
Humidity	± 2.5 %	± 10 %
RECEIVER REQUIREMENTS		
Spurious emissions - Frequency < 1000 MHz - Frequency > 1000 MHz	± 3.9 dB ± 3.1 dB	± 6 dB