


RF TEST REPORT



Report No.: 16021314-FCC-R1

Supersede Report No.: N/A

Applicant	FrSky Electronic Co., Ltd.	
Product Name	Digital Telemetry Radio System	
Model No.	Taranis Q X7	
Serial No.	Taranis Q X7D 、 Taranis Q X7S	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	October 12 to December 07, 2016	
Issue Date	December 07, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Deon Dai Test Engineer	Miro Bao Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:
SIEMIC (Nanjing-China) Laboratories
2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China
Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16021314-FCC-R1
Page	3 of 43

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 RF EXPOSURE.....	8
6.2 ANTENNA REQUIREMENT	9
6.3 CHANNEL SEPARATION.....	10
6.4 20DB BANDWIDTH	12
6.5 PEAK OUTPUT POWER	14
6.6 NUMBER OF HOPPING CHANNEL	16
6.7 TIME OF OCCUPANCY (DWEIL TIME)	18
6.8 BAND EDGE	20
6.9 AC POWER LINE CONDUCTED EMISSIONS.....	24
6.10 RADIATED SPURIOUS EMISSIONS	25
ANNEX A. TEST INSTRUMENT.....	30
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	31
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	40
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	42
ANNEX E. DECLARATION OF SIMILARITY	43

Test Report No.	16021314-FCC-R1
Page	5 of 43

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16021314-FCC-R1	NONE	Original	December 07, 2016

2. Customer information

Applicant Name	FrSky Electronic Co., Ltd.
Applicant Add	No.100 Jinxi Road ,Wuxi,Jiangsu,China
Manufacturer	FrSky Electronic Co., Ltd.
Manufacturer Add	No.100 Jinxi Road ,Wuxi,Jiangsu,China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Add	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	EZ EMC

4. Equipment under Test (EUT) Information

Description of EUT:	Digital Telemetry Radio System
Main Model:	Taranis Q X7
Serial Model:	Taranis Q X7D 、 Taranis Q X7S
Date EUT received:	October 09, 2016
Test Date(s):	October 12 to December 07, 2016
Equipment Category :	FHSS
Antenna Gain:	2 dBi
Type of Modulation:	2-FSK
RF Operating Frequency (ies):	2408-2477.5 MHz
Max. Output Power:	16.446dBm
Number of Channels:	47CH
Port:	Micro USB Port, SD Card Port
Input Power:	6~15V(9V@160mA)
Trade Name :	FrSky
FCC ID:	XYFX7QDS

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	N/A
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Conducted Emissions & Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	1.634dB / 3.952dB

Test Report No.	16021314-FCC-R1
Page	8 of 43

6. Measurements, Examination And Derived Results

6.1 RF Exposure

The EUT is a portable device, thus requires RF exposure evaluation;
Please refer to SIEMIC RF Exposure Report: 16021314-FCC-H1.

6.2 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules.

§15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:

A permanently attached PIFA antenna for 2.4G, the gain is 2dBi.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.3 Channel Separation

Temperature	25°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	October 12, 2016
Tested By :	Deon Dai

Requirement(s):

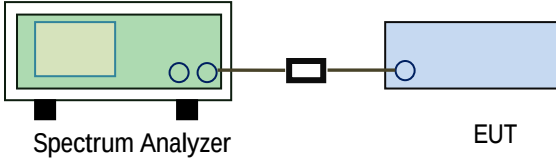Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥1% of the span - Video (or Average) Bandwidth (VBW) ≥RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.		
Remark			
Result	☒ Pass ☐ Fail		


Test Data ☒ Yes ☐ N/A
Test Plot ☒ Yes (See below) ☐ N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation	Low Channel	2408	1.509	0.3085	Pass
	Adjacency Channel	2409.5			
	Mid Channel	2442.5	1.503	0.2629	Pass
	Adjacency Channel	2441			
	High Channel	2477.5	1.506	0.2612	Pass
	Adjacency Channel	2476			

Test Plots


Channel Separation measurement result

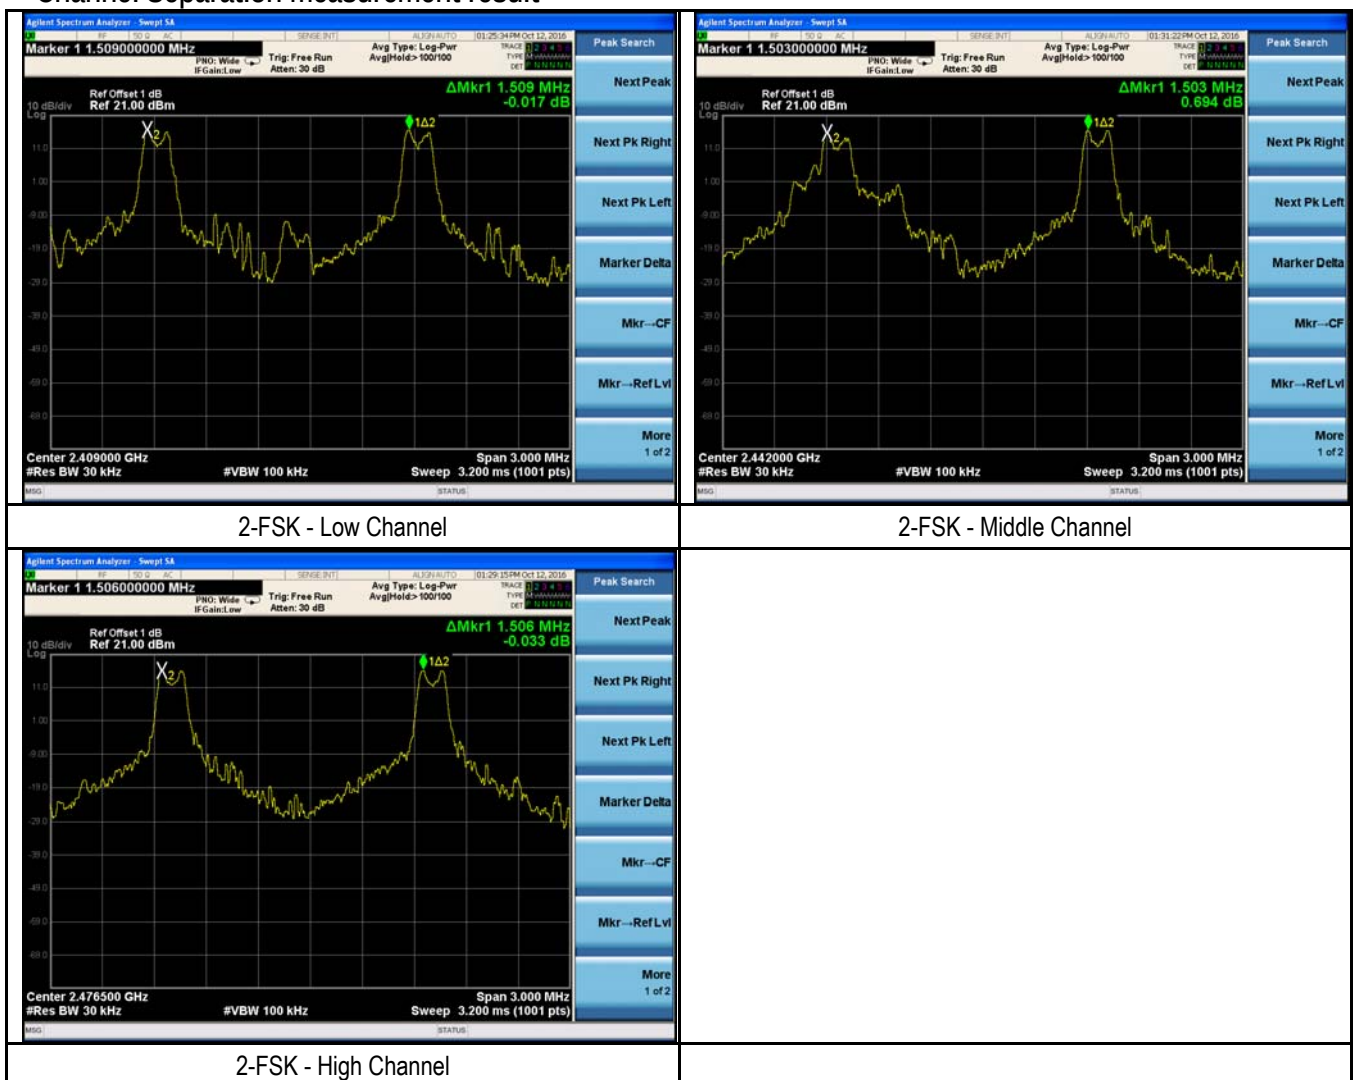

6.4 20dB Bandwidth

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	October 12, 2016
Tested By :	Deon Dai

Requirement(s):

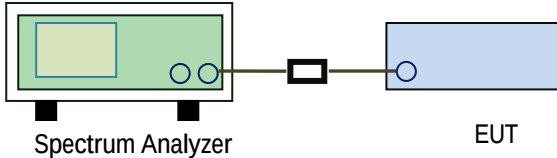Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW $\geq 1\%$ of the 20 dB bandwidth - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)
2-FSK	Low	2408	0.3085
	Mid	2442.5	0.2629
	High	2477.5	0.2612

Test Plots


20dB Bandwidth measurement result

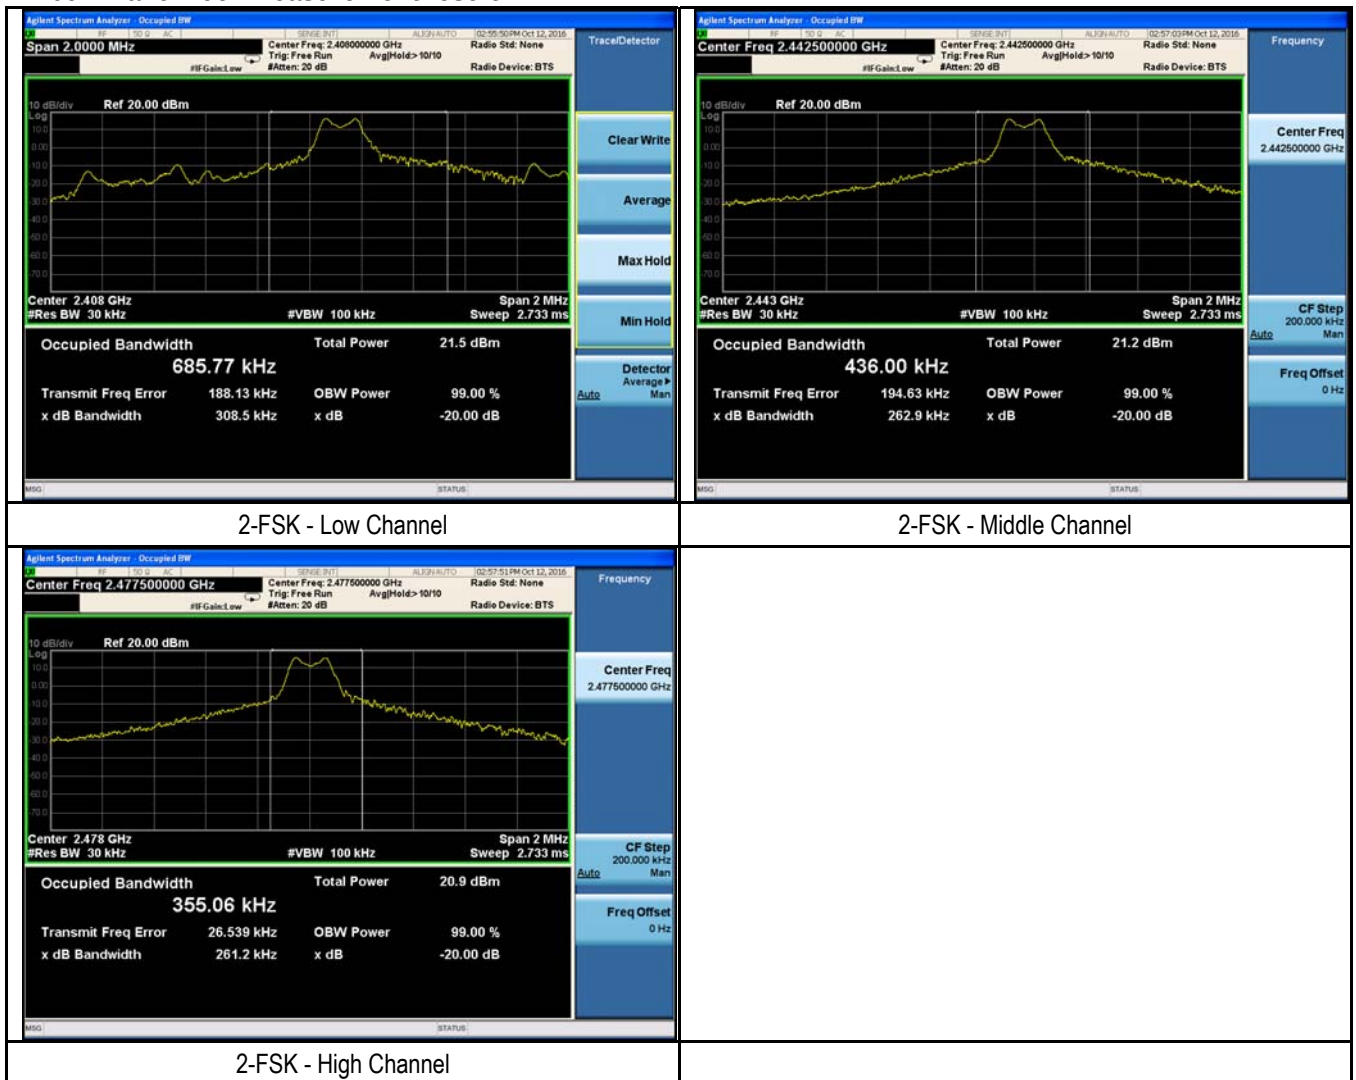

6.5 Peak Output Power

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	October 12, 2016
Tested By :	Deon Dai

Requirement(s):

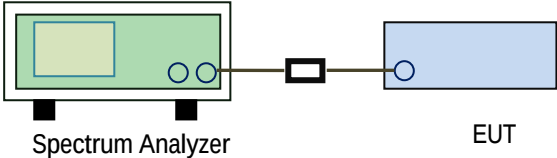Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☒
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☒
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	☐
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	☐
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Conducted Power (mW)	Limit (mW)	Result
Output power	2-FSK	Low	2408	16.446	44.12	1000	Pass
		Mid	2442.5	16.222	41.90	1000	Pass
		High	2477.5	15.886	38.78	1000	Pass

Test Plots


Output Power measurement result

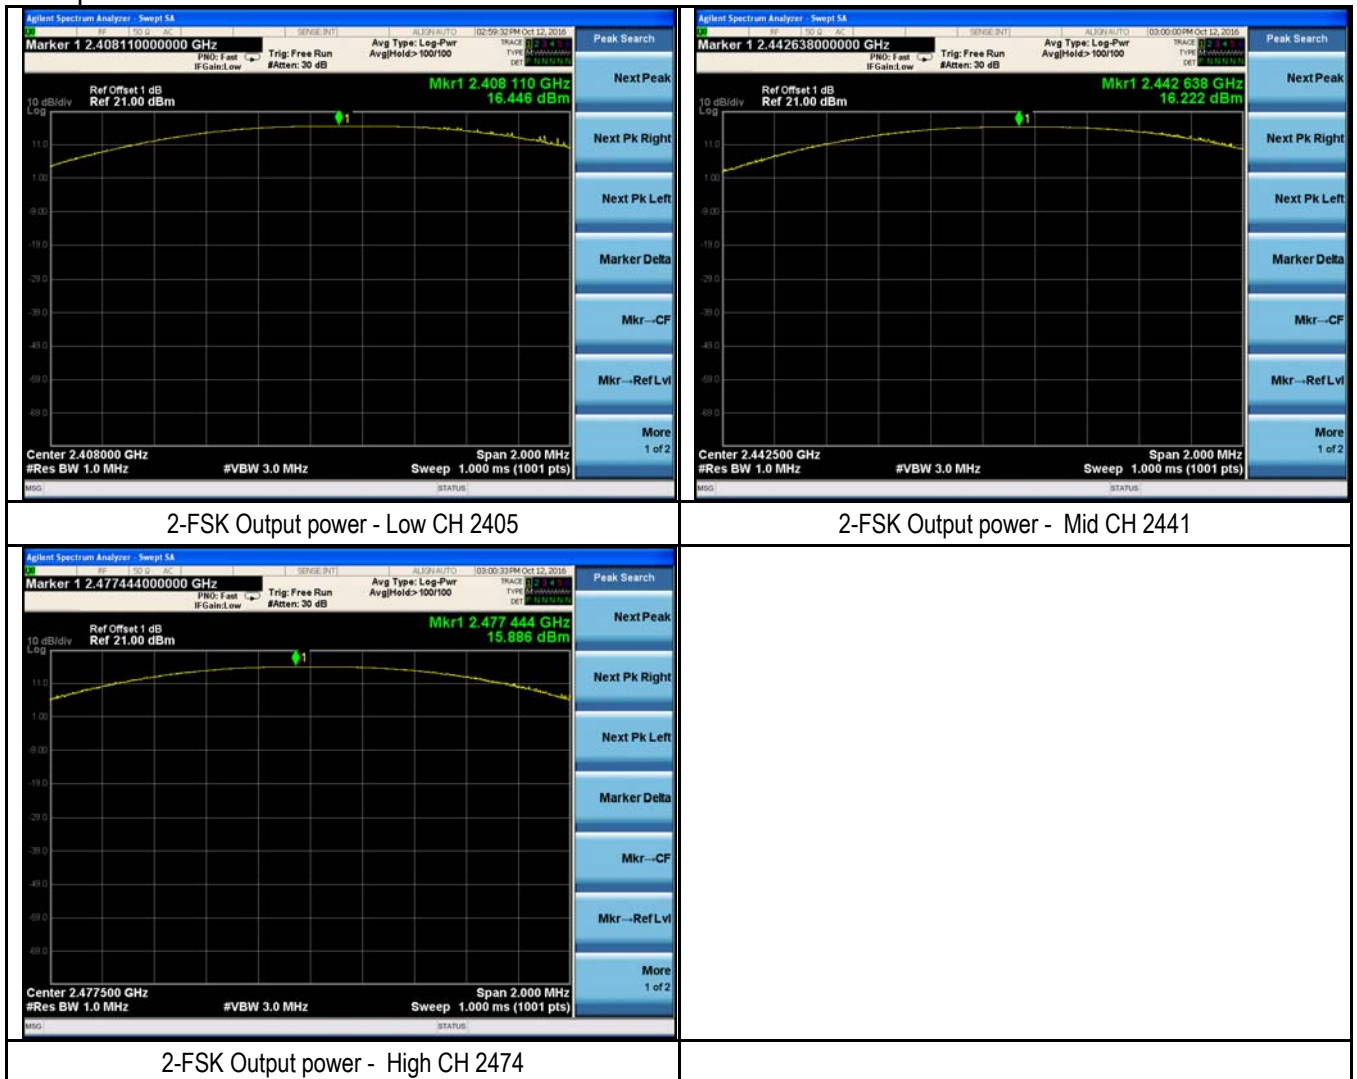

6.6 Number of Hopping Channel

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	October12, 2016
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled. - Span = the frequency band of operation - RBW $\geq$ 1% of the span - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Test Report No.	16021314-FCC-R1
Page	17 of 43

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	2-FSK	2408-2477.5	47	15

Test Plots

Number of Hopping Channels measurement result




Test Report No.	16021314-FCC-R1
Page	18 of 43

6.7 Time of Occupancy (Dwell Time)

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	December 07, 2016
Tested By :	Deon Dai

Requirement(s):

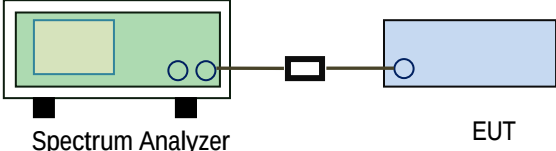Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	2-FSK	Low	4.89	215.16	400	Pass
		Mid	4.89	215.16	400	Pass
		High	4.89	215.16	400	Pass

Note: Dwell time= time slot length *(number of hops on spectrum analyzer)/analyzer sweep time/47*(47*0.4)= 4.89*(11)/0.1/47*(47*0.4)


Test Plots

Dwell Time measurement result

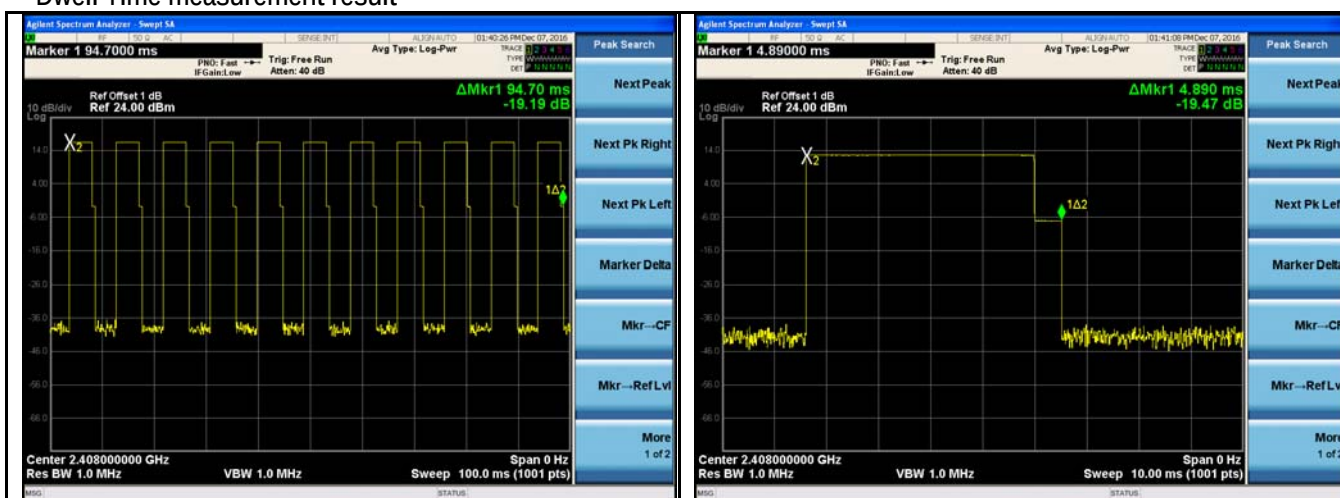


2-FSK - Low CH 2408-1

2-FSK - Low CH 2408-2

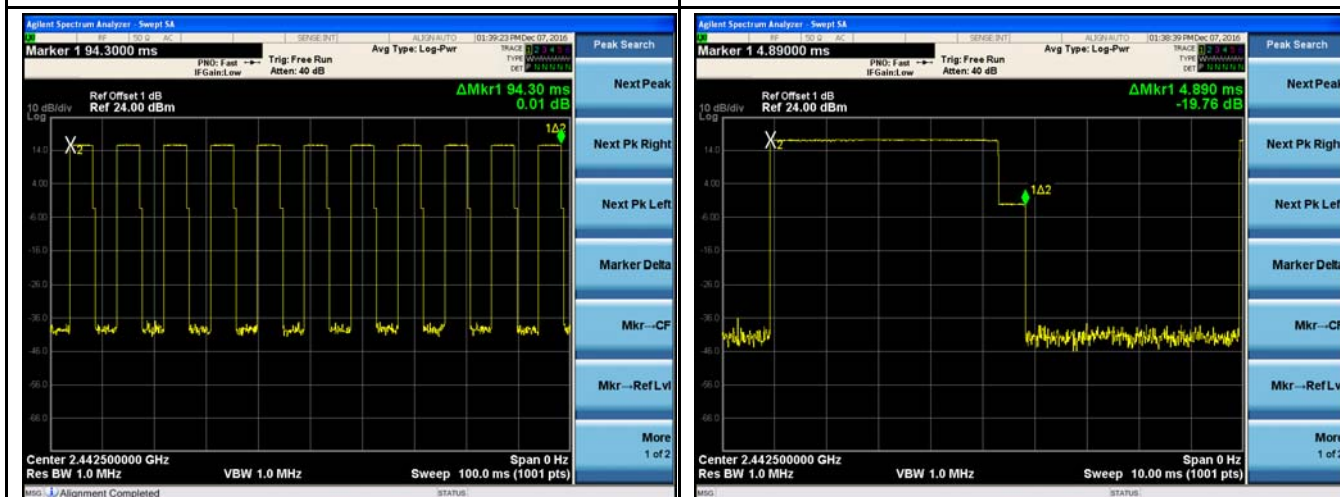

2-FSK - Mid CH 2442.5-1

2-FSK - Mid CH 2442.5-2

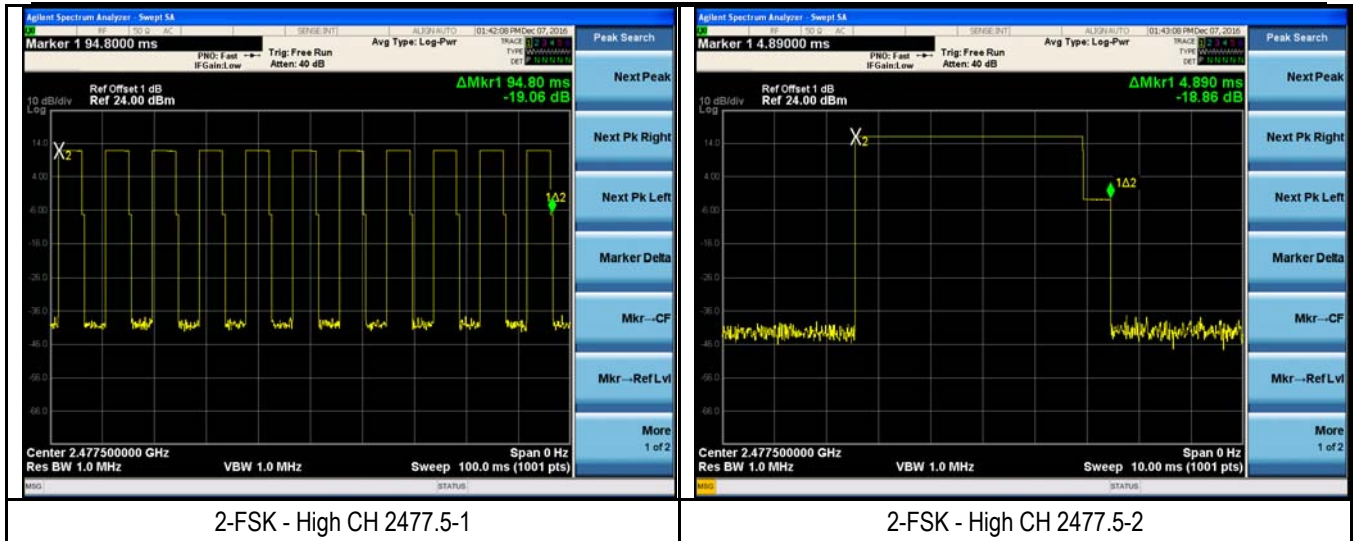


6.8 Band Edge

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	October 13, 2016
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒

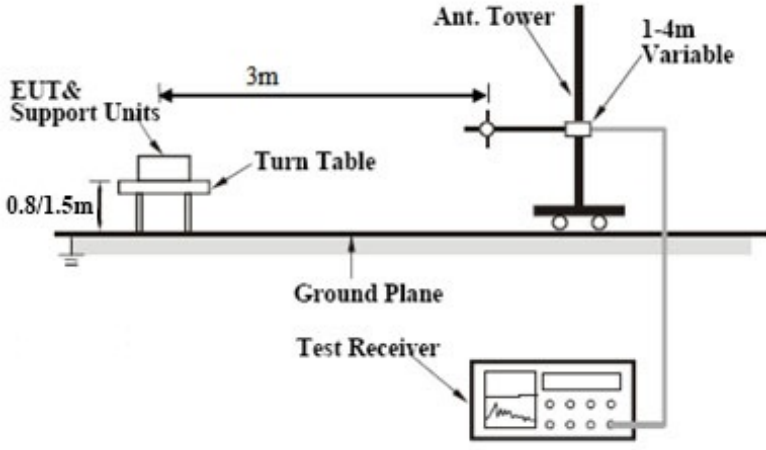
Test Setup	
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☐ Yes ☒ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

2-FSK Mode:

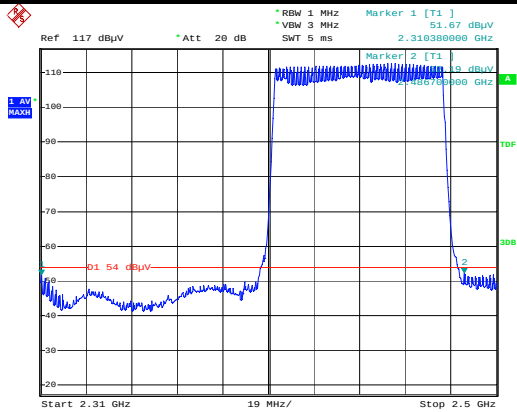


Date: 13.OCT.2016 18:55:59

2-FSK -Hopping-Ave-V

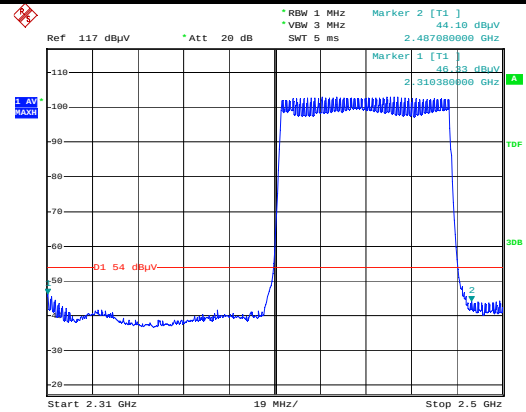


Date: 13.OCT.2016 19:09:30

2-FSK -Hopping-Ave-H

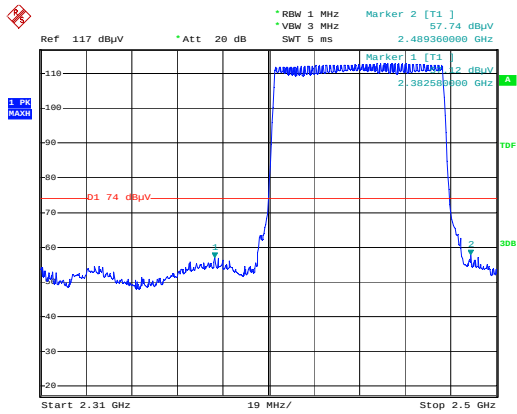


Date: 13.OCT.2016 18:42:45

2-FSK -Hopping-PK-V

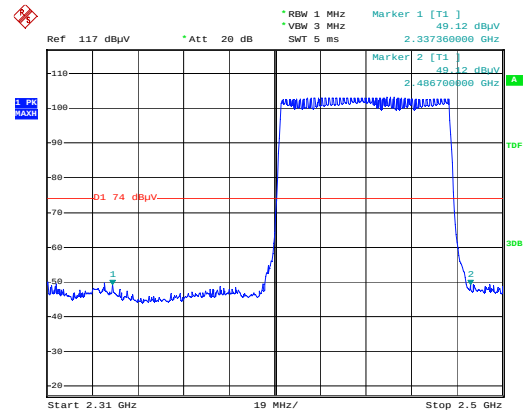


Date: 13.OCT.2016 19:15:27

2-FSK -Hopping-PK-H

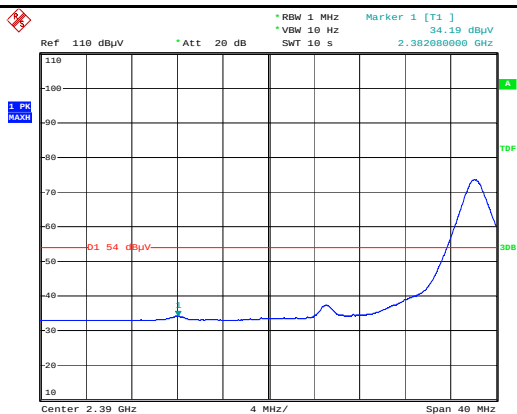


Date: 13.OCT.2016 18:07:39

2-FSK -Left Side-Ave-V

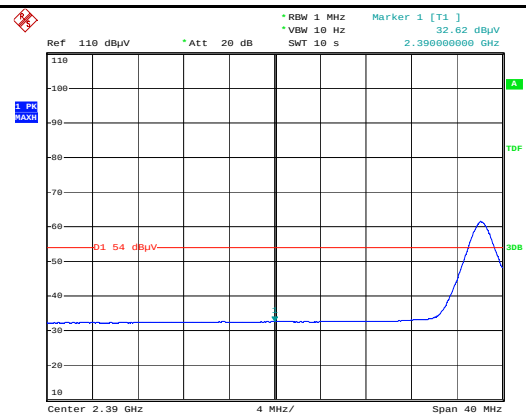


Date: 13.OCT.2016 18:11:50

2-FSK -Left Side-Ave-H

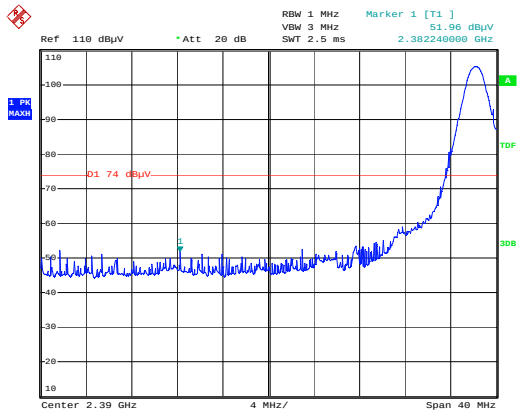


Date: 13.OCT.2016 18:06:41

2-FSK -Left Side-PK-V

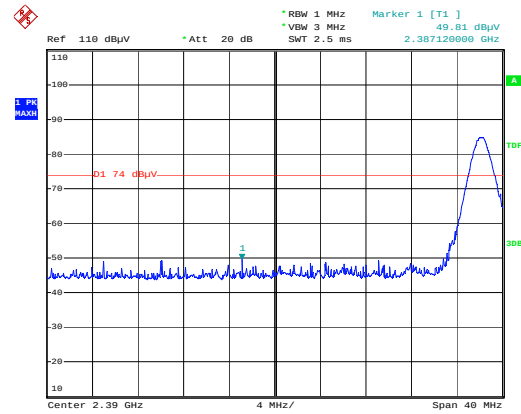


Date: 13.OCT.2016 18:16:28

2-FSK -Left Side-PK-H

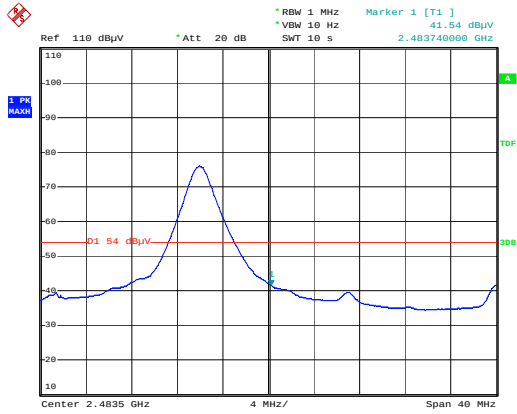


Date: 13.OCT.2016 18:37:02

2-FSK -Right Side-Ave-V

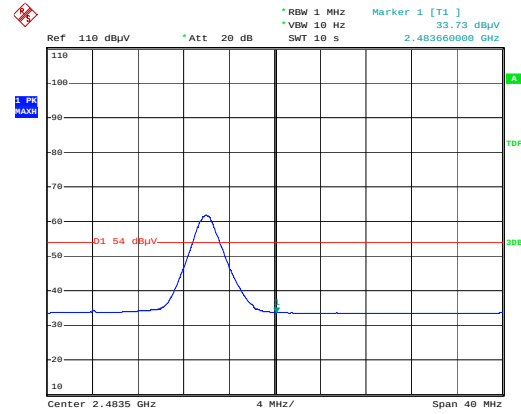


Date: 13.OCT.2016 18:33:35

2-FSK -Right Side-Ave-H

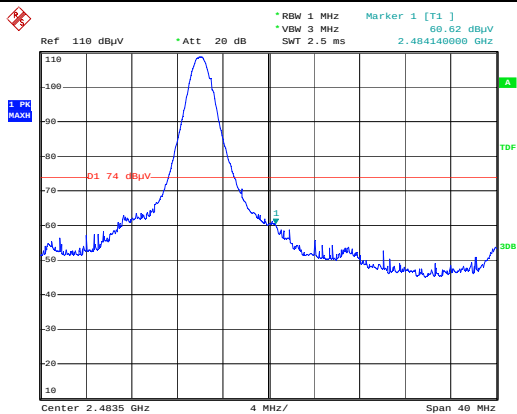

Date: 13.OCT.2016 18:38:41

2-FSK -Right Side-PK-V

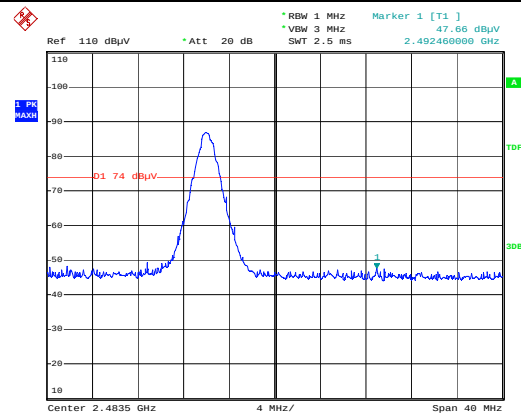


Date: 13.OCT.2016 18:26:24

2-FSK -Right Side-PK-H

6.9 AC Power Line Conducted Emissions

Temperature	---
Relative Humidity	---
Atmospheric Pressure	---
Test date :	---
Tested By :	---

Requirement(s):

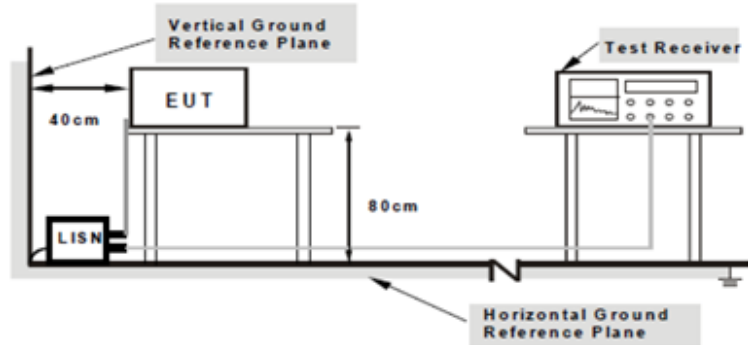Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☐														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.																
		Procedure	1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.														
			2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.														
Remark	Power Supply By Battery																
		Result															
	☒ N/A ☐ Fail																


Test Data ☐ Yes ☒ N/A

Test Plot ☐ Yes (See below) ☒ N/A

6.10 Radiated Spurious Emissions

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	November 28, 2016
Tested By :	Deon Dai

Requirement(s):

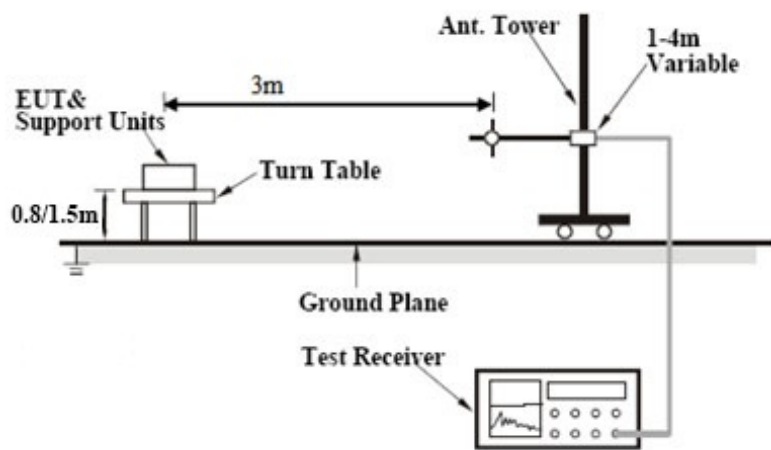Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	☒										
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 – 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500
		Frequency range (MHz)		Field Strength (µV/m)									
		30 – 88		100									
		88 – 216		150									
		216 – 960		200									
Above 960	500												
Test Setup													
Procedure		1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.											
Remark													


Result	☒ Pass ☐ Fail
--------	--

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode:	Transmitting Mode
------------	-------------------

(Below 1GHz)

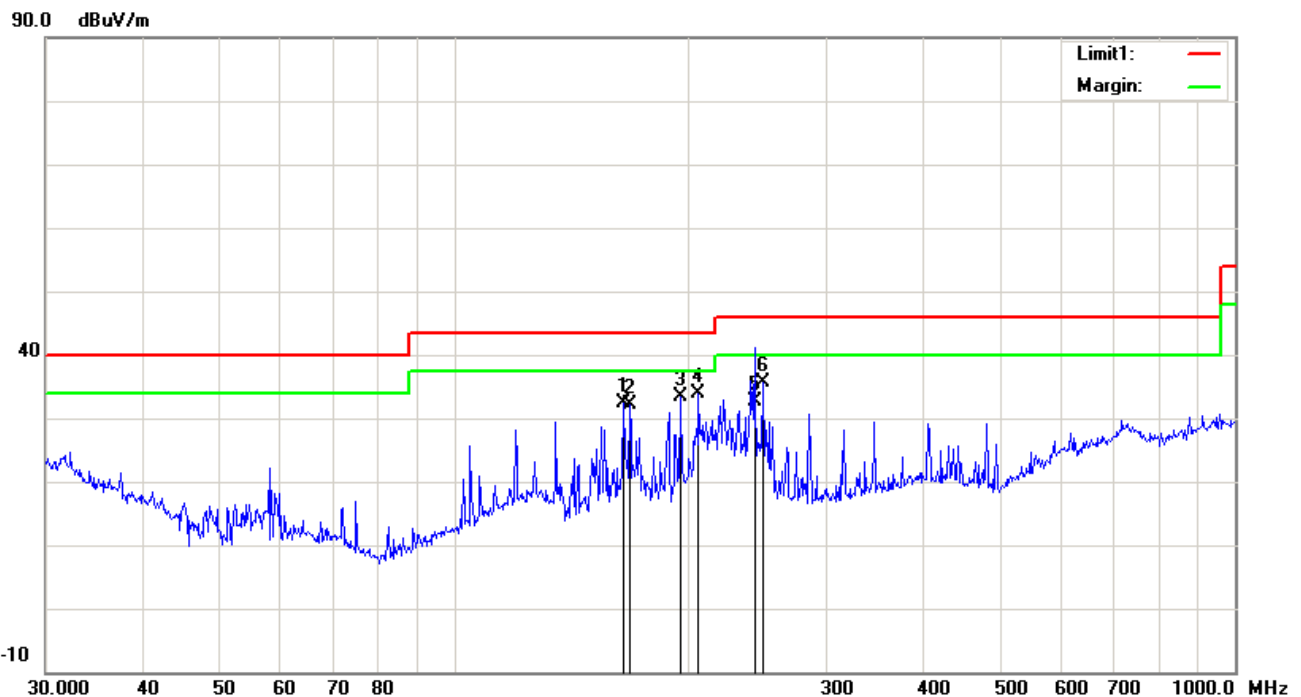

Test Data


Vertical Polarity Plot @3m

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
1	164.9075	63.35	peak	13.86	46.89	2.08	32.40	43.50	-11.10	100	2
2	167.8243	62.62	peak	14.17	46.66	2.09	32.22	43.50	-11.28	100	49
3	195.1365	64.59	peak	13.69	47.03	2.24	33.49	43.50	-10.01	200	92
4	205.6751	64.14	peak	14.86	47.48	2.28	33.80	43.50	-9.70	200	238
5	242.5253	62.60	QP	14.89	47.43	2.48	32.54	46.00	-13.46	100	219
6	248.5519	66.00	peak	14.90	47.67	2.50	35.73	46.00	-10.27	200	238

Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not recorded.

Test Mode: Transmitting Mode

(Below 1GHz)

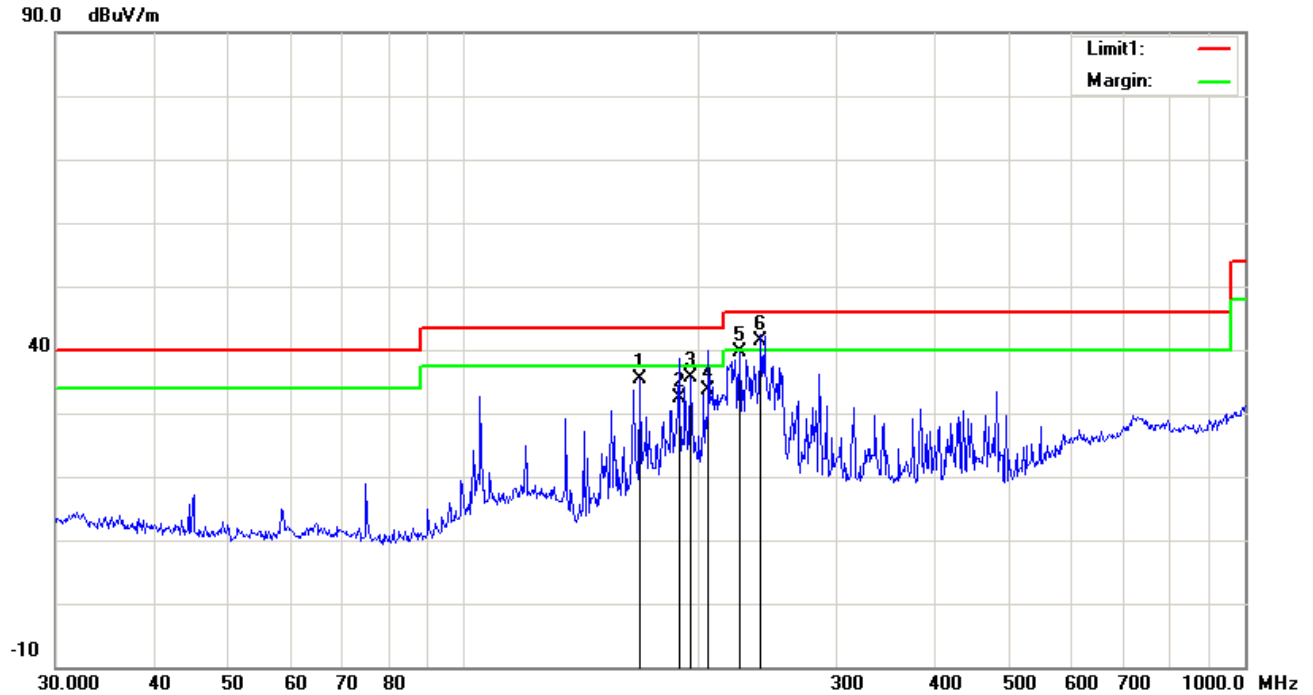


Test Data

Horizontal Polarity Plot @3m

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant F (dB/m)	PA G (dB)	Cab L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
1	167.8243	67.76	peak	12.27	46.66	2.09	35.46	43.50	-8.04	300	59
2	188.4125	64.00	QP	12.74	46.64	2.21	32.31	43.50	-11.19	199	275
3	195.1365	67.42	peak	13.10	47.03	2.24	35.73	43.50	-7.77	200	299
4	205.6751	65.25	QP	13.59	47.48	2.28	33.64	43.50	-9.86	200	304
5	225.3080	70.54	peak	14.28	47.69	2.39	39.52	46.00	-6.48	200	226
6	239.9873	71.55	QP	14.79	47.33	2.46	41.47	46.00	-4.53	200	323


Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not recorded.

Test Mode: Transmitting Mode Above 1GHz

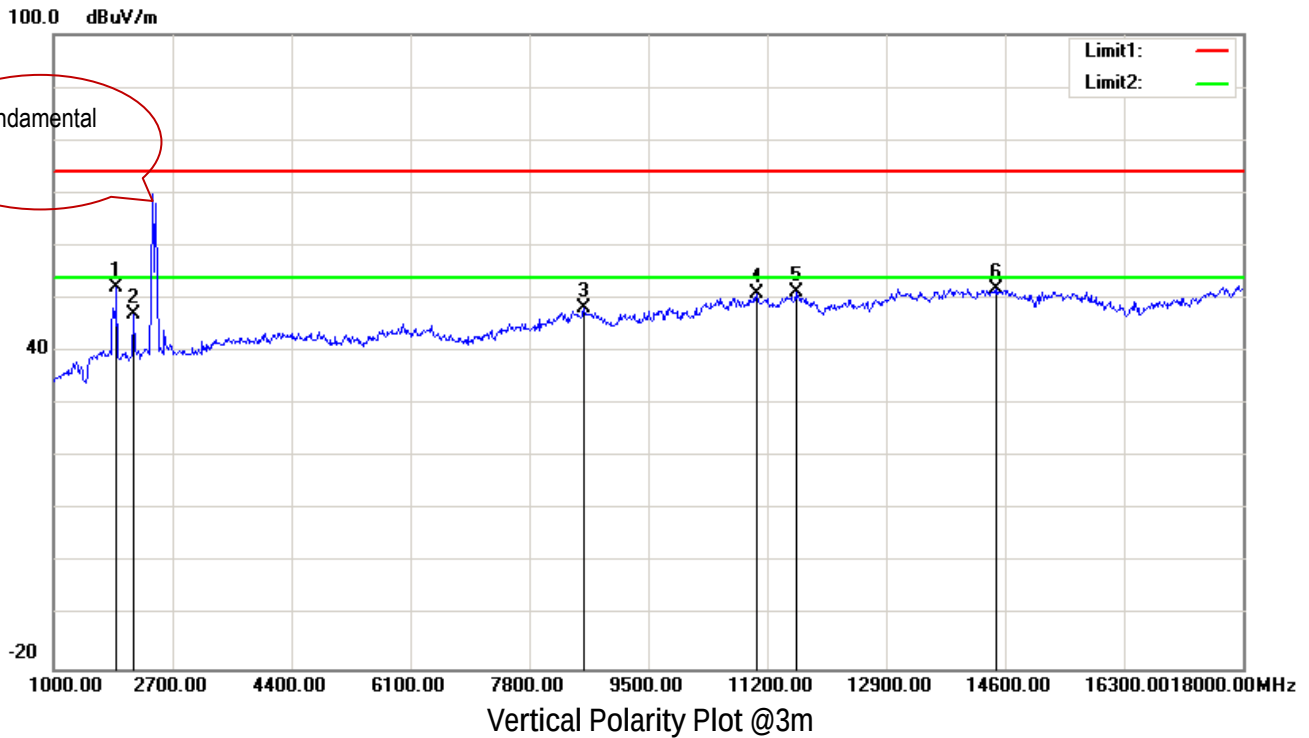

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant F (dB/m)	PA G (dB)	Cab L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1901.000	73.22	peak	26.68	51.77	3.98	52.11	74.00	-21.89	200	259
2	2139.000	67.45	peak	27.71	52.35	4.13	46.94	74.00	-27.06	200	223
3	8582.000	56.50	peak	37.37	53.91	8.33	48.29	74.00	-25.71	200	299
4	11047.000	56.58	peak	38.13	53.22	9.56	51.05	74.00	-22.95	100	179
5	11608.000	56.06	peak	38.40	53.33	10.06	51.19	74.00	-22.81	100	58
6	14481.000	54.02	peak	40.97	52.58	9.38	51.79	74.00	-22.21	100	75

Note: The data above 18 GHz which below 20 dB to the limit was not recorded.

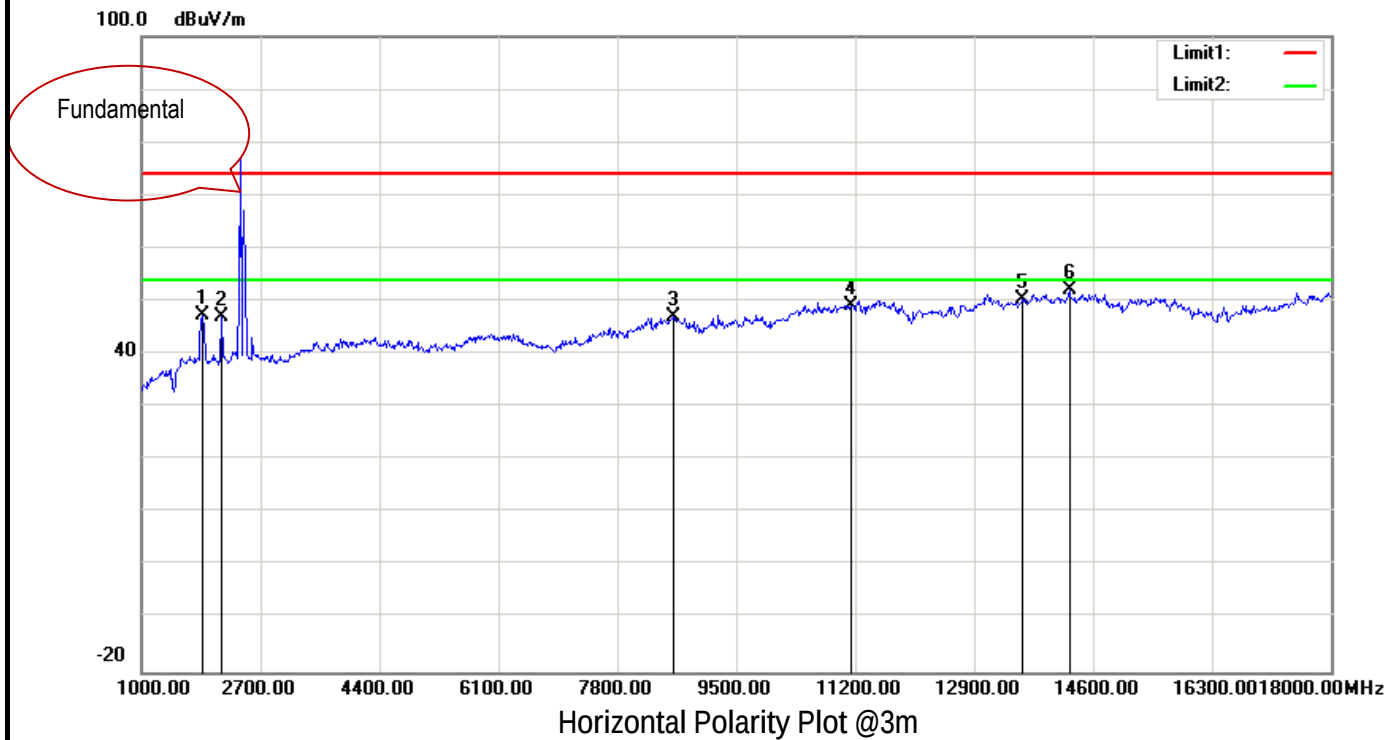

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1867.000	68.46	peak	26.54	51.61	3.99	47.38	74.00	-26.62	200	208
2	2139.000	67.44	peak	27.71	52.35	4.13	46.93	74.00	-27.07	100	0
3	8599.000	55.25	peak	37.36	53.95	8.32	46.98	74.00	-27.02	100	92
4	11149.000	54.57	peak	38.19	53.20	9.68	49.24	74.00	-24.76	100	243
5	13597.000	53.38	peak	39.62	52.03	9.33	50.30	74.00	-23.70	200	102
6	14260.000	54.65	peak	40.57	52.38	9.22	52.06	74.00	-21.94	100	260

Note: The data above 18 GHz which below 20 dB to the limit was not recorded.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions Emission					
R&S EMI Test Receiver	ESPI3	101216	03/31/2016	03/31/2017	☐
V-LISN	ESH3-Z5	838979/005	03/31/2016	03/31/2017	☐
SIEMIC EZ_EMC Conducted Emissions software	Ver.ICP-03A1	N/A	N/A	N/A	☐
RF conducted test					
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	☒
Radiated Emissions					
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/11/2016	03/10/2017	☒
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	☒
Antenna (30MHz~6GHz)	JB6	A121411	10/20/2016	10/20/2017	☒
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	10/09/2016	10/08/2017	☒
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/20/2016	10/20/2017	☒
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/20/2016	10/20/2017	☒
SIEMIC EZ_EMC Radiated Emissions software	Ver.ICP-03A1	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph EUT Internal Photo



Front View of EUT



Rear View of EUT

Test Report No.	16021314-FCC-R1
Page	32 of 43



Top View of EUT



Bottom View of EUT

Test Report No.	16021314-FCC-R1
Page	33 of 43



Left View of EUT




Right View of EUT

Annex B.ii. Photograph EUT Internal Photo



Uncover- Front View 1

Antenna

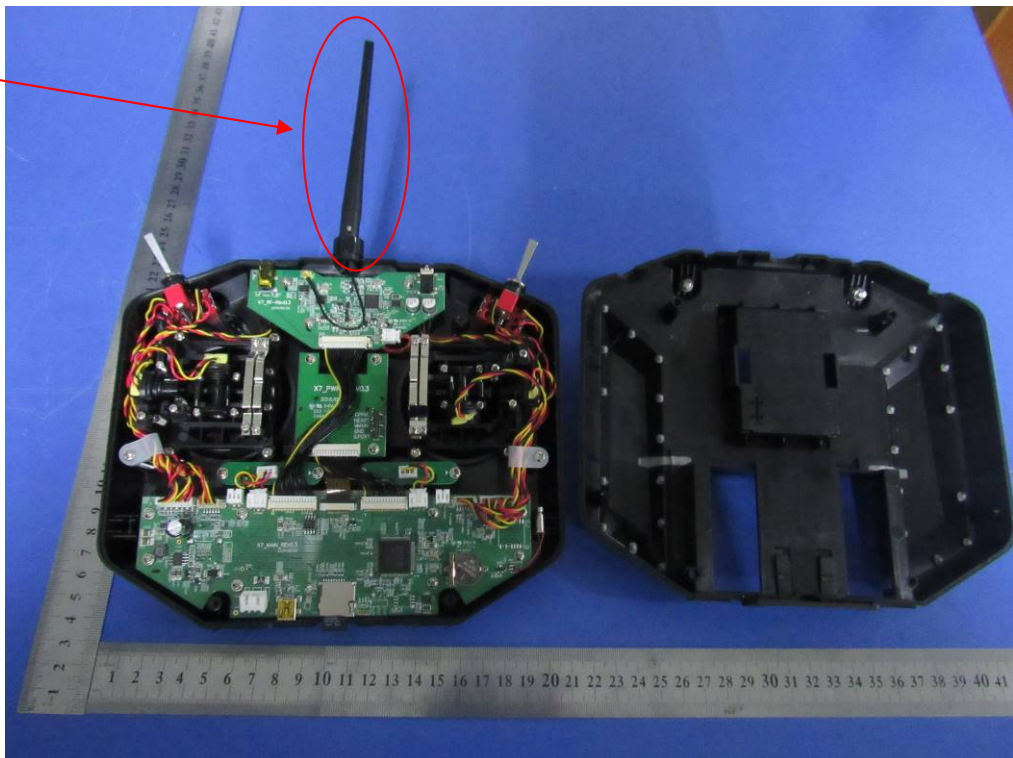


Uncover- Front View 2

Test Report No.	16021314-FCC-R1
Page	35 of 43




EUT PCB 1 – Front View

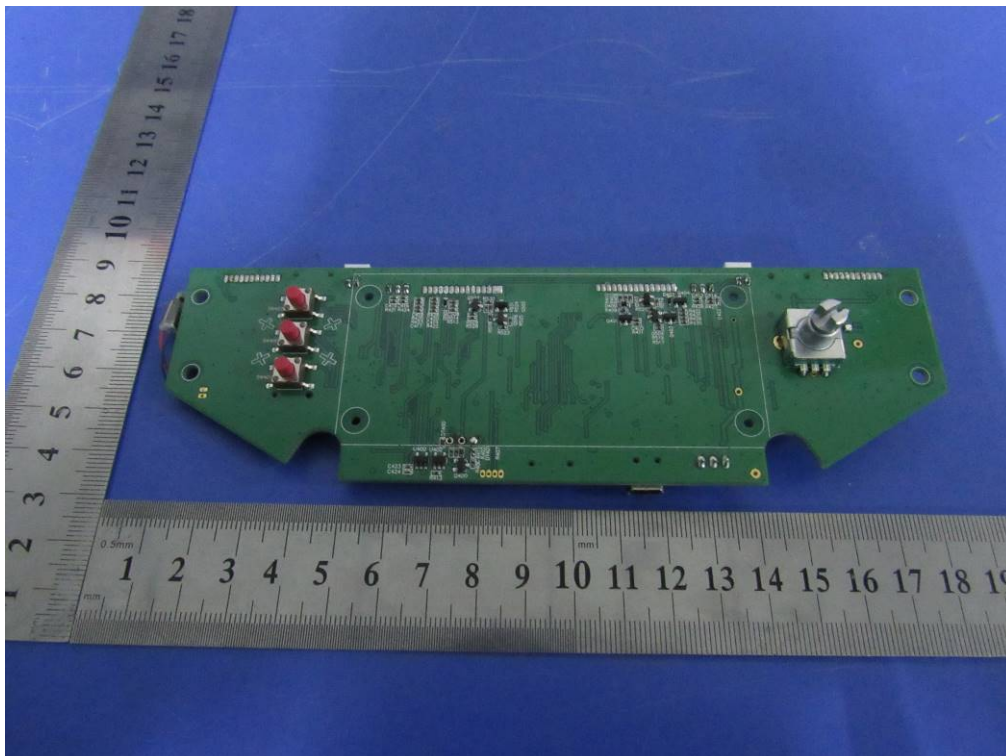


EUT PCB 1 – Rear View

Test Report No.	16021314-FCC-R1
Page	36 of 43

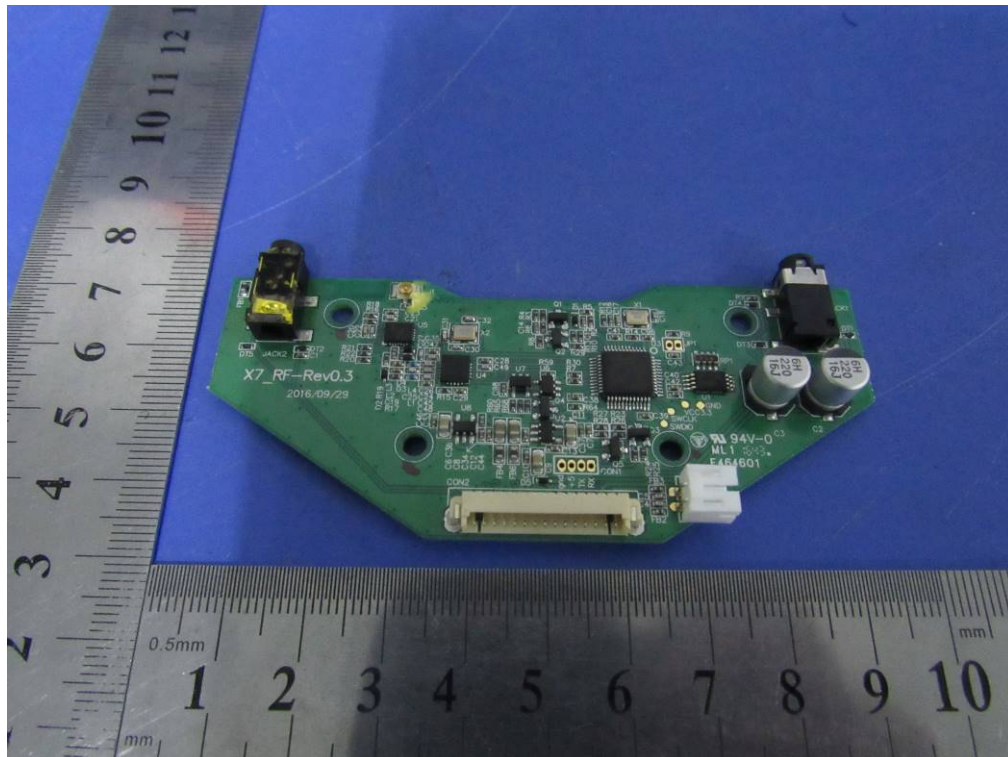


EUT PCB 2 – Front View

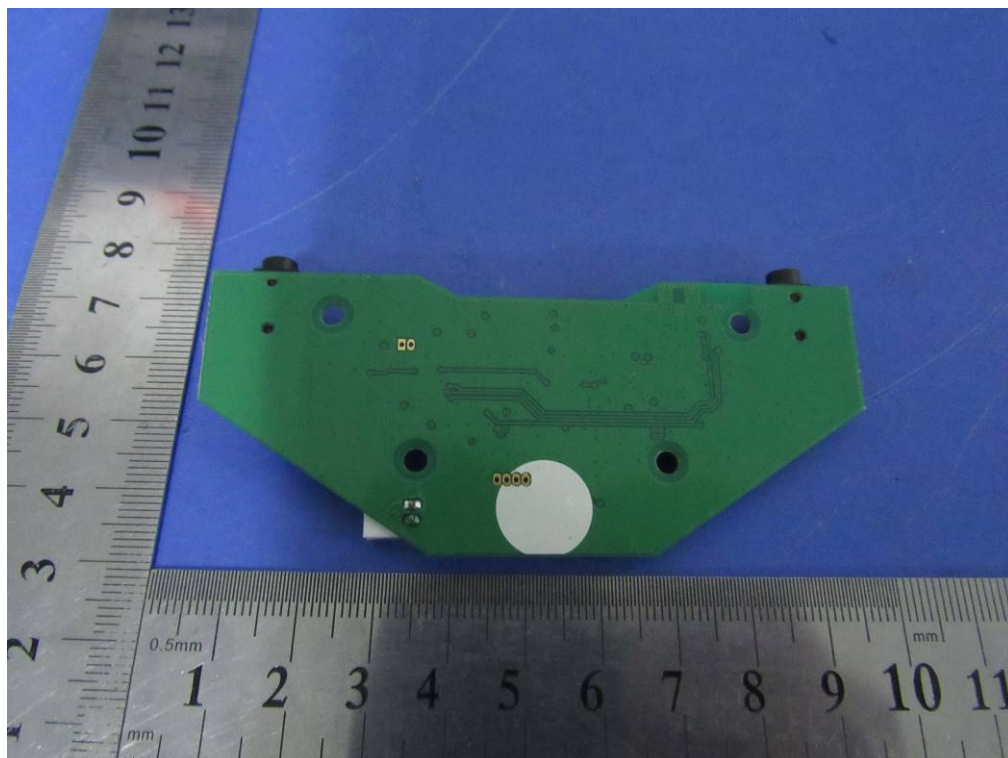


EUT PCB 2 – Rear View

Test Report No.	16021314-FCC-R1
Page	37 of 43

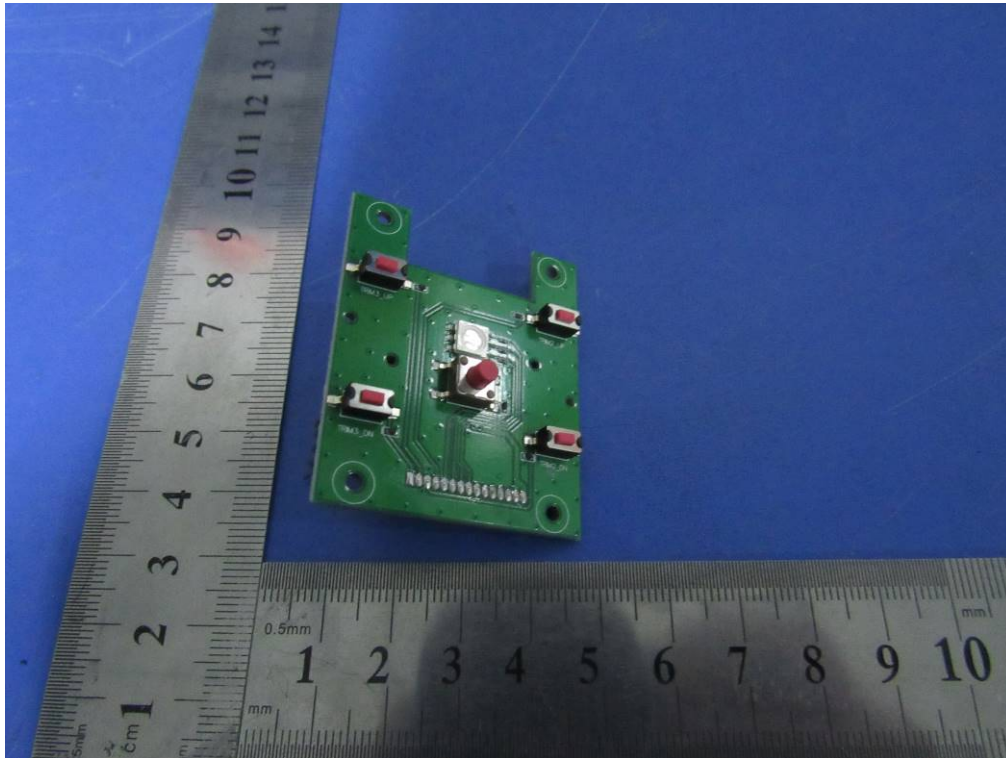


EUT PCB 3 – Front View

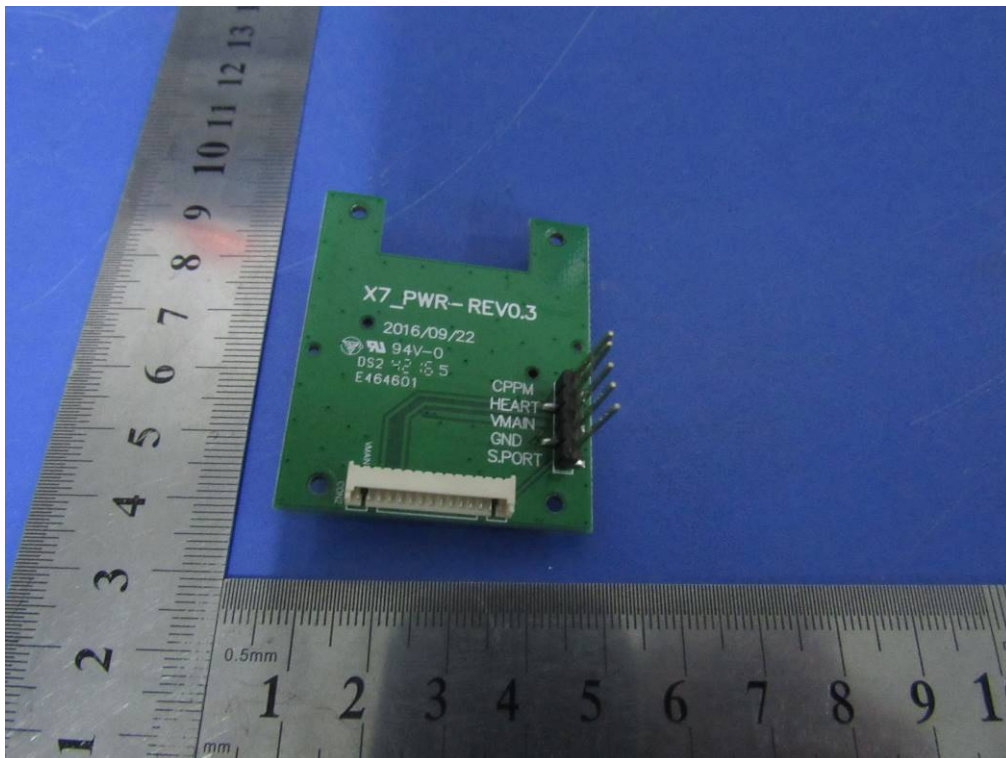


EUT PCB 3 – Rear View

Test Report No.	16021314-FCC-R1
Page	38 of 43

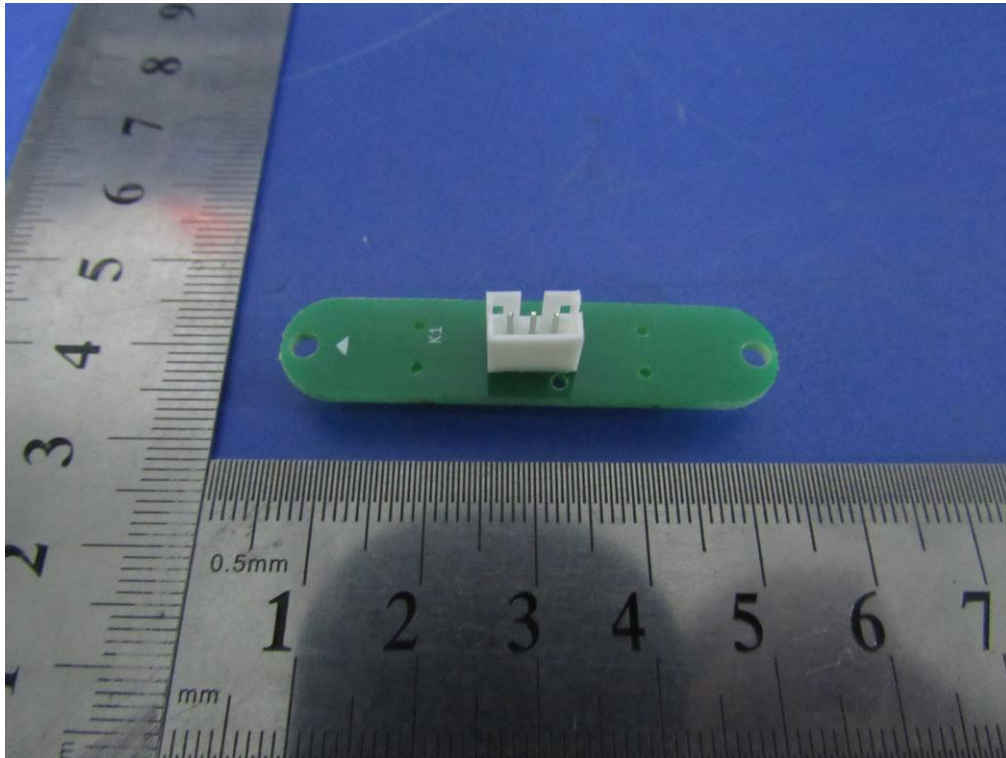


EUT PCB 4 – Front View

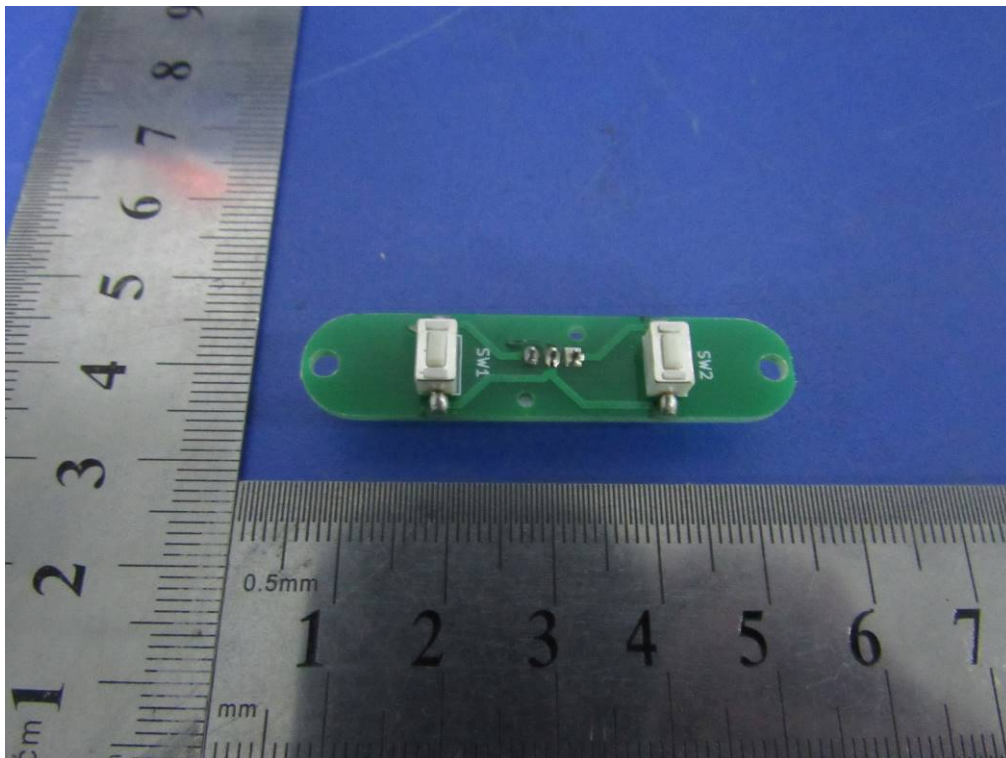


EUT PCB 4 – Rear View

Annex B.iii. Photograph: Test Setup Photo

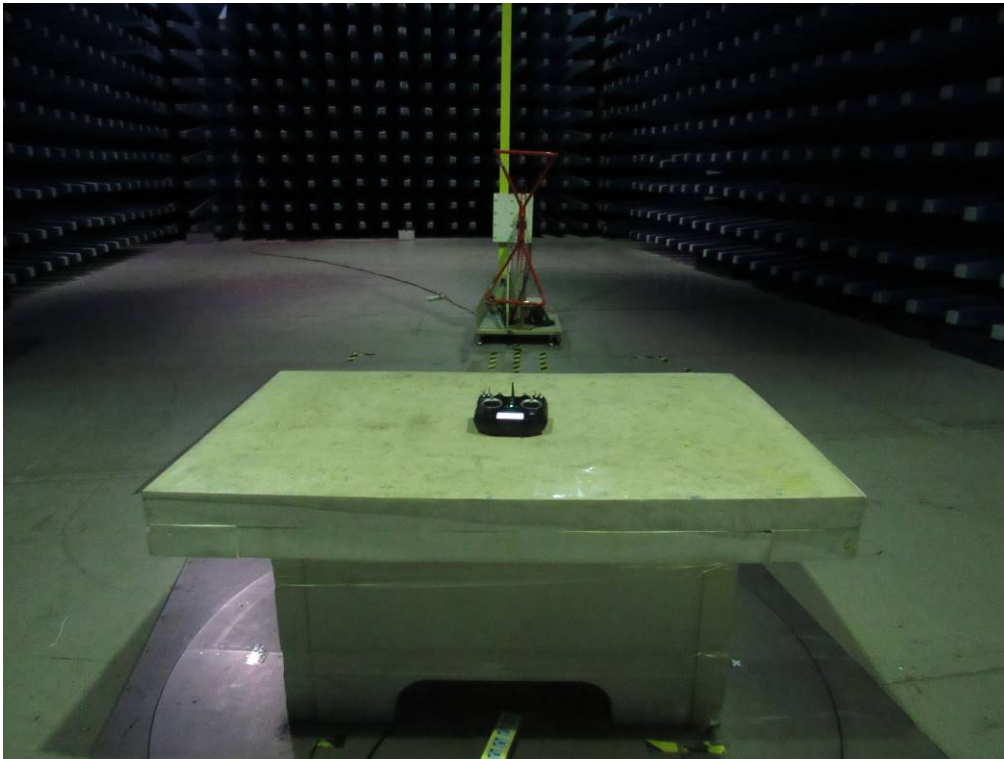

Radiated Spurious Emissions Test Setup Below 1GHz

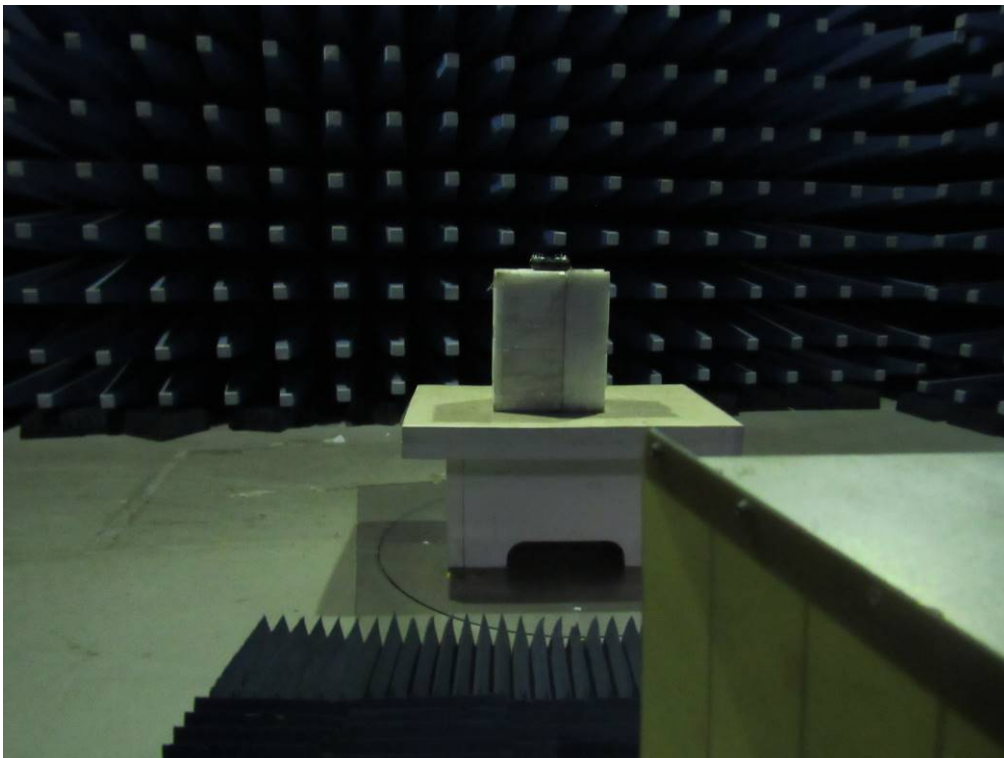


Radiated Spurious Emissions Test Setup Above 1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.i. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

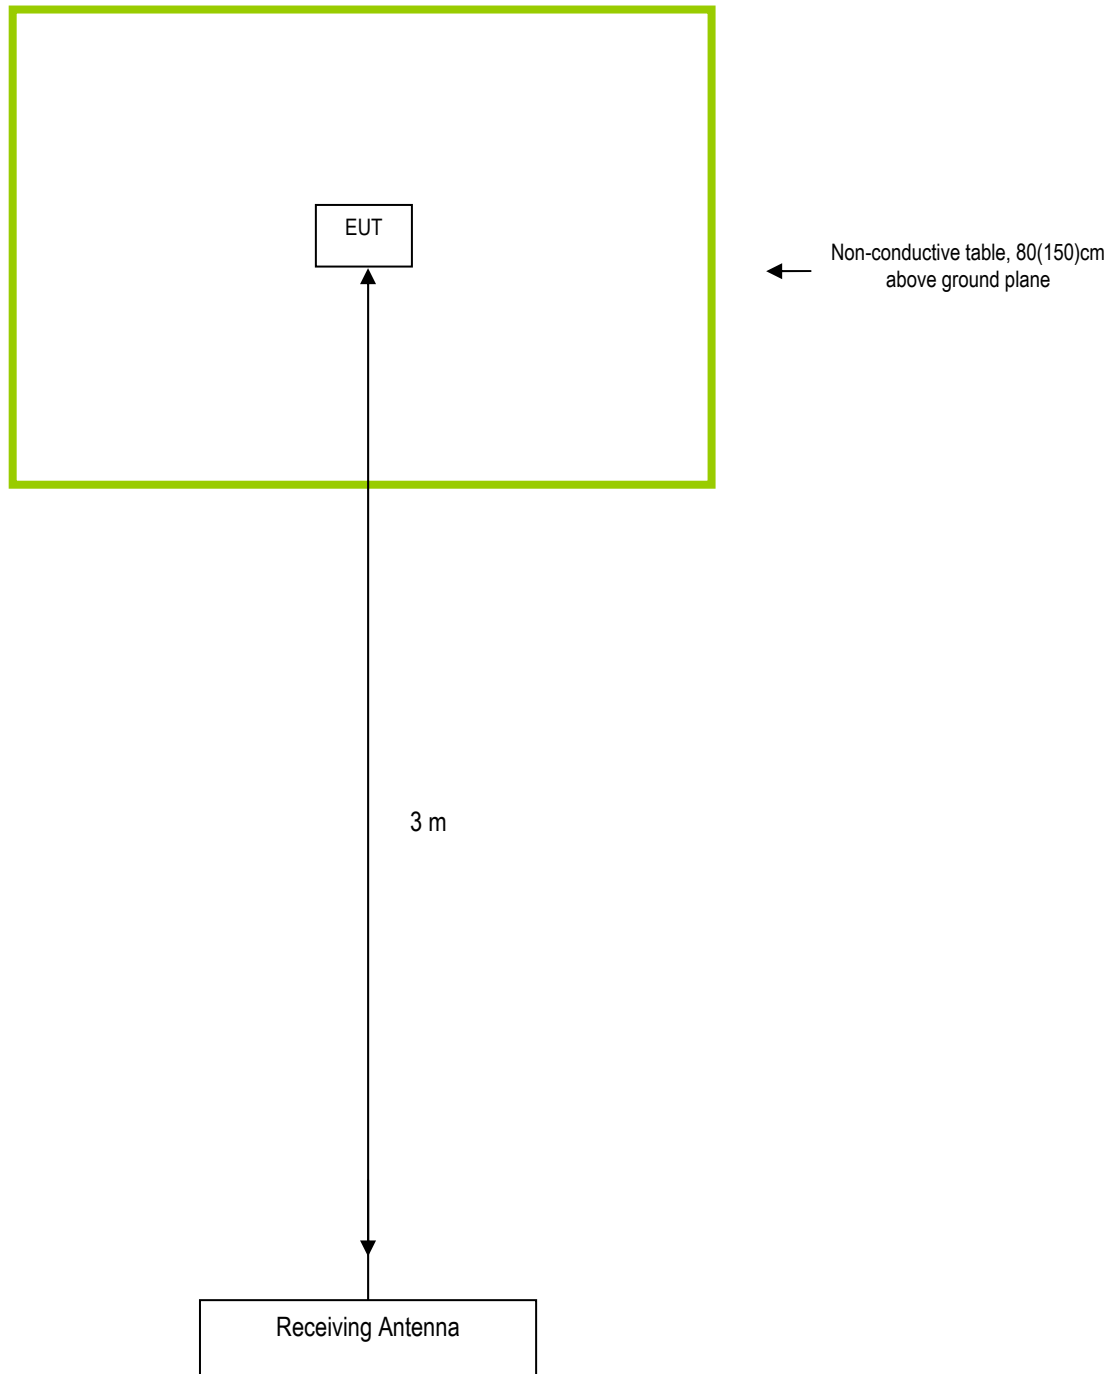

Test Report No.	16021314-FCC-R1
Page	41 of 43

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report No.	16021314-FCC-R1
Page	42 of 43

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	16021314-FCC-R1
Page	43 of 43

Annex E. DECLARATION OF SIMILARITY

FrSky Electronic Co., Ltd

To: SIEMIC INC.

Declaration letter

Dear Sir,

For our business issue and marketing requirement, we would like to list different models numbers on the CE/FCC certificates and reports, as following:

FCC ID: XYFX7QDS

Model No.: Taranis Q X7

The difference between Taranis Q X7D , Taranis Q X7S
are as follows:

The Serial Model Name Taranis Q X7D Taranis Q X7S. Different model name only, like all the other.

Thank you!

Signature:

Printed name/title:

Address: F-4, Building C, Zhongxiu Technology Park, No.3 Yuanxi Road, Wuxi,
214125, Jiangsu, China