



RF - TEST REPORT

- FCC Part 15.247, RSS-247 -

Type / Model Name : 2830-015 – Model: 817A

Product Description : BLE5.0 remote control

Applicant : ruwido austria gmbh

Address : Koestendorfer Strasse 8

5202 NEUMARKT, AUSTRIA

Manufacturer : ruwido austria gmbh

Address : Koestendorfer Strasse 8

5202 NEUMARKT, AUSTRIA

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : **80197012-00 Rev_4**

05. May 2025

Date of issue



FCC ID: XYN817A

IC ID: 8748A-817A

Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>3</u>
<u>2</u>	<u>EQUIPMENT UNDER TEST</u>	<u>4</u>
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	General remarks	4
2.4	Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.5	Equipment type	4
2.6	Short description of the equipment under test (EUT)	4
2.7	Variants of the EUT	4
2.8	Operation frequency and channel plan	5
2.9	Transmit operating modes	5
2.10	Antenna	5
2.11	Power supply system utilised	5
2.12	Peripheral devices and interface cables	5
2.13	Determination of worst-case conditions for final measurement	6
<u>3</u>	<u>TEST RESULT SUMMARY</u>	<u>7</u>
3.1	Revision history of test report	7
3.2	Final assessment	7
<u>4</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Conformity Decision Rule	9
4.5	Measurement protocol for FCC and ISSED	9
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	EBW and OBW	12
5.2	Maximum peak output power	19
5.3	Power spectral density	24
5.4	Spurious emissions radiated	28
5.5	Antenna application	43
<u>6</u>	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	<u>44</u>

ATTACHMENT A as separate supplement

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A

IC ID: 8748A-817A

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (March 2025)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (March 2025)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204 modifications	External radio frequency power amplifiers and antenna
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz
ANSI C63.10: 2013	Testing Unlicensed Wireless Devices
KDB 558074 D01 v05r02	Guidance for compliance measurements on DTS; FHSS and hybrid system devices operating under Section 15.247 of the FCC rules, April 2, 2019.

ISED Canada Rules and Regulations

RSS-Gen, Issue 5 + Amendment 1 + 2	General Requirements for Compliance of Radio Apparatus
RSS-247, Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.10: 2013	Testing Unlicensed Wireless Devices

FCC ID: XYN817A

IC ID: 8748A-817A

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

2.3 General remarks

2.4 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.5 Equipment type

BLE device

2.6 Short description of the equipment under test (EUT)

The EUT is a Bluetooth Low Energy wireless remote control. A single PCB antenna is used within the system. The EUT has only one integrated antenna, no temporary connector and no external antenna can be connected.

Number of tested samples:	1x radiated sample	1x conducted sample
Serial number:	169069	prototype
Firmware version:	0.0.228	0.0.228

2.7 Variants of the EUT

There are no variants.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A

IC ID: 8748A-817A

2.8 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel plan:

Channel	Frequency	Channel	Frequency
37	2402	18	2442
0	2404	19	2444
1	2406	20	2446
2	2408	21	2448
3	2410	22	2450
4	2412	23	2452
5	2414	24	2454
6	2416	25	2456
7	2418	26	2458
8	2420	27	2460
9	2422	28	2462
10	2424	29	2464
38	2426	30	2466
11	2428	31	2468
12	2430	32	2470
13	2432	33	2472
14	2434	34	2474
15	2436	35	2476
16	2438	36	2478
17	2440	39	2480

Note: the marked frequencies are determined for final testing.

2.9 Transmit operating modes

The EUT uses GFSK modulation and may provide following data rates:

- 1000 kbps
- 2000 kbps

(kbps = kilobits per second)

2.10 Antenna

The following antennas shall be used with the EUT:

The EUT has only an integrated PCB antenna with max. 0 dBi gain, no temporary connector and no external antenna to be connected.

2.11 Power supply system utilised

Power supply voltage, V_{nom} : 3 V_{DC} battery powered

2.12 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- _____ Model : _____
- _____ Model : _____

FCC ID: XYN817A**IC ID: 8748A-817A****2.13 Determination of worst-case conditions for final measurement**

Preliminary tests are performed in all three orthogonal axes of the EUT to locate at which position and at what setting of the EUT produce the maximum of the emissions. For the further measurement the EUT is set in Y position.

The tests are carried out in the following frequency band:

2400 MHz – 2483.5 MHz

For the final test the following channels and test modes are selected:

Wireless system	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
802.15.1	0 - 39	37, 18, 39	Pmax	DSSS	GFSK	1000 kbps
802.15.1	0 - 39	37, 18, 39	Pmax	DSSS	GFSK	2000 kbps

2.13.1 Test jig

No test jig is used.

2.13.2 Test software

The test software for the EUT provides power setting, the special test mode RX and the TX continuous mode, modulated.



FCC ID: XYN817A

IC ID: 8748A-817A

3 TEST RESULT SUMMARY

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS-Gen, 8.8	AC power line conducted emissions	Not applicable
15.247(a)(2)	RSS-247, 5.2(a)	-6 dB EBW	passed
15.247(b)(3)	RSS-247, 5.4(d)	Maximum peak output power	passed
15.247(d)	RSS-247, 5.5	Unwanted emission, radiated	passed
15.247(d)	RSS-Gen, 8.10	Emissions in restricted bands	passed
15.247(e)	RSS-247, 5.2(b)	Power Spectral Density	passed
15.35(c)	RSS-Gen, 6.10	Pulsed operation	passed
15.203	-	Antenna requirement	passed
-	RSS-Gen, 6.11	Transmitter frequency stability	passed
-	RSS-Gen, 6.7	99 % Bandwidth	passed

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80197012-00	0	22 March 2024	Initial test report
80197012-00	1	26 July 2024	EIRP Werte für RSS 247, Average Measurement added
80197012-00	2	26. November 2024	Antenna gain from Antenna information used
80197012-00	3	18. March 2025	Gain corrected
80197012-00	4	5. May 2025	Measurements of not used data rates taken out of testreport

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfils the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 08 February 2024

Testing concluded on : 27 February 2024

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Christopher Thaller
Radio Team



FCC ID: XYN817A

IC ID: 8748A-817A

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15 - 35 °C</u>
Humidity:	<u>30 - 60 %</u>
Atmospheric pressure:	<u>86 - 106 kPa</u>

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29 \text{ dB}$
20 dB Bandwidth	Center frequency of EUT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EUT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71 \text{ dB}$
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34 \text{ dB}$
Peak conducted output power	902 MHz to 928 MHz	95%	$\pm 0.35 \text{ dB}$
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15 \text{ dB}$

FCC ID: XYN817A

IC ID: 8748A-817A

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

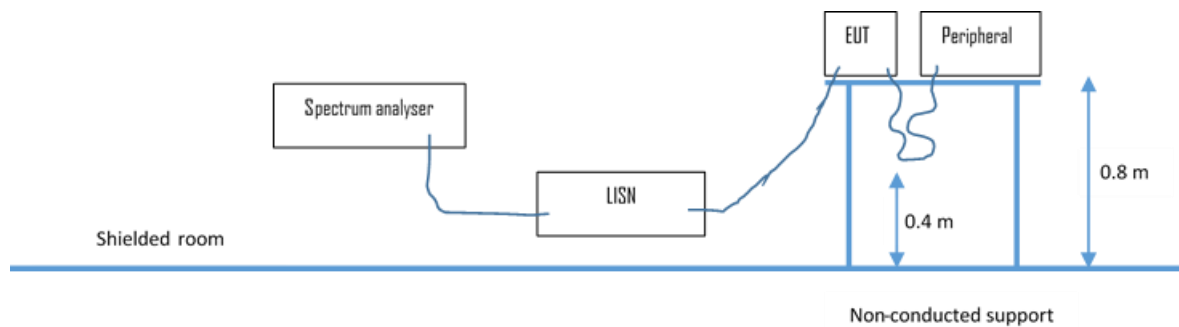

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.


FCC ID: XYN817A

IC ID: 8748A-817A

4.5.3.2 Radiated emission

4.5.3.2.1 OATS1 test site (9 kHz - 30 MHz):


Test setup according ANSI C63.10

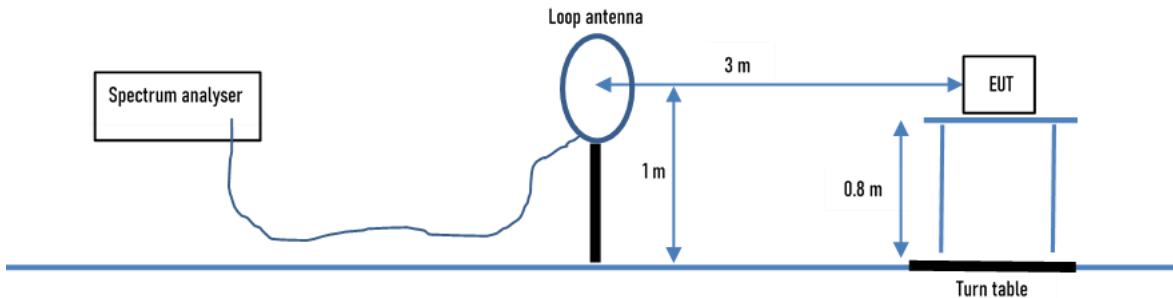

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):

Test setup according ANSI C63.10.

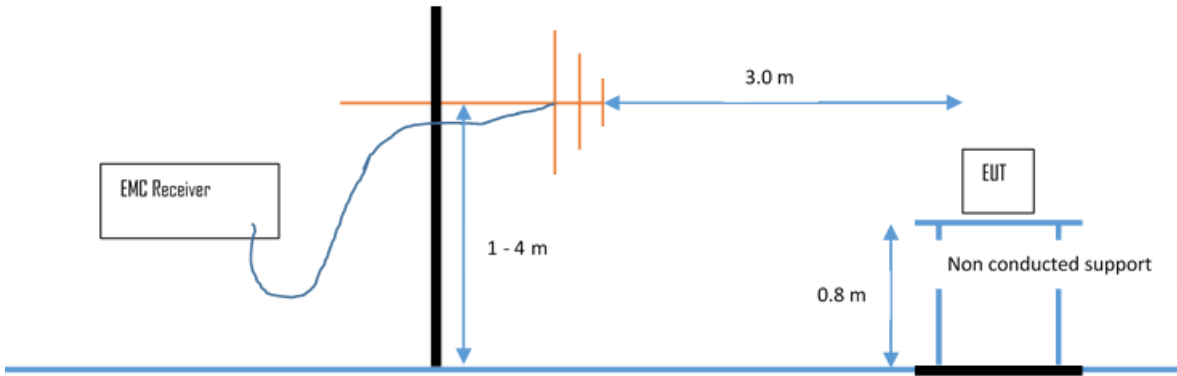

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dBµV/m is calculated by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:


Frequency (MHz)	Level (dBµV)	+	Factor (dB)	=	Level (dBµV/m)	-	Limit (dBµV/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

FCC ID: XYN817A


IC ID: 8748A-817A

4.5.3.2.3 Anechoic chamber 1 (1000 MHz – 18000 MHz)

Test setup according to ANSI C63.10.

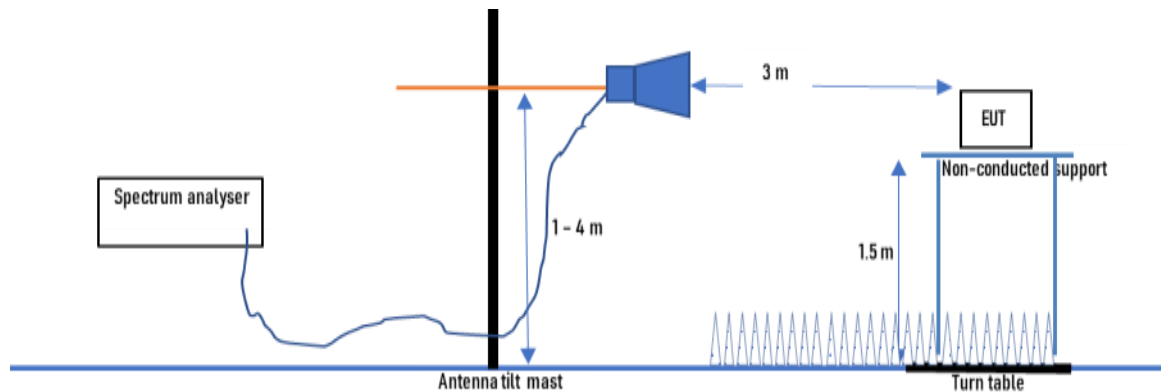

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the centre, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

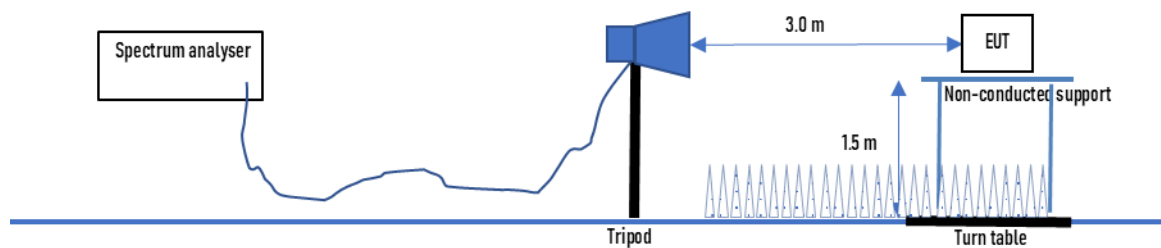4.5.3.2.4 Anechoic chamber 1 (18 GHz – 40 GHz)

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the centre, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit is adopted.

FCC ID: XYN817A

IC ID: 8748A-817A

5 TEST CONDITIONS AND RESULTS

5.1 EBW and OBW

For test instruments and accessories used see section 6 Part MB.

5.1.1 Description of the test location

Test location: Shielded Room S6

5.1.2 Photo documentation of the test set-up – see Attachment B

5.1.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.4 Description of Measurement

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

Spectrum analyser settings for EBW:

RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak

Spectrum analyser settings for OBW:

RBW: 1-5% OBW, VBW: 3 RBW, Detector: Max peak

FCC ID: XYN817A

IC ID: 8748A-817A

5.1.5 Test results**EBW 6dB**

1 Mbps:

Channel	Centre frequency (MHz)	6 dB bandwidth (kHz)	Minimum limit (MHz)
37	2402	698.49	0.5
18	2442	717.23	0.5
39	2480	720.13	0.5

2 Mbps:

Channel	Centre frequency (MHz)	6 dB bandwidth (kHz)	Minimum limit (MHz)
37	2402	1453.52	0.5
18	2442	1438.16	0.5
39	2480	1351.86	0.5

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A

IC ID: 8748A-817A

OBW99

1 Mbps:

Channel	Centre frequency (MHz)	99 % bandwidth (kHz)
37	2402	1085.39
18	2442	1105.56
39	2480	1105.44

2 Mbps:

Channel	Centre frequency (MHz)	99 % bandwidth (kHz)
37	2402	2119.74
18	2442	2112.99
39	2480	2062.43

The requirements are **FULFILLED**.

Remarks: For detailed test result please see the following test protocols


FCC ID: XYN817A

IC ID: 8748A-817A


5.1.6 Test protocols EBW

1 Mbps:

Channel 37 (2402 MHz)

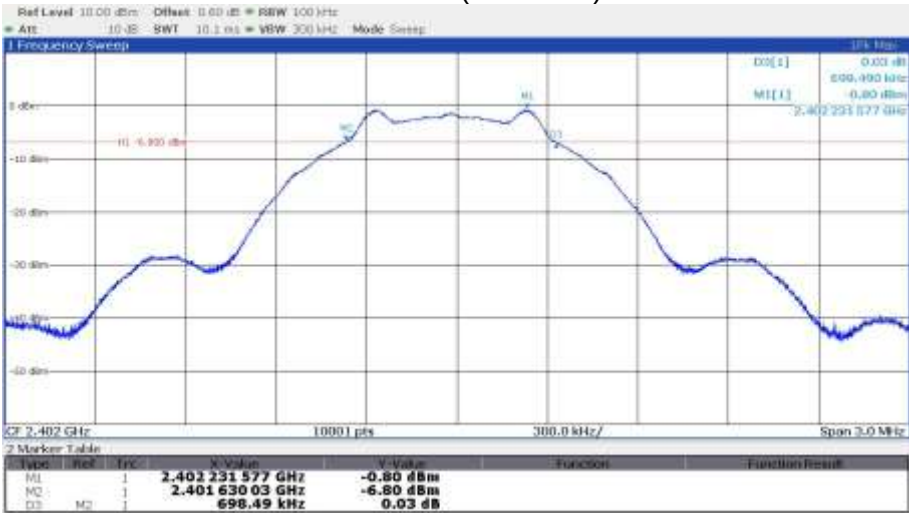

Channel 18 (2442 MHz)

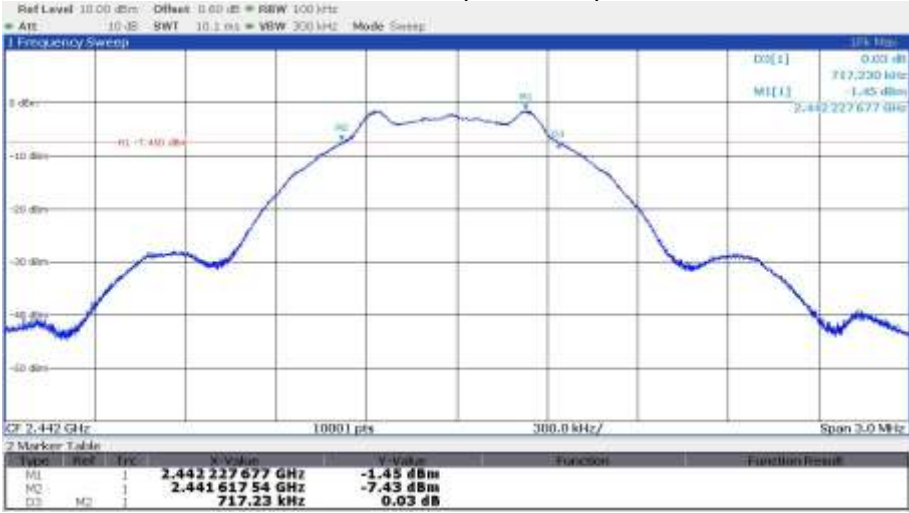

Channel 39 (2480 MHz)



FCC ID: XYN817A


IC ID: 8748A-817A

2 Mbps:


Channel 37 (2402 MHz)



Channel 18 (2442 MHz)

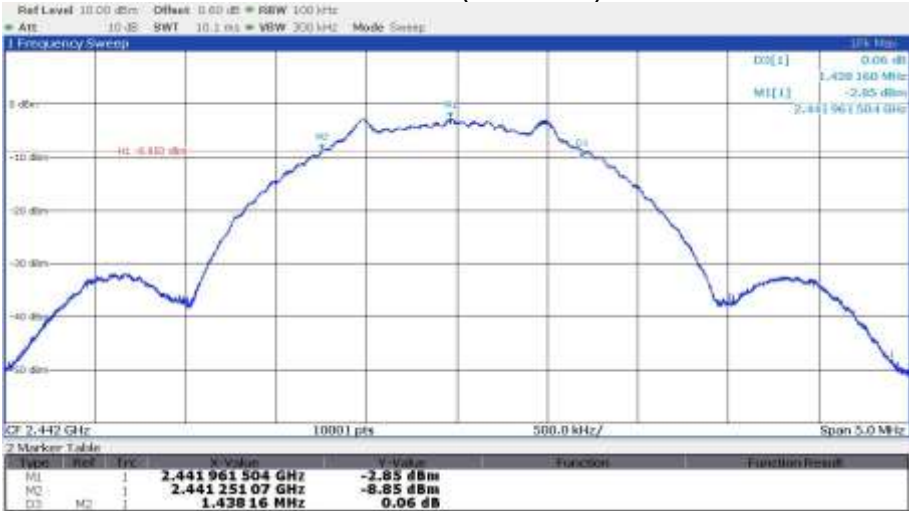

Channel 39 (2480 MHz)

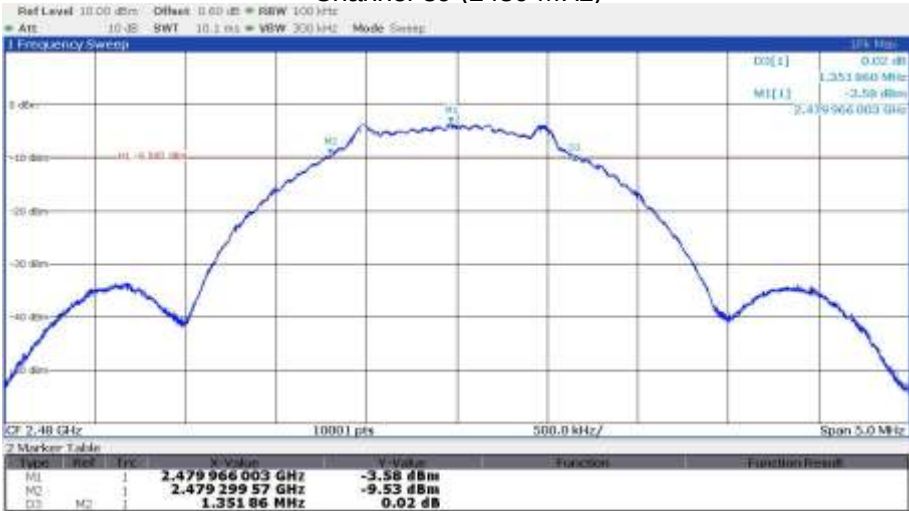

FCC ID: XYN817A

IC ID: 8748A-817A


5.1.7 Test protocols OBW

1Mbps:

Channel 37 (2402 MHz)



Channel 18 (2442 MHz)

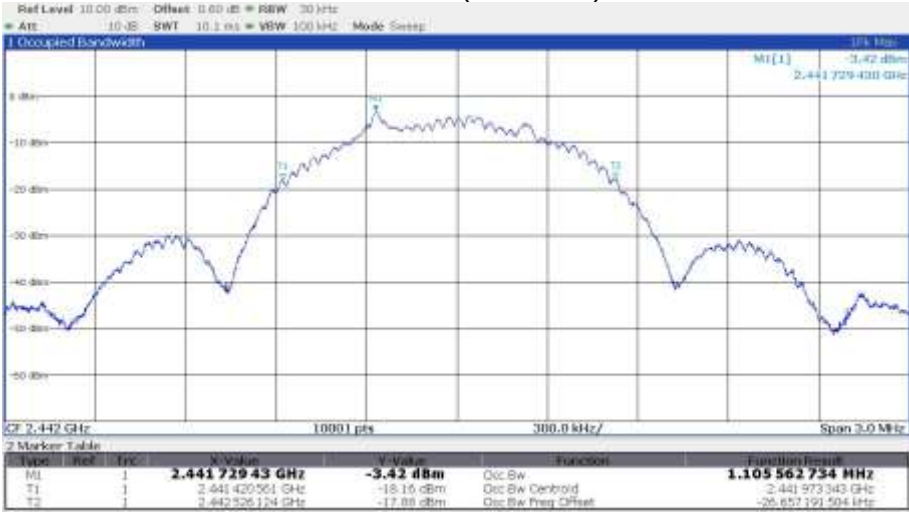

Channel 39 (2480 MHz)



FCC ID: XYN817A

IC ID: 8748A-817A

2Mbps:

Channel 37 (2402 MHz)



Channel 18 (2442 MHz)



Channel 39 (2480 MHz)



FCC ID: XYN817A

IC ID: 8748A-817A

5.2 Maximum peak output power

For test instruments and accessories used see section 6 Part **CPC 3**.

5.2.1 Description of the test location

Test location: Shielded Room S6

5.2.2 Photo documentation of the test set-up – see Attachment B

5.2.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2.4 Description of Measurement

The maximum peak conducted output power is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.9.2.2. The EUT is set in TX continuous mode while measuring.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A

IC ID: 8748A-817A

5.2.5 Test result

FCC §15.247 (b)(3) RSS-247 5.4 (d)					
Modulation	Channel	Frequency	Measured Conducted	Conducted Tx-Power	Margin
		MHz	dBm	dBm	dB
1 Mbps	CH37	2402	4.0	30.0	-26.0
	CH18	2442	3.8	30.0	-26.2
	CH39	2480	3.3	30.0	-26.8
2 Mbps	CH37	2402	4.0	30.0	-26.0
	CH18	2442	3.7	30.0	-26.3
	CH39	2480	3.1	30.0	-26.9

Measurement							
RSS-247 5.4 (d)							
Modulation	Channel	Frequency	Measured Conducted	Antenna gain	EIRP	EIRP Limit	Margin
		MHz	dBm	dBi	dBm	dBm	dB
1 Mbps	CH37	2402	4.0	-0.8	3.2	36.0	-32.8
	CH18	2442	3.8	-0.2	3.6	36.0	-32.4
	CH39	2480	3.3	0.0	3.3	36.0	-32.8
2 Mbps	CH37	2402	4.0	-1.8	2.2	36.0	-33.8
	CH18	2442	3.7	-0.4	3.3	36.0	-32.7
	CH39	2480	3.1	-0.1	3.0	36.0	-33.0

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A**IC ID: 8748A-817A**

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1.0
2400-2483.5	30	1.0
5725-5850	30	1.0

Peak output power limit according to RSS-247 5.4(d):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(W)
902-928	30	1.0
2400-2483.5	30	1.0

EIRP Limit according to RSS-247 5.4 (d):

Frequency (MHz)	EIRP Limit	
	(dBm)	(Watt)
902-928	36	4.0
2400-2483.5	36	4.0
5725-5850	36	4.0

The requirements are **FULFILLED**.
Remarks: For more details of the measurements please refer to following test plots.


FCC ID: XYN817A

IC ID: 8748A-817A


5.2.6 Test protocols

1 Mbps:


Channel 37 (2402 MHz)

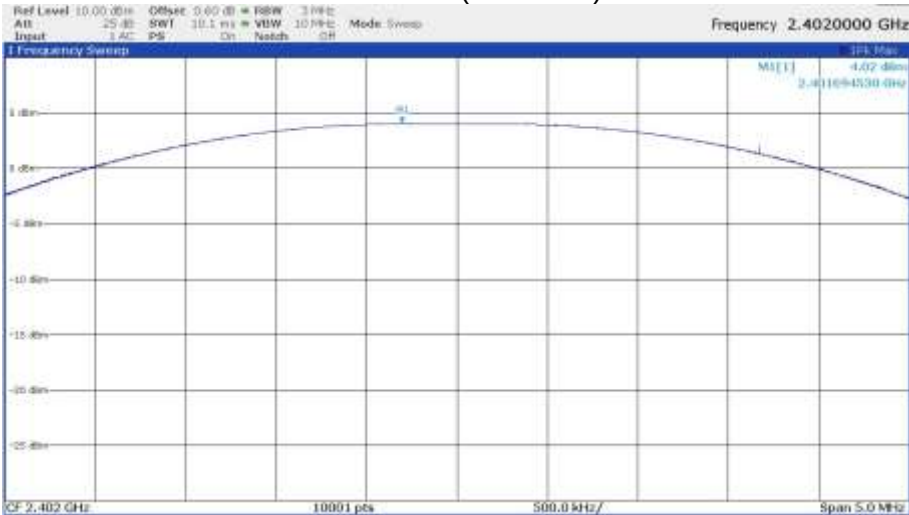

Channel 18 (2442 MHz)

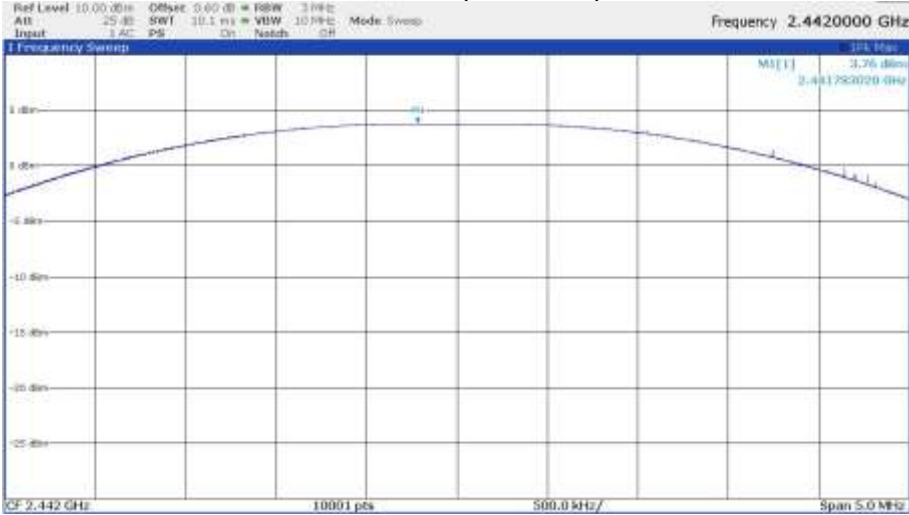

Channel 39 (2480 MHz)

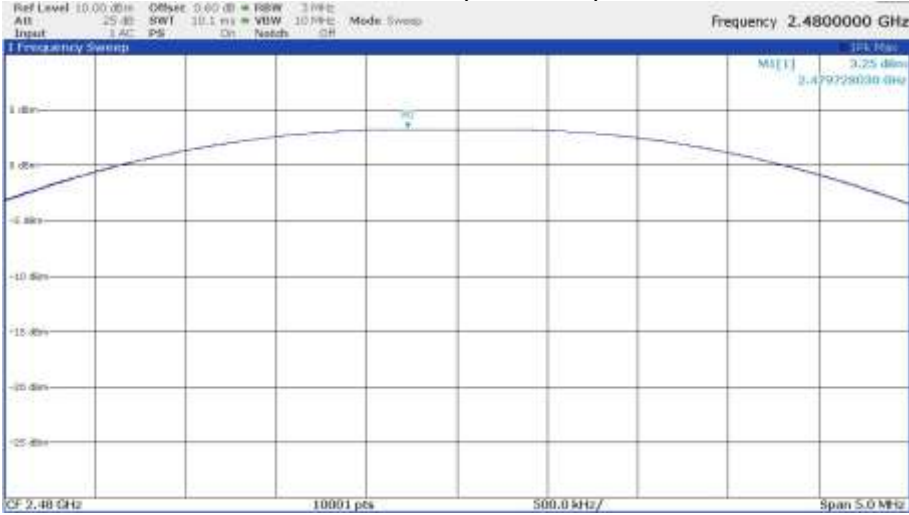


FCC ID: XYN817A


IC ID: 8748A-817A

2 Mbps:


Channel 37 (2402 MHz)

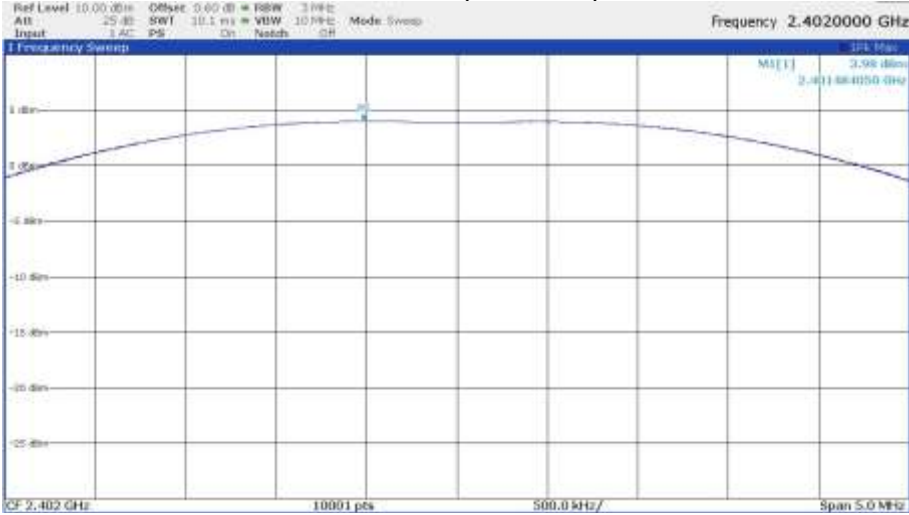

Channel 18 (2442 MHz)

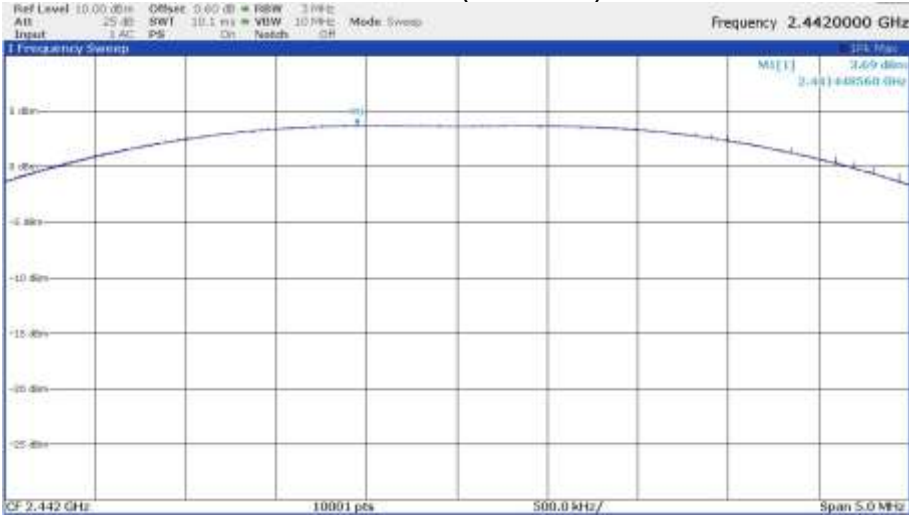

Channel 39 (2480 MHz)

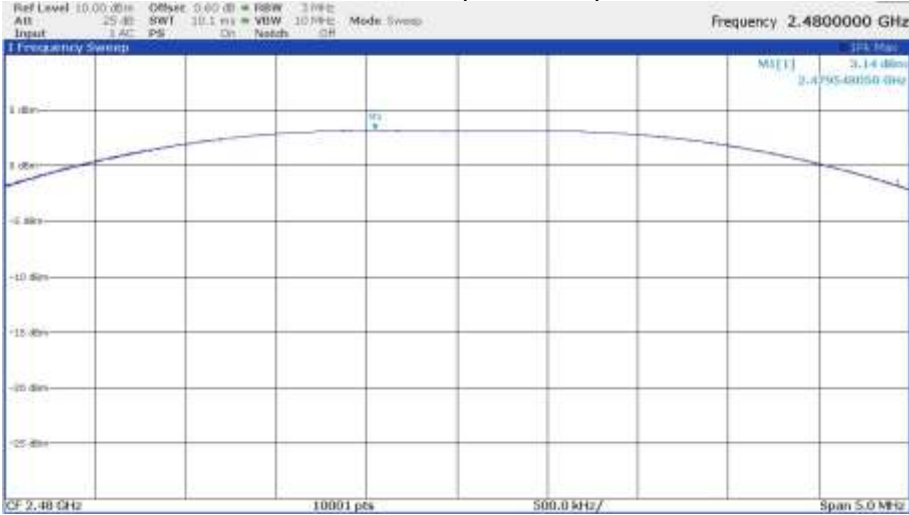

FCC ID: XYN817A

IC ID: 8748A-817A

5.3 Power spectral density

For test instruments and accessories used see section 6 Part MB.

5.3.1 Description of the test location

Test location: Shielded Room S6

5.3.2 Photo documentation of the test set-up – see Attachment B

5.3.3 Applicable standard

According to FCC Part 15, Section 15.247(e):

For digitally modulated systems, the power spectral density radiated from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the radiated output power shall be used to determine the power spectral density.

5.3.4 Description of Measurement

The measurement is performed using the procedure set out in 11.10 of ANSI C63.10. The power measurement was done as peak power measurement. Therefore, the PKPSD is measured. The max peak was located and with the spectrum analyser and a marker set to peak.

Spectrum analyser settings:

RBW: 3 kHz, VBW: 10 kHz, Detector: Peak, Sweep time: Auto

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A

IC ID: 8748A-817A

5.3.5 Test result

FCC §15.247 (e) RSS-247 5.2 (b)					
Modulation	Channel	Frequency	Measured Conducted PSD	Conducted PSD Limit	Margin
		MHz	dBm/3kHz	dBm/3kHz	dB
1 Mbps	CH37	2402	-6.3	8.0	-14.3
	CH17	2440	-6.5	8.0	-14.5
	CH39	2480	-7.0	8.0	-15.0
2 Mbps	CH37	2402	-10.0	8.0	-18.0
	CH17	2440	-9.9	8.0	-17.9
	CH39	2480	-10.5	8.0	-18.5

Power spectral density limit according to FCC Part 15, Section 15.247(e):

Frequency (MHz)	Power spectral density limit
	(dBm/3 kHz)
2400 - 2483.5	8

The requirements are **FULFILLED**.

Remarks: For detailed test result please see the following test protocols

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.


FCC ID: XYN817A

IC ID: 8748A-817A


5.3.6 Test protocols

1Mbps:


Channel 37 (2402 MHz)

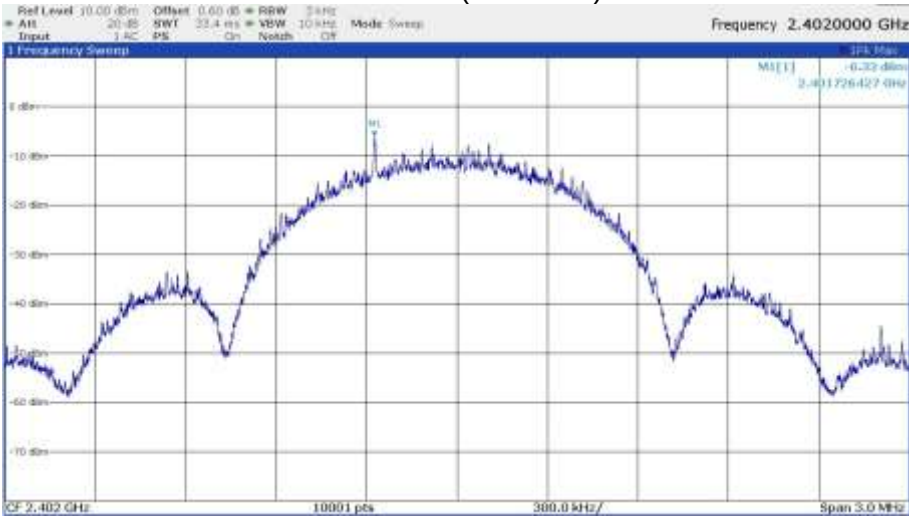

Channel 18 (2442 MHz)

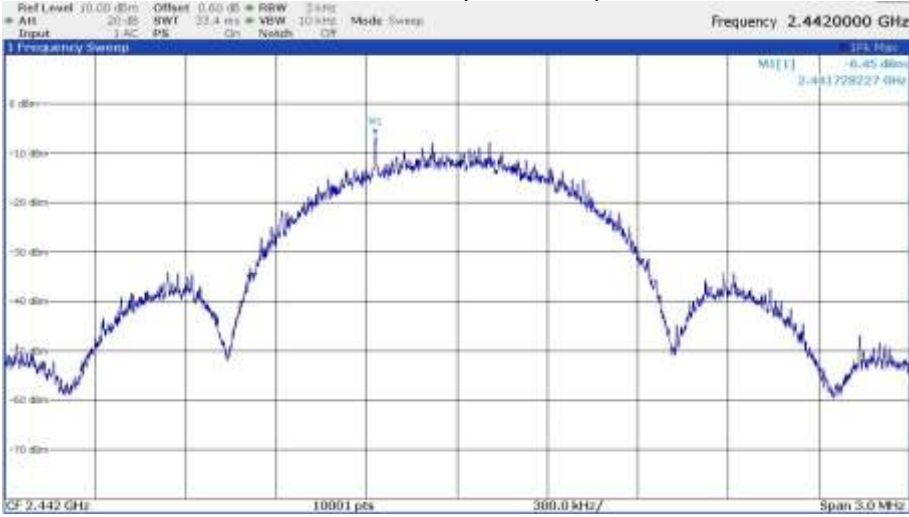

Channel 39 (2480 MHz)

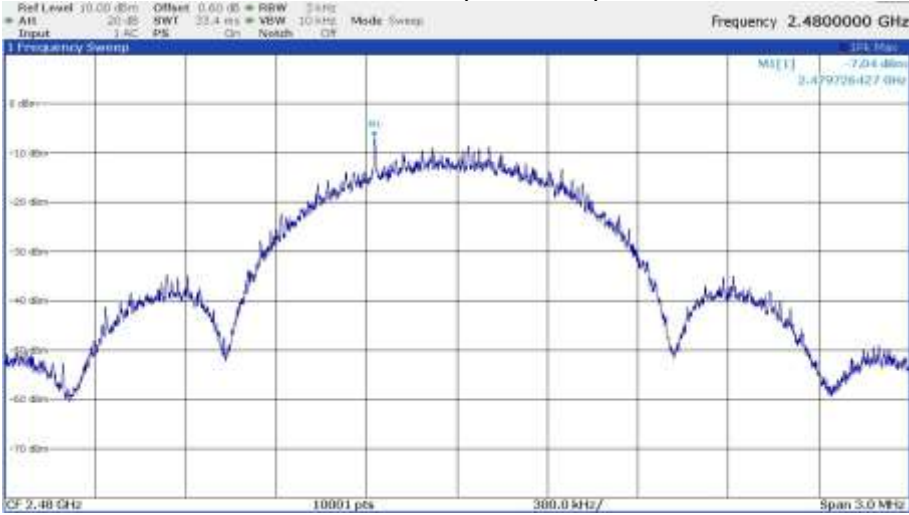


FCC ID: XYN817A


IC ID: 8748A-817A

2Mbps:


Channel 37 (2402 MHz)

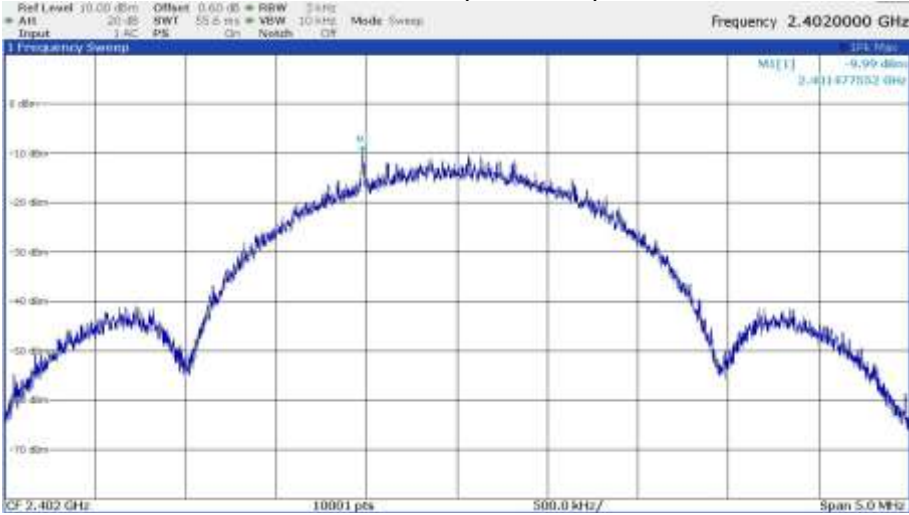

Channel 18 (2442 MHz)

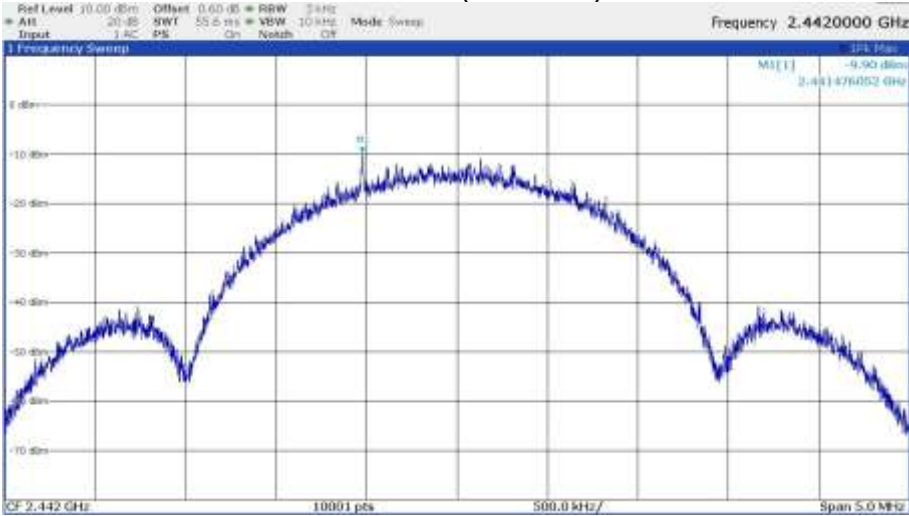

Channel 39 (2480 MHz)

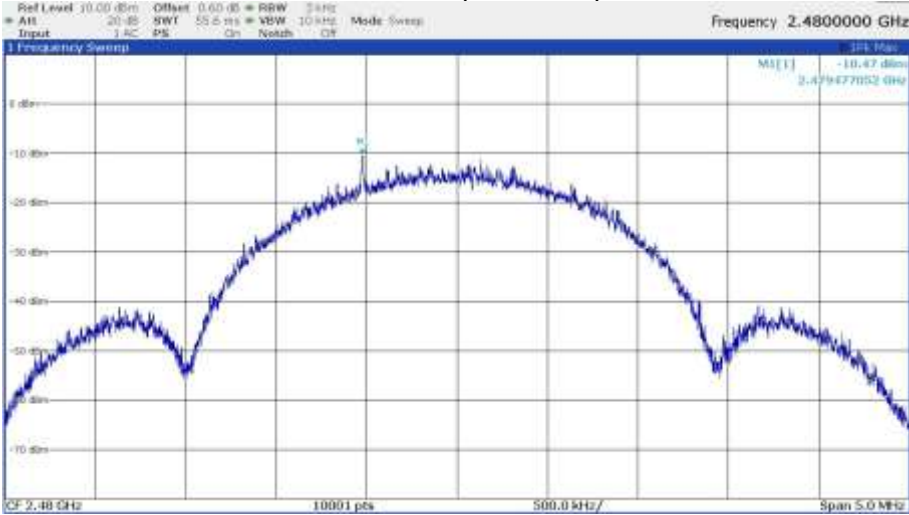

FCC ID: XYN817A

IC ID: 8748A-817A

5.4 Spurious emissions radiated

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3.**

5.4.1 Description of the test location

Test location: OATS 1
 Test location: Anechoic chamber 1
 Test distance: 3 m

5.4.2 Photo documentation of the test set-up – see Attachment B

5.4.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

According to RSS-247 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

FCC ID: XYN817A**IC ID: 8748A-817A****5.4.4 Description of Measurement**

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10. If the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise the emission will be measured in average mode again and reported.

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

Measurements are performed in following order:

1) Measurement of emissions according to General Limit specified in section 15.209(a):

Test receiver settings for SER2:

30MHz-1GHz RBW: 120 MHz Detector: Quasi peak Meas. Time: 1 s,

Spectrum analyser settings for SER3:

1GHz-26GHz RBW: 1 MHz Detector: Max. peak Trace: Max. hold Sweep: Auto

2) If emissions outside the Restricted Bands are above General Limit additional measurements of emissions according to Spurious Emissions Limit specified in section 15.247(d) are performed:

Spectrum analyser settings:

RBW: 100 kHz VBW: 300 kHz Detector: Max. peak Trace: Max. hold Sweep: Auto

FCC ID: XYN817A


IC ID: 8748A-817A

5.4.5 Test result

f < 1000 MHz

Frequency (MHz)	Reading (dBμV)	Correction * (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Dlimit (dB)
0.010	27.9	-59.4	-31.5	47.6	-79.1
0.080	10.1	18.6	-51.3	29.5	-80.8
0.200	27.3	17.6	-35.1	21.6	-56.7
2.500	8.8	18.2	-13.0	30.0	-43.0
14.000	9.1	18.4	-12.5	30.0	-42.5
24.000	18.4	18.0	-3.6	30.0	-33.6

Frequency (MHz)	Reading Vert. (dBμV)	Reading Hor. (dBμV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBμV/m)	Level Hor. (dBμV/m)	Limit (dBμV/m)	Dlimit (dB)
80.00	5.7	1.5	14.2	14.5	19.9	16.0	40.0	-20.1
220.00	6.8	0.4	17.7	17.4	24.5	17.8	46.0	-21.5
245.00	-6.3	-1.1	18.6	18.5	12.3	17.4	46.0	-28.6
300.00	-4.2	3.6	20.2	20.8	16.0	24.4	46.0	-21.6
360.00	-7.5	-5.9	22.1	22.5	14.6	16.6	46.0	-29.4
570.00	-9.2	-9.0	27.6	27.9	18.4	18.9	46.0	-27.1

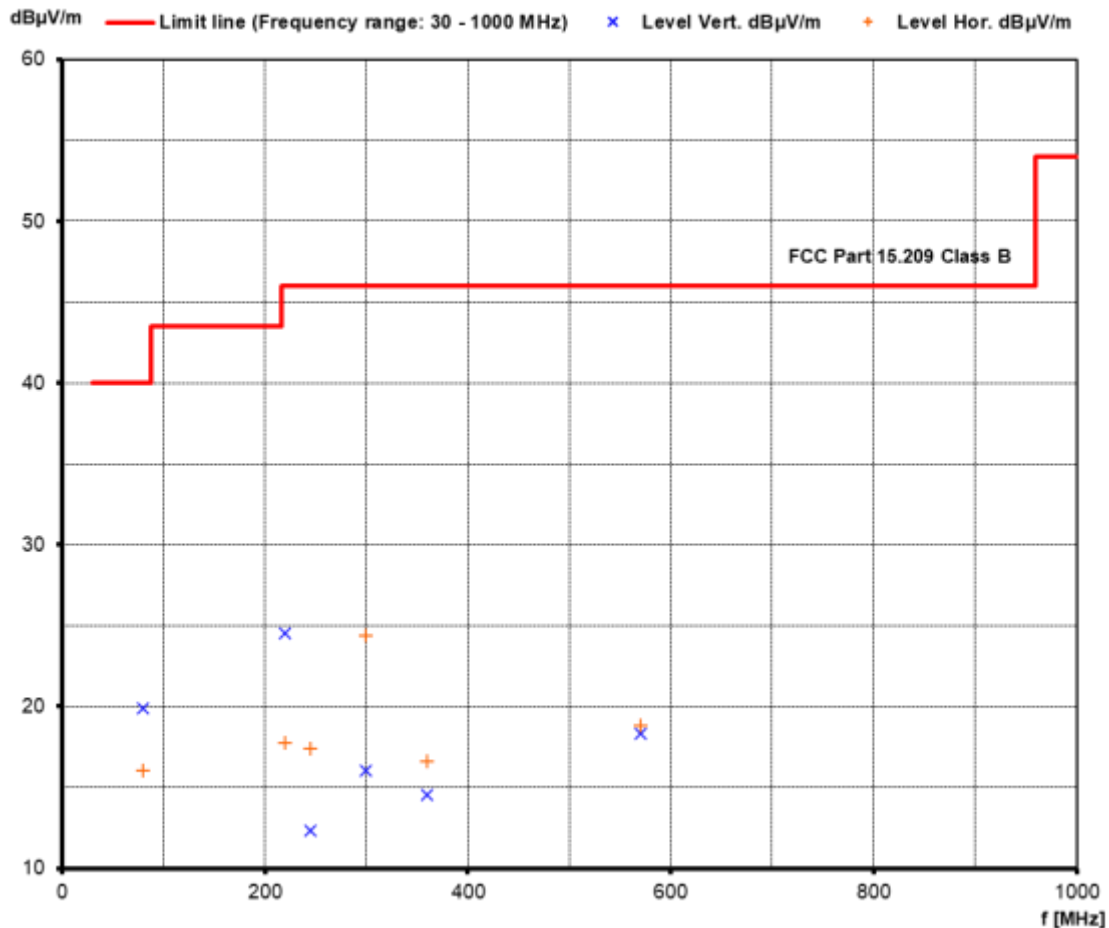

FCC ID: XYN817A

IC ID: 8748A-817A

 $f > 1000 \text{ MHz}$

1Mbps:

Channel 37 (2402 MHz)

1-4 GHz 1MHz RBW




1-4 GHz 100kHz RBW




FCC ID: XYN817A

IC ID: 8748A-817A

4-18 GHz

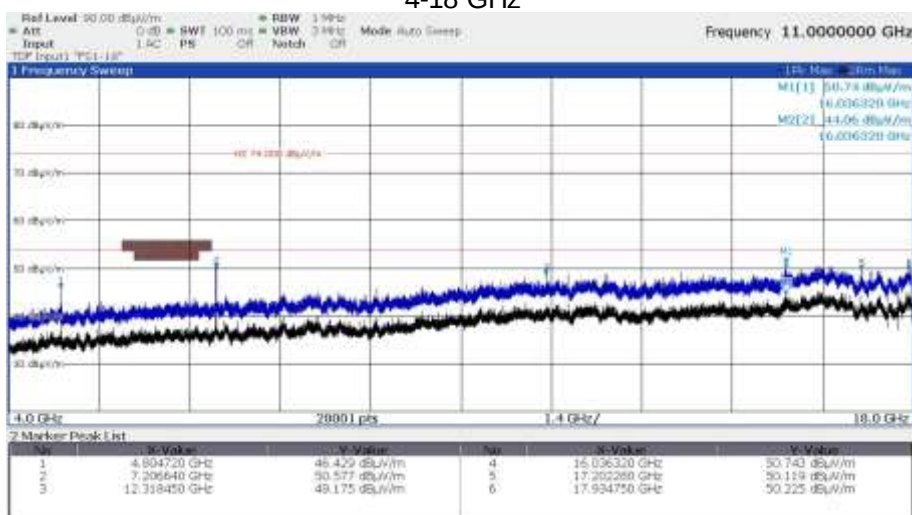

18-25 GHz

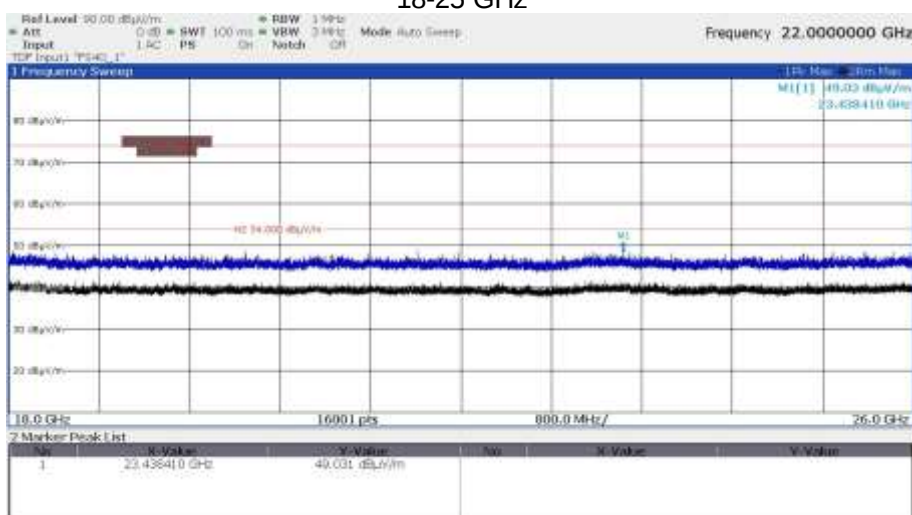


FCC ID: XYN817A


IC ID: 8748A-817A

Channel 18 (2442 MHz)


1-4 GHz

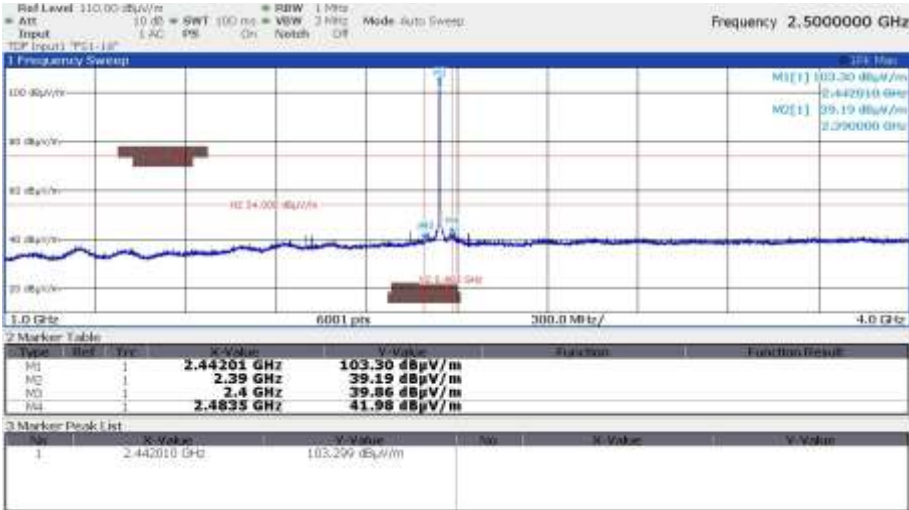

4-18 GHz

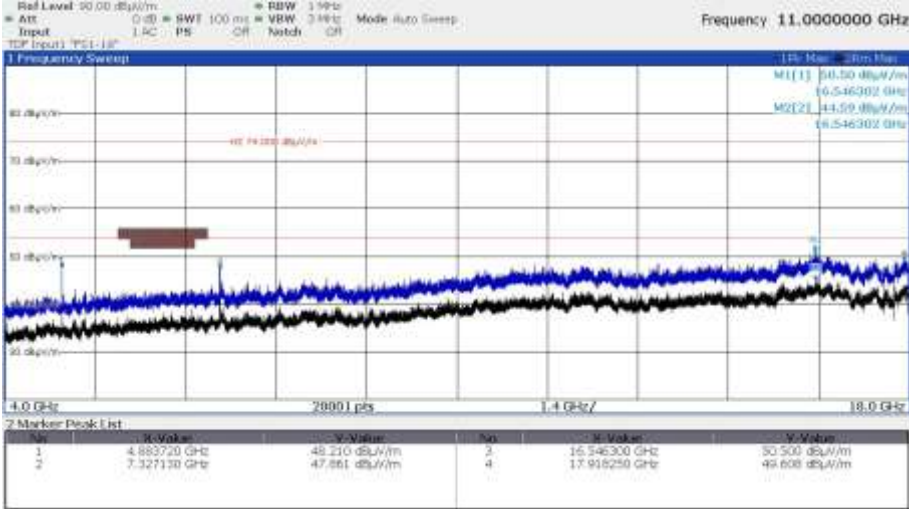

18-25 GHz

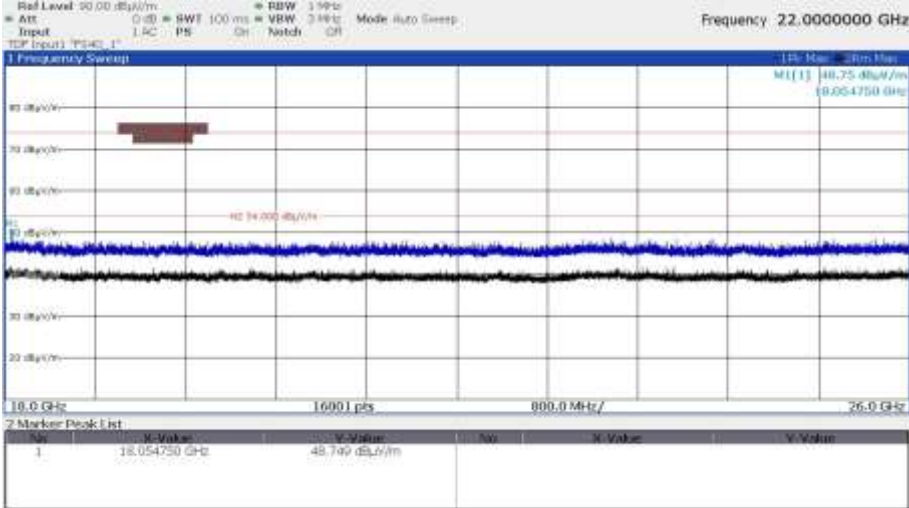

FCC ID: XYN817A

IC ID: 8748A-817A

Channel 39 (2480 MHz)


1-4 GHz




The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A IC ID: 8748A-817A

4-18 GHz

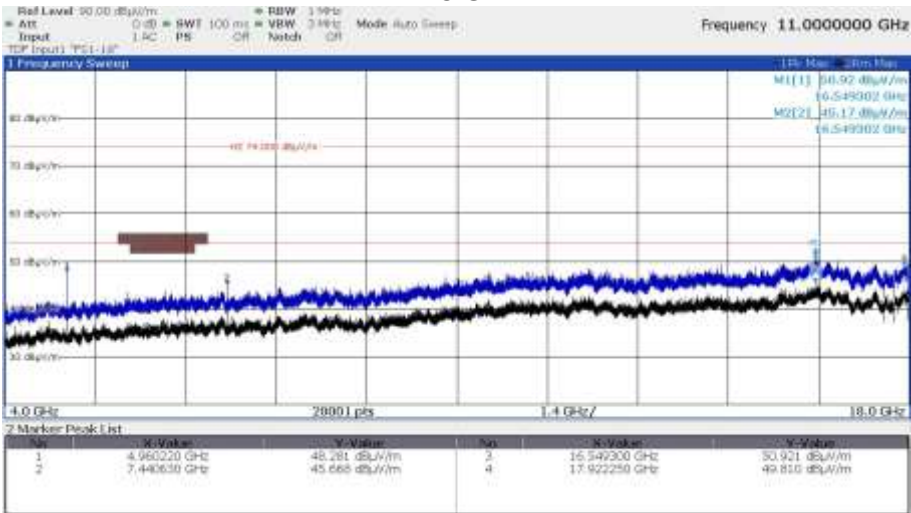

18-25 GHz

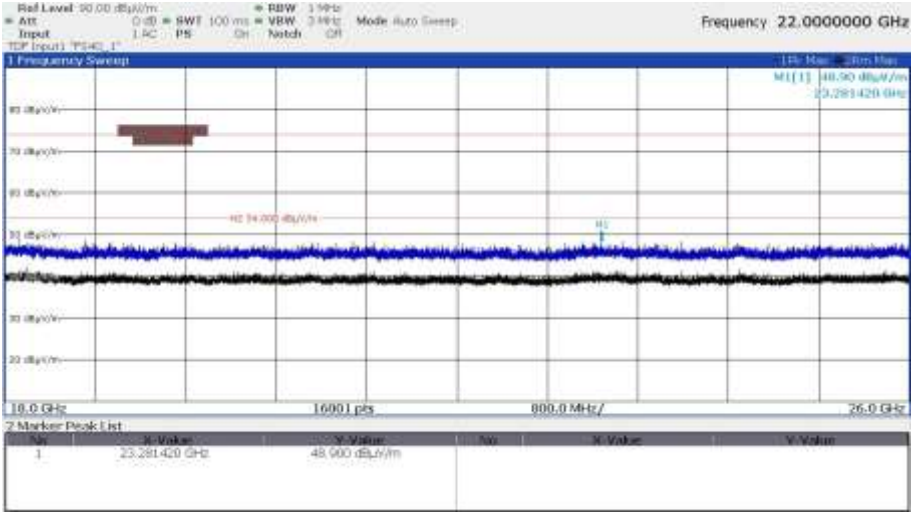


FCC ID: XYN817A

IC ID: 8748A-817A

2Mbps:

Channel 37 (2402 MHz)

1-4 GHz RBW 1 MHz

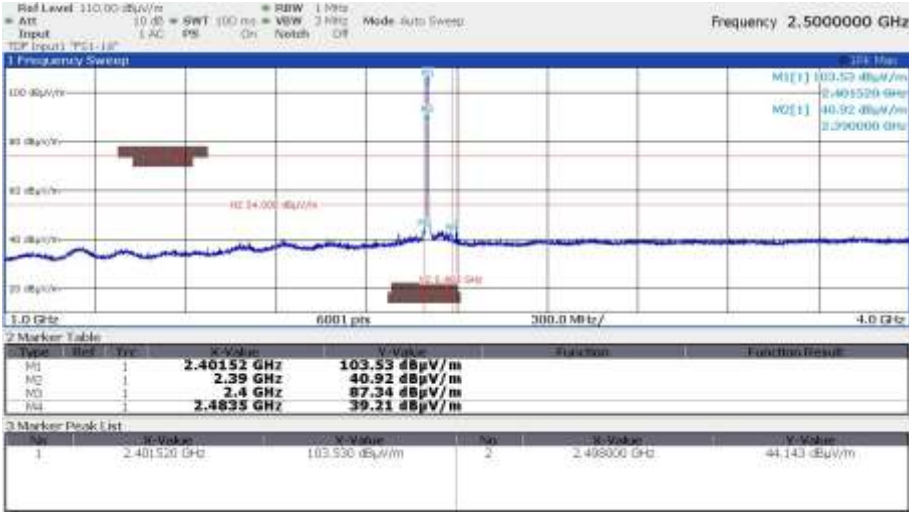


1-4 GHz RBW 100 kHz




FCC ID: XYN817A

IC ID: 8748A-817A

4-18 GHz

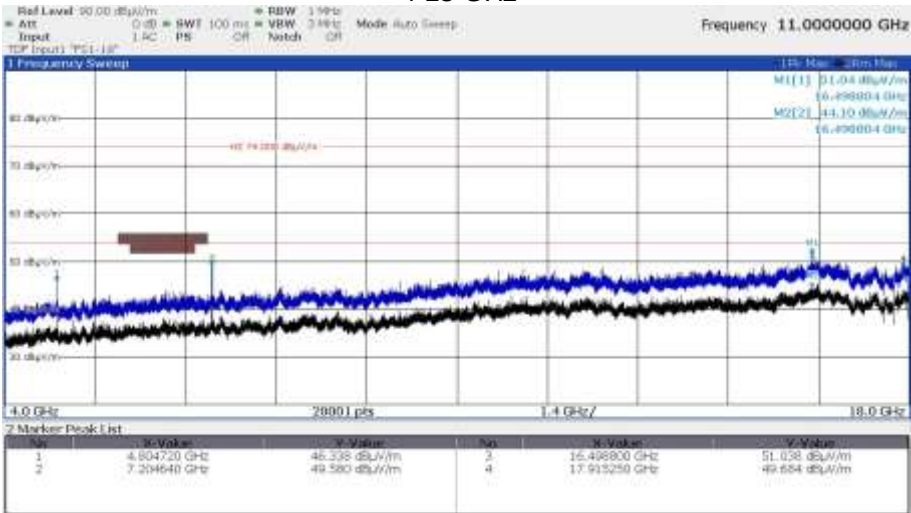

18-25 GHz

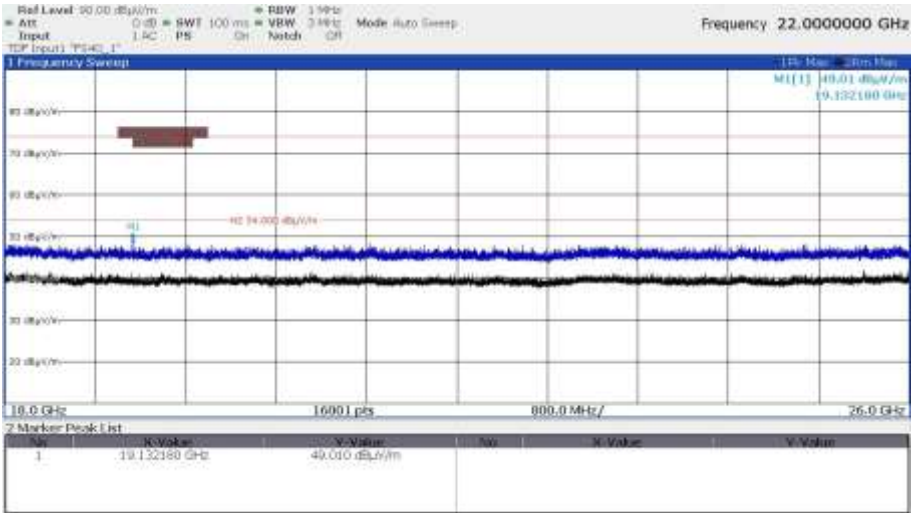


FCC ID: XYN817A


IC ID: 8748A-817A

Channel 18 (2442 MHz)


1-4 GHz

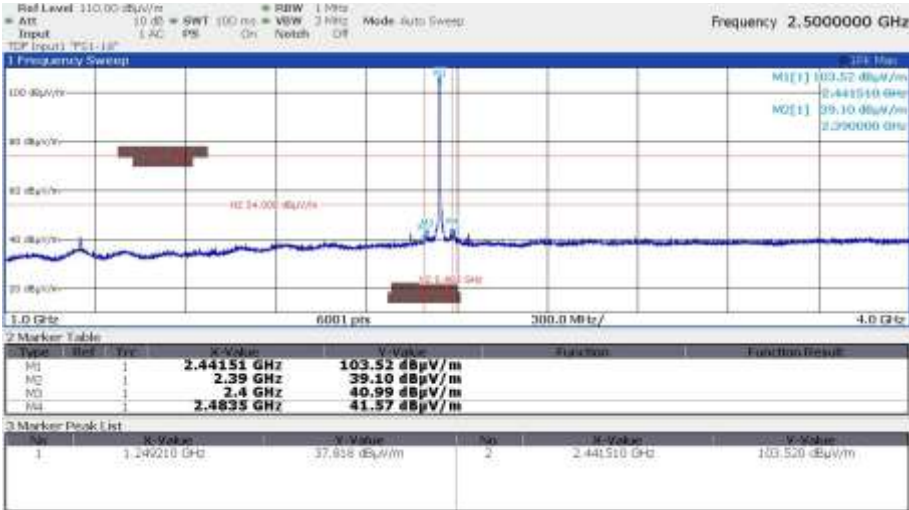

4-18 GHz

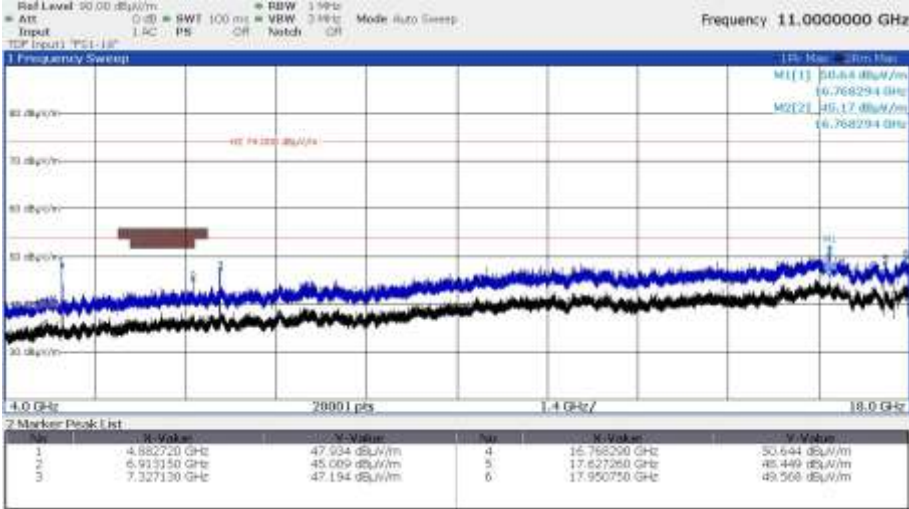

18-25 GHz

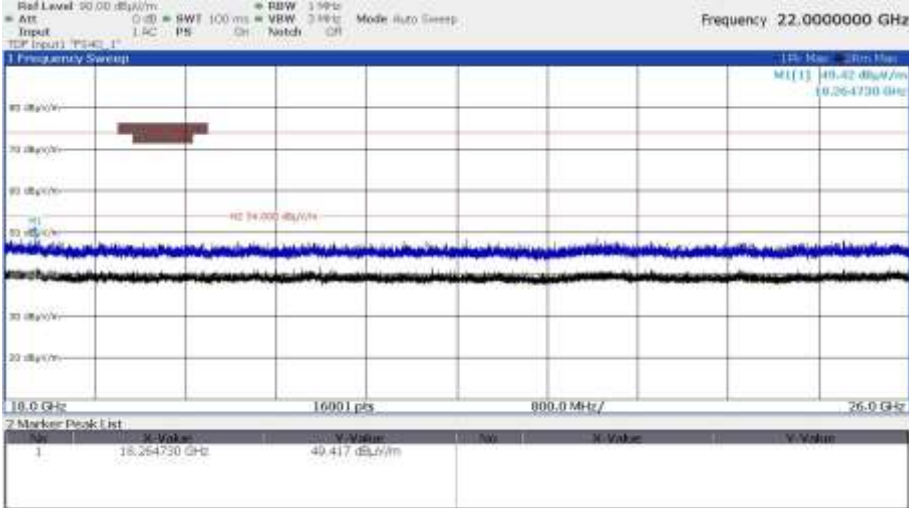




FCC ID: XYN817A

IC ID: 8748A-817A

Channel 39 (2480 MHz)

1-4 GHz

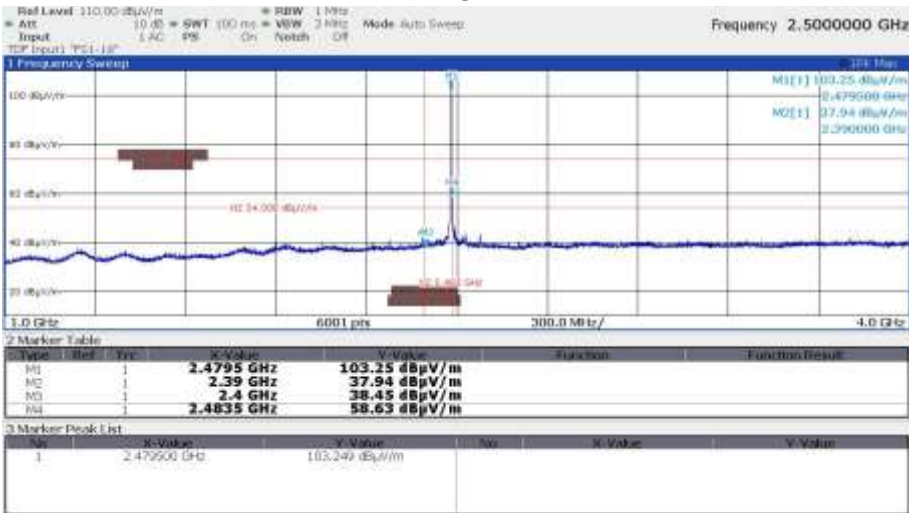


1-4 GHz Average final measurement




FCC ID: XYN817A

IC ID: 8748A-817A

4-18 GHz

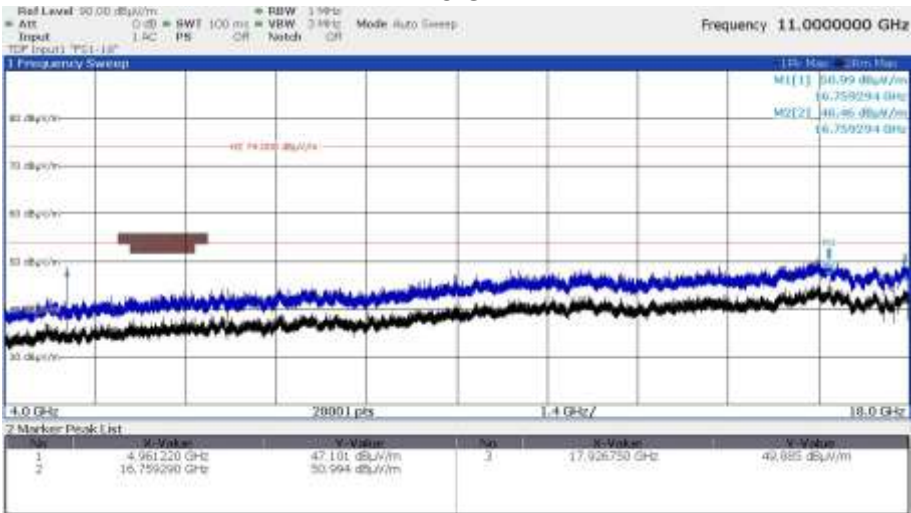

18-25 GHz

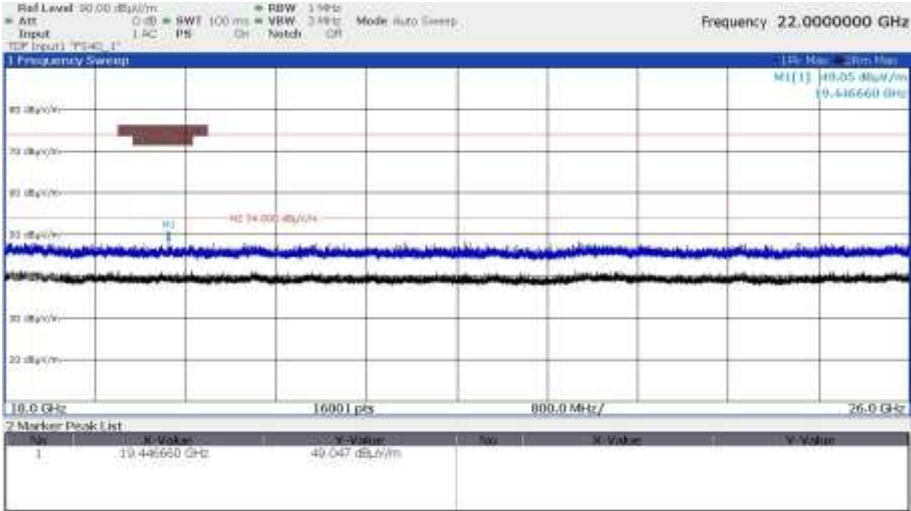

FCC ID: XYN817A**IC ID: 8748A-817A**

Radiated limits according to FCC Part 15, Section 15.209 for spurious emissions which fall in restricted bands:

Frequency (MHz)	15.209 Limits ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - -0.49	2400/f(kHz)	300
0.49 - 1.705	24000/f(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Radiated limits according to RSS-Gen, 8.9 for spurious emissions which fall in restricted bands:

Frequency (MHz)	RSS-Gen Limits ($\mu\text{A/m}$)	Measurement distance (m)
0.009 - -0.49	63.7/f(kHz)	300
0.49 - 1.705	63.7/f(kHz)	30
1.705 - 30.0	0.08	30

Frequency (MHz)	RSS-Gen Limits ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Limit according to FCC Part 15, Section 15.247(d) for emissions falling not in restricted bands:

Frequency (MHz)	Spurious emission limit
Below 1000	20 dB below the highest level of the desired power
Above 1000	20 dB below the highest level of the desired power

Attenuation below the general limits specified in Section 15.209(a) is not required.

Limit according to RSS-247, 5.5 for emissions falling not in restricted bands:

Frequency (MHz)	Spurious emission limit
Below 1000	20 dB below the highest level of the desired power
Above 1000	20 dB below the highest level of the desired power

Attenuation below the general limits specified in RSS-Gen is not required.

FCC ID: XYN817A**IC ID: 8748A-817A****Restricted bands of operation:**

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

RSS-Gen, Table 6 – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	12.57675 - 12.57725	399.9 - 410	7.250 - 7.750
0.495 - 0.505	13.36 - 13.41	608 - 614	8.025 – 8.500
2.1735 - 2.1905	16.42 - 16.423	960 - 1427	9.0 - 9.2
3.020 - 3.026	16.69475 - 16.69525	1435 - 1626.5	9.3 - 9.5
4.125 - 4.128	16.80425 - 16.80475	1645.5 - 1646.5	10.6 - 12.7
4.17725 - 4.17775	25.5 - 25.67	1660 - 1710	13.25 - 13.4
4.20725 - 4.20775	37.5 - 38.25	1718.8 - 1722.2	14.47 - 14.5
5.677 - 5.683	73 - 74.6	2200 - 2300	15.35 - 16.2
6.215 - 6.218	74.8 - 75.2	2310 - 2390	17.7 - 21.4
6.26775 - 6.26825	108 – 138	2483.5 - 2500	22.01 - 23.12
6.31175 - 6.31225	149.9 - 150.05	2655 - 2900	23.6 - 24.0
8.291 - 8.294	156.52475 - 156.52525	3260 – 3267	31.2 - 31.8
8.362 - 8.366	156.7 - 156.9	3332 - 3339	36.43 - 36.5
8.37625 - 8.38675	162.0125 - 167.17	3345.8 - 3358	Above 38.6
8.41425 - 8.41475	167.72 - 173.2	3500 - 4400	
12.29 - 12.293	240 – 285	4500 - 5150	
12.51975 - 12.52025	322 - 335.4	5350 - 5460	

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic. Only the worst-case plots are listed.

FCC ID: XYN817A

IC ID: 8748A-817A

5.5 Antenna application

5.5.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has an integrated antenna. No other antenna can be used with the device.

The supplied antenna meets the requirements of part 15.203 and 15.204.

Remarks: None.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN817A

IC ID: 8748A-817A

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPC 3	FSW43 minibend KR-16	02-02/11-21-001 02-02/50-16-018	22/05/2024	22/05/2023		
MB	FSW43 minibend KR-16	02-02/11-21-001 02-02/50-16-018	22/05/2024	22/05/2023		
SER 1	ESW26 HFH 2 - Z 2	02-02/03-17-002 02-02/24-05-020	08/03/2024 01/06/2025	08/03/2023 01/06/2022	05/09/2024	05/09/2023
SER 2	ESVS 30 ESW26 VULB 9168 NW-2000-NB KK-EF393/U-16N-21N20 m KK-SD_7/8-2X21N-33,0M 50F-003 N 3 dB	02-02/03-05-006 02-02/03-17-002 02-02/24-05-005 02-02/50-05-113 02-02/50-12-018 02-02/50-15-028 02-02/50-21-010	27/07/2024 08/03/2024 20/04/2024	27/07/2023 08/03/2023 20/04/2023	03/05/2024	03/05/2023
SER 3	AFS5-12001800-18-10P-6 AFS4-01000400-10-10P-4 AMF-4F-04001200-15-10P LNA-40-18004000-33-5P 3117 BBHA 9170 Sucoflex N-2000-SMA WHK 3.0/18G-10EF KMS116-GL140SE-KMS116-02-02/50-20-026	02-02/17-06-002 02-02/17-13-002 02-02/17-13-003 02-02/17-20-002 02-02/24-05-009 02-02/24-05-013 02-02/50-05-075 02-02/50-05-180	12/07/2024 21/03/2026	12/07/2023 21/03/2023	21/03/2024	21/03/2023

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.