

# Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

## i-Mobile Technology Corporation

**FCC ID:** XZOIC-8  
**Product Description:** Tablet PC  
**Model No.:** IC-8  
**Supplementary Model:** N/A  
**Brand Name:** @MOBILE

**Prepared for:** i-Mobile Technology Corporation

3F #8 Alley 15 Lane 120 Sec.1 Neihu Road Neihu District, Taipei  
City 114, Taiwan

**Prepared by:** Bontek Compliance Testing Laboratory Co., Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East  
Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028

**Report No.:** BCT13FR183E-2

**Issue Date:** April 5, 2014

**Test Date:** June 6, 2013~April 5, 2014


**Tested by:**

  
Lion Cai

**Reviewed by:**

  
Owen Yang

**Approved by:**

  
Kendy Wang

## TABLE OF CONTENTS

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4         |
| 1.2 TEST STANDARDS .....                                    | 4         |
| 1.3 TEST FACILITY .....                                     | 5         |
| <b>2. SYSTEM TEST CONFIGURATION .....</b>                   | <b>6</b>  |
| 2.1 EUT CONFIGURATION .....                                 | 6         |
| 2.2 SUPPORT EQUIPMENT .....                                 | 6         |
| 2.3 GENERAL TEST PROCEDURES .....                           | 6         |
| 2.4 MEASUREMENT UNCERTAINTY .....                           | 6         |
| 2.5 LIST OF MEASURING EQUIPMENTS USED .....                 | 7         |
| <b>3. SUMMARY OF TEST RESULTS.....</b>                      | <b>8</b>  |
| <b>4. TEST OF AC POWER LINE CONDUCTED EMISSION .....</b>    | <b>9</b>  |
| 4.1 APPLICABLE STANDARD.....                                | 9         |
| 4.2 TEST SETUP DIAGRAM .....                                | 9         |
| 4.3 TEST RESULT .....                                       | 9         |
| <b>5. TEST OF HOPPING CHANNEL BANDWIDTH.....</b>            | <b>12</b> |
| 5.1 APPLICABLE STANDARD.....                                | 12        |
| 5.2 EUT SETUP .....                                         | 12        |
| 5.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 12        |
| 5.4 TEST PROCEDURE .....                                    | 12        |
| 5.5 TEST RESULT .....                                       | 12        |
| <b>6. TEST OF HOPPING CHANNEL SEPARATION .....</b>          | <b>15</b> |
| 6.1 APPLICABLE STANDARD.....                                | 15        |
| 6.2 EUT SETUP .....                                         | 15        |
| 6.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 15        |
| 6.4 TEST PROCEDURE .....                                    | 15        |
| 6.5 TEST RESULT .....                                       | 15        |
| <b>7. TEST OF NUMBER OF HOPPING FREQUENCY .....</b>         | <b>18</b> |
| 7.1 APPLICABLE STANDARD.....                                | 18        |
| 7.2 EUT SETUP .....                                         | 18        |
| 7.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 18        |
| 7.4 TEST PROCEDURE .....                                    | 18        |
| 7.5 TEST RESULT .....                                       | 18        |
| <b>8. TEST OF DWELL TIME OF EACH FREQUENCY.....</b>         | <b>20</b> |
| 8.1 APPLICABLE STANDARD.....                                | 20        |
| 8.2 EUT SETUP .....                                         | 20        |
| 8.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 20        |
| 8.4 TEST PROCEDURE .....                                    | 20        |
| 8.5 TEST RESULT .....                                       | 20        |
| <b>9. TEST OF MAXIMUM PEAK OUTPUT POWER .....</b>           | <b>27</b> |
| 9.1 APPLICABLE STANDARD.....                                | 27        |
| 9.2 EUT SETUP .....                                         | 27        |
| 9.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 27        |
| 9.4 TEST PROCEDURE .....                                    | 27        |
| 9.5 TEST RESULT .....                                       | 27        |
| <b>10. TEST OF BAND EDGES EMISSION.....</b>                 | <b>30</b> |
| 10.1 APPLICABLE STANDARD.....                               | 30        |
| 10.2 EUT SETUP .....                                        | 30        |
| 10.3 TEST EQUIPMENT LIST AND DETAILS .....                  | 30        |
| 10.4 TEST PROCEDURE .....                                   | 30        |
| 10.5 TEST RESULT .....                                      | 31        |

|                                                     |           |
|-----------------------------------------------------|-----------|
| <b>11. TEST OF SPURIOUS RADIATED EMISSION .....</b> | <b>33</b> |
| 11.1 APPLICABLE STANDARD.....                       | 33        |
| 11.2 EUT SETUP .....                                | 33        |
| 11.3 TEST EQUIPMENT LIST AND DETAILS .....          | 34        |
| 11.4 TEST PROCEDURE .....                           | 34        |
| 11.5 TEST RESULT .....                              | 35        |
| <b>12. ANTENNA REQUIREMENT .....</b>                | <b>43</b> |
| 12.1 STANDARD APPLICABLE.....                       | 43        |
| 12.2 ANTENNA CONNECTED CONSTRUCTION .....           | 43        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

|                          |                                                                                  |
|--------------------------|----------------------------------------------------------------------------------|
| Applicant:               | <b>i-Mobile Technology Corporation</b>                                           |
| Address of Applicant:    | 3F #8 Alley 15 Lane 120 Sec.1 Neihu Road Neihu District, Taipei City 114, Taiwan |
| Manufacturer:            | <b>i-Mobile Technology Corporation</b>                                           |
| Address of Manufacturer: | 3F #8 Alley 15 Lane 120 Sec.1 Neihu Road Neihu District, Taipei City 114, Taiwan |

#### General Description of E.U.T

| Items                 | Description                                                                  |
|-----------------------|------------------------------------------------------------------------------|
| EUT Description:      | Tablet PC                                                                    |
| Model No.:            | IC-8                                                                         |
| Supplementary Model:  | N/A                                                                          |
| Trade Name:           | @MOBILE                                                                      |
| Frequency Band:       | 2402 MHz ~ 2480 MHz                                                          |
| Channel Spacing:      | 1 MHz                                                                        |
| Number of Channels:   | 79                                                                           |
| Modulation Technique: | FHSS                                                                         |
| Type of Modulation:   | GFSK                                                                         |
| Antenna Type:         | Built-in Antenna                                                             |
| Antenna Gain:         | 1.92dBi                                                                      |
| Rated Voltage:        | Input: 16VDC 4.0A from AC/DC adapter                                         |
| Adapter description:  | Model:STD-16040<br>Input: AC 100-240V 47-63Hz 1.4A MAX<br>Output: 16VDC 4.0A |

*\* The test data gathered are from the production sample provided by the manufacturer.*

### 1.2 Test Standards

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules. Test was carried out according to the above mentioned FCC rules and the FCC publication notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

### **1.3 Test Facility**

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. at Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road, Nanshan District, Shenzhen, China 518055.

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC – Registration No.: 970318**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Support Equipment

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

Support equipments or special accessories in test configuration:

| AUX Description: | Manufacturer | Model No.   | Certificate | CABLE                              |
|------------------|--------------|-------------|-------------|------------------------------------|
| LCD COLOUR TV    | SHARP        | LCD-32Z330A | CE, FCC     | 1.5m Unshielded Power Cord         |
| Load impedance   | SAA          | 78MD82X     | CE, FCC     | N/A                                |
| Keyboard         | Dell         | L100        | CE, FCC     | 1.8m shielded data Cable with core |
| Mouse            | Dell         | OCJ339      | CE, FCC     | 1.8m shielded data Cable with core |

### 2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

### 2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                     | Uncertainty |
|-------------------------------|-------------|
| Power Line Conducted Emission | +/- 2.3 dB  |
| Radiated Emission             | +/- 3.4 dB  |

Uncertainty figures are valid to a confidence level of 95%.

## 2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen CTL Testing Technology Co., Ltd

| No. | Instrument no. | Equipment                            | Manufacturer        | Model No.  | S/N        | Last Calculator | Due Calculator |
|-----|----------------|--------------------------------------|---------------------|------------|------------|-----------------|----------------|
| 1   | BCT-EMC001     | EMI Test Receiver                    | R&S                 | ESCI       | 100687     | 2013-4-25       | 2014-4-24      |
| 2   | BCT-EMC002     | EMI Test Receiver                    | R&S                 | ESPI       | 100097     | 2013-11-1       | 2014-10-31     |
| 3   | BCT-EMC003     | Amplifier                            | HP                  | 8447D      | 1937A02492 | 2013-4-25       | 2014-4-24      |
| 4   | BCT-EMC018     | TRILOG<br>Broadband Test-<br>Antenna | SCHWARZBECK         | VULB9163   | 9163-324   | 2013-4-25       | 2014-4-24      |
| 5   | BCT-EMC021     | Triple-Loop<br>Antenna               | EVERFINE            | LLA-2      | 711002     | 2013-11-1       | 2014-10-31     |
| 6   | BCT-EMC026     | RF POWER<br>AMPLIFIER                | FRANKONIA           | FLL-75     | 1020A1109  | 2013-4-25       | 2014-4-24      |
| 7   | BCT-EMC029     | 6DB Attenuator                       | FRANKONIA           | N/A        | 1001698    | 2013-4-25       | 2014-4-24      |
| 8   | BCT-EMC032     | 10dB attenuator                      | ELECTRO-<br>METRICS | EM-7600    | 836        | 2013-4-25       | 2014-4-24      |
| 9   | BCT-EMC036     | Spectrum Analyzer                    | R&S                 | FSP        | 100397     | 2013-11-1       | 2014-10-31     |
| 10  | BCT-EMC037     | Broadband<br>preamplifier            | SCHWARZBECK         | BBV9718    | 9718-182   | 2013-4-25       | 2014-4-24      |
| 11  | BCT-EMC039     | Horn Antenna                         | SCHWARZBECK         | BBHA 9120D | 0437       | 2013-4-25       | 2014-4-24      |
| 12  | BCT-EMC038     | Horn Antenna                         | SCHWARZBECK         | BBHA9170   | 0483       | 2013-4-5        | 2014-4-4       |

### 3. SUMMARY OF TEST RESULTS

| FCC Rules                 | Description of Test              | Result |
|---------------------------|----------------------------------|--------|
| FCC §15.207               | AC Power Line Conducted Emission | Pass   |
| FCC §15.247(a)(1)         | Hopping Channel Bandwidth        | Pass   |
| FCC §15.247(a)(1)         | Hopping Channel Separation       | Pass   |
| FCC §15.247(a)(1)         | Number of Hopping Frequency Used | Pass   |
| FCC §15.247(a)(1)(iii)    | Dwell Time of Each Frequency     | Pass   |
| FCC §15.247(b)(1)         | Maximum Peak Output Power        | Pass   |
| FCC §15.247(d)            | Band Edges Emission              | Pass   |
| FCC §15.247(d)            | Spurious Radiated Emission       | Pass   |
| FCC §15.203/15.247(b)/(c) | Antenna Requirement              | Pass   |

## 4. TEST OF AC POWER LINE CONDUCTED EMISSION


### 4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency Range (MHz) | Limits ( dBuV) |         |
|-----------------------|----------------|---------|
|                       | Quasi-Peak     | Average |
| 0.150~0.500           | 66~56          | 56~46   |
| 0.500~5.000           | 56             | 46      |
| 5.000~30.00           | 60             | 50      |

### 4.2 Test Setup Diagram

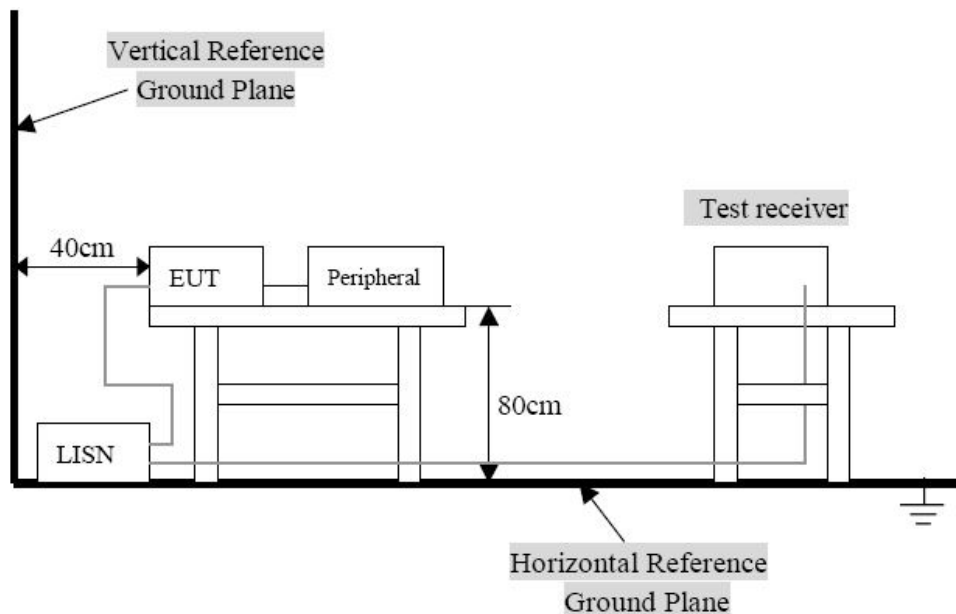

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.


### 4.3 Test Result

|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 23~25              | EUT: Tablet PC               |
| Humidity (%RH ) : 45~58                 | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

## Conducted Emission:

EUT: Tablet PC  
Operating Condition: Tx Mode  
Test Site: Shielded Room  
Operator: Andy  
Test Specification: AC 120V/60Hz for adapter  
Comment: Live Line

**SCAN TABLE: "Voltage (150K-30M) FIN"**  
Short Description: 150K-30M Voltage

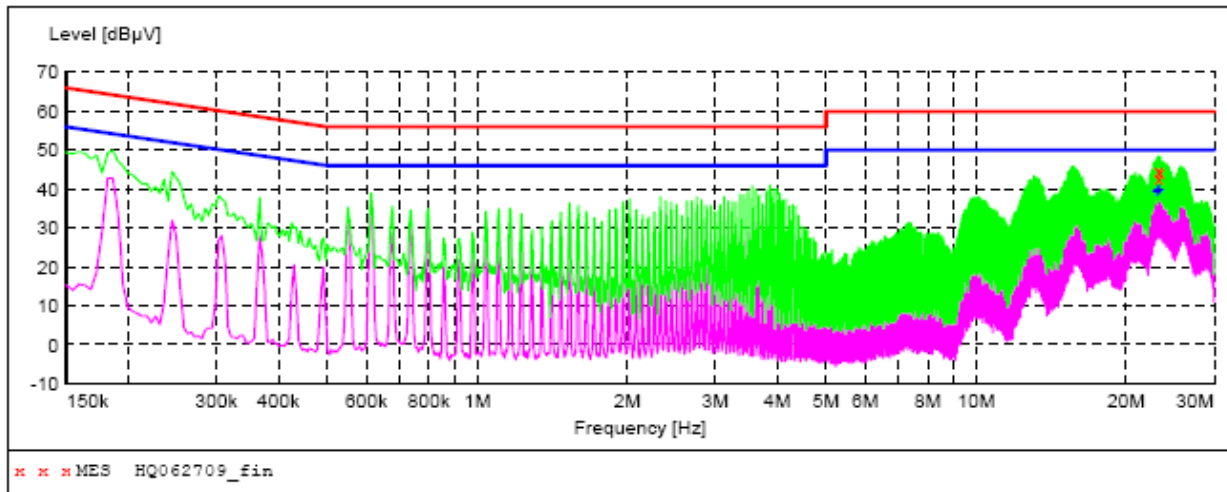

### MEASUREMENT RESULT: "HQ062709\_fin"

6/27/2013 14:58

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 23.208000        | 44.90         | 10.8         | 60            | 15.1         | QP       | L1   | GND |
| 23.257500        | 42.80         | 10.8         | 60            | 17.2         | QP       | L1   | GND |
| 23.392500        | 44.40         | 10.8         | 60            | 15.6         | QP       | L1   | GND |

### MEASUREMENT RESULT: "HQ062709\_fin2"


6/27/2013 14:58

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 23.086500        | 39.40         | 10.8         | 50            | 10.6         | AV       | L1   | GND |
| 23.203500        | 40.10         | 10.8         | 50            | 9.9          | AV       | L1   | GND |
| 23.208000        | 39.80         | 10.8         | 50            | 10.2         | AV       | L1   | GND |

## Conducted Emission:

EUT: Tablet PC  
Operating Condition: Tx Mode  
Test Site: Shielded Room  
Operator: Andy  
Test Specification: AC 120V/60Hz for adapter  
Comment: Neutral Line

**SCAN TABLE: "Voltage (150K-30M) FIN"**  
Short Description: 150K-30M Voltage

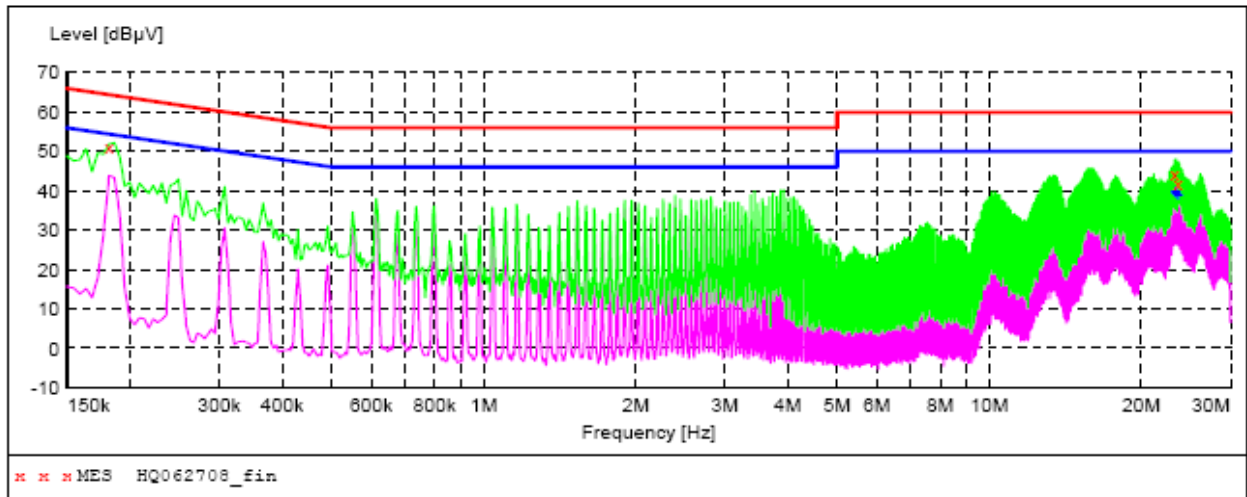

### MEASUREMENT RESULT: "HQ062708\_fin"

6/27/2013 14:56

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.181500         | 51.40         | 12.0         | 64            | 13.0         | QP       | N    | GND |
| 23.275500        | 44.50         | 10.8         | 60            | 15.5         | QP       | N    | GND |
| 23.590500        | 42.10         | 10.8         | 60            | 17.9         | QP       | N    | GND |

### MEASUREMENT RESULT: "HQ062708\_fin2"

6/27/2013 14:56


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 23.338500        | 39.70         | 10.8         | 50            | 10.3         | AV       | N    | GND |
| 23.397000        | 39.30         | 10.8         | 50            | 10.7         | AV       | N    | GND |
| 23.586000        | 38.70         | 10.8         | 50            | 11.3         | AV       | N    | GND |

## 5. Test of Hopping Channel Bandwidth

### 5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 EUT Setup

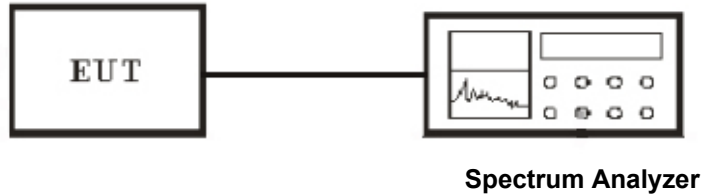

### 5.3 Test Equipment List and Details

See **section 2.5**.

### 5.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 5.5 Test Result

|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC               |
| Humidity (%RH) : 50~54                  | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |


| Modulation Type | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | Min. Limit (kHz) |
|-----------------|-------------|-----------------|----------------------|------------------|
| GFSK            | Low         | 2402.00         | 1052                 | >25              |
| GFSK            | Middle      | 2441.00         | 1056                 | >25              |
| GFSK            | High        | 2480.00         | 1056                 | >25              |

## Channel Low

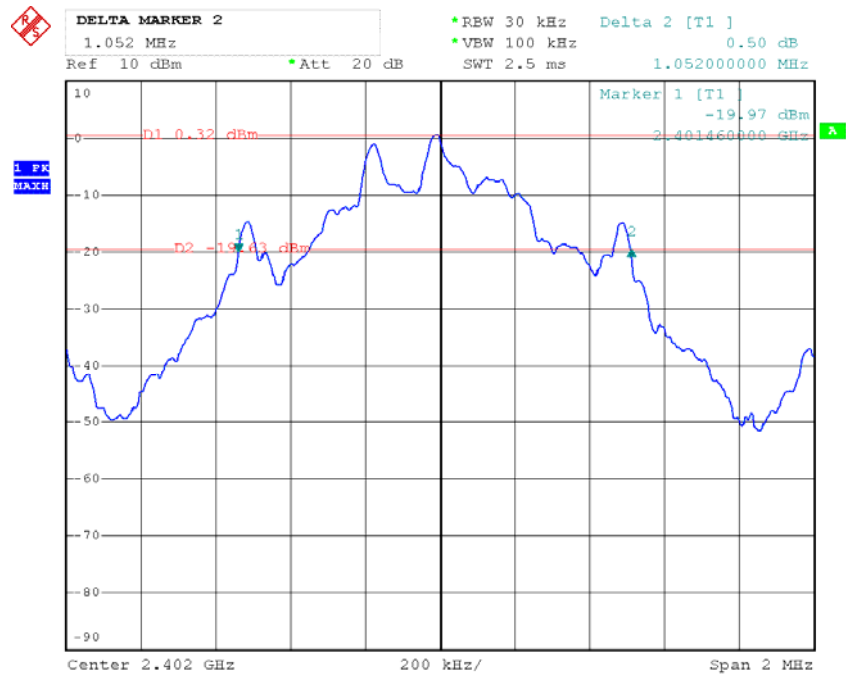


Date: 18.JUN.2013 22:01:26

## Channel Middle

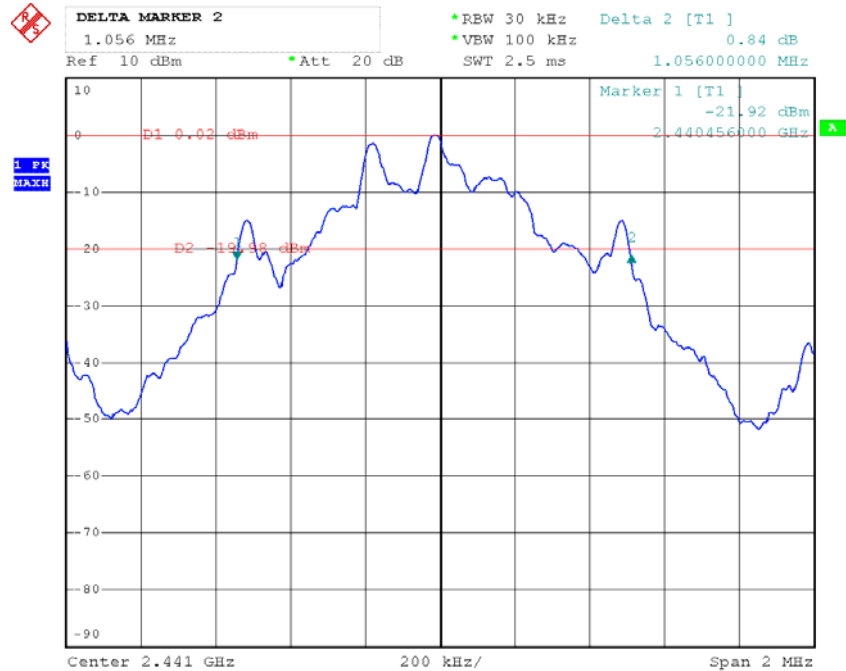

Date: 18.JUN.2013 21:59:59

## Channel High

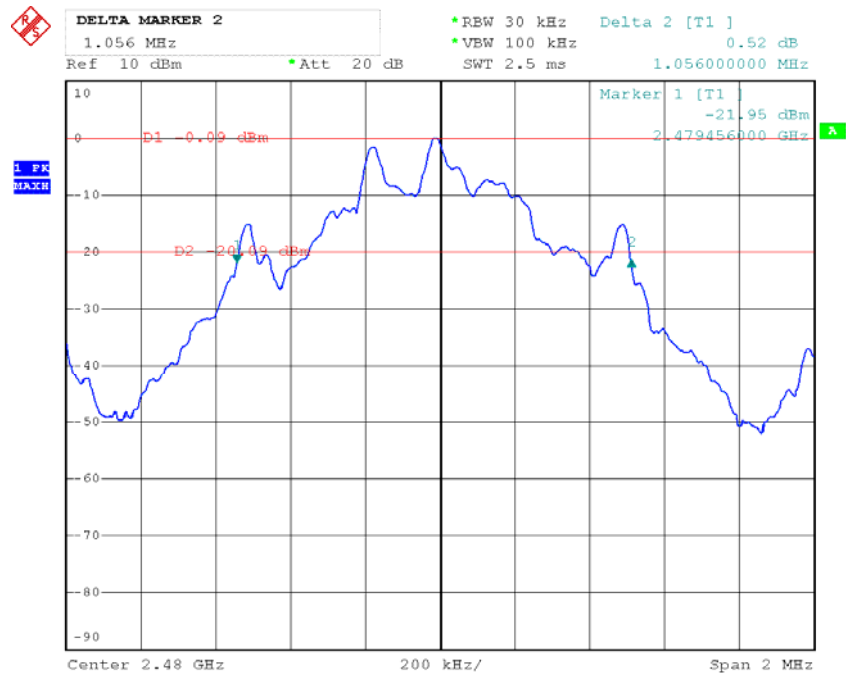


Date: 18.JUN.2013 21:58:48

## 6. Test of Hopping Channel Separation

### 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 6.2 EUT Setup

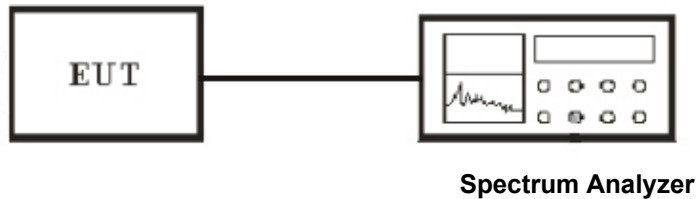

### 6.3 Test Equipment List and Details

See **section 2.5**.

### 6.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels  
 $RBW \geq 1\%$  of the span,  $VBW \geq RBW$   
Sweep = auto  
Detector function = peak  
Trace = max hold
3. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 6.5 Test Result

|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC               |
| Humidity (%RH ) : 50~54                 | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |


| Modulation Type | Frequency (MHz) | Channel Separation (MHz) | Min. Limit (kHz) |
|-----------------|-----------------|--------------------------|------------------|
| GFSK            | 2402~2403       | 1.000                    | >25              |
| GFSK            | 2441~2442       | 1.008                    | >25              |
| GFSK            | 2479~2480       | 1.000                    | >25              |

## Channel Low

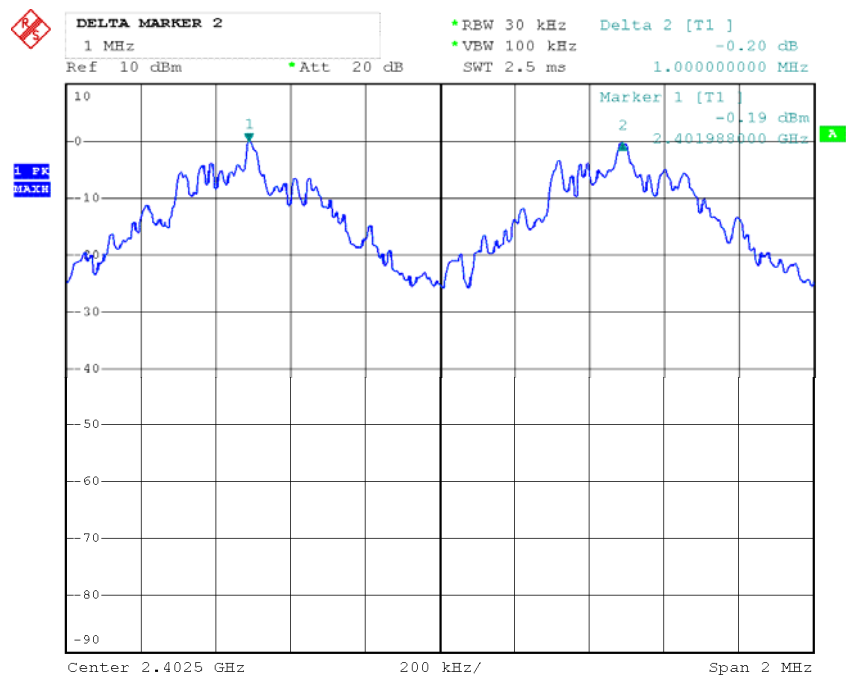


Date: 18.JUN.2013 23:30:44

## Channel Middle

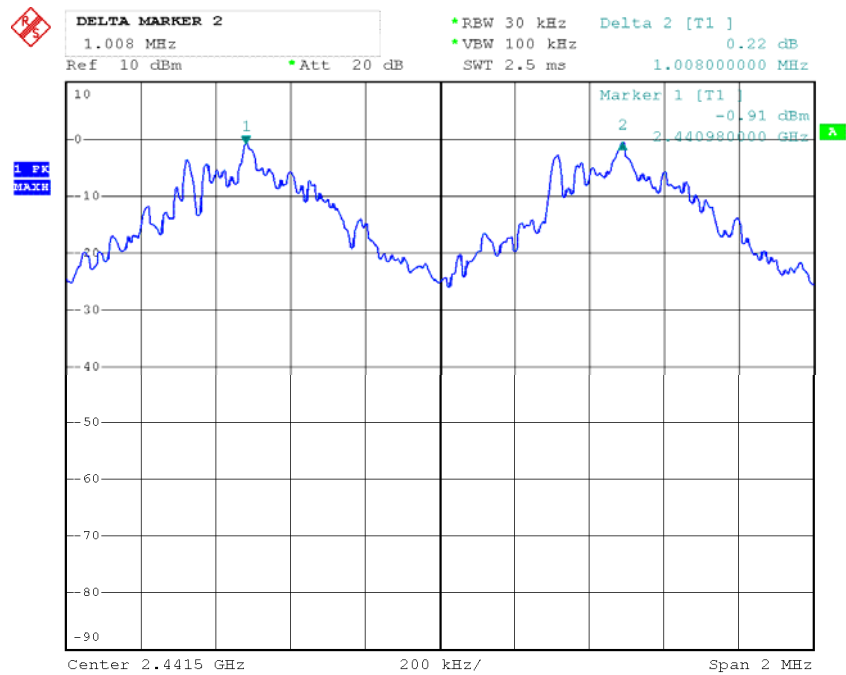

Date: 18.JUN.2013 23:32:37

## Channel High

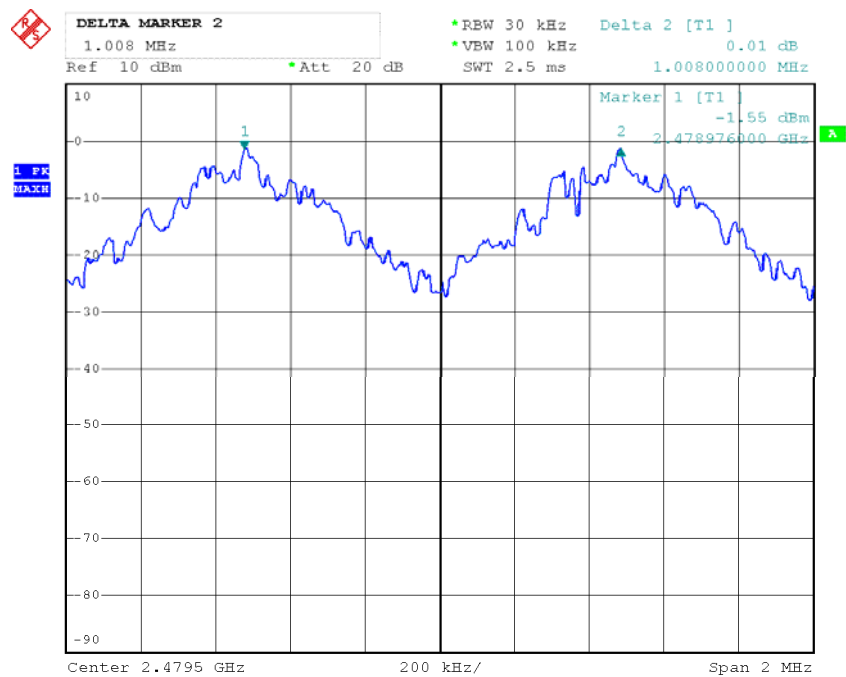


Date: 18.JUN.2013 23:34:25

## 7. Test of Number of Hopping Frequency

### 7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

### 7.2 EUT Setup

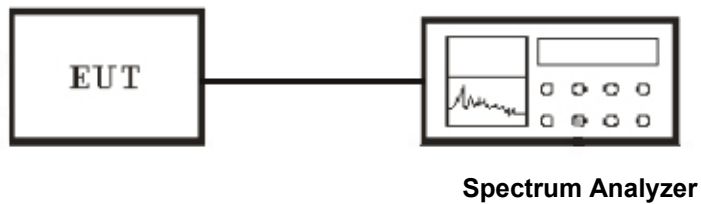

### 7.3 Test Equipment List and Details

See **section 2.5**.


### 7.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
Span = the frequency band of operation  
RBW  $\geq$  1% of the span, VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 7.5 Test Result

|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC               |
| Humidity (%RH ) : 50~54                 | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

| Modulation Type | Frequency (MHz) | Number of Hopping Channels | Min. Limit (kHz) |
|-----------------|-----------------|----------------------------|------------------|
| GFSK            | 2402.0~2480.0   | 79                         | >15              |

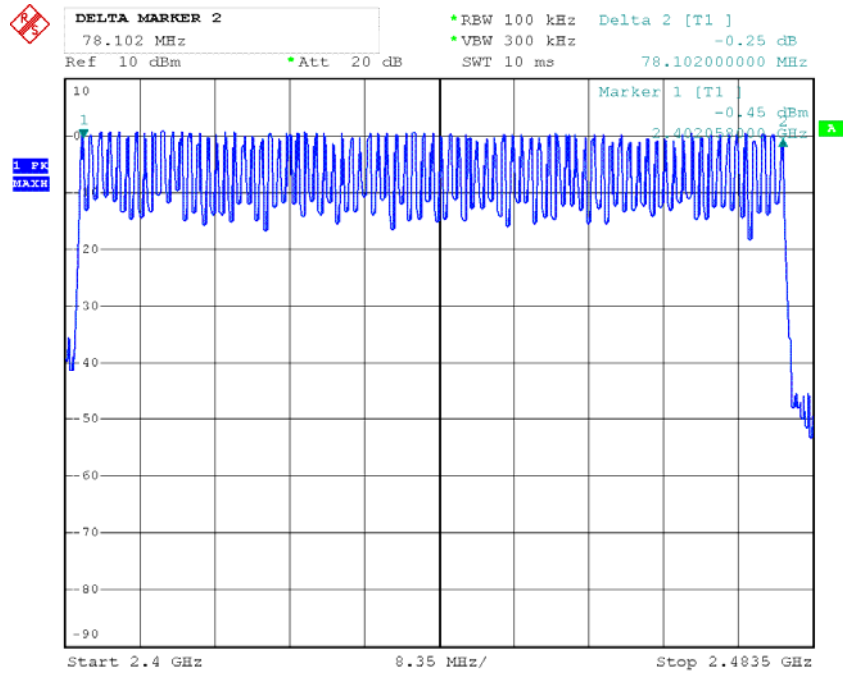


Date: 17.JUN.2013 21:51:56

## 8. Test of Dwell Time of Each Frequency

### 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 8.2 EUT Setup

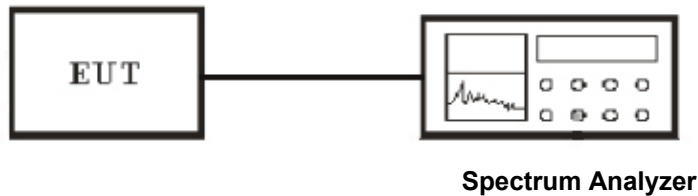

### 8.3 Test Equipment List and Details

See **section 2.5**.

### 8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:
  - Span = zero span, centered on a hopping channel
  - RBW = 1 MHz, VBW  $\geq$  RBW
  - Sweep = as necessary to capture the entire dwell time per hopping channel
  - Detector function = peak
  - Trace = max hold
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. Measure the maximum time duration of one single pulse.

### 8.5 Test Result

|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC               |
| Humidity (%RH ) : 50~54                 | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

DH1

Dwell time=  $t \cdot (1.6/2/79) \cdot 31.6$

DH3

Dwell time=  $t \cdot (1.6/4/79) \cdot 31.6$

DH5

Dwell time=  $t \cdot (1.6/6/79) \cdot 31.6$

### Low Channel

| Modulation Type |     | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|-----|--------------|-----------------|------------|
| GFSK            | DH1 | 0.400        | 128             | 400        |
| GFSK            | DH3 | 1.655        | 264.8           | 400        |
| GFSK            | DH5 | 2.912        | 310.613         | 400        |


### Middle Channel

| Modulation Type |     | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|-----|--------------|-----------------|------------|
| GFSK            | DH1 | 0.400        | 128             | 400        |
| GFSK            | DH3 | 1.655        | 264.8           | 400        |
| GFSK            | DH5 | 2.912        | 310.613         | 400        |

### High Channel


| Modulation Type |     | Reading (ms) | Dwell Time (ms) | Limit (ms) |
|-----------------|-----|--------------|-----------------|------------|
| GFSK            | DH1 | 0.400        | 128             | 400        |
| GFSK            | DH3 | 1.655        | 264.8           | 400        |
| GFSK            | DH5 | 2.912        | 310.613         | 400        |

## DH1 Channel Low

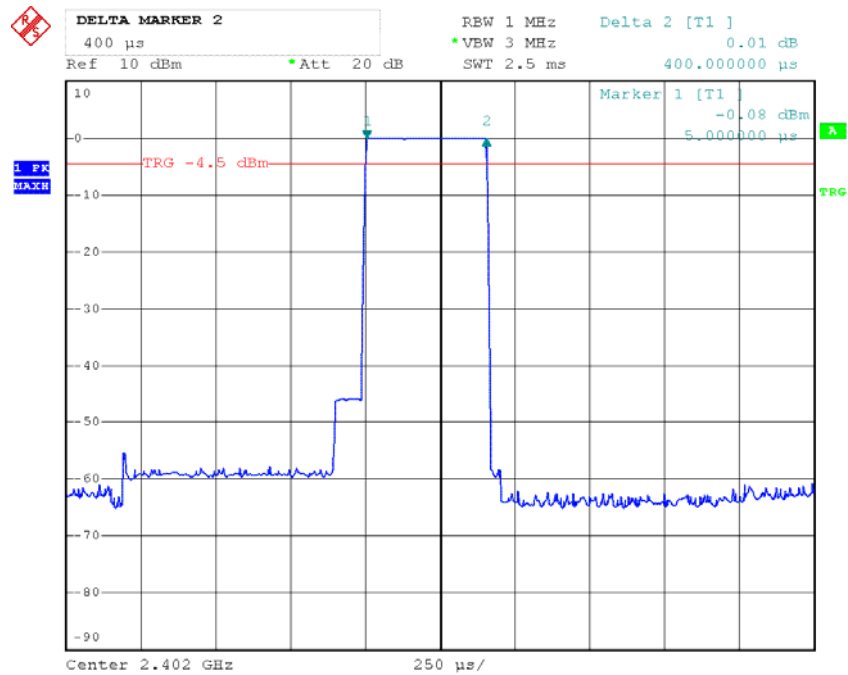


Date: 18.JUN.2013 23:42:39

## Channel Middle

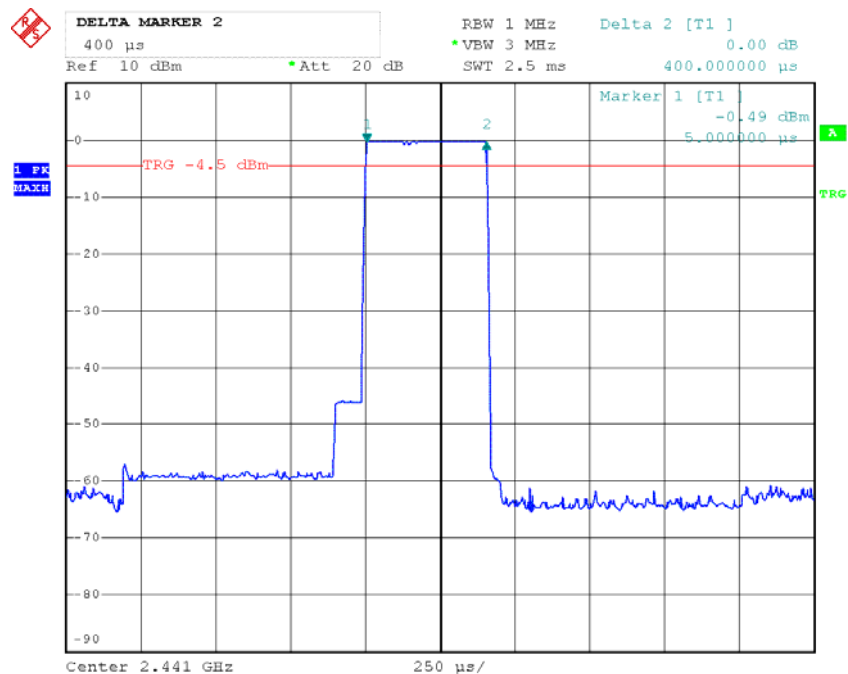


Date: 18.JUN.2013 23:42:29

## Channel High

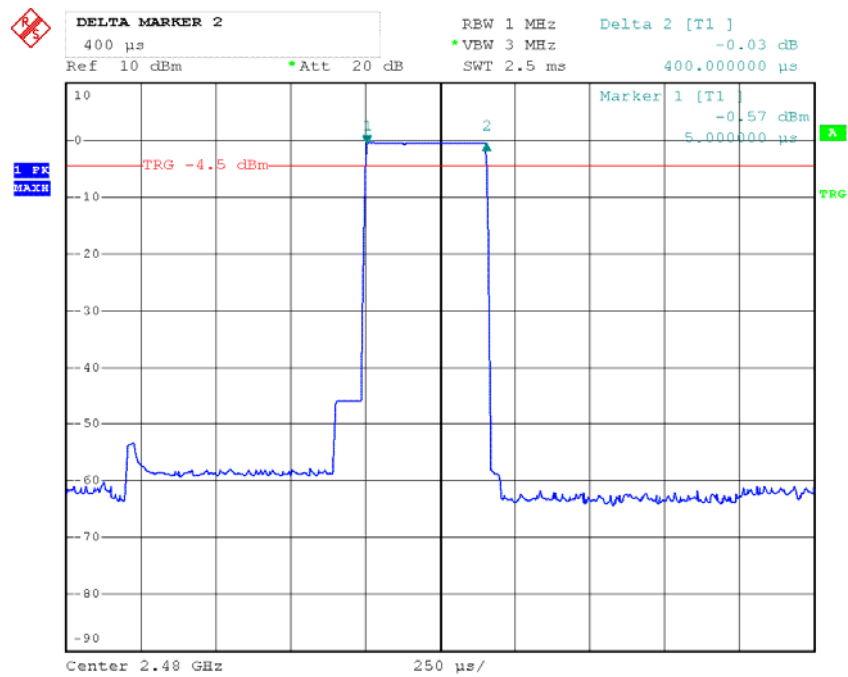


Date: 18.JUN.2013 23:42:19

## DH3 Channel Low

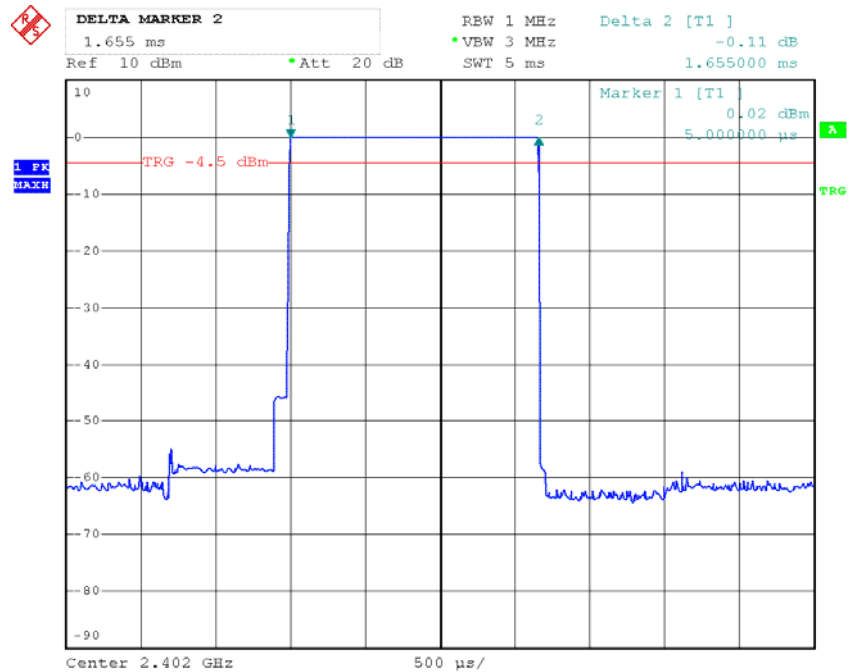


Date: 18.JUN.2013 23:40:12

## Channel Middle

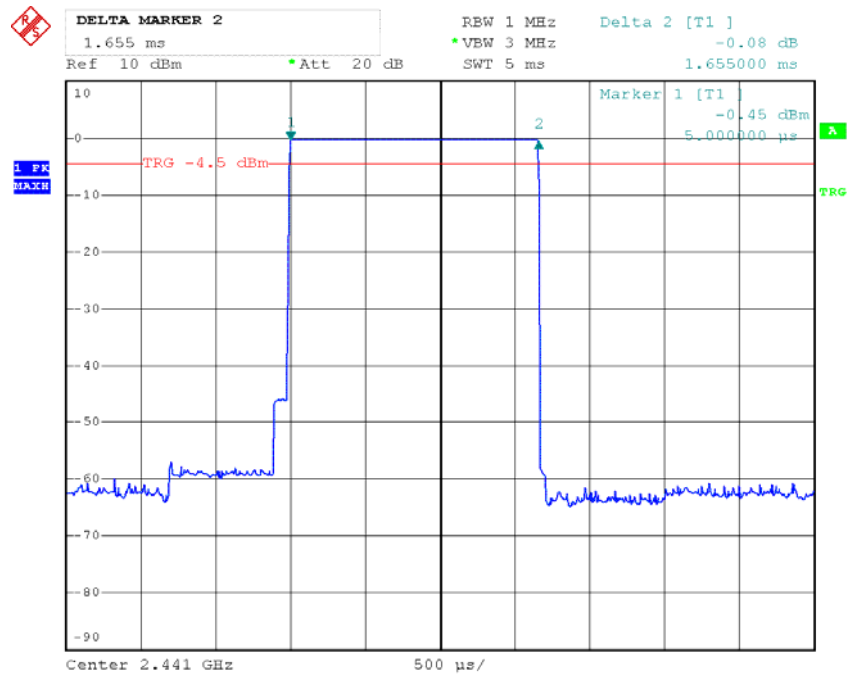


Date: 18.JUN.2013 23:40:28

## Channel High

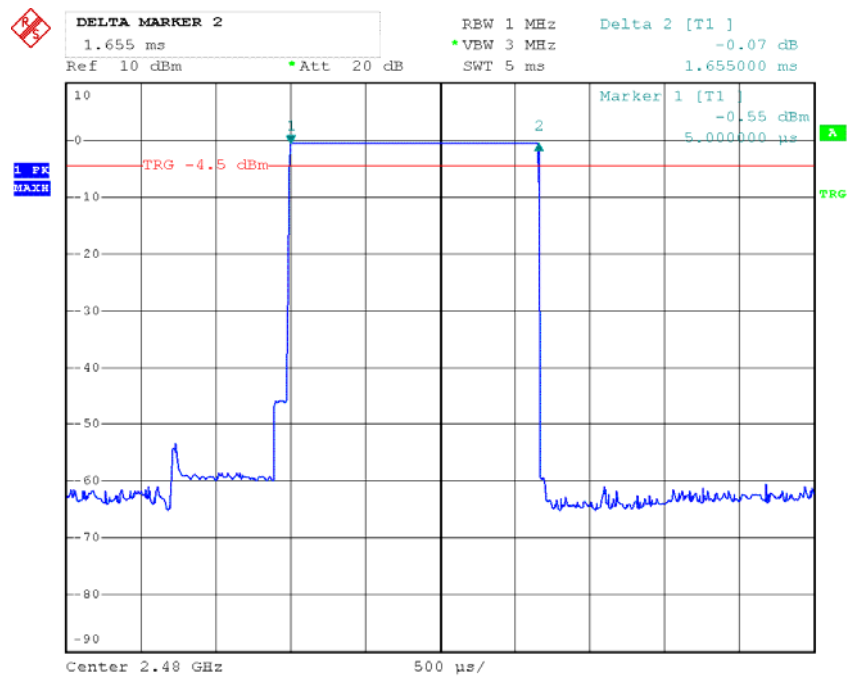


Date: 18.JUN.2013 23:40:41

## DH5 Channel Low

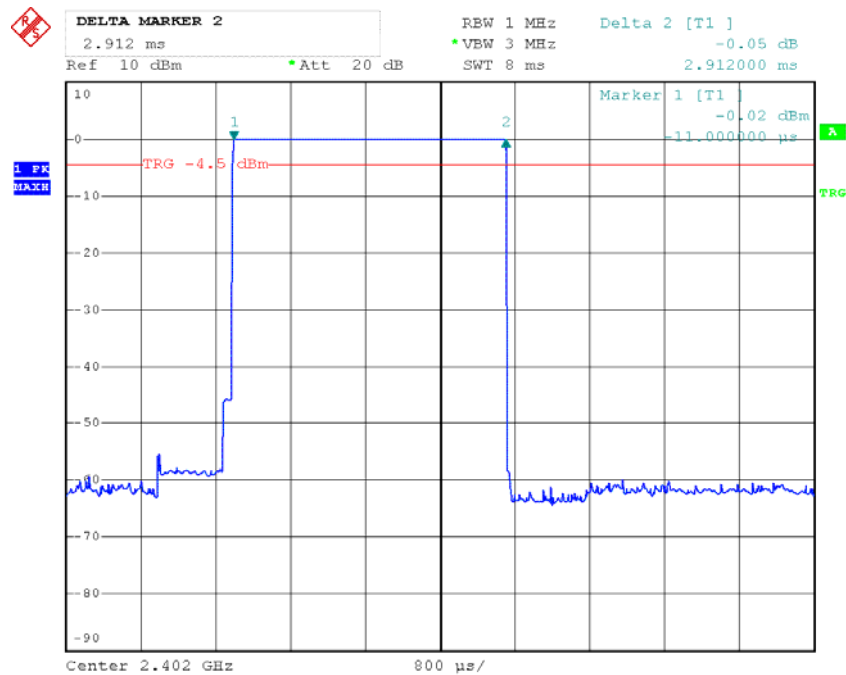


Date: 18.JUN.2013 23:44:38

## Channel Middle

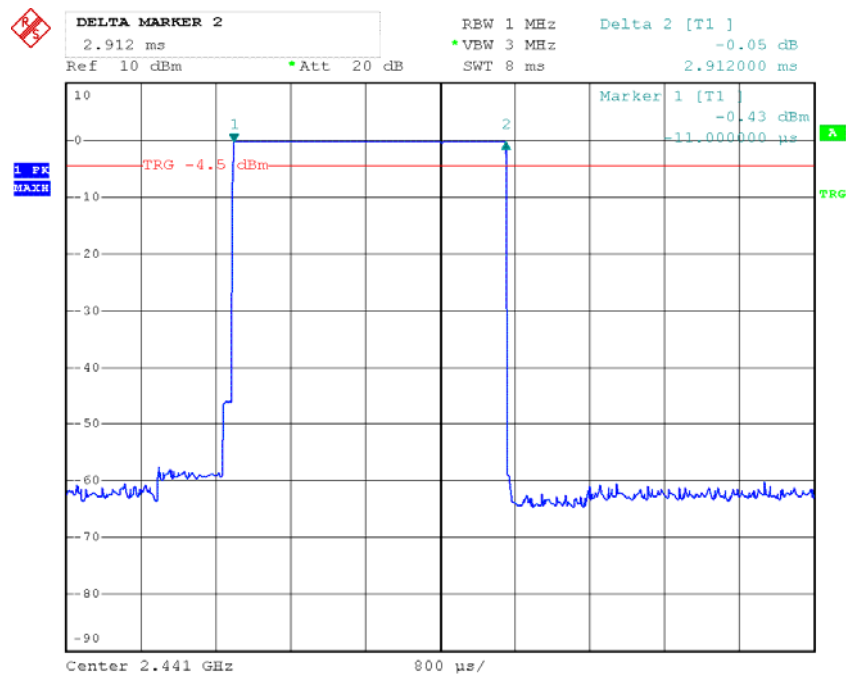

Date: 18.JUN.2013 23:44:58

## Channel High

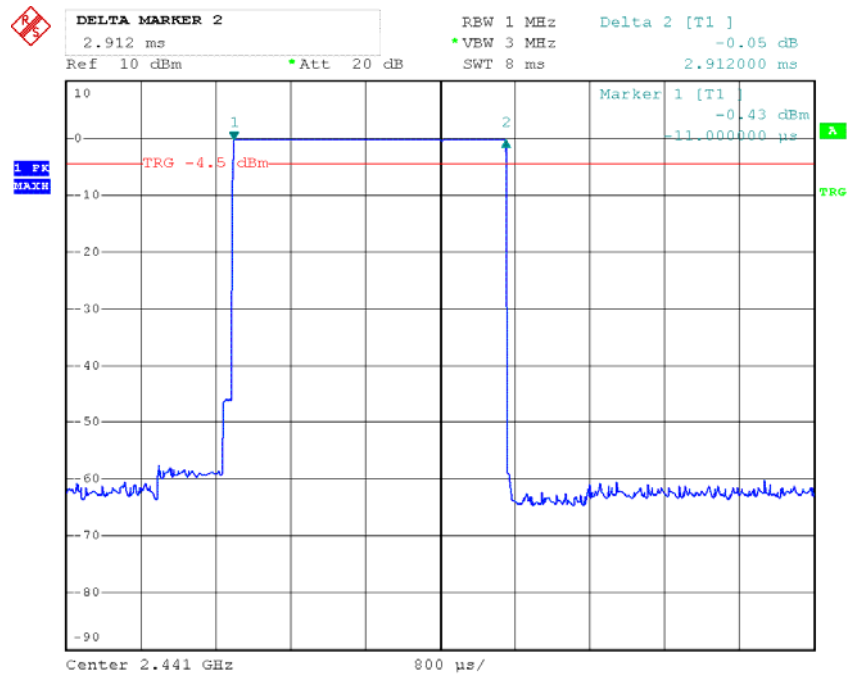


Date: 18.JUN.2013 23:44:58

## 9. Test of Maximum Peak Output Power

### 9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

### 9.2 EUT Setup

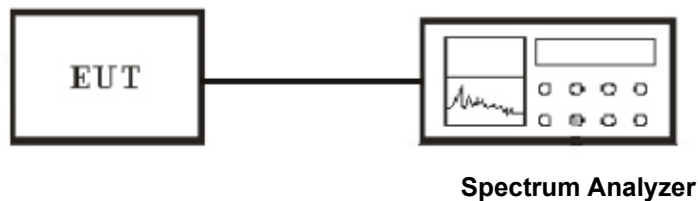

### 9.3 Test Equipment List and Details

See **section 2.5**.

### 9.4 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

### 9.5 Test Result

|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC               |
| Humidity (%RH ) : 50~54                 | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |


| Modulation Type | Channel No. | Frequency (MHz) | Output Power (dBm) | Limits (dBm) | Margin (dB) |
|-----------------|-------------|-----------------|--------------------|--------------|-------------|
| GFSK            | Low         | 2402.00         | 0.57               | 21           | 20.43       |
| GFSK            | Middle      | 2441.00         | 0.17               | 21           | 20.83       |
| GFSK            | High        | 2480.00         | 0.12               | 21           | 20.88       |

## Channel Low

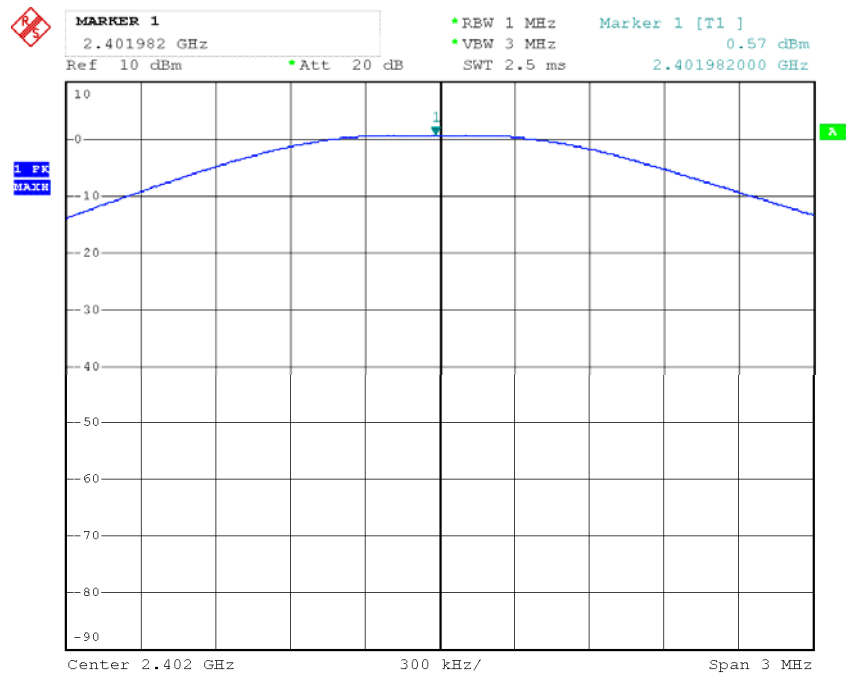


Date: 18.JUN.2013 21:56:10

## Channel Middle

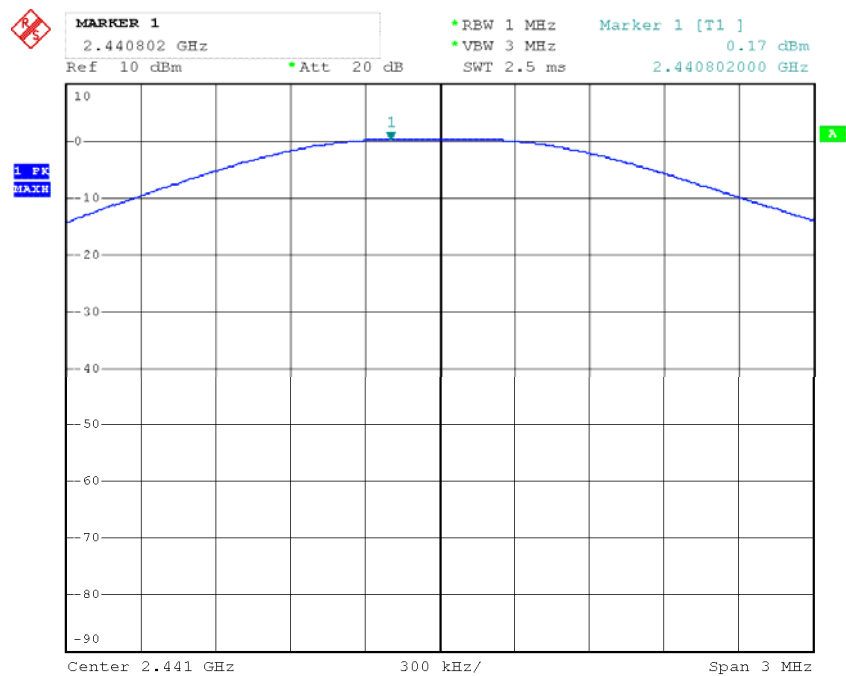

Date: 18.JUN.2013 21:56:34

## Channel High

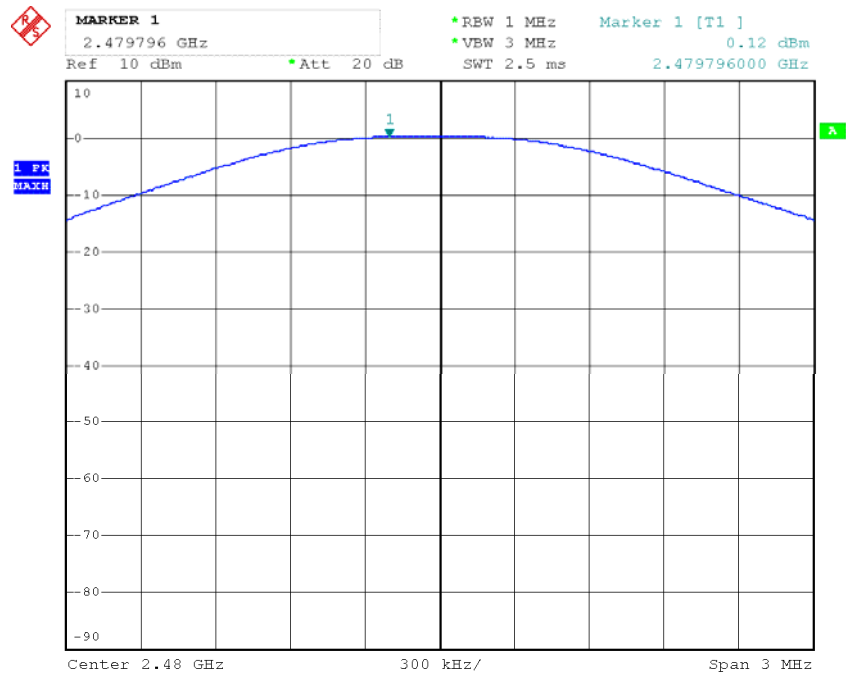

Date: 18.JUN.2013 21:57:21

## 10. Test of Band Edges Emission

### 10.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 10.2 EUT Setup

#### Radiated Measurement Setup


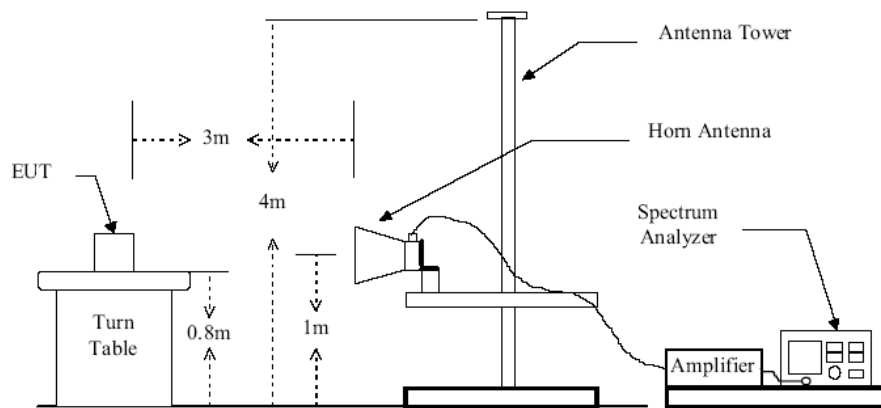


Figure 2 : Frequencies measured above 1 GHz configuration

#### Conducted Measurement Setup

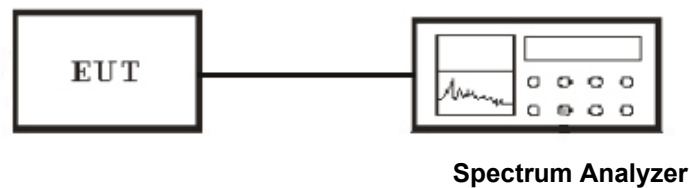

### 10.3 Test Equipment List and Details

See section 2.5.

### 10.4 Test Procedure

#### Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.

3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

#### **Radiated Measurement**

1. Configure the EUT according to ANSI C63.4-2003
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

#### **10.5 Test Result**


|                                         |                              |
|-----------------------------------------|------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC               |
| Humidity (%RH) : 50~54                  | M/N: IC-8                    |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Tx Mode |

#### **Radiated Test Result**


##### **Worst Case**

| Frequency (MHz) | Antenna Polarization | Emission Read Value (dBμV/m) | Limits (dBμV/m) |
|-----------------|----------------------|------------------------------|-----------------|
| 2390            | H                    | 38.52                        | 54              |
| 2483.6          | H                    | 37.54                        | 54              |

## Low Channel

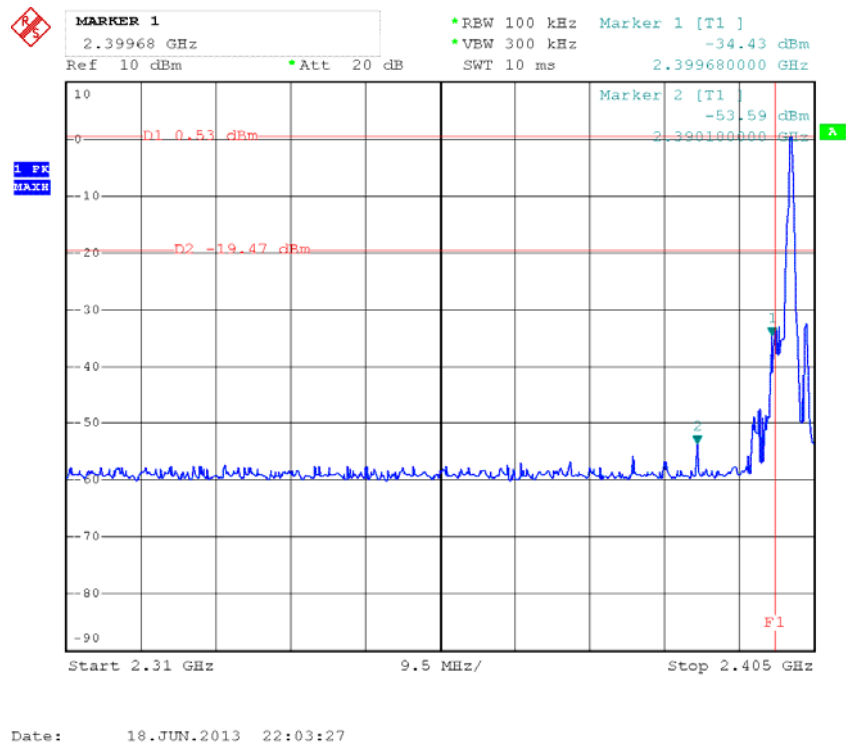

## High Channel

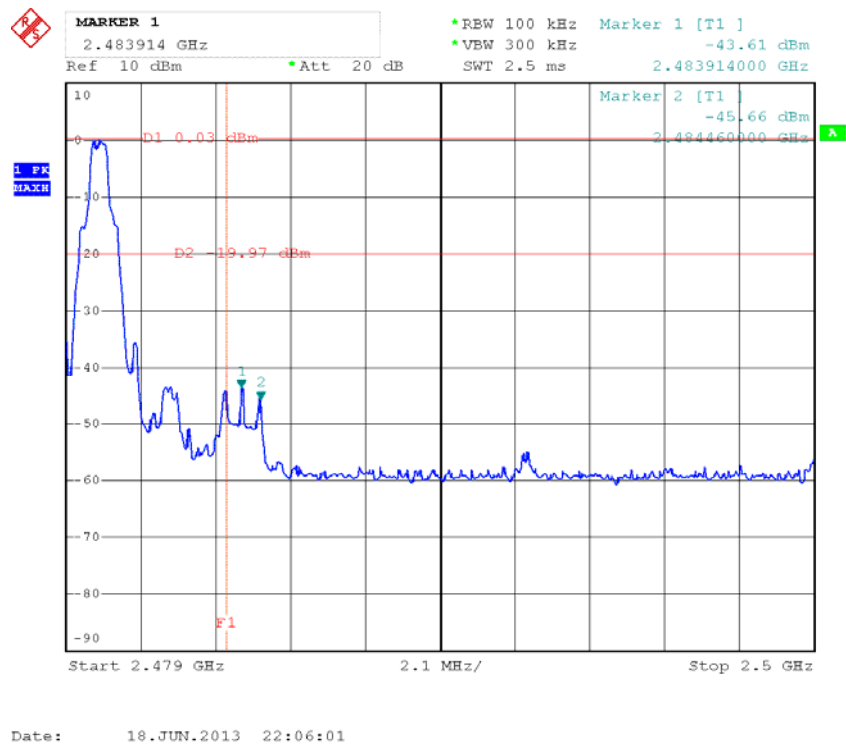

## 11. Test of Spurious Radiated Emission

### 11.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 11.2 EUT Setup

#### Radiated Measurement Setup

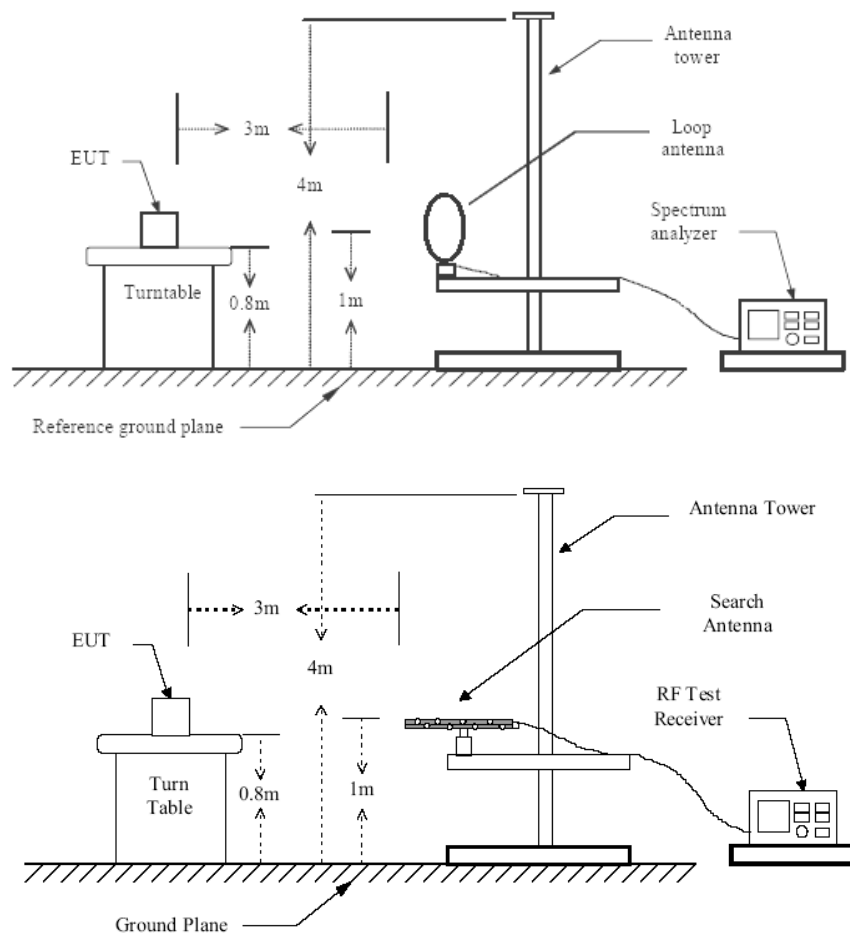


Figure 1 : Frequencies measured below 1 GHz configuration


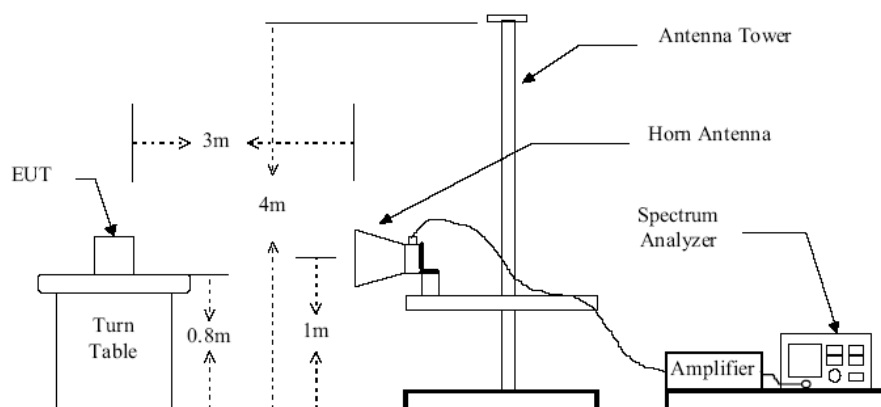


Figure 2 : Frequencies measured above 1 GHz configuration

## Conducted Measurement Setup

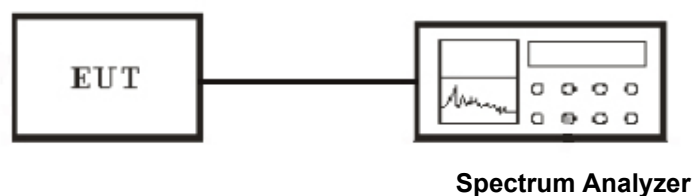

## 11.3 Test Equipment List and Details

See **section 2.5**.

## 11.4 Test Procedure

### Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2009
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 26GHz.
9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

10. For emission above 1GHz, Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.

11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

### Conducted Measurement

1. For emission above 1GHz to 26G,conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

### 11.5 Test Result

|                                         |                                        |
|-----------------------------------------|----------------------------------------|
| Temperature ( °C ) : 22~23              | EUT: Tablet PC                         |
| Humidity (%RH ) : 50~54                 | M/N: IC-8                              |
| Barometric Pressure ( mbar ) : 950~1000 | Operation Condition: Charging, playing |

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

1. EUT was lie vertically, and then its Antenna oriented upward
2. EUT was lie vertically, and then its Antenna oriented downward
3. EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

### Worst case Spurious Emission (9k~30MHz)

| Frequency | Meter Reading | Antenna Factor | Cable Loss | Emission Levels | Limits    | Margin | Detector Mode |
|-----------|---------------|----------------|------------|-----------------|-----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB/M)         | (dB)       | (dBμV/M)        | (dB μV/M) | (dB)   | PK/QP         |
| 6.57      | 23.67         | 8.15           | 1.03       | 32.85           | 67        | -34.15 | QP            |
| 15.22     | 20.83         | 9.04           | 1.19       | 31.06           | 49.5      | -18.44 | QP            |
| 20.06     | 21.34         | 9.13           | 1.08       | 31.55           | 49.5      | -17.95 | QP            |
| 25.23     | 20.69         | 8.22           | 1.66       | 30.57           | 49.5      | -18.93 | QP            |

**Worst case BDR 1M  
Spurious Emission (30~1000MHz)**

Horizontal

| Frequency | Meter Reading | Tansd | Limits     | Margin | Detector<br>Mode |
|-----------|---------------|-------|------------|--------|------------------|
| (MHz)     | (dBμV)        | (dB)  | (dB μ V/M) | (dB)   | PK/QP            |
| 61.04     | 27.2          | 14.2  | 40         | -12.8  | QP               |
| 92.03     | 26.5          | 13.5  | 40         | -13.5  | QP               |
| 150.5     | 26.3          | 12.6  | 43.5       | -17.2  | QP               |
| 222.5     | 37.6          | 16.1  | 46         | -8.4   | QP               |
| 420       | 30.2          | 21.7  | 46         | -15.8  | QP               |
| 912.5     | 37            | 29.1  | 46         | -9     | QP               |
| N/A       | ----          | ----  | ----       | ----   | ----             |

Vertical

| Frequency | Meter Reading | Tansd | Limits     | Margin | Detector<br>Mode |
|-----------|---------------|-------|------------|--------|------------------|
| (MHz)     | (dBμV)        | (dB)  | (dB μ V/M) | (dB)   | PK/QP            |
| 46.3      | 33.6          | 16.1  | 40         | -6.4   | QP               |
| 55.2      | 32.1          | 13.5  | 40         | -7.9   | QP               |
| 92.8      | 28.6          | 13.4  | 40         | -11.4  | QP               |
| 230.6     | 34.7          | 14.8  | 46         | -11.3  | QP               |
| 520.5     | 32.5          | 24.7  | 46         | -13.5  | QP               |
| 965.3     | 38            | 28.3  | 54         | -16    | QP               |
| N/A       | ----          | ----  | ----       | ----   | ----             |

**Worst case  
Spurious Emission test data above 1G**


| Channel Low                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |            |              |               |               |                |                 |              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|--------------|---------------|---------------|----------------|-----------------|--------------|
| Maximum Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Polarity and Level |            |              |               |               | Limit (dBμV/m) | Margin (dBμV/m) | Mark (P/Q/A) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Polarity           | Height (m) | Reading dBμV | Transd        | Result dBμV/m |                |                 |              |
| 1793.333                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | H                  | 1          | 46.09        | -9.41         | 36.68         | 74             | -37.32          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 35.24        | <b>-9.33</b>  | 25.91         | 54             | -28.09          | A            |
| 1878.333                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | V                  | 1          | 48.14        | -10.17        | 37.97         | 74             | -36.03          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 36.78        | <b>-10.05</b> | 26.73         | 54             | -27.27          | A            |
| 2402.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 69.2         | -7.23         | 61.97         | ---            | ---             | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 67.5         | -7.23         | 60.27         | ---            | ---             | A            |
| 2402.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 69.6         | -7.23         | 62.37         | ---            | ---             | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 66.7         | -7.23         | 59.47         | ---            | ---             | A            |
| 4804.03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 44.23        | 2.14          | 46.37         | 74             | -27.63          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 37.22        | 2.14          | 39.36         | 54             | -14.64          | A            |
| 4804.03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 45.34        | 2.14          | 47.48         | 74             | -26.52          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 38.29        | 2.14          | 40.43         | 54             | -13.57          | A            |
| 7206.05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 47.19        | 6.58          | 53.77         | 74             | -20.23          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 38.52        | 6.58          | 45.1          | 54             | -8.9            | A            |
| 7206.05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 46.63        | 6.58          | 53.21         | 74             | -20.79          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 37.28        | 6.58          | 43.86         | 54             | -10.14          | A            |
| 9625.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 47.65        | 8.25          | 55.9          | 74             | -18.1           | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 38.73        | 8.13          | 46.86         | 54             | -7.14           | A            |
| 9617.06                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 47.26        | 8.07          | 55.33         | 74             | -18.67          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 38.18        | 8.22          | 46.4          | 54             | -7.6            | A            |
| 12011.27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---           | ---           | ---            | ---             |              |
| 14415.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---           | ---           | ---            | ---             |              |
| 16824.09                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---           | ---           | ---            | ---             |              |
| 19226.15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---           | ---           | ---            | ---             |              |
| 21628.22                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---           | ---           | ---            | ---             |              |
| 24030.17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---           | ---           | ---            | ---             |              |
| Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier<br>Margin = Level-Limit<br>Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value<br>2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.<br>3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.<br>4. The test limit distance is 3m limit |                    |            |              |               |               |                |                 |              |

| Channel Mid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |            |              |        |               |                |                 |              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|--------------|--------|---------------|----------------|-----------------|--------------|
| Maximum Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Polarity and Level |            |              |        |               | Limit (dBμV/m) | Margin (dBμV/m) | Mark (P/Q/A) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Polarity           | Height (m) | Reading dBμV | Transd | Result dBμV/m |                |                 |              |
| 2441.02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 69.8         | -7.15  | 62.65         | ---            | ---             | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 67.55        | -7.15  | 60.4          | ---            | ---             | A            |
| 2441.02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 68.24        | -7.15  | 61.09         | ---            | ---             | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 67.31        | -7.15  | 60.16         | ---            | ---             | A            |
| 4882.05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 45.23        | 2.52   | 47.75         | 74             | -26.25          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 36.41        | 2.52   | 38.93         | 54             | -15.07          | A            |
| 4882.05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 46.52        | 2.52   | 49.04         | 74             | -24.96          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 37.49        | 2.52   | 40.01         | 54             | -13.99          | A            |
| 7323.07                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 47.28        | 6.71   | 53.99         | 74             | -20.01          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 39.22        | 6.71   | 45.93         | 54             | -8.07           | A            |
| 7323.07                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 47.35        | 6.71   | 54.06         | 74             | -19.94          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 39.75        | 6.71   | 46.46         | 54             | -7.54           | A            |
| 9753.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | H                  | 1          | 45.19        | 8.31   | 53.5          | 74             | -20.5           | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 36.28        | 8.22   | 44.5          | 54             | -9.5            | A            |
| 9745.21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | V                  | 1          | 46.23        | 8.26   | 54.49         | 74             | -19.51          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |            | 36.57        | 8.17   | 44.74         | 54             | -9.26           | A            |
| 12213.11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 14656.13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 17067.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 19538.36                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 21959.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 24420.21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier<br>Margin = Level-Limit<br>Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value<br>2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.<br>3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.<br>4. The test limit distance is 3m limit |                    |            |              |        |               |                |                 |              |

| Channel High                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                    |            |              |        |               |                |                 |              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|--------------|--------|---------------|----------------|-----------------|--------------|
| Maximum Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Polarity and Level |            |              |        |               | Limit (dBμV/m) | Margin (dBμV/m) | Mark (P/Q/A) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Polarity           | Height (m) | Reading dBμV | Transd | Result dBμV/m |                |                 |              |
| 2480.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | H                  | 1          | 68.9         | -7.03  | 61.87         | ---            | ---             | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 65.2         | -7.03  | 58.17         | ---            | ---             | A            |
| 2480.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | V                  | 1          | 68.2         | -7.03  | 61.17         | ---            | ---             | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 67.5         | -7.03  | 60.47         | ---            | ---             | A            |
| 2898.33                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | H                  | 1          | 44.62        | -4.65  | 39.97         | 74             | -34.03          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 37.05        | -4.23  | 32.82         | 54             | -21.18          | A            |
| 2898.33                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | V                  | 1          | 45.22        | -4.65  | 40.57         | 74             | -33.43          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 37.53        | -4.23  | 33.3          | 54             | -20.7           | A            |
| 4960.02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | H                  | 1          | 48.07        | 2.63   | 50.7          | 74             | -23.3           | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 39.22        | 2.63   | 41.85         | 54             | -12.15          | A            |
| 4960.02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | V                  | 1          | 48.13        | 2.63   | 50.76         | 74             | -23.24          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 39.04        | 2.63   | 41.67         | 54             | -12.33          | A            |
| 7440.03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | H                  | 1          | 47.25        | 7.12   | 54.37         | 74             | -19.63          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 38.14        | 7.12   | 45.26         | 54             | -8.74           | A            |
| 7440.03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | V                  | 1          | 47.35        | 7.12   | 54.47         | 74             | -19.53          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 38.06        | 7.12   | 45.18         | 54             | -8.82           | A            |
| 9925.04                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | H                  | 1          | 47.82        | 8.35   | 56.17         | 74             | -17.83          | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 35.84        | 8.28   | 44.12         | 54             | -9.88           | A            |
| 9925.04                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | V                  | 1          | 47.35        | 8.35   | 55.7          | 74             | -18.3           | P            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |            | 36.42        | 8.28   | 44.7          | 54             | -9.3            | A            |
| 12423.05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 14885.16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 17370.07                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 19845.28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 22330.13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| 24810.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ---                |            | ---          | ---    | ---           | ---            | ---             |              |
| Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier<br>Margin = Level-Limit<br>Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value<br>2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.<br>3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.<br>4. The test limit distance is 3m limit |                    |            |              |        |               |                |                 |              |


## Conducted Spurious Emission

### Channel Low

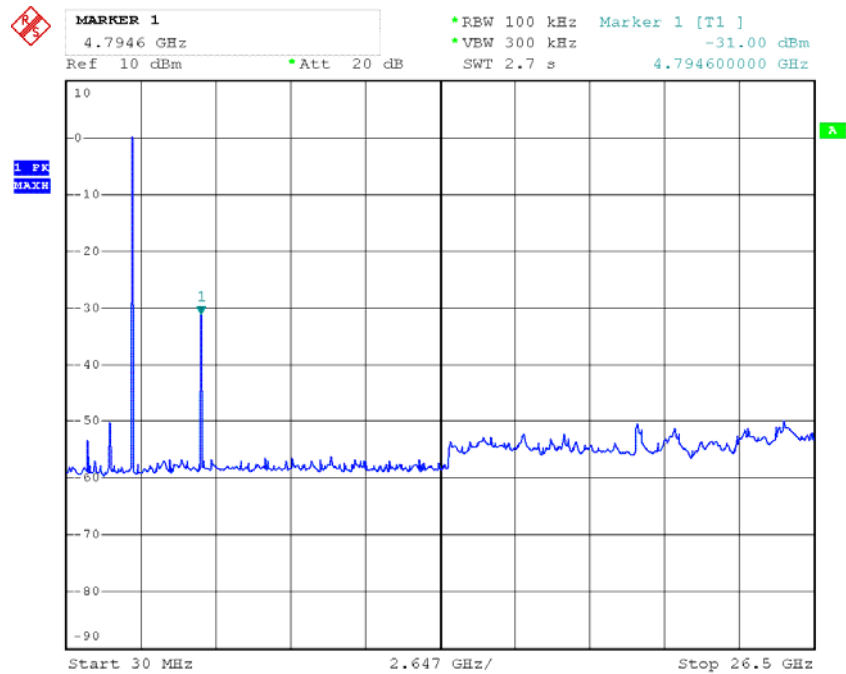


Date: 18.JUN.2013 22:10:32

### Channel Mid

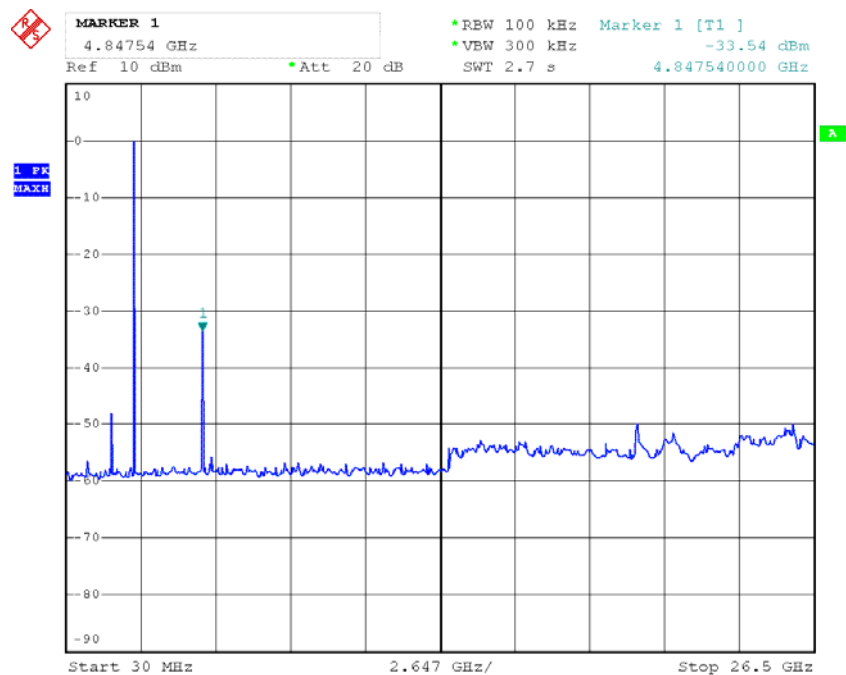

Date: 18.JUN.2013 22:08:42

## Channel High

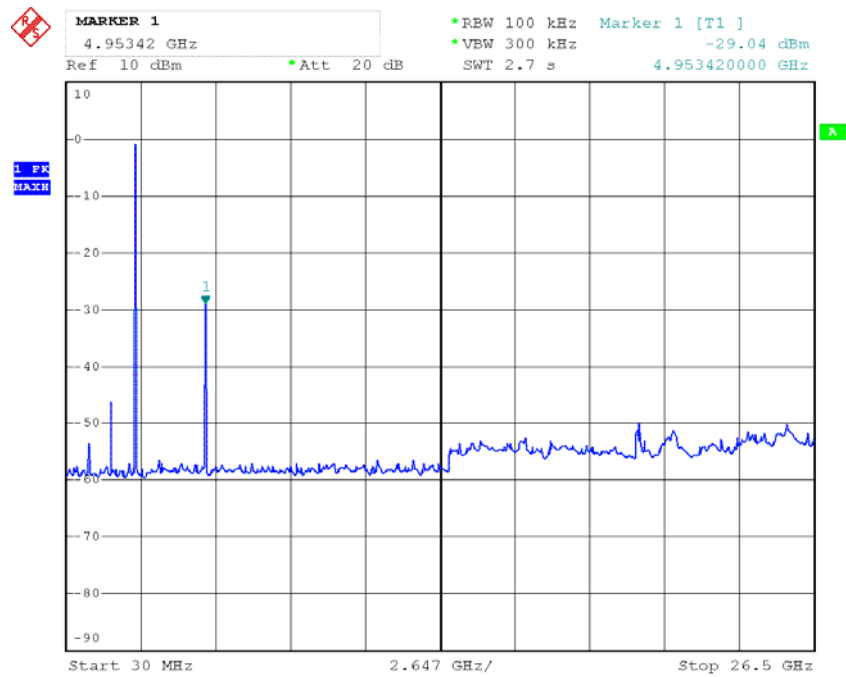

Date: 18.JUN.2013 22:07:09

## **12. ANTENNA REQUIREMENT**

### **12.1 Standard Applicable**

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### **12.2 Antenna Connected Construction**

The antenna is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.