

Test Report

FCC Part15 Subpart C

Product Name : BLUETOOTH SPEAKER

Model No. : LTG300

FCC ID : Y2SLTG300

IC : 9452A-LTG300

Applicant : LIBRATONE A/S

Address : Sundkaj 9, DK-2150 Nordhavn, Denmark

Date of Receipt : Mar. 21, 2016

Test Date : Mar. 21, 2016~ Apr. 08, 2016

Issued Date : Apr. 28, 2016

Report No. : 1632087R-RF-US-P06V01

Report Version : V 1.1

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : Apr. 28, 2016

Report No. : 1632087R-RF-US-P06V01



Product Name : BLUETOOTH SPEAKER
Applicant : LIBRATONE A/S
Address : Sundkaj 9, DK-2150 Nordhavn, Denmark
Manufacturer : LIBRATONE A/S
Address : Sundkaj 9, DK-2150 Nordhavn, Denmark
Model No. : LTG300
FCC ID : Y2SLTG300
IC : 9452A-LTG300
Brand Name : LIBRATONE
EUT Voltage : DC 5V
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2015
ANSI C63.4: 2014; ANSI C63.10: 2013
Industry Canada RSS-Gen Issue 4/RSS-247 Issue 1
Test Result : Complied
Performed Location : Quietek Corporation - Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : Alice Ni
(Senior Adm. Specialist: Alice Ni)

Reviewed By : Frank He
(Senior Engineer: Frank He)

Approved By : Harry Zhao
(Engineering Manager : Harry Zhao)

Laboratory Information

We, **QuieTek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC, TAF
USA	:	FCC
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/english/about/certificates.aspx?bval=5>
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : http://www.quietek.com/index_en.aspx
If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Mode of Operation	9
1.3. Tested System Details	10
1.4. Configuration of Tested System.....	11
1.5. EUT Exercise Software.....	13
2. Technical Test.....	14
2.1. Summary of Test Result.....	14
2.2. Test Environment	16
3. Conducted Emission	17
3.1. Test Equipment	17
3.2. Test Setup.....	17
3.3. Limit	18
3.4. Test Procedure	18
3.5. Uncertainty	18
3.6. Test Result.....	19
4. Emissions in restricted frequency bands.....	21
4.1. Test Equipment	21
4.2. Test Setup.....	22
4.3. Limit	23
4.4. Test Procedure	23
4.5. Uncertainty	25
4.6. Test Result.....	26
5. 20dB Bandwidth	31
5.1. Test Equipment	31
5.2. Test Setup.....	31
5.3. Limit	31
5.4. Test Procedure	32
5.5. Uncertainty	32
5.6. Test Result.....	33
6. Carrier Frequency Separation	39
6.1. Test Equipment	39
6.2. Test Setup.....	39
6.3. Limit	39
6.4. Test Procedure	40
6.5. Uncertainty	40
6.6. Test Result.....	41

7.	Number of Hopping Frequencies	47
7.1.	Test Equipment	47
7.2.	Test Setup.....	47
7.3.	Limit	47
7.4.	Test Procedure	48
7.5.	Uncertainty	48
7.6.	Test Result.....	49
8.	Time of Occupancy (Dwell Time).....	55
8.1.	Test Equipment	55
8.2.	Test Setup.....	55
8.3.	Limit	55
8.4.	Test Procedure	56
8.5.	Uncertainty	56
8.6.	Test Result.....	57
9.	Peak Output Power	63
9.1.	Test Equipment	63
9.2.	Test Setup.....	63
9.3.	Limit	63
9.4.	Test Procedure	64
9.5.	Uncertainty	64
9.6.	Test Result.....	65
10.	Emissions in non-restricted frequency bands	71
11.1.	Test Equipment	71
11.2.	Test Setup.....	71
11.3.	Limit	71
11.4.	Test Procedure	72
11.5.	Uncertainty	72
11.6.	Test Result.....	73
11.	Radiated Emission Band Edge.....	74
12.1.	Test Equipment	74
12.2.	Test Setup.....	75
12.3.	Limit	75
12.4.	Test Procedure	75
12.5.	Uncertainty	76
12.6.	Test Result.....	77

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1632087R-RF-US-P06V01	V1.0	Initial Issued Report	Apr. 14, 2016
1632087R-RF-US-P06V01	V1.1	Modified the 26dB bandwidth, power and hopping number. Change the address of the applicant and manufacturer	Apr. 28, 2016

1. General Information

1.1. EUT Description

Product Name	BLUETOOTH SPEAKER
Model No.	LTG300
Working Voltage	DC 5V
Bluetooth Specification	V3.0+V4.0
Frequency Range	2402- 2480 MHz
Channel Number	V3.0: 79 V4.0: 40
Channel Separation	V3.0: 1MHz V4.0: 2MHz
Type of Modulation	V3.0: GFSK, Pi/4 DQPSK, 8DPSK V4.0: GFSK
Data Rate	V3.0: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK) V4.0: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Bluetooth Working Frequency of Each Channel: (For V3.0)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

Bluetooth Antenna List

Antenna	Manufacturer	Model No.	Peak Gain
Metal Antenna	N/A	N/A	-0.53dBi for 2.4GHz

1.2 Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmitter-1Mbps(GFSK_DH5)
Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)
Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Note:

1. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
2. Regards to the frequency band operation for systems using FHSS modulation: normal operation (hopping) was selected to test for conducted, and the lowest, highest frequency channel for radiation spurious test.
3. The extreme test condition for voltage and temperature were declared by the manufacturer.
4. The reading values of all the test items contain cable loss.


1.3 Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	lenovo	U430	N/A	Power by adapter
2	USB 2.0 Hard Disc Drive	Lenovo	F310	OA0568122701563	Power by Notebook
3	USB Mouse	DELL	MO56UOA	G0X03EGU	Power by Notebook
4	iPod touch	Apple	A1421	CCQN53YKG22V	Power by Battery

1.4 Configuration of Tested System

Connection Diagram(Conducted Emission)

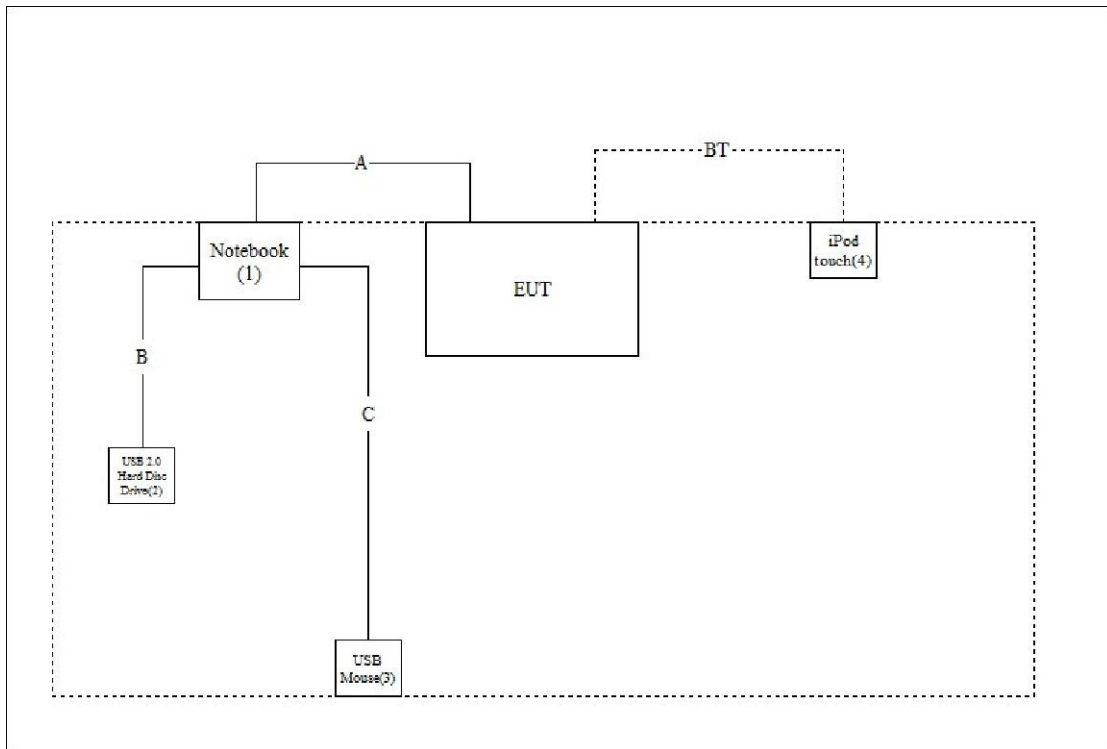

Connection Diagram(Radiated Emission)

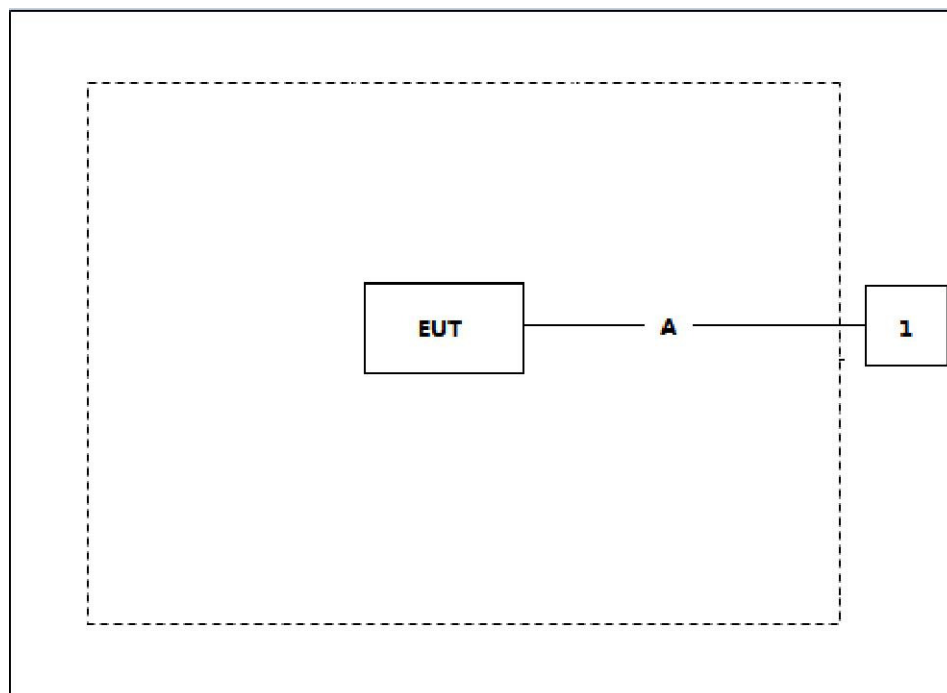

Signal Cable Type		Signal cable Description
A	Mini USB Cable	Shielded, 1.0m
B	USB 2.0 Cable	Shielded, 0.5m

C	USB Mouse Cable	Shielded, 1.8m
---	-----------------	----------------

1.5 EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run the RF test software, and set the test mode and channel, then press OK to start continue Transmit.

2. Technical Test

2.1. Summary of Test Result

☒ No deviations from the test standards

☐ Deviations from the test standards as below description:

For FCC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Yes	No
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(1)	Yes	No
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.215(c), 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	Yes	No

For IC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 4 Section 8.8	Yes	No
Radiated Emission	RSS-Gen Issue 4 Section 8.9	Yes	No
20dB Bandwidth	RSS-247 Issue 1 Section 5.1	Yes	No
Carrier Frequency Separation	RSS-247 Issue 1 Section 5.1	Yes	No
Number of Hopping Frequencies	RSS-247 Issue 1 Section 5.1	Yes	No
Time of Occupancy (Dwell Time)	RSS-247 Issue 1 Section 5.1	Yes	No
Peak Output Power	RSS-247 Issue 1 Section 5.4	Yes	No
Emissions in non-restricted frequency bands	RSS-247 Issue 1 Section 5.5	Yes	No
Radiated Emission Band Edge	RSS-Gen Issue 4 Section 8.10	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100726	2017.03.05
Two-Line V-Network	R&S	ENV216	100043	2017.03.05
Two-Line V-Network	R&S	ENV216	100044	2016.09.16
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2017.03.01
50ohm Termination	SHX	TF2	07081401	2016.09.16
Temperature/Humidity Meter	zhicheng	ZC1-2	TR1-TH	2017.01.04

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

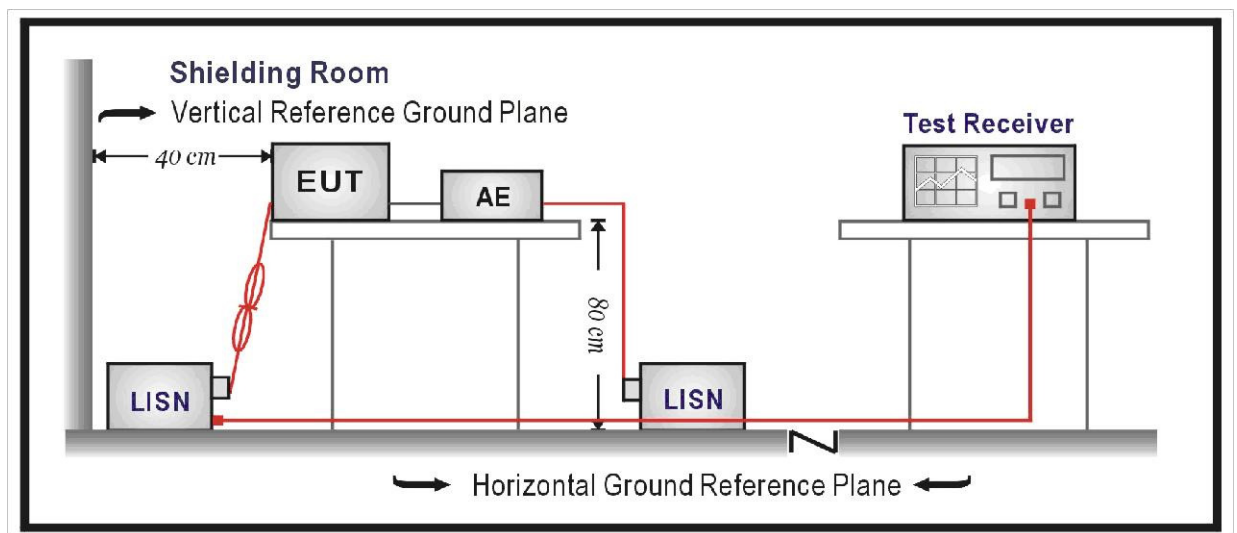

3.3. Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

According to FCC ANSI C63.4: 2014 & ANSI C63.10: 2013.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

Engineer: Jack	
Site: TR1	Time: 2016/03/28
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: BLUETOOTH SPEAKERBLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1	

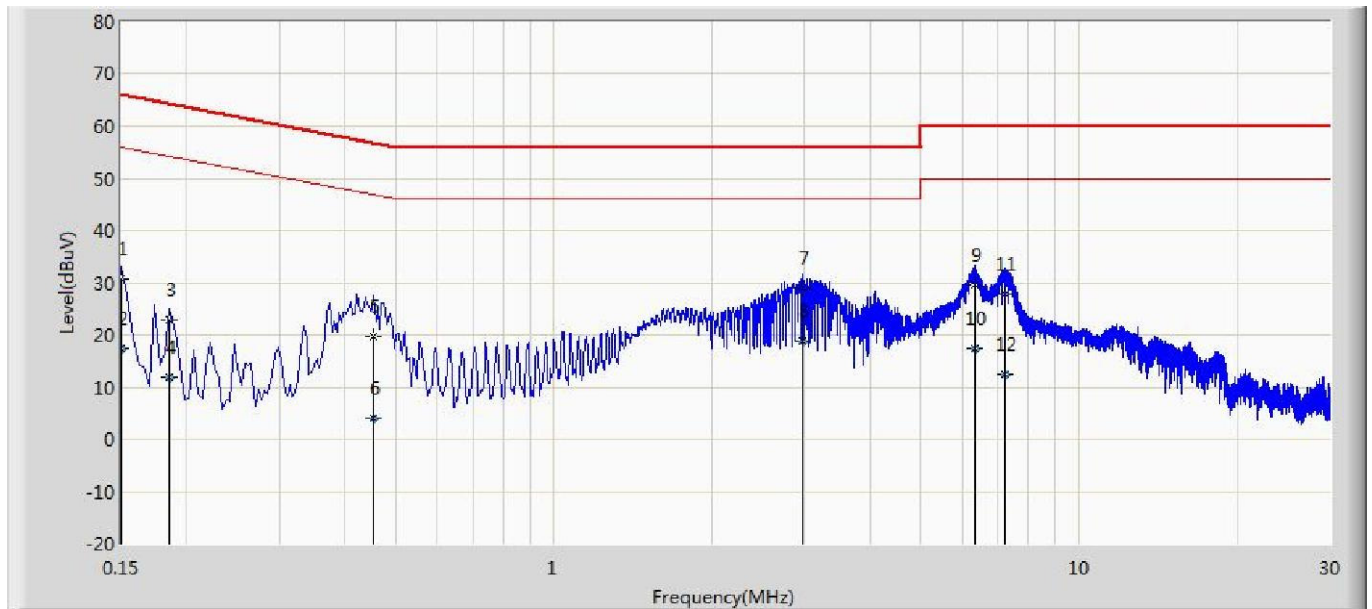

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.150	30.869	21.133	-35.131	66.000	9.676	0.060	0.000	QP
2		0.150	17.397	7.661	-38.603	56.000	9.676	0.060	0.000	AV
3		0.186	22.786	13.074	-41.427	64.213	9.652	0.060	0.000	QP
4		0.186	11.786	2.074	-42.427	54.213	9.652	0.060	0.000	AV
5		0.454	19.809	10.109	-36.993	56.802	9.630	0.070	0.000	QP
6		0.454	4.097	-5.603	-42.705	46.802	9.630	0.070	0.000	AV
7	*	2.978	29.118	19.348	-26.882	56.000	9.650	0.120	0.000	QP
8		2.978	18.981	9.211	-27.019	46.000	9.650	0.120	0.000	AV
9		6.334	29.675	19.795	-30.325	60.000	9.690	0.190	0.000	QP
10		6.334	17.533	7.653	-32.467	50.000	9.690	0.190	0.000	AV
11		7.206	27.864	17.954	-32.136	60.000	9.700	0.210	0.000	QP
12		7.206	12.463	2.553	-37.537	50.000	9.700	0.210	0.000	AV

Engineer: Jack

Site: TR1

Time: 2016/03/28

Limit: FCC_Part15.207_CE_AC Power_ClassB

Margin: 0


Probe: ENV216_101044(0.009-30MHz)

Polarity: Neutral

EUT: BLUETOOTH SPEAKERBLUETOOTH SPEAKER

Power: AC 120V/60Hz

Note: Mode 1

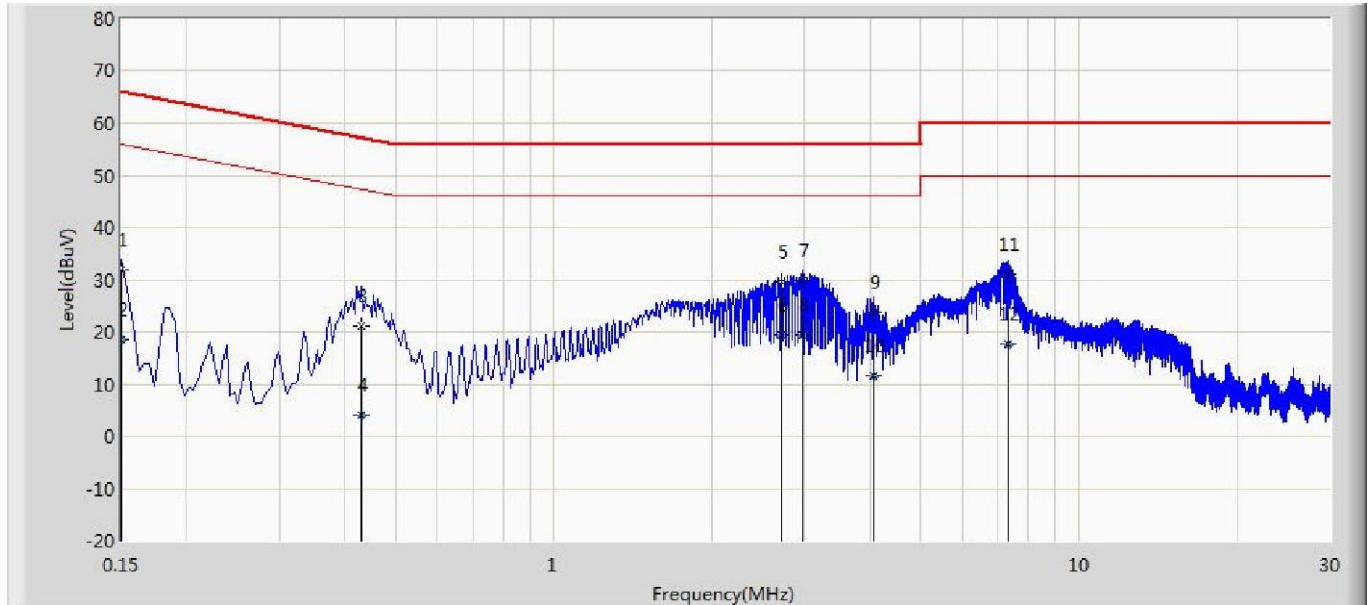

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.150	32.013	22.277	-33.987	66.000	9.676	0.060	0.000	QP
2		0.150	18.491	8.755	-37.509	56.000	9.676	0.060	0.000	AV
3		0.430	21.147	11.437	-36.106	57.253	9.640	0.070	0.000	QP
4		0.430	3.983	-5.727	-43.270	47.253	9.640	0.070	0.000	AV
5		2.718	29.540	19.780	-26.460	56.000	9.650	0.110	0.000	QP
6		2.718	19.387	9.627	-26.613	46.000	9.650	0.110	0.000	AV
7	*	2.978	29.786	20.016	-26.214	56.000	9.650	0.120	0.000	QP
8		2.978	19.405	9.635	-26.595	46.000	9.650	0.120	0.000	AV
9		4.054	23.910	14.110	-32.090	56.000	9.660	0.140	0.000	QP
10		4.054	11.631	1.831	-34.369	46.000	9.660	0.140	0.000	AV
11		7.298	31.148	21.248	-28.852	60.000	9.690	0.210	0.000	QP
12		7.298	17.675	7.775	-32.325	50.000	9.690	0.210	0.000	AV

Note: All the low ,middle and high channels of all different modes are investigated, and only report the worst case.

4. Emissions in restricted frequency bands

4.1. Test Equipment

Emissions in restricted frequency bands / AC-2


Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2017.03.05
Loop Antenna	R&S	HFH2-Z2	833799/003	2016.11.25
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2016.10.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2017.02.28
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2017.01.04

Emissions in restricted frequency bands / AC-5


Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Preamplifier	Miteq	NSP1800-25	1364185	2016.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2016.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2016.10.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2017.06.08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.04.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.02.28
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.02.28
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2017.02.28
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2017.01.04

4.2. Test Setup


Below 30MHz Test Setup:

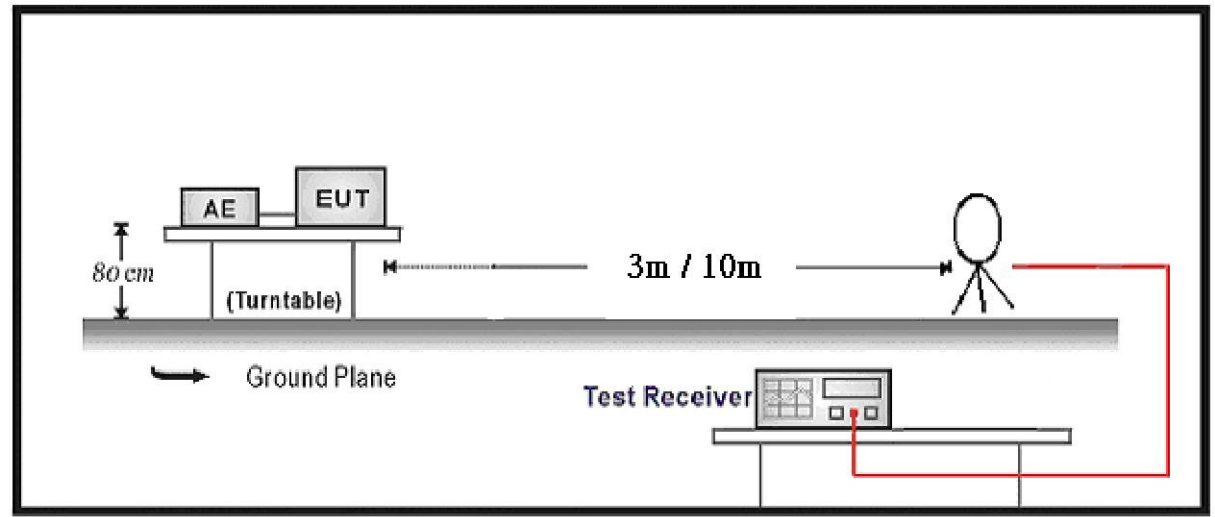

Below 1GHz Test Setup:

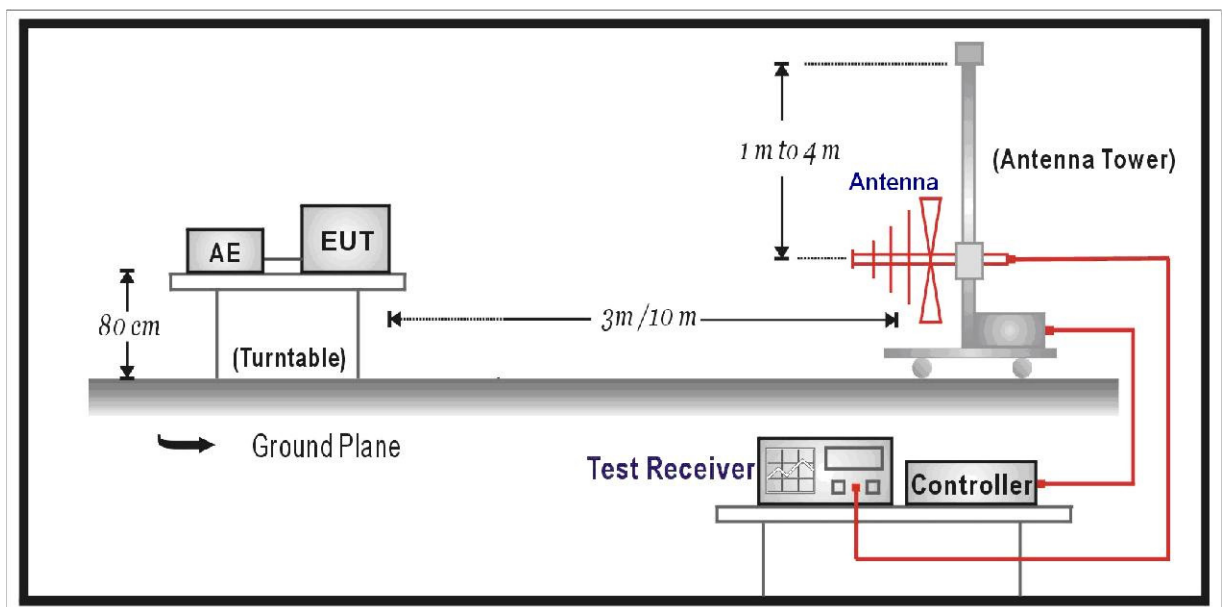

Above 1GHz Test Setup:

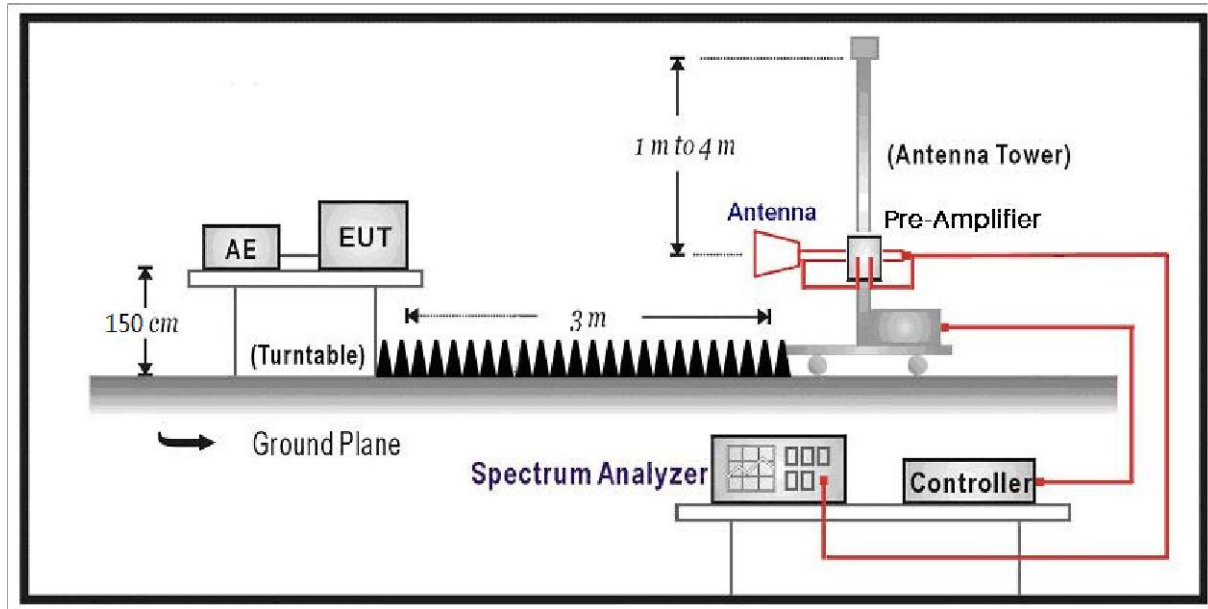

4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

According to ANSI C63.4: 2014; ANSI C63.10: 2013.

The EUT is placed on a turn table which is 1.5 meter for above 1G and 0.8 meter for below 1G above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2014 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60~10 degrees for H-plane and 90~10 degrees for E-plane.

According to ANSI C63.10: 2013& ANSI C63.4: 2014

This test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205 of FCC part 15. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b) of FCC part 15.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209 of FCC Part 15. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit of FCC part 15.

If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method may be employed.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB

below 1G is defined as ± 3.8 dB

4.6. Test Result

Mode 1: Transmitter-1Mbps(GFSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	4804.0	31.7	8.0	39.7	54(Note3)	14.3	PK
	V	4804.0	32.3	8.0	40.3	54(Note3)	13.7	PK
	H	7206.0	29.2	12.8	42.0	54(Note3)	12.0	PK
	V	7206.0	30.1	12.8	42.9	54(Note3)	11.1	PK
	H	9608.0	28.1	16.1	44.2	54(Note3)	9.8	PK
	V	9608.0	28.5	16.0	44.5	54(Note3)	9.5	PK
39	H	4882.0	31.3	8.2	39.5	54(Note3)	14.5	PK
	V	4882.0	31.6	8.2	39.8	54(Note3)	14.2	PK
	H	7324.0	29.8	13.0	42.8	54(Note3)	11.2	PK
	V	7323.1	29.4	13.0	42.4	54(Note3)	11.6	PK
	H	9764.0	27.1	16.2	43.3	54(Note3)	10.7	PK
	V	9764.0	27.0	16.3	43.3	54(Note3)	10.7	PK
78	H	4960.0	30.0	8.5	38.5	54(Note3)	15.5	PK
	V	4960.0	29.8	8.5	38.3	54(Note3)	15.7	PK
	H	7443.0	28.1	13.2	41.3	54(Note3)	12.7	PK
	V	7440.0	29.4	13.2	42.6	54(Note3)	11.4	PK
	H	9920.0	27.2	16.1	43.3	54(Note3)	10.7	PK
	V	9920.0	27.1	16.1	43.2	54(Note3)	10.8	PK

Note 1: The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 6dB below the limits, therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

3: Measure Level = Reading Level + Factor.

Mode 2: Transmitter-2Mbps(Pi/4 DQPSK _DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	4804.0	31.0	8	39.0	54(Note3)	15.0	PK
	V	4804.0	32.1	8	40.1	54(Note3)	13.9	PK
	H	7206.0	29.4	12.8	42.2	54(Note3)	11.8	PK
	V	7206.0	32.5	12.8	45.3	54(Note3)	8.7	PK
	H	9608.0	27.1	16.1	43.2	54(Note3)	10.8	PK
	V	9608.0	29.2	16	45.2	54(Note3)	8.8	PK
39	H	4882.0	30.9	8.2	39.1	54(Note3)	14.9	PK
	V	4882.0	30.7	8.2	38.9	54(Note3)	15.1	PK
	H	7324.0	28.7	13	41.7	54(Note3)	12.3	PK
	V	7323.0	28.6	13	41.6	54(Note3)	12.4	PK
	H	9764.0	28.3	16.2	44.5	54(Note3)	9.5	PK
	V	9764.0	27.2	16.3	43.5	54(Note3)	10.5	PK
78	H	4960.0	30.5	8.5	39.0	54(Note3)	15.0	PK
	V	4960.0	30.4	8.5	38.9	54(Note3)	15.1	PK
	H	7443.0	29.5	13.2	42.7	54(Note3)	11.3	PK
	V	7440.0	29.3	13.2	42.5	54(Note3)	11.5	PK
	H	9920.0	27.8	16.1	43.9	54(Note3)	10.1	PK
	V	9920.0	28.5	16.1	44.6	54(Note3)	9.4	PK

Note 1: The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 6dB below the limits, therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

3: Measure Level = Reading Level + Factor.

Mode 3: Transmitter-3Mbps(8DPSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	4808.0	31.3	8	39.0	54(Note3)	15.0	PK
	V	4808.0	31.6	8	40.1	54(Note3)	13.9	PK
	H	7206.0	28.9	12.8	42.2	54(Note3)	11.8	PK
	V	7206.0	29.1	12.8	45.3	54(Note3)	8.7	PK
	H	9608.0	28.5	16.1	43.2	54(Note3)	10.8	PK
	V	9608.0	27.7	16	45.2	54(Note3)	8.8	PK
39	H	4882.0	30.8	8.2	39.1	54(Note3)	14.9	PK
	V	4882.0	30.8	8.2	38.9	54(Note3)	15.1	PK
	H	7323.0	28.5	13	41.7	54(Note3)	12.3	PK
	V	7323.0	30.1	13	41.6	54(Note3)	12.4	PK
	H	9764.0	28.2	16.2	44.5	54(Note3)	9.5	PK
	V	9764.0	28.8	16.3	43.5	54(Note3)	10.5	PK
78	H	4960.0	29.1	8.5	39.0	54(Note3)	15.0	PK
	V	4960.0	31.1	8.5	38.9	54(Note3)	15.1	PK
	H	7440.0	29.6	13.2	42.7	54(Note3)	11.3	PK
	V	7440.0	29.2	13.2	42.5	54(Note3)	11.5	PK
	H	9920.0	27.1	16.1	43.9	54(Note3)	10.1	PK
	V	9920.0	28.7	16.1	44.6	54(Note3)	9.4	PK


Note 1: The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 6dB below the limits, therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

3: Measure Level = Reading Level + Factor.

The worst case of Radiated Emission below 1GHz:

Engineer: Jack	
Site: AC3	Time: 2016/03/24
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_10m (30-1000MHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKERBLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1	

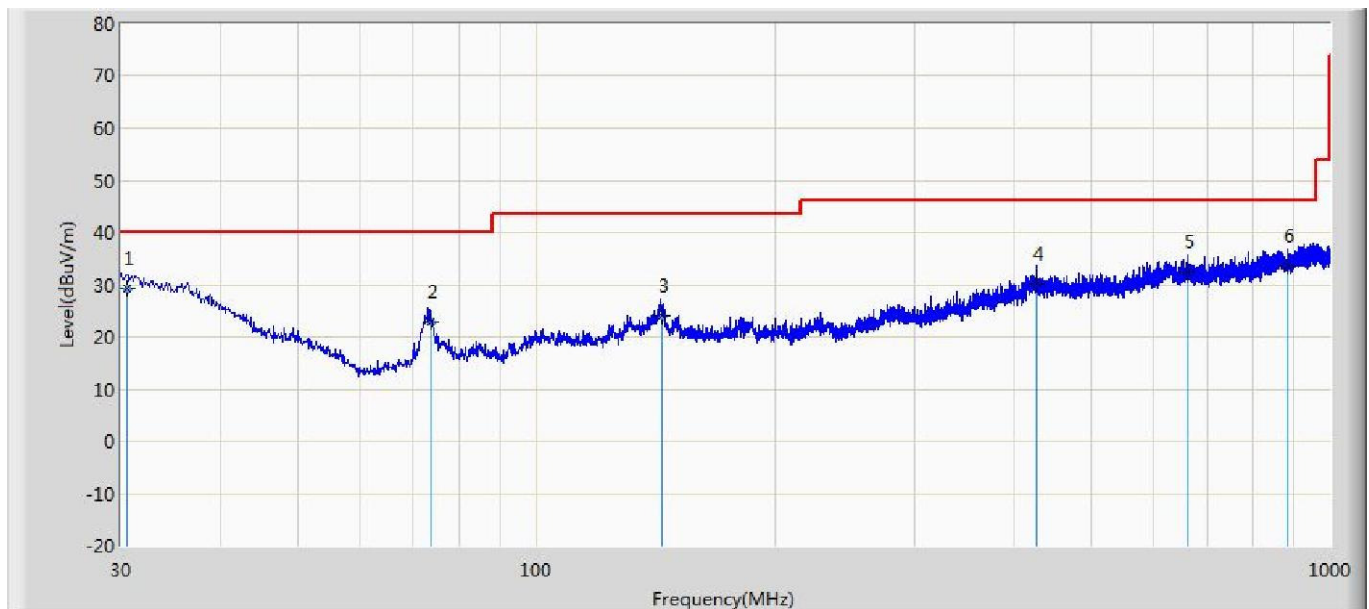


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	30.494	29.282	33.254	-10.718	40.000	18.513	0.605	23.090	100	32	QP
2		73.650	23.016	38.621	-16.984	40.000	6.555	0.920	23.080	200	164	QP
3		143.856	24.012	34.869	-19.488	43.500	10.869	1.300	23.026	100	144	QP
4		427.856	30.188	34.251	-15.812	46.000	16.557	2.270	22.890	200	130	QP
5		663.248	32.584	33.091	-13.416	46.000	18.973	2.840	22.320	100	29	QP
6		883.261	33.606	32.576	-12.394	46.000	20.466	3.270	22.707	200	16	QP

Note:

- " * ", means this data is the worst emission level.
- Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Jack	
Site: AC3	Time: 2016/03/24
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_10m (30-1000MHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKERBLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1	

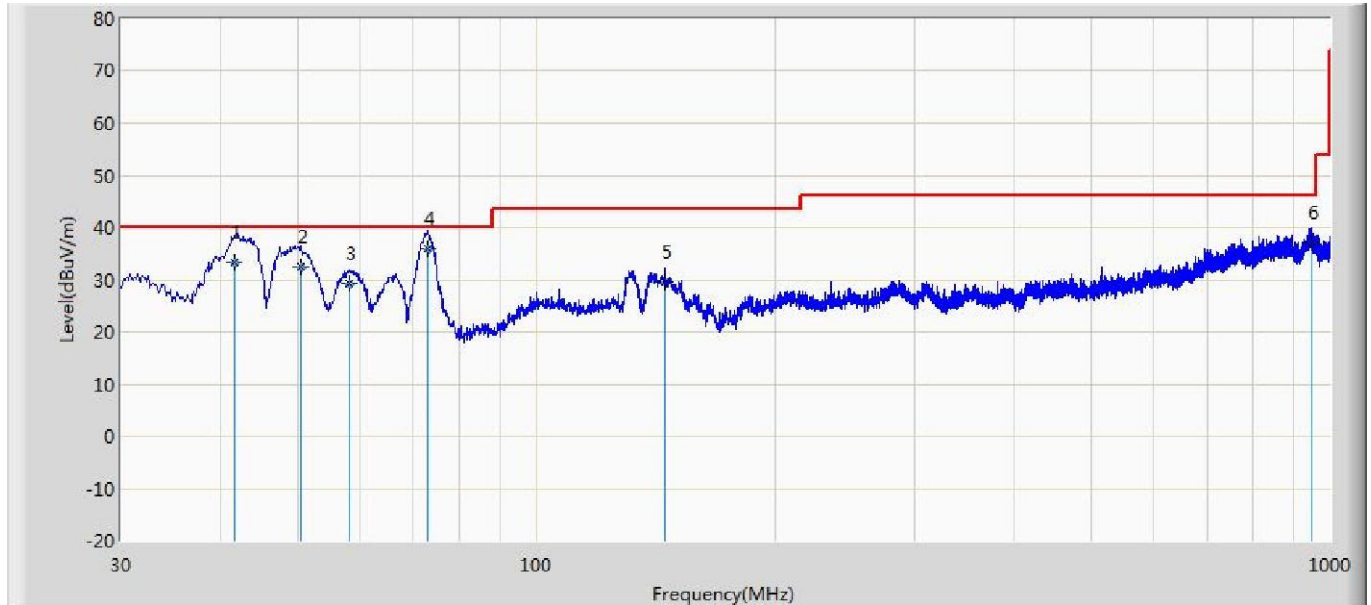

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		41.756	33.261	43.823	-6.739	40.000	12.017	0.701	23.280	100	36	QP
2		50.485	32.424	46.573	-7.576	40.000	8.117	0.780	23.046	200	36	QP
3		58.130	29.190	44.582	-10.810	40.000	6.818	0.820	23.030	200	169	QP
4	*	73.065	35.809	51.454	-4.191	40.000	6.515	0.920	23.080	100	0	QP
5		145.155	29.642	40.564	-13.858	43.500	10.790	1.307	23.020	200	16	QP
6		948.261	37.098	35.145	-8.902	46.000	20.886	3.400	22.333	100	36	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

5. 20dB Bandwidth


5.1 Test Equipment

20dB Bandwidth / TR8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2017.04.03

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2 Test Setup

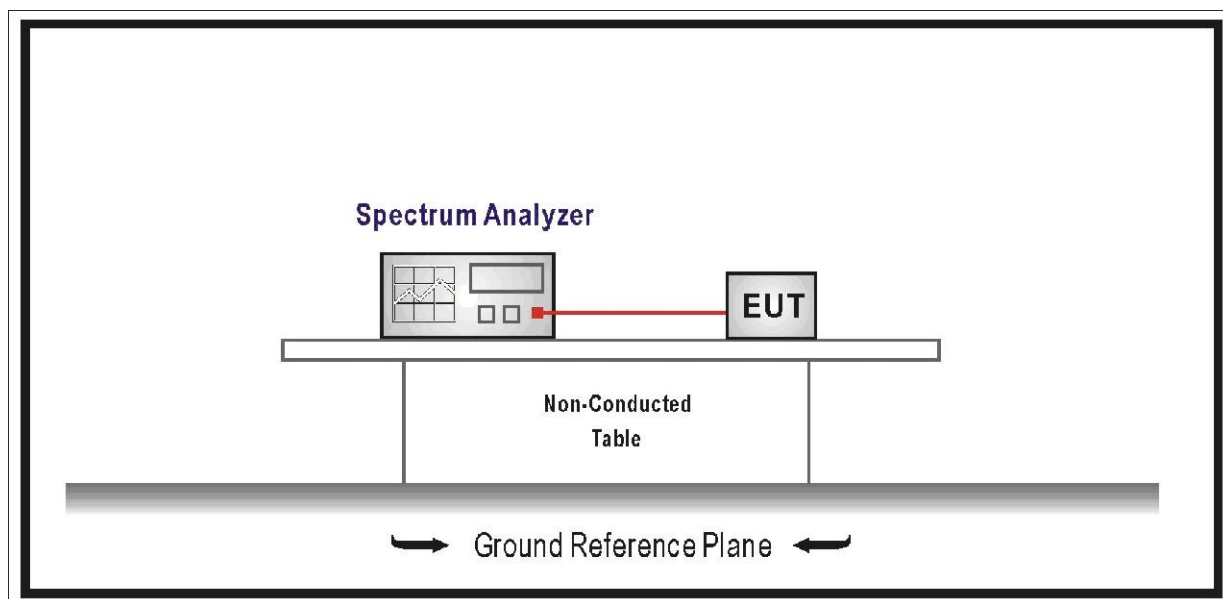

5.3 Limit

- For frequency hopping systems operating in 2400-2483.5 MHz band, no limitation.
- For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

The 20dB bandwidth must be contained within the frequency band designated in the rule section under which the equipment is operated.

5.4 Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

5.5 Uncertainty

The measurement uncertainty is defined as ± 1 kHz

5.6 Test Result


Product	:	BLUETOOTH SPEAKER
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps (GFSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	828.9	826.65
39	2441	829.5	837.82
78	2480	829.4	839.41

Channel 00 (2402MHz)



Channel 39 (2441MHz)

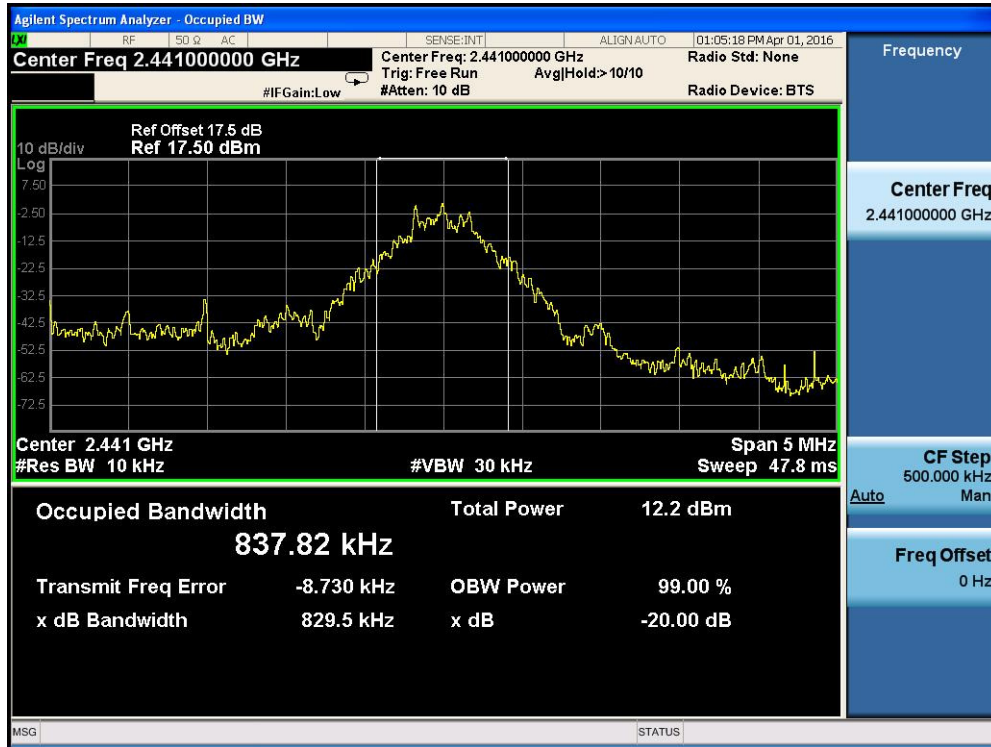

Channel 78 (2480MHz)



Product	:	BLUETOOTH SPEAKER
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps (Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1222	1170.3
39	2441	1226	1166.0
78	2480	1235	1177.0


Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)

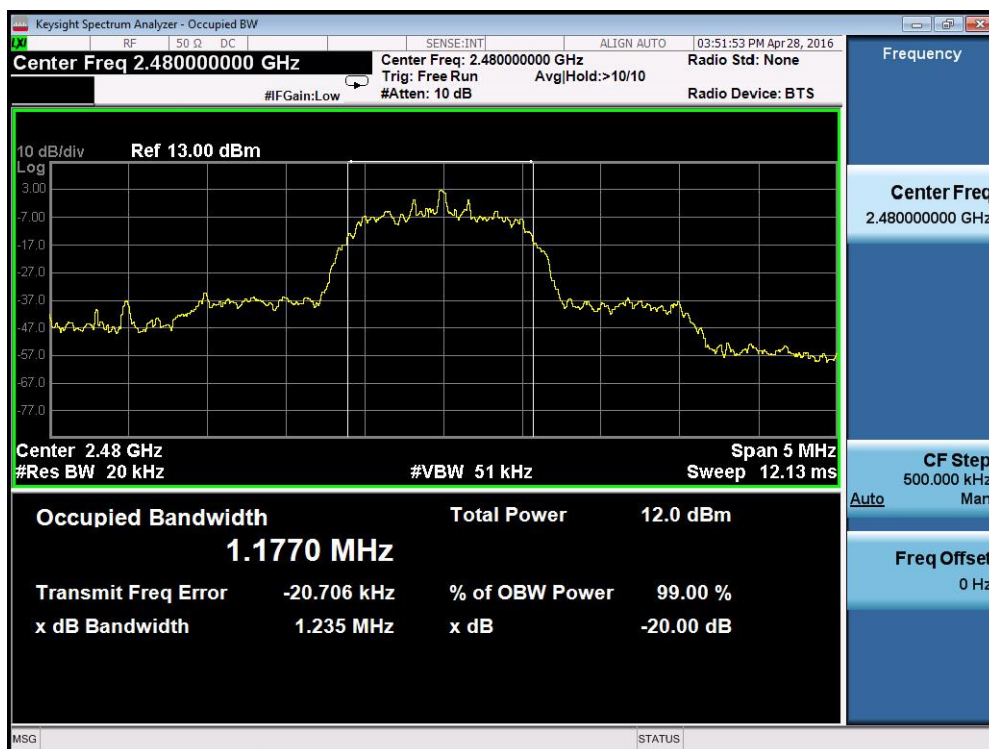


Product	:	BLUETOOTH SPEAKER
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps (8DPSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1253	1187.1
39	2441	1253	1178.7
78	2480	1248	1189.0

Channel 00 (2402MHz)

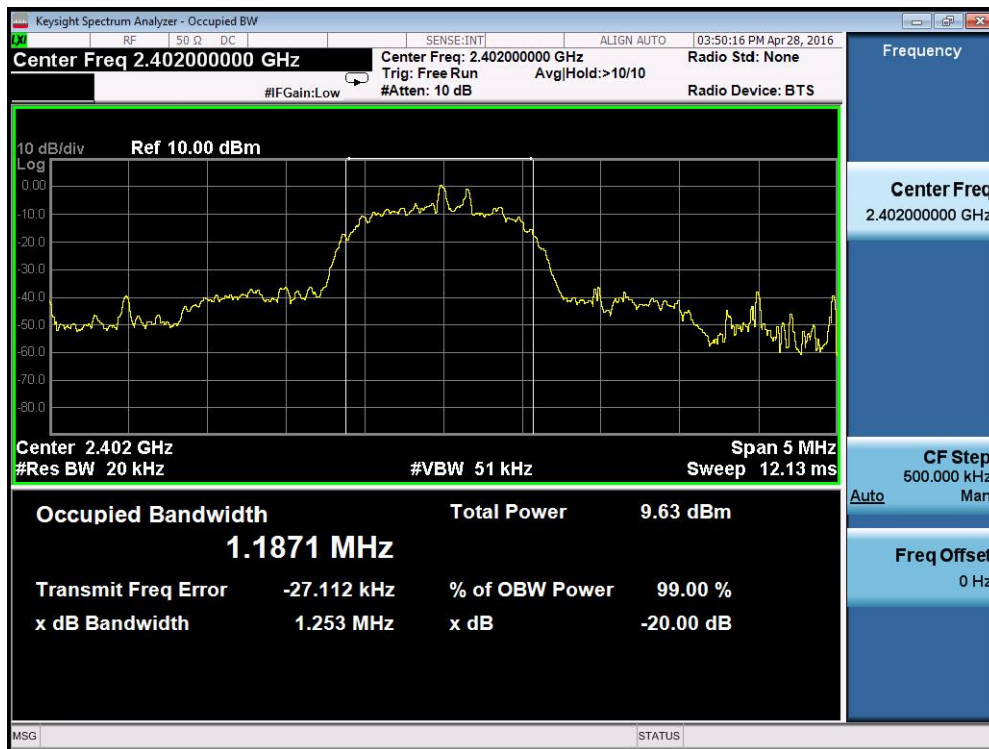

Channel 39 (2441MHz)

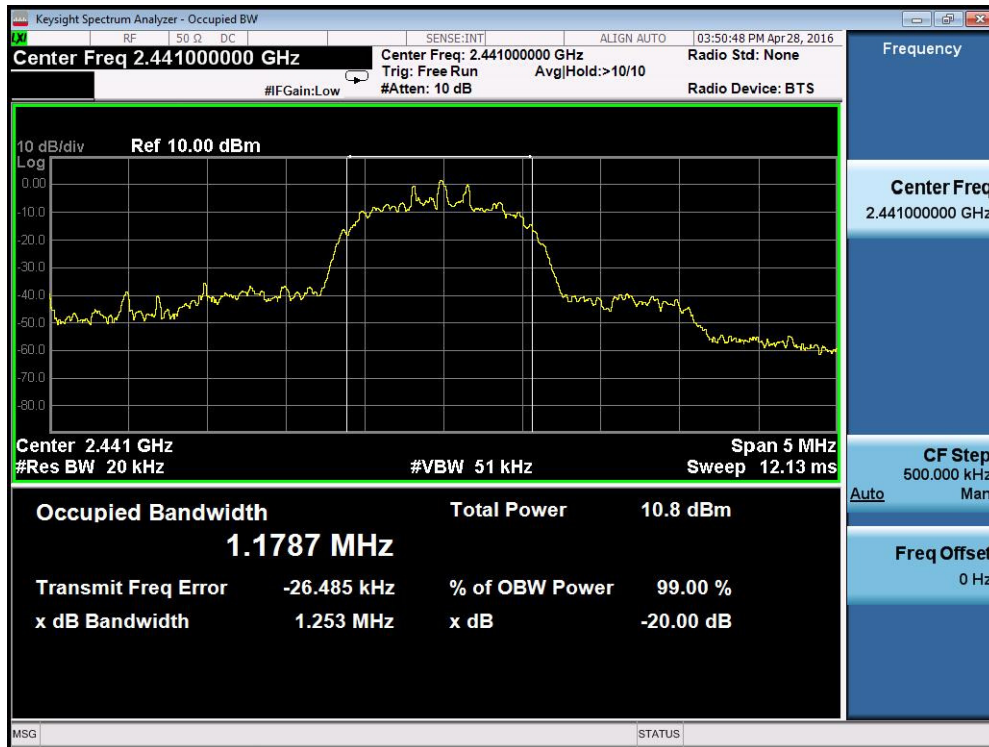

Channel 78 (2480MHz)



6. Carrier Frequency Separation


6.1. Test Equipment

Carrier Frequency Separation / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2017.04.03

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

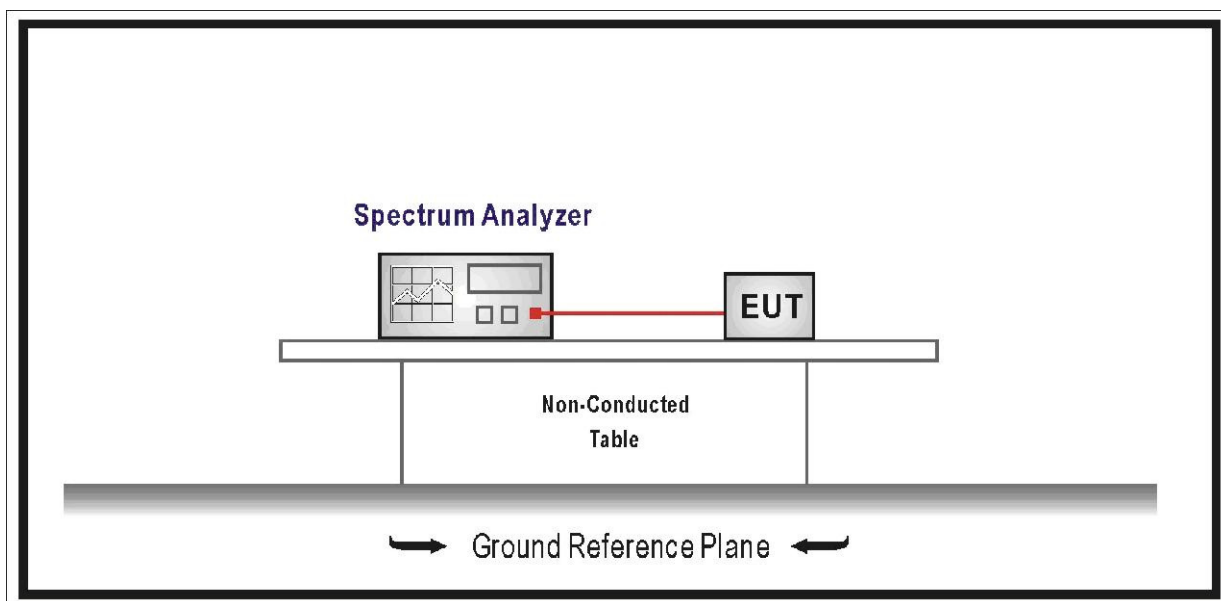

6.3. Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping

channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

6.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz

6.6. Test Result

Product	:	BLUETOOTH SPEAKER
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps (GFSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)

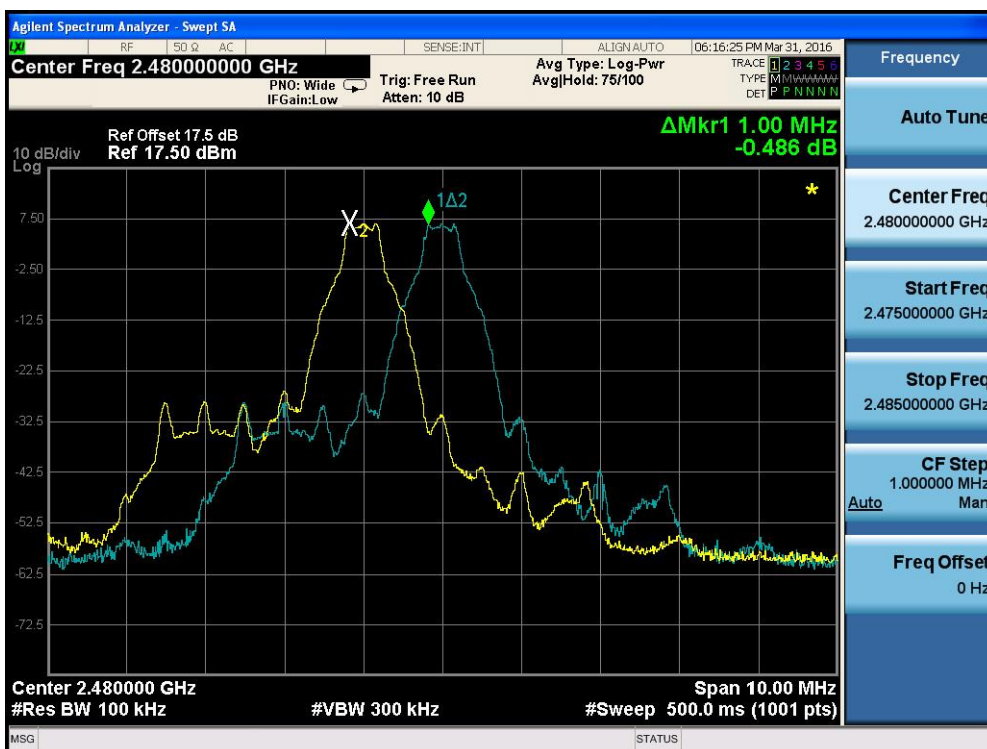

Product	:	BLUETOOTH SPEAKER
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps (Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass

Channel 00 (2402MHz)

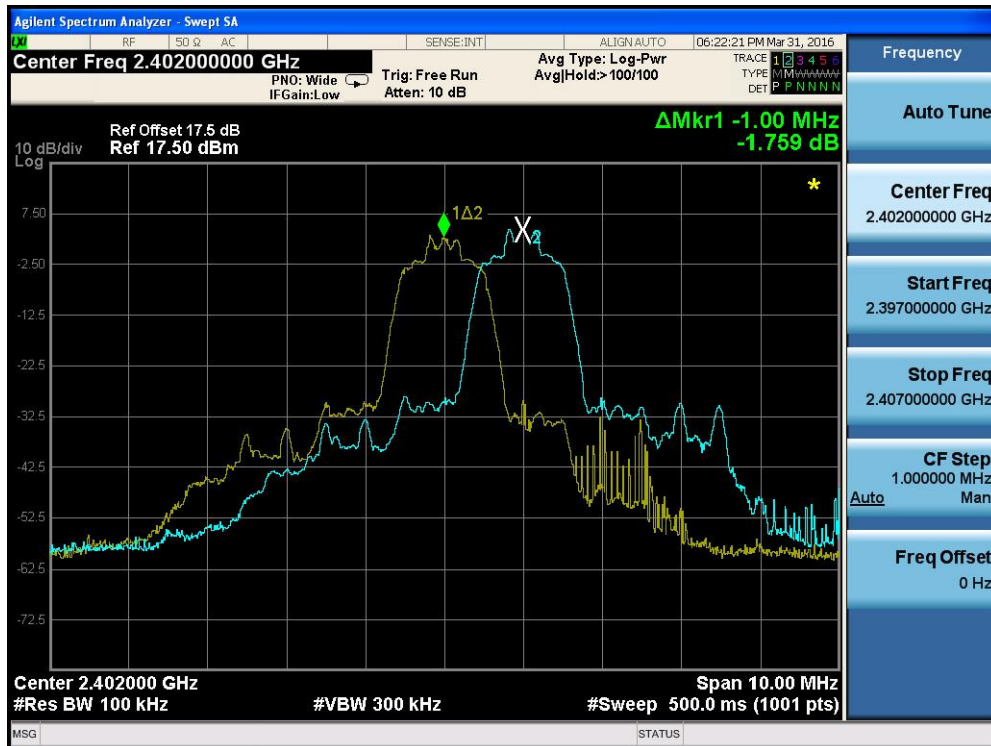

Channel 39 (2441MHz)




Channel 78 (2480MHz)



Product	:	BLUETOOTH SPEAKER
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps (8DPSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass

Channel 00 (2402MHz)

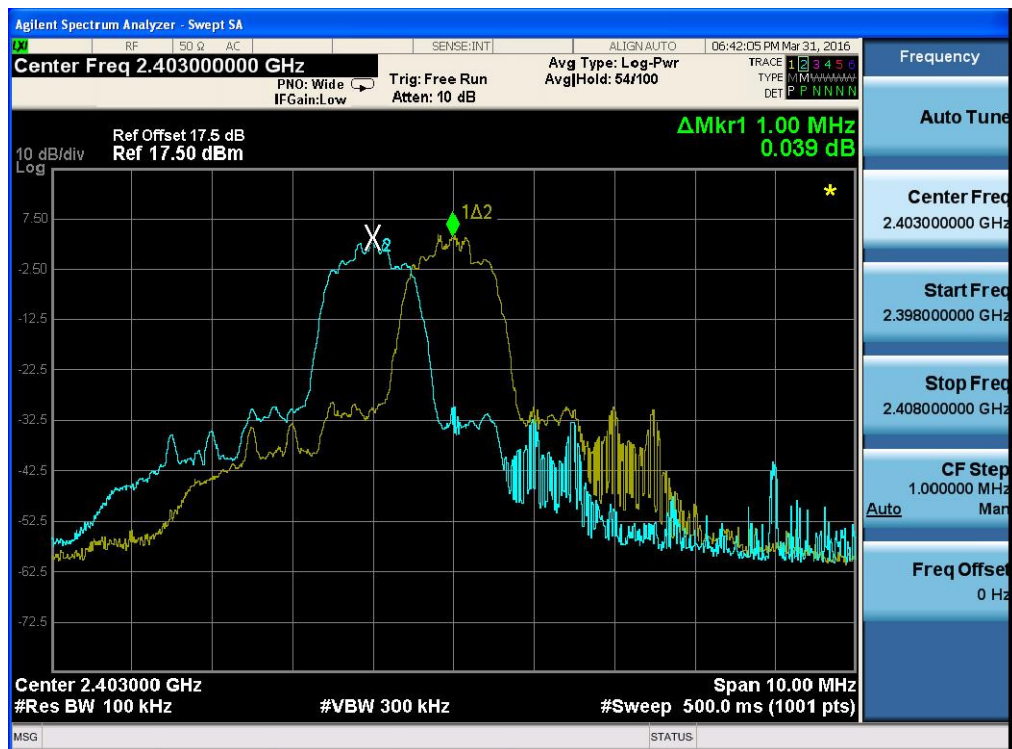

Channel 39 (2441MHz)



Channel 78 (2480MHz)



7. Number of Hopping Frequencies


7.1. Test Equipment

Number of Hopping Frequencies / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2017.04.03

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

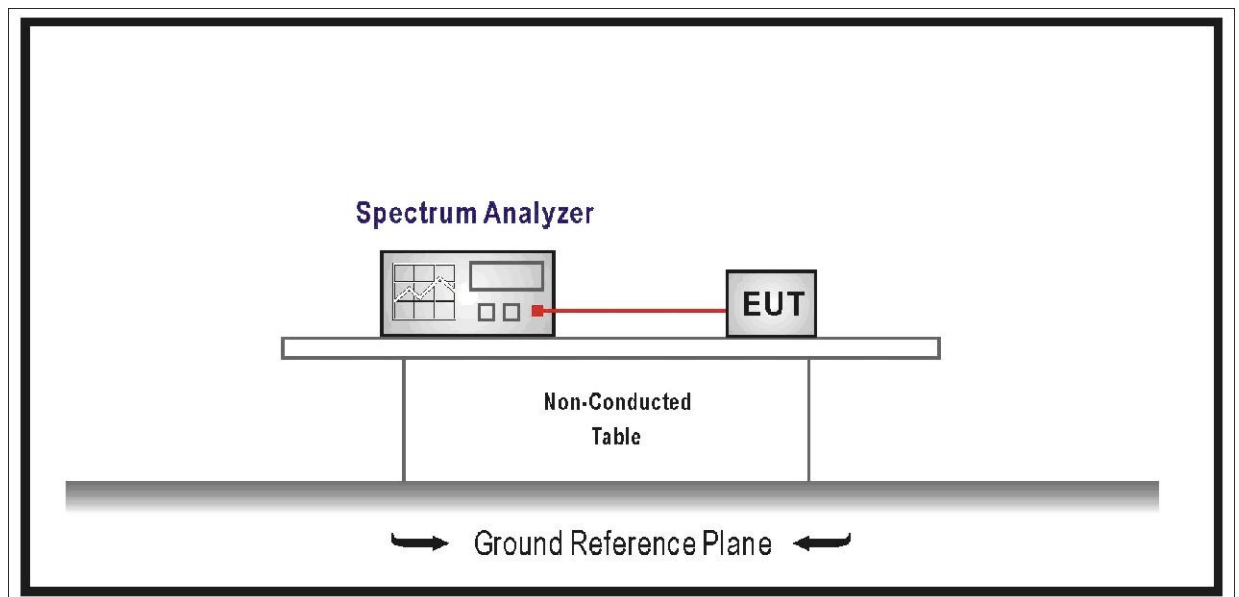

7.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
- For frequency hopping systems operating in 902-928 MHz band shall use at least 50 hopping frequencies.
- For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

7.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to bread the span up to sections, in order to clearly show all of the hopping frequencies.

7.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result


Product	:	BLUETOOTH SPEAKER
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps (GFSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass

2402 - 2441 MHz

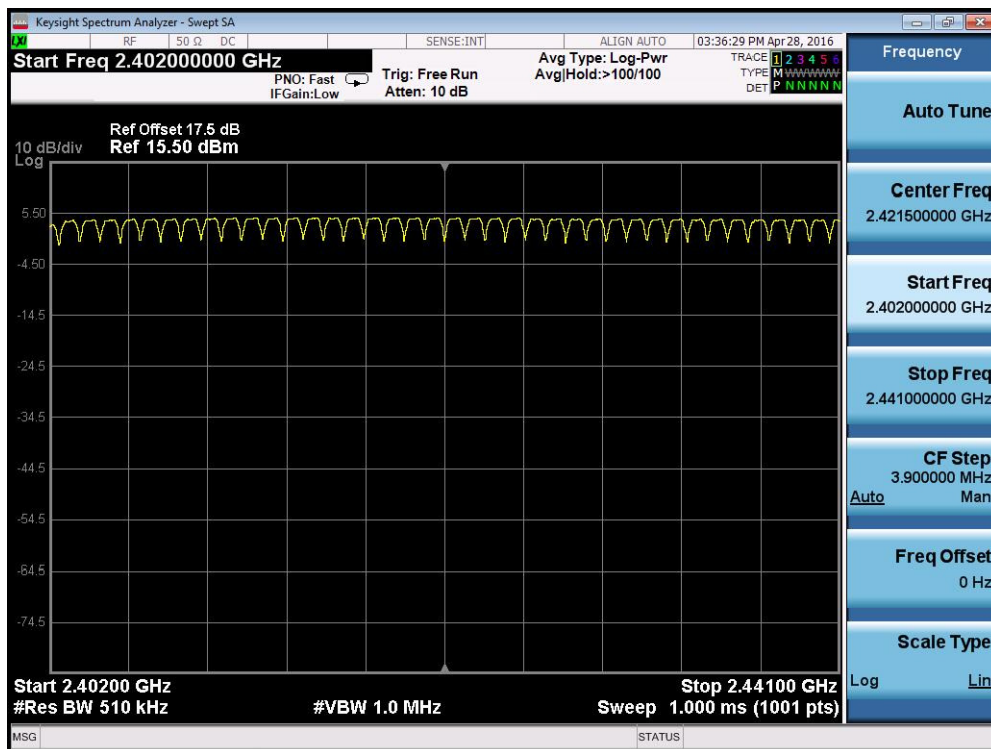


2442 - 2480 MHz

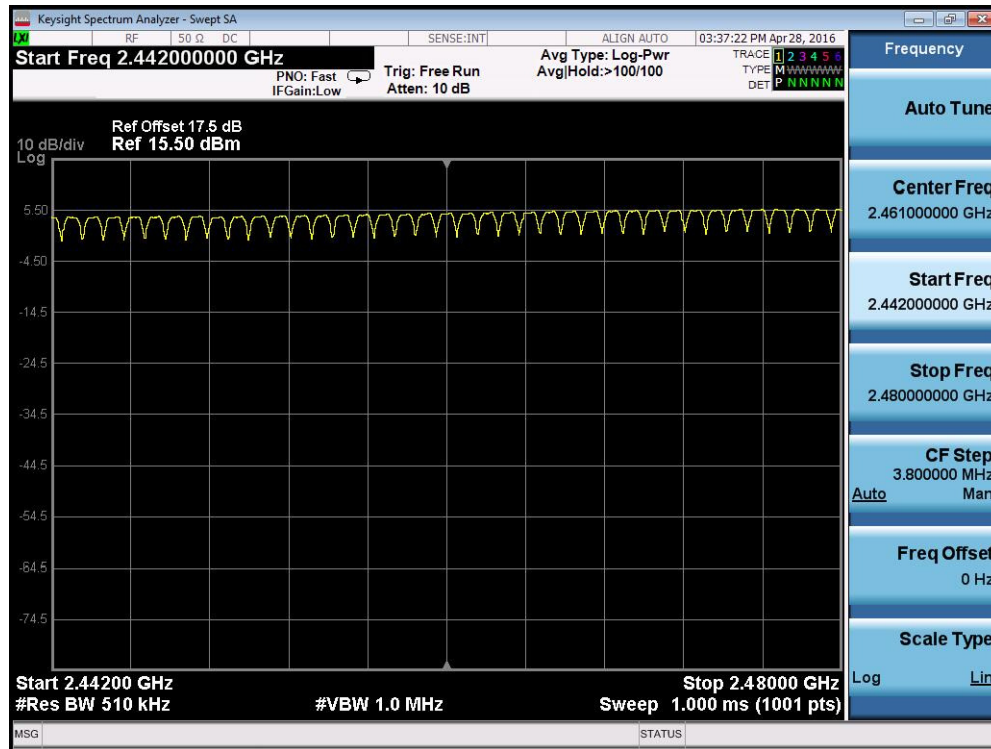


Product	:	BLUETOOTH SPEAKER
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps (Pi/4 DQPSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass

2402 - 2441 MHz

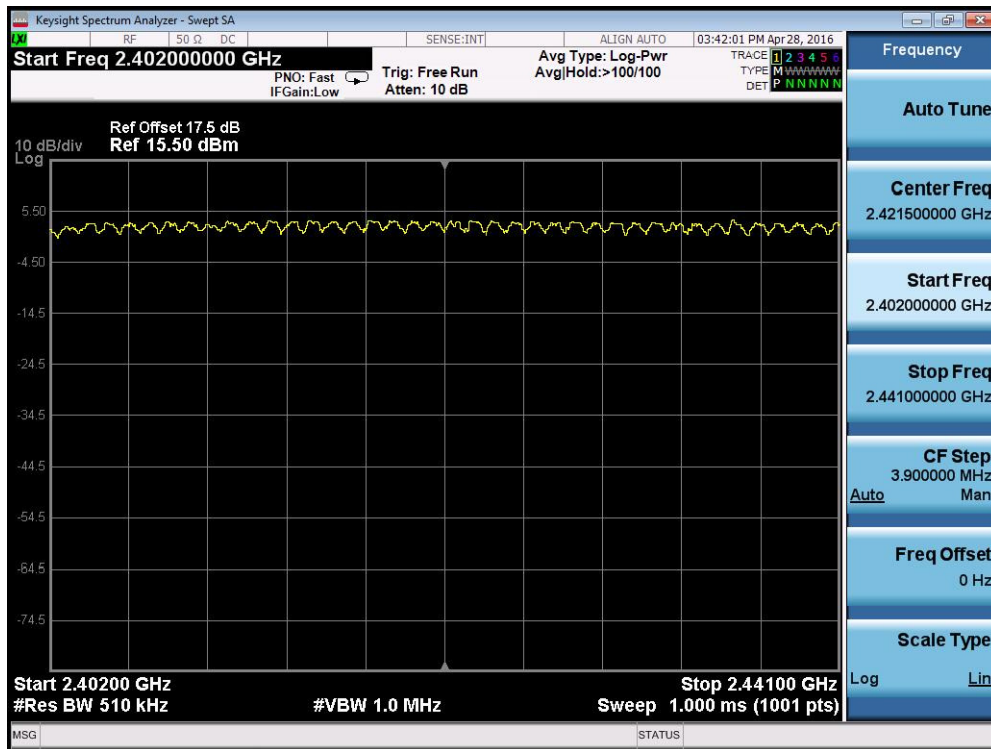


2442 - 2480 MHz

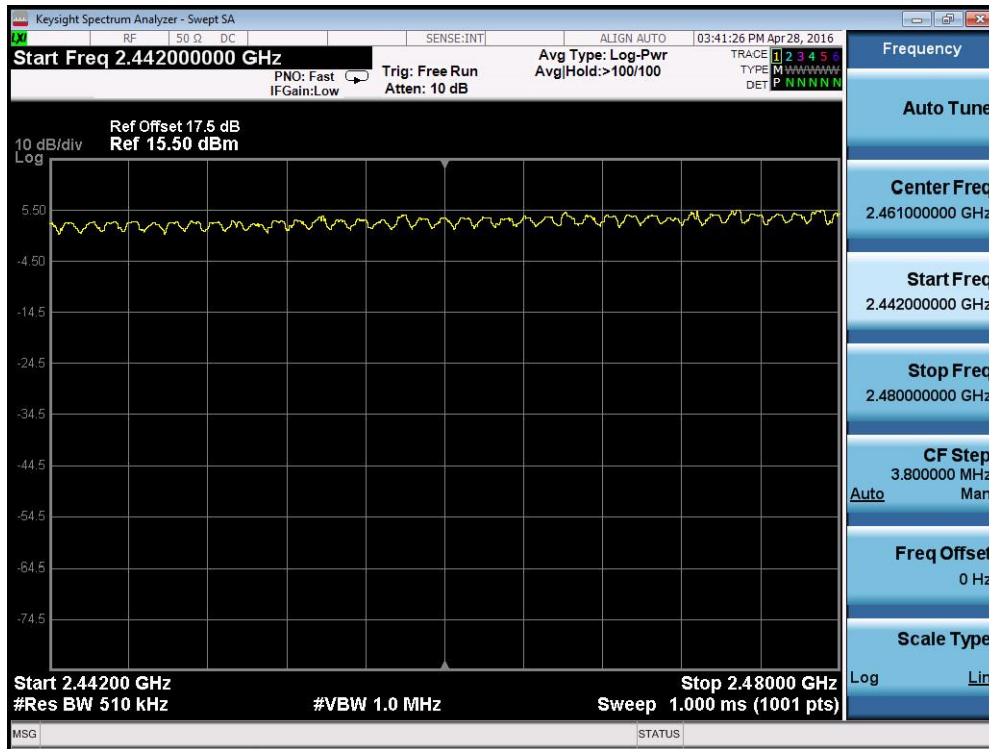


Product	:	BLUETOOTH SPEAKER
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps (8DPSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass

2402 - 2441 MHz

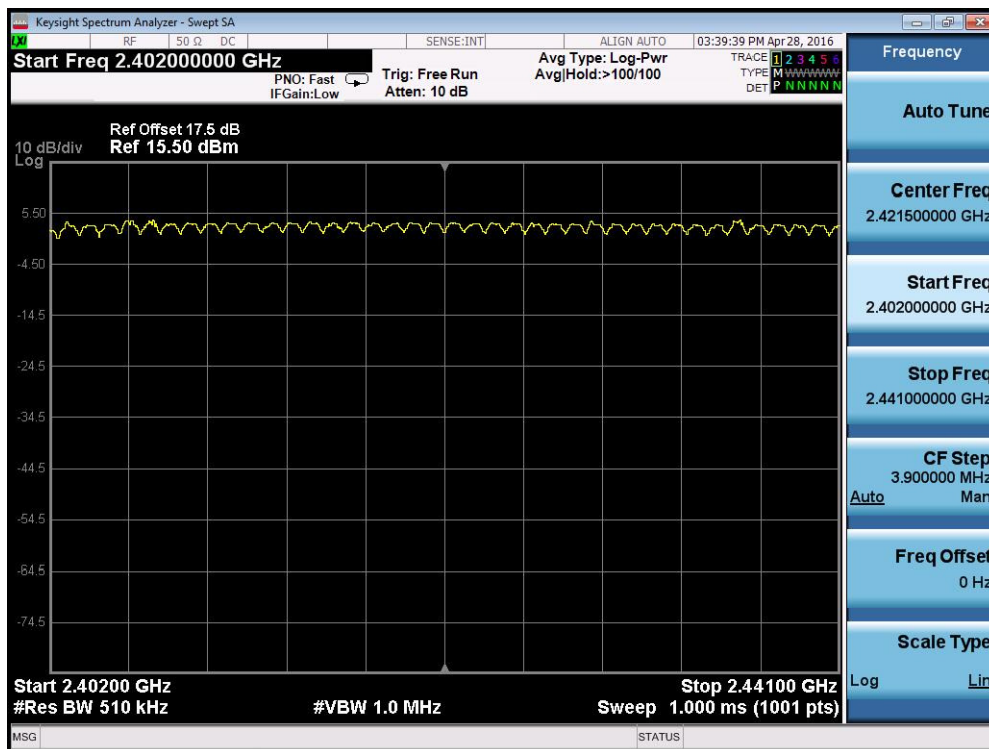

2442 - 2480 MHz

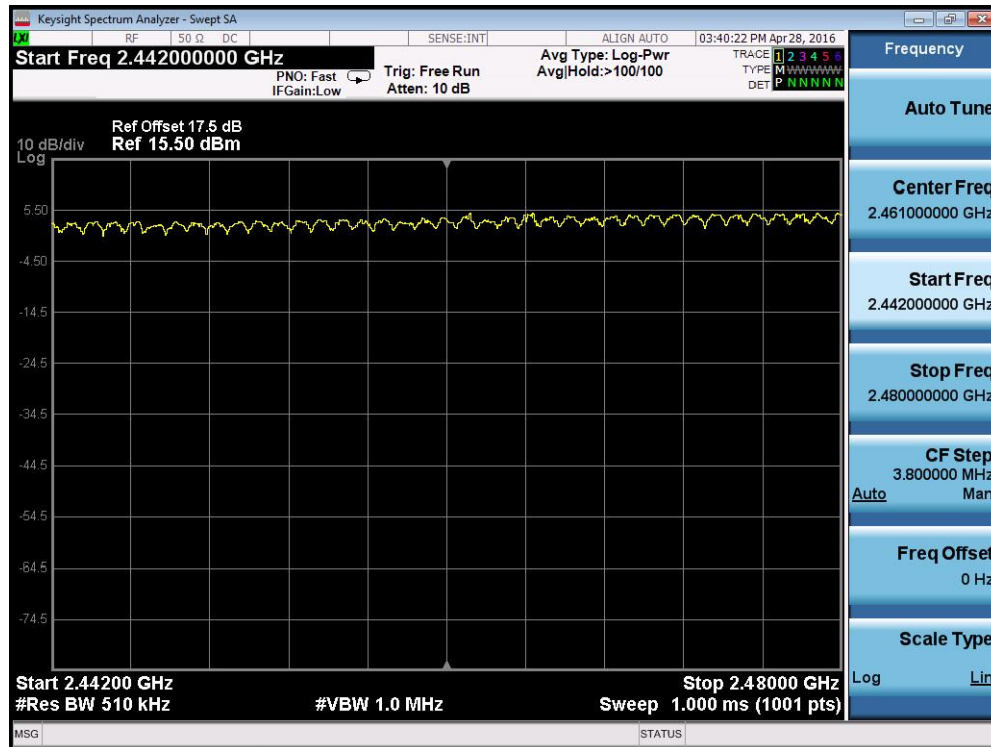

8. Time of Occupancy (Dwell Time)


8.1. Test Equipment

Time of Occupancy (Dwell Time) / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2017.04.03

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

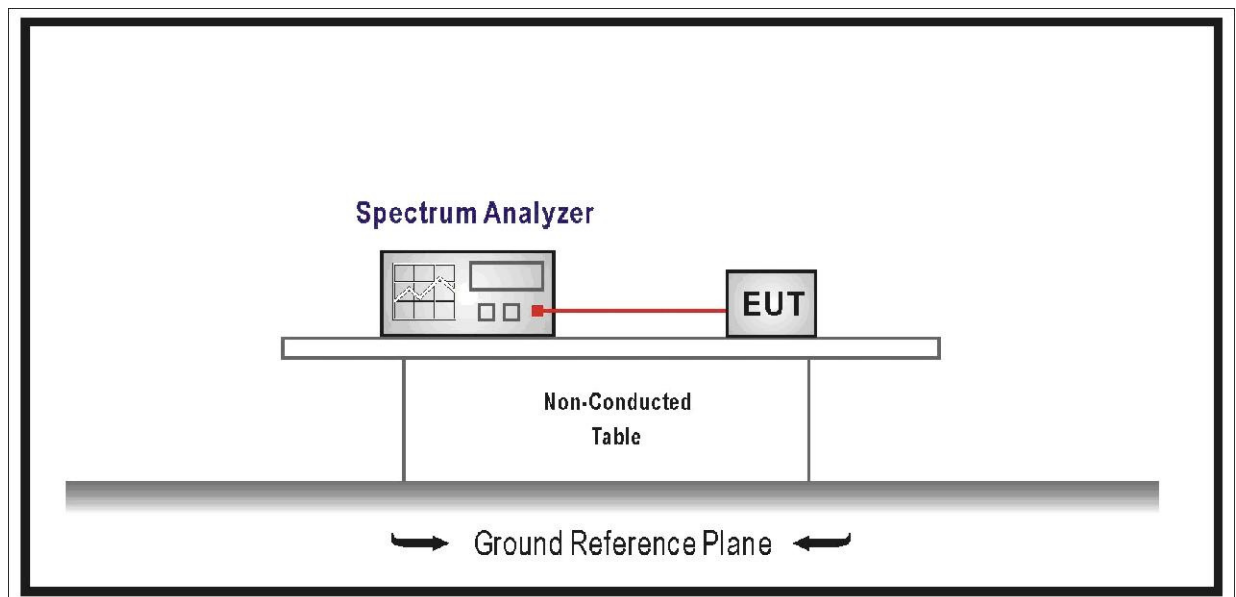

8.3. Limit

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75

hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1MHz

VBW $\geq$ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

8.5. Uncertainty

The measurement uncertainty is defined as ± 0.1 us

8.6. Test Result


Product	:	BLUETOOTH SPEAKER
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-1Mbps (GFSK_DH1)


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	114.754	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $0.3678 \text{ ms} \times 312 = 114.754 \text{ msec}$

Channel 39 (2441MHz)-(DH1)

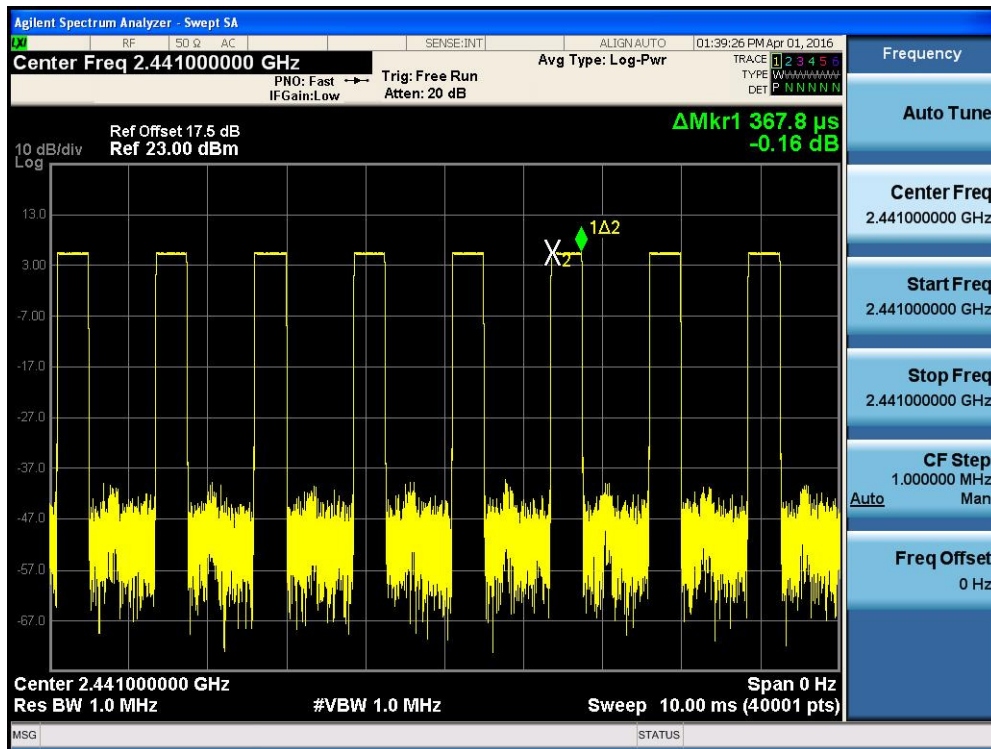

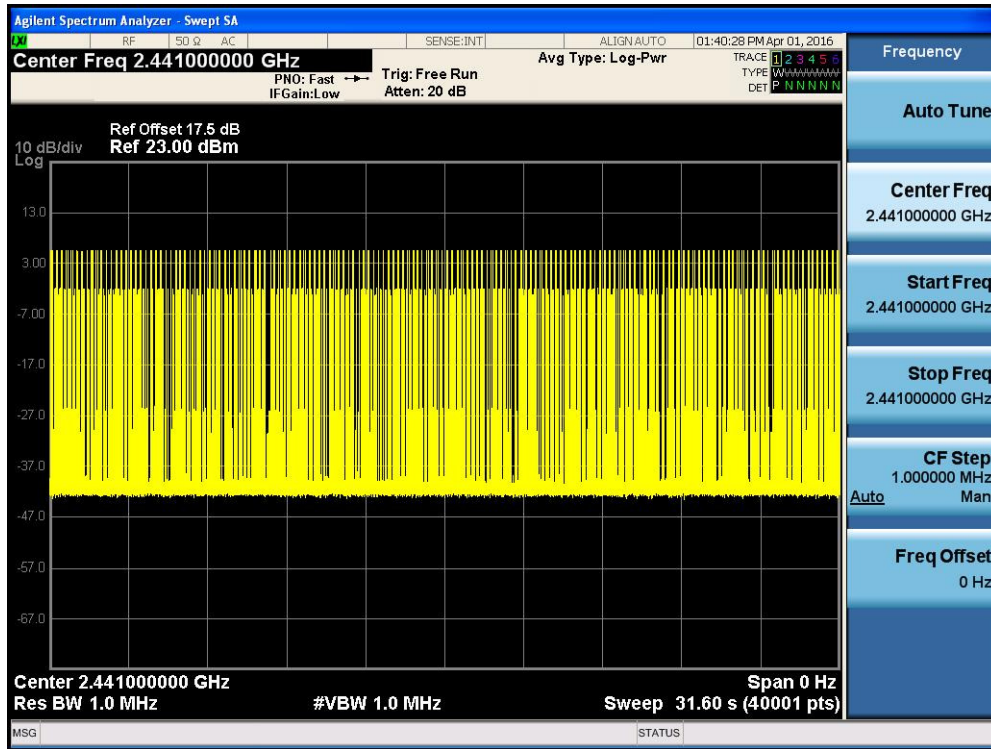


Product	:	BLUETOOTH SPEAKER
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-1Mbps (GFSK_DH3)


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	316.68	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $1.624 \text{ ms} \times 195 = 316.68 \text{ msec}$

Channel 39 (2441MHz) - (DH3)

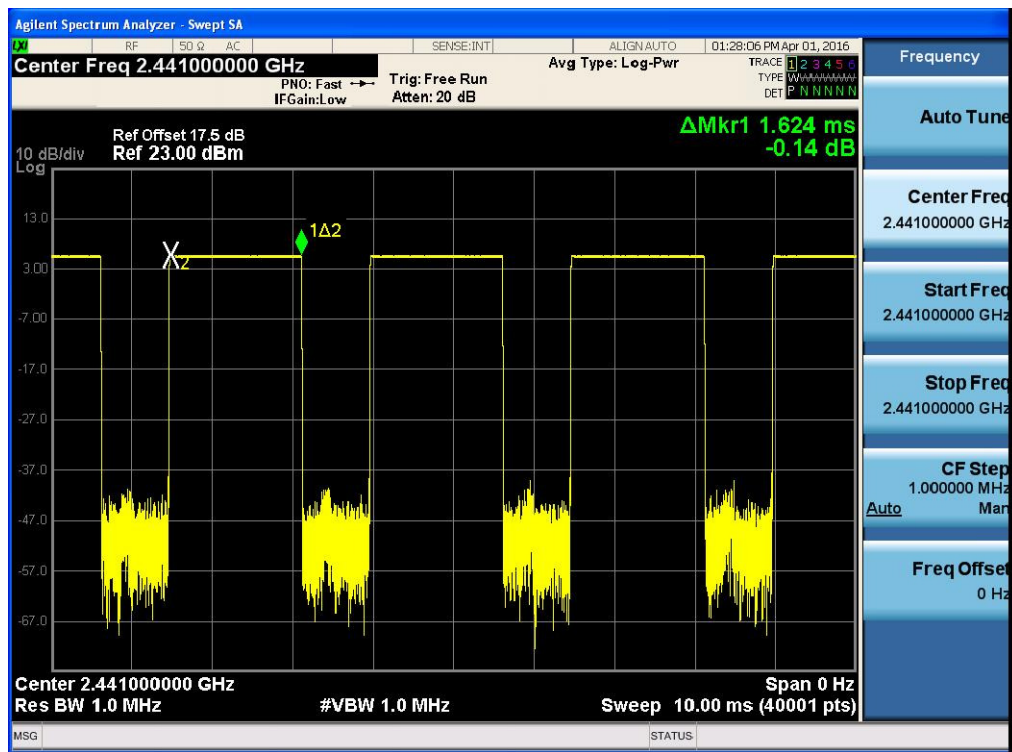

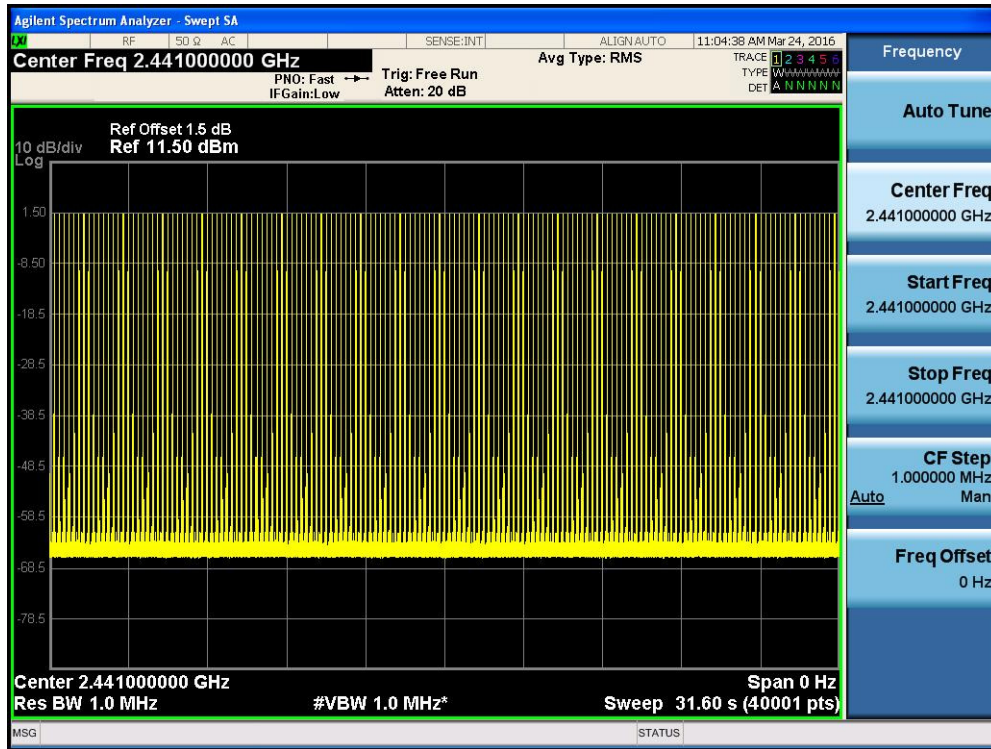


Product	:	BLUETOOTH SPEAKER
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-1Mbps (GFSK_DH5)


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	349.206	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $2.886 \text{ ms} \times 121 = 349.206 \text{ msec}$

Channel 39 (2441MHz) - (DH5)

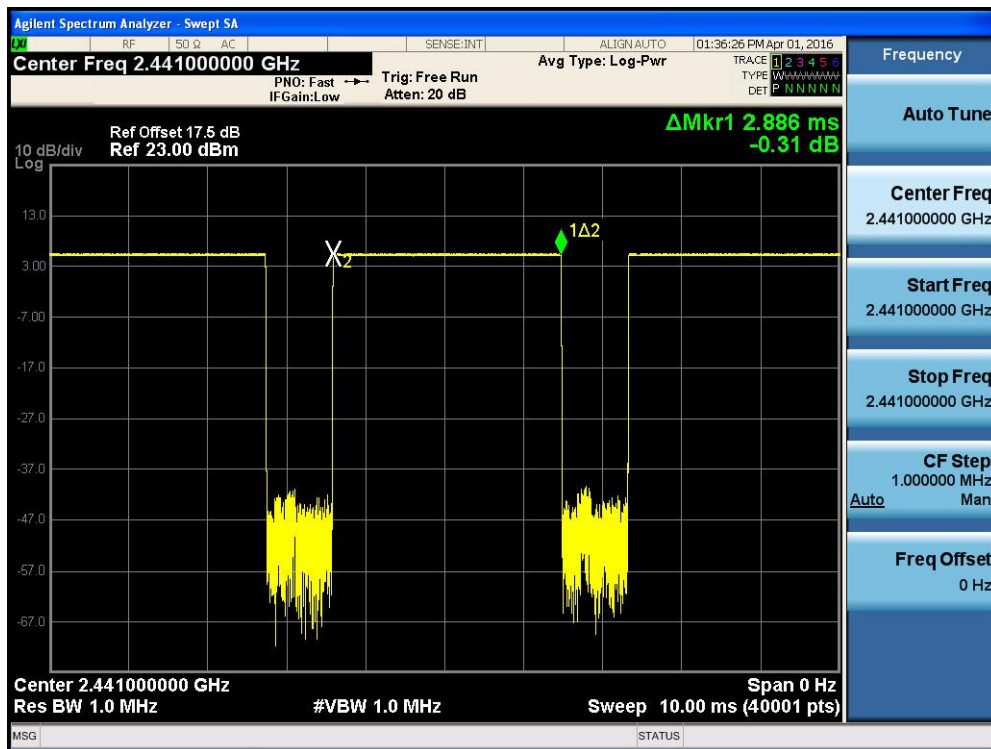

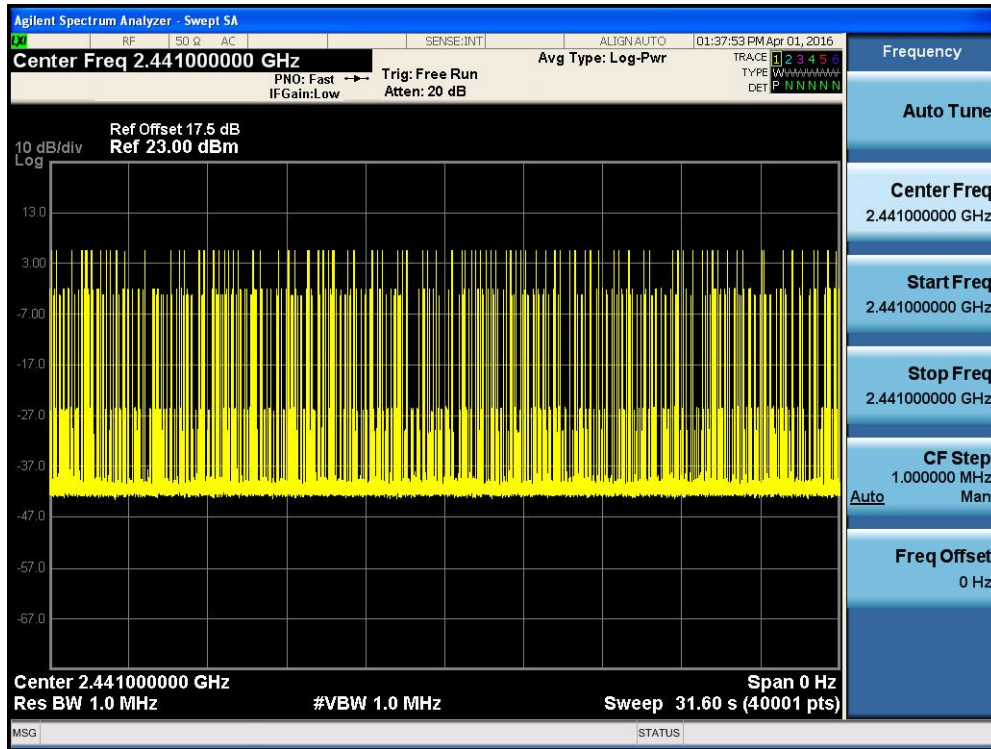

9. Peak Output Power


9.1. Test Equipment

Peak Output Power / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2017.04.03

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

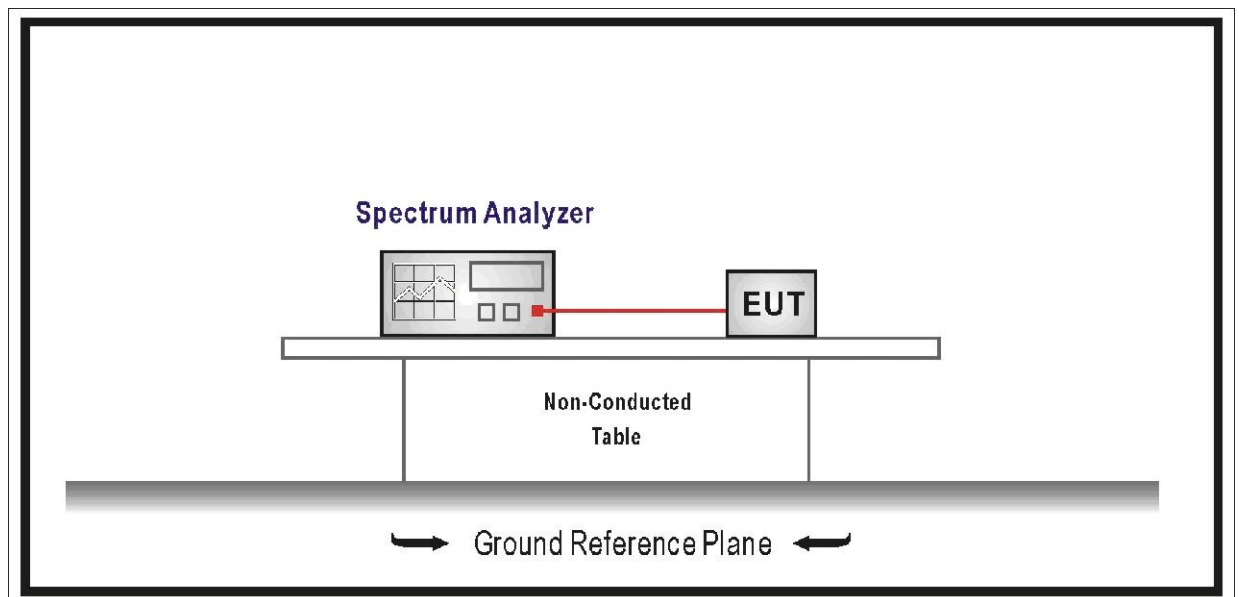

9.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Note: the conducted output power limit specified above is based on the use the antennas with

directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss).

9.5. Uncertainty


The measurement uncertainty is defined as ± 1.0 dB

9.6. Test Result


Product	:	BLUETOOTH SPEAKER
Test Item	:	Power Output
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps (GFSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	3.341	30.00	Pass
39	2441	4.336	30.00	Pass
78	2480	5.784	30.00	Pass


DH5 2402MHz

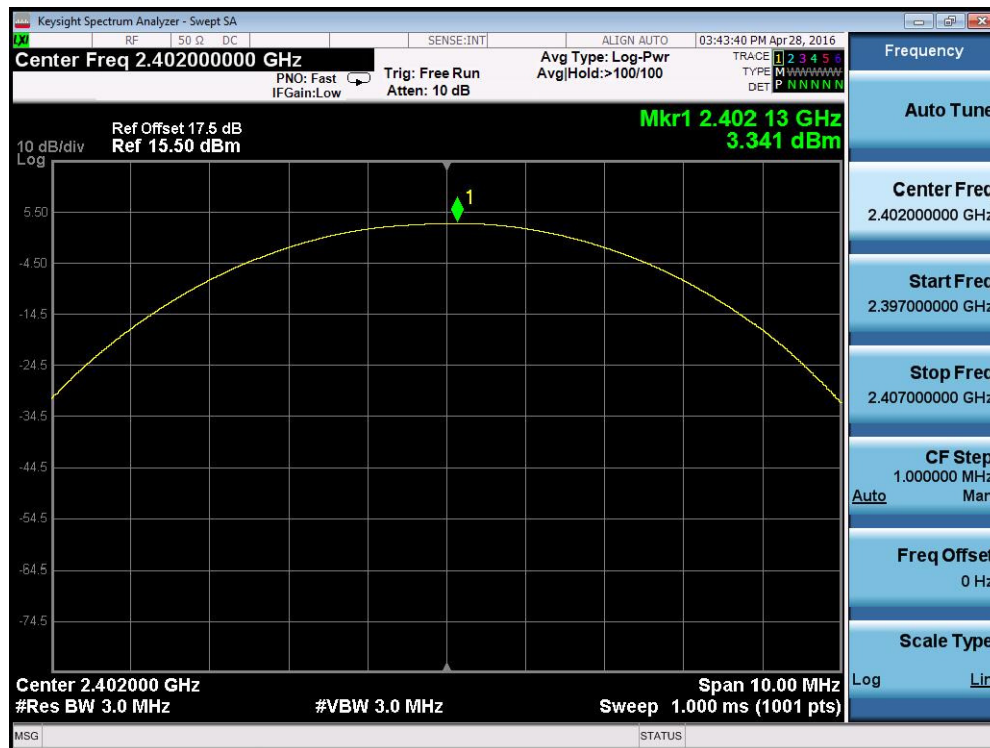

DH5 2441MHz

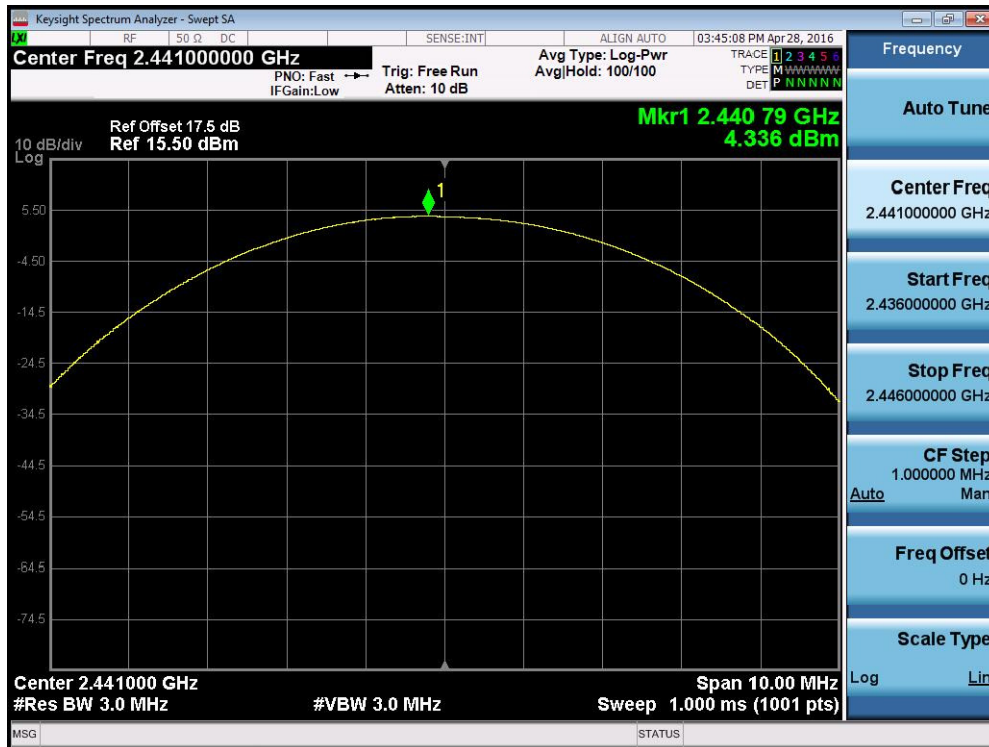


DH5 2480MHz

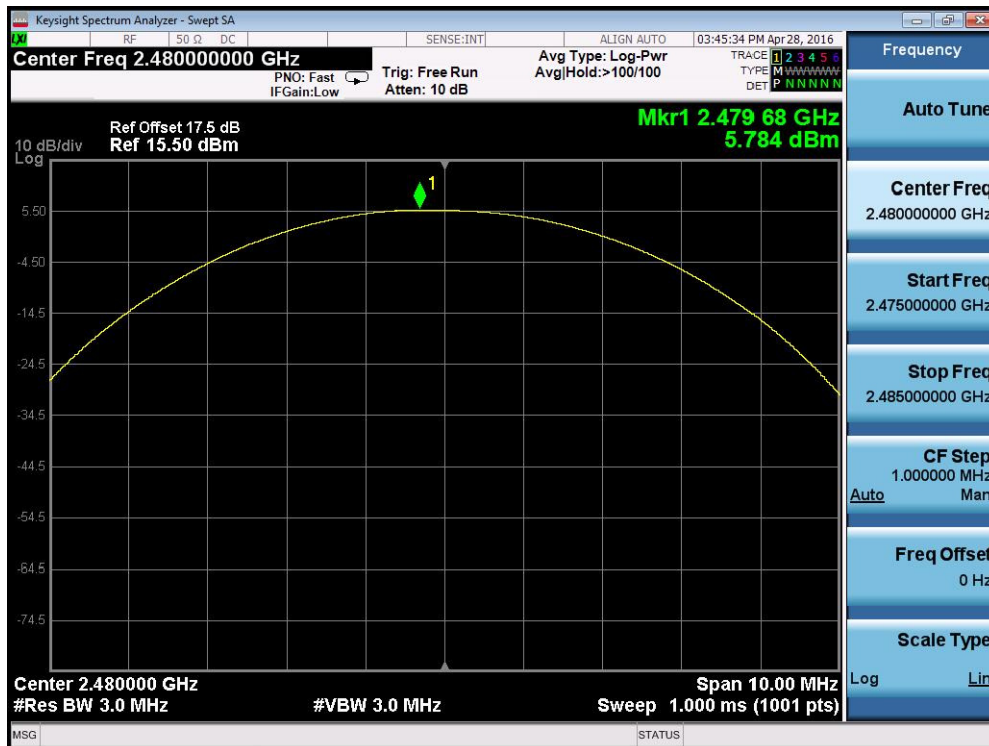


Product	: BLUETOOTH SPEAKER
Test Item	: Power Output
Test Site	: TR-8
Test Mode	: Mode 2: Transmitter-2Mbps (Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	3.468	30.00	Pass
39	2441	4.339	30.00	Pass
78	2480	5.946	30.00	Pass


2DH5 2402MHz

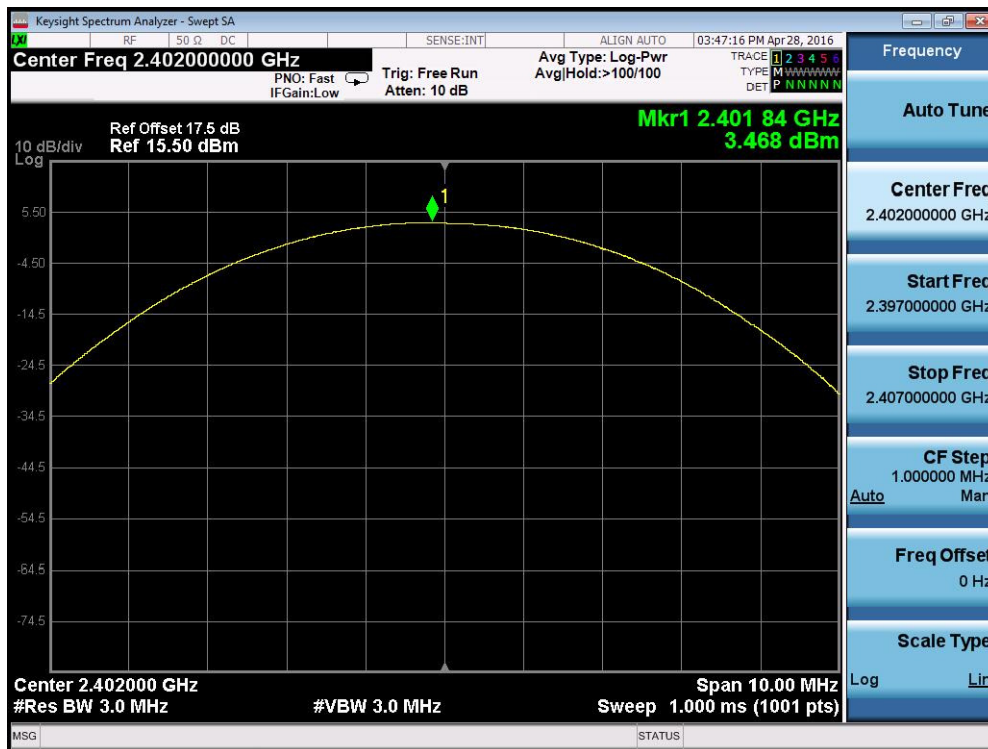

2DH5 2441MHz

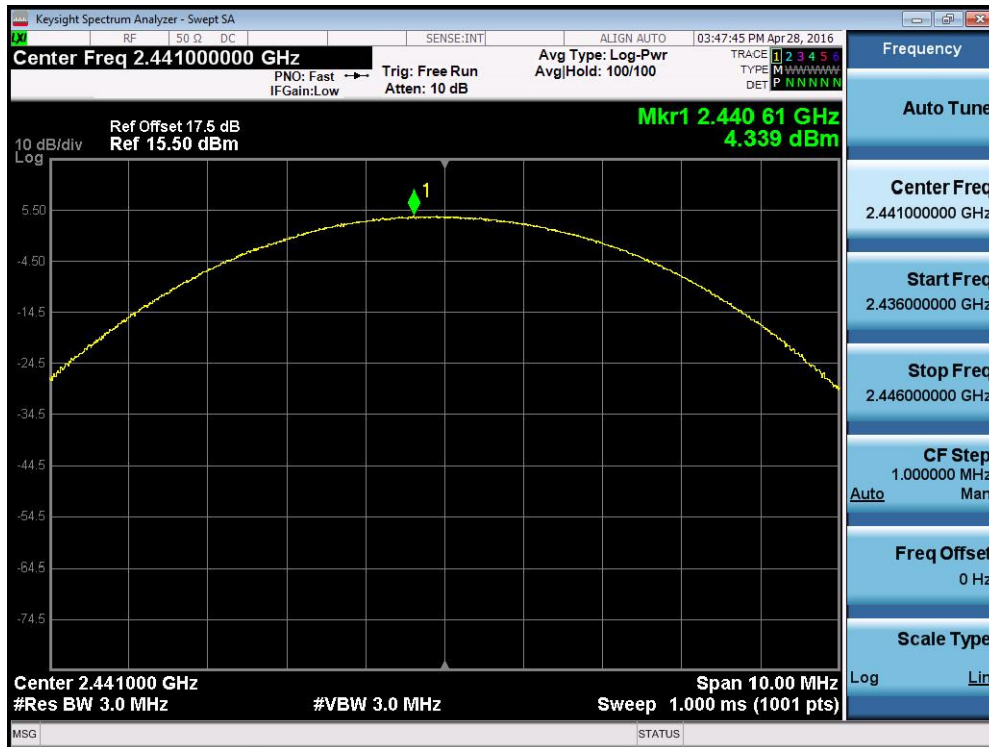


2DH5 2480MHz

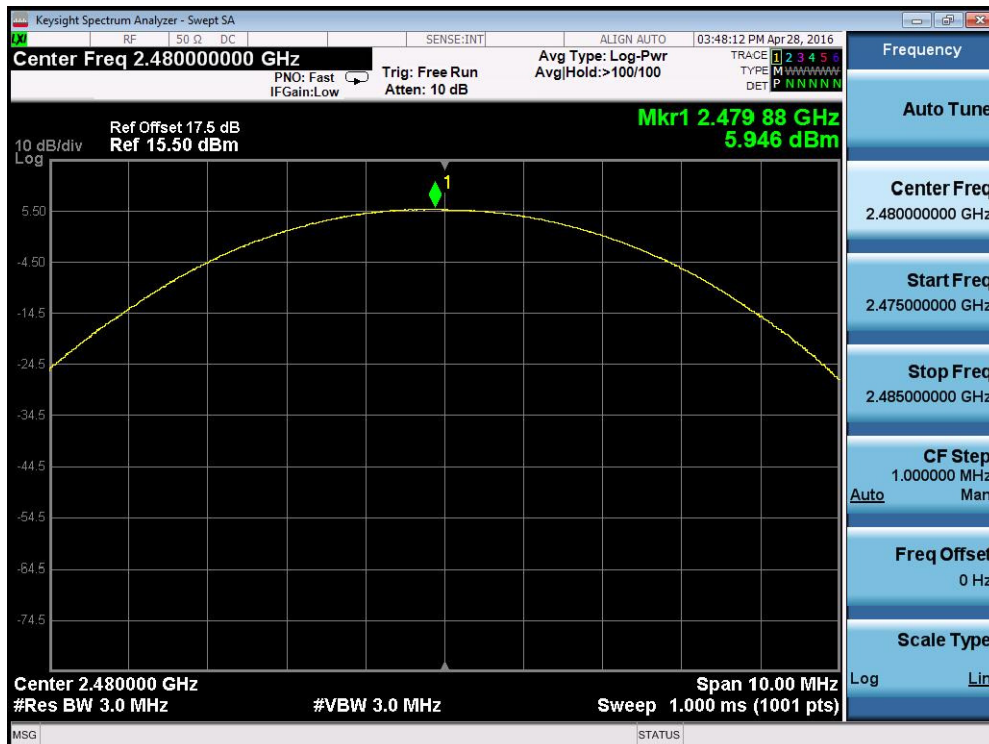


Product	: BLUETOOTH SPEAKER
Test Item	: Power Output
Test Site	: TR-8
Test Mode	: Mode 3: Transmitter-3Mbps (8DPSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	3.890	30.00	Pass
39	2441	4.778	30.00	Pass
78	2480	6.250	30.00	Pass


3DH5 2402MHz

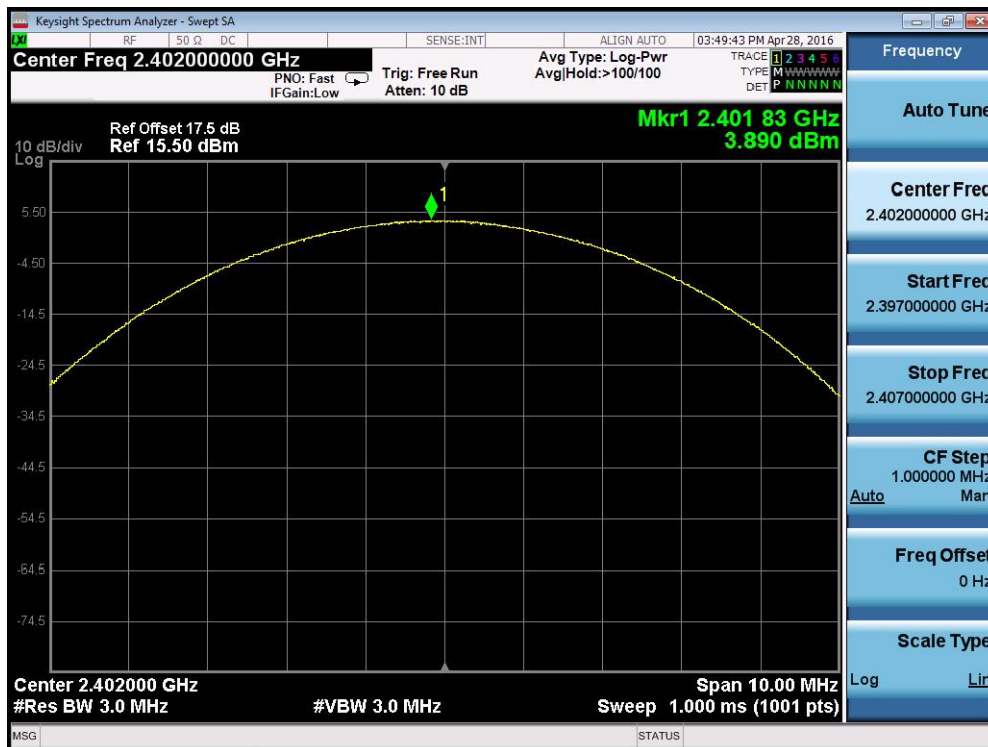

3DH5 2441MHz

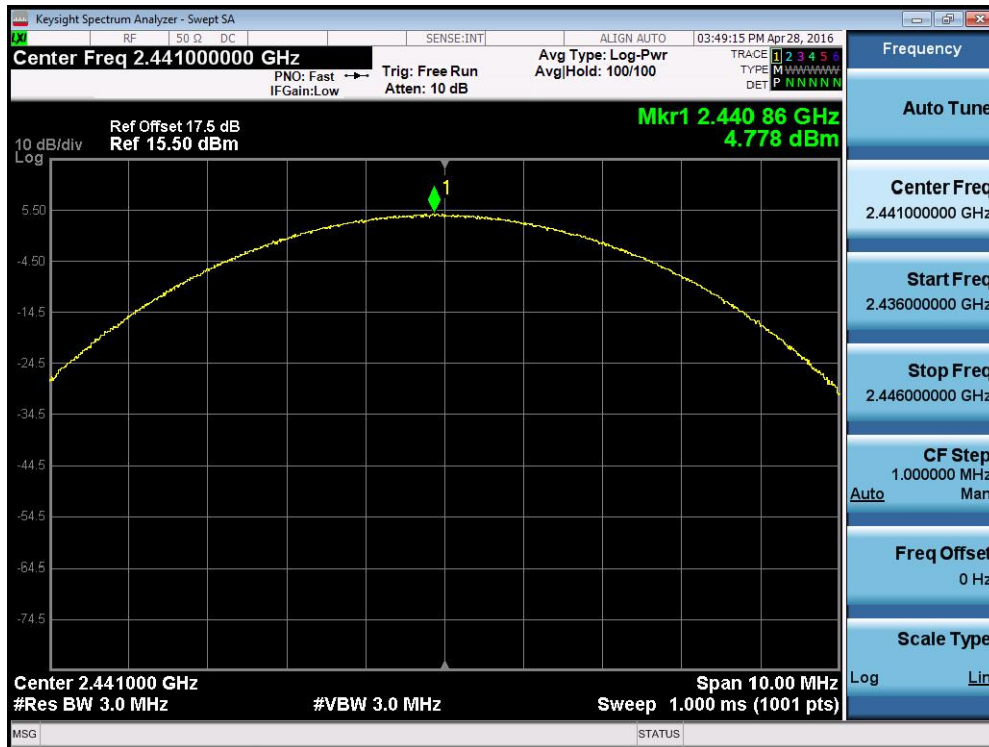

3DH5 2480MHz

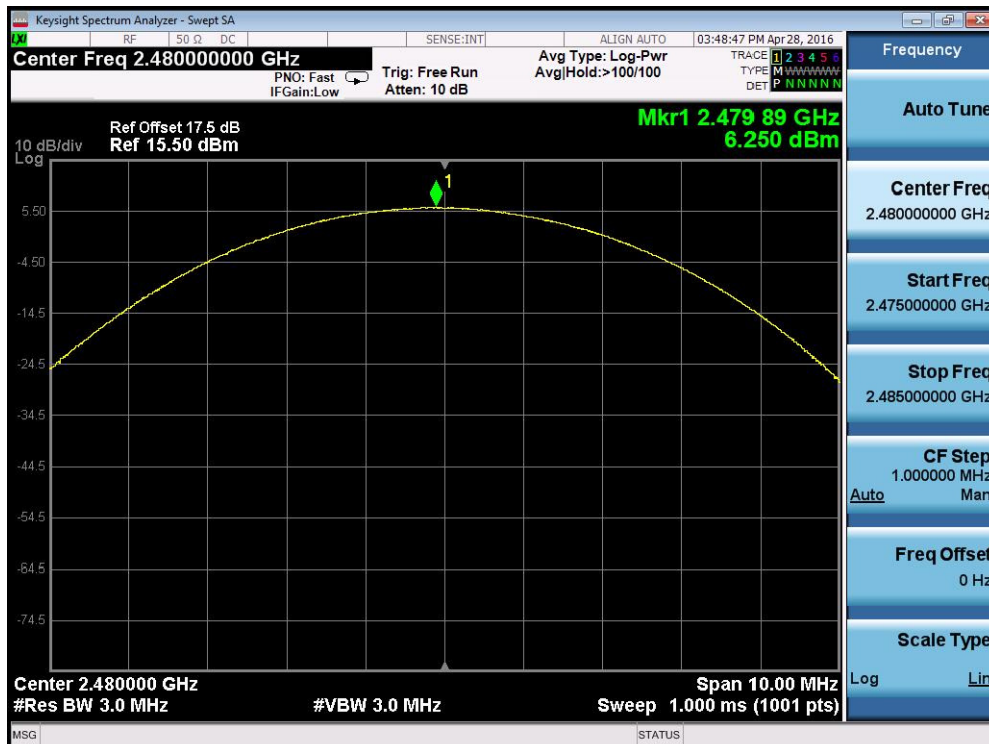

10. Emissions in non-restricted frequency bands


11.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2017.04.03

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

11.2. Test Setup

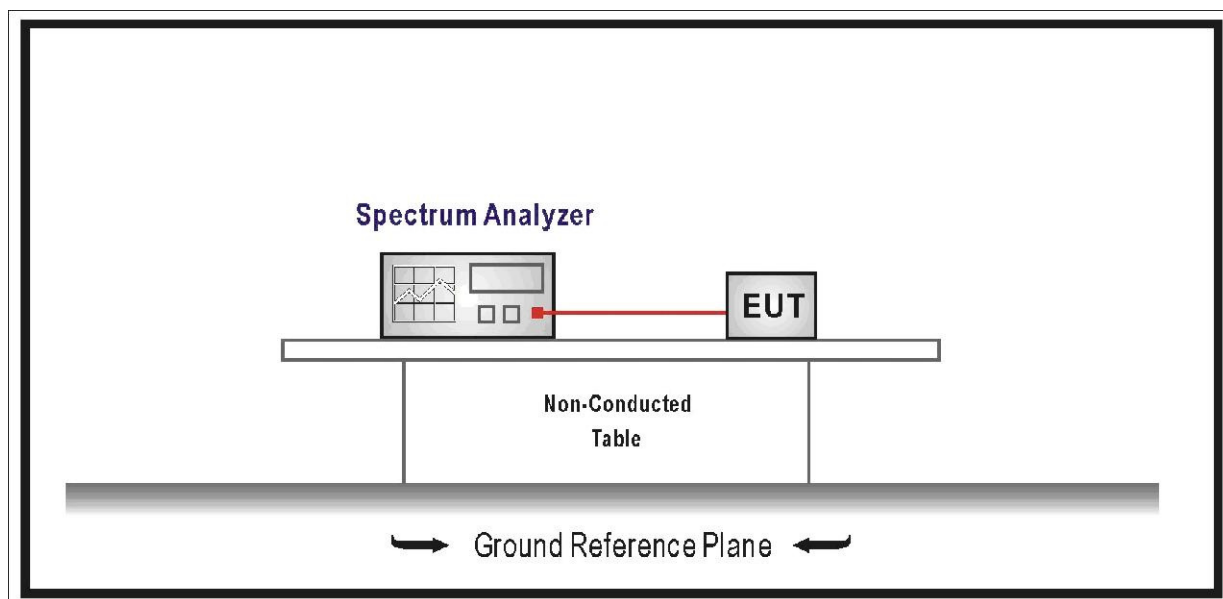

11.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in

Section 15.209(a) of FCC part 15 is not required.

11.4. Test Procedure

According to ANSI C63.10: 2013.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

The level displayed must comply with the limit specified in this section.

11.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB


11.6. Test Result

Product	:	BLUETOOTH SPEAKER
Test Item	:	Emissions in non-restricted frequency bands
Test Site	:	TR-8

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	3.77	2400.00	-44.31	48.08	>20	Pass
1	78	2480	6.73	2483.50	-51.66	58.39	>20	Pass
2	00	2402	2.88	2400.00	-34.63	37.51	>20	Pass
2	78	2480	5.87	2483.50	-51.78	57.65	>20	Pass
3	00	2402	3.64	2400.00	-34.47	38.11	>20	Pass
3	78	2480	6.71	2483.50	-50.87	57.58	>20	Pass

Note: The worst case of Emissions in non-restricted frequency bands as below:

Mode 2 CH00(2402MHz)

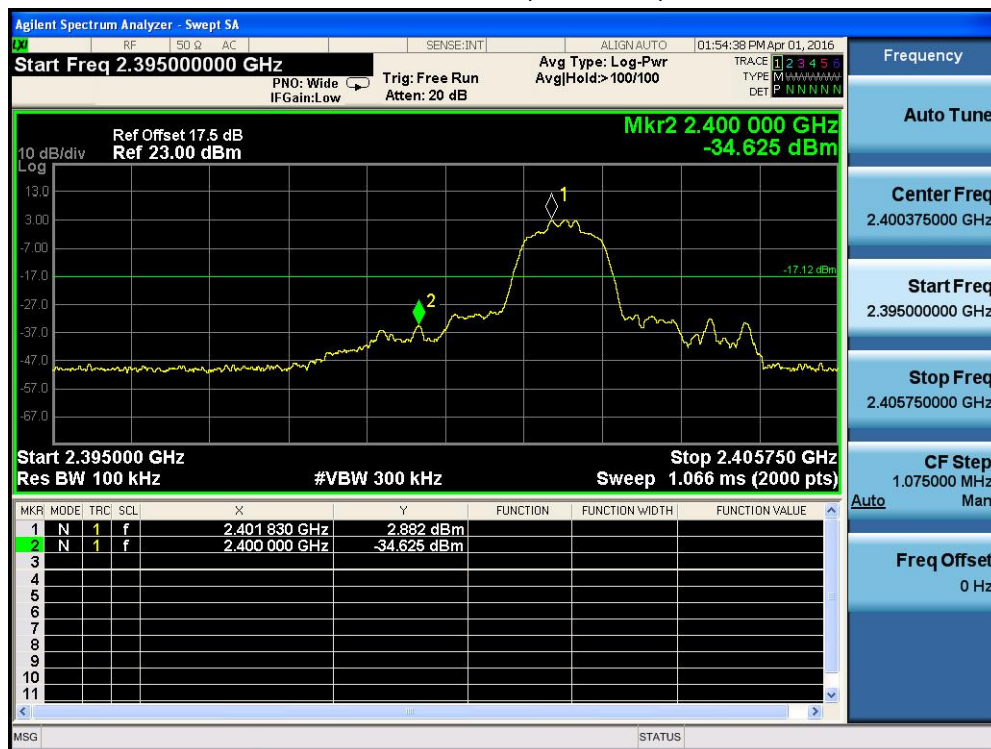

Note: The above test pattern is synthesized by multiple of the frequency range.


11. Radiated Emission Band Edge

12.1. Test Equipment

☒ Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04
Preamplifier	Miteq	NSP1800-25	1364185	2016.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2016.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2016.10.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	733	2017.02.26
DRG Horn	ETS-Lindgren	3117	00167055	2016.07.16
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016.08.07
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2017.01.04

12.2. Test Setup

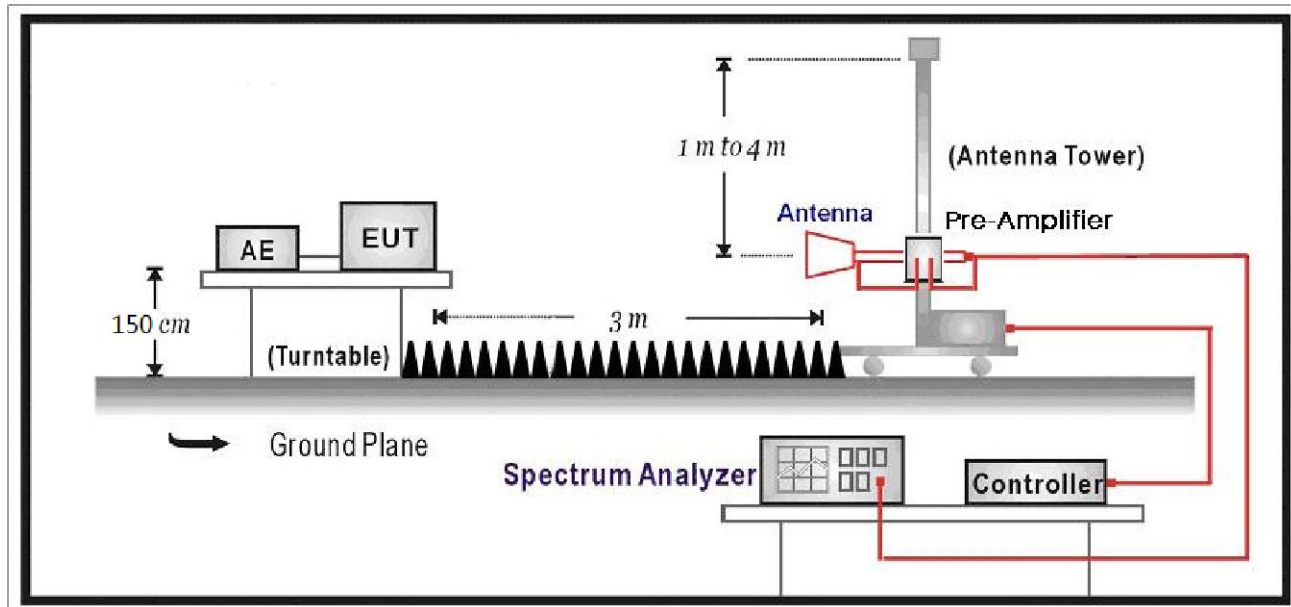

12.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) of FCC part 15.

12.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

This test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205 of FCC part 15. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with

sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b) of FCC part 15.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209 of FCC Part 15. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit of FCC part 15.

If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method may be employed.

12.5. Uncertainty

The measurement uncertainty above 1G is defined as $\pm 3.9 \text{ dB}$

below 1G is defined as $\pm 3.8 \text{ dB}$

12.6. Test Result


All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;


Average = Peak Measure Level+ Duty Factor

Duty Factor= $20 \cdot \log(\text{Pulse Number} \cdot \text{On Time} / 100) = -30.90\text{dB}$ in worst condition in normal use.

Pulse Number

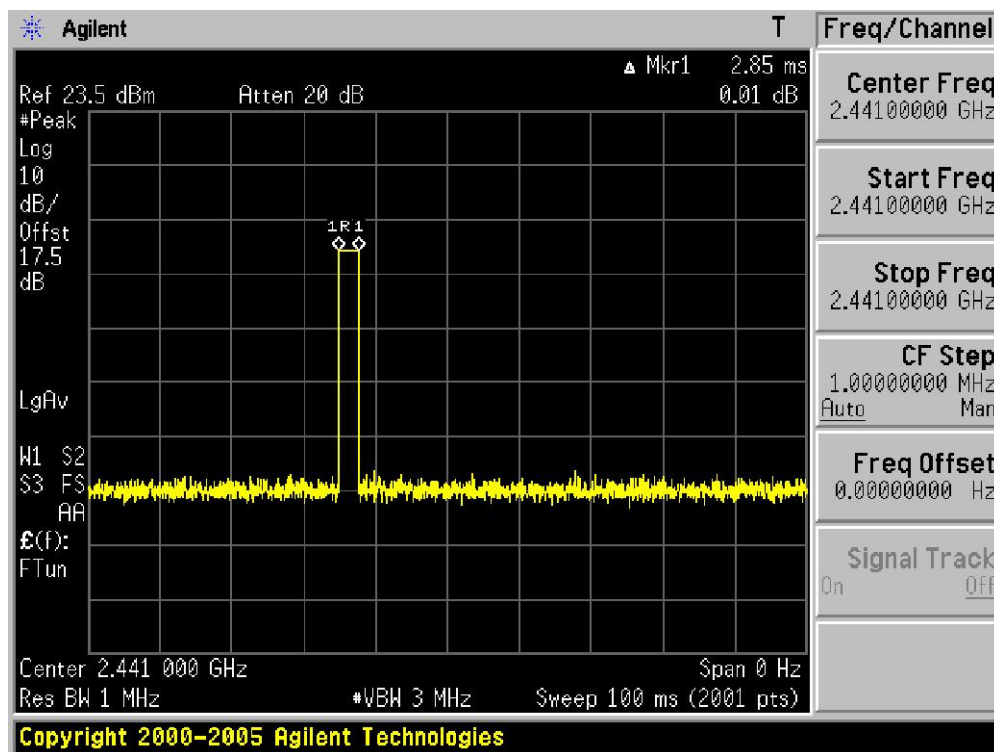


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1 Transmit at CH2402 by DH5	

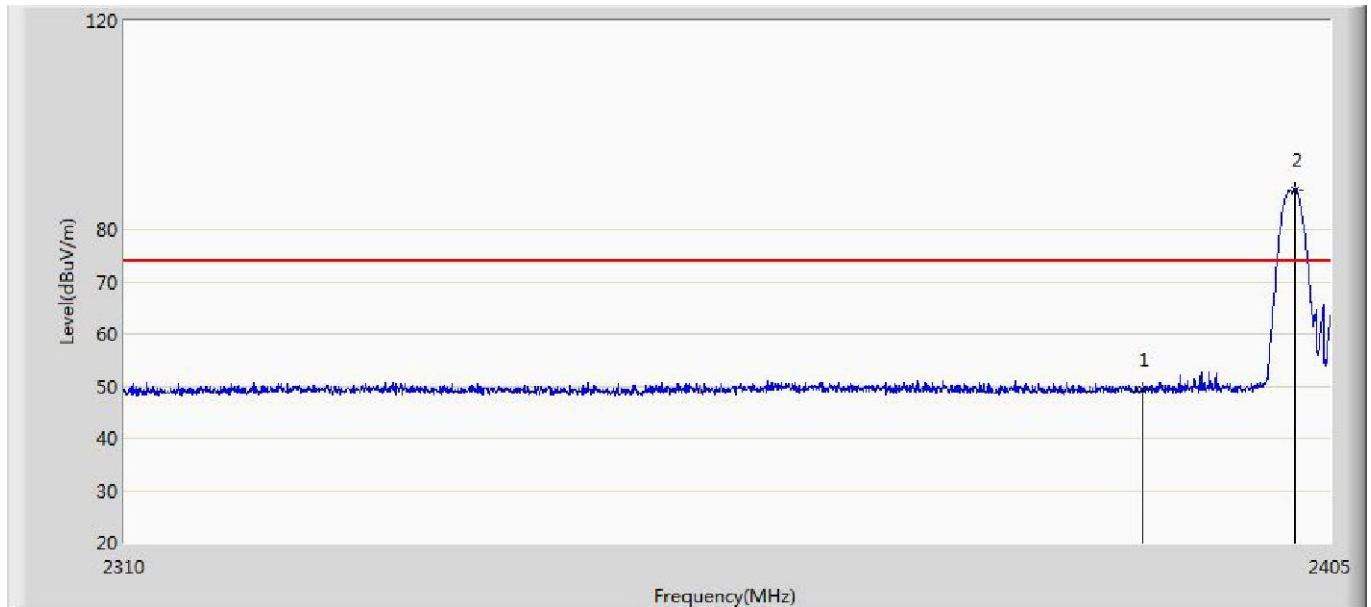

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.306	11.443	-24.694	74.000	37.863	PK
2	*	2402.198	87.653	49.813	N/A	N/A	37.840	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1		2390.000	49.306	18.406	-35.594	54.000	-30.90	AV
2	*	2402.198	87.653	56.753	N/A	N/A	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1 Transmit at CH2402 by DH5	

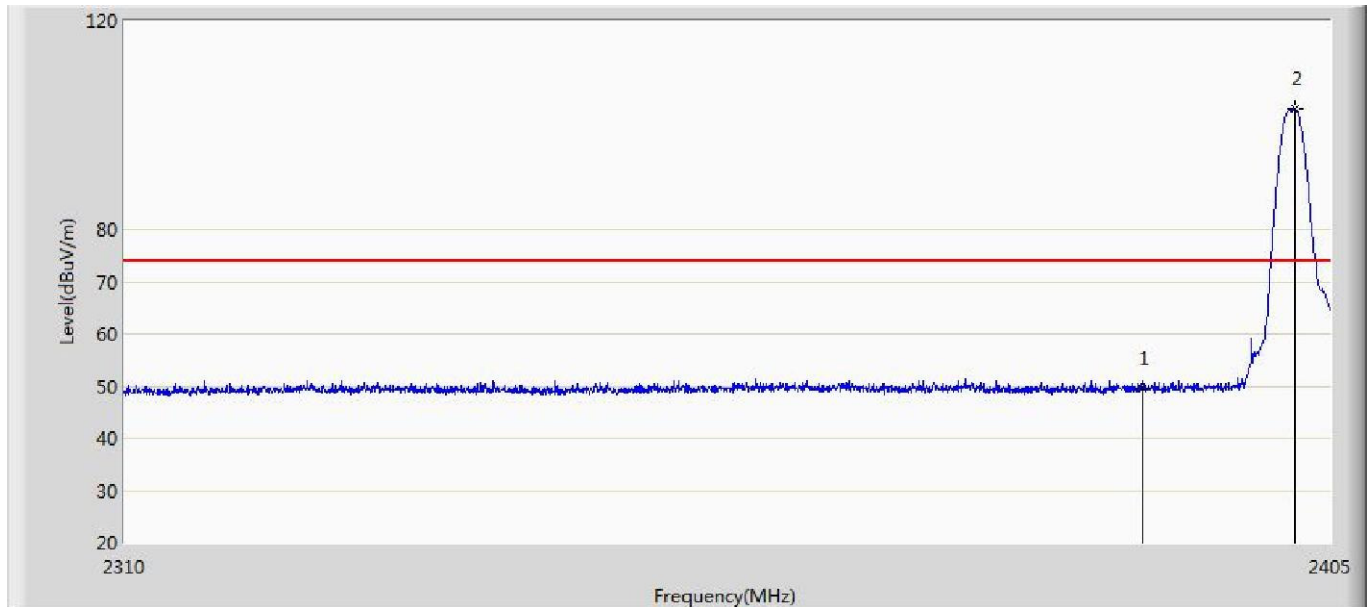

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.604	11.741	-24.396	74.000	37.863	PK
2	*	2402.198	103.150	65.310	N/A	N/A	37.840	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1		2390.000	49.604	18.704	-35.296	54.000	-30.90	AV
2	*	2402.198	103.150	72.25	N/A	N/A	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1 Transmit at CH2480 by DH5	

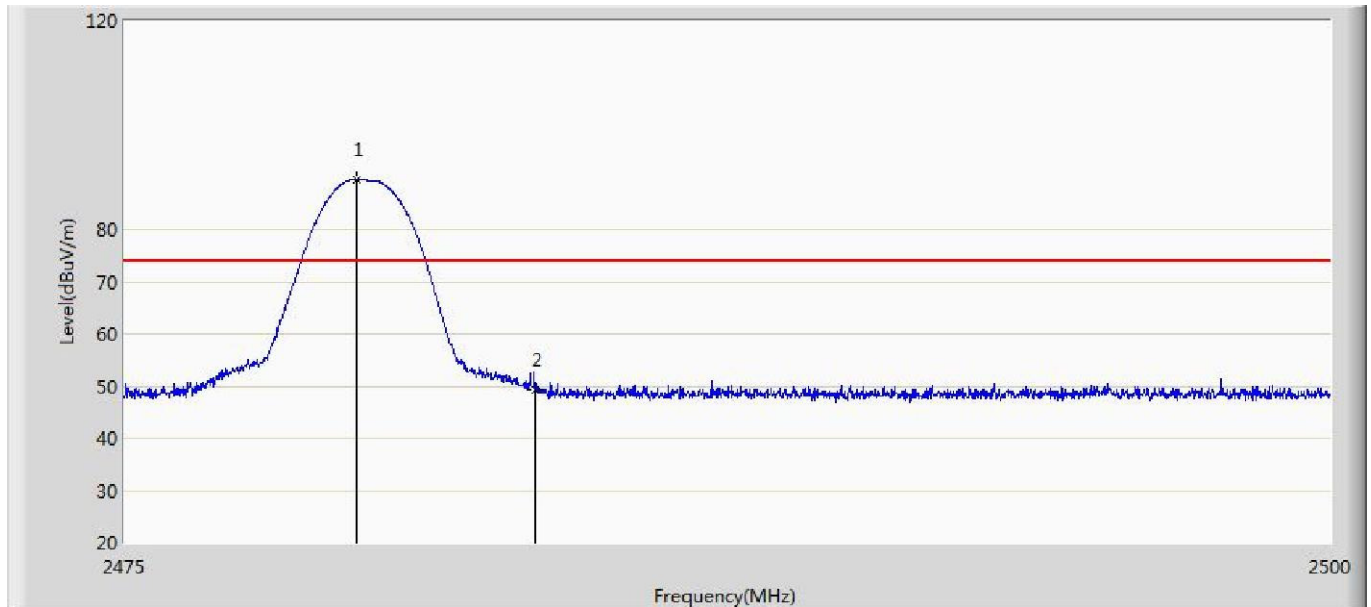

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.812	89.590	51.578	N/A	N/A	38.012	PK
2		2483.500	49.241	11.203	-24.759	74.000	38.038	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1	*	2479.812	89.590	58.69	N/A	N/A	-30.90	AV
2		2483.500	49.241	18.341	-35.65	54.000	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 1 Transmit at CH2480 by DH5	

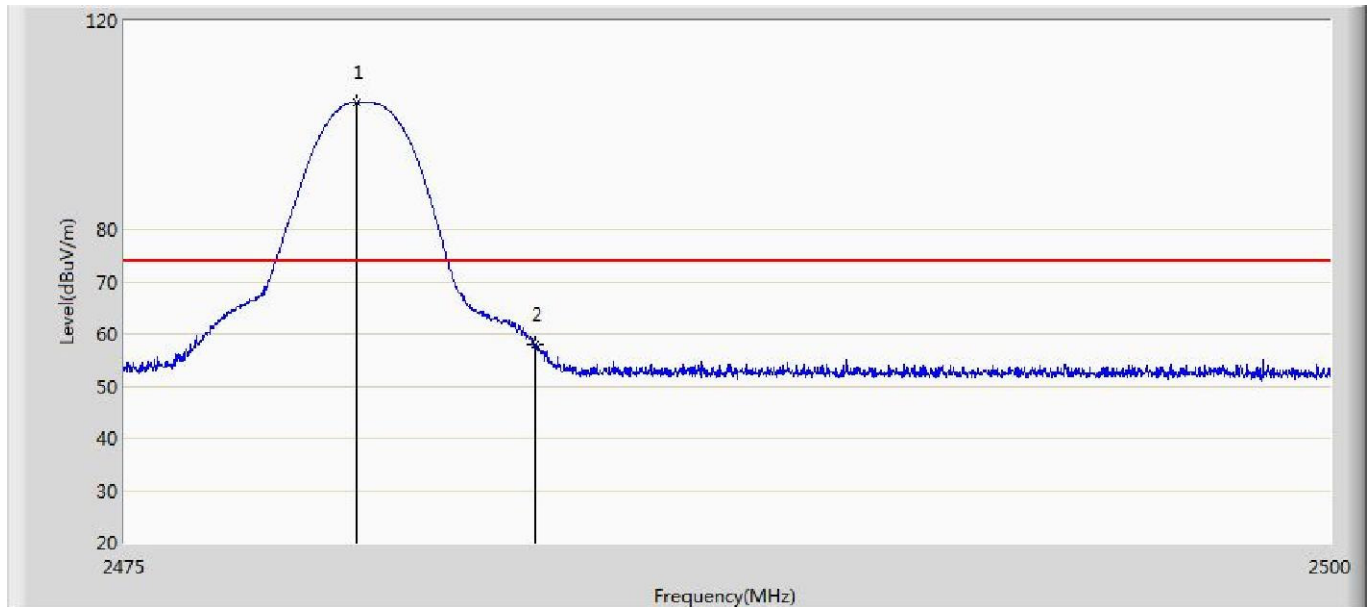

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.812	104.440	66.428	N/A	N/A	38.012	PK
2		2483.500	57.912	19.874	-16.088	74.000	38.038	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1	*	2479.812	104.440	73.54	N/A	N/A	-30.90	AV
2		2483.500	57.912	27.012	-26.988	54.000	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 2 Transmit at CH2402 by 2DH5	

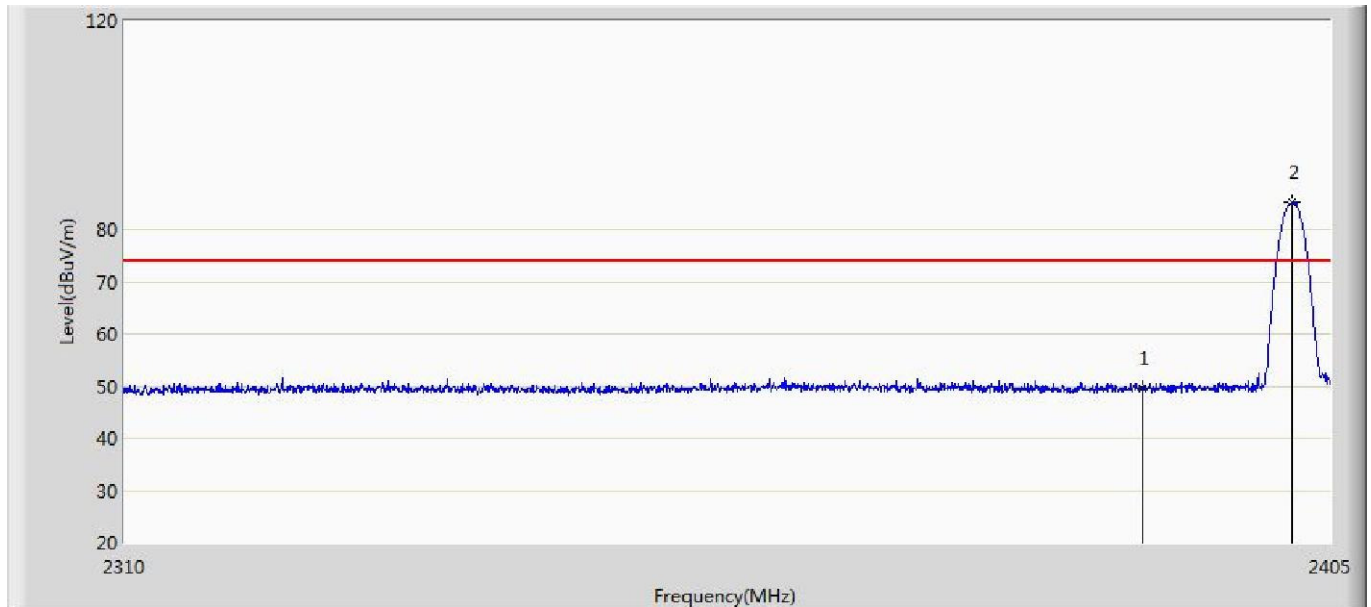

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.430	11.567	-24.570	74.000	37.863	PK
2	*	2402.008	85.246	47.406	N/A	N/A	37.840	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1		2390.000	49.430	18.53	-35.47	54.000	-30.90	AV
2	*	2402.008	85.246	54.346	N/A	N/A	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 2 Transmit at CH2402 by 2DH5	

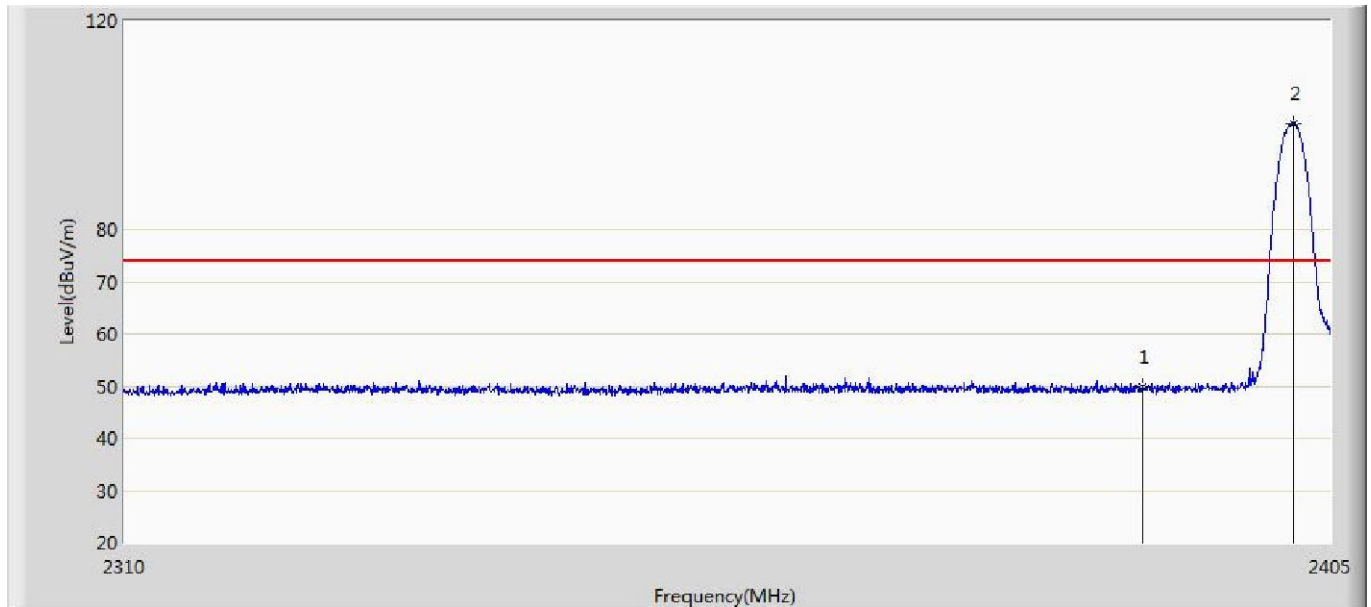

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.726	11.863	-24.274	74.000	37.863	PK
2	*	2402.055	100.414	62.574	N/A	N/A	37.840	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1		2390.000	49.726	18.826	-35.174	54.000	-30.90	AV
2	*	2402.055	100.414	69.514	N/A	N/A	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 2 Transmit at CH2480 by 2DH5	

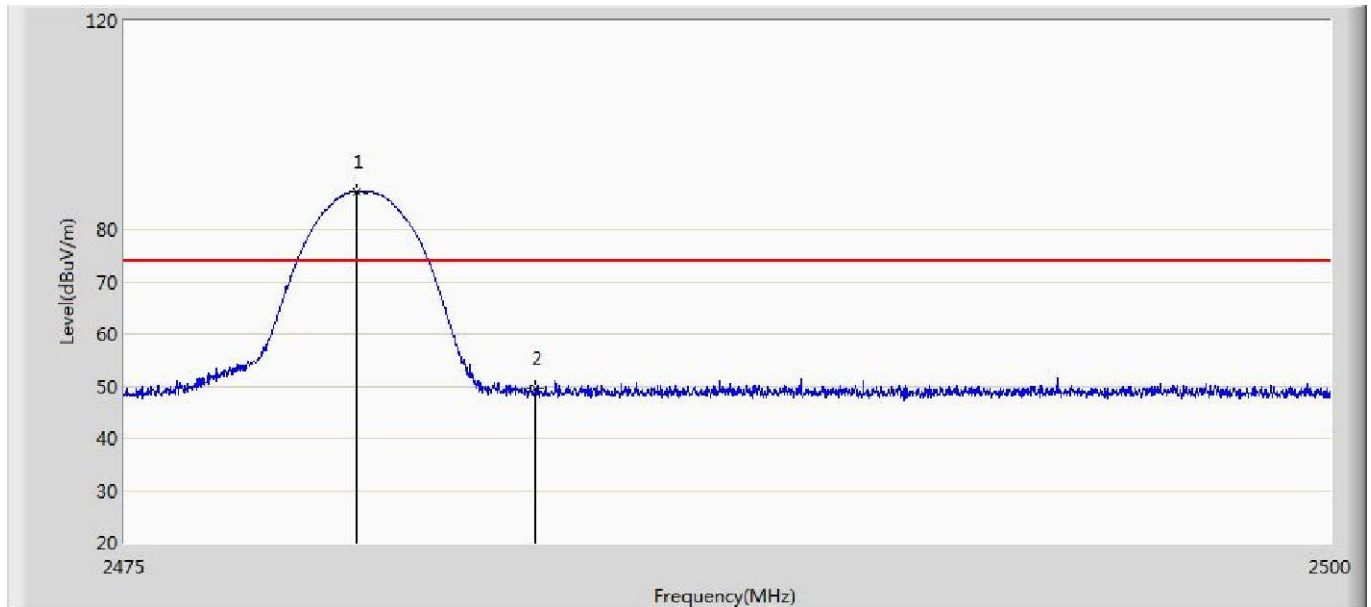

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.812	87.267	49.255	N/A	N/A	38.012	PK
2		2483.500	49.685	11.647	-24.315	74.000	38.038	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1	*	2479.812	87.267	56.367	N/A	N/A	-30.90	AV
2		2483.500	49.685	18.785	-35.215	54.000	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 2 Transmit at CH2480 by 2DH5	

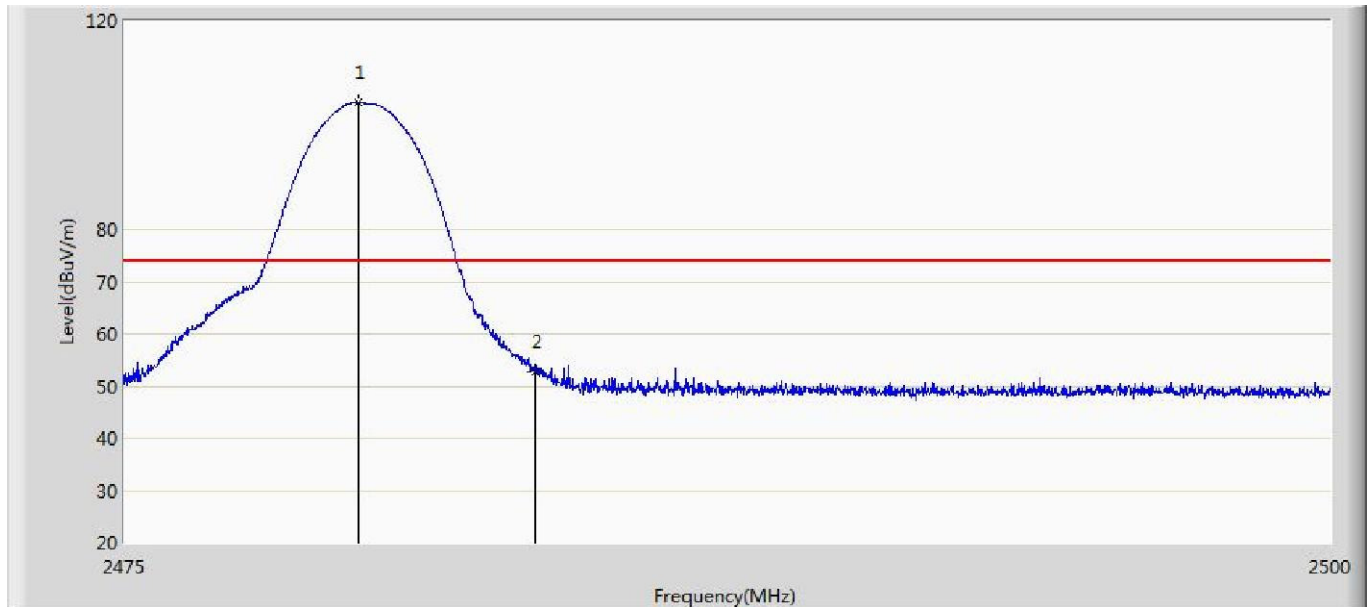

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.850	104.357	66.345	N/A	N/A	38.012	PK
2		2483.500	52.769	14.731	-21.231	74.000	38.038	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1	*	2479.850	104.357	73.457	N/A	N/A	-30.90	AV
2		2483.500	52.769	21.869	-32.131	54.000	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 3 Transmit at CH2402 by 3DH5	

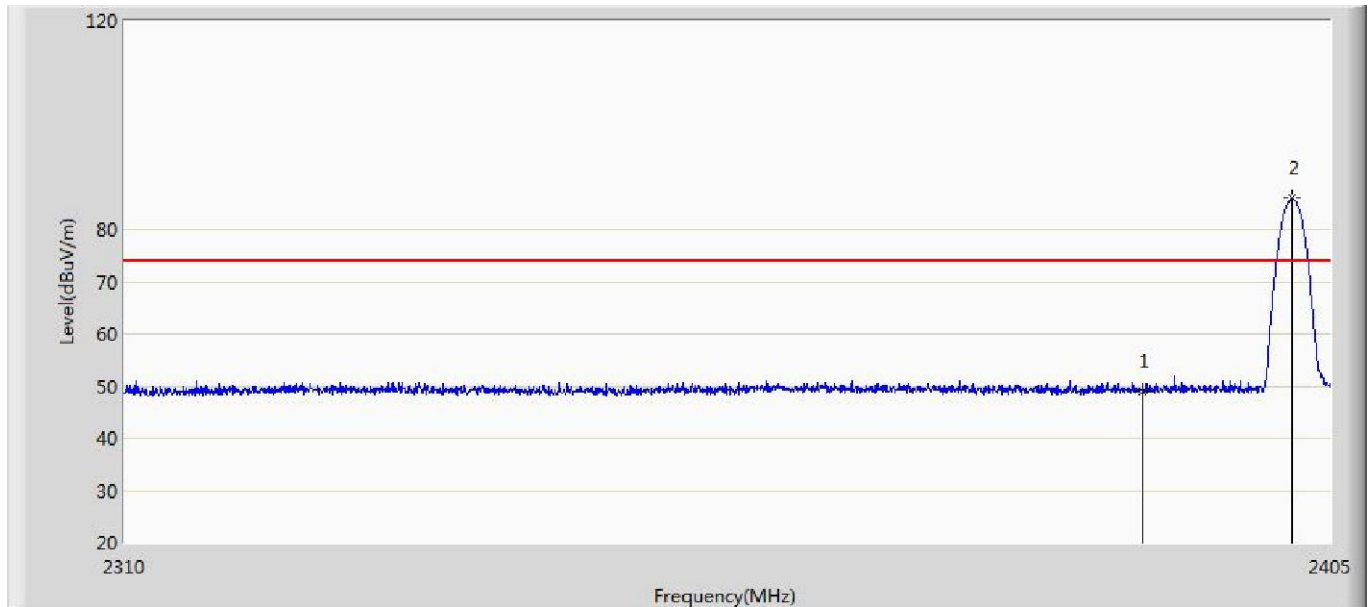

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.024	11.161	-24.976	74.000	37.863	PK
2	*	2401.913	86.068	48.228	N/A	N/A	37.840	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1		2390.000	49.024	18.124	-35.876	54.000	-30.90	AV
2	*	2401.913	86.068	55.168	N/A	N/A	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 3 Transmit at CH2402 by 3DH5	

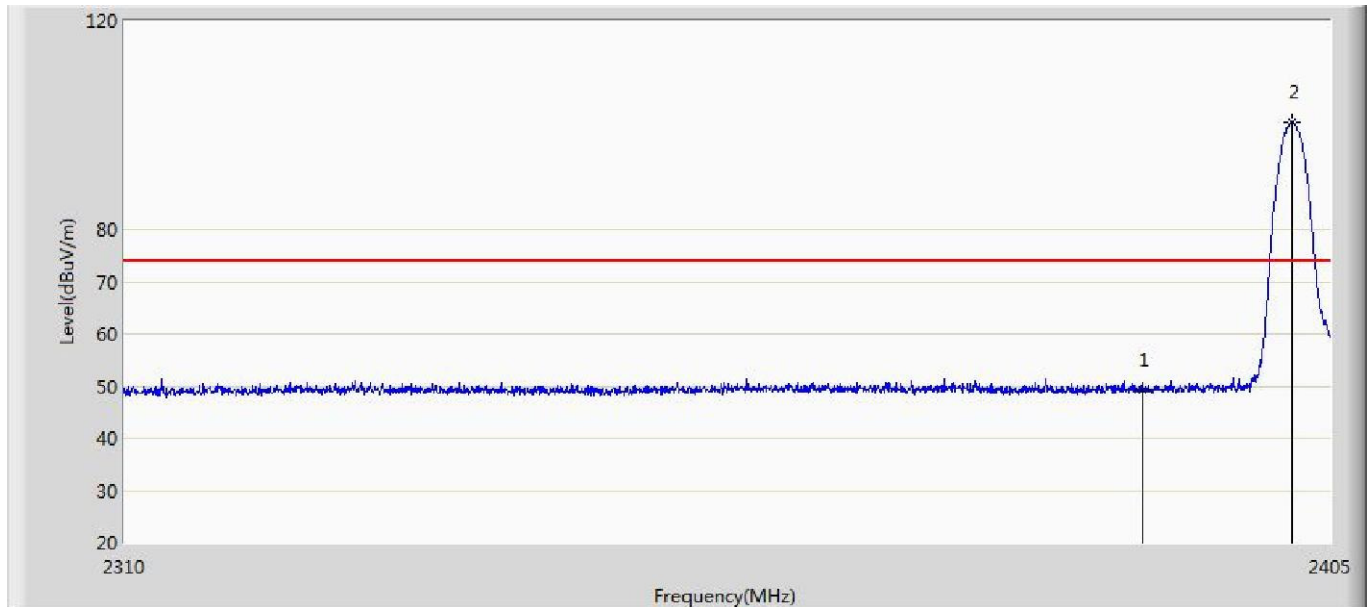

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.291	11.428	-24.709	74.000	37.863	PK
2	*	2401.913	100.711	62.871	N/A	N/A	37.840	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1		2390.000	49.291	18.391	-35.609	54.000	-30.90	AV
2	*	2401.913	100.711	69.811	N/A	N/A	-30.90	AV


Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 3 Transmit at CH2480 by 3DH5	

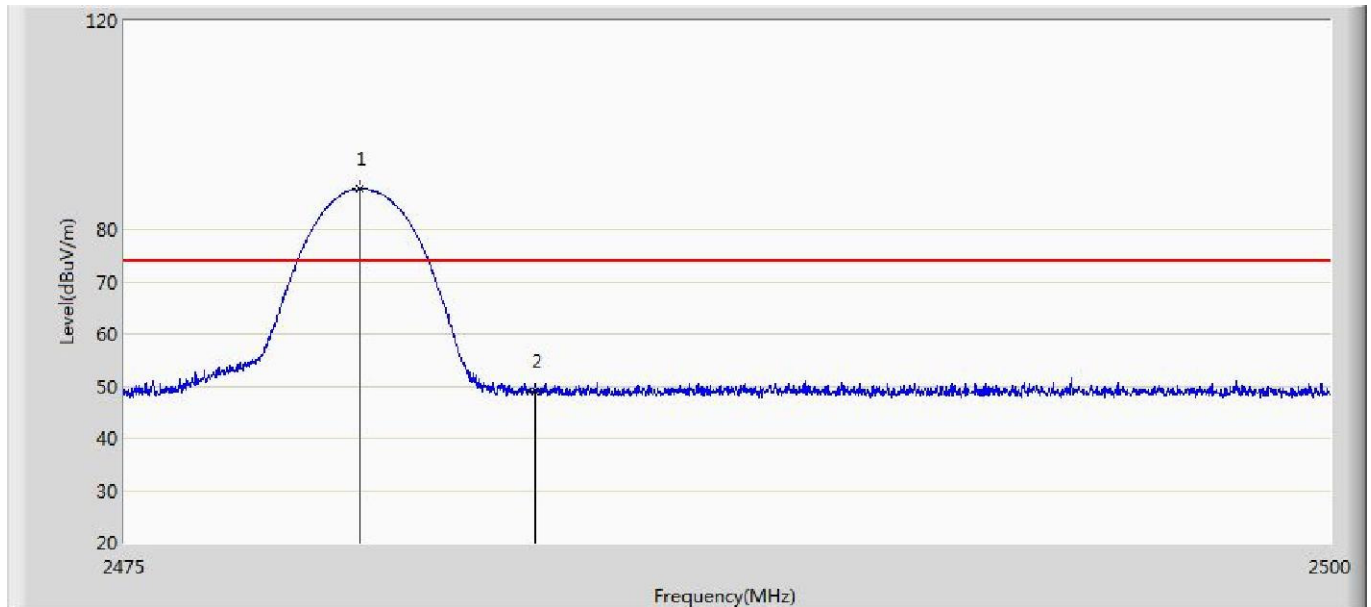

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.863	87.720	49.707	N/A	N/A	38.013	PK
2		2483.500	49.027	10.989	-24.973	74.000	38.038	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1	*	2479.863	87.720	56.820	N/A	N/A	-30.90	AV
2		2483.500	49.027	18.127	-35.873	54.000	-30.90	AV

Engineer:	
Site: AC5	Time: 2016/4/1
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: BLUETOOTH SPEAKER	Power: AC 120V/60Hz
Note: Mode 3 Transmit at CH2480 by 3DH5	

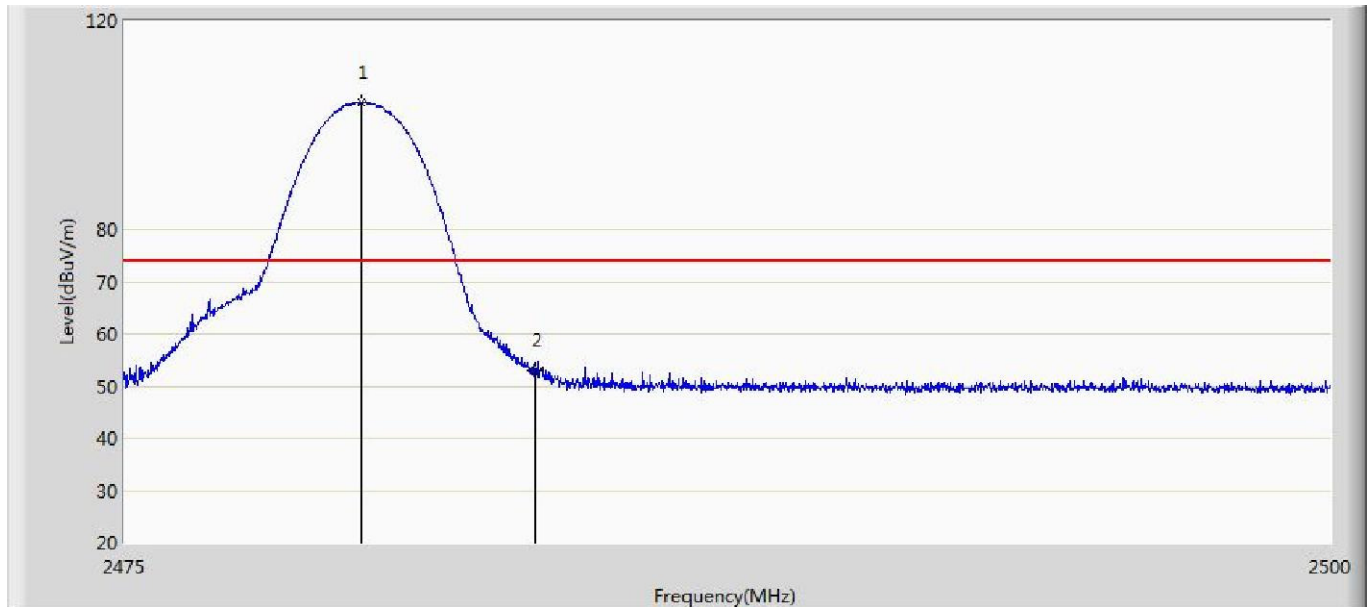

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.900	104.457	66.444	N/A	N/A	38.013	PK
2		2483.500	53.139	15.101	-20.861	74.000	38.038	PK

No	Mark	Frequency (MHz)	Peak Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Duty Factor (dB)	Type
1	*	2479.900	104.457	73.557	N/A	N/A	-30.90	AV
2		2483.500	53.139	22.239	-31.761	54.000	-30.90	AV

————— The End —————