

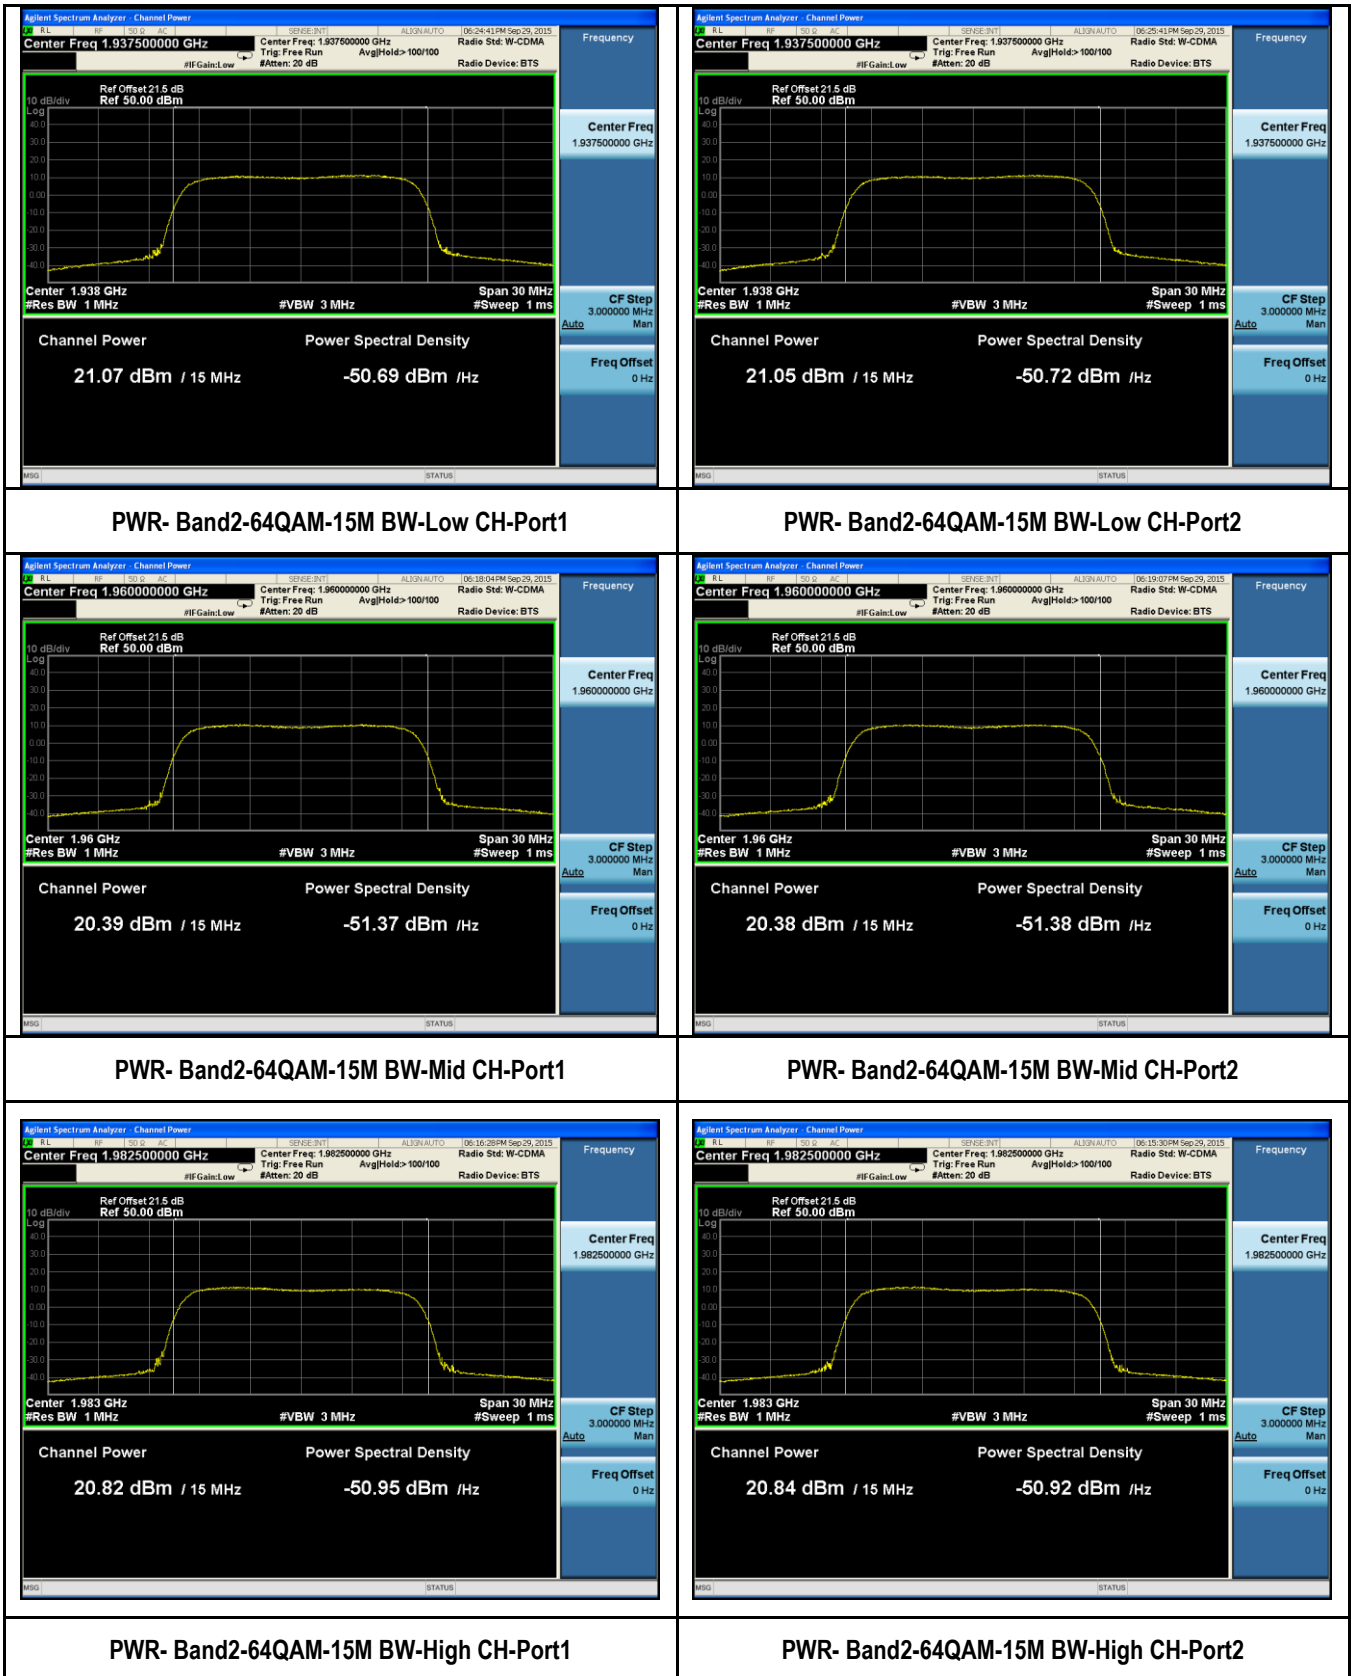




Test Plots for Band 2-64QAM-15MHz

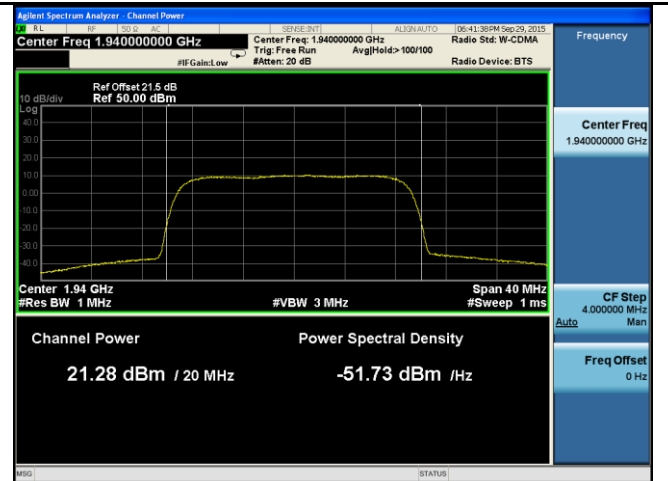



Test Plots for Band 2-64QAM-20MHz

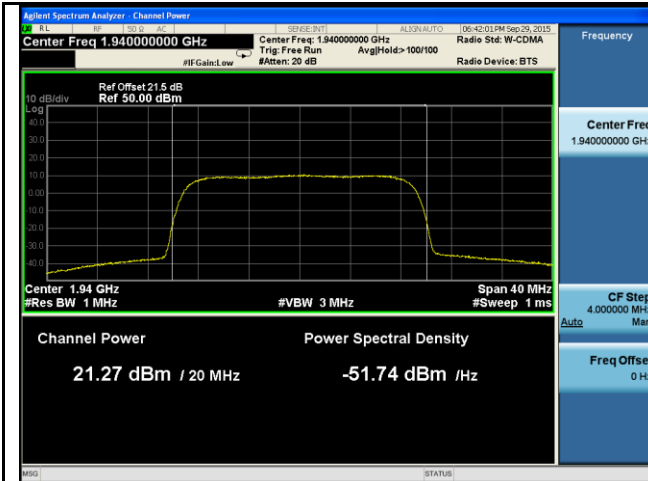

PWR-Band4-64QAM-20M BW-Low CH-Port1

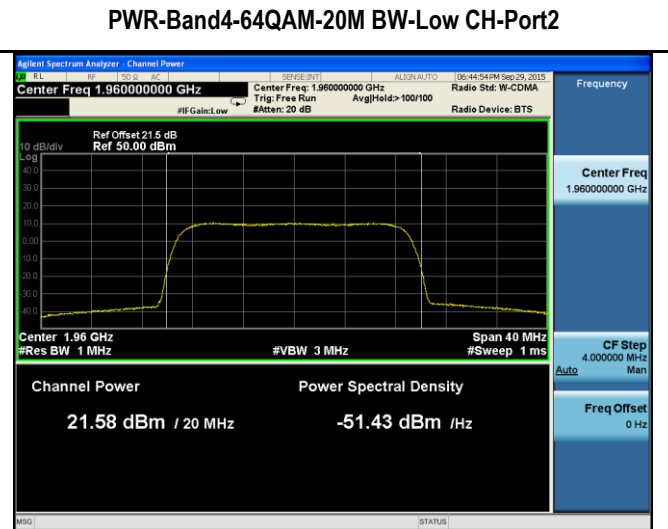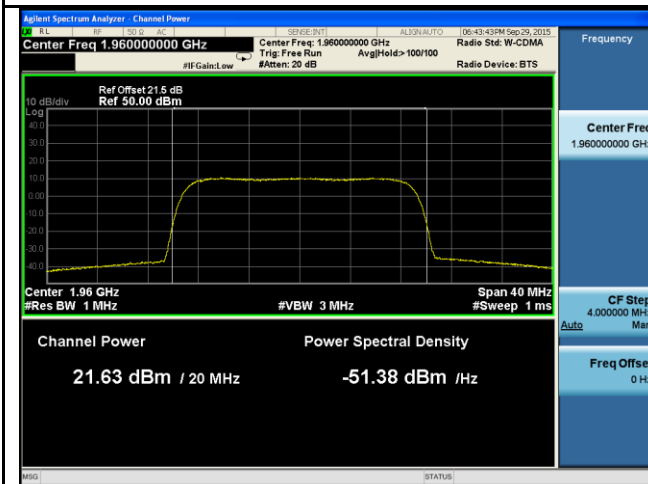

PWR-Band2-64QAM-20M BW-Mid CH-Port1

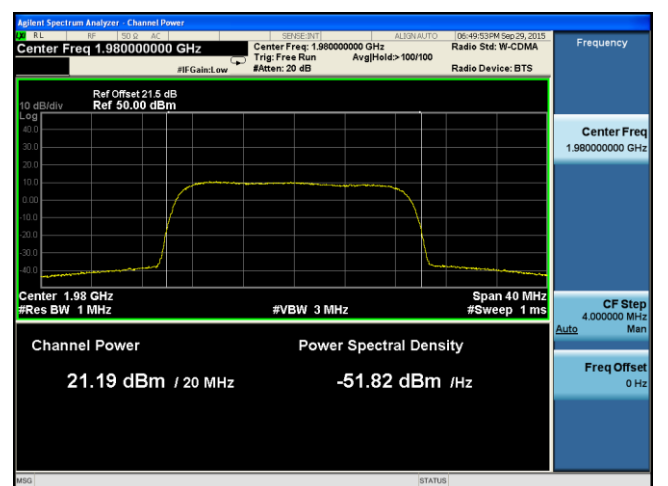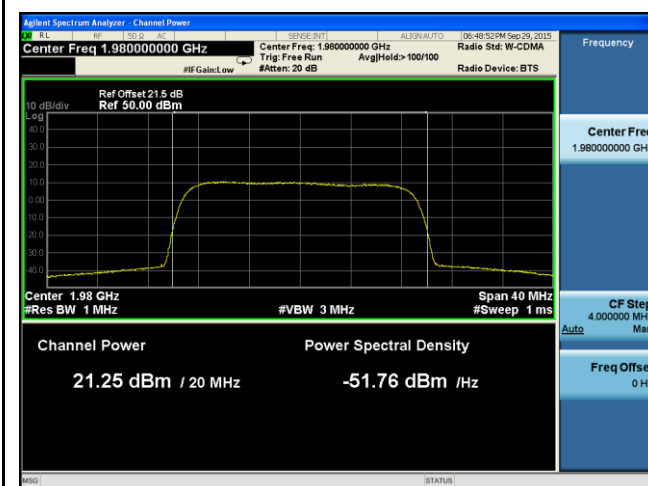


PWR- Band2-64QAM-20M BW-High CH-Port1

PWR- Band2-64QAM-20M BW-High CH-Port2

10.2 Peak-Average Ratio

Requirement(s):

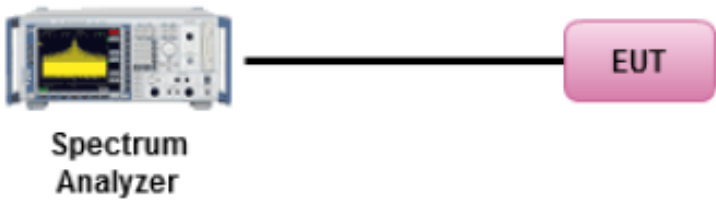Spec	Item	Requirement	Applicable
47CFR27.50	(b)	The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.	☒
Test Setup	 The diagram shows a Spectrum Analyzer connected to an EUT (Equipment Under Test) via a cable. The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.		
Test Procedure	- EUT was set for low, mid, high channel with modulated mode and highest RF output power. - The spectrum analyzer was connected to the antenna terminal.		
Test Date	03/10/2014 03/03/2015 – 04/13/2015 09/24/2015 – 09/30/2015	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Test Data for LTE band 4

Type	Channel	Frequency (MHz)	Peak-Average Ratio (dB)	Peak-Average Ratio (dB)
5MHz BW, QPSK	Low	2112.5	9.16	13
	Mid	2132.5	9.06	13
	High	2152.5	8.86	13
5MHz BW, 64QAM	Low	2112.5	9.19	13
	Mid	2132.5	9.02	13
	High	2152.5	8.87	13
10MHz BW, QPSK	Low	2115	8.88	13
	Mid	2132	8.89	13
	High	2150	8.85	13
10MHz BW, 64QAM	Low	2115	8.77	13
	Mid	2132	8.76	13
	High	2150	8.76	13
15MHz BW, QPSK	Low	2117.5	8.73	13
	Mid	2132.5	8.53	13
	High	2147.5	8.57	13
15MHz BW, 64QAM	Low	2117.5	8.67	13
	Mid	2132.5	8.50	13
	High	2147.5	8.51	13
20MHz BW, QPSK	Low	2120	8.84	13
	Mid	2132	8.84	13
	High	2145	8.83	13
20MHz BW, 64QAM	Low	2120	9.36	13
	Mid	2132	9.33	13
	High	2145	9.36	13

Test Data for LTE band 2 (QPSK is the worst case)


Type	Channel	Frequency (MHz)	Peak-Average Ratio (dB)	Peak-Average Ratio (dB)
5MHz BW, QPSK	Low	1932.5	9.69	13
	Mid	1960.0	9.69	13
	High	1987.5	9.54	13
10MHz BW, QPSK	Low	1935.0	9.85	13
	Mid	1960.0	9.75	13
	High	1985.0	10.02	13
15MHz BW, QPSK	Low	1937.5	9.78	13
	Mid	1960.0	9.81	13
	High	1982.5	9.76	13
20MHz BW, QPSK	Low	1940.0	9.90	13
	Mid	1960.0	9.82	13
	High	1980.0	9.82	13

Test Plots for Band 4:

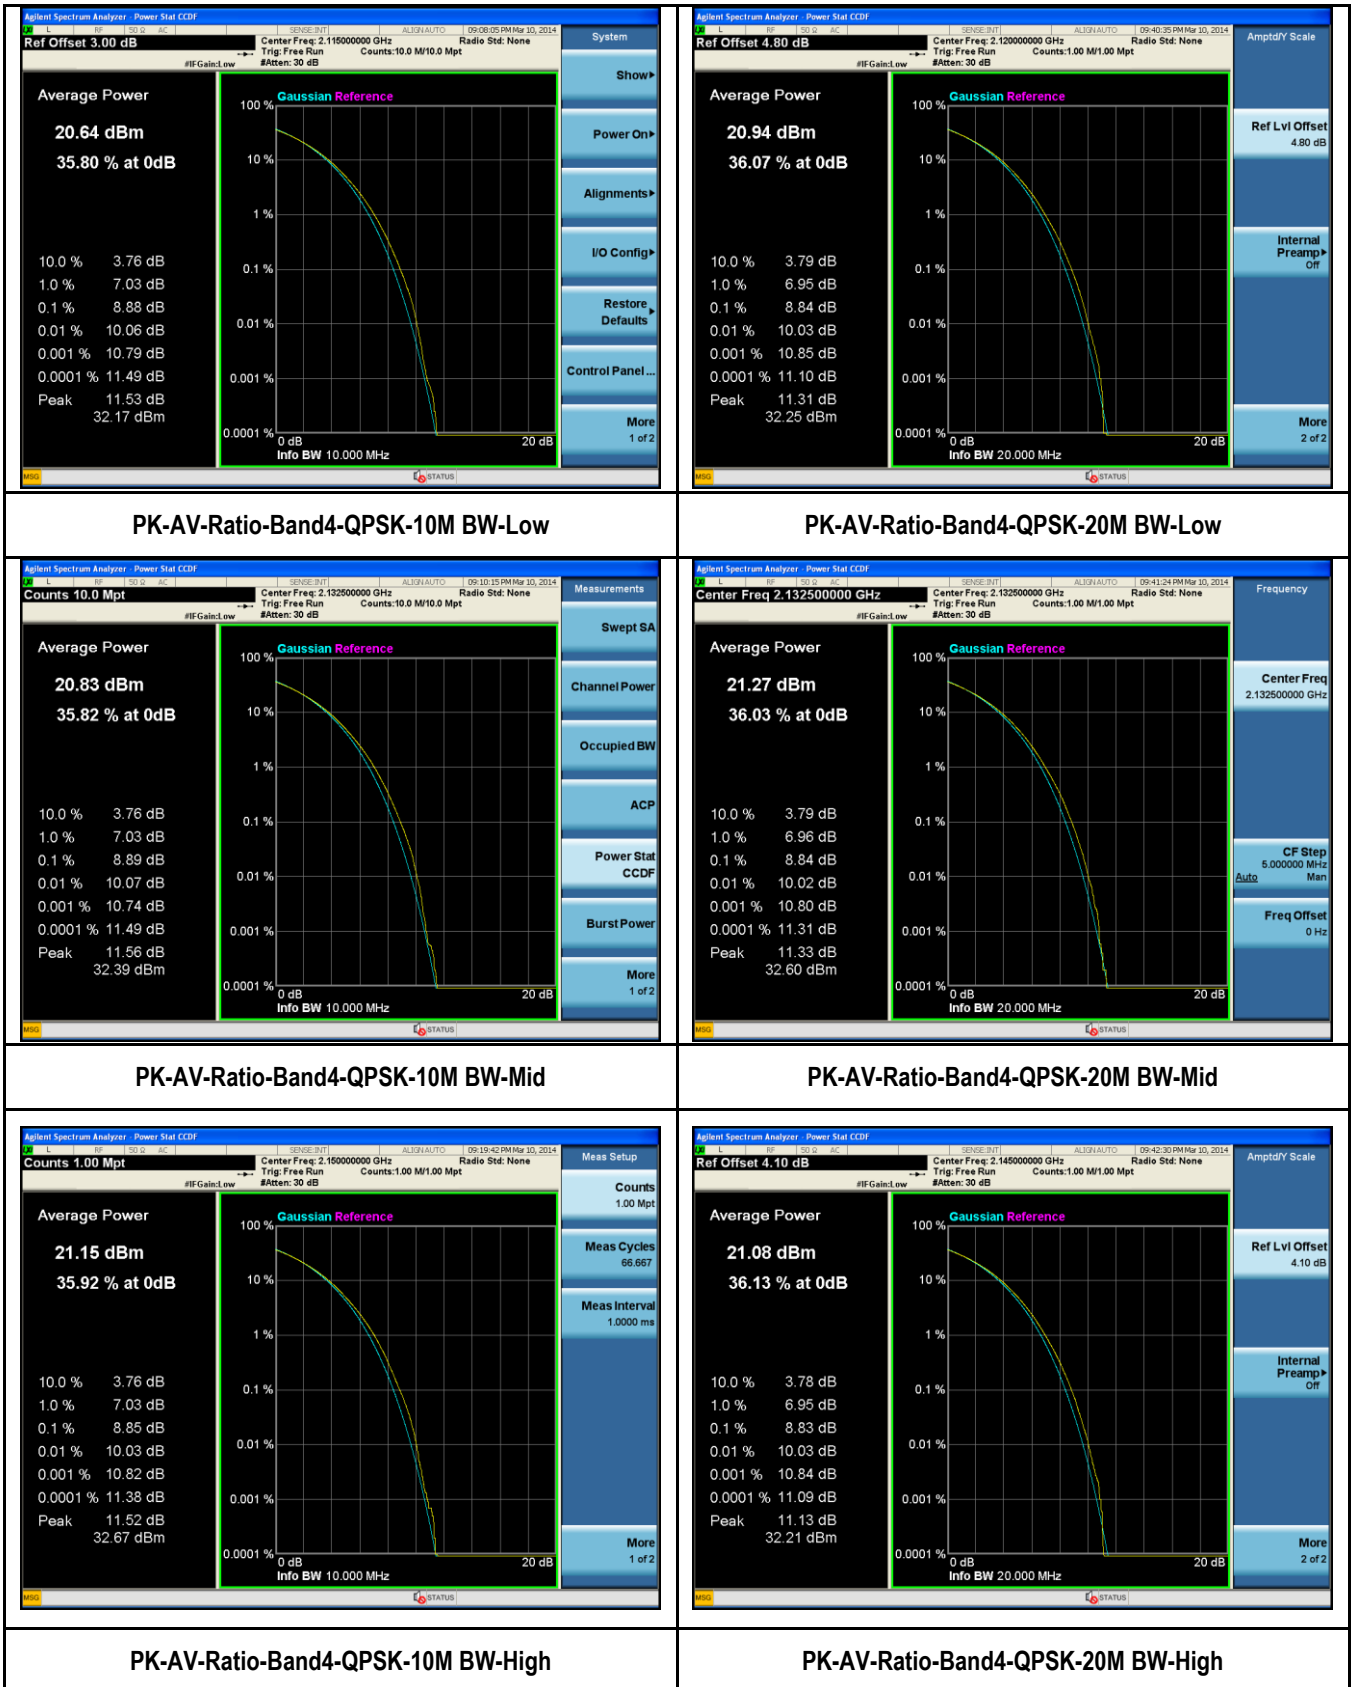




PK-AV-Ratio-Band4-QPSK-5M BW-Low

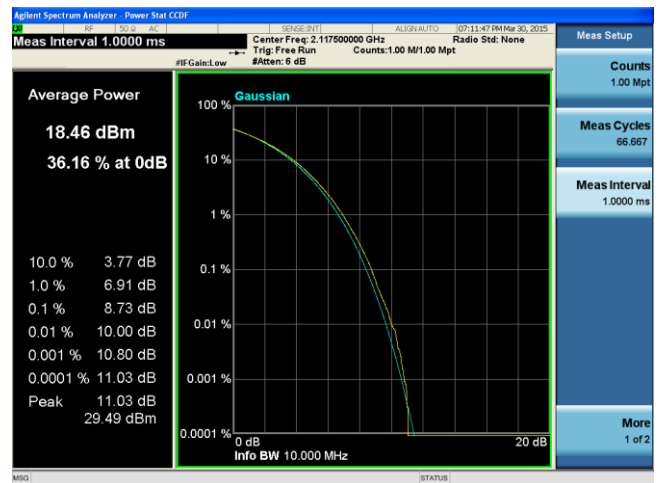


PK-AV-Ratio-Band4-QPSK-15M BW-Low




PK-AV-Ratio-Band4-QPSK-5M BW-Mid

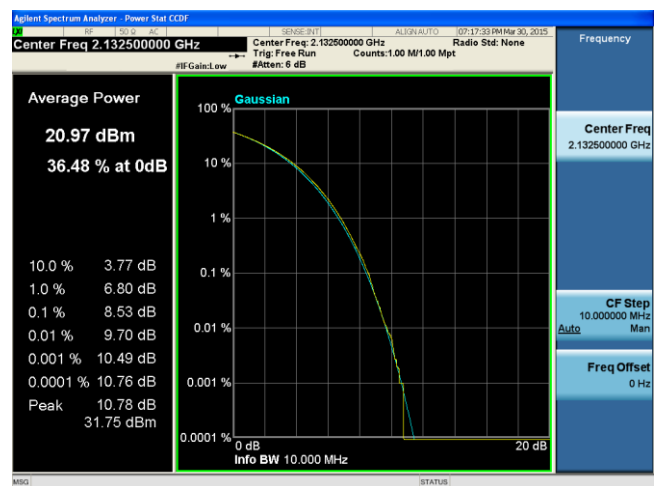


PK-AV-Ratio-Band4-QPSK-15M BW-Mid

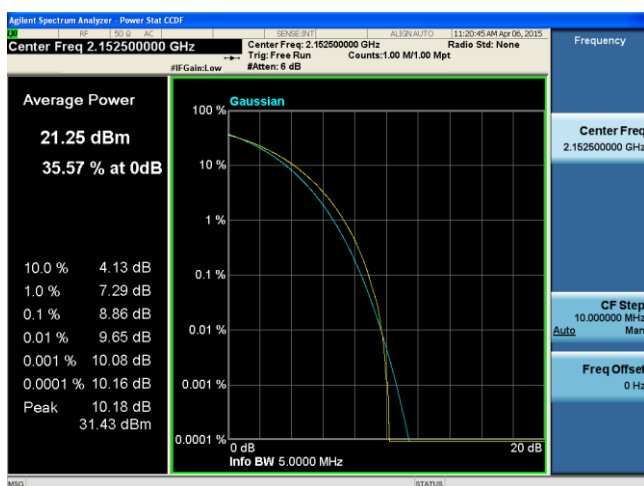


PK-AV-Ratio-Band4-QPSK-5M BW-High

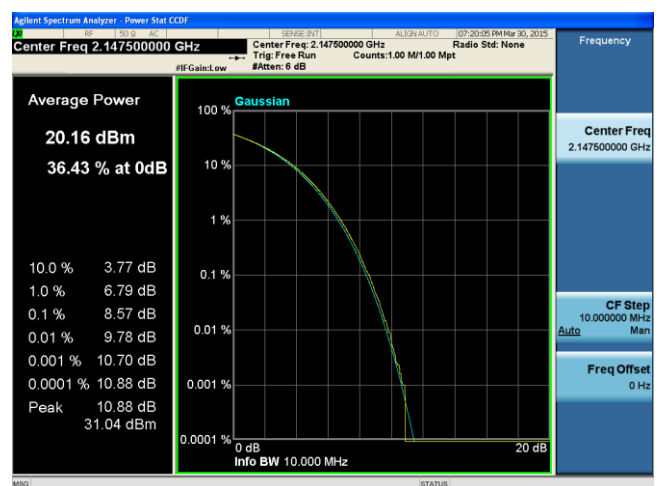


PK-AV-Ratio-Band4-QPSK-15M BW-High

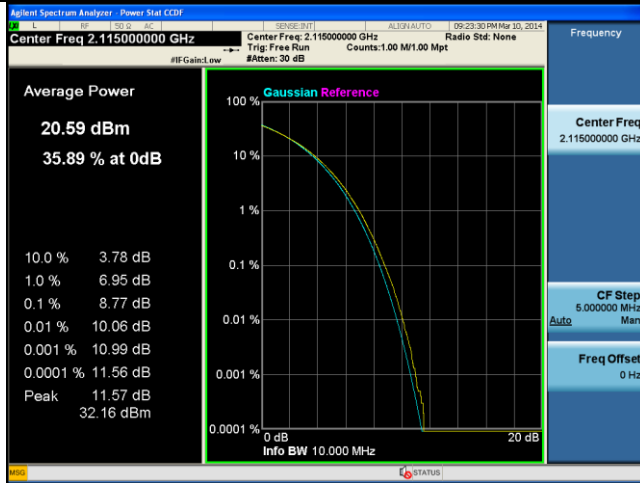

PK-AV-Ratio-Band4-64QAM-10M BW-Low

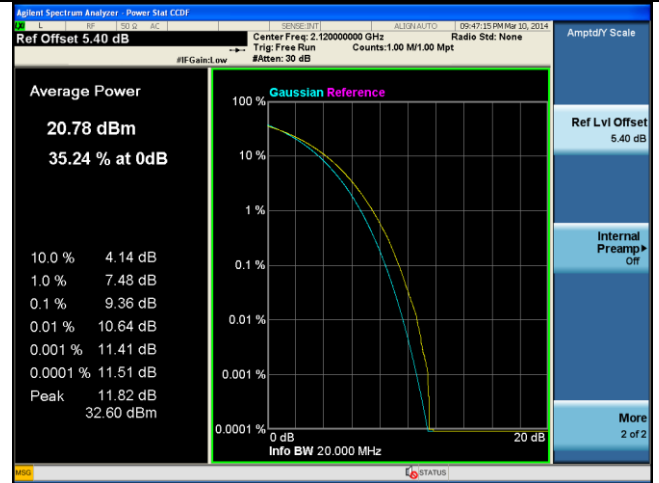


PK-AV-Ratio-Band4-64QAM-20M BW-Low

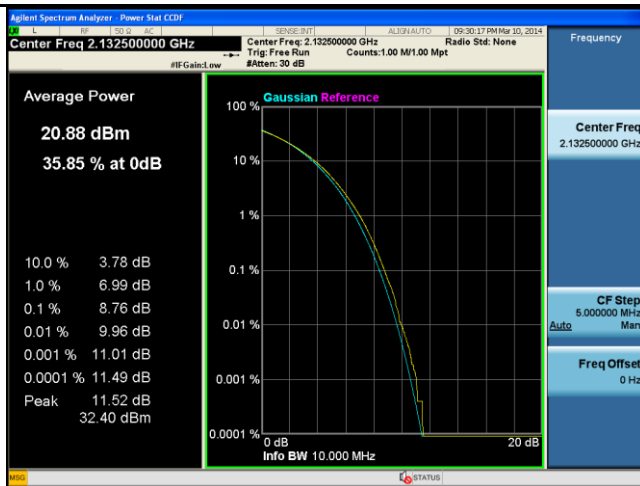


PK-AV-Ratio-Band4-64QAM-10M BW-Mid




PK-AV-Ratio-Band4-64QAM-20M BW-Mid

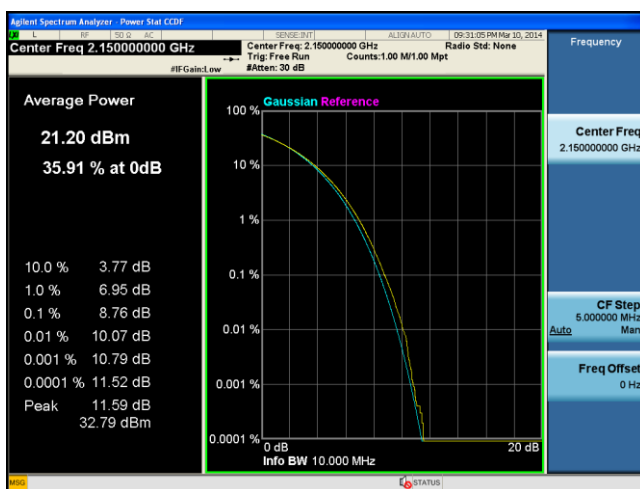


PK-AV-Ratio-Band4-64QAM-10M BW-High

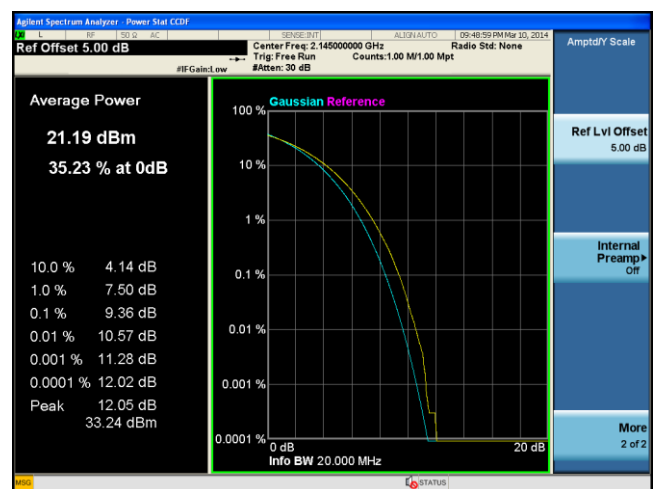

PK-AV-Ratio-Band4-64QAM-20M BW-High

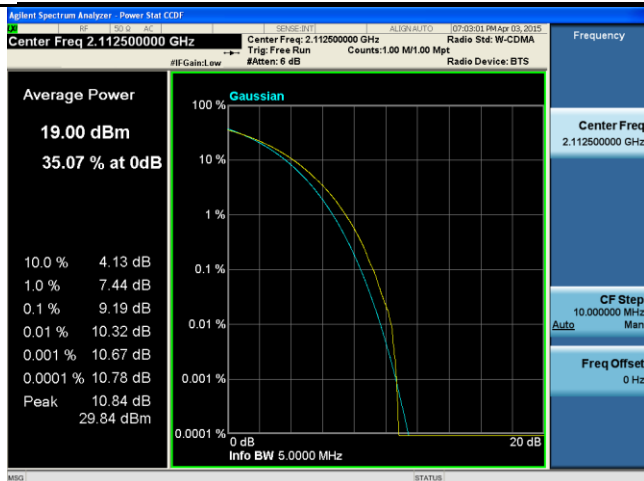


PK-AV-Ratio-Band4-64QAM-5M BW-Low

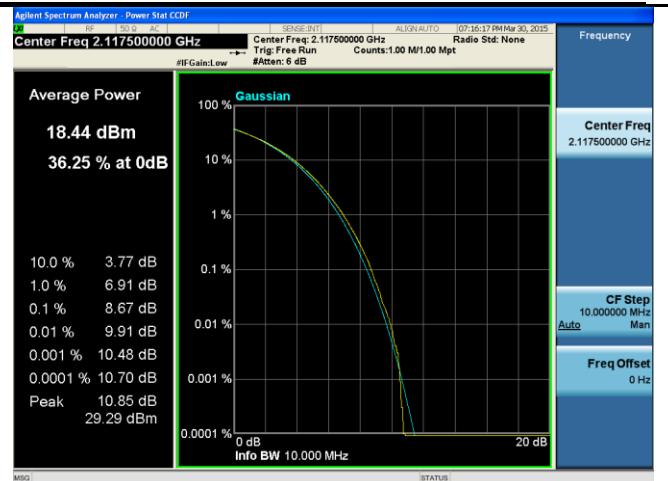


PK-AV-Ratio-Band4-64QAM-15M BW-Low




PK-AV-Ratio-Band4-64QAM-5M BW-Mid

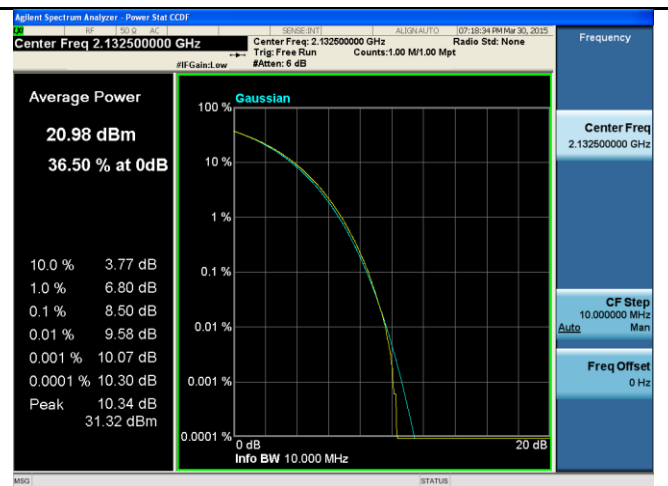

PK-AV-Ratio-Band4-64QAM-15M BW-Mid

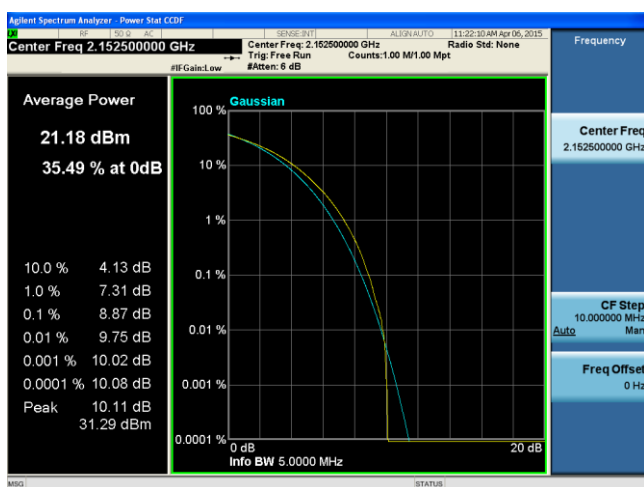


PK-AV-Ratio-Band4-64QAM-5M BW-High

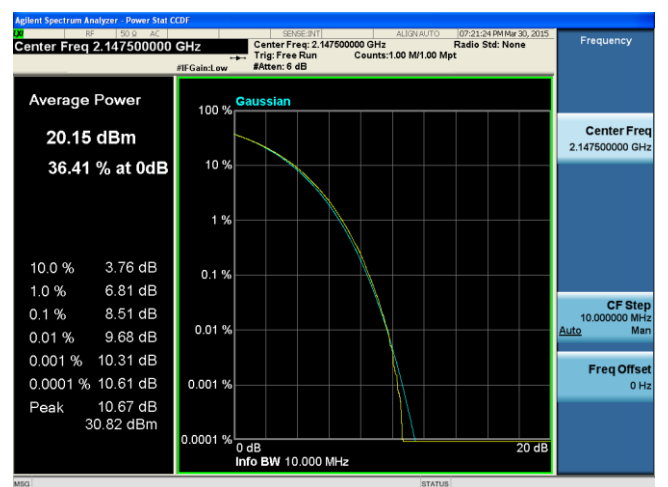


PK-AV-Ratio-Band4-64QAM-15M BW-High

Test Plots for Band 2:

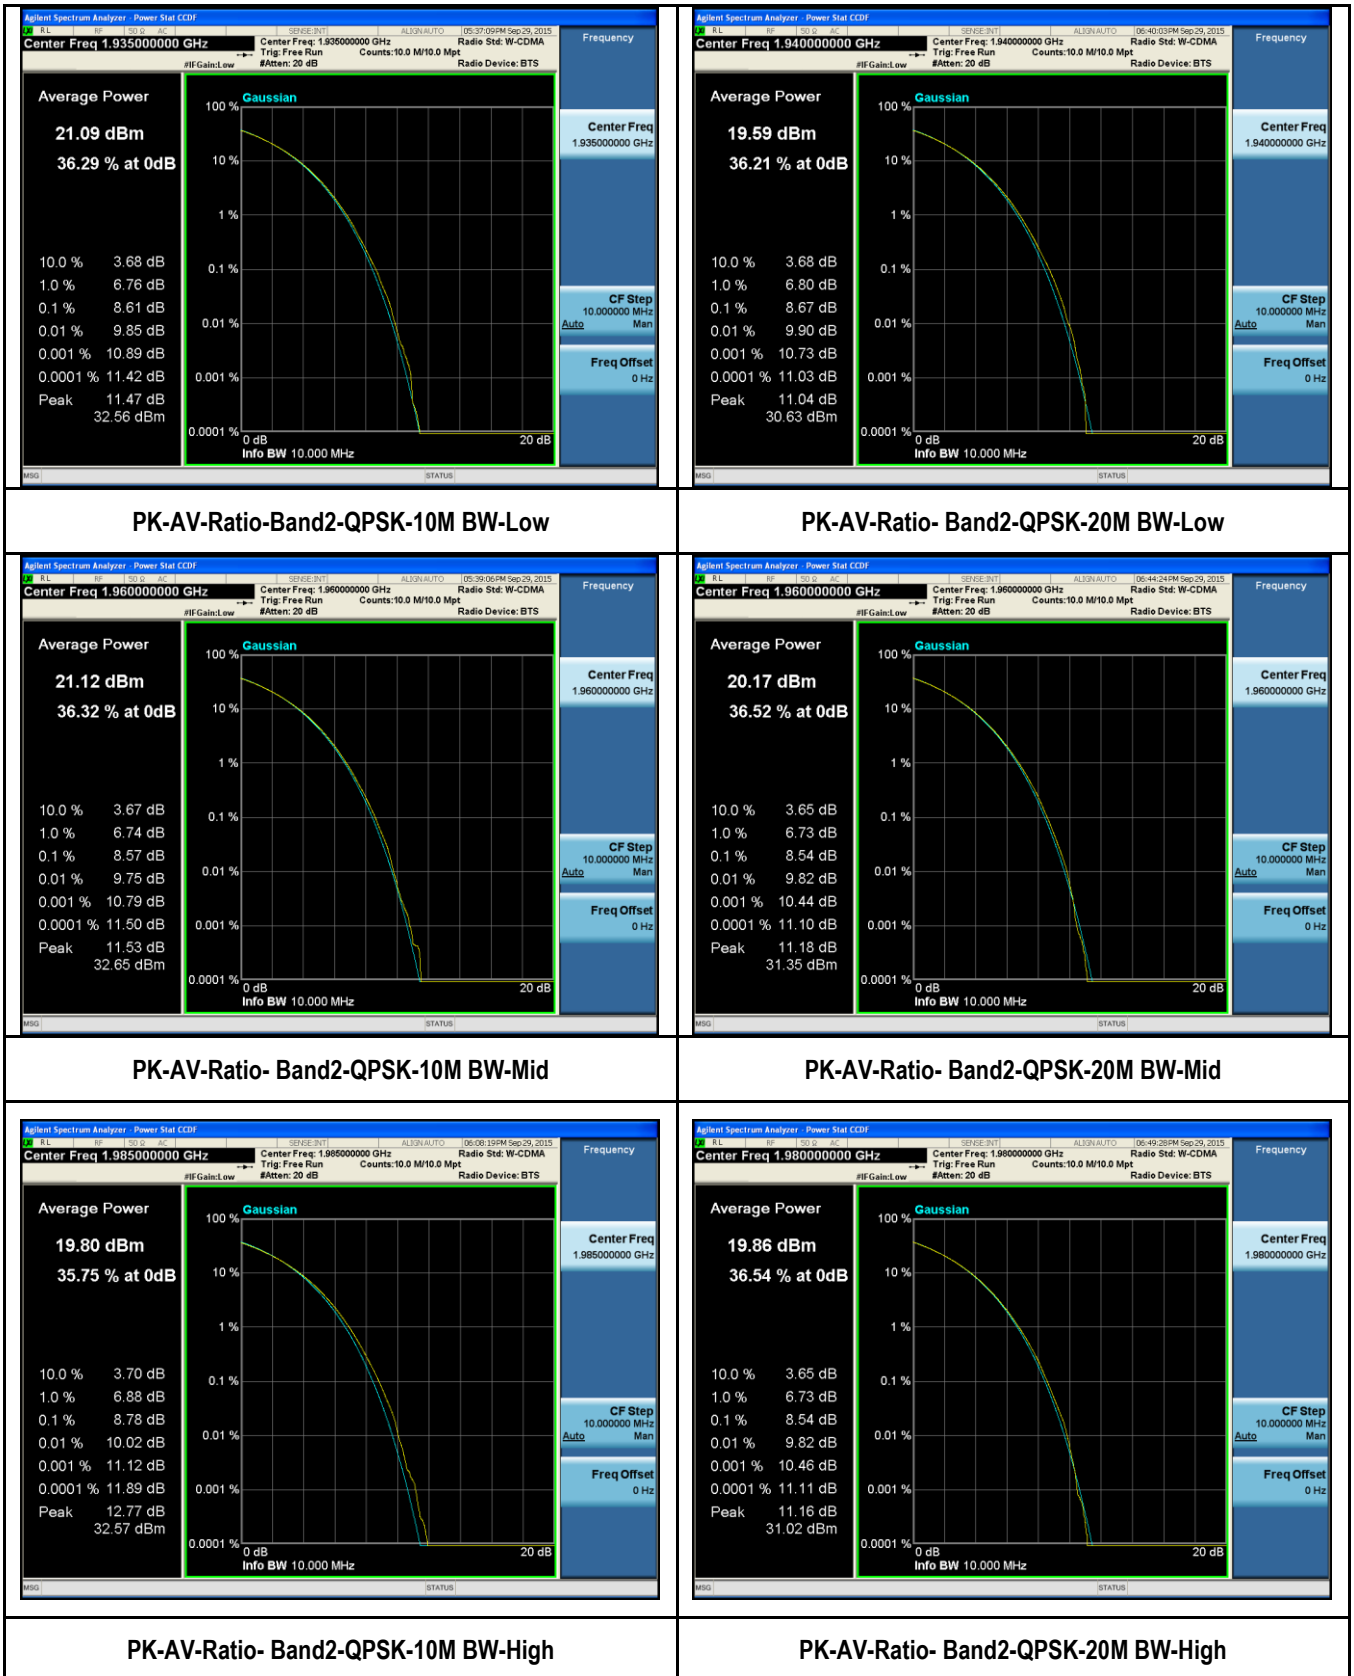





PK-AV-Ratio- Band2-QPSK-5M BW-Low

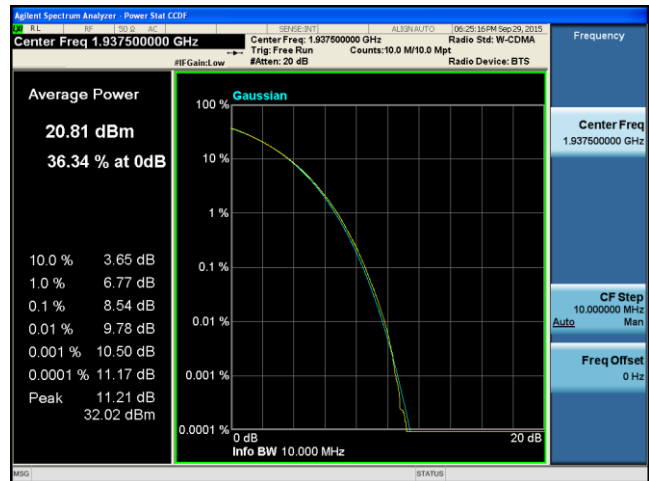

PK-AV-Ratio- Band2-QPSK-15M BW-Low

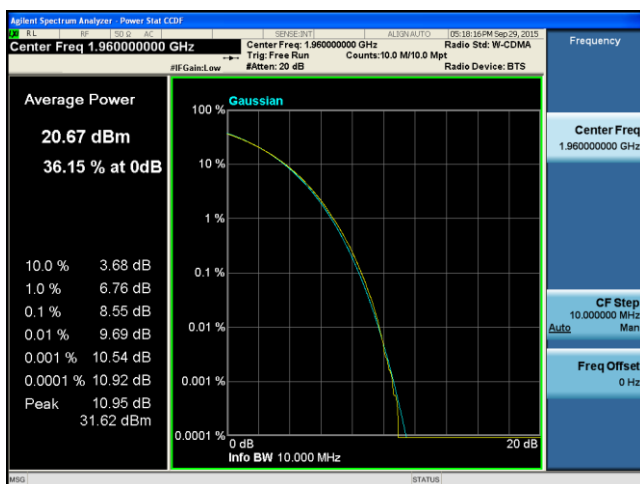

PK-AV-Ratio- Band2-QPSK-5M BW-Mid

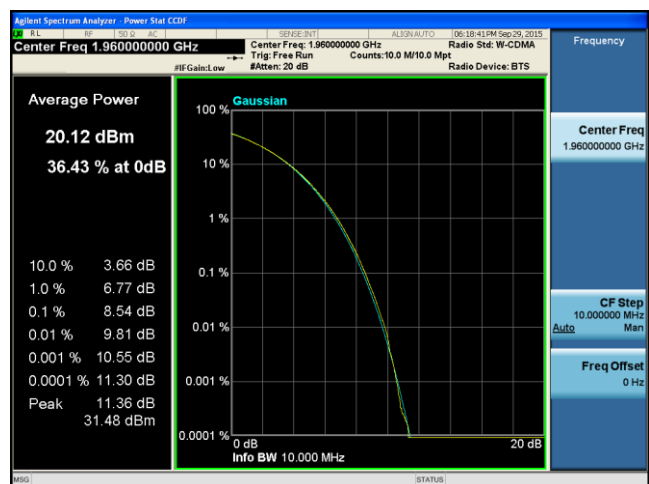

PK-AV-Ratio- Band2-QPSK-15M BW-Mid




PK-AV-Ratio- Band2-QPSK-5M BW-High



PK-AV-Ratio- Band2-QPSK-15M BW-High

10.3 Occupied Bandwidth

Requirement(s):

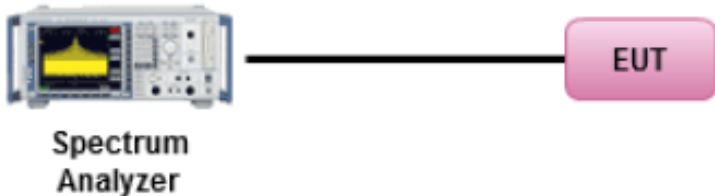Spec	Requirement	Applicable
47 CFR §2.1049	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions of § 2.1049 (a) through (i)	☒
Test Setup	 The diagram illustrates the test setup. On the left is a Spectrum Analyzer with a yellow signal trace on its screen. A black line connects the Spectrum Analyzer to a pink rounded rectangle on the right labeled 'EUT'.	
Procedure	1. EUT was set for low, mid, high channel with modulated mode and highest RF output power. 2. The spectrum analyzer was connected to the antenna terminal. 3. The 99% bandwidths are measured using spectrum analyzer's internal meas function.	
Test Date	02/27/2014 – 03/20/2014 03/03/2015 – 04/13/2015 09/24/2015 – 09/30/2015	Environmental condition Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE	
Result	☒ Pass ☐ Fail	

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A