



# Electromagnetic Compatibility Test Report

Tests Performed on a Midtronics'

Transmitter Module, Model MDXZIGBEE RADIO

Radiometrics Document RP-7899



*Product Detail:*

FCC ID: Y60MDXRADIO-CL2

IC: 9453A-MDXRADIO

Equipment type: 2.4 GHz Transmitter

*Test Standards:*

US CFR Title 47, Chapter I, FCC Part 15 Subpart C

FCC Part 15 CFR Title 47: 2012

Industry Canada RSS-210, Issue 8: 2010 as required for Category I Equipment

This report concerns: Original Grant for Certification

FCC Part 15.249

*Tests Performed For:*

**Midtronics**

7000 Monroe Street

Willowbrook, IL 60527

*Test Facility:*

**Radiometrics Midwest Corporation**

12 East Devonwood

Romeoville, IL 60446

(815) 293-0772

*Test Date(s): (Month-Day-Year)*

August 8 thru 5, 2014

Document RP-7899 Revisions:

Rev.	Issue Date	Affected Sections	Revised By
0	August 27, 2014		



## Table of Contents

1 ADMINISTRATIVE DATA .....	3
2 TEST SUMMARY AND RESULTS .....	3
2.1 RF Exposure Compliance Requirements .....	3
3 EQUIPMENT UNDER TEST (EUT) DETAILS .....	4
3.1 EUT Description .....	4
3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements .....	4
3.2 Related Submittals .....	4
4 TESTED SYSTEM DETAILS .....	4
4.1 Tested System Configuration .....	4
4.2 Special Accessories .....	4
4.3 Equipment Modifications .....	4
5 TEST SPECIFICATIONS AND RELATED DOCUMENTS.....	5
6 RADIOMETRICS' TEST FACILITIES .....	5
7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS.....	5
8 CERTIFICATION.....	6
9 TEST EQUIPMENT TABLE .....	6
10 TEST SECTIONS.....	6
10.1 Radiated RF Emissions.....	6
10.1.1 Field Strength Calculation.....	7
10.1.2 Radiated Emissions Test Results .....	7
10.2 Occupied Bandwidth Data .....	10
10.3 Unintentional Emissions (Receive Mode).....	13

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

## Testing of the Midtronics, Model MDXZIGBEE RADIO, Transmitter Module

**1 ADMINISTRATIVE DATA**
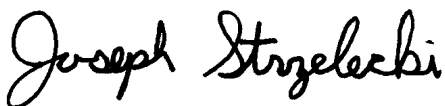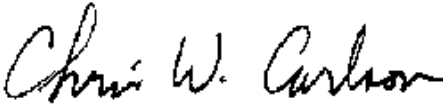
<i>Equipment Under Test:</i> A Midtronics, Transmitter Module Model: MDXZIGBEE RADIO Serial Number: none This will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics: (Month-Day-Year)</i> August 1, 2014	<i>Test Date(s): (Month-Day-Year)</i> August 8 thru 5, 2014
<i>Test Report Written By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> Robert Lass Midtronics
<i>Radiometrics' Personnel Responsible for Test:</i> 	<i>Test Report Approved By</i> 
Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE	Chris W. Carlson Director of Engineering NARTE EMC-000921-NE

**2 TEST SUMMARY AND RESULTS**

The EUT (Equipment Under Test) is a Transmitter Module, Model MDXZIGBEE RADIO, manufactured by Midtronics. The detailed test results are presented in a separate section. The following is a summary of the test results.

**Emissions Tests Results**

Environmental Phenomena	Frequency Range	Basic Standard	Test Result
RF Radiated Emissions	30-25,000 MHz	RSS-210 & FCC Part 15	Pass
Occupied Bandwidth Test	Fundamental Freq.	RSS-210 & FCC Part 15	Pass

Note: The RSS-210 specification is not currently covered in Radiometrics' Scope of Accreditation. This is technically very similar to FCC, CFR 47 Part 15 which is on Radiometrics scope.

**2.1 RF Exposure Compliance Requirements**

Since the power output is less than 10 mW, the EUT meets the FCC requirement for RF exposure and it is exempt from RSS-102 SAR and RF exposure evaluations. There are no power level adjustments available to the end user. The antenna is permanently attached. The detailed calculations for RF Exposure are presented in a separate document.

### 3 EQUIPMENT UNDER TEST (EUT) DETAILS

#### 3.1 EUT Description

The EUT is a Transmitter Module, Model MDXZIGBEE RADIO, manufactured by Midtronics. The EUT was in good working condition during the tests, with no known defects.

##### 3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements

The antenna is permanently attached to the printed circuit board. The antenna is internal to the EUT and it is not readily available to be modified by the end user. Therefore it meets the 15.203 Requirements.

#### 3.2 Related Submittals

Midtronics is not submitting any other products simultaneously for equipment authorization related to the EUT.

### 4 TESTED SYSTEM DETAILS

#### 4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations.

The EUT was tested as a stand-alone device. Power was supplied with a fully charged battery.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

**Tested System Configuration List**

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	Transmitter Module	E	Midtronics	MDXZIGBEE RADIO	none

\* Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

**List of System Cables**

QTY	Length (m)	Cable Description	Shielded?
1	1	Power and Sense Cable	No

#### 4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

#### 4.3 Equipment Modifications

No modifications were made to the EUT at Radiometrics' test facility in order to comply with the standards listed in this report.

## 5 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2013	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices
ANSI C63.4-2009	2009	Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2009	2009	American National Standard for Testing Unlicensed Wireless Devices
IC RSS-210 Issue 8	2010	Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands) Category I Equipment
IC RSS-Gen Issue 3	2010	General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)

The test procedures used are in accordance with the Industry Canada RSS-GEN and ANSI document C63.10. Radiated testing was performed at an antenna to EUT distance of 3 meters.

## 6 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2005 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site ([www.radiomet.com](http://www.radiomet.com)). Radiometrics accreditation status can be verified at A2LA's web site ([www.a2la2.org](http://www.a2la2.org)).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber. The floor has a 9' x 9' section of microwave absorber for testing above 1 GHz.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6 inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC 8727A-1.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

## 7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

## 8 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification and the data contained herein was taken with calibrated test equipment. The results relate only to the EUT listed herein.

## 9 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-05	RMC/Celeritek	Pre-amplifier	MW110G	1001	1.0-12GHz	12 Mo.	06/25/13
AMP-11	RMC	Pre-amplifier	LNA1000M	1001	0.1-1000MHz	12 Mo.	03/07/14
AMP-16	MITEQ	Pre-amplifier	AM-1300	608852	0.01-1000MHz	12 Mo.	01/15/14
AMP-20	Avantek	Pre-amplifier	SF8-0652	15221	8-18GHz	12 Mo.	01/17/14
AMP-22	Anritsu	Pre-amplifier	MH648A	M23969	0.1-1200MHz	12 Mo.	01/15/14
AMP-29	HP / Agilent	Amplifier	11975A	2304A00158	2-8 GHz	12 Mo.	12/20/13
ANT-03	Tensor	Biconical Antenna	4104	2231	20-250MHz	24 Mo.	11/26/13
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	24 Mo.	11/26/13
ANT-13	EMCO	Horn Antenna	3115	2502	1.0-18GHz	24 Mo.	12/05/12
ANT-44	ARA	Super Log Antenna	SL-20M2G	1002	20-2000MHz	24 Mo.	12/10/13
ANT-48	RMC	Std Gain Horn	HW2020	1001	18-26 GHz	24 Mo.	08/08/13
ANT-53	EMCO	Loop Antenna	6507	1453	1 kHz-30 MHz	24 Mo.	12/02/13
MXR-02	HP / Agilent	Harmonic Mixer	11970K	2332A00489	18-26.5GHz	12 Mo.	12/20/13
REC-03	Anritsu	Spectrum Analyzer	MS2601B	MT94589	0.01-2200MHz	12 Mo.	04/16/14
REC-08	HP / Agilent	Spectrum Analyzer	8566B	2648A13481 2209A01436	30Hz-22GHz	24 Mo.	11/21/13
REC-10	HP / Agilent	EMI Receiver	8546A	3842A00521 3704A00484	30Hz-6GHz	24 Mo.	01/13/14
REC-11	HP / Agilent	Spectrum Analyzer	E7405A	US39110103	9Hz-26.5GHz	12 Mo.	06/17/14
THM-02	Fluke	Temp/Humid Meter	971	93490471	N/A	24 Mo.	06/27/13
THM-03	Fluke	Temp/Humid Meter	971	95850465	N/A	12 Mo.	08/29/13

Note: All calibrated equipment is subject to periodic checks.

## 10 TEST SECTIONS

### 10.1 Radiated RF Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 or 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists.

From 30 to 1000 MHz, an Anritsu spectrum analyzer was used. For tests from 1 to 25 GHz, an HP 8566 spectrum analyzer was used. For tests from 1 to 10 GHz, a high pass filter was used to reduce the fundamental emission. A harmonic mixer was used from 18 to 25 GHz. Figure 4 herein lists the details of the test equipment used during radiated emissions tests.

The EUT was rotated through three orthogonal axis as per 13.1.4.1 of ANSI C63.4 during the radiated tests.

## Testing of the Midtronics, Model MDXZIGBEE RADIO, Transmitter Module

Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

The entire frequency range from 30 to 25,000 MHz was slowly scanned. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

### 10.1.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG + HPF + PKA$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

PKA = Peak to Average Factor (This is zero for non-average measurements)

The Peak to average factor is used when average measurements are required. It is calculated by the highest duty cycle in percent over any 100mS transmission. The factor in dB is  $20 * \log(\text{Duty cycle}/100)$ .

### 10.1.2 Radiated Emissions Test Results

Test Date	8/5/2014
Test Distance	3 Meters
Specification	FCC Part 15 Subpart C & RSS-210
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal; P = peak; Q = QP
Configuration	Transmitting

#### Emissions Below 2.35 GHz

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cbl/amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB
35.5	34.3	P	H	16.5	-28.3	0.0	22.6	40.0	17.4
47.6	33.5	P	H	14.8	-28.2	0.0	20.1	40.0	19.9
61.3	32.7	P	H	10.2	-28.1	0.0	14.8	40.0	25.2
89.9	45.2	P	H	8.0	-27.8	0.0	25.4	43.5	18.1
103.2	38.4	P	H	10.2	-27.8	0.0	20.8	43.5	22.7
121.3	36.2	P	H	14.8	-27.8	0.0	23.2	43.5	20.3
158.1	37.7	P	H	10.6	-27.6	0.0	20.7	43.5	22.8
162.6	39.9	P	H	10.5	-27.6	0.0	22.8	43.5	20.7

## Testing of the Midtronics, Model MDXZIGBEE RADIO, Transmitter Module

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cbl/amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB
228.0	33.4	P	H	12.1	-27.4	0.0	18.1	46.0	27.9
296.9	32.3	P	H	13.1	-27.2	0.0	18.1	46.0	27.9
638.8	33.0	P	H	19.4	-26.5	0.0	25.9	46.0	20.1
35.5	36.3	P	V	16.5	-28.3	0.0	24.6	40.0	15.4
47.6	41.8	P	V	14.8	-28.2	0.0	28.4	40.0	11.6
69.6	35.4	P	V	7.8	-28.0	0.0	15.1	40.0	24.9
89.1	48.0	Q	V	7.8	-27.9	0.0	28.0	43.5	15.5
90.0	57.3	P	V	8.0	-27.8	0.0	37.5	43.5	6.0
91.3	56.0	Q	V	8.1	-27.8	0.0	36.2	43.5	7.3
91.9	57.8	Q	V	8.2	-27.8	0.0	38.2	43.5	5.3
102.6	43.3	P	V	10.0	-27.8	0.0	25.5	43.5	18.0
162.6	38.9	P	V	10.5	-27.6	0.0	21.8	43.5	21.7
205.4	39.2	P	V	10.4	-27.4	0.0	22.1	43.5	21.4
227.4	36.6	P	V	12.1	-27.4	0.0	21.3	46.0	24.7
232.4	36.6	P	V	11.9	-27.4	0.0	21.1	46.0	24.9
419.4	31.7	P	V	17.0	-27.0	0.0	21.6	46.0	24.4
547.5	31.4	P	V	18.1	-26.9	0.0	22.6	46.0	23.4
1092.5	36.9	P	H	24.9	-28.1	0.0	33.7	74.0	40.3
1945.0	38.3	P	H	27.4	-27.9	0.0	37.8	74.0	36.2
2337.5	37.7	P	H	27.9	-27.5	0.0	38.1	74.0	35.9
1272.5	35.5	P	V	25.4	-28.1	0.0	32.8	74.0	41.2
1880.0	38.5	P	V	27.3	-27.8	0.0	38.0	74.0	36.0

Note: All Peak readings above 1 GHz were under the Average limits, so average readings are not required.

Judgment: Passed by 5.3 dB



## Testing of the Midtronics, Model MDXZIGBEE RADIO, Transmitter Module

## Emissions above 2.35 GHz

		Spectrum Analyzer Readings									EUT	Peak	Ave	Peak	Ave	Margin
hrm	Tx	Peak		Ave		Peak		Ave		Corr	Emission	Tot. FS		Limit		Under
#	Freq	Vertical Polarization				Horizontal Polarization				Fact.	Freq MHz	dBuV/m		dBuV/m		Limit
		X	Y	Z	Max	X	Y	Z	Max							
1	2410	85.3	86.2	89.0	75.3	85.4	89.6	87.5	75.9	1.2	2410.0	90.8	77.1	114	94	16.9
BE	2410	42.6	43.5	46.3	32.6	42.7	46.9	44.8	33.2	1.2	2390.0	48.1	34.4	74	54	19.6
2	2410	45.1	46.3	47.3	33.6	45.4	47.9	46.0	34.2	7.4	4820.0	55.3	41.6	74	54	12.4
3	2410	37.0	37.0	37.0	23.3	36.2	37.0	37.0	23.3	8.5	7230.0	45.5	31.8	74	54	22.2
4	2410	36.0	36.0	36.0	22.3	36.0	36.0	36.0	22.3	5.7	9640.0	41.7	28.0	74	54	26.0
1	2440	84.9	84.2	86.6	72.9	83.6	85.2	85.1	71.5	1.2	2440.0	87.8	74.1	114	94	19.9
2	2440	42.3	45.5	46.1	32.4	43.2	46.3	45.6	32.6	7.0	4880.0	53.3	39.6	74	54	14.4
3	2440	38.3	37.0	37.0	24.6	36.1	37.0	37.0	23.3	8.7	7320.0	47.0	33.3	74	54	20.7
4	2440	36.0	36.0	36.0	22.3	36.0	36.0	36.0	22.3	6.1	9760.0	42.1	28.4	74	54	25.6
1	2465	88.8	84.8	89.4	75.7	86.1	91.4	89.5	77.5	1.3	2465.0	92.7	79.0	114	94	15.2
BE	2465	40.9	36.9	41.5	27.8	38.2	43.3	41.6	29.6	1.3	2483.5	44.6	30.9	74	54	23.1
2	2465	42.3	45.4	44.6	31.7	44.1	46.9	46.4	33.2	7.2	4930.0	54.1	40.4	74	54	13.6
3	2465	37.0	37.0	37.0	23.3	37.0	37.0	37.0	23.3	9.2	7395.0	46.2	32.5	74	54	21.5
4	2465	36.0	36.0	36.0	22.3	36.0	36.0	36.0	22.3	6.3	9860.0	42.3	28.6	74	54	25.4
Column numbers (see below for explanations)																
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

Judgment: Passed by 12.4 dB

No Emissions were detected from 10 to 25 GHz within 10 dB of the limits.

## Notes on Columns:

Column #1. hrm = Harmonic; BE = Band Edge emissions

Column #2. Frequency of Transmitter.

Column #3. Columns 3 to 10 are the uncorrected readings from the spectrum analyzer

Column #11. Corr. Factors = Cable Loss – Preamp Gain + Antenna Factor + High pass filter (for harmonics only)

Column #12. Frequency of Tested Emission

Column #13. Highest peak field strength at listed frequency.

Column #14. Highest Average field strength at listed frequency.


Column #15. Peak Limit. Non restricted bands limits set to 94 dBuV/m. The fundamental was tested with a direct connect so there is no radiated emissions limit.

Column #16. Average Limit. Non restricted bands limits set to 74 dBuV/m. There is no fundamental average limit.

Column #17. The margin (last column) is the worst case margin under the peak or average limits for that row.

**Figure 1. Drawing of Radiated Emissions Setup**

Chamber E, anechoic

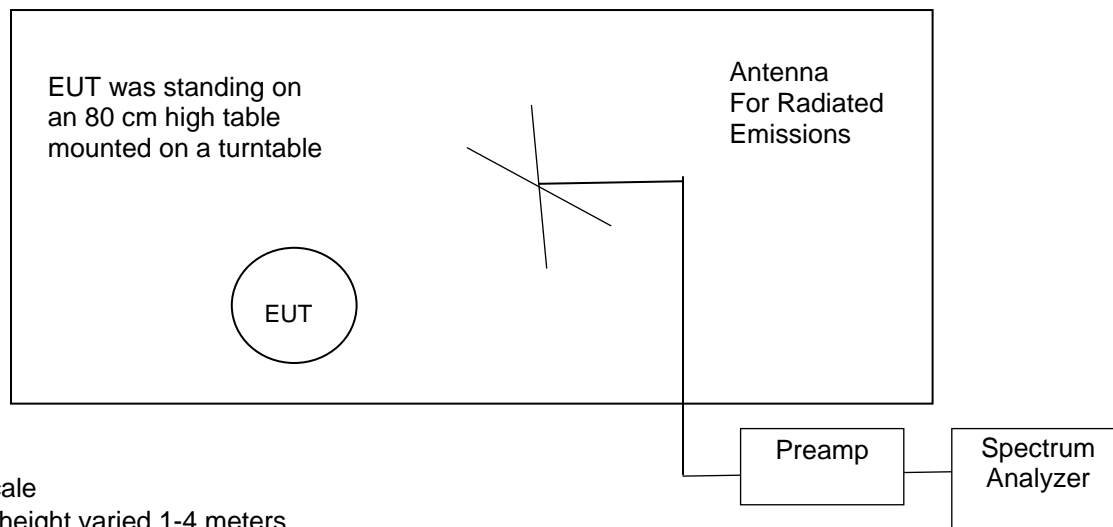**Notes:**

- Not to Scale
- Antenna height varied 1-4 meters
- Distance from antenna to tested system is 3 meters
- AC cords not shown. They are connected to AC outlet with low-pass filter on turntable

Frequency Range	Receive Antenna	Pre-Amplifier	Spectrum Analyzer
30 to 1000 MHz	ANT-03, 06	AMP-22	REC-11
1 to 10 GHz	ANT-13	AMP-05	REC-11
10 to 18 GHz	ANT-13	AMP-20	REC-11
18 to 25 GHz	ANT-48	AMP-29	REC-08; MXR-01


**10.2 Occupied Bandwidth Data**

The occupied bandwidth of the RF output was measured using a spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth.



A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. A limit was drawn on the plots based on the level of the modulated carrier. The plots of the occupied bandwidth for the EUT are supplied on the following page.

Channel	20 dB EBW MHz
2410	2.725
2440	2.650
2465	2.662

Figure 2. Occupied Bandwidth Plots

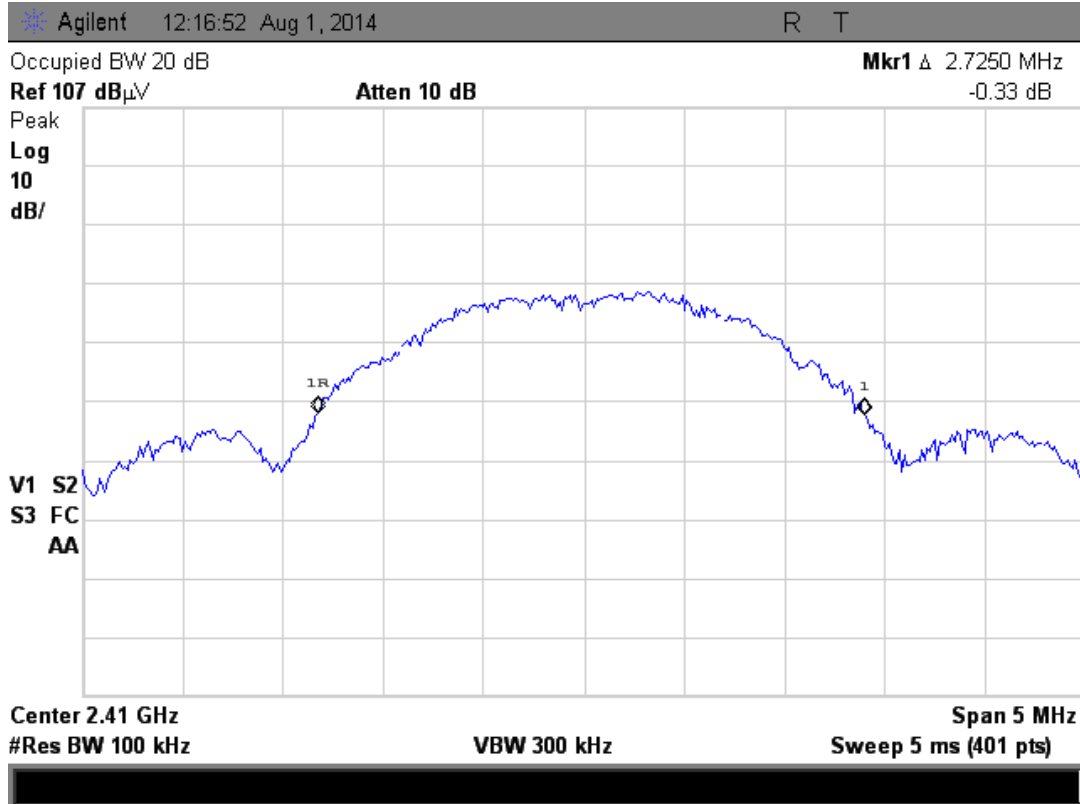

## Testing of the Midtronics, Model MDXZIGBEE RADIO, Transmitter Module

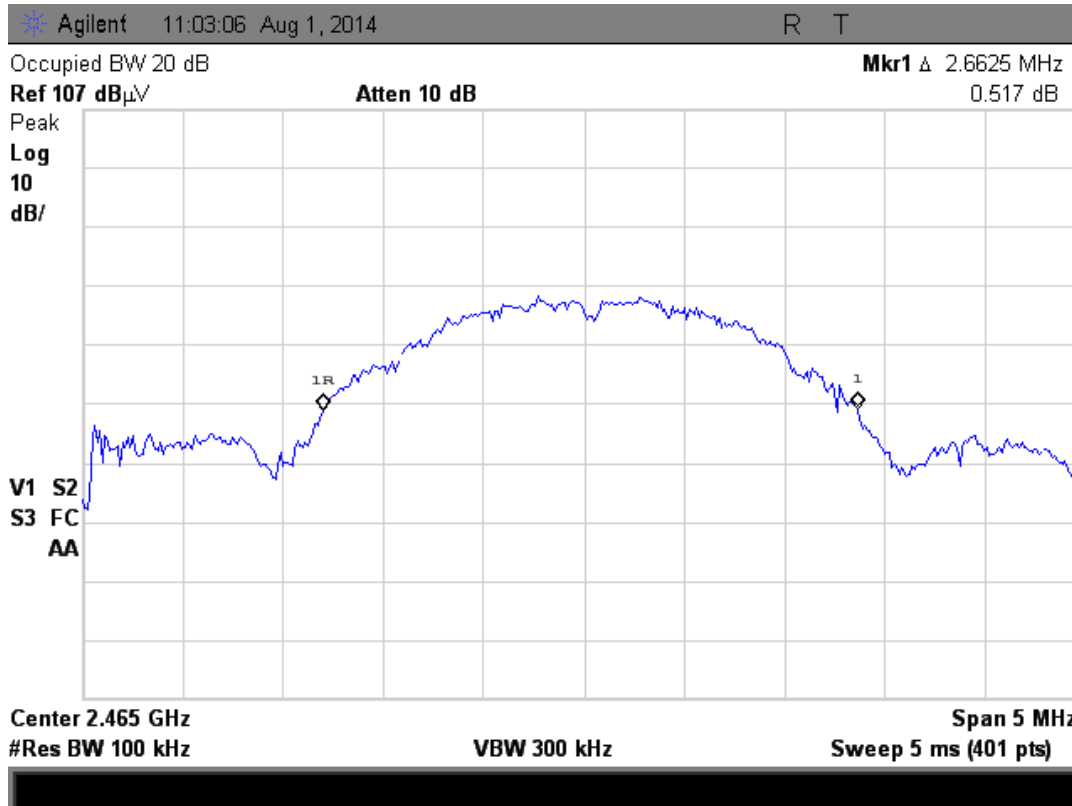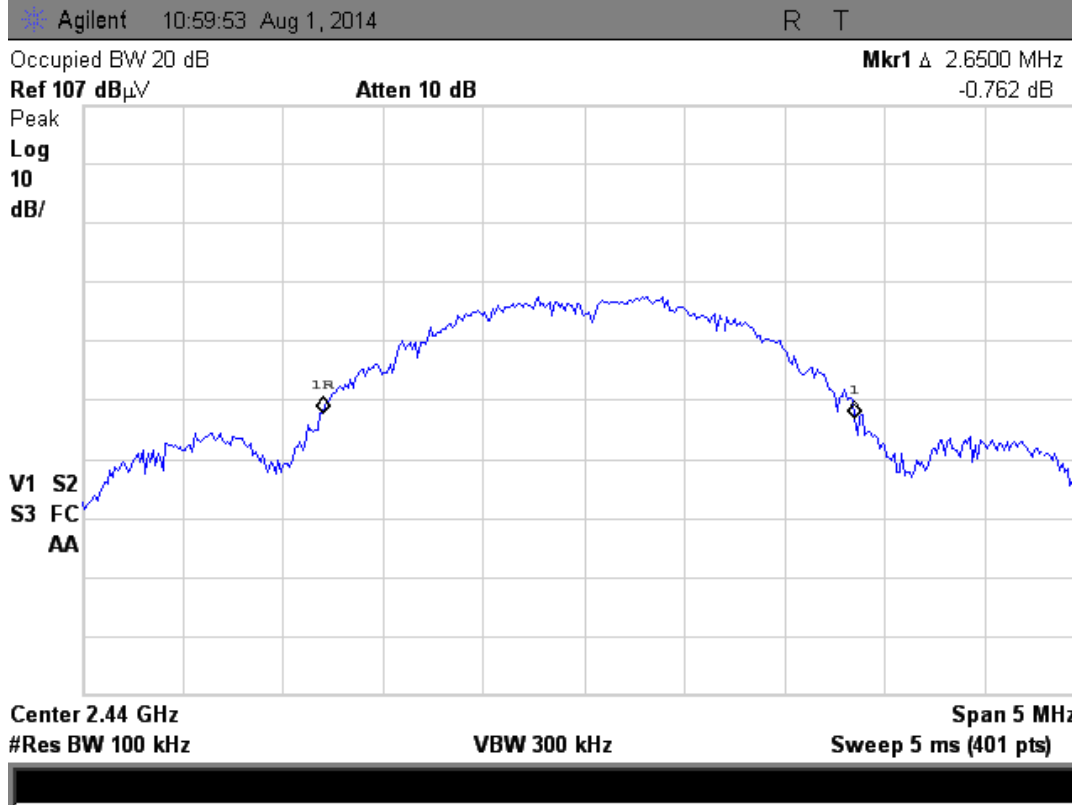

Testing of the Midtronics, Model MDXZIGBEE RADIO, Transmitter Module

**10.3 Unintentional Emissions (Receive Mode)**

Manufacturer	Midtronics	Specification	FCC Part 15.247 & RSS-210
Model	MDXZIGBEE RADIO	Test Date	8/04/2014
Serial Number	none	Test Distance	3 Meters
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal; P = peak; Q = QP		
Notes	Corr. Factors = Cable Loss – Preamp Gain		
Configuration	Receive mode		

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cbl/amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB
35.5	34.4	P	H	16.5	-28.3	0.0	22.6	40.0	17.4
47.6	34.8	P	H	14.8	-28.2	0.0	21.4	40.0	18.6
89.9	43.3	P	H	8.0	-27.8	0.0	23.5	43.5	20.0
100.9	35.7	P	H	9.5	-27.8	0.0	17.4	43.5	26.1
152.6	34.5	P	H	10.0	-27.7	0.0	16.9	43.5	26.6
162.6	40.1	P	H	10.5	-27.6	0.0	23.0	43.5	20.5
194.4	37.5	P	H	9.7	-27.5	0.0	19.7	43.5	23.8
291.9	31.8	P	H	12.8	-27.3	0.0	17.4	46.0	28.6
441.3	32.4	P	H	16.5	-27.1	0.0	21.9	46.0	24.1
588.8	31.8	P	H	20.9	-26.3	0.0	26.4	46.0	19.6
626.3	34.8	P	H	19.1	-26.4	0.0	27.6	46.0	18.4
35.5	36.5	P	V	16.5	-28.3	0.0	24.7	40.0	15.3
47.6	41.9	P	V	14.8	-28.2	0.0	28.5	40.0	11.5
60.8	42.7	P	V	10.4	-28.1	0.0	25.0	40.0	15.0
64.1	33.7	P	V	9.3	-28.1	0.0	14.9	40.0	25.1
91.1	57.3	Q	V	8.1	-27.8	0.0	37.5	43.5	6.0
91.9	57.6	Q	V	8.2	-27.8	0.0	38.0	43.5	5.5
162.6	36.9	P	V	10.5	-27.6	0.0	19.8	43.5	23.7
197.2	35.0	P	V	9.8	-27.5	0.0	17.4	43.5	26.1
259.4	34.4	P	V	12.9	-27.5	0.0	19.8	46.0	26.2
270.0	34.2	P	V	13.0	-27.4	0.0	19.7	46.0	26.3
308.1	33.9	P	V	13.9	-27.2	0.0	20.6	46.0	25.4
399.4	32.1	P	V	16.0	-27.1	0.0	21.1	46.0	24.9
828.8	32.0	P	V	21.6	-25.6	0.0	28.0	46.0	18.0
1197.5	38.0	P	H	25.4	-28.0	0.0	35.3	74.0	38.7
1907.5	38.4	P	H	27.4	-28.0	0.0	37.8	74.0	36.2
2170.0	36.6	P	H	27.6	-27.6	0.0	36.6	74.0	37.4
2812.5	34.5	P	H	28.9	-26.7	0.0	36.7	74.0	37.3
3795.0	36.2	P	H	32.6	-25.3	0.0	43.5	74.0	30.5
1192.5	37.9	P	V	25.4	-28.0	0.0	35.3	74.0	38.7
1745.0	38.0	P	V	26.7	-28.1	0.0	36.7	74.0	37.3
2250.0	36.7	P	V	27.6	-27.6	0.0	36.7	74.0	37.3
2605.0	32.8	P	V	29.0	-27.1	0.0	34.7	74.0	39.3
3287.5	35.6	P	V	31.1	-25.7	0.0	41.0	74.0	33.0

Note: All Peak readings above 1 GHz were under the Average limits, so average readings are not required.  
Judgment: Passed by 5.5 dB