

Title: VP2Refresh 5inch front RF antenna specification

Project:	VP2Refresh		
Maturity:	draft/ ready/ reviewed	Version:	A01

Author		
Role	Name	Date and signature
I IC RD G EE D2	Frank Born	23-Sep-2015

Purpose:
This document describes the VP2Refresh radio Bluetooth RF antenna specification

History of Content Changes				
Version	Status	Date dd-Mmm-YYYY	Document Owner, Department	Changes (e.g. CR-number)
A01	released	24-Sep-2015	F. Born I IC RD G EE D2	First version

Table of contents

Introduction.....	3
System description	3
VSWR.....	3
Antenna gain	3
Antenna measurement	4

Introduction

This document describes the PCB RF antenna of the VP2Refresh 356 radio placed at the 5inch front PCB.

System description

The following picture shows the placement of the PCB RF antenna:

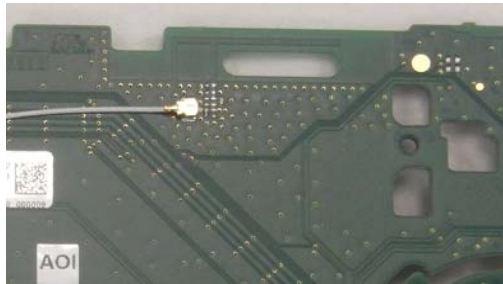


Figure1: VP2Refresh 5inch front unit with PCB RF antenna

VSWR

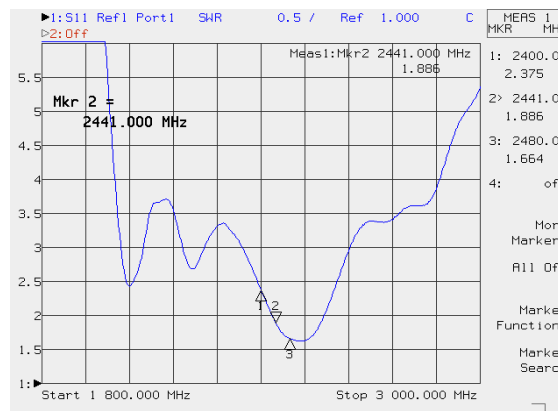


Figure2: VSWR <2.5:1 at BT frequency band

Antenna gain

Frequency	2400MHz		2440MHz		2480MHz	
description	G_tot/dBi (average)	G_max/dBi	G_tot/dBi (average)	G_max/dBi	G_tot/dBi (average)	G_max/dBi
X-Z axis	-6,2	0,07	-5,7	0,48	-7,9	0,03
Y-Z axis	-7,2		-5,5		-5,6	

Table1: VP2Refresh measured PCB antenna gain

Antenna measurement

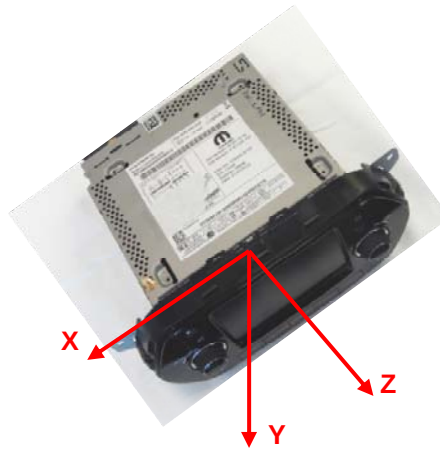


Figure3: measurement directions

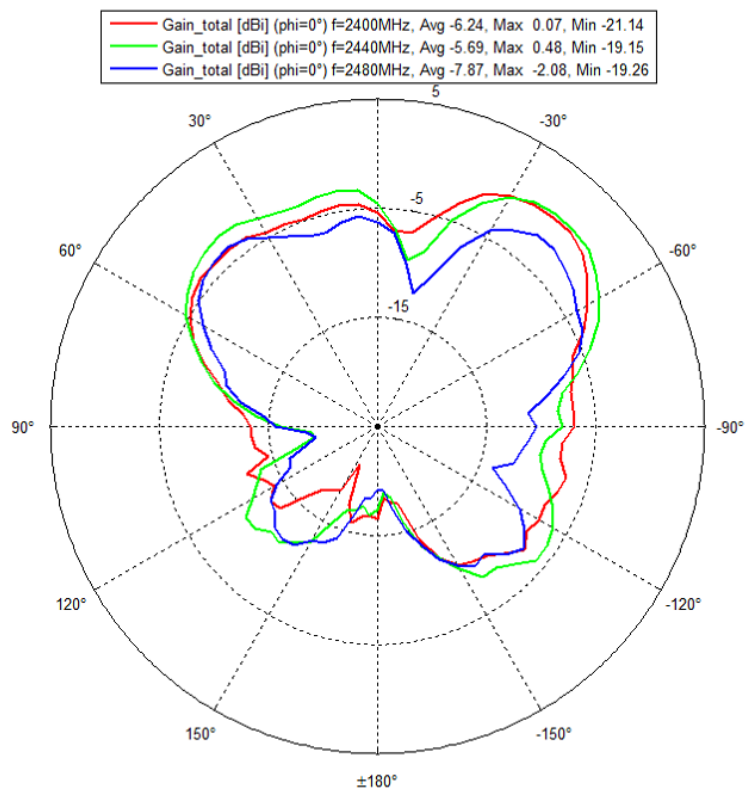


Figure4: measured X-Z plane, Z arrow =0°

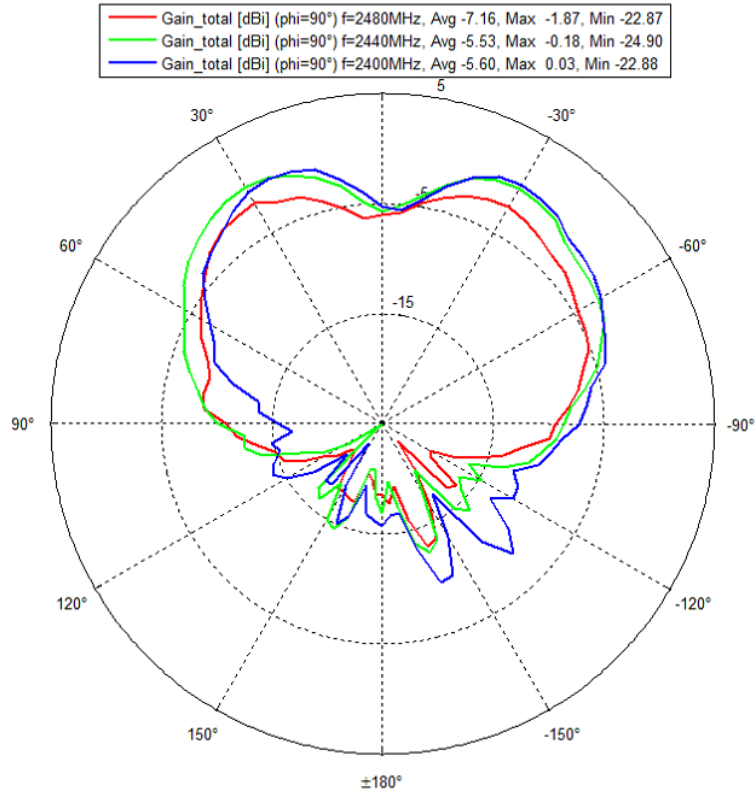


Figure5: measured Y-Z plane, Z arrow =0°