

## TEST REPORT

Test report no.: 1-2210-25-01-06\_TR1-R01



Deutsche  
Akkreditierungsstelle  
D-PL-12047-01-00

### Testing laboratory

#### **cetecom advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

#### **Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

### Applicant

#### **Renesas Design Netherlands B.V.**

Het Zuiderkruis 53

5215 MV's-Hertogenbosch / NETHERLANDS

Phone: +31629169324

Contact: Steven Leussink

e-mail: [steven.leussink.wx@renesas.com](mailto:steven.leussink.wx@renesas.com)

### Manufacturer

#### **China Dragon Technology Limited**

3rd Floor, Building B4, Haosan First Industrial Zone,

No.253, Nanpu Road, Shangliao Community, Xinqiao

Street, Baoan District, 518104 Shenzhen City / CHINA

### Test standard/s

FCC - Title 47 CFR Part 15

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 4

Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands

RSS - Gen Issue 5 incl.  
Amendment 1 & 2

Spectrum Management and Telecommunications Radio Standards Specification  
- General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**

**SmartBond Multi-Core Dual Mode Bluetooth/Bluetooth LE 6.0 Module**

**Model name:**

**DA14870MOD (DA14870MOD-SF01; DA14870MOD-DF01)**

**FCC ID:**

**Y82-DA14870MOD**

**ISED certification number:**

**9576A-DA14870MOD**

**Frequency:**

**2400 MHz to 2483.5 MHz**

**Technology tested:**

**Bluetooth® + EDR**

**Antenna:**

**Integrated PCB antenna**

**Power supply:**

**3.6 V DC by external power supply**

**Temperature range:**

**-40°C to +85°C**

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

cn=Marco Bertolino, o=cetecom advanced  
GmbH, ou=BTL-251205,  
email=Marco.Bertolino@cetecomadvanced.co  
m, c=DE  
2026.03.09 15:26:11 +01'00'

Marco Bertolino  
Supervisor Radio Lab  
Regulatory Services Radio

### Test performed:

cn=Andreas Curette, o=cetecom advanced  
GmbH, ou=CUR-230601,  
email=andreas.curette@cetecomadvanced.co  
m, c=DE  
2026.03.09 15:29:52 +01'00'

Andreas Curette  
Lab Manager  
Regulatory Services Radio

## 1 Table of contents

|       |                                                               |    |
|-------|---------------------------------------------------------------|----|
| 1     | Table of contents.....                                        | 2  |
| 2     | General information.....                                      | 3  |
| 2.1   | Notes and disclaimer.....                                     | 3  |
| 2.2   | Application details.....                                      | 3  |
| 2.3   | Test laboratories sub-contracted.....                         | 3  |
| 3     | Test standard/s, references and accreditations.....           | 4  |
| 4     | Reporting statements of conformity – decision rule.....       | 5  |
| 5     | Test environment.....                                         | 6  |
| 6     | Test item.....                                                | 6  |
| 6.1   | General description.....                                      | 6  |
| 6.2   | Additional information.....                                   | 6  |
| 7     | Sequence of testing.....                                      | 7  |
| 7.1   | Sequence of testing radiated spurious 9 kHz to 30 MHz.....    | 7  |
| 7.2   | Sequence of testing radiated spurious 30 MHz to 1 GHz.....    | 8  |
| 7.3   | Sequence of testing radiated spurious 1 GHz to 18 GHz.....    | 9  |
| 7.4   | Sequence of testing radiated spurious above 18 GHz.....       | 10 |
| 8     | Description of the test setup.....                            | 11 |
| 8.1   | Shielded semi anechoic chamber.....                           | 12 |
| 8.2   | Shielded fully anechoic chamber.....                          | 13 |
| 8.3   | Radiated measurements > 18 GHz.....                           | 14 |
| 8.4   | Conducted measurement system.....                             | 15 |
| 8.5   | AC conducted.....                                             | 16 |
| 9     | Measurement uncertainty.....                                  | 17 |
| 10    | Summary of measurement results.....                           | 18 |
| 11    | Additional comments.....                                      | 19 |
| 12    | Measurement results.....                                      | 20 |
| 12.1  | Antenna gain.....                                             | 20 |
| 12.2  | Carrier frequency separation.....                             | 21 |
| 12.3  | Number of hopping channels.....                               | 22 |
| 12.4  | Time of occupancy (dwell time).....                           | 23 |
| 12.5  | Spectrum bandwidth of a FHSS system.....                      | 24 |
| 12.6  | Maximum output power.....                                     | 25 |
| 12.7  | Band edge compliance radiated.....                            | 26 |
| 12.8  | Spurious emissions conducted.....                             | 30 |
| 12.9  | Spurious emissions radiated below 30 MHz.....                 | 31 |
| 12.10 | Spurious emissions radiated 30 MHz to 1 GHz.....              | 34 |
| 12.11 | Spurious emissions radiated above 1 GHz.....                  | 36 |
| 12.12 | Spurious emissions conducted below 30 MHz (AC conducted)..... | 40 |
| 13    | Glossary.....                                                 | 45 |
| 14    | Document history.....                                         | 46 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 23.01.2026 |
| Date of receipt of test item:      | 28.01.2026 |
| Start of test:*                    | 28.01.2026 |
| End of test:*                      | 13.02.2026 |
| Person(s) present during the test: | -/-        |

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

| Test standard                           | Date          | Description                                                                                                                                                                   |
|-----------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC - Title 47 CFR Part 15              | -/-           | FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices                                                                               |
| RSS - 247 Issue 4                       | July 2025     | Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands |
| RSS - Gen Issue 5 incl. Amendment 1 & 2 | February 2021 | Spectrum Management and Telecommunications Radio Standards Specification<br>- General Requirements for Compliance of Radio Apparatus                                          |


| Guidance                                     | Version    | Description                                                                                                                                                                              |
|----------------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KDB 558074 D01                               | v05r02     | GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES |
| ANSI C63.4a-2017                             | -/-        | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz                      |
| ANSI C63.10-2020                             | -/-        | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                                           |
| ANSI/USEMCSC C63.10a-2024 Amendment 1        | 2024-08-08 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices<br>Amendment 1                                                                            |
| ANSI/USEMCSC C63.10a-2024 Amendment 1 Errata | 2024-11-18 | Errata to American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices<br>Amendment 1<br>Correction Sheet                                             |

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

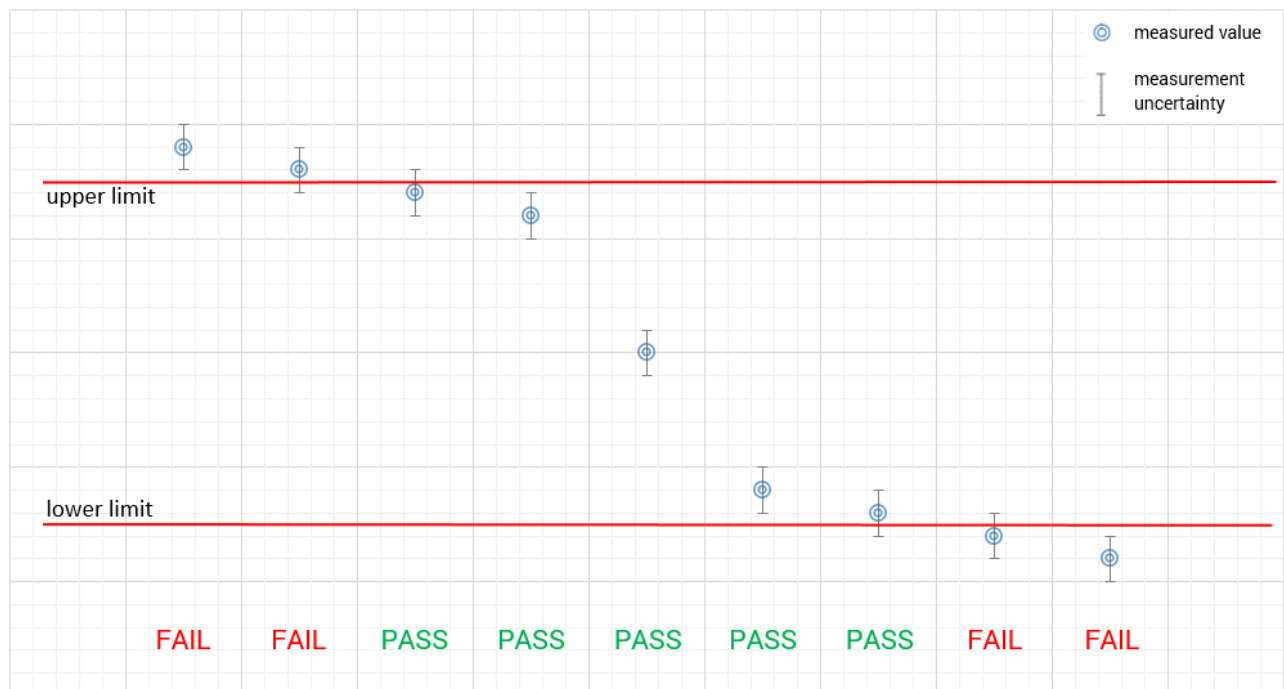

## 5 Test environment

|                           |   |                                     |                                                                                                                                                                |
|---------------------------|---|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature               | : | $T_{nom}$<br>$T_{max}$<br>$T_{min}$ | +22 °C during room temperature tests<br>No tests under extreme environmental conditions required.<br>No tests under extreme environmental conditions required. |
| Relative humidity content | : |                                     | 55 %                                                                                                                                                           |
| Barometric pressure       | : |                                     | 1021 hpa                                                                                                                                                       |
| Power supply              | : | $V_{nom}$<br>$V_{max}$<br>$V_{min}$ | 3.6 V DC by external power supply<br>No tests under extreme environmental conditions required.<br>No tests under extreme environmental conditions required.    |

## 6 Test item

### 6.1 General description

|                            |   |                                                                   |
|----------------------------|---|-------------------------------------------------------------------|
| Kind of test item          | : | SmartBond Multi-Core Dual Mode Bluetooth/Bluetooth LE 6.0 Module  |
| Model name                 | : | DA14870MOD (DA14870MOD-SF01; DA14870MOD-DF01)                     |
| HMN                        | : | -/-                                                               |
| PMN                        | : | DA14870MOD                                                        |
| HVIN                       | : | DA14870MOD-SF01<br>DA14870MOD-DF01                                |
| FVIN                       | : | -/-                                                               |
| S/N serial number          | : | Rad. #46<br>Cond. #63                                             |
| Hardware status            | : | 513-25-A                                                          |
| Software status            | : | ADP 1.0.8                                                         |
| Firmware status            | : | ADP DMC 1.0.8, ADP APP2_TWS_A2DP 1.0.8, ADP APP0_GAP_SERVER 1.0.8 |
| Frequency band             | : | 2400 MHz to 2483.5 MHz                                            |
| Type of radio transmission | : | FHSS                                                              |
| Use of frequency spectrum  | : |                                                                   |
| Type of modulation         | : | GFSK, Pi/4-DQPSK, 8DPSK                                           |
| Number of channels         | : | 79                                                                |
| Antenna                    | : | Integrated PCB antenna                                            |
| Power supply               | : | 3.6 V DC by external power supply                                 |
| Temperature range          | : | -40°C to +85°C                                                    |

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-2210-25-01-01\_TR1-A101-R01  
1-2210-25-01-01\_TR1-A102-R01  
1-2210-25-01-01\_TR1-A104-R01

## 7 Sequence of testing

### 7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*)Note: The sequence will be repeated three times with different EUT orientations.

## 7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 8 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

### **Agenda:** Kind of Calibration

|        |                                            |     |                                                      |
|--------|--------------------------------------------|-----|------------------------------------------------------|
| k/cal  | calibration / calibrated                   | EK  | limited calibration                                  |
| Ne/cnn | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| Ev/chk | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve     | long-term stability recognized             | g   | blocked for accredited testing                       |
| vlk!   | Attention: extended calibration interval   |     |                                                      |
| NK!    | Attention: not calibrated                  | *)  | next calibration ordered / currently in progress     |
| cpu    | check prior usage                          |     |                                                      |

## 8.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

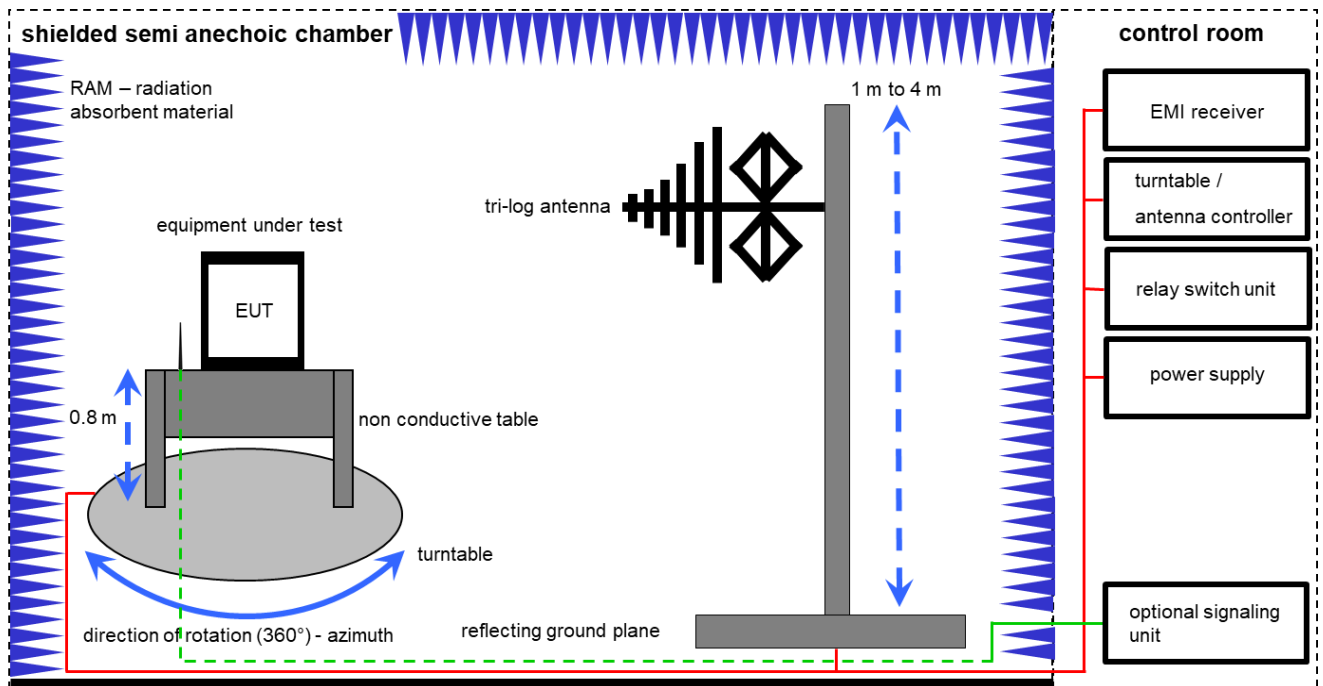

Measurement distance: tri-log antenna 10 meter; EMC32 software version: 10.59.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

### Equipment table:

| No. | Setup | Equipment                | Type                               | Manufacturer                                 | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|--------------------------|------------------------------------|----------------------------------------------|------------|----------|---------------------|------------------|------------------|
| 1   | A     | Semi anechoic chamber    | Semi anechoic chamber 3000023      | MEC Import: MWB AG                           | -/-        | 40797    | cnn                 | -/-              | -/-              |
| 2   | A     | TRILOG Broadband Antenna | TRILOG Broadband Antenna VULB9163  | Schwarzbeck Mess-Elektronik OHG Schönaun     | 371        | 40798    | cal                 | 11.07.2024       | 11.07.2026       |
| 3   | A     | Turntable                | Turntable 2089-4.0                 | EMCO Elektronik GmbH Gilching                | -/-        | 40799    | cnn                 | -/-              | -/-              |
| 4   | A     | Switch-Unit              | Switch-Unit 3488A                  | Hewlett Packard                              | 2719A14505 | 50160    | cpu                 | -/-              | -/-              |
| 5   | A     | Antenna Tower            | Antenna Tower 2175                 | ETS-Lindgren GmbH Taufkirchen                | 64762      | 50279    | cnn                 | -/-              | -/-              |
| 6   | A     | Positioning Controller   | Positioning Controller 2090        | ETS-Lindgren GmbH Taufkirchen                | 64672      | 50280    | cnn                 | -/-              | -/-              |
| 7   | A     | EMI Test Receiver        | EMI Test Receiver ESR3 9kHz-3.6GHz | Rohde & Schwarz Messgerätebau GmbH Memmingen | 102587     | 50417    | cal                 | 08.12.2025       | 31.12.2026       |

## 8.2 Shielded fully anechoic chamber

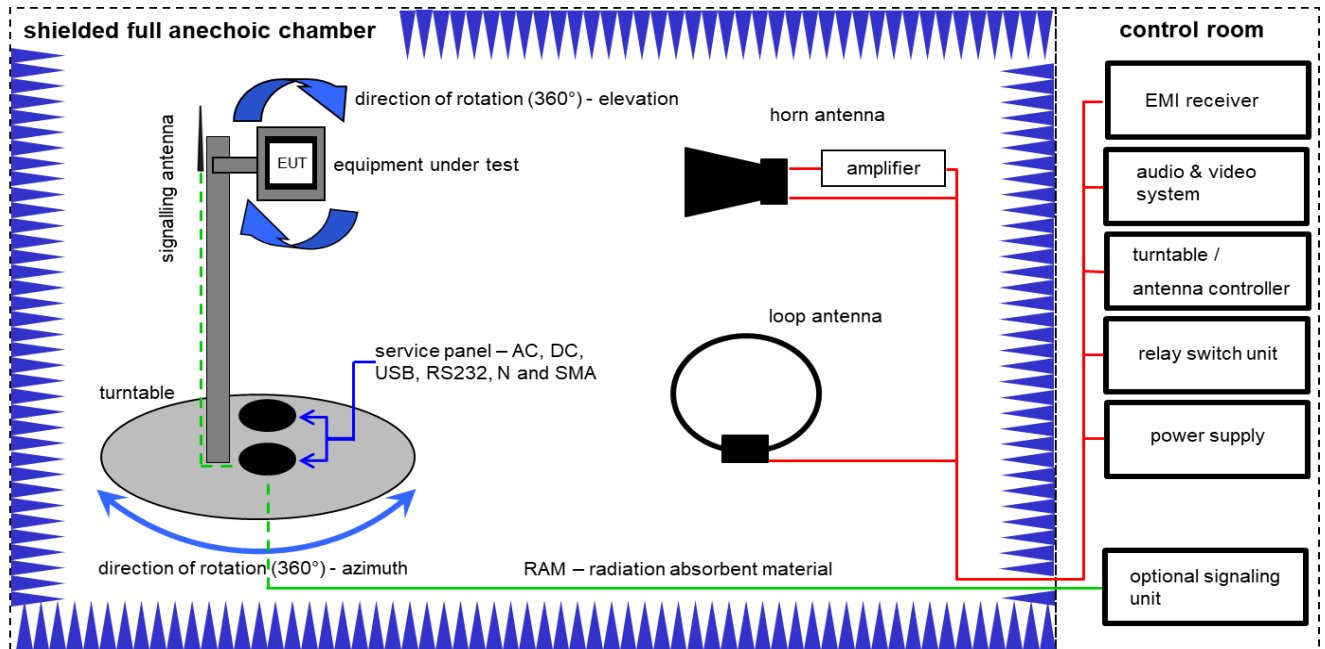

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

FS [dBμV/m] = 40.0 [dBμV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m)

### Equipment table:

| No. | Setup | Equipment                            | Type                                               | Manufacturer                                    | Serial No. | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|--------------------------------------|----------------------------------------------------|-------------------------------------------------|------------|-----------|---------------------|------------------|------------------|
| 1   | A,B,C | Double-Ridged Waveguide Horn Antenna | Double-Ridged Waveguide Horn Antenna 3115          | EMCO Elektronik GmbH Gilching                   | 9107-3696  | 40342     | cal                 | 15.04.2025       | 15.04.2027       |
| 2   | A,B,C | Anechoic chamber                     | Anechoic chamber FAC 3/5m                          | MEC Import: MWB TDK                             | 87400/02   | 40349     | cpu                 | -/-              | -/-              |
| 3   | A,B,C | Switch / Control Unit                | Switch / Control Unit 3488A                        | Hewlett Packard                                 | *          | 40350     | cnn                 | -/-              | -/-              |
| 4   | B     | Band Reject filter                   | Band Reject filter WRCG2400/2483-2375/2505-50/10SS | Wainwright Instruments GmbH Andechs             | 11         | 40356     | cpu                 | -/-              | -/-              |
| 5   | B     | Highpass Filter                      | Highpass Filter WHKX7.0/18G-8SS                    | Wainwright Instruments GmbH Andechs             | 19         | 40365     | cnn                 | -/-              | -/-              |
| 6   | B     | High Pass Filter                     | High Pass Filter VHF-3500+                         | Mini-Circuits Brooklyn                          | -/-        | 40369     | cnn                 | -/-              | -/-              |
| 7   | B     | Broadband Amplifier 0.5-18 GHz       | Broadband Amplifier 0.5-18 GHz CBLU5184540         | MEC Import: CERNEX                              | 22049      | 40373     | cpu                 | -/-              | -/-              |
| 8   | A,B,C | 4U RF Switch Platform                | 4U RF Switch Platform L4491A                       | Agilent Technologies Deutschland GmbH Böblingen | MY50000037 | 40375     | cnn                 | -/-              | -/-              |
| 9   | A,B,C | NEXIO EMV-Software                   | NEXIO EMV-Software BAT EMC V2022.0.32.0            | MEC Import: Nexio                               | -/-        | 40383     | cnn                 | -/-              | -/-              |
| 10  | B     | RF-Amplifier                         | RF-Amplifier AMF-6F06001800-30-10P-R               | MEC Import: NARDA-MITEQ Inc                     | 2011572    | 40400     | cpu                 | -/-              | -/-              |
| 11  | A,B,C | EMI Test Receiver                    | EMI Test Receiver ESU26                            | Rohde & Schwarz Messgerätebau GmbH Memmingen    | 100037     | 50254     | cal                 | 11.12.2025       | 31.12.2026       |
| 12  | B     | Low Noise Amplifier                  | Low Noise Amplifier LNA-40-00100800-15-10P         | Miteq Inc.                                      | 2336093    | 50483     | cnn                 | -/-              | -/-              |
| 13  | C     | Active Loop Antenna 9 kHz to 30 MHz  | 6502                                               | EMCO                                            | 2210       | 300001015 | vIKI!               | 07.07.2025       | 07.07.2027       |

### 8.3 Radiated measurements > 18 GHz

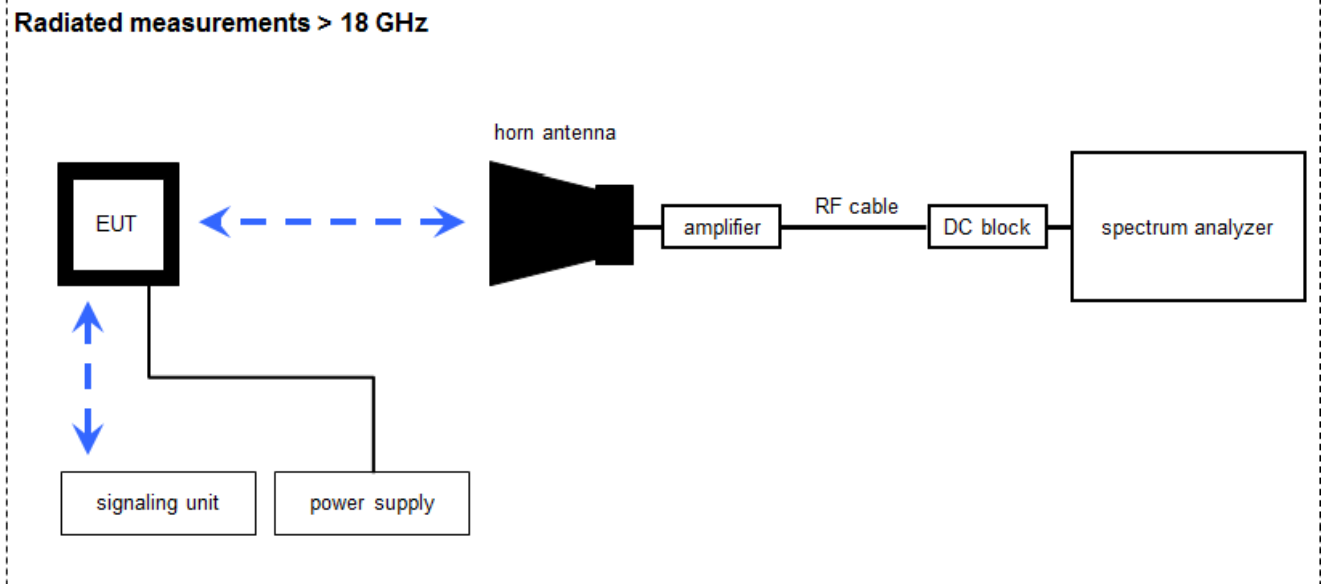

Measurement distance: horn antenna 50 cm

$FS = UR + CA + AF$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:


$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$

#### Equipment table:

| No. | Setup | Equipment                            | Type                                     | Manufacturer                                 | Serial No.       | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|--------------------------------------|------------------------------------------|----------------------------------------------|------------------|----------|---------------------|------------------|------------------|
| 1   | A     | Broadband LNA 18-50 GHz              | Broadband LNA 18-50 GHz<br>CBL18503070PN | MEC Import: CERNEX                           | 25240            | 40073    | chk                 | 22.04.2024       | 22.04.2026       |
| 2   | A     | Std. Gain Horn Antenna 18.0-26.5 GHz | Std. Gain Horn Antenna 18.0-26.5 GHz 638 | Narda Microwave                              | 8205             | 40085    | cal                 | 16.01.2026       | 31.01.2028       |
| 3   | A     | Signal analyzer                      | Signal analyzer FSV40                    | Rohde & Schwarz Messgerätebau GmbH Memmingen | 101042           | 40292    | cal                 | 08.01.2026       | 31.01.2027       |
| 4   | A     | RF-Cable                             | RF-Cable ST18/SMAM/SMAM /72              | Huber & Suhner GmbH Unterhaching             | Batch no. 699714 | 40389    | cpu                 | -/-              | -/-              |
| 5   | A     | DC-Blocker 0.1-40 GHz                | DC-Blocker 0.1-40 GHz 8141A              | MEC Import: Inmet                            | -/-              | 40390    | cpu                 | -/-              | -/-              |

## 8.4 Conducted measurement system

### Conducted measurements normal conditions

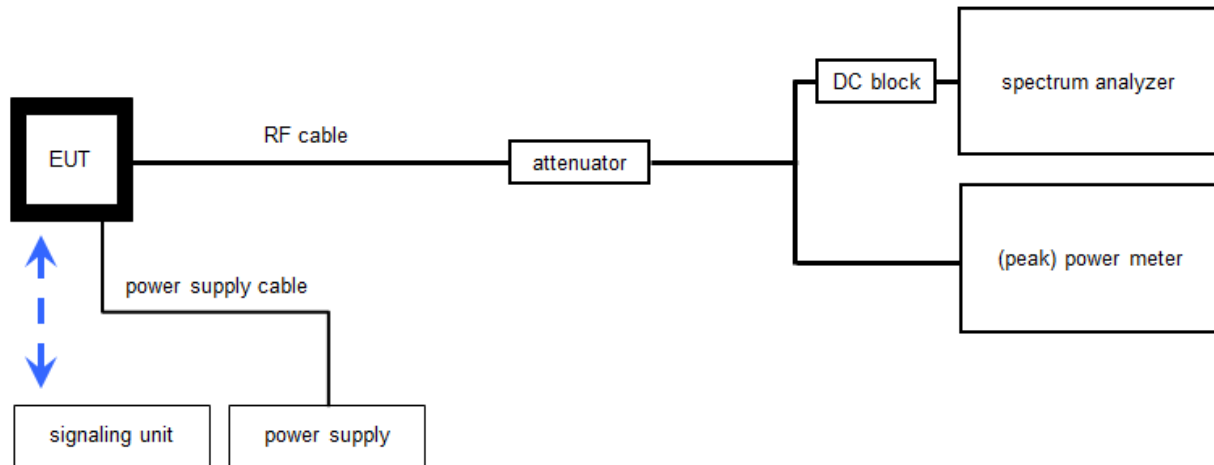

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA  
(OP-output power; AV-analyzer value; CA-loss signal path)


#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

| No. | Setup | Equipment                           | Type                                       | Manufacturer                                 | Serial No.          | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|-------------------------------------|--------------------------------------------|----------------------------------------------|---------------------|----------|---------------------|------------------|------------------|
| 1   | A     | Signal analyzer                     | Signal analyzer FSV30                      | Rohde & Schwarz Messgerätebau GmbH Memmingen | 1321.3008K30/103170 | 18373    | cal                 | 15.01.2025       | 15.01.2027       |
| 2   | A     | RF-Cable                            | RF-Cable ST18/SMAM/SMAM /72                | Huber & Suhner GmbH Unterhaching             | Batch no. 699714    | 40389    | cpu                 | -/-              | -/-              |
| 3   | A     | DC-Blocker 0.1-40 GHz               | DC-Blocker 0.1-40 GHz 8141A                | MEC Import: Inmet                            | -/-                 | 40390    | cpu                 | -/-              | -/-              |
| 4   | A     | Switch Matrix                       | Switch Matrix USM                          | cetecom advanced GmbH Saarbrücken            | C001                | 40340    | cnn                 | -/-              | -/-              |
| 5   | A     | RF-Cable                            | RF-Cable ST18/SMAM/SMAM /60                | Huber & Suhner GmbH Unterhaching             | Batch no. 606844    | 40386    | cpu                 | -/-              | -/-              |
| 6   | A     | Wideband Radio Communication Tester | Wideband Radio Communication Tester CMW270 | Rohde & Schwarz Messgerätebau GmbH Memmingen | 1201.0002k75/102550 | 40329    | cal                 | 10.12.2025       | 31.12.2027       |

## 8.5 AC conducted

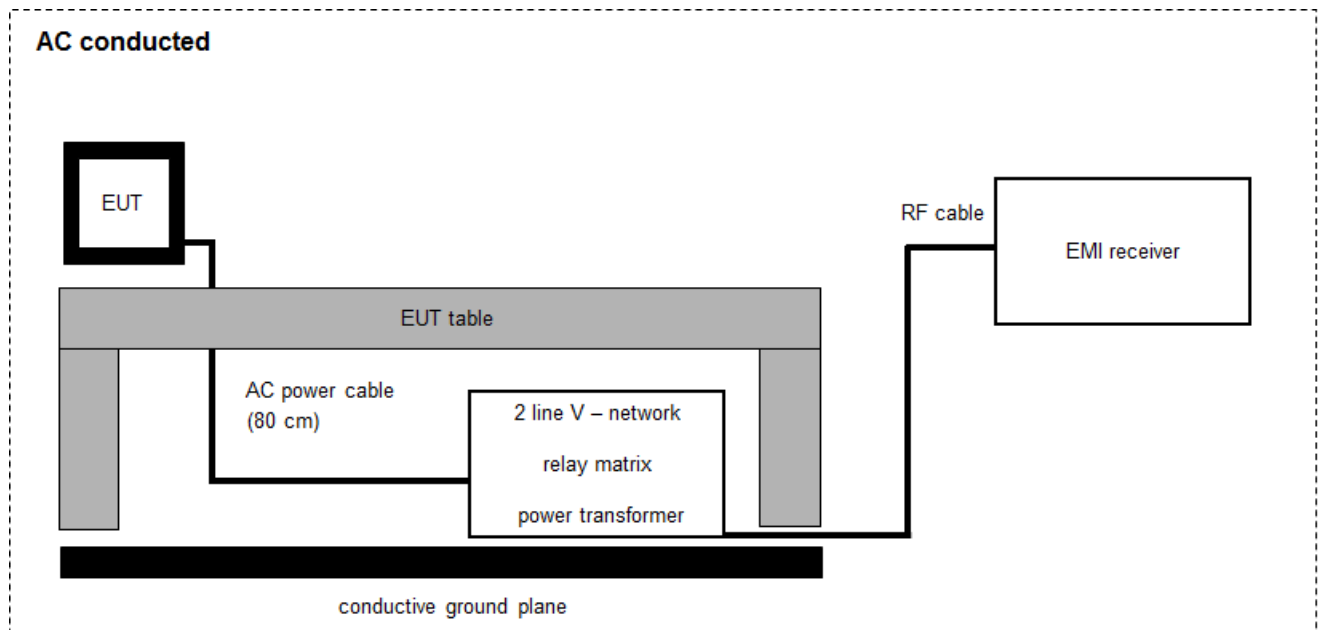

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

### Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m) @ distance$$

### Equipment table:

| No. | Setup | Equipment                 | Type                              | Manufacturer                                    | Serial No.       | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|---------------------------|-----------------------------------|-------------------------------------------------|------------------|----------|---------------------|------------------|------------------|
| 1   | A     | EMI Test Receiver         | EMI Test Receiver ESR3            | Rohde & Schwarz Messgerätebau GmbH / Memmingen  | 102981           | 40332    | cal                 | 05.12.2025       | 31.12.2026       |
| 2   | A     | Analyzer-Impedance-System | Analyzer-Impedance-System AIS16/1 | MEC Import: Spitzenberger + Spies GmbH & Co. KG | U02076 07/0 1023 | 40808    | cal                 | 09.12.2025       | 31.12.2027       |
| 3   | A     | Two-Line V-Network (LISN) | Two-Line V-Network (LISN) ESH3-Z5 | Rohde & Schwarz Messgerätebau GmbH / Memmingen  | 892475/017       | 50005    | cal                 | 09.12.2025       | 31.12.2027       |
| 4   | A     | Hochpass 150 kHz          | Hochpass 150 kHz EZ-25            | Rohde & Schwarz Messgerätebau GmbH / Memmingen  | 100010           | 50286    | cpu                 | -/-              | -/-              |

## 9 Measurement uncertainty

| Measurement uncertainty                                  |                                                  |
|----------------------------------------------------------|--------------------------------------------------|
| Test case                                                | Uncertainty                                      |
| Antenna gain                                             | $\pm 3$ dB                                       |
| Carrier frequency separation                             | $\pm 21.5$ kHz                                   |
| Number of hopping channels                               | -/-                                              |
| Time of occupancy                                        | According BT Core specification                  |
| Spectrum bandwidth                                       | $\pm 21.5$ kHz absolute; $\pm 15.0$ kHz relative |
| Maximum output power                                     | $\pm 1$ dB                                       |
| Detailed conducted spurious emissions @ the band edge    | $\pm 1$ dB                                       |
| Band edge compliance radiated                            | $\pm 3$ dB                                       |
| Spurious emissions conducted                             | $\pm 3$ dB                                       |
| Spurious emissions radiated below 30 MHz                 | $\pm 3$ dB                                       |
| Spurious emissions radiated 30 MHz to 1 GHz              | $\pm 4.1$ dB                                     |
| Spurious emissions radiated 1 GHz to 12.75 GHz           | $\pm 3.7$ dB                                     |
| Spurious emissions radiated above 12.75 GHz              | $\pm 4.5$ dB                                     |
| Spurious emissions conducted below 30 MHz (AC conducted) | $\pm 2.6$ dB                                     |

## 10 Summary of measurement results

|                                     |                                                                                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained                                                         |
| <input type="checkbox"/>            | There were deviations from the technical specifications ascertained                                                      |
| <input type="checkbox"/>            | This test report is only a partial test report.<br>The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description                       | Verdict    | Date       | Remark |
|---------------|-----------------------------------|------------|------------|--------|
| RF-Testing    | CFR Part 15<br>RSS - 247, Issue 4 | See table! | 2026-03-09 | -/-    |

| Test specification clause                             | Test case                                       | Temperature & voltage conditions | Mode       | C                                   | NC                       | NA                       | NP                       | Remark |
|-------------------------------------------------------|-------------------------------------------------|----------------------------------|------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------|
| §15.247(b)(4)<br>RSS - 247 / 5.4.(f)(ii)              | Antenna gain                                    | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
| §15.247(a)(1)<br>RSS - 247 / 5.1.(b)                  | Carrier frequency separation                    | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
| §15.247(a)(1)<br>RSS - 247 / 5.1 (d)                  | Number of hopping channels                      | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
| §15.247(a)(1) (iii)<br>RSS - 247 / 5.1 (c)            | Time of occupancy (dwell time)                  | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
|                                                       |                                                 |                                  | Pi/4 DQPSK | <input checked="" type="checkbox"/> |                          |                          |                          |        |
|                                                       |                                                 |                                  | 8 DPSK     | <input checked="" type="checkbox"/> |                          |                          |                          |        |
| §15.247(a)(1)<br>RSS - 247 / 5.1 (a)                  | Spectrum bandwidth of a FHSS system bandwidth   | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
|                                                       |                                                 |                                  | Pi/4 DQPSK | <input checked="" type="checkbox"/> |                          |                          |                          |        |
|                                                       |                                                 |                                  | 8 DPSK     | <input checked="" type="checkbox"/> |                          |                          |                          |        |
| §15.247(b)(1)<br>RSS - 247 / 5.4 (b)                  | Maximum output power                            | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
|                                                       |                                                 |                                  | Pi/4 DQPSK | <input checked="" type="checkbox"/> |                          |                          |                          |        |
|                                                       |                                                 |                                  | 8 DPSK     | <input checked="" type="checkbox"/> |                          |                          |                          |        |
| §15.205<br>RSS - 247 / 5.5 RSS - Gen                  | Band edge compliance radiated                   | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
|                                                       |                                                 |                                  | Pi/4 DQPSK | <input checked="" type="checkbox"/> |                          |                          |                          |        |
|                                                       |                                                 |                                  | 8 DPSK     | <input checked="" type="checkbox"/> |                          |                          |                          |        |
| §15.247(d)<br>RSS - 247 / 5.5                         | Spurious emissions conducted                    | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
|                                                       |                                                 |                                  | Pi/4 DQPSK | <input checked="" type="checkbox"/> |                          |                          |                          |        |
|                                                       |                                                 |                                  | 8 DPSK     | <input checked="" type="checkbox"/> |                          |                          |                          |        |
| §15.209(a)<br>RSS - Gen                               | Spurious emissions radiated below 30 MHz        | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
| §15.247(d)<br>RSS - 247 / 5.5<br>§15.109<br>RSS - Gen | Spurious emissions radiated 30 MHz to 1 GHz     | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
| §15.247(d)<br>RSS - 247 / 5.5<br>§15.109<br>RSS - Gen | Spurious emissions radiated above 1 GHz         | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |
| §15.107(a)<br>§15.207                                 | Conducted emissions below 30 MHz (AC conducted) | Nominal                          | GFSK       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-    |

### Notes:

|          |           |           |               |           |                |           |               |
|----------|-----------|-----------|---------------|-----------|----------------|-----------|---------------|
| <b>C</b> | Compliant | <b>NC</b> | Not compliant | <b>NA</b> | Not applicable | <b>NP</b> | Not performed |
|----------|-----------|-----------|---------------|-----------|----------------|-----------|---------------|

## 11 Additional comments

*The Bluetooth® word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by cetecom advanced GmbH is under license.*

Reference documents: 4-5 TR 865 008-02 Renesas BLE DA14870 - Antenna characterization A  
Customer\_Questionnaire\_DA14870MOD\_27-Jan-2026.docx

Co-applicable documents: 1-2210-25-01-06\_TR1-A201-R01.pdf

Special test descriptions: None

Configuration descriptions: TX tests: were performed with x-DH5 packets and static PRBS pattern  
payload.  
RX/Standby tests: BT test mode enabled, scan enabled, TX Idle

EUT selection: ☐ Only one device available  
☐ Devices selected by the customer  
☒ Devices selected by the laboratory (Randomly)

Test mode: ☒ Bluetooth Test mode loop back enabled  
(EUT is controlled over CBT/CMU/CMW)  
☒ Special software is used.  
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes: ☒ Operating mode 1 (single antenna)  
- Equipment with 1 antenna,  
- Equipment with 2 diversity antennas operating in switched diversity mode  
by which at any moment in time only 1 antenna is used,  
- Smart antenna system with 2 or more transmit/receive chains, but  
operating in a mode where only 1 transmit/receive chain is used)

## 12 Measurement results

### 12.1 Antenna gain

#### Limits:

| FCC                                                               | ISED |
|-------------------------------------------------------------------|------|
| 6 dBi / > 6 dBi output power and power density reduction required |      |

#### Results: Extracted from antenna datasheet

|                        | 2400 MHz | 2410 MHz | 2420 MHz | 2430 MHz | 2440 MHz | 2450 MHz | 2460 MHz | 2470 MHz | 2480 MHz |
|------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Gain [dBi]<br>Declared | 1.5      | 1.6      | 1.4      | 1.3      | 1.4      | 1.5      | 1.5      | 0.9      | 0.6      |

## 12.2 Carrier frequency separation

### Description:

Measurement of the carrier frequency separation of a hopping system. The carrier frequency separation is constant for all modulation-modes. We use GFSK-modulation to show compliance. EUT in hopping mode.

| Measurement parameters  |                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------|
| External result file    | 1-2210-25-01-06_TR1-A201-R01.pdf<br>FCC Part 15.247 Carrier Frequency Separation FHSS |
| Test setup              | See sub clause 8.4 setup A                                                            |
| Measurement uncertainty | See sub clause 9                                                                      |

### Limits:

| FCC                                                                                             | ISED |
|-------------------------------------------------------------------------------------------------|------|
| Carrier frequency separation                                                                    |      |
| Minimum 25 kHz or two-thirds of the 20 dB bandwidth of the hopping system whichever is greater. |      |

### Result:

|                              |         |
|------------------------------|---------|
| Carrier frequency separation | ~ 1 MHz |
|------------------------------|---------|

### 12.3 Number of hopping channels

#### Description:

Measurement of the total number of used hopping channels. The number of hopping channels is constant for all modulation-modes. We use GFSK-modulation to show compliance. EUT in hopping mode.

| Measurement parameters  |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| External result file    | 1-2210-25-01-06_TR1-A201-R01.pdf<br>FCC Part 15.247 Number Of Hopping Channels FHSS |
| Test setup              | See sub clause 8.4 setup A                                                          |
| Measurement uncertainty | See sub clause 9                                                                    |

#### Limits:

| FCC                                          | ISED |
|----------------------------------------------|------|
| Number of hopping channels                   |      |
| At least 15 non overlapping hopping channels |      |

#### Result:

|                            |    |
|----------------------------|----|
| Number of hopping channels | 79 |
|----------------------------|----|

## 12.4 Time of occupancy (dwell time)

### Measurement:

For Bluetooth® devices no measurements mandatory depending on the fixed requirements according to the Bluetooth® Core Specifications!

### For Bluetooth® devices:

The channel staying time of 0.4 s within a 31.6 second period in data mode is constant for Bluetooth® devices and independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Channel staying time = time slot length \* hop rate / number of hopping channels \* 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Channel staying time =  $625 \mu\text{s} * 1600 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

For multi-slot packets the hopping is reduced according to the length of the packet.

Example for a DH3 packet (with a maximum length of three time slots)

Channel staying time =  $3 * 625 \mu\text{s} * 1600/3 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

Example for a DH5 packet (with a maximum length of five time slots)

Channel staying time =  $5 * 625 \mu\text{s} * 1600/5 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

This is according to the Bluetooth® Core Specification 5.3 (and lower) for all Bluetooth® devices and all modulations.

### The following table shows the relations:

| Packet Size | Pulse Width [ms] * | Max. number of transmissions per channel in 31.6 sec |
|-------------|--------------------|------------------------------------------------------|
| DH1         | 0.366              | 640                                                  |
| DH3         | 1.622              | 214                                                  |
| DH5         | 2.870              | 128                                                  |

\* according Bluetooth® specification

### Results:

| Packet Size | Pulse Width [ms]* | Max. number of transmissions in 31.6 sec | Time of occupancy (dwell time) [Pulse width * Number of transmissions] |
|-------------|-------------------|------------------------------------------|------------------------------------------------------------------------|
| DH1         | 0.366             | 640                                      | 234.2 ms                                                               |
| DH3         | 1.622             | 214                                      | 347.1 ms                                                               |
| DH5         | 2.870             | 128                                      | 367.4 ms                                                               |

### Limits:

| FCC                                                                                                                                                                                                           | ISED |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Time of occupancy (dwell time)                                                                                                                                                                                |      |
| The frequency hopping operation shall have an average time of occupancy on any frequency not exceeding 0.4 seconds within a duration in seconds equal to the number of hopping frequencies multiplied by 0.4. |      |

## 12.5 Spectrum bandwidth of a FHSS system

### Description:

Measurement of the 20dB bandwidth and 99% bandwidth of the modulated signal. EUT in single channel mode.

| Measurement parameters  |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| External result file    | 1-2210-25-01-06_TR1-A201-R01.pdf<br>FCC Part 15.247 Bandwidth 99PCT |
| Test setup              | See sub clause 8.4 setup A                                          |
| Measurement uncertainty | See sub clause 9                                                    |

### Limits:

| FCC                                                                      | ISED |
|--------------------------------------------------------------------------|------|
| Spectrum bandwidth of a FHSS system                                      |      |
| The complete bandwidth has to be within the frequency range of the band. |      |

### Results:

| Modulation | 20 dB bandwidth [kHz] |          |          |
|------------|-----------------------|----------|----------|
| Frequency  | 2402 MHz              | 2441 MHz | 2480 MHz |
| GFSK       | 890                   | 890      | 890      |
| Pi/4 DQPSK | 1361                  | 1363     | 1372     |
| 8DPSK      | 1365                  | 1368     | 1370     |

### Results:

| Modulation | 99 % bandwidth [kHz] |          |          |
|------------|----------------------|----------|----------|
| Frequency  | 2402 MHz             | 2441 MHz | 2480 MHz |
| GFSK       | 859                  | 853      | 859      |
| Pi/4 DQPSK | 1260                 | 1261     | 1262     |
| 8DPSK      | 1258                 | 1256     | 1255     |

## 12.6 Maximum output power

### Description:

Measurement of the maximum output power conducted. EUT in single channel mode.

| Measurement parameters  |                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------|
| External result file    | 1-2210-25-01-06_TR1-A201-R01.pdf<br>FCC Part 15.247 Maximum Peak Conducted Output Power FHSS |
| Test setup              | See sub clause 8.4 setup A                                                                   |
| Measurement uncertainty | See sub clause 9                                                                             |

### Limits:

| FCC                                                                                                                                          | ISED |
|----------------------------------------------------------------------------------------------------------------------------------------------|------|
| Maximum output power                                                                                                                         |      |
| [Conducted: 0.125 W – antenna gain max. 6 dBi]<br>Systems using more than 75 hopping channels:<br>Conducted: 1.0 W – antenna gain max. 6 dBi |      |

### Results:

| Modulation | Maximum output power conducted [dBm] |          |          |
|------------|--------------------------------------|----------|----------|
| Frequency  | 2402 MHz                             | 2441 MHz | 2480 MHz |
| GFSK       | 11.7                                 | 11.6     | 11.4     |
| Pi/4 DQPSK | 11.0                                 | 10.8     | 9.6      |
| 8 DPSK     | 11.2                                 | 11.0     | 9.7      |

## 12.7 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit channel is channel 00 for the lower restricted band and channel 78 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

| Measurement parameters  |                                                            |
|-------------------------|------------------------------------------------------------|
| Detector                | Peak / RMS                                                 |
| Sweep time              | Auto                                                       |
| Resolution bandwidth    | 1 MHz                                                      |
| Video bandwidth         | 3 MHz                                                      |
| Span                    | Lower Band: 2370 – 2400 MHz<br>Upper Band: 2480 – 2500 MHz |
| Trace mode              | Max hold                                                   |
| Test setup              | See sub clause 8.2 setup A                                 |
| Measurement uncertainty | See sub clause 9                                           |

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ISED |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Band edge compliance radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |      |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |      |
| 54 dBµV/m AVG<br>74 dBµV/m Peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |


### Results:

| Scenario              | Band edge compliance radiated [dBµV/m] |                                      |                                      |
|-----------------------|----------------------------------------|--------------------------------------|--------------------------------------|
| Modulation            | GFSK                                   | Pi/4 DQPSK                           | 8DPSK                                |
| Lower restricted band | 16.7* dBµV/m AVG<br>46.8 dBµV/m Peak   | 22.7* dBµV/m AVG<br>52.8 dBµV/m Peak | 24.4* dBµV/m AVG<br>54.5 dBµV/m Peak |
| Upper restricted band | 28.9* dBµV/m AVG<br>59.0 dBµV/m Peak   | 31.5* dBµV/m AVG<br>61.6 dBµV/m Peak | 29.6* dBµV/m AVG<br>59.7 dBµV/m Peak |


\*Average emission adjusting factor of -30.1 dB was used (see chapter 12.11 for details)

## Plots:


**Plot 1:** Lower band edge, GFSK modulation, vertical & horizontal polarization

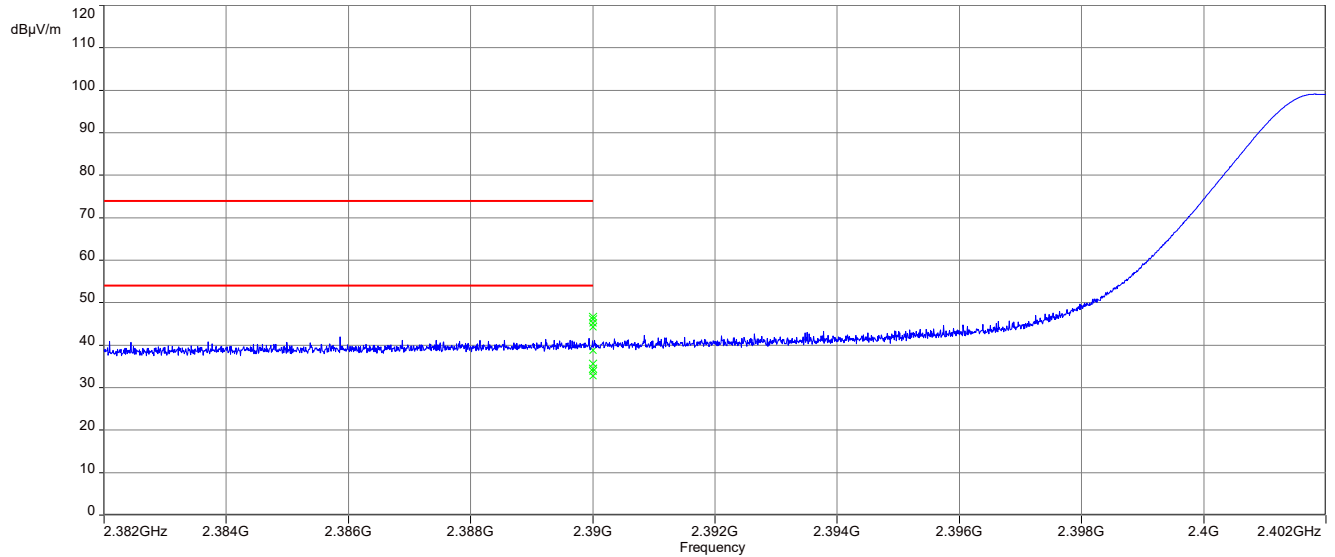


**Plot 2:** Upper band edge, GFSK modulation, vertical & horizontal polarization

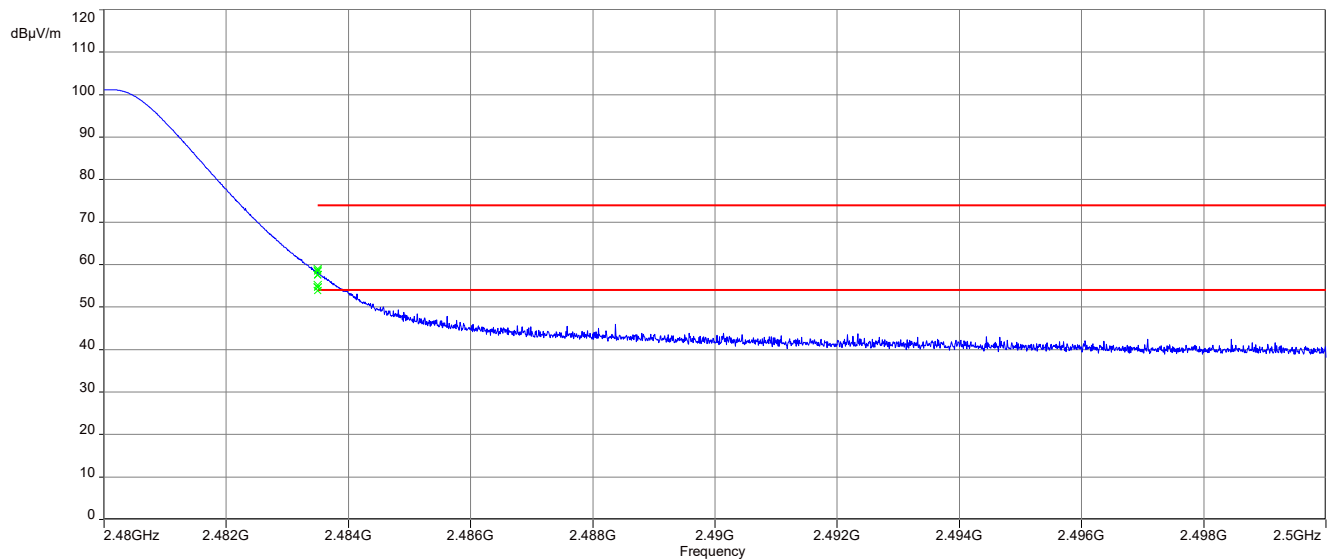


**Plot 3:** Lower band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization

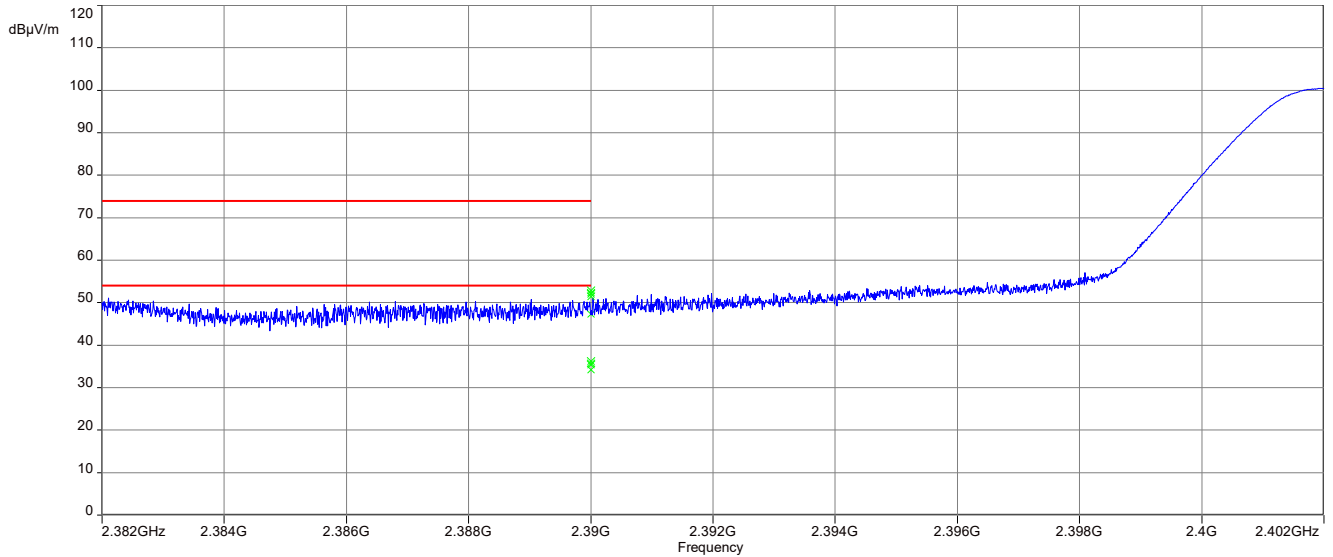


**Plot 4:** Upper band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization

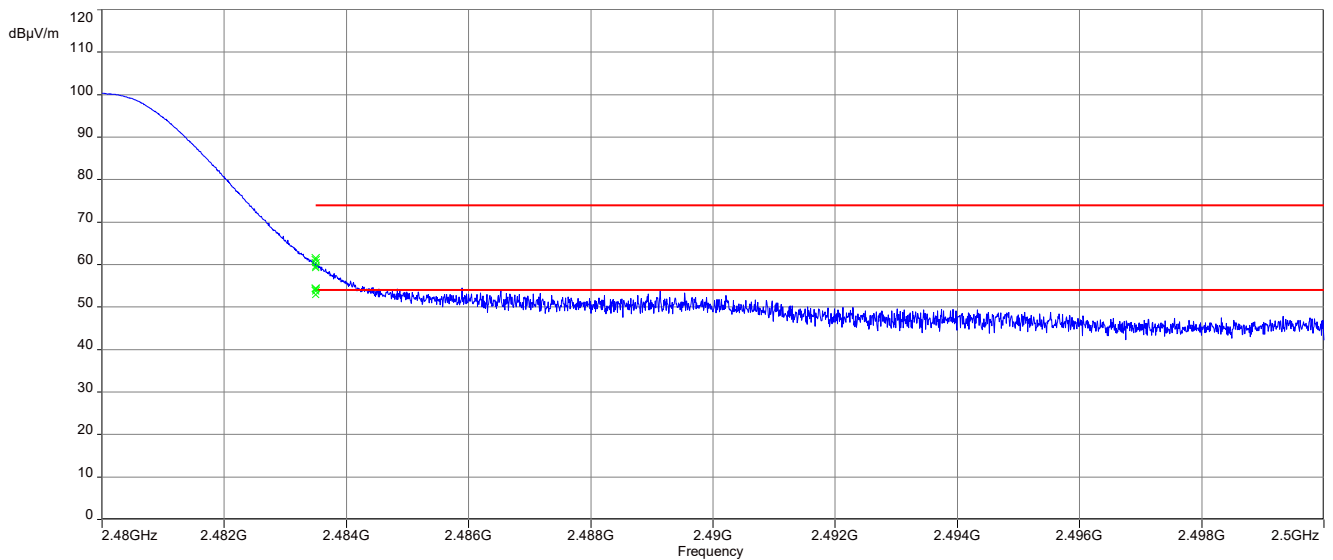

**Plot 5:** Lower band edge, 8 DPSK modulation, vertical & horizontal polarization

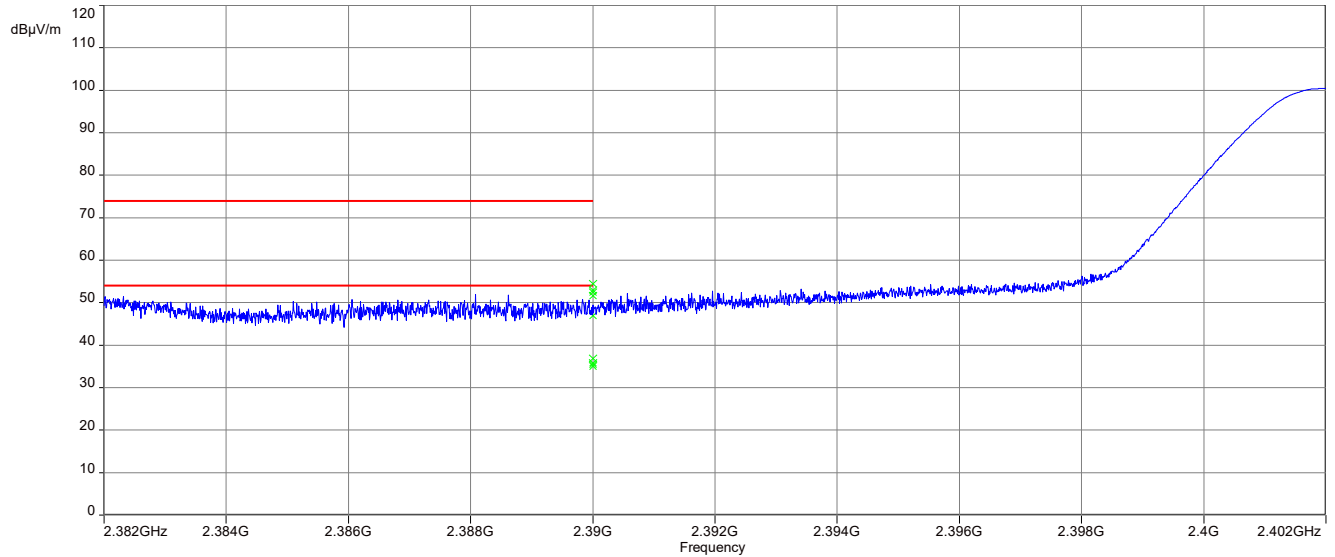

**Plot 6:** Upper band edge, 8 DPSK modulation, vertical & horizontal polarization

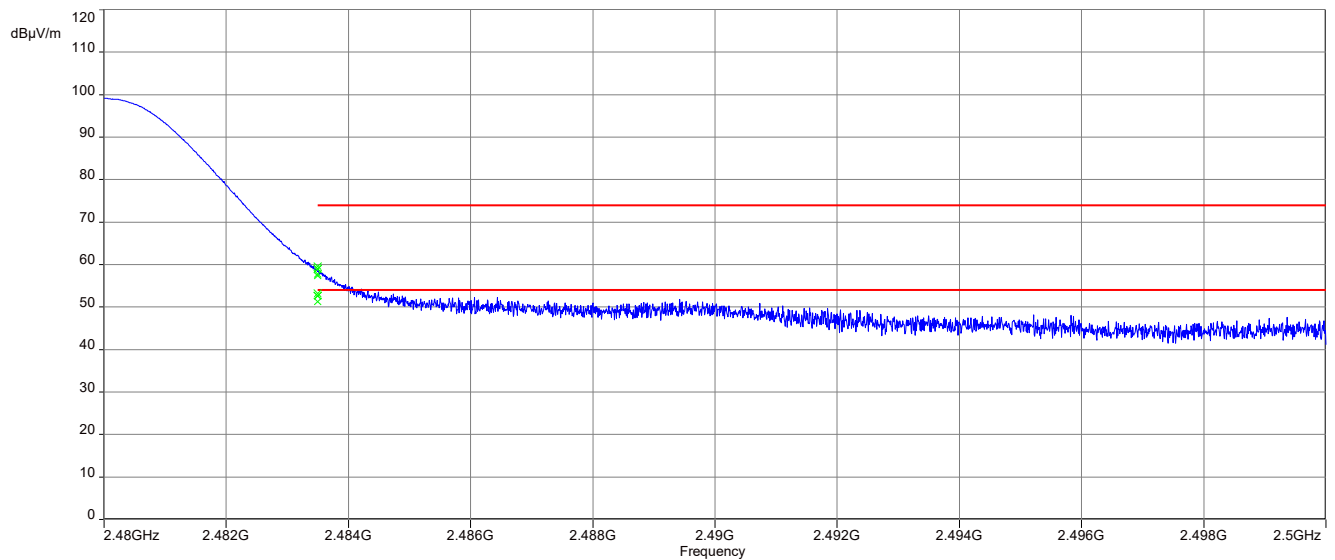

## 12.8 Spurious emissions conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is repeated for all modulations.

| Measurement parameters  |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| External result file    | 1-2210-25-01-06_TR1-A201-R01.pdf<br>FCC Part 15.247 TX Spurious Conducted |
| Test setup              | See sub clause 8.4 setup A                                                |
| Measurement uncertainty | See sub clause 9                                                          |

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ISED |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| TX spurious emissions conducted                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required |      |

**Results:** Compliant (see results annex)

## 12.9 Spurious emissions radiated below 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channels are 00; 39 and 78. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m according the ANSI C63.10.



| Measurement parameters  |                                            |
|-------------------------|--------------------------------------------|
| Detector                | Peak / Quasi peak                          |
| Sweep time              | Auto                                       |
| Resolution bandwidth    | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Video bandwidth         | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span                    | 9 kHz to 30 MHz                            |
| Trace mode              | Max hold                                   |
| Test setup              | See sub clause 8.2 setup C                 |
| Measurement uncertainty | See sub clause 9                           |

### Limits:


| FCC                                         |                       | ISED                     |
|---------------------------------------------|-----------------------|--------------------------|
| TX spurious emissions radiated below 30 MHz |                       |                          |
| Frequency (MHz)                             | Field strength (µV/m) | Measurement distance (m) |
| 0.009 – 0.490                               | 2400/F(kHz)           | 300                      |
| 0.490 – 1.705                               | 24000/F(kHz)          | 30                       |
| 1.705 – 30.0                                | 30                    | 30                       |

### Results:

| TX spurious emissions radiated below 30 MHz [dBµV/m]        |          |                |
|-------------------------------------------------------------|----------|----------------|
| F [MHz]                                                     | Detector | Level [dBµV/m] |
| All detected emissions are more than 20 dB below the limit. |          |                |
|                                                             |          |                |
|                                                             |          |                |

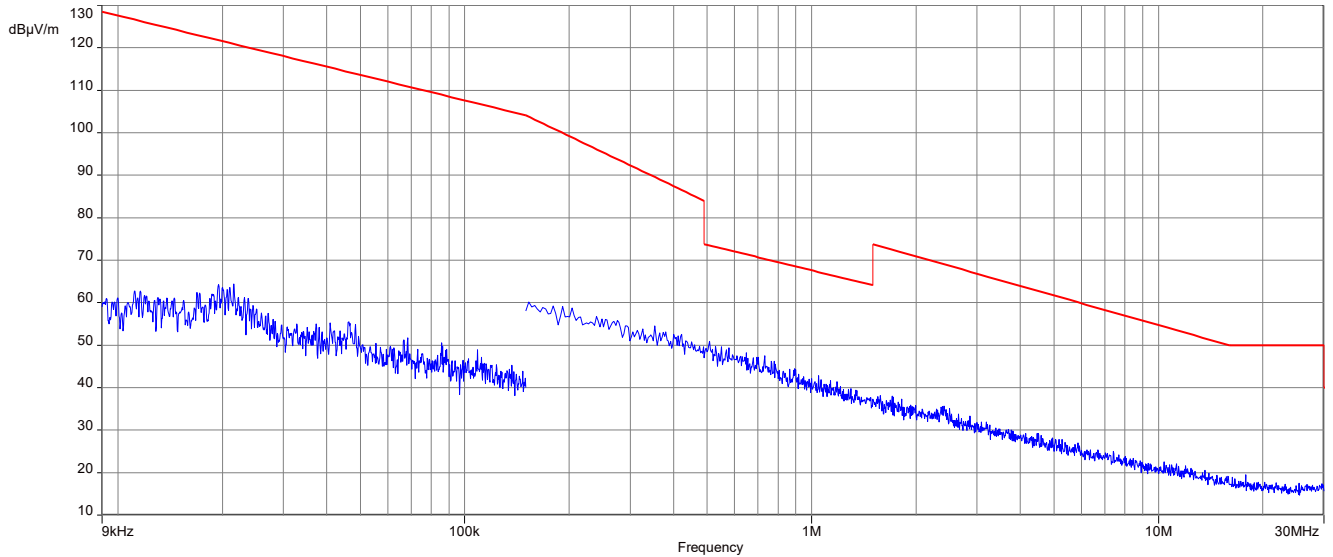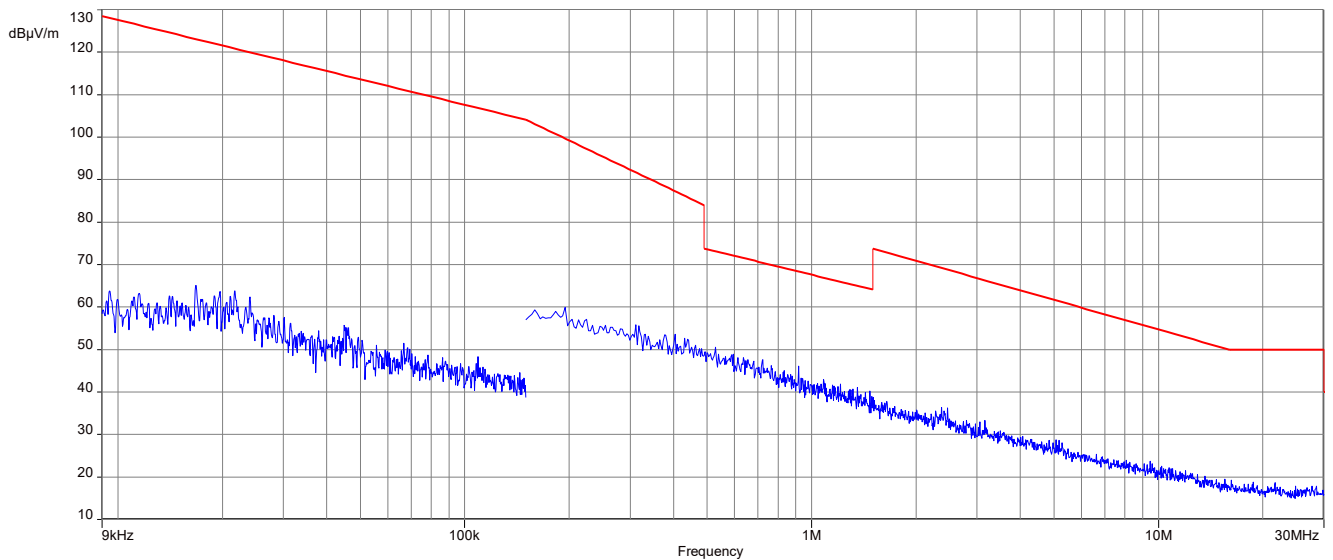**Plots:****Plot 1:** 9 kHz to 30 MHz, channel 00, transmit mode**Plot 2:** 9 kHz to 30 MHz, channel 39, transmit mode

**Plot 3:** 9 kHz to 30 MHz, channel 78, transmit mode

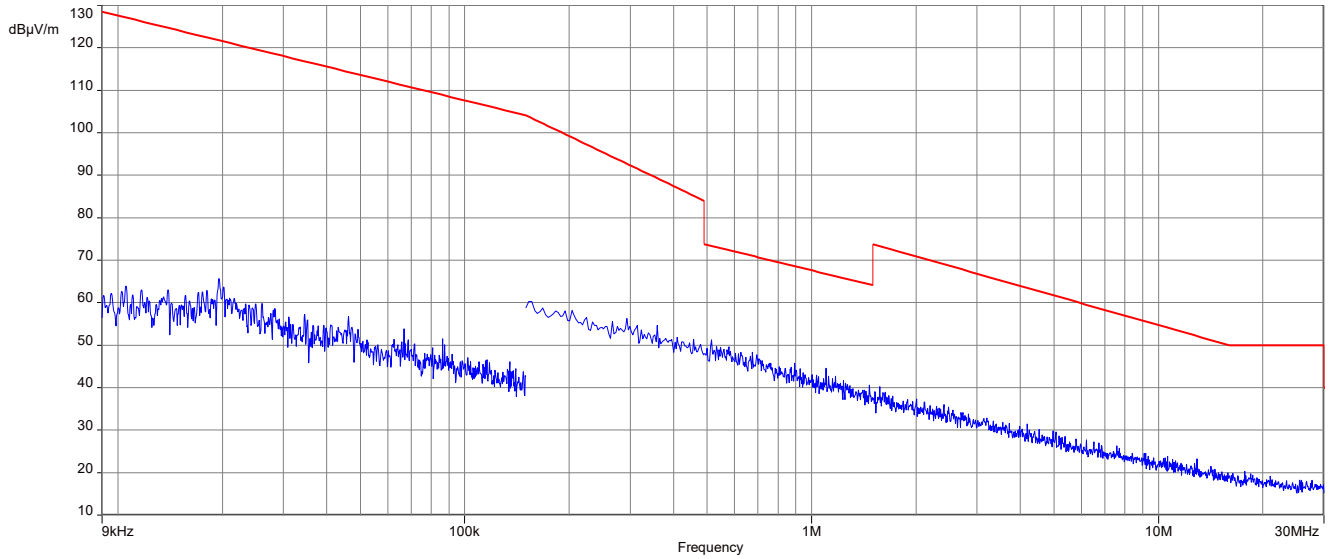

## 12.10 Spurious emissions radiated 30 MHz to 1 GHz

### Description:


Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is performed in the mode with the highest output power.

| Measurement parameters  |                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------|
| Detector                | Peak / Quasi Peak                                                                                           |
| Sweep time              | Auto                                                                                                        |
| Resolution bandwidth    | 120 kHz                                                                                                     |
| Video bandwidth         | 3 x RBW                                                                                                     |
| Span                    | 30 MHz to 1 GHz                                                                                             |
| Trace mode              | Max hold                                                                                                    |
| Measured modulation     | <input checked="" type="checkbox"/> GFSK <input type="checkbox"/> Pi/4 DQPSK <input type="checkbox"/> 8DPSK |
| Test setup              | See sub clause 8.1 setup A                                                                                  |
| Measurement uncertainty | See sub clause 9                                                                                            |

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                         | ISED                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------|
| TX spurious emissions radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                          |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |                         |                          |
| §15.209                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                         |                          |
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Field strength (dBµV/m) | Measurement distance (m) |
| 30 - 88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30.0                    | 10                       |
| 88 - 216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 33.5                    | 10                       |
| 216 - 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 36.0                    | 10                       |
| Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 54.0                    | 3                        |

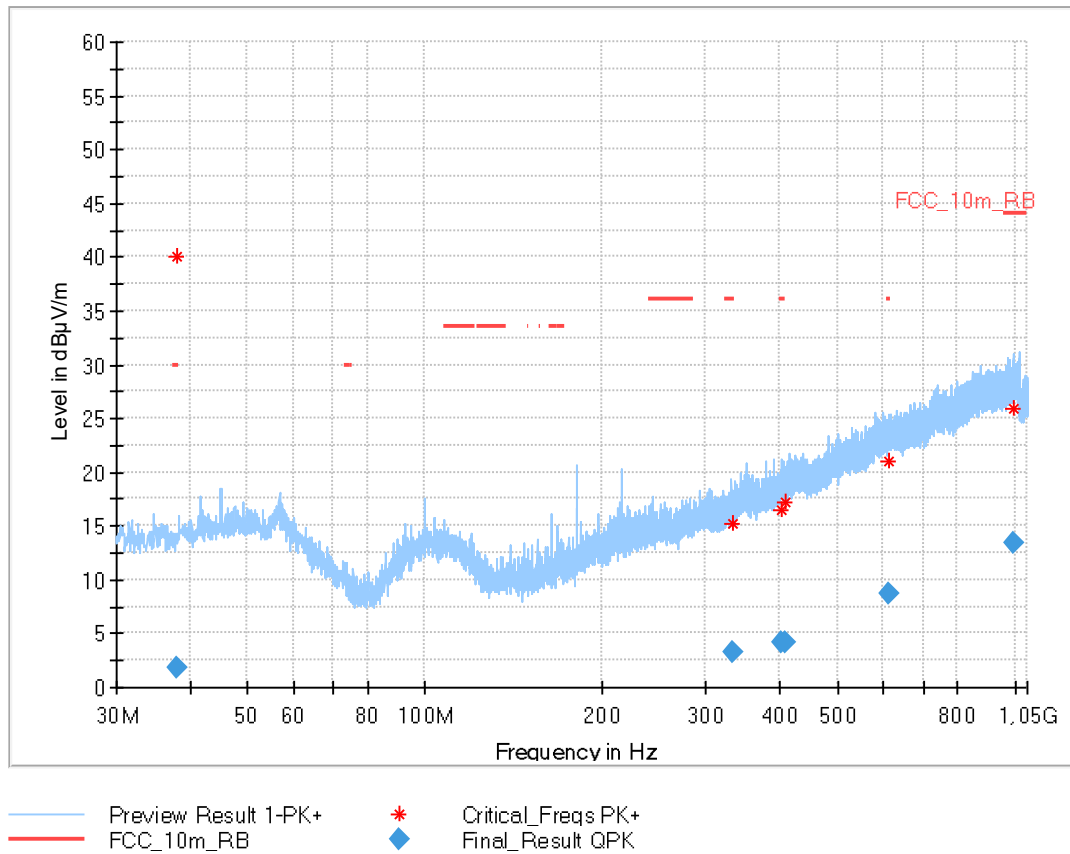**Plots:** Transmit mode**Plot 1:** 30 MHz to 1 GHz, TX mode, vertical & horizontal polarization, valid for all channels**Final results:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 37.895          | 1.76               | 30.0           | 28.2        | 1000            | 120.0           | 387.0       | H   | 196           | 13         |
| 331.541         | 3.27               | 36.0           | 32.7        | 1000            | 120.0           | 288.0       | V   | 196           | 16         |
| 400.857         | 4.18               | 36.0           | 31.8        | 1000            | 120.0           | 166.0       | V   | 111           | 18         |
| 407.440         | 4.18               | 36.0           | 31.8        | 1000            | 120.0           | 200.0       | H   | 27            | 18         |
| 609.889         | 8.76               | 36.0           | 27.2        | 1000            | 120.0           | 279.0       | H   | 192           | 22         |
| 995.251         | 13.33              | 44.0           | 30.7        | 1000            | 120.0           | 138.0       | H   | 320           | 25         |

## 12.11 Spurious emissions radiated above 1 GHz

### Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is performed in the mode with the highest output power.

| Measurement parameters  |                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------|
| Detector                | Peak / RMS                                                                                                  |
| Sweep time              | Auto                                                                                                        |
| Resolution bandwidth    | 1 MHz                                                                                                       |
| Video bandwidth         | 3 x RBW                                                                                                     |
| Span                    | 1 GHz to 26 GHz                                                                                             |
| Trace mode              | Max hold                                                                                                    |
| Measured modulation     | <input checked="" type="checkbox"/> GFSK <input type="checkbox"/> Pi/4 DQPSK <input type="checkbox"/> 8DPSK |
| Test setup              | See sub clause 8.2 setup B (1 GHz - 18 GHz)<br>See sub clause 8.3 setup A (18 GHz - 26 GHz)                 |
| Measurement uncertainty | See sub clause 9                                                                                            |

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                         | ISED                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------|
| TX spurious emissions radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                          |
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |                         |                          |
| §15.209                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                         |                          |
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Field strength (dBµV/m) | Measurement distance (m) |
| Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 54.0                    | 3                        |

**Results:** Transmitter mode

| TX spurious emissions radiated [dBμV/m] |          |                |          |          |                |          |          |                |
|-----------------------------------------|----------|----------------|----------|----------|----------------|----------|----------|----------------|
| 2402 MHz                                |          |                | 2441 MHz |          |                | 2480 MHz |          |                |
| F [MHz]                                 | Detector | Level [dBμV/m] | F [MHz]  | Detector | Level [dBμV/m] | F [MHz]  | Detector | Level [dBμV/m] |
| -/-                                     | Peak     | -/-            | 7322     | Peak     | 50.3           | 7440     | Peak     | 51.5           |
|                                         | AVG      | -/-            |          | AVG      | 20.2*          |          | AVG      | 21.4*          |


\*) Average emission adjusting factor:

$$F = 20 * \log (\text{dwell time} / 100 \text{ ms})$$


The dwell time of the longest possible Bluetooth transmission (DH5-packet) is 3.125 ms.

In a period of 100 ms, we have a maximum of 1 transmission and that implies a correction factor for spurious measurement emissions:


$$F = 20 * \log (1 * 3.125 / 100) = -30.1 \text{ dB}$$

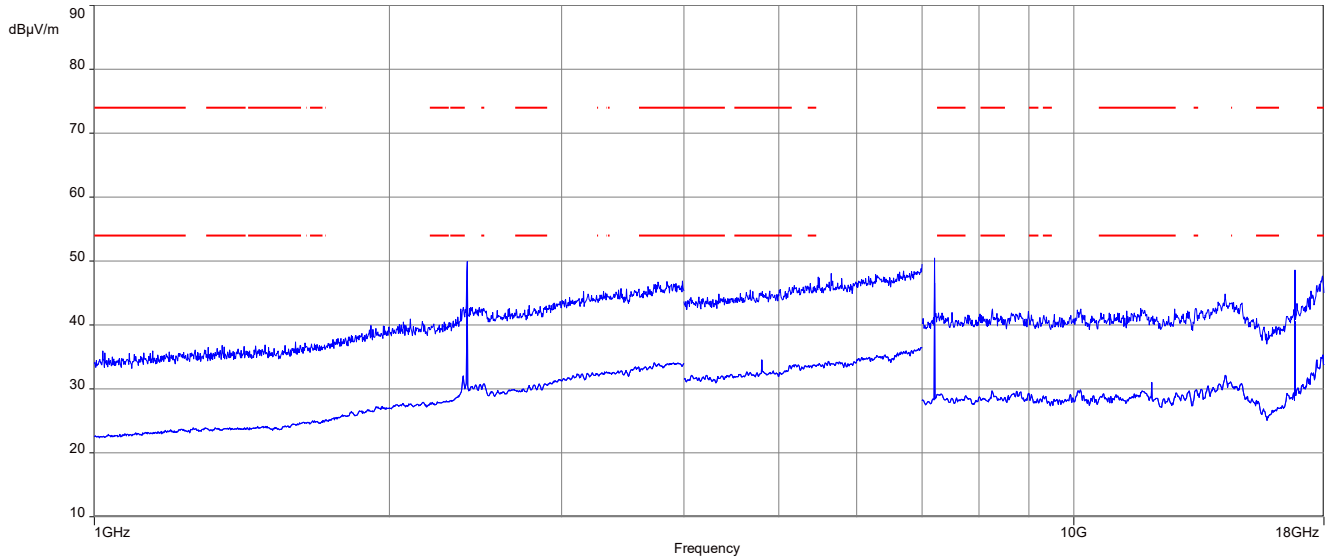**Plots:** Transmitter mode**Plot 1:** 1 GHz to 18 GHz, TX mode, channel 00, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

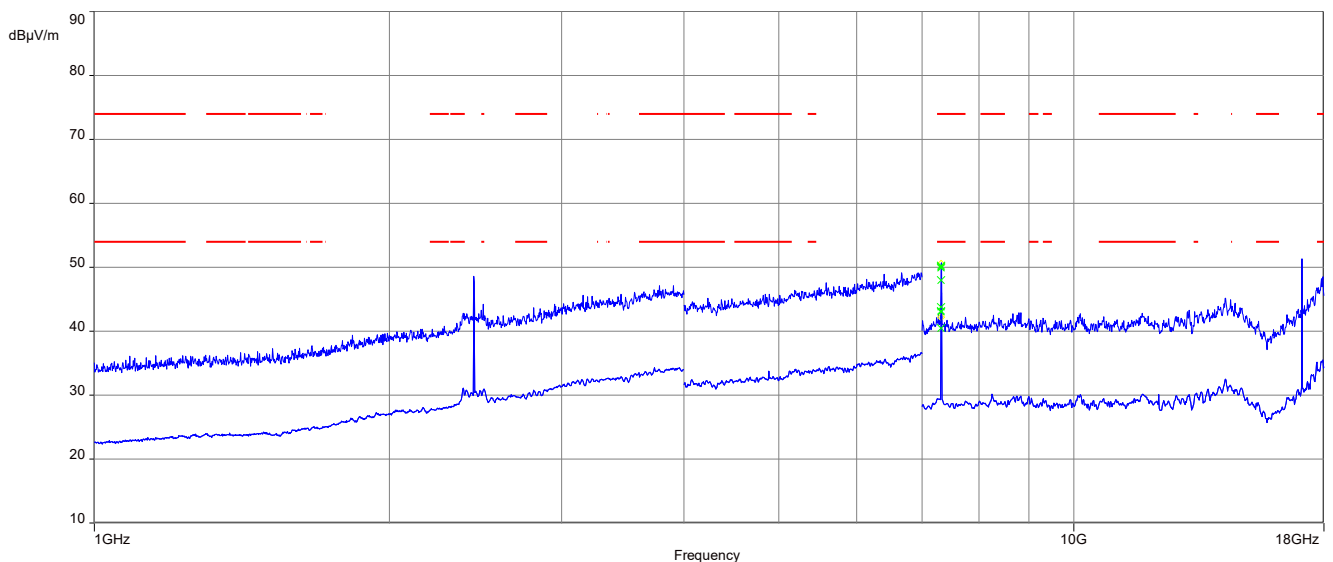**Plot 2:** 1 GHz to 18 GHz, TX mode, channel 39, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

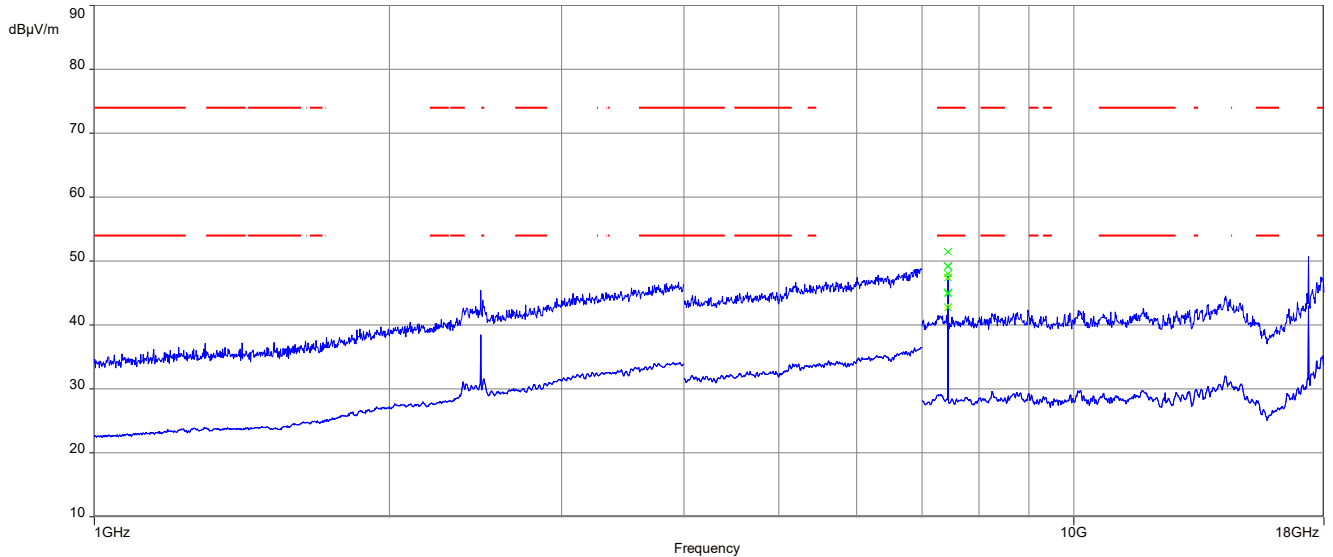**Plot 3:** 1 GHz to 18 GHz, TX mode, channel 78, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

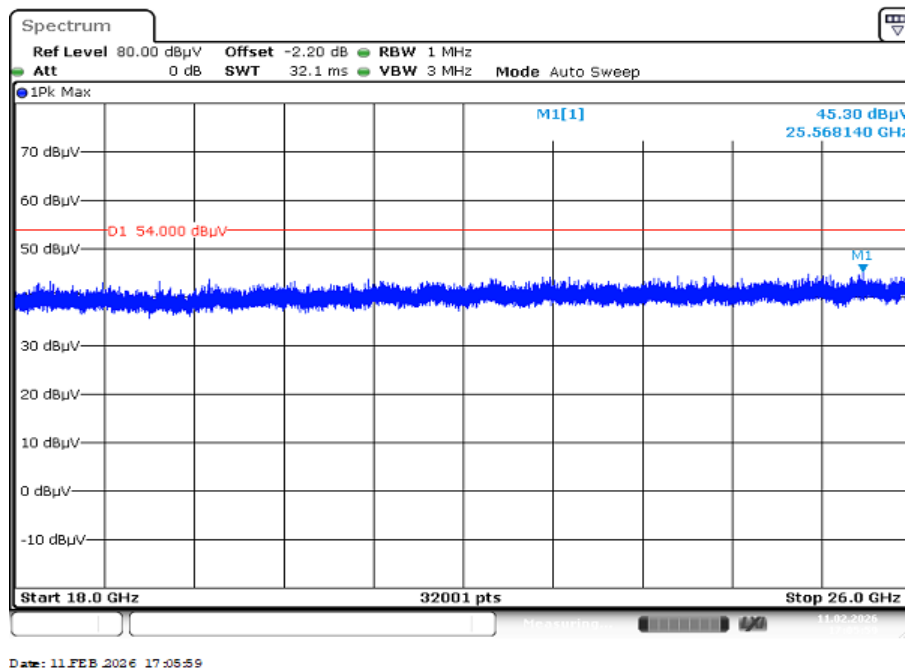**Plot 4:** 18 GHz to 26 GHz, TX mode, vertical & horizontal polarization, valid for all channels and modes

Date: 11.FEB.2026 17:05:59

## 12.12 Spurious emissions conducted below 30 MHz (AC conducted)

### Description:


Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit frequency is 2440 MHz. This measurement is representative for all channels and modes. If critical peaks are found frequency 2402 MHz and 2480 MHz will be measured too. The measurement is performed in the mode with the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

| Measurement parameters  |                                            |
|-------------------------|--------------------------------------------|
| Detector                | Peak - Quasi peak / average                |
| Sweep time              | Auto                                       |
| Resolution bandwidth    | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Video bandwidth         | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                   | 9 kHz to 30 MHz                            |
| Trace mode:             | Max hold                                   |
| Test setup              | See sub clause 8.5 setup A                 |
| Measurement uncertainty | See sub clause 9                           |


### Limits:

| FCC                                      |                           | ISED                   |
|------------------------------------------|---------------------------|------------------------|
| TX spurious emissions conducted < 30 MHz |                           |                        |
| Frequency (MHz)                          | Quasi-peak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) |
| 0.15 – 0.5                               | 66 to 56*                 | 56 to 46*              |
| 0.5 – 5                                  | 56                        | 46                     |
| 5 – 30.0                                 | 60                        | 50                     |

\*Decreases with the logarithm of the frequency

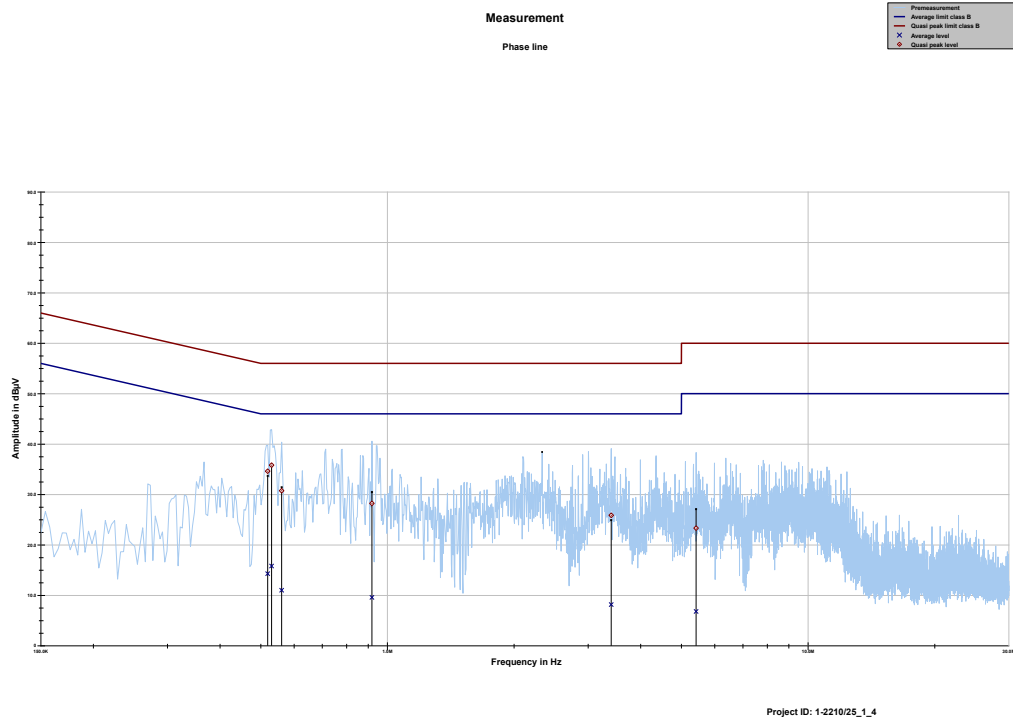**Plots: 120 V AC****Plot 1: 150 kHz to 30 MHz, phase line****Final results:**


| Frequency | Quasi peak level | Margin quasi peak | Limit QP | Average level | Margin average | Limit AV |
|-----------|------------------|-------------------|----------|---------------|----------------|----------|
| MHz       | dBµV             | dB                | dBµV     | dBµV          | dB             | dBµV     |
| 0.519394  | 34.63            | 21.37             | 56.000   | 14.30         | 31.70          | 46.000   |
| 0.530587  | 35.83            | 20.17             | 56.000   | 15.81         | 30.19          | 46.000   |
| 0.560438  | 30.74            | 25.26             | 56.000   | 11.01         | 34.99          | 46.000   |
| 0.918637  | 28.24            | 27.76             | 56.000   | 9.59          | 36.41          | 46.000   |
| 3.403650  | 25.87            | 30.13             | 56.000   | 8.17          | 37.83          | 46.000   |
| 5.418525  | 23.32            | 36.68             | 60.000   | 6.81          | 43.19          | 50.000   |

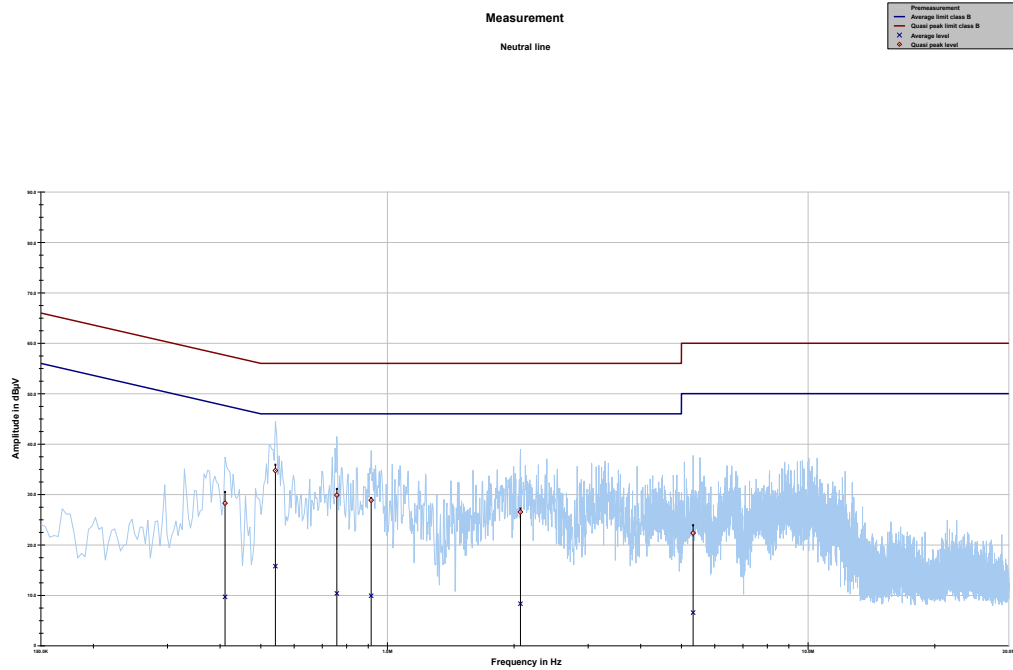**Plot 2:** 150 kHz to 30 MHz, neutral line


Project ID: 1-2210/25\_1\_4

**Final results:**

| Frequency | Quasi peak level | Margin quasi peak | Limit QP | Average level | Margin average | Limit AV |
|-----------|------------------|-------------------|----------|---------------|----------------|----------|
| MHz       | dBμV             | dB                | dBμV     | dBμV          | dB             | dBμV     |
| 0.411187  | 28.28            | 29.34             | 57.624   | 9.71          | 38.83          | 48.538   |
| 0.541781  | 34.75            | 21.25             | 56.000   | 15.80         | 30.20          | 46.000   |
| 0.758194  | 29.88            | 26.12             | 56.000   | 10.39         | 35.61          | 46.000   |
| 0.914906  | 28.86            | 27.14             | 56.000   | 9.91          | 36.09          | 46.000   |
| 2.071594  | 26.54            | 29.46             | 56.000   | 8.33          | 37.67          | 46.000   |
| 5.328975  | 22.35            | 37.65             | 60.000   | 6.58          | 43.42          | 50.000   |

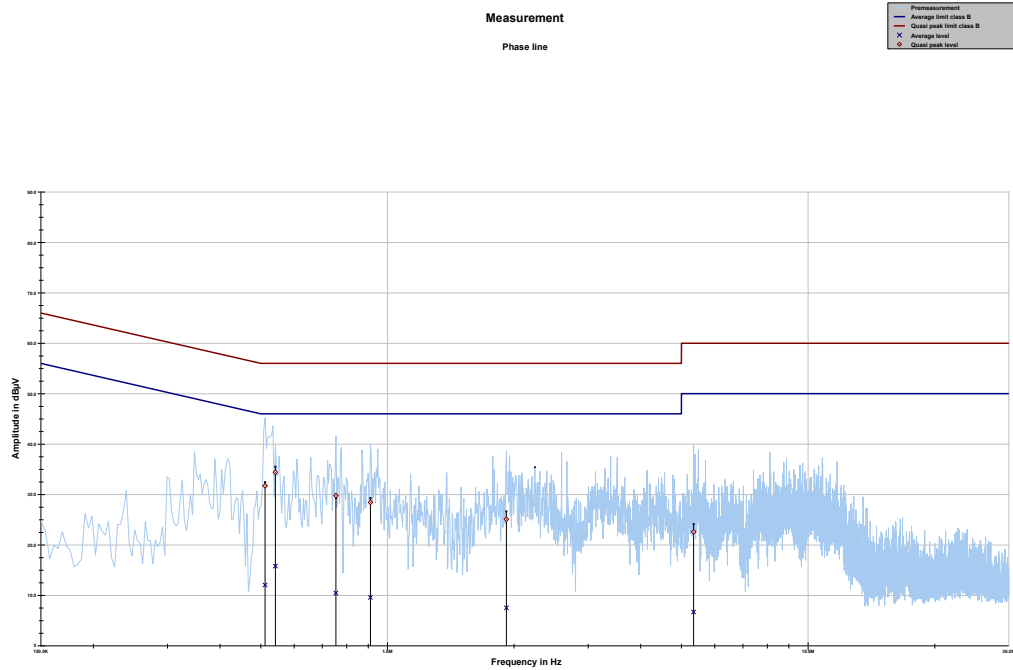**Plots: 240 V AC****Plot 1: 150 kHz to 30 MHz, phase line****Final results:**

| Frequency | Quasi peak level | Margin quasi peak | Limit QP | Average level | Margin average | Limit AV |
|-----------|------------------|-------------------|----------|---------------|----------------|----------|
| MHz       | dBµV             | dB                | dBµV     | dBµV          | dB             | dBµV     |
| 0.511931  | 31.73            | 24.27             | 56.000   | 12.04         | 33.96          | 46.000   |
| 0.541781  | 34.38            | 21.62             | 56.000   | 15.79         | 30.21          | 46.000   |
| 0.754463  | 29.79            | 26.21             | 56.000   | 10.46         | 35.54          | 46.000   |
| 0.911175  | 28.44            | 27.56             | 56.000   | 9.60          | 36.40          | 46.000   |
| 1.918613  | 25.09            | 30.91             | 56.000   | 7.52          | 38.48          | 46.000   |
| 5.343900  | 22.59            | 37.41             | 60.000   | 6.69          | 43.31          | 50.000   |

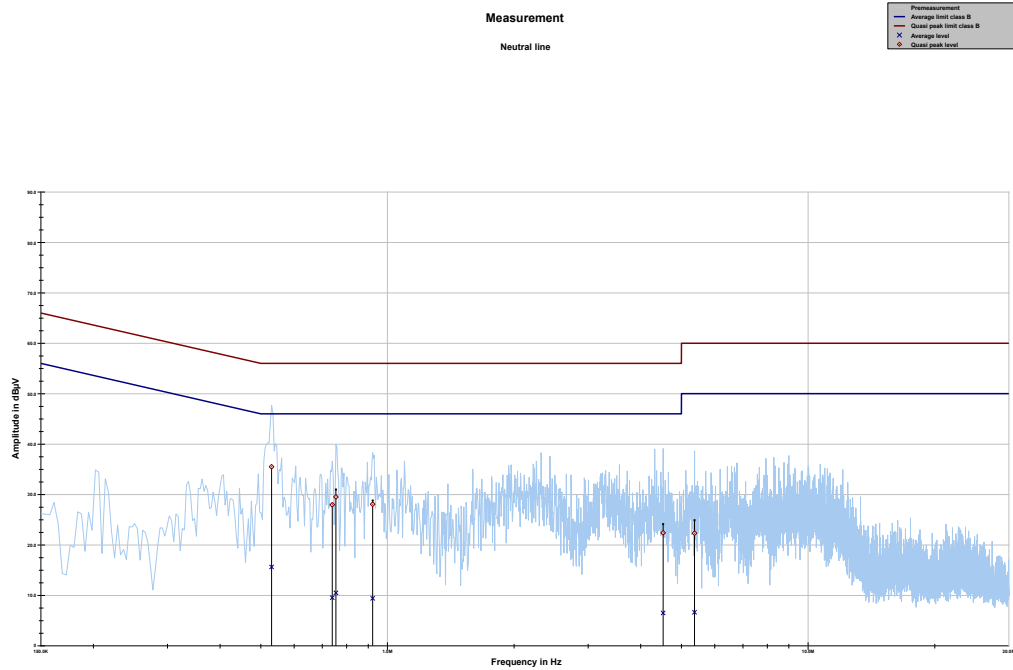**Plot 2:** 150 kHz to 30 MHz, neutral line**Final results:**

| Frequency | Quasi peak level | Margin quasi peak | Limit QP | Average level | Margin average | Limit AV |
|-----------|------------------|-------------------|----------|---------------|----------------|----------|
| MHz       | dBµV             | dB                | dBµV     | dBµV          | dB             | dBµV     |
| 0.530587  | 35.49            | 20.51             | 56.000   | 15.62         | 30.38          | 46.000   |
| 0.739537  | 27.95            | 28.05             | 56.000   | 9.54          | 36.46          | 46.000   |
| 0.754463  | 29.52            | 26.48             | 56.000   | 10.50         | 35.50          | 46.000   |
| 0.922369  | 28.07            | 27.93             | 56.000   | 9.40          | 36.60          | 46.000   |
| 4.523025  | 22.40            | 33.60             | 56.000   | 6.51          | 39.49          | 46.000   |
| 5.370019  | 22.32            | 37.68             | 60.000   | 6.65          | 43.35          | 50.000   |

### 13 Glossary

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| <b>AVG</b>             | Average                                                |
| <b>C</b>               | Compliant                                              |
| <b>C/N<sub>0</sub></b> | Carrier to noise-density ratio, expressed in dB-Hz     |
| <b>CAC</b>             | Channel availability check                             |
| <b>CW</b>              | Clean wave                                             |
| <b>DC</b>              | Duty cycle                                             |
| <b>DFS</b>             | Dynamic frequency selection                            |
| <b>DSSS</b>            | Dynamic sequence spread spectrum                       |
| <b>DUT</b>             | Device under test                                      |
| <b>EN</b>              | European Standard                                      |
| <b>ETSI</b>            | European Telecommunications Standards Institute        |
| <b>EMC</b>             | Electromagnetic Compatibility                          |
| <b>EUT</b>             | Equipment under test                                   |
| <b>FCC</b>             | Federal Communications Commission                      |
| <b>FCC ID</b>          | Combination of Grantee Code and Equipment Product Code |
| <b>FHSS</b>            | Frequency hopping spread spectrum                      |
| <b>FVIN</b>            | Firmware version identification number                 |
| <b>GNSS</b>            | Global Navigation Satellite System                     |
| <b>GUE</b>             | GNSS User Equipment                                    |
| <b>HMN</b>             | Host marketing name                                    |
| <b>HVIN</b>            | Hardware version identification number                 |
| <b>HW</b>              | Hardware                                               |
| <b>ISED</b>            | Innovation, Science and Economic Development Canada    |
| <b>Inv. No.</b>        | Inventory number                                       |
| <b>MC</b>              | Modulated carrier                                      |
| <b>NA</b>              | Not applicable                                         |
| <b>NC</b>              | Not compliant                                          |
| <b>NOP</b>             | Non occupancy period                                   |
| <b>NP</b>              | Not performed                                          |
| <b>OBW</b>             | Occupied bandwidth                                     |
| <b>OC</b>              | Operating channel                                      |
| <b>OCW</b>             | Operating channel bandwidth                            |
| <b>OFDM</b>            | Orthogonal frequency division multiplexing             |
| <b>OOB</b>             | Out of band                                            |
| <b>OP</b>              | Occupancy period                                       |
| <b>PER</b>             | Packet error rate                                      |
| <b>PMN</b>             | Product marketing name                                 |
| <b>PP</b>              | Positive peak                                          |
| <b>QP</b>              | Quasi peak                                             |
| <b>RLAN</b>            | Radio local area network                               |
| <b>S/N or SN</b>       | Serial number                                          |
| <b>SW</b>              | Software                                               |
| <b>UUT</b>             | Unit under test                                        |
| <b>WLAN</b>            | Wireless local area network                            |

14 Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| R01     | Initial release | 2026-03-09      |

##### END OF TEST REPORT #####