

Test report for

47 CFR Part 15 Subpart C

RSS-247, RSS-Gen



The RvA is signatory to ILAC - MRA

Product name : Cow Wellness Sensor
Applicant : Cowmanager B.V.
FCC ID : Y8K-CWS4
IC ID : 22382-CWS4

Test report No. : P000484739 001 Ver 2.0

Laboratory information

Accreditation

Kiwa Nederland B.V. complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2017. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L248 and is granted by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Kiwa Nederland B.V. is designated by the FCC as an Accredited Test Firm for compliance testing of equipment subject to Certification under Parts 15 & 18. The Designation number is: NL0001.

Kiwa Nederland B.V. is a Wireless Device Testing laboratory recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.
The Industry Canada company number for Kiwa Nederland B.V. is: 4173A. The CABID is NL0001.

Kiwa Nederland B.V. is a registered Conformity Assessment body (CAB) under the Japan-EC MRA (Agreement on Mutual Recognition between Japan and the European Community). The registration number is: 201.

Documentation

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at Kiwa Nederland B.V.

Testing Location

Test Site	Kiwa Nederland B.V.
Test Site location	Wilmersdorf 50 7327 AC Apeldoorn The Netherlands Tel. +31 88998 3393
Test Site FCC	NL0001
CABID	NL0001

Revision History

Version	Date	Remarks	By
v0.50	30-07-2025	First draft	TK
v1.00	04-08-2025	Initial release	TK
v2.00	25-08-2025	Adjusted final measurements 250-1000MHz	TK

Table of Contents

Revision History	2
Summary of Test results	5
1 General Description	6
1.1 Applicant	6
1.2 Manufacturer	6
1.3 Tested Equipment Under Test (EUT)	6
1.4 Product specifications of Equipment under test	7
1.5 Environmental conditions	7
1.6 Measurement standards	7
1.7 Applicable standards	7
1.8 Observation and remarks	7
1.9 Modifications to the EUT (Equipment Under Test)	7
1.10 Conclusions	8
2 Test configuration of the Equipment Under Test	9
2.1 Test mode	9
2.2 Test setups	9
2.3 Equipment used in the test configuration	12
2.4 Sample calculations	12
3 Test results	13
3.1 Radiated spurious emissions	13
3.1.1 Limit	13
3.1.2 Measurement instruments	13
3.1.3 Test setup	13
3.1.4 Test procedure	14
3.1.5 Measurement Uncertainty	14
3.1.6 Test results	15
3.1.7 Plots of the Radiated Spurious Emissions Measurement	16
3.2 6dB bandwidth Measurement	26
3.2.1 Limit	26
3.2.2 Measurement instruments	26
3.2.3 Test setup	26
3.2.4 Test procedure	26
3.2.5 Test Results of the 6 dB bandwidth Measurement	26
3.2.6 Plots of the 6 dB bandwidth	26
3.3 99% Occupied Bandwidth	28
3.3.1 Limit	28
3.3.2 Measurement instruments	28
3.3.3 Test setup	28

3.3.4	Test procedure.....	28
3.3.5	Test results of the 99% occupied bandwidth measurement	28
3.3.6	Plots of the 99% occupied bandwidth measurement.....	28
3.4	Output Power Measurement	30
3.4.1	Limit	30
3.4.2	Measurement instruments	30
3.4.3	Test setup	30
3.4.4	Test procedure.....	30
3.4.5	Test results of Output Power Measurement	30
3.4.6	Plots of the Output power	31
3.5	Power Spectral Density	33
3.5.1	Limit	33
3.5.2	Measurement instruments	33
3.5.3	Test setup	33
3.5.4	Test procedure.....	33
3.5.5	Test results of Power Spectral Density Measurement.....	33
3.5.6	Plots of the Power Spectral Density	33
3.6	Band edge Measurement.....	35
3.6.1	Limit	35
3.6.2	Measurement instruments	35
3.6.3	Test setup	35
3.6.4	Test procedure.....	35
3.6.5	Measurement Uncertainty	35
3.6.6	Plots of the Band edge Measurements.....	36
4	Sample calculations.....	38

Summary of Test results

FCC	ISED	Description	Section in report	Verdict
15.247(d) 15.209 (a)	RSS-Gen 8.9	Radiated spurious emissions	3.1	Pass
15.205 (a)	RSS Gen 8.10	Spurious emissions in the restricted bands	3.1	Pass
15.247 (a)	RSS-247 5.2(a)	6 dB bandwidth	3.2	Pass
--	RSS-Gen 6.7	99% bandwidth	3.3	Pass
15.247 (b)	RSS-247 5.4 (d)	RF output power	3.4	Pass
15.247 (e)	RSS-247 5.2 (b)	Power spectral density	3.5	Pass
15.247 (d)	RSS-247 5.5	Band edge	3.6	Pass

Decision rule: Pass/Fail decisions are based on measurement results without taking into account measurement uncertainty.

1 General Description

1.1 Applicant

Client name:	Cowmanger B.V.
Address:	Gerverscop 9
Zip code:	3481LT, Harmelen
Country:	The Netherlands
Telephone:	31348443840
E-mail:	certification@cowmanager.com
Contact name:	Natasha Parisha

1.2 Manufacturer

Client name:	Cowmanger B.V.
Address:	Gerverscop 9
Zip code:	3481LT, Harmelen
Country:	The Netherlands
Telephone:	31348443840
E-mail:	certification@cowmanager.com
Contact name:	Natasha Parisha

1.3 Tested Equipment Under Test (EUT)

Product name:	CSW4
Brand name:	Cowmanager BV
Product description:	Earsensor
Variant model(s):	CWS4
Batch and/or serial No.:	723-xxx
Software version:	4.24
Hardware version:	4.6
Date of receipt:	02-07-2025
Tests started:	11-07-2025
Testing ended:	22-07-2025

1.4 Product specifications of Equipment under test

Tx Frequency:	Proprietary: 2405 - 2480MHz
Rx frequency:	Proprietary: 2405 - 2480MHz
Occupied channel width:	Proprietary: 2250 KHz
Antenna type:	Proprietary: PCB antenna
Antenna gain:	Proprietary: 2.08dBi
Type of modulation:	Proprietary: DSSS
Emission designator	Proprietary: 2M25F1D

Disclaimer: The operating frequency bands are declared by the applicant

1.5 Environmental conditions

Normal test conditions:

Temperature (*) : +15°C to +30°C
Relative humidity(*) : 20 % to 75 %

1.6 Measurement standards

- ANSI C63.10:2013
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02

1.7 Applicable standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.207
- FCC Part 15 Subpart C §15.209
- FCC Part 15 Subpart C §15.247
- RSS-Gen Issue 5
- RSS-210 Issue 9
- RSS-247 Issue 3

1.8 Observation and remarks

EUT is set in an upright position as this is worst case for radiated emissions. The EUT is body worn and tested table top.

1.9 Modifications to the EUT (Equipment Under Test)

None

1.10 Conclusions

The sample of the product showed **NO NON-COMPLIANCES** to the specifications stated in paragraph 1.7 of this report.

The results of the test as stated in this report, are exclusively applicable to the product items as identified in this report. Kiwa Nederland B.V. accepts no responsibility for any properties of product items in this test report, which are not supported by the tests as specified in paragraph 1.7 *"Applicable standards"*.

All tests are performed by:

Name : Ing. T. Keltjens

Review of test methods and report by:

Name : Ing. Roy van Barneveld

The above conclusions have been verified by the following signatory:

Date : 29-08-2025

Name : ing. M.H. Khan

Function : Test Engineer


Signature : 

2 Test configuration of the Equipment Under Test


2.1 Test mode

The manufacturer provided conducted and radiated samples that are in a constant transmit mode on a specific channel.


2.2 Test setups

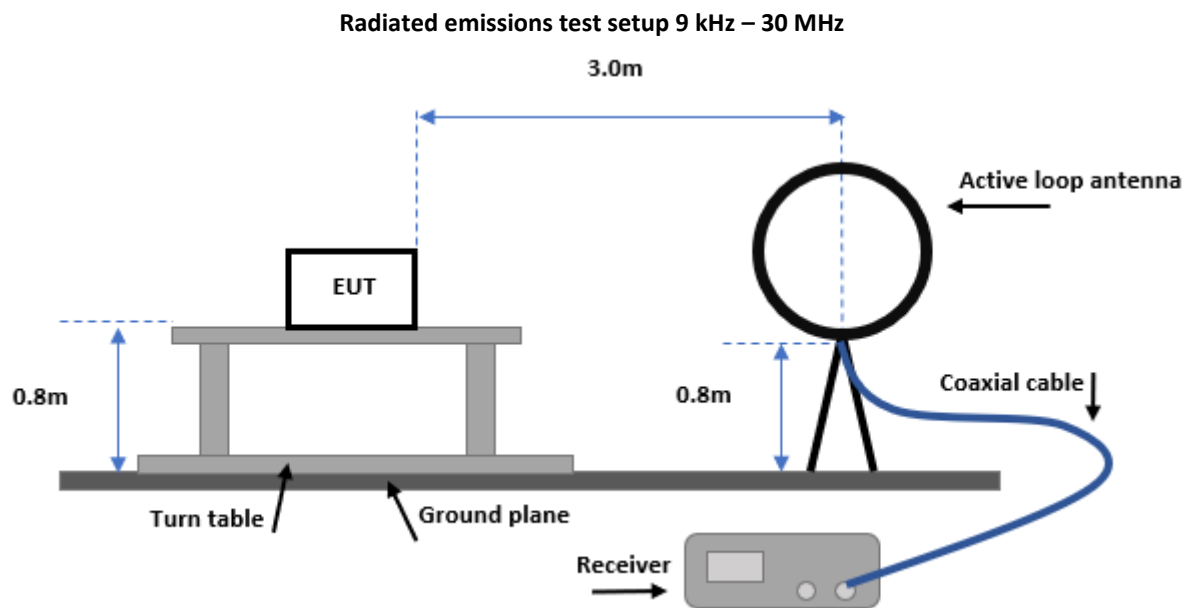


Radiated emissions test setup 30 MHz - 1 GHz

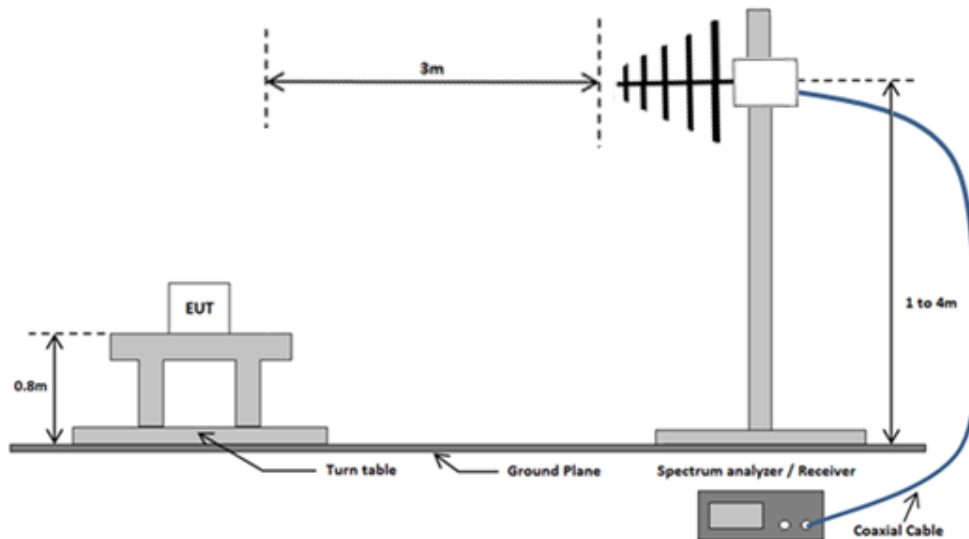

Radiated emissions test setup above 1 GHz

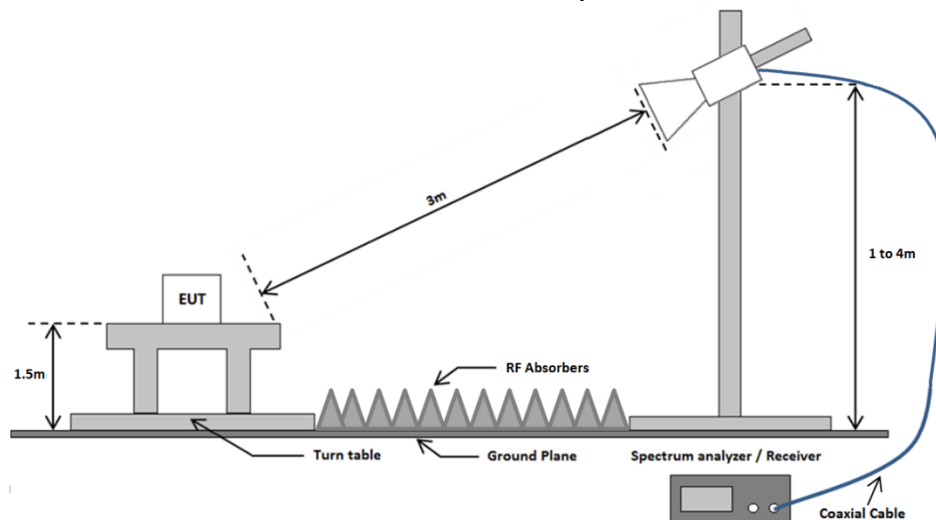

Antenna port conducted tests

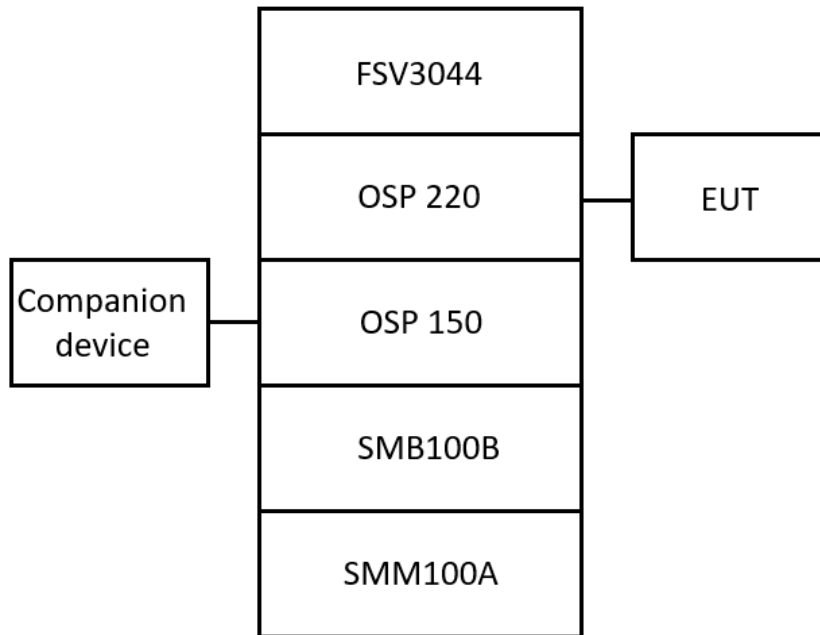

2.3 Equipment used in the test configuration

Description	Manufacturer	Model	ID	Cal. Done date	Cal. due date	Used at Par.
EMI Receiver	Rohde & Schwarz	ESR7	114605	11-2024	11-2025	3.1
Spectrum Analyzer	Rohde & Schwarz	FSV3044	114923	10-2023	10-2025	3.1
2.5 GHz HPF	Wainwright	WHKX12-2477.75-2650-18000-40SS	115031	09-2024	09-2025	3.1
Active loop antenna	EMCO	6502	114515	02-2025	02-2028	3.1
Biconical antenna + 6dB attenuator	EMCO	3109	107818	06-2022	06-2025	3.1
Biconical antenna + 6dB attenuator	Schwarzbeck + HP	VHA9103 + 8491A	114436	07-2024	07-2027	3.1
Logperiodic antenna	Schwarzbeck	VULP 9118B	115028	11-2024	11-2027	3.1
Horn antenna	EMCO	3115	114607	01-2025	01-2028	3.1
Horn antenna	FLANN-MICROWAVE	20240-25	114518	NA*	NA*	3.1
Preamplifier 1-18 GHz	µComp Nordic	MCNA-40-0010800-25-10P	114771	08-2024	08-2025	3.1
Preamplifier 18-40 GHz	Schwarzbeck	BBV-9721	115026	06-2024	06-2025	3.1
Semi-Anechoic Chamber	ETS Lindgren	SAR	114624	03-2023	03-2026	3.1
Test software	Raditeq	Radimation Version 2023.2.3	--	--	--	3.1

*Note: Standard gain horn antennas do not need calibration

Description	Manufacturer	Model	ID	Cal. Done date	Cal. due date	Used at Par.
Spectrum analyzer	Rohde & Schwarz	FSV3044	115043	11-2023	11-2025	3.2 – 3.6
Power meter and switch unit	Rohde & Schwarz	OSP220	115042	01-2024	01-2027	3.2 – 3.6
Switch unit	Rohde & Schwarz	OSP150	115041	11-2023	11-2026	3.2 – 3.6
Signal generator	Rohde & Schwarz	SMB100A	115040	11-2023	11-2025	3.2 – 3.6
Vector Signal Generator	Rohde & Schwarz	SMM100A	115039	11-2023	11-2025	3.2 – 3.6

2.4 Sample calculations

All formulas for data conversions and conversion factors are reported in chapter 4 of this test report.

3 Test results

3.1 Radiated spurious emissions

3.1.1 Limit

FCC 15.209(a)

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance(m)
0.009 – 0.490	2400/F(kHz)	$20 \cdot \{\log[2400] - \log[F(\text{kHz})]\}$	300*
0.490 – 1.705	24000/F(kHz)	$20 \cdot \{\log[24000] - \log[F(\text{kHz})]\}$	30*
1.705 – 30.0	30	29.5	30*
30 -88	100	40	3
88 - 216	150	43,5	3
216-960	200	46	3
Above 960	500	54	3

*Note: Measured values in the plots 9 kHz to 30 MHz corrected to 30m or 300m limit distance according to the method described in ANSI C63.10-2013, clause 6.4

RSS-GEN

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Magnetic field strength (H-Field) (μA/m)	Magnetic field strength (H-Field) (dBμA/m)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance(m)
0.009 – 0.490	6.37/F (kHz)	$20 \cdot \{\log[6.37] - \log[F(\text{kHz})]\}$	N.A.	$20 \cdot \{\log[6.37] - \log[F(\text{kHz})]\} + 51.5$	300*
0.490 – 1.705	63.7/F (kHz)	$20 \cdot \{\log[63.7] - \log[F(\text{kHz})]\}$	N.A.	$20 \cdot \{\log[63.7] - \log[F(\text{kHz})]\} + 51.5$	30*
1.705 - 30	0.08	-21.9	N.A.	29.6	30*
30 -88	N.A.	N.A.	100	40	3
88 - 216	N.A.	N.A.	150	43,5	3
216-960	N.A.	N.A.	200	46	3
Above 960	N.A.	N.A.	500	54	3

*Note: Measured values in the plots 9 kHz to 30 MHz corrected to 30m or 300m limit distance according to the method described in ANSI C63.10-2013, clause 6.4.

3.1.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.1.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.1.4 Test procedure

9 kHz – 30 MHz: According to ANSI C63.10-2013, section 6.4

30 MHz to 26.5 GHz: According to ANSI C63.10-2013, section 6.5 and 6.6

9 kHz to 30 MHz: IRN 441 – Method 10

30 MHz to 1 GHz: IRN 441 – Method 1

1 GHz to 18 GHz: IRN 441– Method 2

18 to 26 GHz: IRN 441– Method 3

In case of handheld and/or body-worn equipment, the EUT's orientation (X, Y, Z) was varied in order to ensure that maximum emission amplitudes were attained. In all other cases the associated cabling and the EUT orientation was varied for maximum emissions.

The spectrum was examined from 0.009 MHz to 10 times X GHz, not more than the 10th harmonic of the highest intentional generated frequency (X GHz). Final radiated emission measurements were made at 3m distance.

The 6 highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

3.1.5 Measurement Uncertainty

Frequency range	Polarization	Uncertainty
9 kHz – 30 MHz	--	±1.6 dB
30 – 200 MHz	Horizontal	±4.5 dB
	Vertical	±5.4 dB
200 -1000 MHz	Horizontal	±3.6 dB
	Vertical	±4.6 dB
1 – 18 GHz	Horizontal	±5.7 dB
	Vertical	±5.7 dB
18 – 26.5 GHz	Horizontal	±4.9 dB
	Vertical	±4.9 dB

3.1.6 Test results

Low channel

<1GHz

Frequency	Peak	Quasi-Peak	Quasi-Peak Limit	Status	Angle	Height	Polarization
68,297 MHz	15 dB μ V/m	3,5 dB μ V/m	40 dB μ V/m	Pass	126 degrees	1,2 m	Vertical
73,648 MHz	14,4 dB μ V/m	3,2 dB μ V/m	40 dB μ V/m	Pass	170 degrees	2,5 m	Vertical
131,231 MHz	23,4 dB μ V/m	12,1 dB μ V/m	43,5 dB μ V/m	Pass	220 degrees	2,2 m	Vertical
265,09 MHz	17,76 dB μ V/m*	6.16 dB μ V/m*	46 dB μ V/m	Pass	158 degrees	1 m	Vertical
319,763 MHz	23,56 dB μ V/m*	14.86 dB μ V/m*	46 dB μ V/m	Pass	157 degrees	2 m	Vertical

Mid channel

Frequency	Peak	Quasi-Peak	Quasi-Peak Limit	Status	Angle	Height	Polarization
78,448 MHz	15,7 dB μ V/m	3,9 dB μ V/m	40 dB μ V/m	Pass	161 degrees	2,2 m	Vertical
73,227 MHz	14,6 dB μ V/m	2,9 dB μ V/m	40 dB μ V/m	Pass	32 degrees	3,3 m	Horizontal
319,687 MHz	22,26 dB μ V/m*	11,56 dB μ V/m*	46 dB μ V/m	Pass	15 degrees	3,5 m	Vertical
518,139 MHz	26,66 dB μ V/m*	15,06 dB μ V/m*	46 dB μ V/m	Pass	106 degrees	3,5 m	Vertical
302,589 MHz	20,26 dB μ V/m*	11,16 dB μ V/m*	46 dB μ V/m	Pass	192 degrees	3,5 m	Horizontal

High channel

<1GHz

Frequency	Peak	Quasi-Peak	Quasi-Peak Limit	Status	Angle	Height	Polarization
255,951 MHz	16,66 dB μ V/m*	5,36 dB μ V/m*	46 dB μ V/m	Pass	249 degrees	3,5 m	Horizontal
273,955 MHz	18,36 dB μ V/m*	7,46 dB μ V/m*	46 dB μ V/m	Pass	136 degrees	1,5 m	Vertical
318,251 MHz	24,46 dB μ V/m*	15,76 dB μ V/m*	46 dB μ V/m	Pass	75 degrees	2,5 m	Vertical
411,728 MHz	24,36 dB μ V/m*	11,66 dB μ V/m*	46 dB μ V/m	Pass	61 degrees	3,5 m	Horizontal
574,411 MHz	28,56 dB μ V/m*	17,16 dB μ V/m*	46 dB μ V/m	Pass	326 degrees	2,5 m	Vertical

*due to an error in the correction factor of the measurement setup, the peaks between 250-1000MHz are measured 10.46dB lower than they actually are. In the tables above the peaks have been corrected to show the actual value.


>1GHz

Frequency	Peak	Peak Limit	Average	Average Limit	Status	Angle	Height	Polarization
12,403 GHz	60,2 dB μ V/m	74 dB μ V/m	49,7 dB μ V/m	54 dB μ V/m	Pass	313 degrees	2,5 m	Horizontal
7,442 GHz	56,9 dB μ V/m	74 dB μ V/m	46,8 dB μ V/m	54 dB μ V/m	Pass	124 degrees	1 m	Vertical
20,351 GHz	53,1 dB μ V/m	74 dB μ V/m	40,9 dB μ V/m	54 dB μ V/m	Pass	142 degrees	2,7 m	Vertical


The results of the radiated emission tests are depicted in the table above. A selection of plots is provided on the next pages.

3.1.7 Plots of the Radiated Spurious Emissions Measurement


Plot 1a: radiated emissions of the EUT, Antenna perpendicular, in the range 9 – 150KHz
(pre-scan peak values shown)

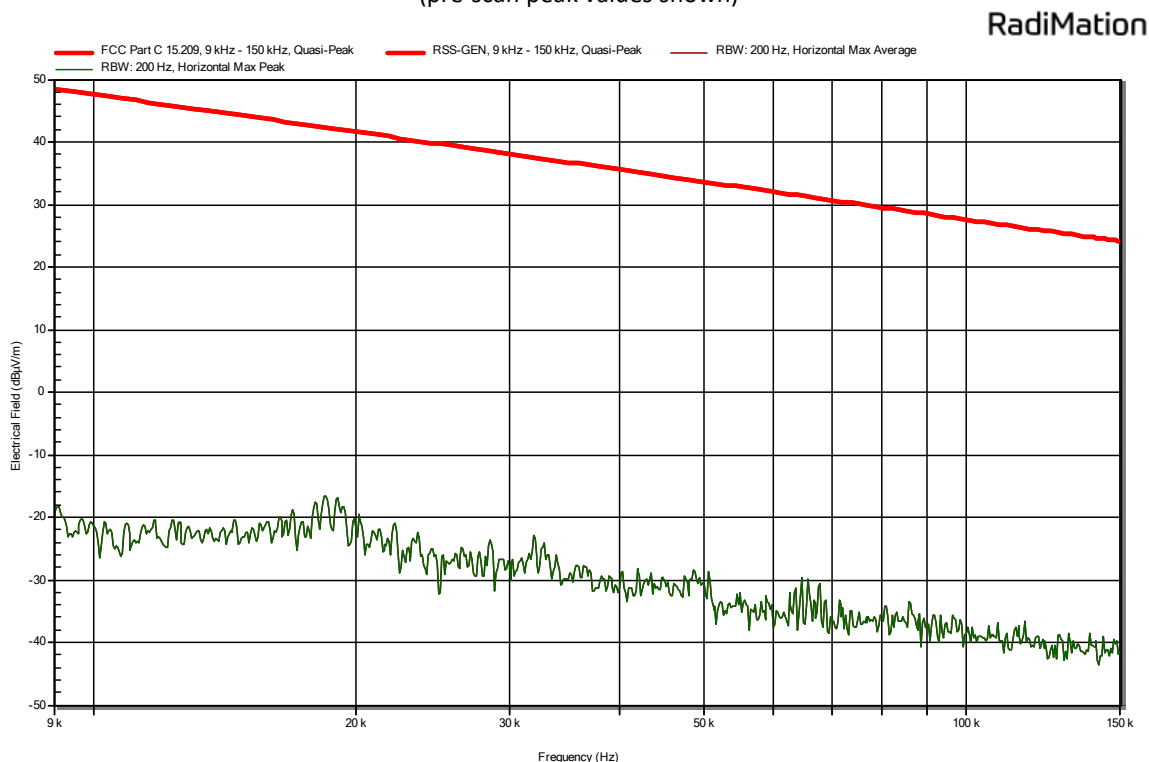


Plot 1b: radiated emissions of the EUT, Antenna parallel, in the range 9 – 150KHz
(pre-scan peak values shown)

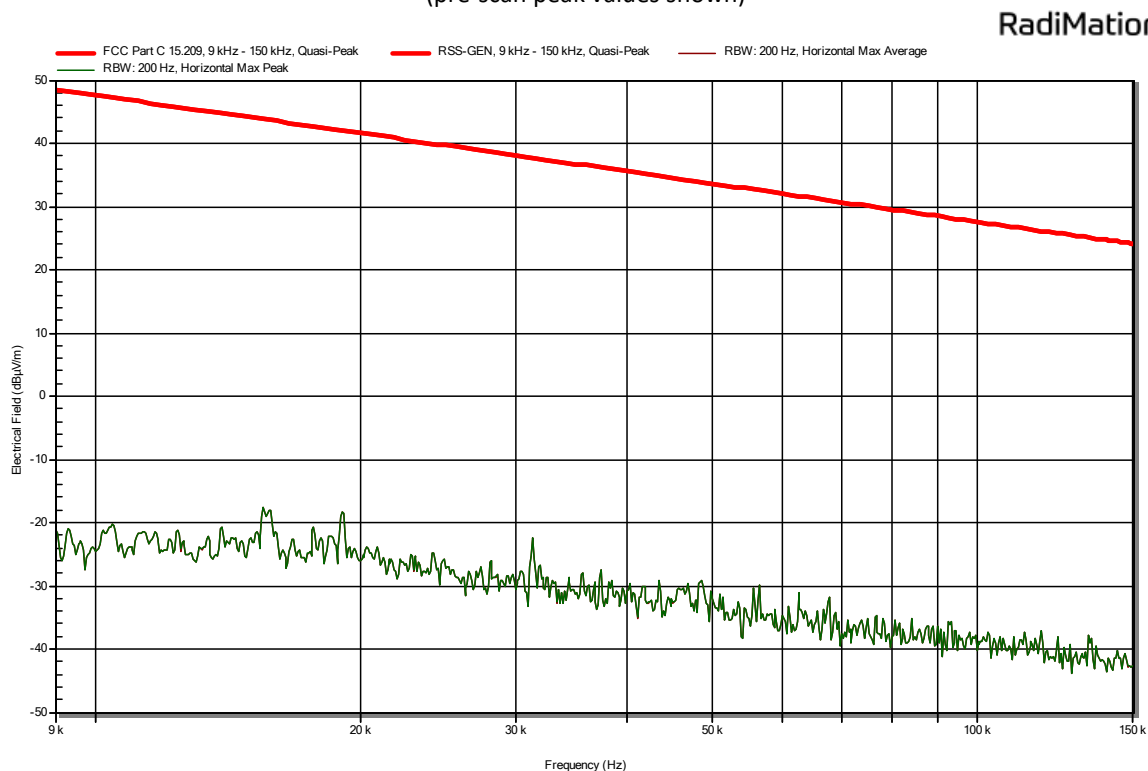


Plot 2a: radiated emissions of the EUT, Antenna perpendicular, in the range 150KHz-30 MHz
(pre-scan peak values shown)

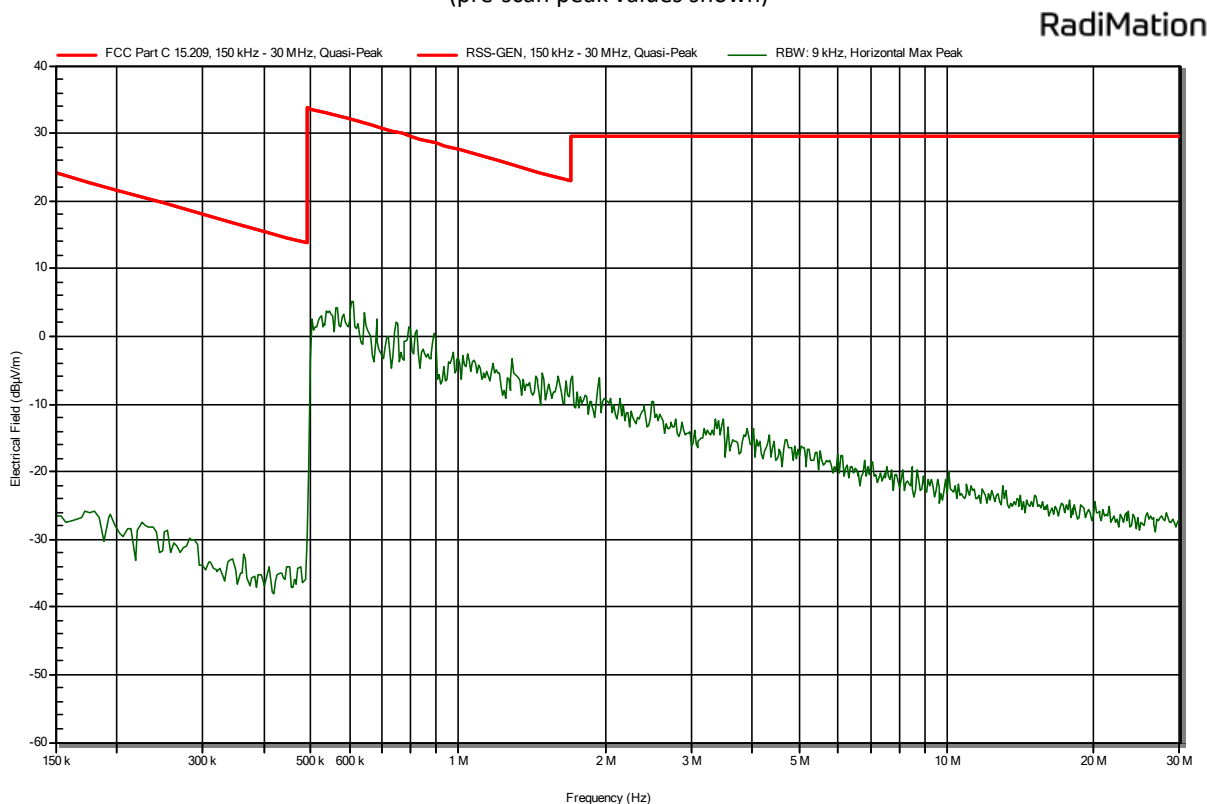


Plot 2b: radiated emissions of the EUT, Antenna parallel, in the range 150KHz-30 MHz
(pre-scan peak values shown)

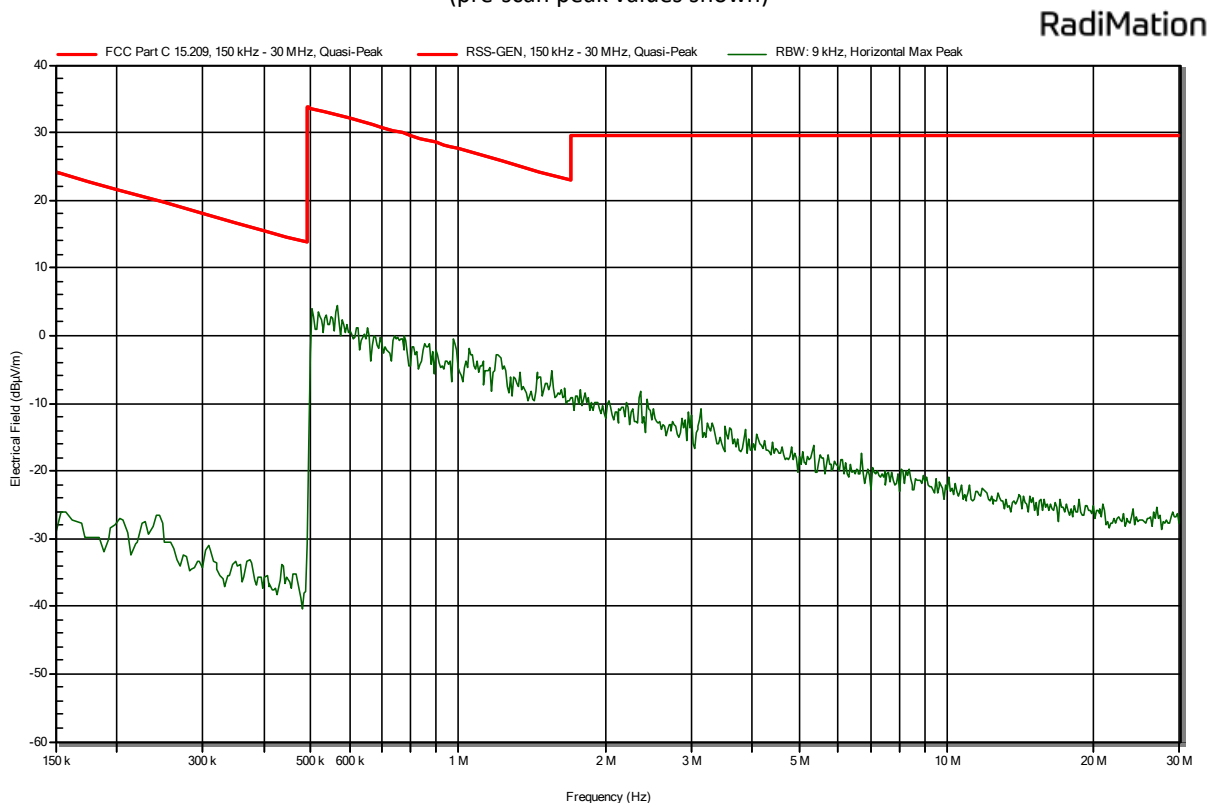


Plot 3a: radiated emissions of the EUT in the range 30 – 250 MHz (pre-scan peak values shown) Low channel
RadiMation

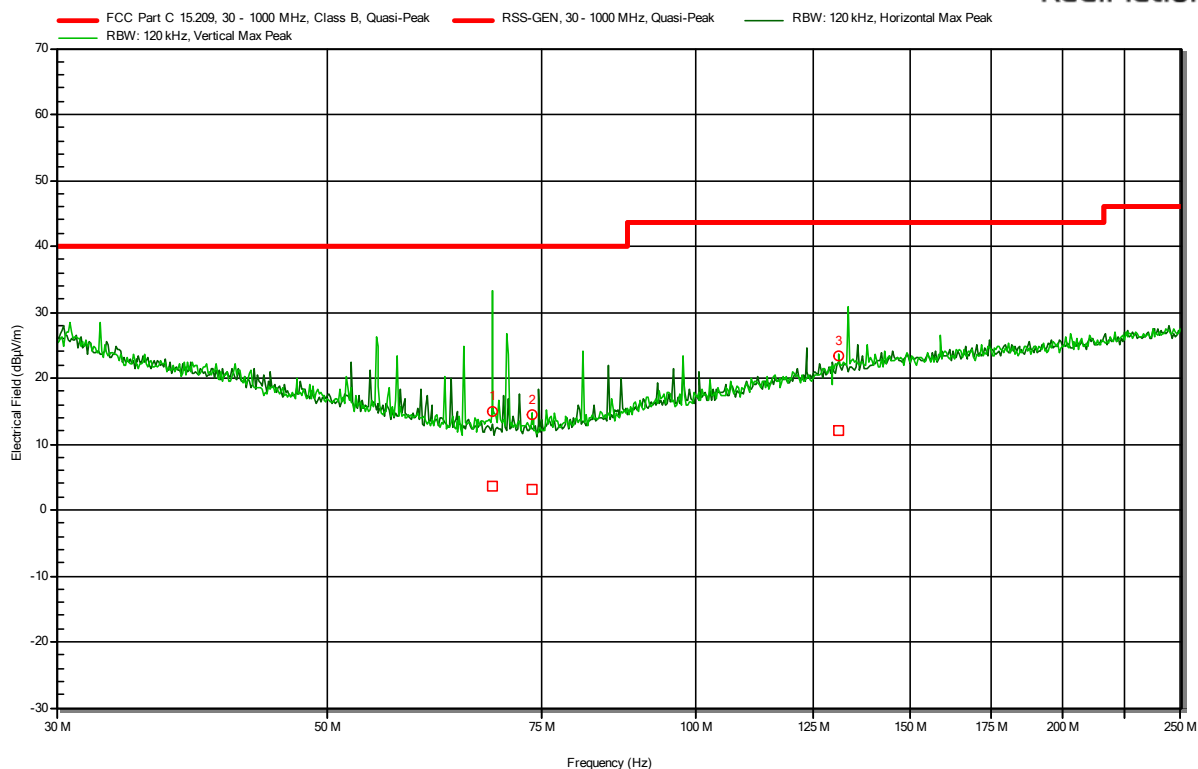


Plot 3b: radiated emissions of the EUT in the range 30 – 250 MHz (pre-scan peak values shown) Middle channel
RadiMation

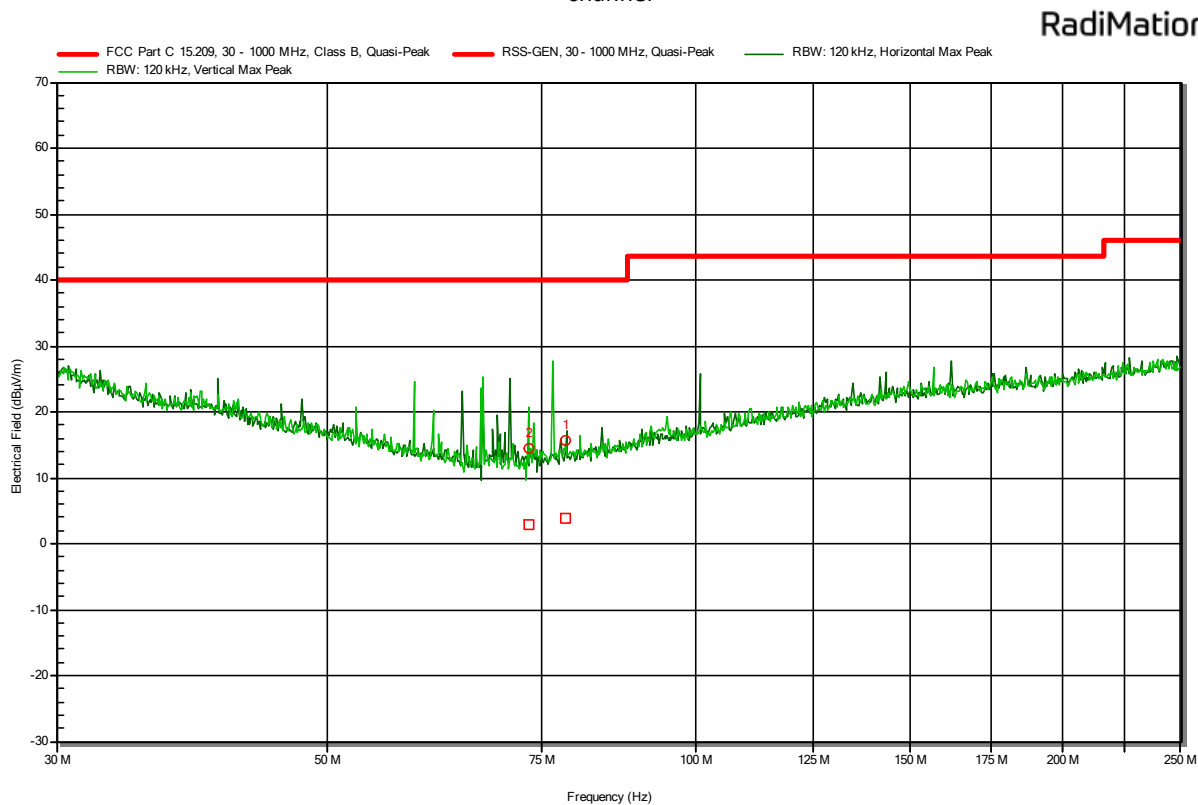


Plot 3c: radiated emissions of the EUT in the range 30 – 250 MHz (pre-scan peak values shown) High channel
RadiMation

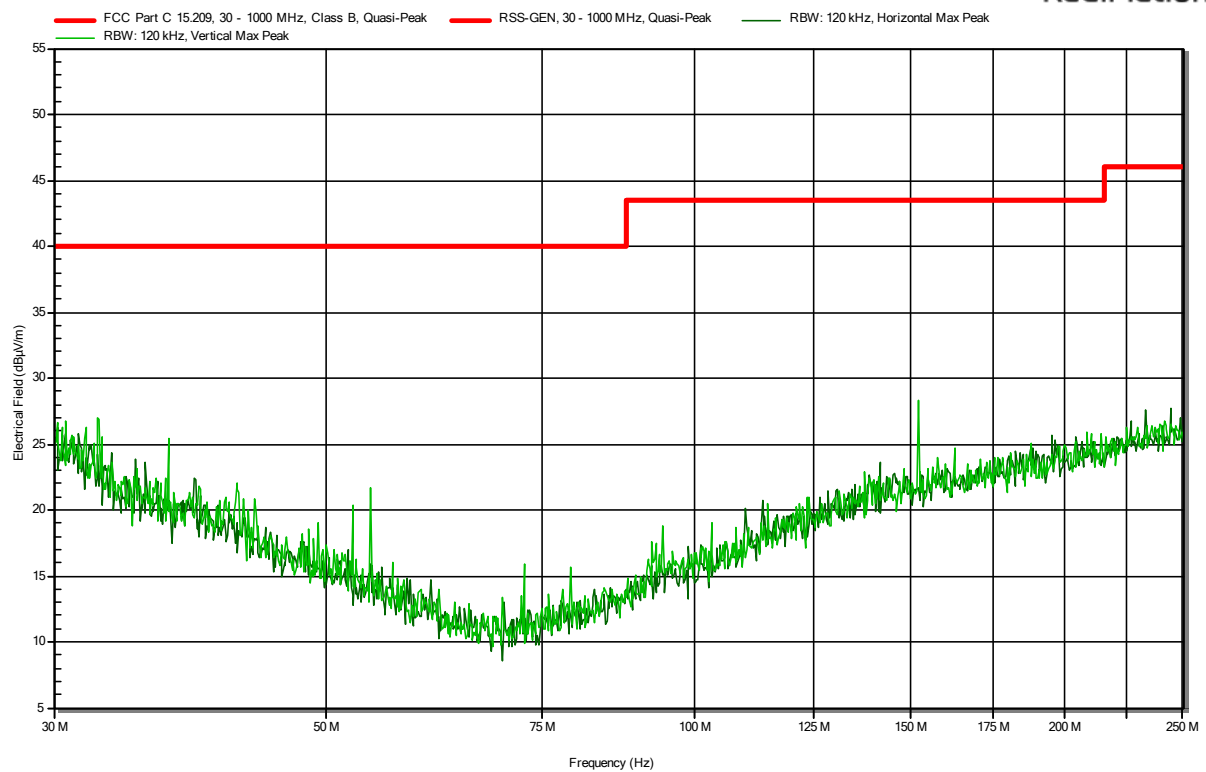


Plot 4a: radiated emissions of the EUT in the range 250-1000 MHz (pre-scan peak values shown) Low channel
RadiMation

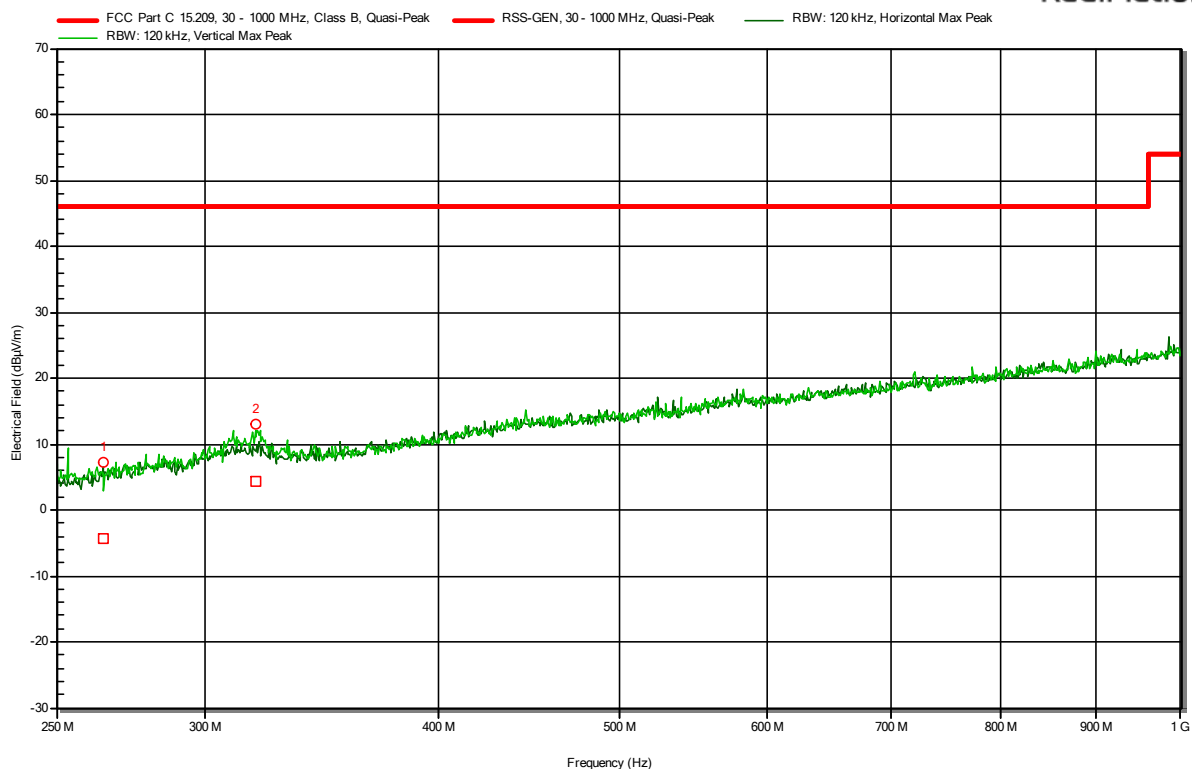


Plot 4b: radiated emissions of the EUT in the range 250-1000 MHz (pre-scan peak values shown) Middle channel
RadiMation

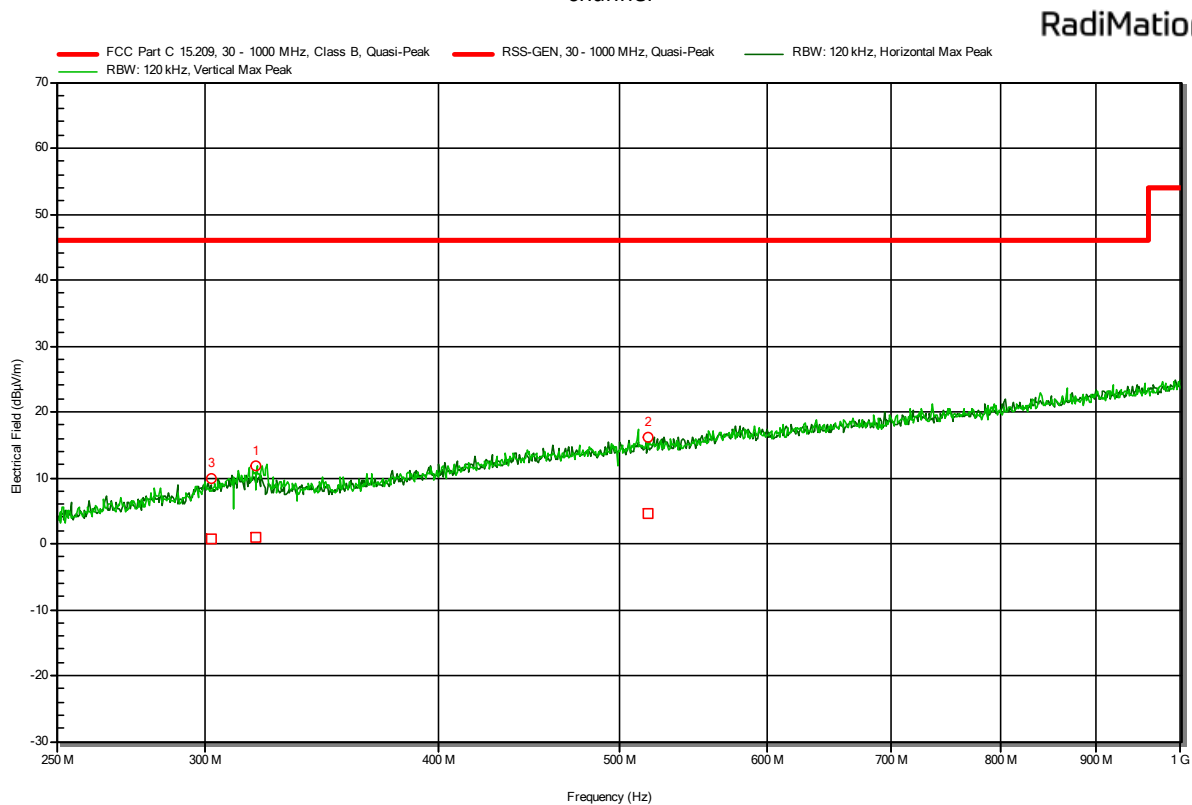


Plot 4c: radiated emissions of the EUT in the range 250-1000 MHz (pre-scan peak values shown) High channel
RadiMation

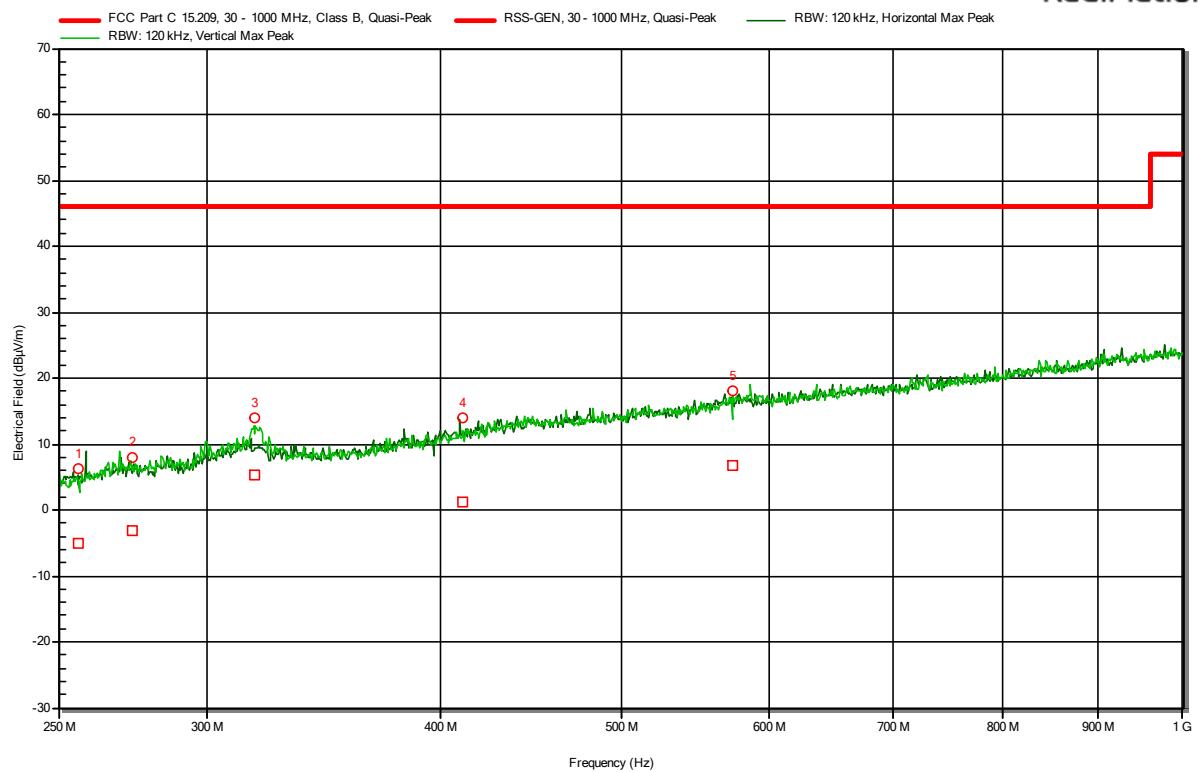


Plot 5a: radiated emissions of the EUT in the range 1-18GHz (pre-scan peak values shown) Low channel
RadiMatation

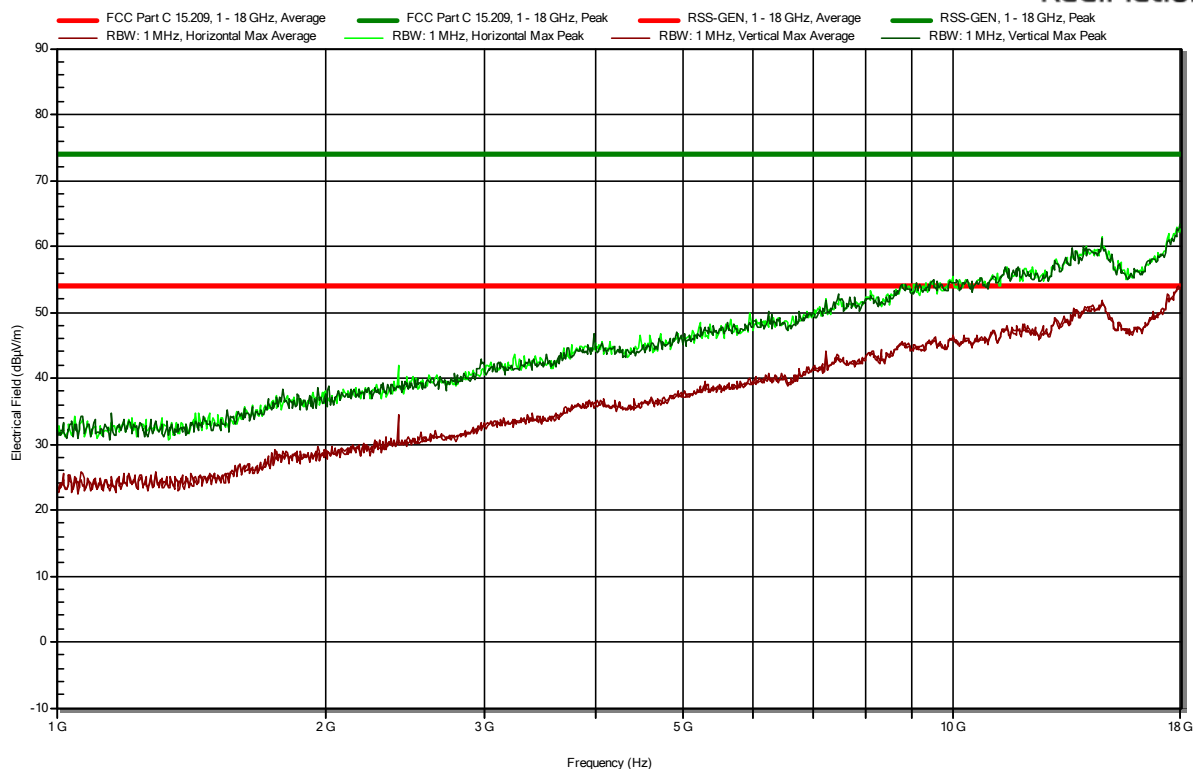

Plot 5b: radiated emissions of the EUT in the range 1-18GHz (pre-scan peak values shown) Middle channel
RadiMatation

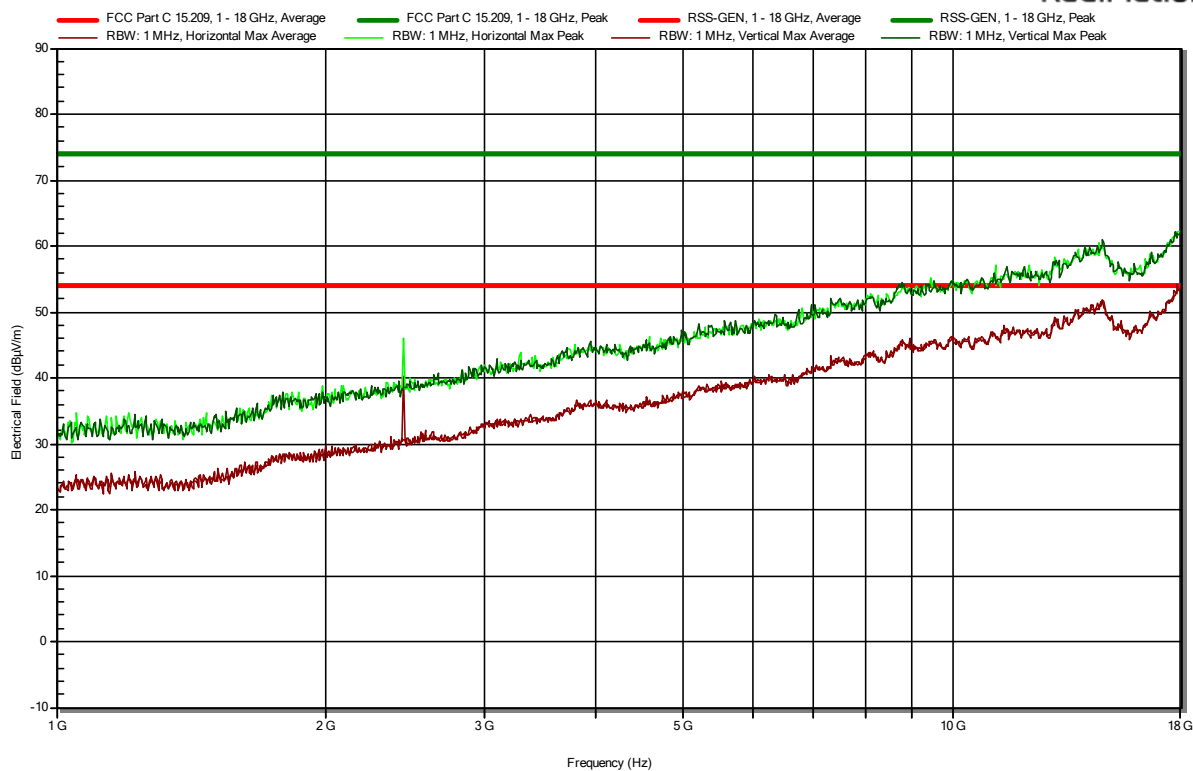


Plot 5c: radiated emissions of the EUT in the range 1-18GHz (pre-scan peak values shown) High channel
RadiMation

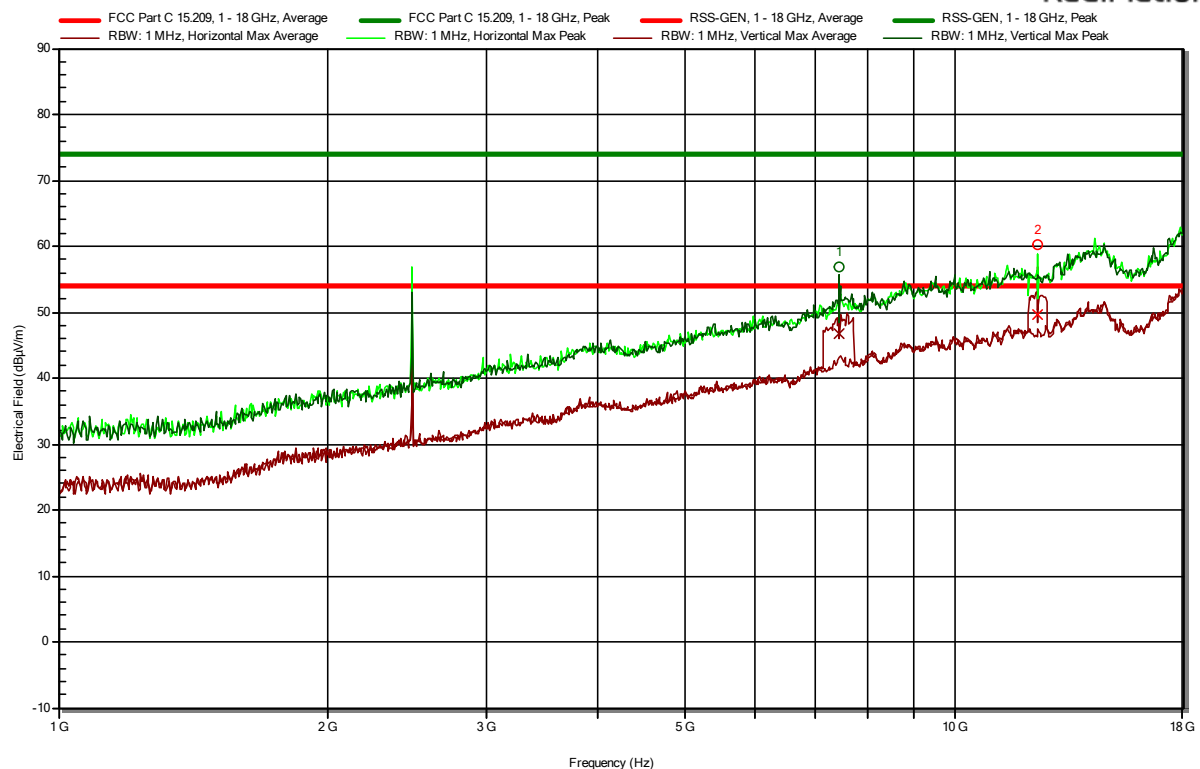

Note: The peaks between 2.4-2.48GHz are from the radio transmission and not subject to the emissions limit.


Plot 6a: radiated emissions of the EUT in the range 18-26.5GHz (pre-scan peak values shown) Low channel

RadiMation

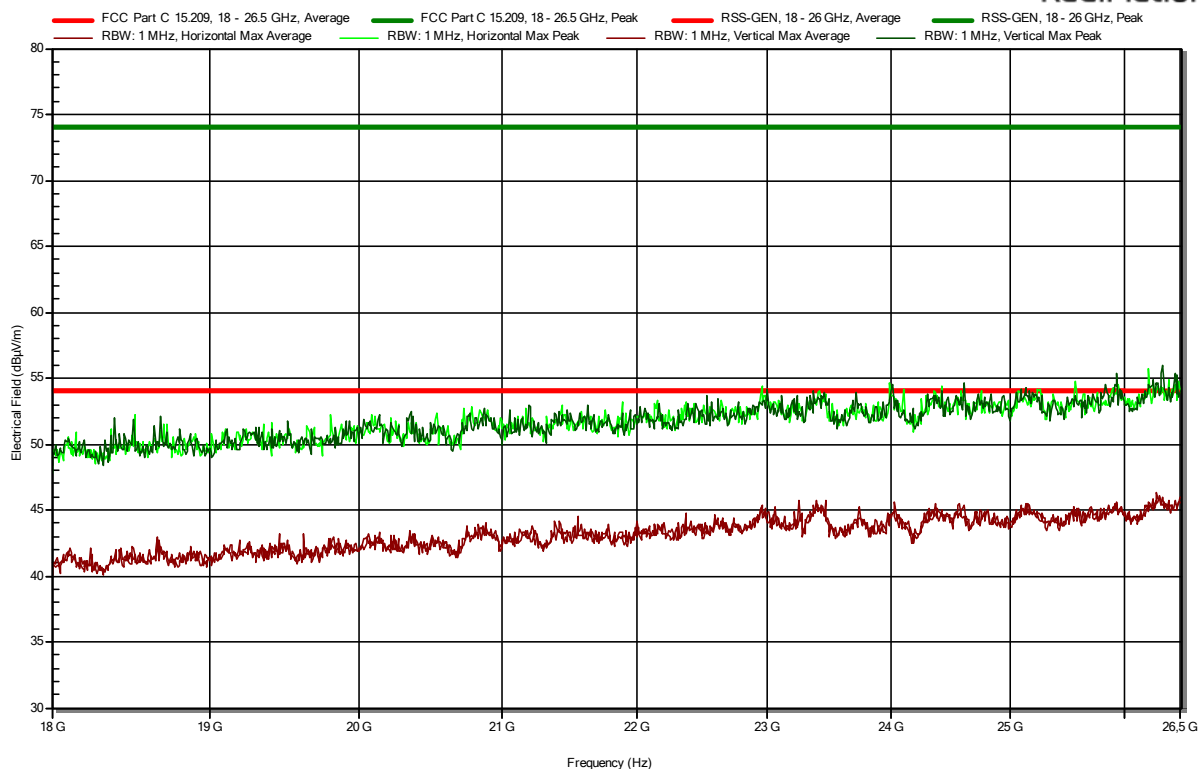


Plot 6b: radiated emissions of the EUT in the range 18-26.5GHz (pre-scan peak values shown) Middle channel

RadiMation

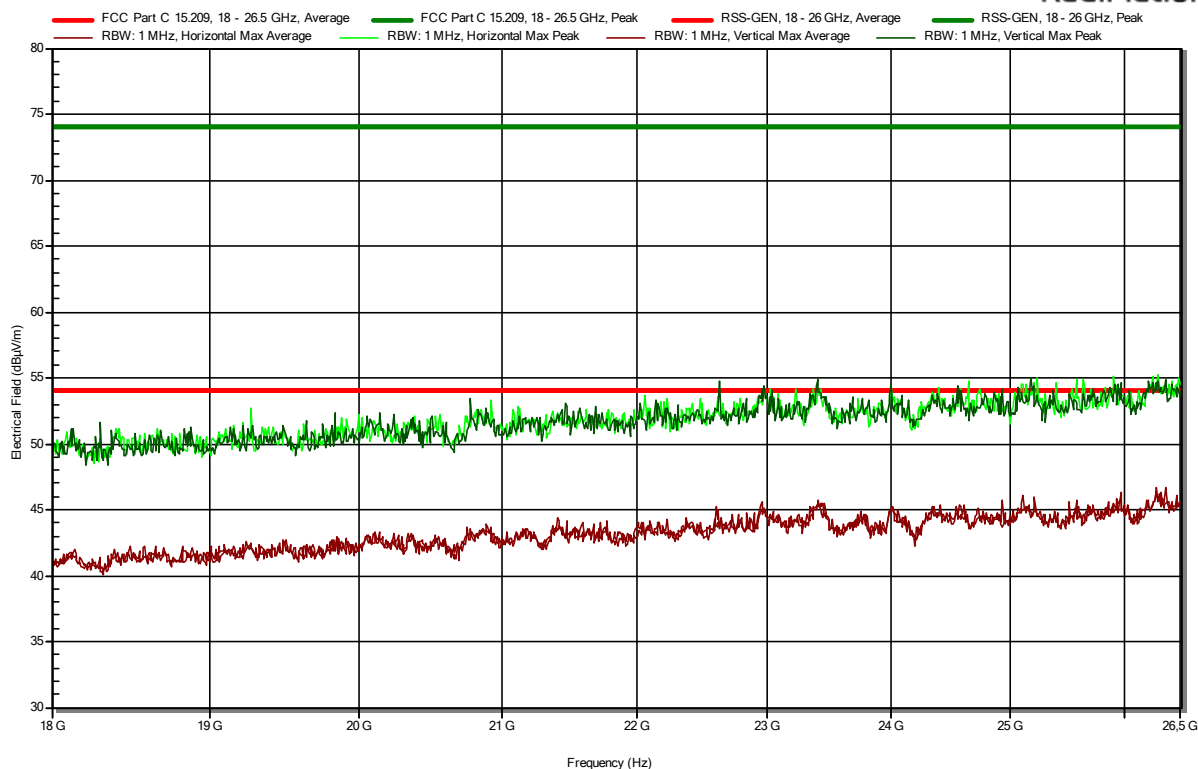

Plot 6c: radiated emissions of the EUT in the range 18-26.5GHz (pre-scan peak values shown) High channel
RadiMation

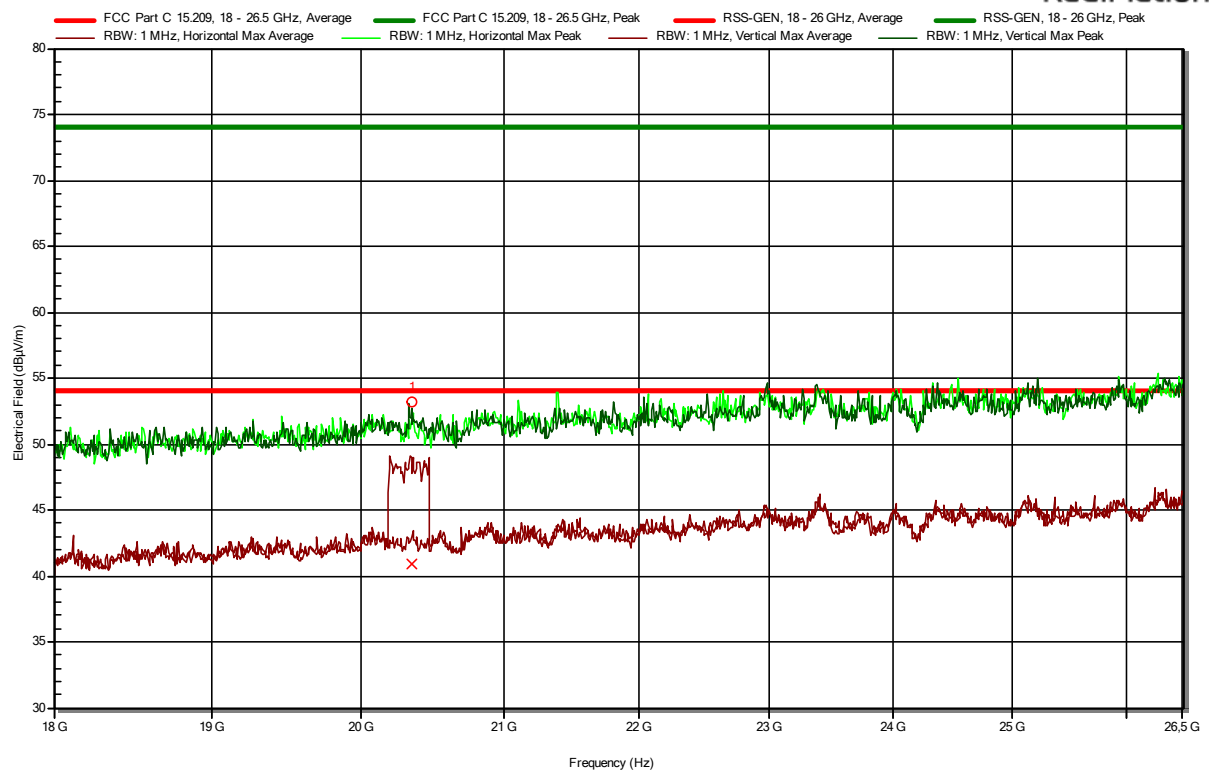

3.2 6dB bandwidth Measurement

3.2.1 Limit

The minimum 6 dB Bandwidth shall be at least 500 kHz.

3.2.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.2.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.2.4 Test procedure

According to ANSI C63.10, section 6.9

IRN 404 - Occupied bandwidth (Hz) Method 4 – DTS Bandwidth.


3.2.5 Test Results of the 6 dB bandwidth Measurement

Technology Std.	Channel	Frequency (MHz)	Data rate	6dB bandwidth (kHz)
Zigbee	11	2405	125 kbps	1623.76
	18	2440	125 kbps	1623.76
	26	2480	125 kbps	1663.37
Uncertainty	± 36.2 kHz			


Note: plots are provided on the next page.

3.2.6 Plots of the 6 dB bandwidth


Low channel

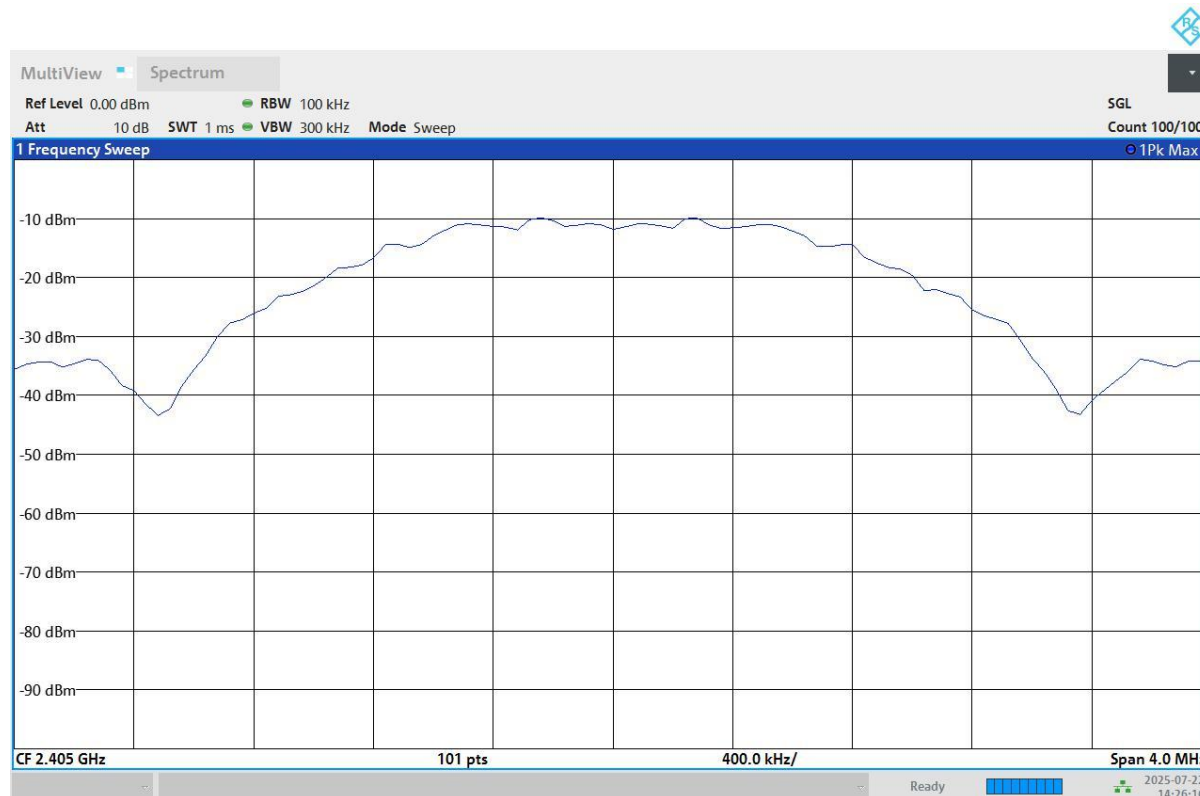

Mid channel

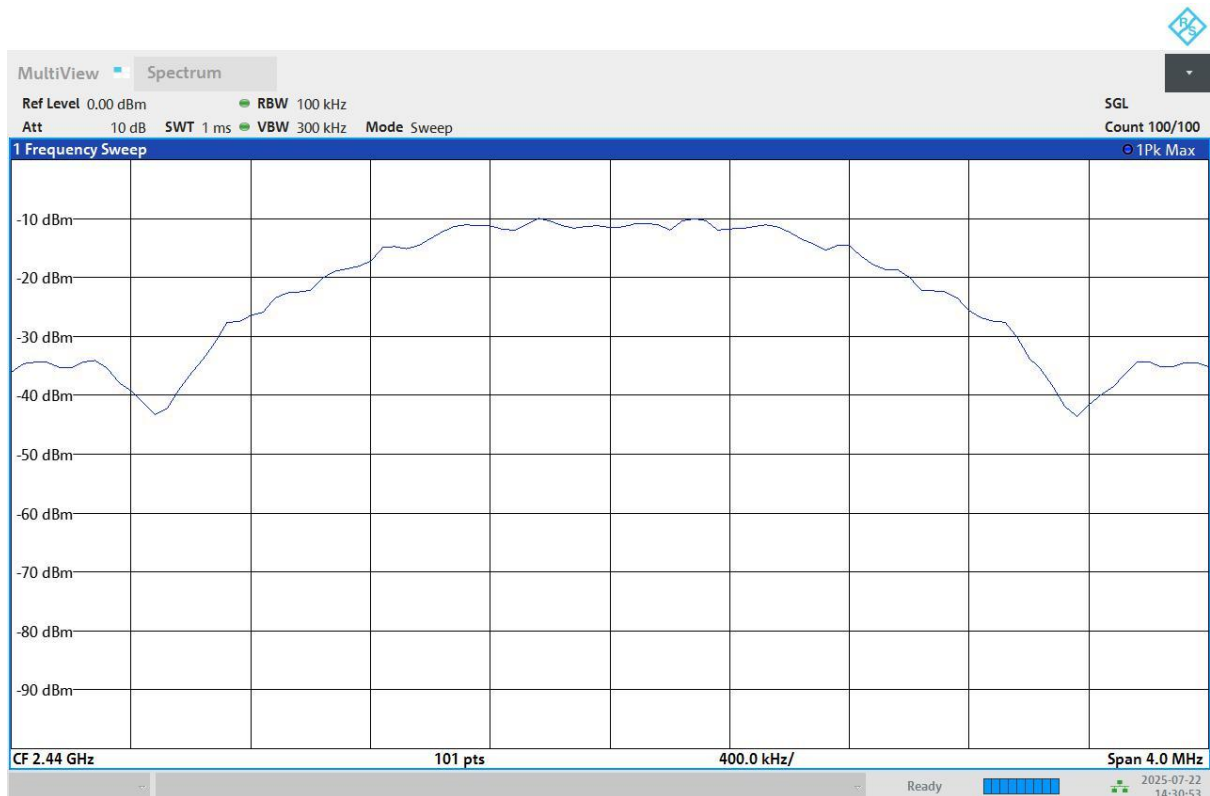

High channel

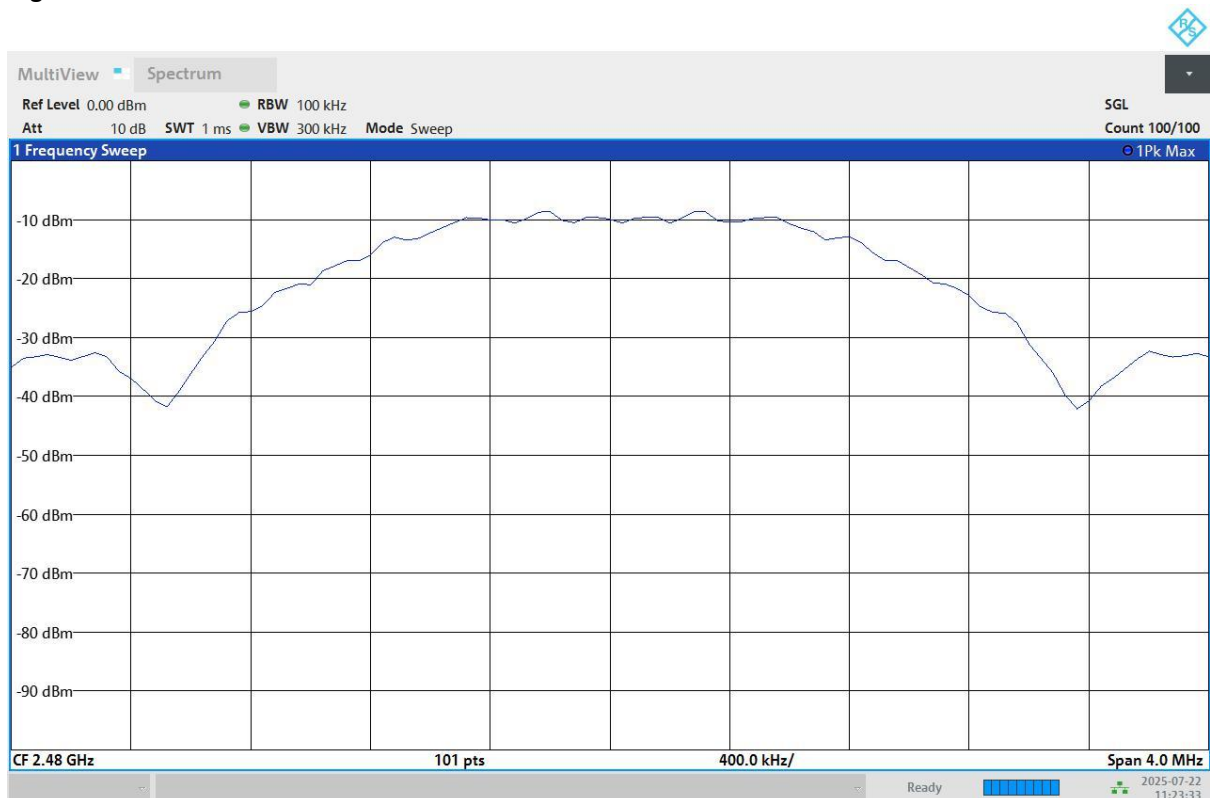

3.3 99% Occupied Bandwidth

3.3.1 Limit

According to RSS-Gen 6.7

3.3.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.3.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.3.4 Test procedure

According to ANSI C63.10, section 6.9


IRN 404 - Occupied bandwidth (Hz) Method 1 – XX % power bandwidth.

3.3.5 Test results of the 99% occupied bandwidth measurement


Technology Std.	Channel	Frequency (MHz)	Data rate	99% bandwidth (kHz)
Zigbee	11	2405	125 kbps	2250.00
	18	2440	125 kbps	2250.00
	26	2480	125 kbps	2260.00
Uncertainty	± 12 kHz			

3.3.6 Plots of the 99% occupied bandwidth measurement


Channel 11

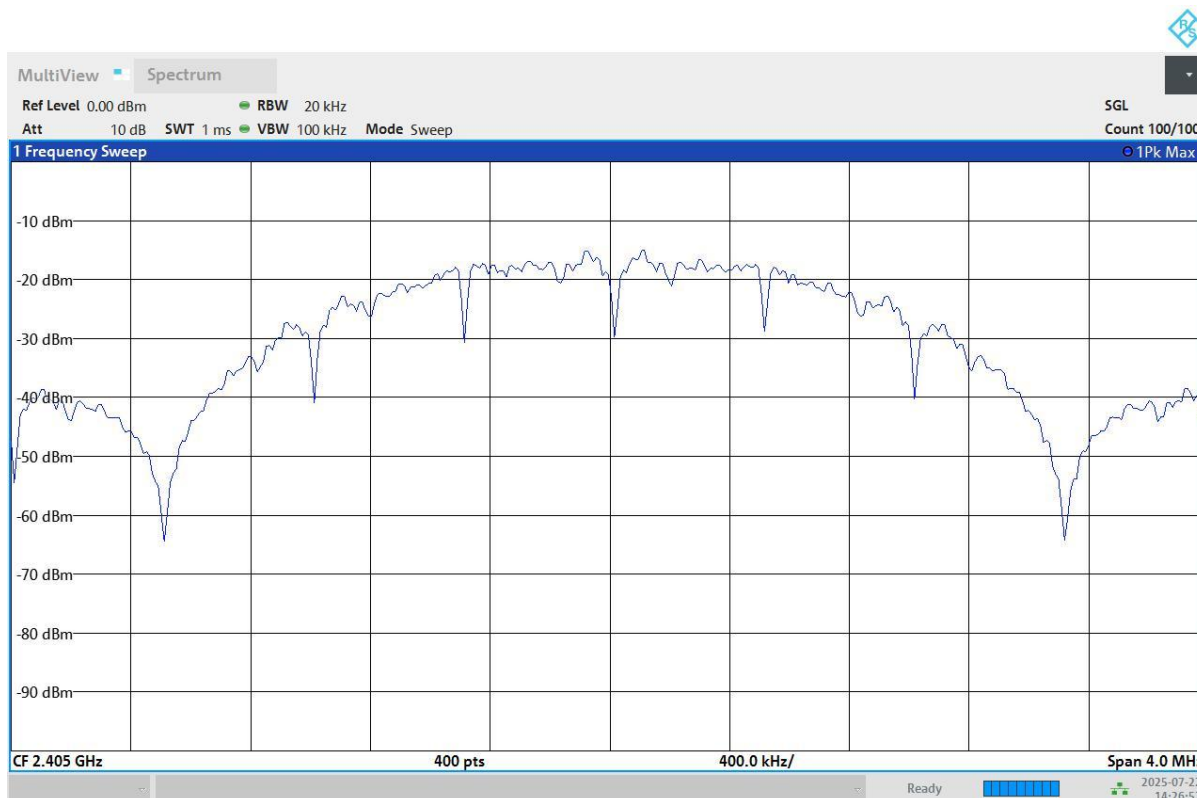

Channel 18

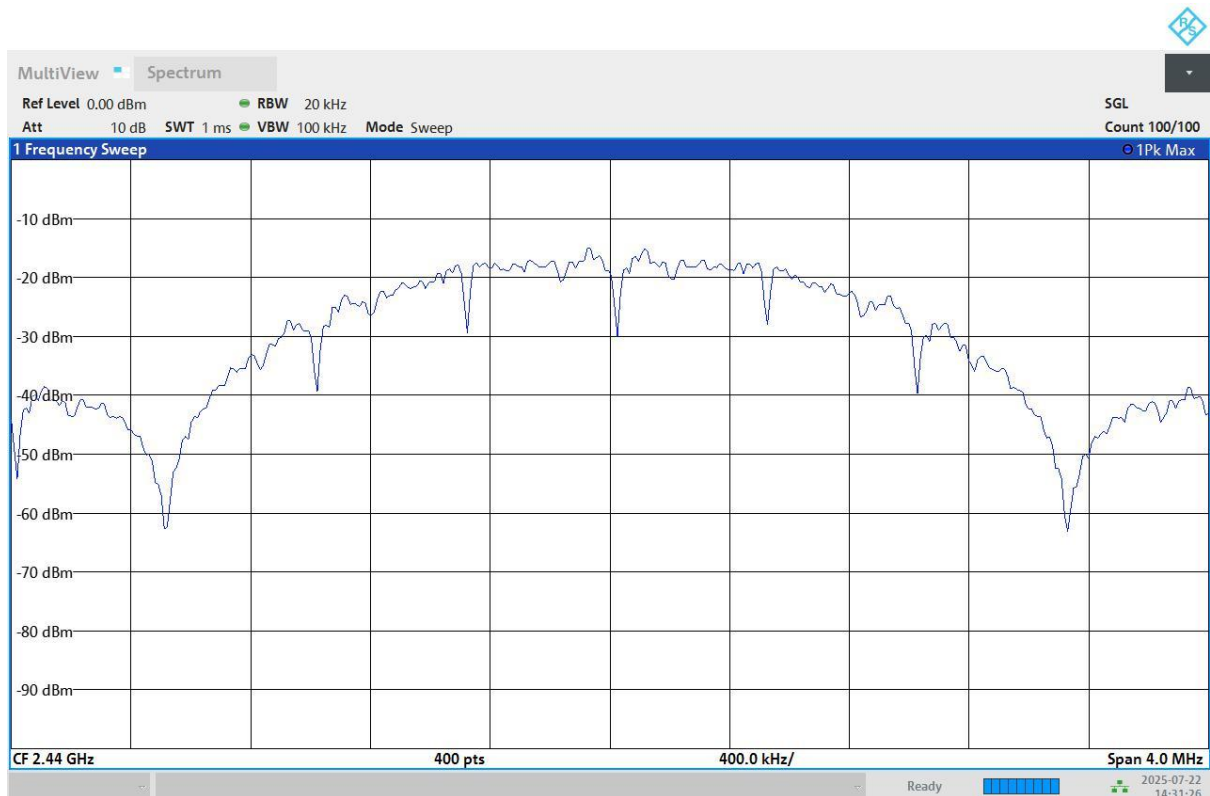

Channel 26

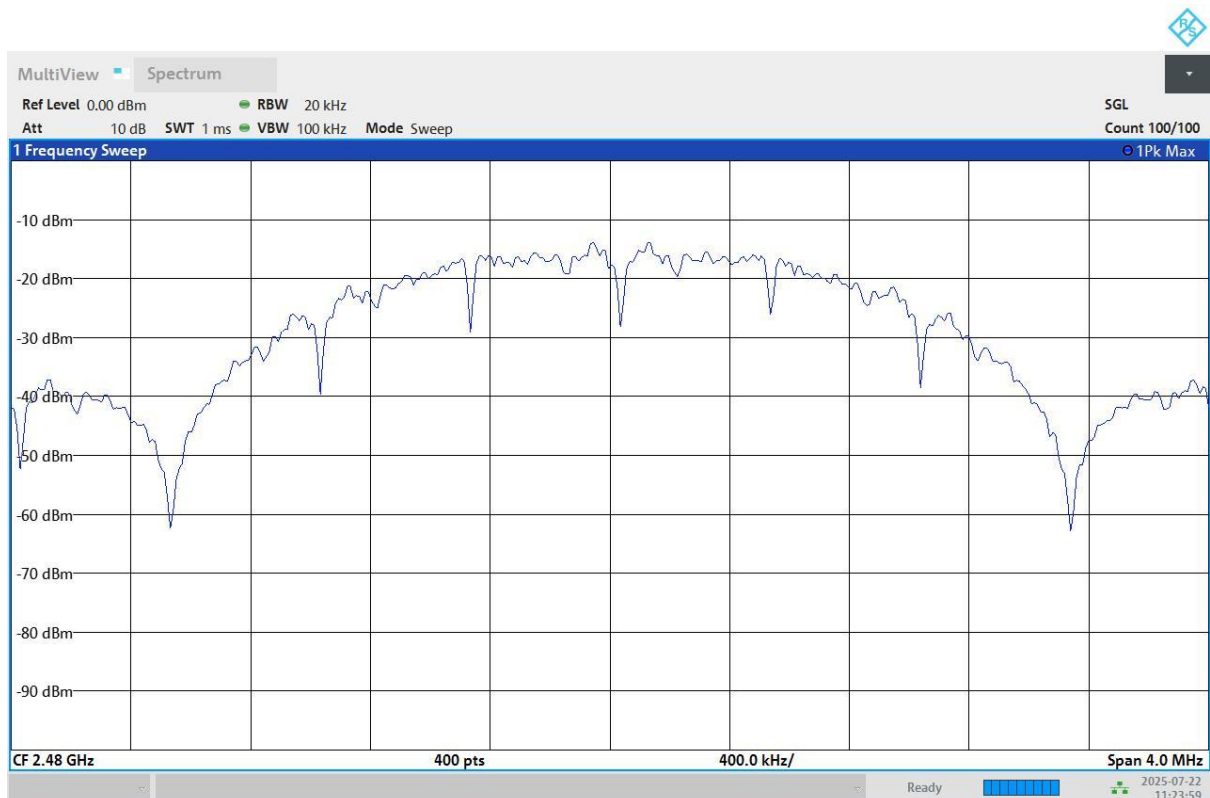

3.4 Output Power Measurement

3.4.1 Limit

FCC: For systems using digital modulation in the 2400-2483.5 MHz, the limit for the peak output power is 1W (30 dBm). If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point to point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

RSS: For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4W

3.4.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.4.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.4.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02.

IRN 402 - RF power (W) - Method 1 – AVGSA (DTS) according to ANSI C63.10.


3.4.5 Test results of Output Power Measurement

Peak method						
Technology Std.	Channel	Frequency (MHz)	Data rate	Peak output power conducted (dBm)	Peak output power conducted (W)	Peak output power EIRP (W)
Zigbee	11	2405	125 kbps	7.4	0.0055	0.0089
	18	2440	125 kbps	7.3	0.0054	0.0087
	26	2480	125 kbps	8.6	0.0072	0.0118
Uncertainty	±0.71 dB					


Note: plots are provided on the next page

3.4.6 Plots of the Output power


Channel 11

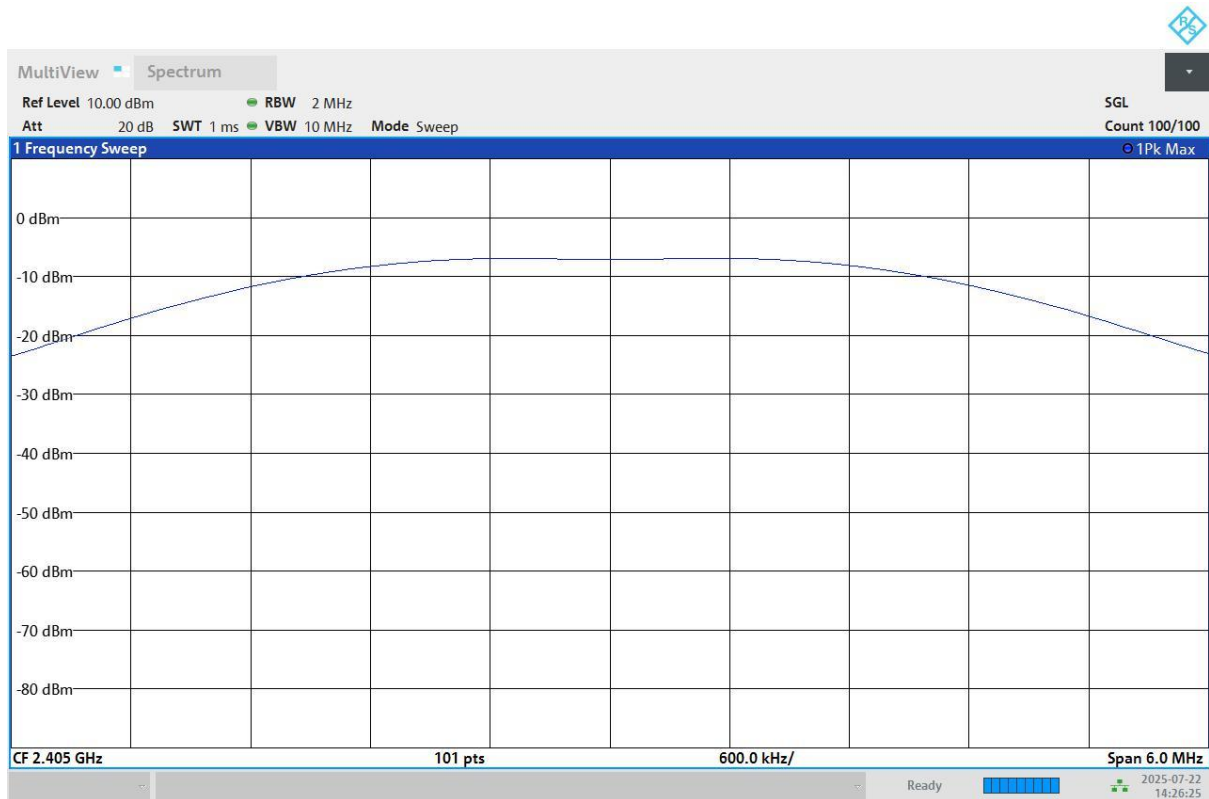

Channel 18

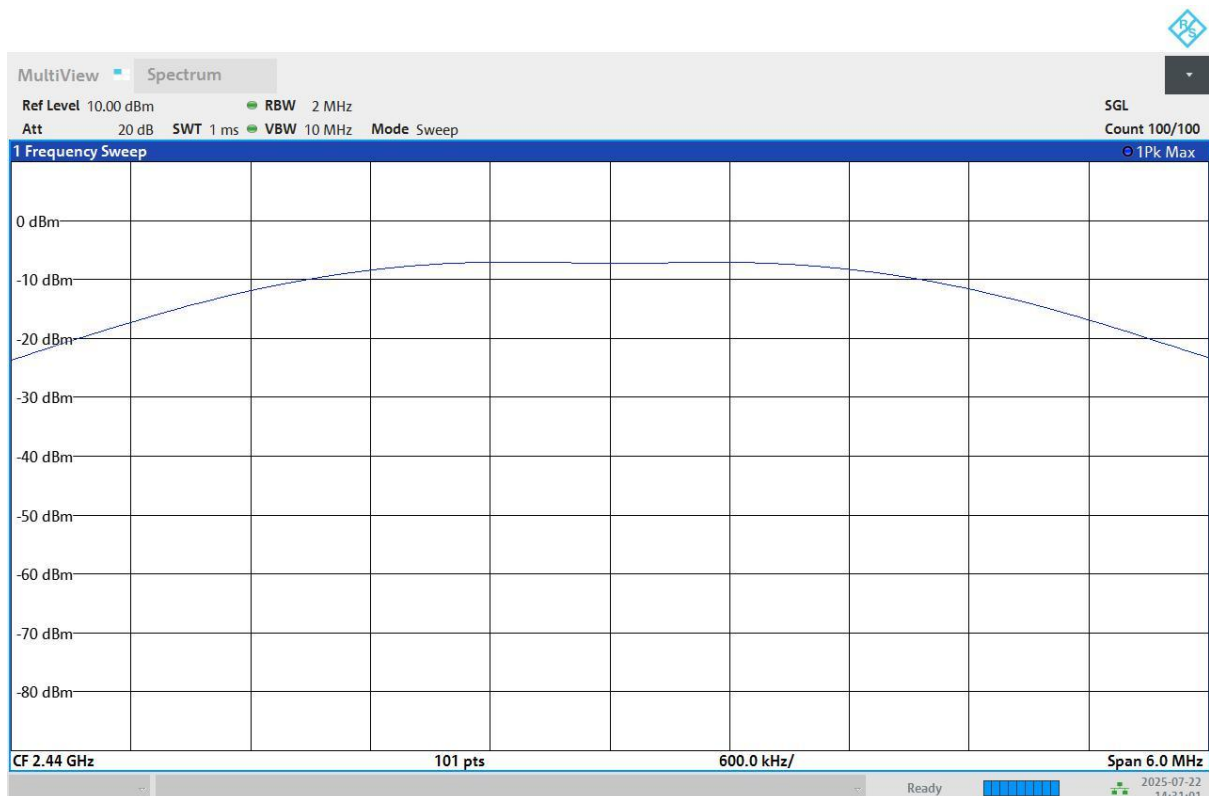

Channel 26

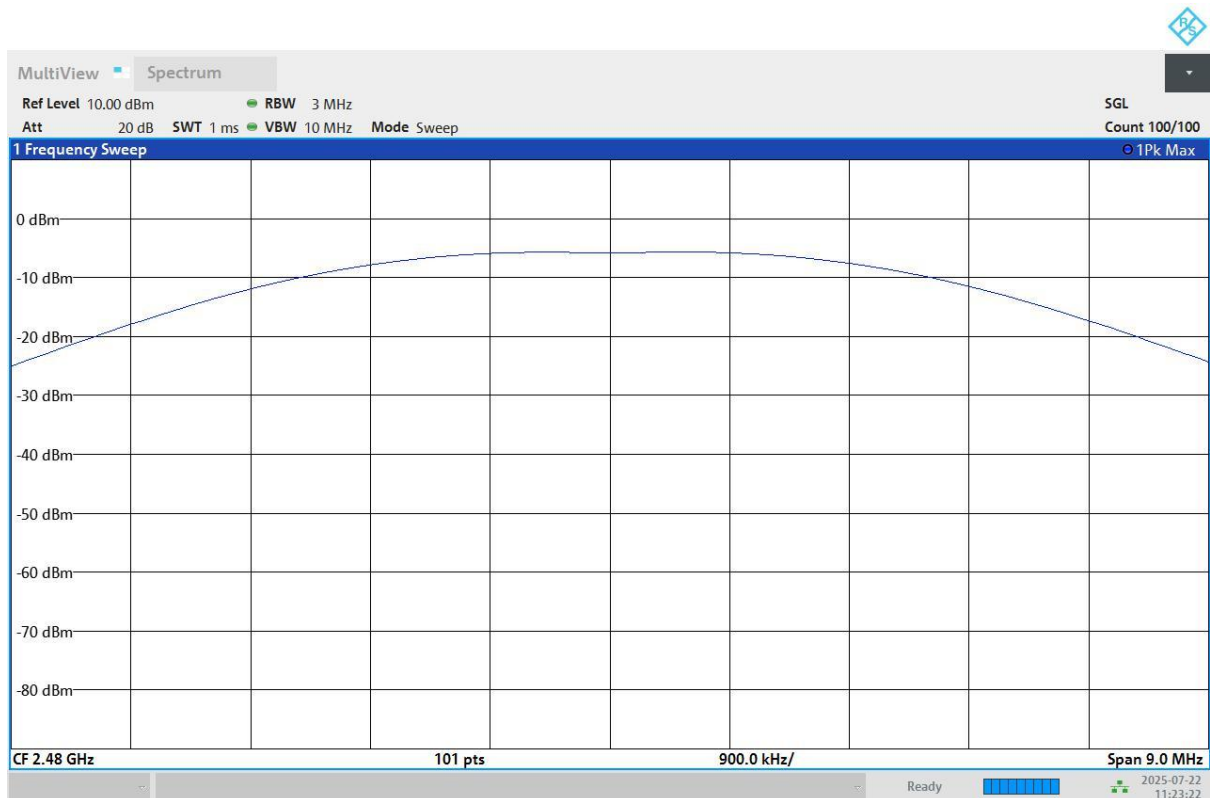

3.5 Power Spectral Density

3.5.1 Limit

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.5.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.5.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.5.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02.

IRN 412 - Spectral power density (W per n.Hz) - Method 5 – Peak method PKPSD (PSD in 3 kHz band)


3.5.5 Test results of Power Spectral Density Measurement

Technology Std.	Channel	Frequency (MHz)	Data rate	PSD conducted (dBm/3 kHz)	Limit (conducted) (dBm/3kHz)
Zigbee	11	2405	125 kbps	-1.59	8
	18	2440	125 kbps	-1.63	8
	26	2480	125 kbps	-0.34	8
Uncertainty	±2 dB				


Note: plots are provided on the next page

3.5.6 Plots of the Power Spectral Density


Channel 11

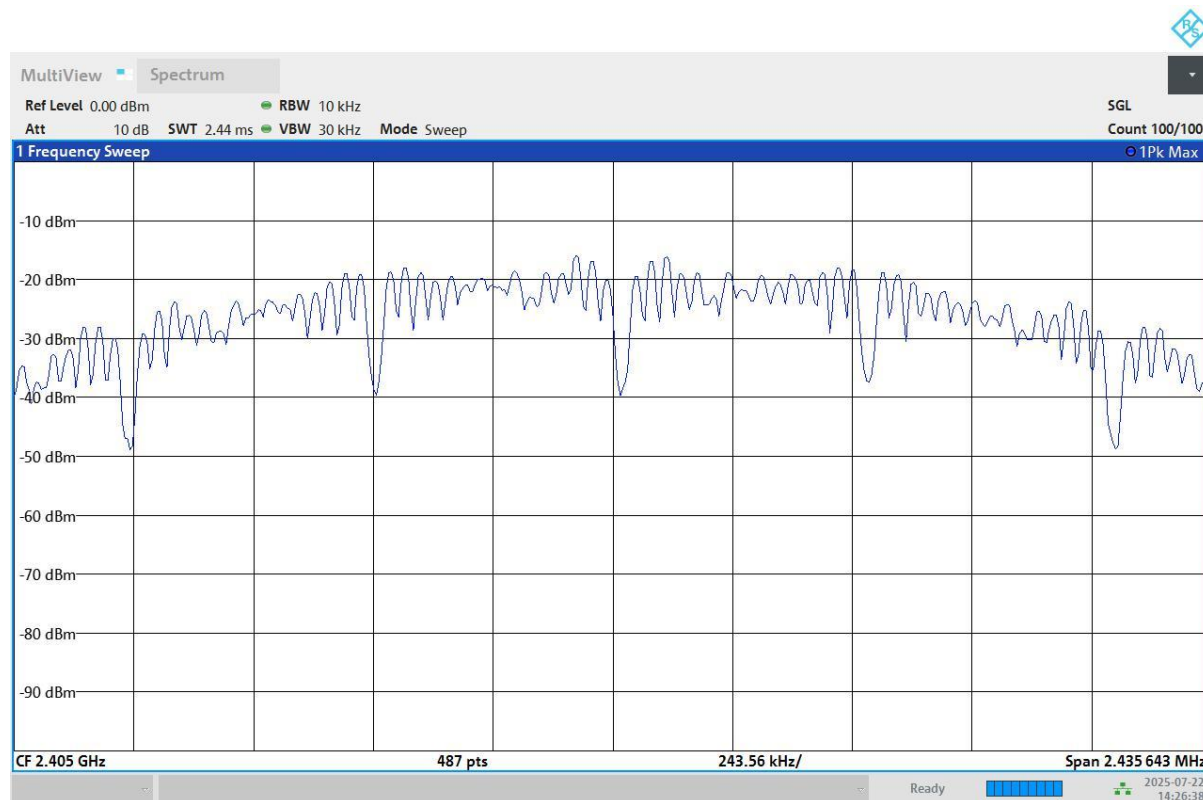

Channel 18

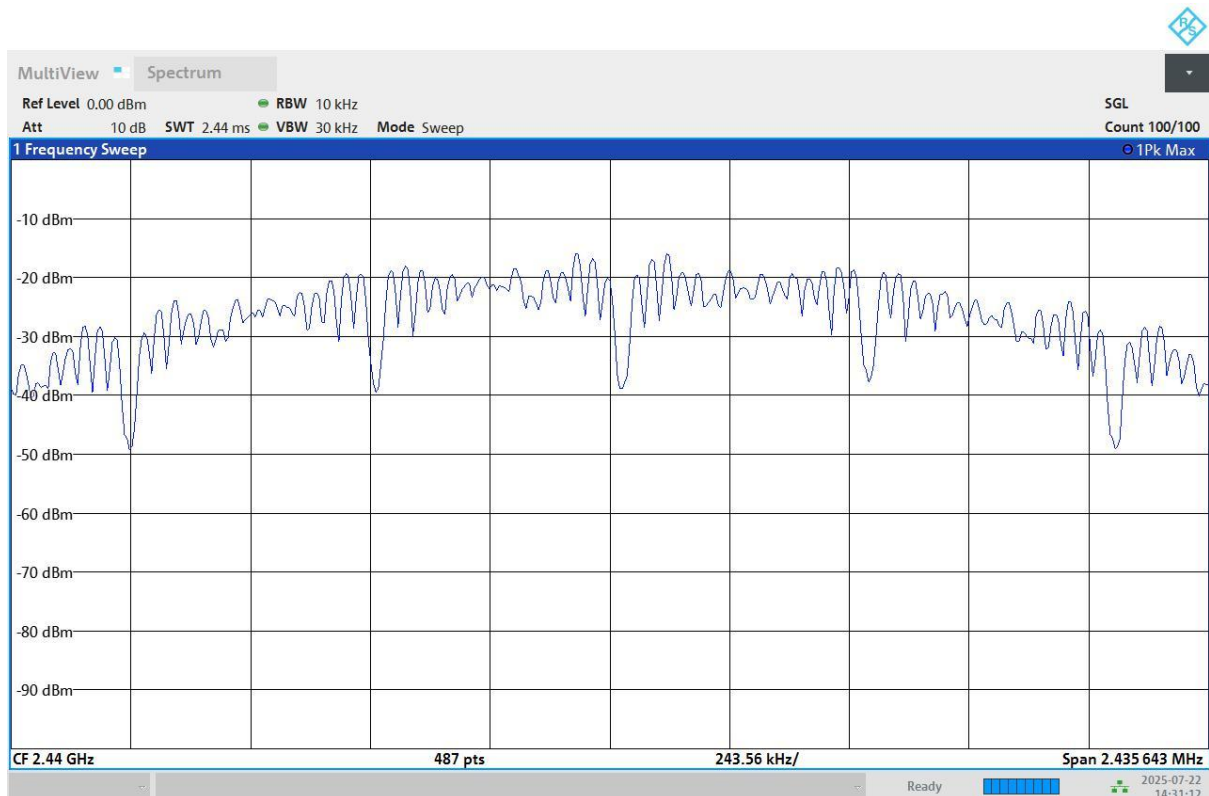

Channel 26

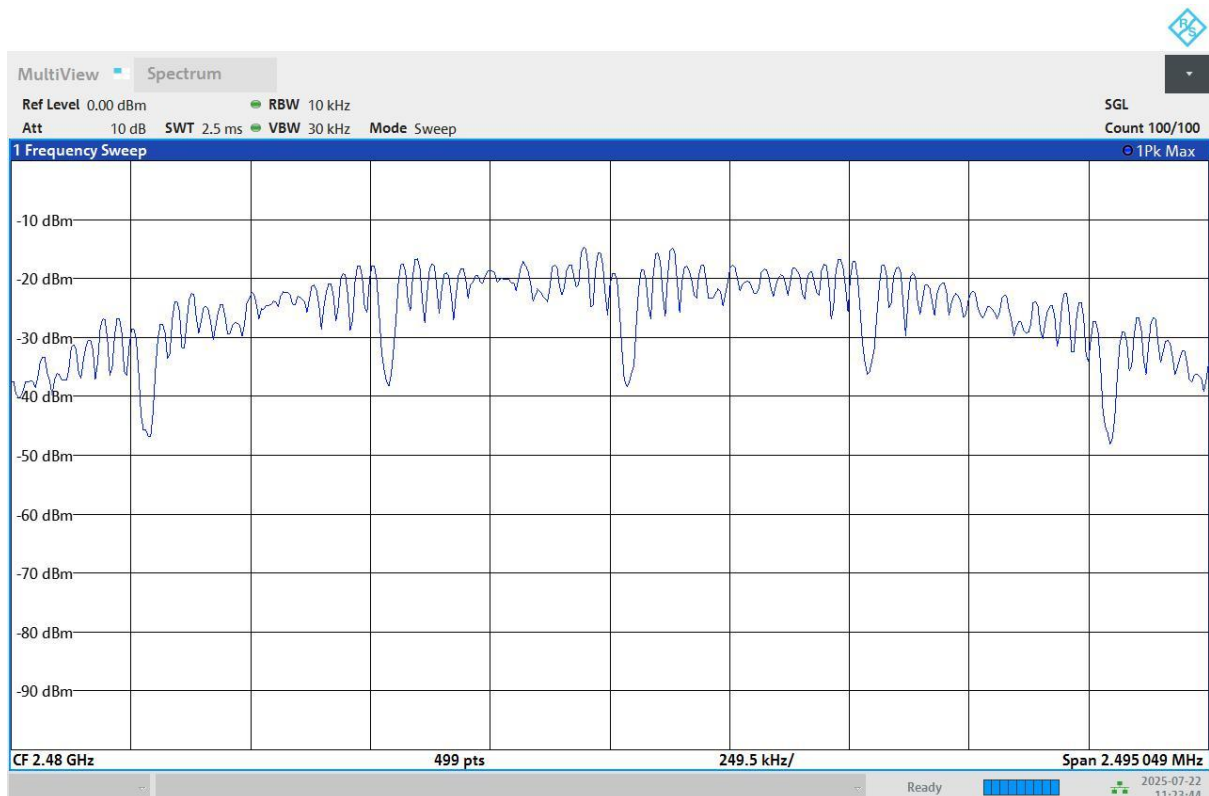

3.6 Band edge Measurement

3.6.1 Limit

Band edge:

At the edge of the authorized band the RF power shall be at least 20 dB down.

3.6.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.6.3 Test setup

The test setup is as shown in chapter 2.2 of this report. Antenna port conducted

3.6.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02, section 8.7.
IRN 441 - Radiated electrical disturbance (V per m) Method 6 – Radiated electrical disturbance at the Authorized band edge.


3.6.5 Measurement Uncertainty

±2 dB.(Conducted)

3.6.6 Plots of the Band edge Measurements


ZIGBEE Lower band edge (Channel 11)

Band Edge

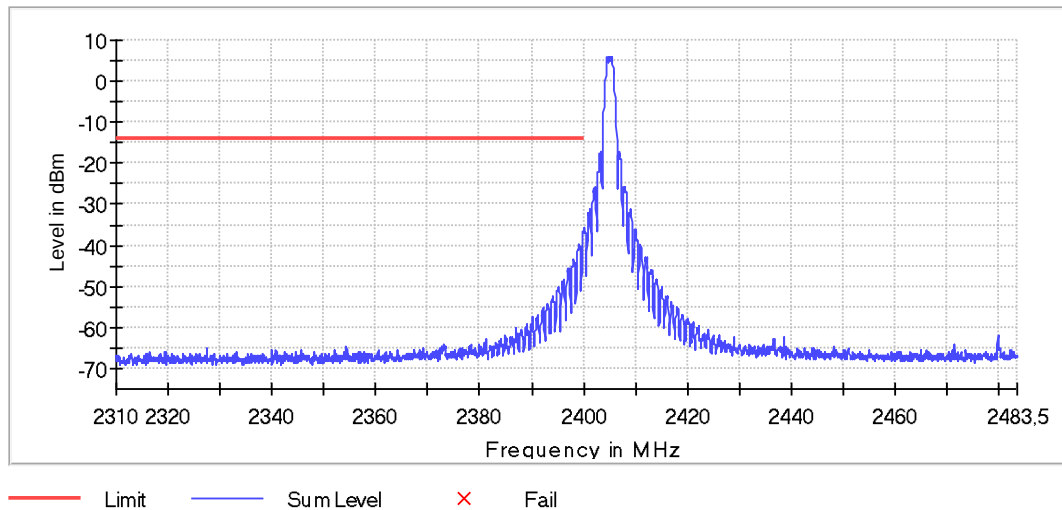


ZIGBEE high band edge (Channel 11)

Band Edge

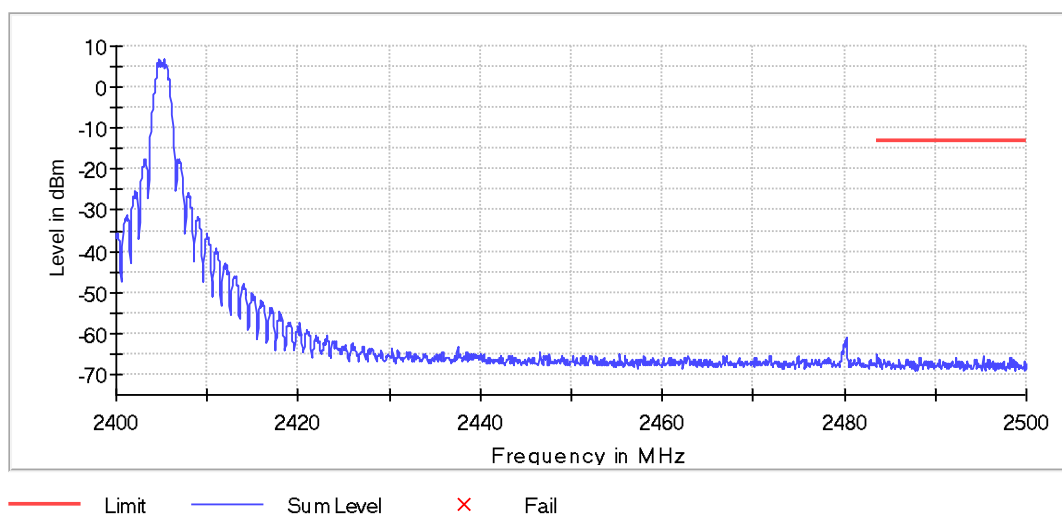


ZIGBEE Lower band edge (Channel 26)

Band Edge

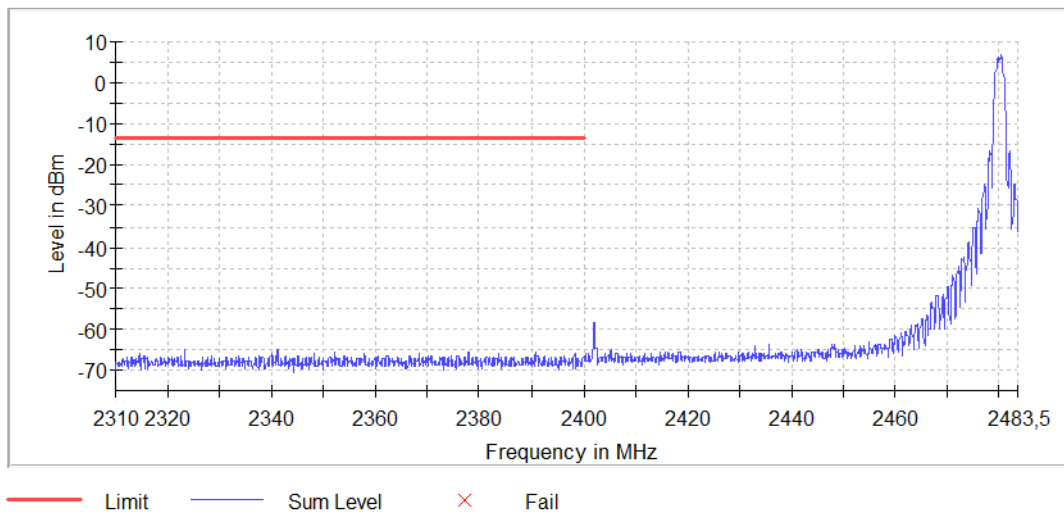

ZIGBEE High band edge (Channel 26)

Band Edge

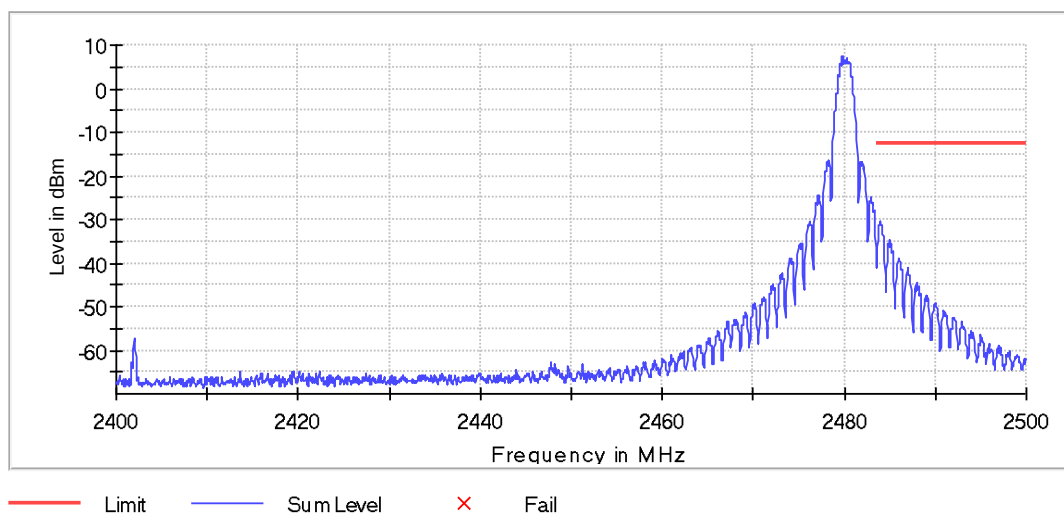

4 Sample calculations

All formulas for data conversions and conversion factors are reported in this chapter.

Magnetic field strength measurement:

$$H \left[dB \left(\mu \frac{A}{m} \right) \right] = V[dB(\mu V)] + L_c[dB] + AF^H \left[\frac{dB}{\Omega m} \right]$$

Where:

H is the magnetic field strength (to be compared to the limit)

V is the voltage level measured by the receiver or spectrum analyzer

L_c is the cable loss

AF^H is the magnetic antenna factor

Frequency (MHz)	AF	300m to 3m and 30m to 3m correction	CL (dB)	Corr. (dB)
	114515 EMCO 6505 S/N:9112-2710		SAR cable	
0.009	18.49	104.956	0.7	-85.8
0.01	17.64	104.041	0.05	-86.4
0.02	13.23	98.02	0.07	-84.7
0.03	11.65	94.498	0.1	-82.7
0.04	10.97	91.999	0.1	-80.9
0.1	10.14	84.041	0.1	-73.8
0.2	10.01	78.02	0.1	-67.9
0.5	9.95	50.061	0.1	-40
1	9.91	44.041	0.2	-33.9
3	9.93	34.498	0.2	-24.4
5	9.93	30.061	0.3	-19.8
10	9.75	24.041	0.6	-13.7
15	9.29	20.519	0.9	-10.3
20	8.57	18.02	1	-8.5
25	7.55	16.082	0.7	-7.8
27	7.01	15.413	1.2	-7.2
30	6.03	14.498	1	-7.5

Field Strength Measurement:

$$E \text{ (dB}\mu\text{V/m)} = U \text{ (dB}\mu\text{V)} + AF \text{ (dB/m)} + \text{Corr. (dB)}$$

Where:

E = Electric field strength

U = Measuring receiver voltage

AF = Antenna factor

CL = Cable loss

Corr. = sum of single correction factors of used cable and amplifier (if applicable).

Linear interpolation will be used for frequencies in between the values in the table.

Tables shows an extract of the values.

Frequency (MHz)	AF (dB/m)	Cable loss (dB)	Attenuator	Corr. (dB)
	ID: 107818 EMCO 3109	Id: 114928	ID:114525 Hewlett Packet	
30	13.5	1.8	6	21.3
100	9.2	2.7	6	17.9
150	12.6	3.2	6	21.8
200	13.6	3.6	6	23.2
250	15.2	4.3	6	25.5

Frequency (MHz)	AF (dB/m)	Cable loss (dB)	Corr. (dB)
	ID: 114385 EMCO LPDA	Id: 114928	
250	11.8	4.3	16.1
300	13	5.1	18.1
350	14.2	5.8	20.0
400	15.6	7.3	22.9
450	17.1	7.9	25.0
500	17.3	8.0	25.3
550	17.7	8.0	25.7
600	18.4	7.7	26.1
650	19.2	7.5	26.7
700	19.7	7.7	27.4
750	20.3	7.9	28.2
800	21.4	8.2	29.6
850	22.0	8.7	30.7
900	22.1	8.9	31.0
950	22.6	9.2	31.8
1000	22.5	9.6	32.1

Frequency (MHz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	114607 Emco 3115 SN: 9412-4377	114690 µComp Nordic MCNA-40-0010800-25-10P	114691	
1000	23.6	45.1	2.1	-19.4
2000	27.1	44.7	3.3	-14.3
3000	30.5	44.2	4.2	-9.5
4000	32.7	43.5	4.9	-5.9
5000	33.2	43.1	5.6	-4.3
6000	34.6	43.0	6.3	-2.1
7000	35.2	42.9	6.4	-1.3
8000	37.0	43.3	7.2	0.9
9000	38.1	43.3	7.9	2.7
10000	38.2	43.0	8.2	3.4
11000	38.3	42.9	8.7	4.1
12000	39.1	42.6	9.0	5.5
13000	39.2	43.6	9.8	5.4
14000	41.1	44.3	9.7	6.5
15000	40.2	44.4	10.4	6.2
16000	37.5	44.3	10.8	4.0
17000	41.1	44.5	11.4	8.0
18000	44.0	44.9	11.4	10.5

Frequency (MHz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	Kiwa ID: 114518 Flann 20240-25 SN: 163703	Kiwa ID: Schwarzbeck BBV 9721	114691	
18000	31.3	34.5	11.4	8.2
19000	31.5	34.9	11.2	7.8
20000	31.7	34.1	11.6	9.2
21000	31.9	33.6	12.1	10.4
22000	32.1	33.6	12.4	10.9
23000	32.2	33.3	13.6	12.5
24000	32.3	32.3	13.5	13.5
25000	32.4	33.0	13.4	12.8
26000	32.5	32.9	13.7	13.3

<< END OF REPORT>>