



FCC Part 15.247

TEST REPORT

For

InnoComm Mobile Technology Corporation

3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 30078, Taiwan

FCC ID: YAICM05

Report Type Original Report	Product Type: Wireless Module
Report Producer :	Himiko Chen <i>Himiko Chen</i>
Report Number :	RLK1806002-00A
Report Date :	2018/10/30
Reviewed By:	Jerry Chang <i>Jerry Chang</i>
Prepared By: Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2)2647 6898 Fax: +886 (2) 2647 6895 www.bacl.com.tw	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

Revision History

Revision	Report Number	Issue Date	Description	Author/Revised by
1.0	RLK1806002-00A	2018/10/30	Original Report	Himiko Chen

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	OPERATION CONDITION OF EUT	6
1.3	OBJECTIVE AND TEST METHODOLOGY	6
1.4	MEASUREMENT UNCERTAINTY	6
1.5	TEST FACILITY	6
2	SYSTEM TEST CONFIGURATION.....	7
2.1	DESCRIPTION OF TEST CONFIGURATION.....	7
2.2	DESCRIPTION OF WORST TEST CONFIGURATION.....	8
2.3	BLOCK DIAGRAM OF TEST SETUP	8
2.4	DUTY CYCLE.....	9
3	SUMMARY OF TEST RESULTS.....	11
4	FCC §15.247(I), §1.1310, § 2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
4.1	APPLICABLE STANDARD	12
4.2	RF EXPOSURE EVALUATION RESULT	13
5	FCC §15.203 – ANTENNA REQUIREMENTS	14
5.1	APPLICABLE STANDARD	14
5.2	ANTENNA LIST AND DETAILS	14
6	FCC §15.207 – AC LINE CONDUCTED EMISSIONS	15
6.1	APPLICABLE STANDARD	15
6.2	EUT SETUP AND TEST PROCEDURE.....	15
6.3	TEST EQUIPMENT LIST AND DETAILS	16
6.4	TEST ENVIRONMENTAL CONDITIONS	16
6.5	AC LINE CONDUCTED EMISSION TEST PLOT AND DATA.....	17
7	FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS	21
7.1	APPLICABLE STANDARD	21
7.2	EUT SETUP AND TEST PROCEDURE.....	22
7.3	TEST EQUIPMENT LIST AND DETAILS	23
7.4	TEST ENVIRONMENTAL CONDITIONS	24
7.5	RADIATED EMISSION TEST PLOT AND DATA.....	25
8	FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH	52
8.1	APPLICABLE STANDARD	52
8.2	TEST PROCEDURE.....	52
8.3	TEST EQUIPMENT LIST AND DETAILS	52
8.4	TEST ENVIRONMENTAL CONDITIONS	52
8.5	TEST RESULTS	53
9	FCC §15.247(B)(3) – MAXIMUM OUTPUT POWER.....	60
9.1	APPLICABLE STANDARD	60
9.2	TEST PROCEDURE.....	60
9.3	TEST EQUIPMENT LIST AND DETAILS	60
9.4	TEST ENVIRONMENTAL CONDITIONS	60
9.5	TEST RESULTS	61
10	FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	62
10.1	APPLICABLE STANDARD	62
10.2	TEST PROCEDURE.....	62
10.3	TEST EQUIPMENT LIST AND DETAILS	62
10.4	TEST ENVIRONMENTAL CONDITIONS	62
10.5	TEST RESULTS	63

11 FCC §15.247(E) – POWER SPECTRAL DENSITY67

11.1 APPLICABLE STANDARD67

11.2 TEST PROCEDURE67

11.3 TEST EQUIPMENT LIST AND DETAILS67

11.4 TEST ENVIRONMENTAL CONDITIONS67

11.5 TEST RESULTS68

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	InnoComm Mobile Technology Corporation 3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 30078, Taiwan
Manufacturer	InnoComm Mobile Technology Corporation 3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 30078, Taiwan
Brand(Trade) Name	
Product (Equipment)	Wireless Module
Model Name	CM05
EUT Function	IEEE 802.11b/g/n HT20/n HT40 + BT4.0 + BT5.0
Frequency Range	IEEE 802.11b/g/n HT20: 2412 ~ 2462 MHz IEEE 802.11n HT40: 2422 ~ 2452 MHz BLE: 2402 ~ 2480 MHz
Number of Channels	IEEE 802.11b/g/n HT20: 11 Channels IEEE 802.11n HT40: 9 Channels BLE mode : 40 Channels
Output Power	IEEE 802.11b: 20.05 dBm (0.1012 W) IEEE 802.11g: 27.42 dBm (0.5520 W) IEEE 802.11n HT20: 27.60 dBm (0.5754 W) IEEE 802.11n HT40: 25.41 dBm (0.3475 W) BLE 1 Mbps: 3.37 dBm (0.0022 W) BLE 2 Mbps: 3.45 dBm (0.0022 W)
Received Date	Jun. 07, 2018
Date of Test	Sep. 19, 2018 ~ Oct. 16, 2018
Related Submittal(s)/Grant(s)	N/A
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g/n HT20/n HT40: OFDM BLE mode : GFSK
OS and Firmware Version	Driver: 1.21.2.10

*All measurement and test data in this report was gathered from production sample serial number: 1806002

(Assigned by BACL, Taiwan).

1.2 Operation Condition of EUT

Power Operation (Voltage Range)	☐ AC 120V/60Hz ☐ Adapter ☐ By Power Core
	☒ DC Type ☒ DC Power Supply 3.3V ☐ Battery ☐ External from USB Cable ☐ External DC Adapter
	☐ Host System

1.3 Objective and Test Methodology

The Objective and Test Methodology of this Test Report was to document the compliance of the InnoComm Mobile Technology Corporation Appliance (Model: CM05) to the requirements of the following Standards:

-Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.

- ANSI C63.10-2013 of the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Measurement Uncertainty

Parameter	Expanded Measurement Uncertainty
RF output power with Power Meter	± 0.55 dB
Occupied Channel Bandwidth	± 4.45 %
RF Conducted test with Spectrum	± 1.45 dB
AC Power Line Conducted Emission	± 4.64 dB
Radiated Below 1G	± 5.83 dB
Radiated Above 1G-18G	± 5.35 dB
Radiated Above 18G-40G	± 4.49 dB

1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on

☒ 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

☒ 68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

2 System Test Configuration

2.1 Description of Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer.

No special accessory, No modification was made to the EUT and No special equipment used during test.

For Wi-Fi 2.4G mode, there are totally 11 channels.

Wi-Fi 2.4G mode Channels			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	-	-

For BLE mode, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
--	--	38	2478
19	2440	39	2480

For Wi-Fi 802.11b/g/n HT20 modes: Channel 1, 6 and 11 were tested.

For Wi-Fi 802.11n HT40 modes: Channel 3, 6 and 9 were tested.

For BLE mode: Channel 0, 19 and 39 were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the Peak power and PSD across all data rates and modulations of all bandwidth.

Radiated below 1G were tested worst output power mode.

2.2 Description of Worst Test Configuration


Modulation Used for Conformance Test			
Configuration	N _{TX}	Data Rate	Worst Data Rate
IEEE 802.11b	1	1 Mbps-11 Mbps	1 Mbps
IEEE 802.11g	1	6 Mbps-54 Mbps	6 Mbps
IEEE 802.11n HT20	1	MCS 0-MCS 7	MCS 0
IEEE 802.11n HT40	1	MCS 0-MCS 7	MCS 0
BLE 1Mbps	1	125 kbps – 1 Mbps	1 Mbps
BLE 2Mbps	1	125 kbps – 2 Mbps	2 Mbps

Worst Case of 802.11 b/g/n Power Setting							
EUT Exercise Software		UI_mptool					
Configuration	N _{TX}	BW 20 MHz			BW 40 MHz		
		2412	2442	2472	2422	2442	2462
IEEE 802.11b	1	38	39	39	-	-	-
IEEE 802.11g	1	44	61	42	-	-	-
IEEE 802.11n HT20	1	41	61	40	-	-	-
IEEE 802.11n HT40	1	-	-	-	40	48	40


Worst Case of BLE Power Setting				
EUT Exercise Software		nRFgo Test Tool		
Configuration	N _{TX}	2402	2440	2480
BLE 1Mbps	1	Default	Default	Default
BLE 2Mbps	1	Default	Default	Default

2.3 Block Diagram of Test Setup

Radiation

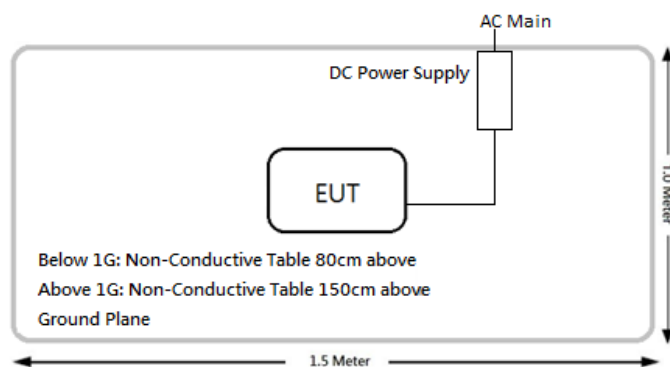

Conduction

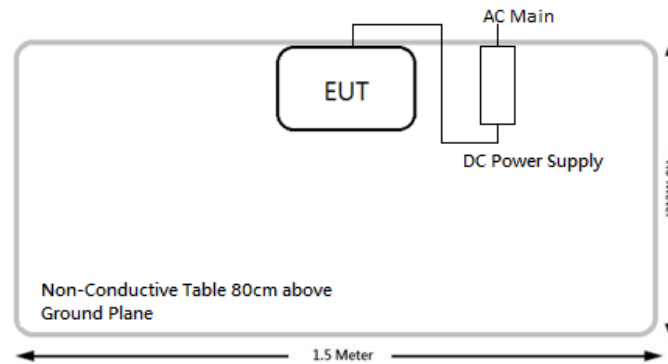


2.4 Duty Cycle


According to KDB 558074 D01 15.247 Meas Guidance v05:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.


Configuration	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11b	0.00	0.00	100.00	0.00
IEEE 802.11g	2.09	2.19	95.43	0.20
IEEE 802.11n HT20	1.95	2.05	95.12	0.22
IEEE 802.11n HT40	0.97	1.07	90.65	0.43
BLE 1Mbps mode	0.43	0.62	69.35	1.59
BLE 2Mbps mode	0.21	0.62	33.87	4.70

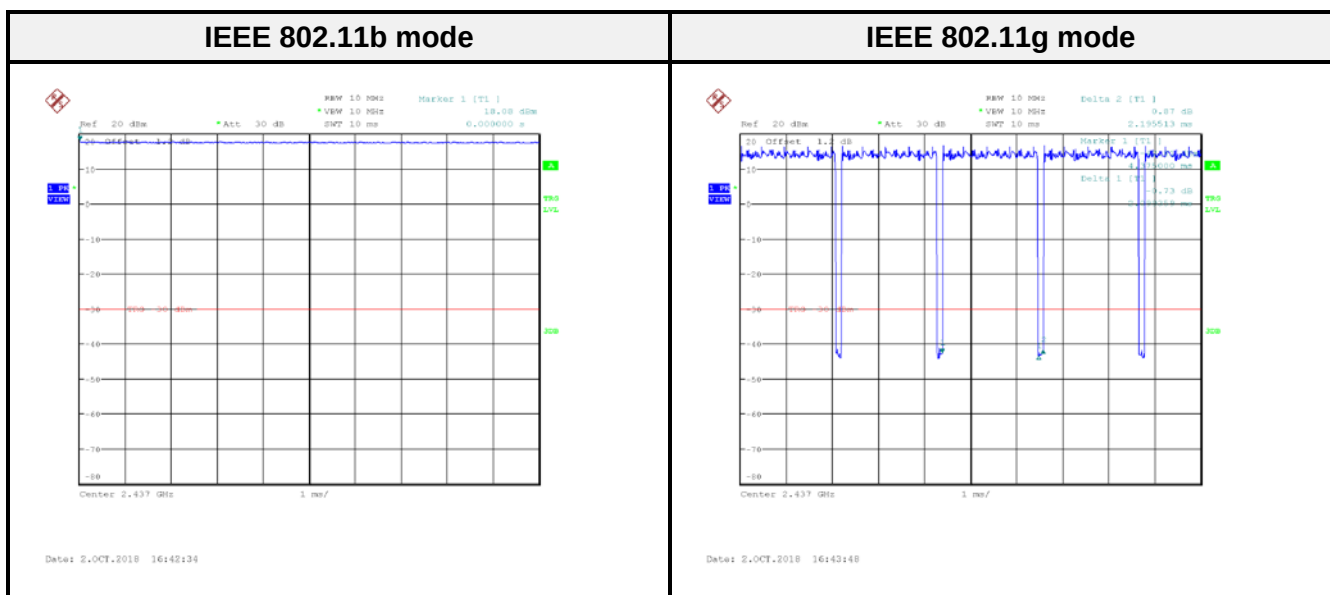

* Duty Factor = $10 \cdot \log(1/\text{Duty cycle})$

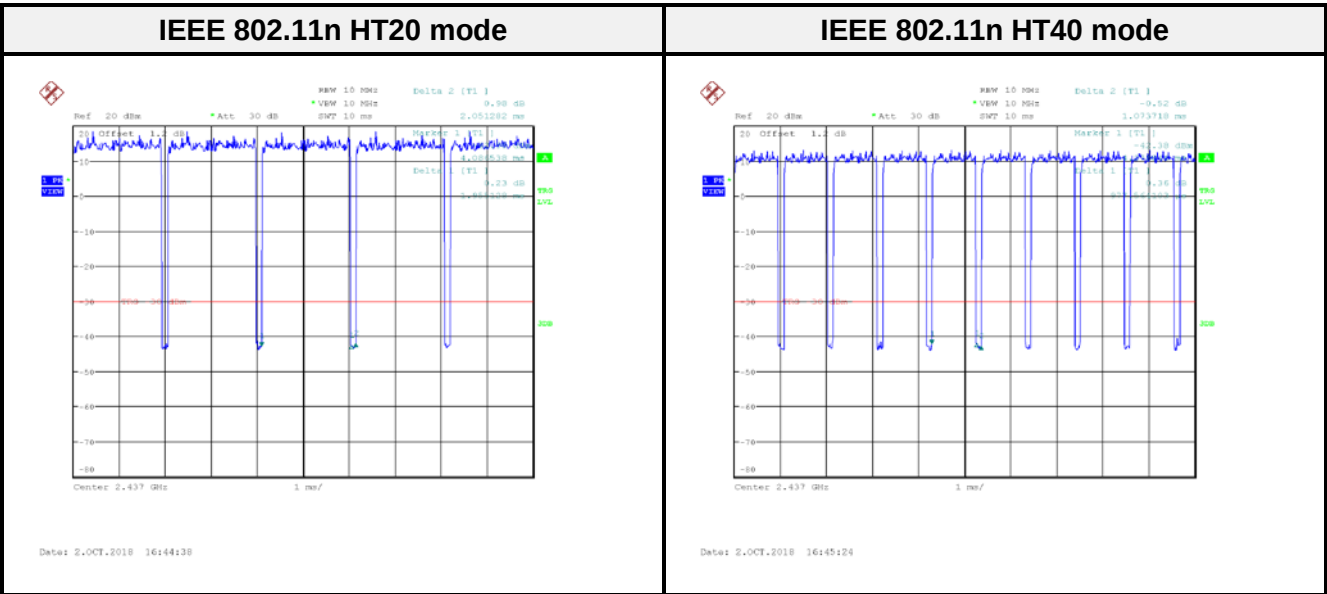

* Duty Factor = 10*log (1/Duty cycle)

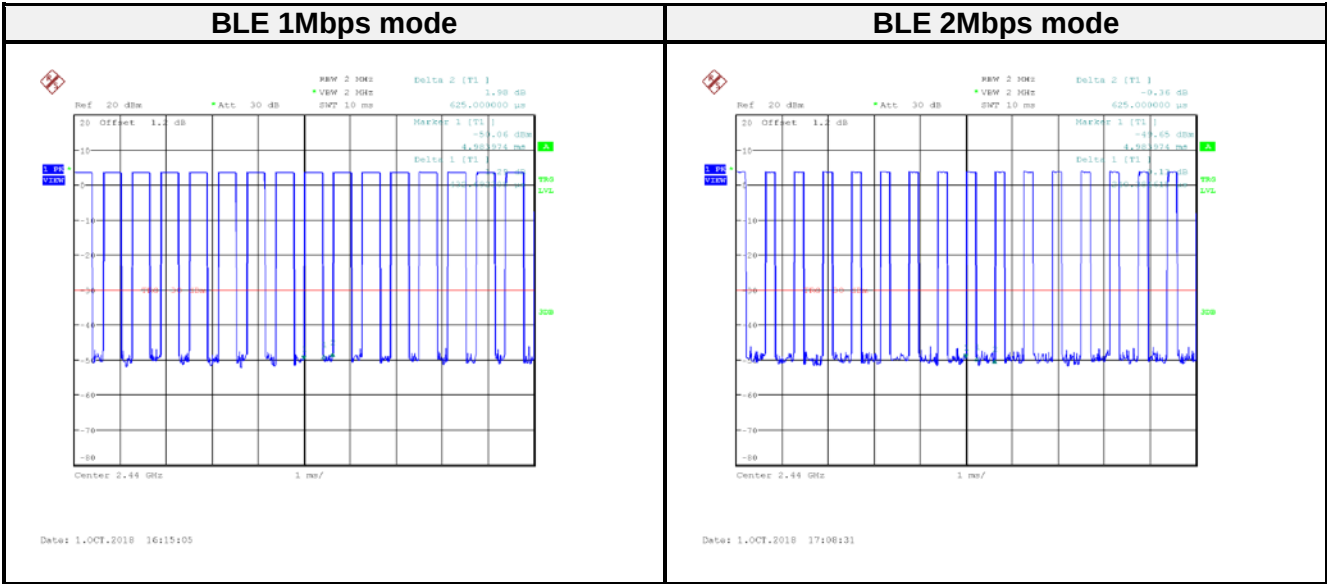

* Duty Factor = 10*log (1/Duty cycle)

3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

4.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,j}} \leq 1$$

4.2 RF Exposure Evaluation Result

MPE evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi 2.4G	2412-2462	3.45	2.213	28.00	630.957	20	0.2778	1
BLE	2402-2480	4.85	3.055	4.00	2.51	20	0.0015	1

The Wi-Fi 2.4G and BLE can transmit simultaneously:

$$=S_{\text{Wi-Fi}}/S_{\text{limit-Wi-Fi}} + S_{\text{BLE}}/S_{\text{limit-BLE}} = 0.2778 + 0.0015 = 0.2793 < 1.0$$

Result: MPE evaluation meet 20 cm the requirement of standard.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6 dBi

5.2 Antenna List and Details

Manufacturer	Model	Antenna Type	Antenna Gain	Result
InnoComm	CM05PCB	PCB Antenna	3.45 dBi for Wi-Fi	Compliance
InnoComm	CM05PCB	PCB Antenna	4.85 dBi for BLE	Compliance

The EUT has an antenna permanently attached arrangement, fulfill the requirement of this section.

6 FCC §15.207 – AC Line Conducted Emissions

6.1 Applicable Standard

According to FCC §15.207


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required

6.2 EUT Setup and Test Procedure

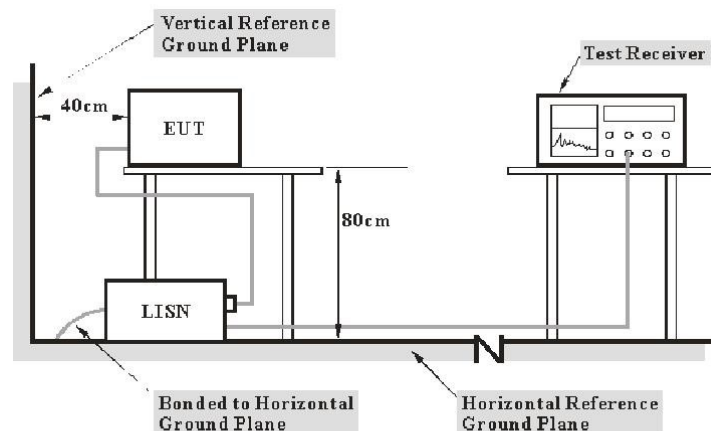

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz

During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Date	Calibration Due Date
LISN	Rohde & Schwarz	ENV216	101612	2018/02/22	2019/02/21
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2017/11/06	2018/11/05
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM104	2018/08/03	2019/08/02
RF Cable	EMEC	EM-CB5D	001	2018/07/02	2019/07/01
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


6.4 Test Environmental Conditions

Temperature:	22.1 °C
Relative Humidity:	61.0 %
ATM Pressure:	1015 hPa

The testing was performed by Eric Lee from 2018-10-30.

6.5 AC Line Conducted Emission Test Plot and Data

Mode: AC 120V/60 Hz, Line, Wi-Fi mode.

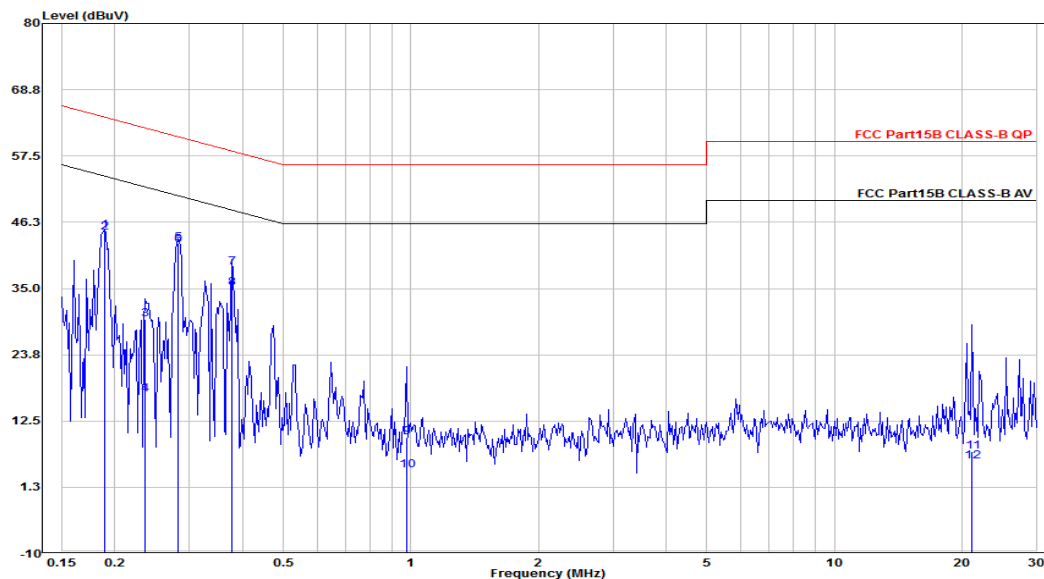

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Over limit (dB)	Remark
1	0.189	24.93	19.86	44.79	64.08	-19.29	QP
2	0.189	24.66	19.86	44.52	54.08	-9.56	Average
3	0.236	9.90	19.86	29.77	62.23	-32.46	QP
4	0.236	-2.90	19.86	16.97	52.23	-35.26	Average
5	0.281	22.81	19.87	42.67	60.77	-18.10	QP
6	0.281	22.46	19.87	42.33	50.77	-8.44	Average
7	0.378	18.66	19.87	38.53	58.32	-19.79	QP
8	0.378	15.28	19.87	35.15	48.32	-13.17	Average
9	0.976	-10.18	19.90	9.72	56.00	-46.28	QP
10	0.976	-15.75	19.90	4.15	46.00	-41.85	Average
11	21.129	-12.89	20.17	7.28	60.00	-52.72	QP
12	21.129	-14.57	20.17	5.60	50.00	-44.40	Average


Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

Mode: AC 120V/60 Hz, Neutral, Wi-Fi mode.

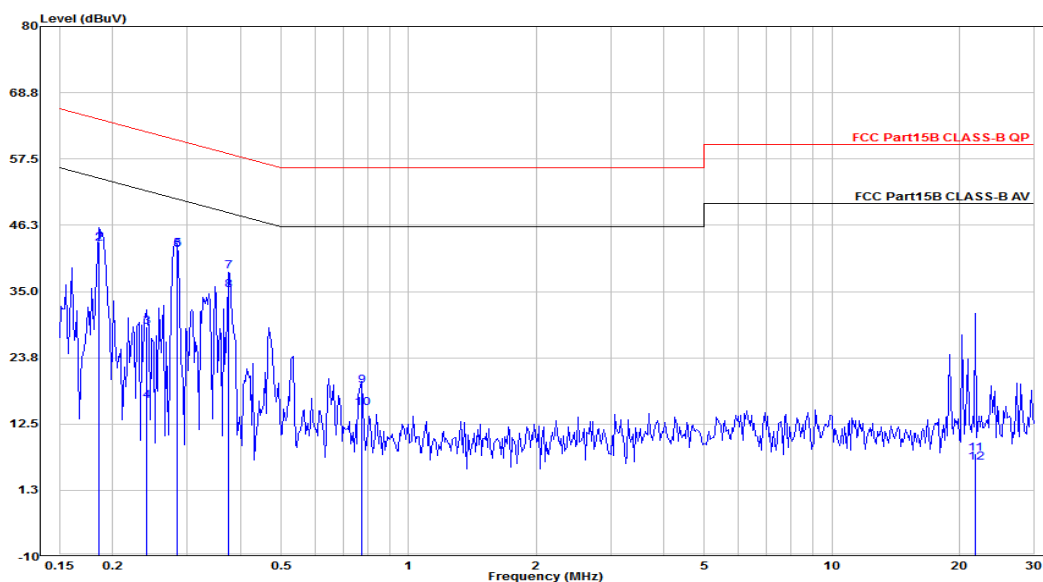

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Over limit (dB)	Remark
1	0.186	23.57	19.86	43.43	64.21	-20.78	QP
2	0.186	23.28	19.86	43.14	54.21	-11.07	Average
3	0.240	9.16	19.86	29.02	62.10	-33.07	QP
4	0.240	-3.49	19.86	16.37	52.10	-35.72	Average
5	0.284	22.42	19.86	42.28	60.71	-18.43	QP
6	0.284	22.18	19.86	42.04	50.71	-8.67	Average
7	0.375	18.61	19.86	38.48	58.39	-19.91	QP
8	0.375	15.32	19.86	35.18	48.39	-13.21	Average
9	0.774	-0.86	19.89	19.03	56.00	-36.97	QP
10	0.774	-4.62	19.89	15.27	46.00	-30.73	Average
11	21.813	-12.80	20.22	7.42	60.00	-52.58	QP
12	21.813	-14.21	20.22	6.01	50.00	-43.99	Average


Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

Mode: AC 120V/60 Hz, Line, BLE mode.

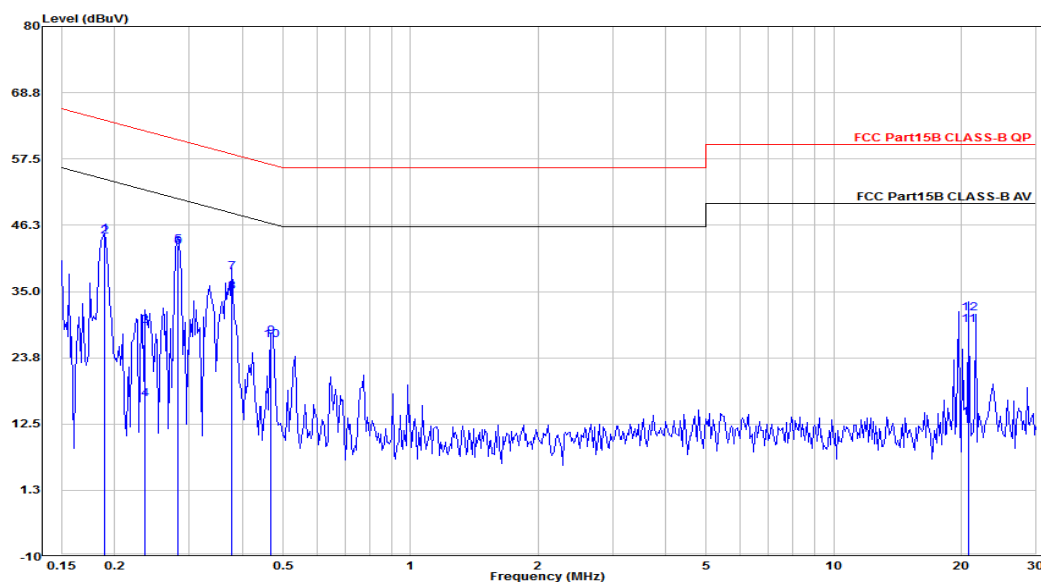

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Over limit (dB)	Remark
1	0.189	24.74	19.86	44.60	64.08	-19.48	QP
2	0.189	24.48	19.86	44.34	54.08	-9.74	Average
3	0.236	9.34	19.86	29.21	62.23	-33.02	QP
4	0.236	-3.18	19.86	16.68	52.23	-35.54	Average
5	0.281	22.95	19.87	42.82	60.77	-17.96	QP
6	0.281	22.65	19.87	42.51	50.77	-8.26	Average
7	0.378	18.40	19.87	38.27	58.32	-20.05	QP
8	0.378	14.98	19.87	34.85	48.32	-13.47	Average
9	0.469	7.43	19.88	27.31	56.54	-29.23	QP
10	0.469	6.86	19.88	26.74	46.54	-19.80	Average
11	20.795	9.16	20.17	29.33	60.00	-30.67	QP
12	20.795	11.17	20.17	31.35	50.00	-18.65	Average


Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

Mode: AC 120V/60 Hz, Neutral, BLE mode.

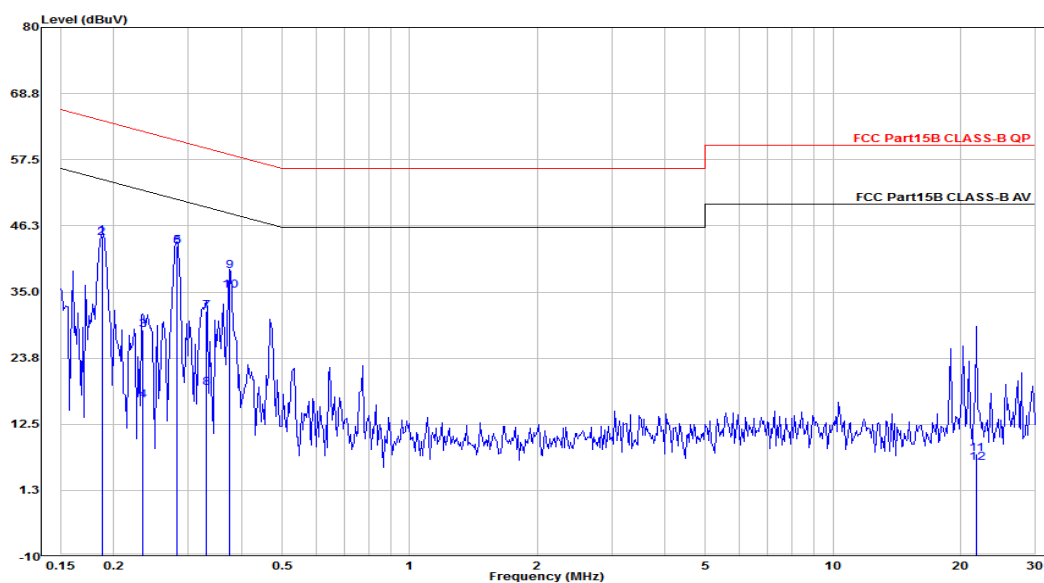

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Over limit (dB)	Remark
1	0.187	24.67	19.86	44.54	64.15	-19.61	QP
2	0.187	24.38	19.86	44.24	54.15	-9.91	Average
3	0.234	8.74	19.86	28.60	62.29	-33.70	QP
4	0.234	-3.31	19.86	16.55	52.29	-35.74	Average
5	0.281	22.96	19.86	42.83	60.77	-17.95	QP
6	0.281	22.75	19.86	42.61	50.77	-8.16	Average
7	0.330	11.87	19.86	31.74	59.45	-27.71	QP
8	0.330	-1.13	19.86	18.73	49.45	-30.72	Average
9	0.375	18.67	19.86	38.53	58.39	-19.86	QP
10	0.375	15.39	19.86	35.26	48.39	-13.13	Average
11	21.813	-12.72	20.22	7.50	60.00	-52.50	QP
12	21.813	-14.28	20.22	5.94	50.00	-44.06	Average

Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1300 – 1427	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1660 – 1710	9.3 – 9.5
6.215 – 6.218	108 – 121.94	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2310 – 2390	14.47 – 14.5
8.291 – 8.294	156.52475 –	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3.3458 – 3.358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 EUT Setup and Test Procedure

Radiation Below 1G

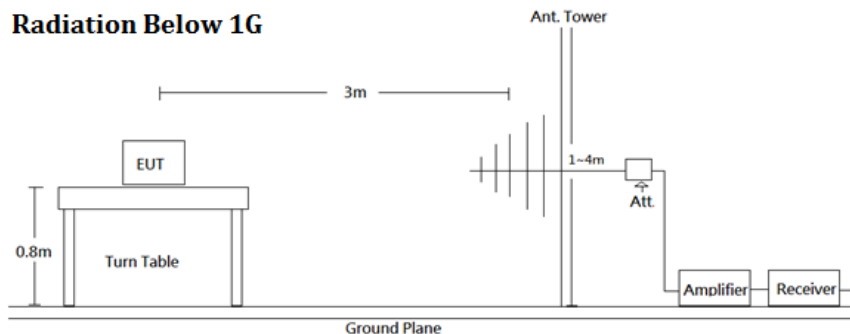

Radiation Above 1G

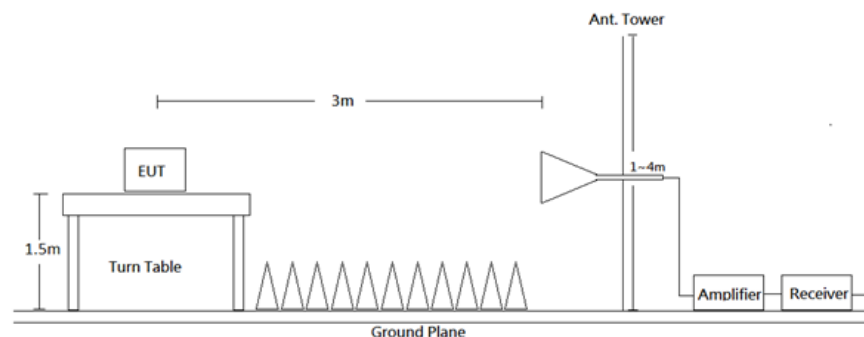

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Detector	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	QP		QP
Above 1 GHz	1 MHz	3 MHz	PK		PK
	1 MHz	3 MHz	RMS	>98%	Ave
	1 MHz	1/T	PK	<98%	Ave

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

7.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
966A Room					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/15542_01	2017/12/20	2018/12/19
Horn Antenna	EMCO	3115	9311-4158	2018/04/20	2019/04/19
Horn Antenna	ETS-Lindgren	3116	62638	2018/08/29	2019/08/28
Preamplifier	Sonoma	310N	130602	2018/07/04	2019/07/03
Preamplifier	EM Electronics Corp.	EM01G18G	060657	2017/12/14	2018/12/13
Microwave Preamplifier	EM Electronics Corporation	EM18G40G	060656	2018/01/15	2019/01/14
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2017/11/06	2018/11/05
Spectrum Analyzer	Rohde & Schwarz	FSV40	101435	2018/02/12	2019/02/13
Micro flex Cable	UTIFLEX	FSCM 64639 / (2M)	93D0127	2018/07/31	2019/07/30
Micro flex Cable	UTIFLEX	UFA210A-1-3149-300300	MFR64639 226389-001	2017/11/10	2018/11/09
Micro flex Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2018/03/05	2019/03/04
Micro flex Cable	ROSNOL	K1K50-UP0264-K1K50-80CM	160309-2	2018/01/17	2019/01/16
20 dB Attenuator	NCL	BW-S20W5+	NA	Each Use	/
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	060772	N.C.R	N.C.R
Software	Farad	EZ EMC	BACL-03A1	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2018/05/04	2019/05/03
Cable	WOKEN	SFL402	S02-160323-07	2018/02/12	2019/02/11

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

7.4 Test Environmental Conditions


Temperature:	22.1 °C
Relative Humidity:	61.0 %
ATM Pressure:	1015 hPa


The testing was performed by Eric Lee from 2018-10-01 to 2018-10-12.

7.5 Radiated Emission Test Plot and Data

Wi-Fi 2.4G Mode: Transmitting Mode (Pre-scan with three orthogonal axis, and worse case as X axis)

Below 1G (30 MHz-1 GHz): the output power worst case is IEEE 802.11n HT20 Middle Channel.

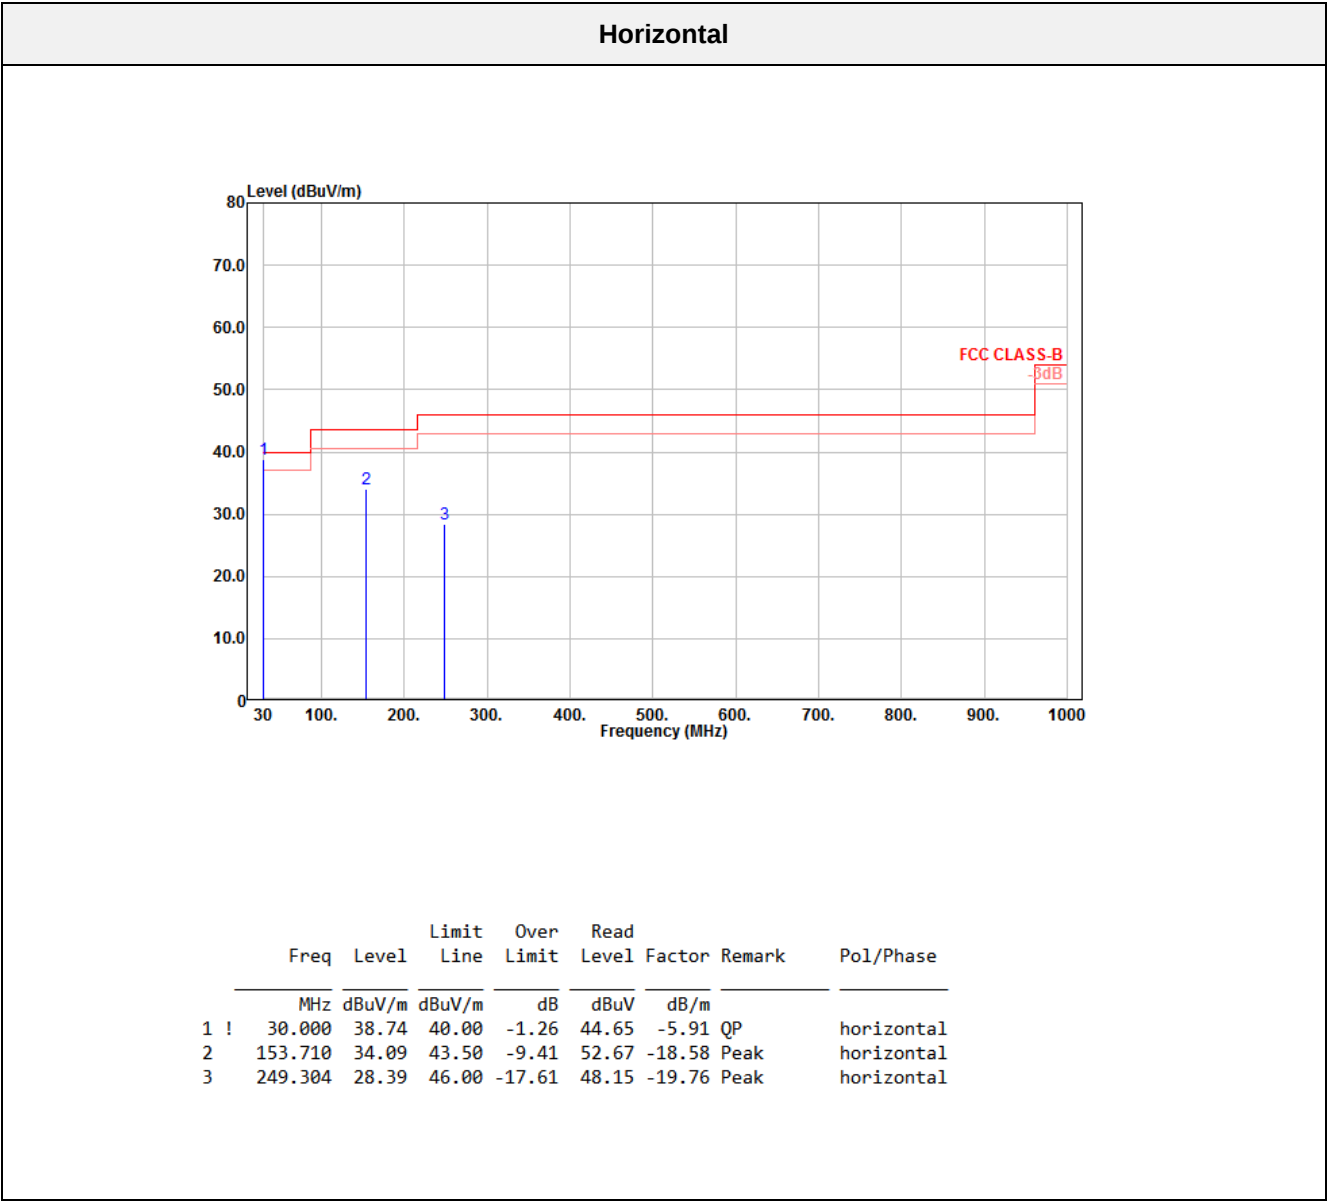

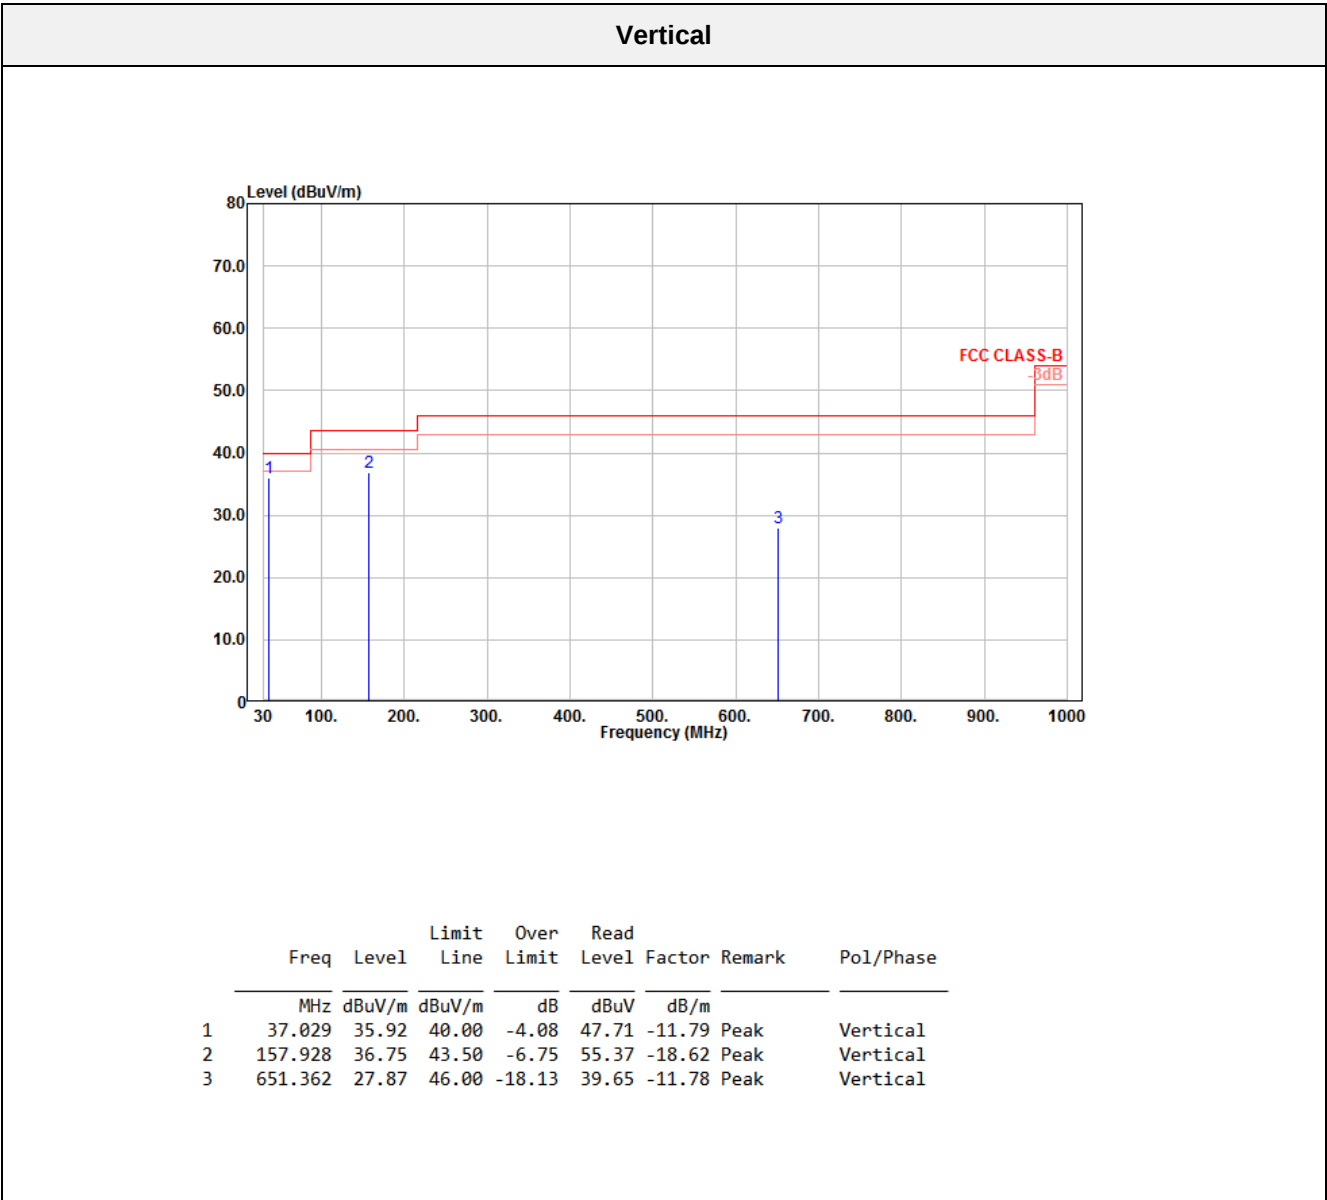

IEEE 802.11b mode**Fundamental and Band Edge:**

Pre-scan with Horizontal and Vertical, the worst case worse case was Horizontal.

Low CH Horizontal Peak							Low CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2386.720	54.35	74.00	-19.65	63.04	-8.69	Peak	2386.272	42.18	54.00	-11.82	50.87	-8.69	Average
2412.144	106.37			115.11	-8.74	Peak	2412.816	103.21			111.95	-8.74	Average
Mid CH Horizontal Peak							Mid CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2317.440	52.84	74.00	-21.16	61.37	-8.53	Peak	2319.600	39.47	54.00	-14.53	48.00	-8.53	Average
2436.960	107.01			115.77	-8.76	Peak	2436.240	103.91			112.67	-8.76	Average
2544.000	52.59	74.00	-21.41	61.32	-8.73	Peak	2517.840	39.81	54.00	-14.19	48.58	-8.77	Average
High CH Horizontal Peak							High CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2461.898	106.53			115.29	-8.76	Peak	2461.212	103.40			112.16	-8.76	Average
2486.888	54.83	74.00	-19.17	63.62	-8.79	Peak	2487.672	41.91	54.00	-12.09	50.70	-8.79	Average

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz:

Low CH											
Horizontal							Vertical				
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV
4824.000	53.35	54.00	-0.65	54.37	-1.02	Average	4824.000	51.72	54.00	-2.28	52.74
4824.000	56.77	74.00	-17.23	57.79	-1.02	Peak	4824.000	54.31	74.00	-19.69	55.33
7236.000	46.20	54.00	-7.80	42.89	3.31	Average	7236.000	44.63	54.00	-9.37	41.37
7236.000	52.83	74.00	-21.17	49.52	3.31	Peak	7236.000	51.90	74.00	-22.10	48.64

Mid CH											
Horizontal							Vertical				
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV
4874.000	53.35	54.00	-0.65	54.23	-0.88	Average	4874.000	52.52	54.00	-1.48	53.40
4874.000	56.01	74.00	-17.99	56.89	-0.88	Peak	4874.000	54.81	74.00	-19.19	55.69
7311.000	47.86	54.00	-6.14	44.38	3.48	Average	7311.000	46.01	54.00	-7.99	42.53
7311.000	53.97	74.00	-20.03	50.49	3.48	Peak	7311.000	53.08	74.00	-20.92	49.60

High CH											
Horizontal							Vertical				
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV
4924.000	52.62	54.00	-1.38	53.37	-0.75	Average	4924.000	50.57	54.00	-3.43	51.32
4924.000	55.23	74.00	-18.77	55.98	-0.75	Peak	4924.000	53.96	74.00	-20.04	54.71
7386.000	46.53	54.00	-7.47	42.75	3.78	Average	7386.000	47.33	54.00	-6.67	43.55
7386.000	53.45	74.00	-20.55	49.67	3.78	Peak	7386.000	53.63	74.00	-20.37	49.85

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

IEEE 802.11g mode**Fundamental and Band Edge:**

Pre-scan with Horizontal and Vertical, the worst case worse case was Horizontal.

Low CH Horizontal Peak							Low CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.520	71.90	74.00	-2.10	80.59	-8.69	Peak	2389.968	52.54	54.00	-1.46	61.23	-8.69	Average
2405.760	106.95			115.68	-8.73	Peak	2405.648	96.76			105.49	-8.73	Average
Mid CH Horizontal Peak							Mid CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2385.360	56.05	74.00	-17.95	64.74	-8.69	Peak	2390.000	40.46	54.00	-13.54	49.15	-8.69	Average
2444.640	111.23			119.99	-8.76	Peak	2443.680	100.92			109.68	-8.76	Average
2484.000	68.82	74.00	-5.18	77.60	-8.78	Peak	2483.500	52.14	54.00	-1.86	60.92	-8.78	Average
High CH Horizontal Peak							High CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2468.268	106.47			115.23	-8.76	Peak	2468.562	95.93			104.69	-8.76	Average
2483.500	72.01	74.00	-1.99	80.79	-8.78	Peak	2483.500	51.43	54.00	-2.57	60.21	-8.78	Average

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz:

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4824.000	39.55	54.00	-14.45	40.57	-1.02	Average	4824.000	37.37	54.00	-16.63	38.39	-1.02	Average
4824.000	54.75	74.00	-19.25	55.77	-1.02	Peak	4824.000	48.49	74.00	-25.51	49.51	-1.02	Peak
7236.000	39.15	54.00	-14.85	35.80	3.35	Average	7236.000	38.03	54.00	-15.97	34.77	3.26	Average
7236.000	55.15	74.00	-18.85	51.80	3.35	Peak	7236.000	54.05	74.00	-19.95	50.79	3.26	Peak

Mid CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4874.000	48.97	54.00	-5.03	49.85	-0.88	Average	4874.000	46.02	54.00	-7.98	46.90	-0.88	Average
4874.000	63.94	74.00	-10.06	64.82	-0.88	Peak	4874.000	59.64	74.00	-14.36	60.52	-0.88	Peak
7311.000	51.86	54.00	-2.14	48.38	3.48	Average	7311.000	52.13	54.00	-1.87	48.65	3.48	Average
7311.000	63.62	74.00	-10.38	60.14	3.48	Peak	7311.000	65.46	74.00	-8.54	61.98	3.48	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4924.000	35.07	54.00	-18.93	35.82	-0.75	Average	4924.000	34.87	54.00	-19.13	35.62	-0.75	Average
4924.000	50.07	74.00	-23.93	50.82	-0.75	Peak	4924.000	47.07	74.00	-26.93	47.82	-0.75	Peak
7386.000	36.70	54.00	-17.30	32.89	3.81	Average	7386.000	36.48	54.00	-17.52	32.67	3.81	Average
7386.000	51.49	74.00	-22.51	47.68	3.81	Peak	7386.000	52.37	74.00	-21.63	48.56	3.81	Peak

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

IEEE 802.11n HT20 mode**Fundamental and Band Edge:**

Pre-scan with Horizontal and Vertical, the worst case worse case was Horizontal.

Low CH Horizontal Peak							Low CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2390.000	72.42	74.00	-1.58	81.11	-8.69	Peak	2390.000	50.47	54.00	-3.53	59.16	-8.69	Average
2418.976	105.96			114.71	-8.75	Peak	2411.584	95.16			103.90	-8.74	Average
Mid CH Horizontal Peak							Mid CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.000	62.51	74.00	-11.49	71.20	-8.69	Peak	2390.000	40.58	54.00	-13.42	49.27	-8.69	Average
2443.920	111.69			120.45	-8.76	Peak	2443.920	100.03			108.79	-8.76	Average
2484.960	71.39	74.00	-2.61	80.18	-8.79	Peak	2483.500	52.86	54.00	-1.14	61.64	-8.78	Average
High CH Horizontal Peak							High CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2468.856	105.85			114.61	-8.76	Peak	2462.388	94.34			103.10	-8.76	Average
2483.500	72.88	74.00	-1.12	81.66	-8.78	Peak	2483.500	50.10	54.00	-3.90	58.88	-8.78	Average

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz:

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4824.000	34.70	54.00	-19.30	35.72	-1.02	Average	4924.000	30.49	54.00	-23.51	31.24	-0.75	Average
4824.000	49.51	74.00	-24.49	50.53	-1.02	Peak	4924.000	43.62	74.00	-30.38	44.37	-0.75	Peak
7236.000	34.99	54.00	-19.01	31.68	3.31	Average	7236.000	35.98	54.00	-18.02	32.67	3.31	Average
7236.000	45.71	74.00	-28.29	42.40	3.31	Peak	7236.000	52.86	74.00	-21.14	49.55	3.31	Peak

Mid CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4874.000	48.83	54.00	-5.17	49.71	-0.88	Average	4874.000	45.57	54.00	-8.43	46.45	-0.88	Average
4876.000	63.87	74.00	-10.13	64.75	-0.88	Peak	4874.000	59.82	74.00	-14.18	60.70	-0.88	Peak
7311.000	51.36	54.00	-2.64	47.88	3.48	Average	7311.000	50.39	54.00	-3.61	46.91	3.48	Average
7311.000	66.45	74.00	-7.55	62.97	3.48	Peak	7311.000	65.45	74.00	-8.55	61.97	3.48	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4924.000	33.45	54.00	-20.55	34.20	-0.75	Average	4924.000	33.90	54.00	-20.10	34.65	-0.75	Average
4924.000	48.56	74.00	-25.44	49.31	-0.75	Peak	4924.000	46.16	74.00	-27.84	46.91	-0.75	Peak
7386.000	34.26	54.00	-19.74	30.45	3.81	Average	7386.000	35.76	54.00	-18.24	31.95	3.81	Average
7386.000	49.42	74.00	-24.58	45.61	3.81	Peak	7386.000	52.49	74.00	-21.51	48.68	3.81	Peak

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

IEEE 802.11n HT40 mode**Fundamental and Band Edge:**

Pre-scan with Horizontal and Vertical, the worst case worse case was Horizontal.

Low CH Horizontal Peak							Low CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.276	71.45	74.00	-2.55	80.14	-8.69	Peak	2390.000	53.08	54.00	-0.92	61.77	-8.69	Average
2415.996	103.05			111.80	-8.75	Peak	2429.988	89.58			98.34	-8.76	Average
Mid CH Horizontal Peak							Mid CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.960	66.21	74.00	-7.79	74.90	-8.69	Peak	2390.000	50.04	54.00	-3.96	58.73	-8.69	Average
2452.320	106.07			114.82	-8.75	Peak	2449.200	92.09			100.85	-8.76	Average
2484.480	69.69	74.00	-4.31	78.48	-8.79	Peak	2483.500	52.74	54.00	-1.26	61.52	-8.78	Average
High CH Horizontal Peak							High CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2467.046	102.85			111.61	-8.76	Peak	2448.756	88.69			97.45	-8.76	Average
2483.684	69.85	74.00	-4.15	78.63	-8.78	Peak	2483.500	52.54	54.00	-1.46	61.32	-8.78	Average

$Result = Reading + Correct Factor$

$Margin = Result - Limit$

$Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain$

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz:

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4844.000	35.87	54.00	-18.13	36.84	-0.97	Average	4844.000	35.92	54.00	-18.08	36.89	-0.97	Average
4844.000	45.85	74.00	-28.15	46.82	-0.97	Peak	4844.000	47.62	74.00	-26.38	48.59	-0.97	Peak
7266.000	35.04	54.00	-18.96	31.64	3.40	Average	7266.000	33.06	54.00	-20.94	29.66	3.40	Average
7266.000	48.27	74.00	-25.73	44.87	3.40	Peak	7266.000	49.07	74.00	-24.93	45.67	3.40	Peak

Mid CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4874.000	38.53	54.00	-15.47	39.49	-0.96	Average	4874.000	35.96	54.00	-18.04	36.84	-0.88	Average
4874.000	53.09	74.00	-20.91	54.05	-0.96	Peak	4874.000	51.75	74.00	-22.25	52.63	-0.88	Peak
7311.000	38.15	54.00	-15.85	34.60	3.55	Average	7311.000	38.07	54.00	-15.93	34.59	3.48	Average
7311.000	54.18	74.00	-19.82	50.63	3.55	Peak	7311.000	54.87	74.00	-19.13	51.39	3.48	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4904.000	33.95	54.00	-20.05	34.73	-0.78	Average	4904.000	32.38	54.00	-21.62	33.16	-0.78	Average
4904.000	47.06	74.00	-26.94	47.84	-0.78	Peak	4904.000	46.07	74.00	-27.93	46.85	-0.78	Peak
7356.000	34.25	54.00	-19.75	30.55	3.70	Average	7356.000	34.48	54.00	-19.52	30.78	3.70	Average
7356.000	48.59	74.00	-25.41	44.89	3.70	Peak	7356.000	47.68	74.00	-26.32	43.98	3.70	Peak

Result = Reading + Correct Factor


Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain


Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz: the output power worst case is IEEE 802.11n HT20 Middle Channel.

Horizontal

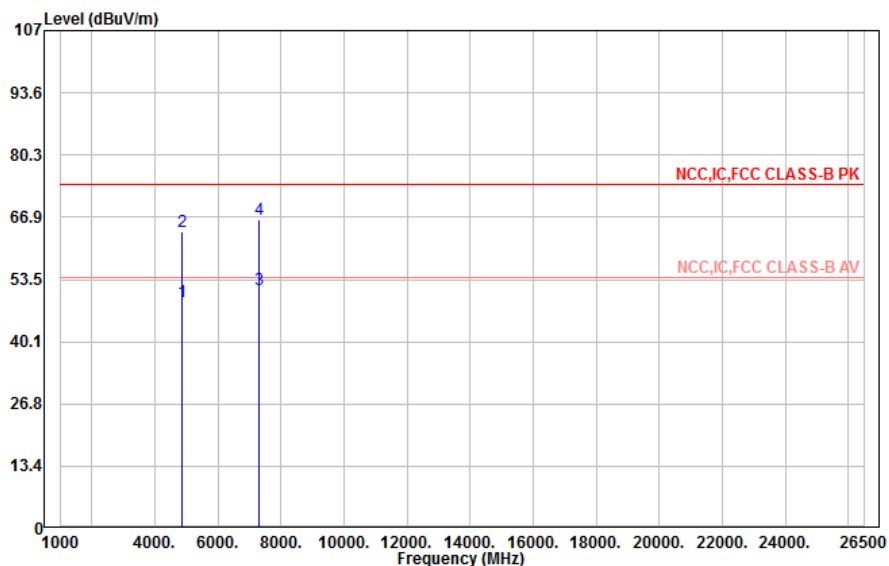



	Freq	Level	Limit	Over	Read			
	MHz	dBuV/m	dBuV/m	Limit	Level	Factor	Remark	Pol/Phase
1 !	4874.000	48.83	54.00	-5.17	49.71	-0.88	Average	horizontal
2 !	4876.000	63.87	74.00	-10.13	64.75	-0.88	Peak	horizontal
3 !	7311.000	51.36	54.00	-2.64	47.88	3.48	Average	horizontal
4 !	7311.000	66.45	74.00	-7.55	62.97	3.48	Peak	horizontal

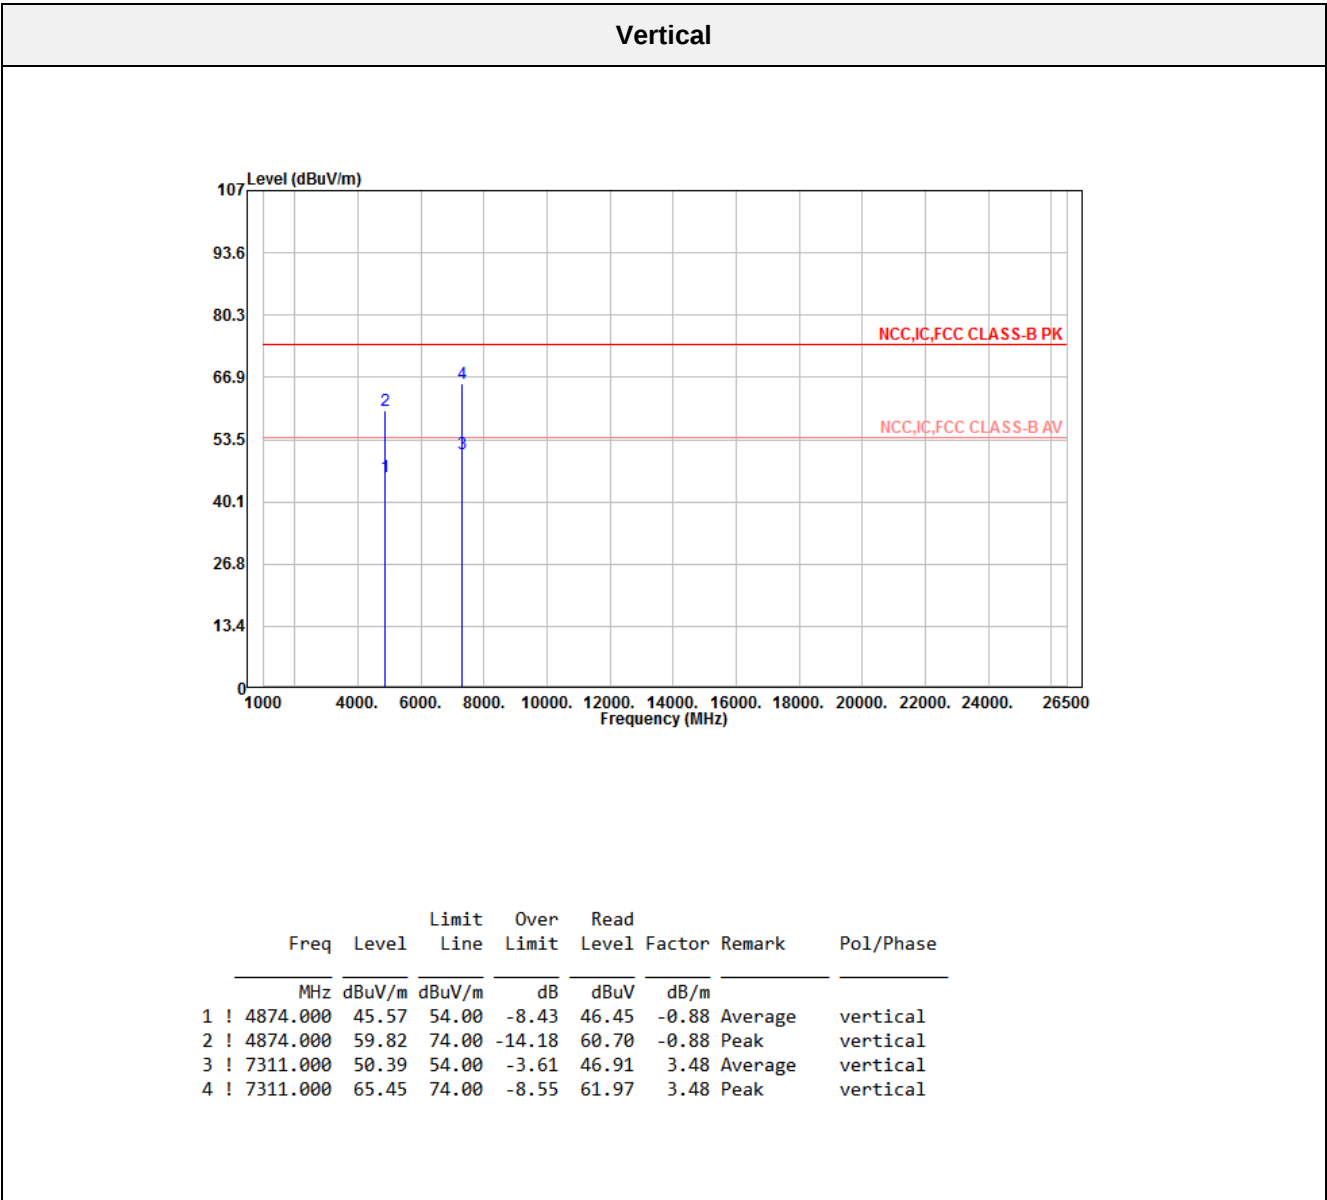

BLE Mode: Transmitting Mode (Pre-scan with three orthogonal axis, and worse case as X axis)

Below 1G (30 MHz-1 GHz): the output power worst case is BLE 2M High Channel.

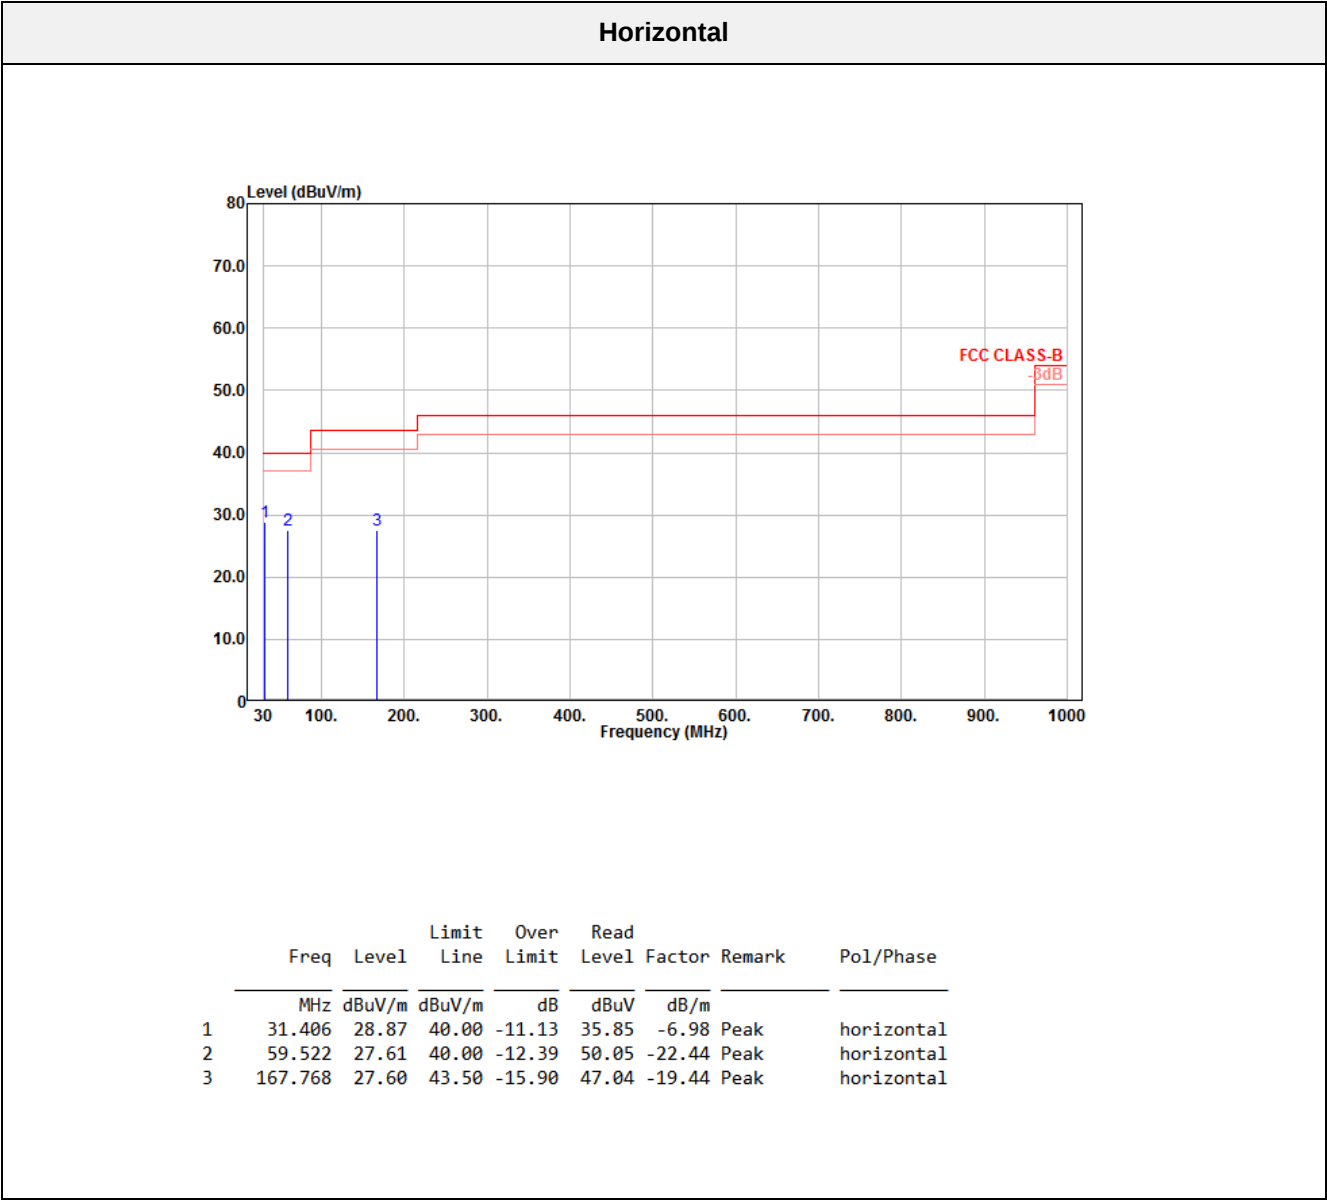

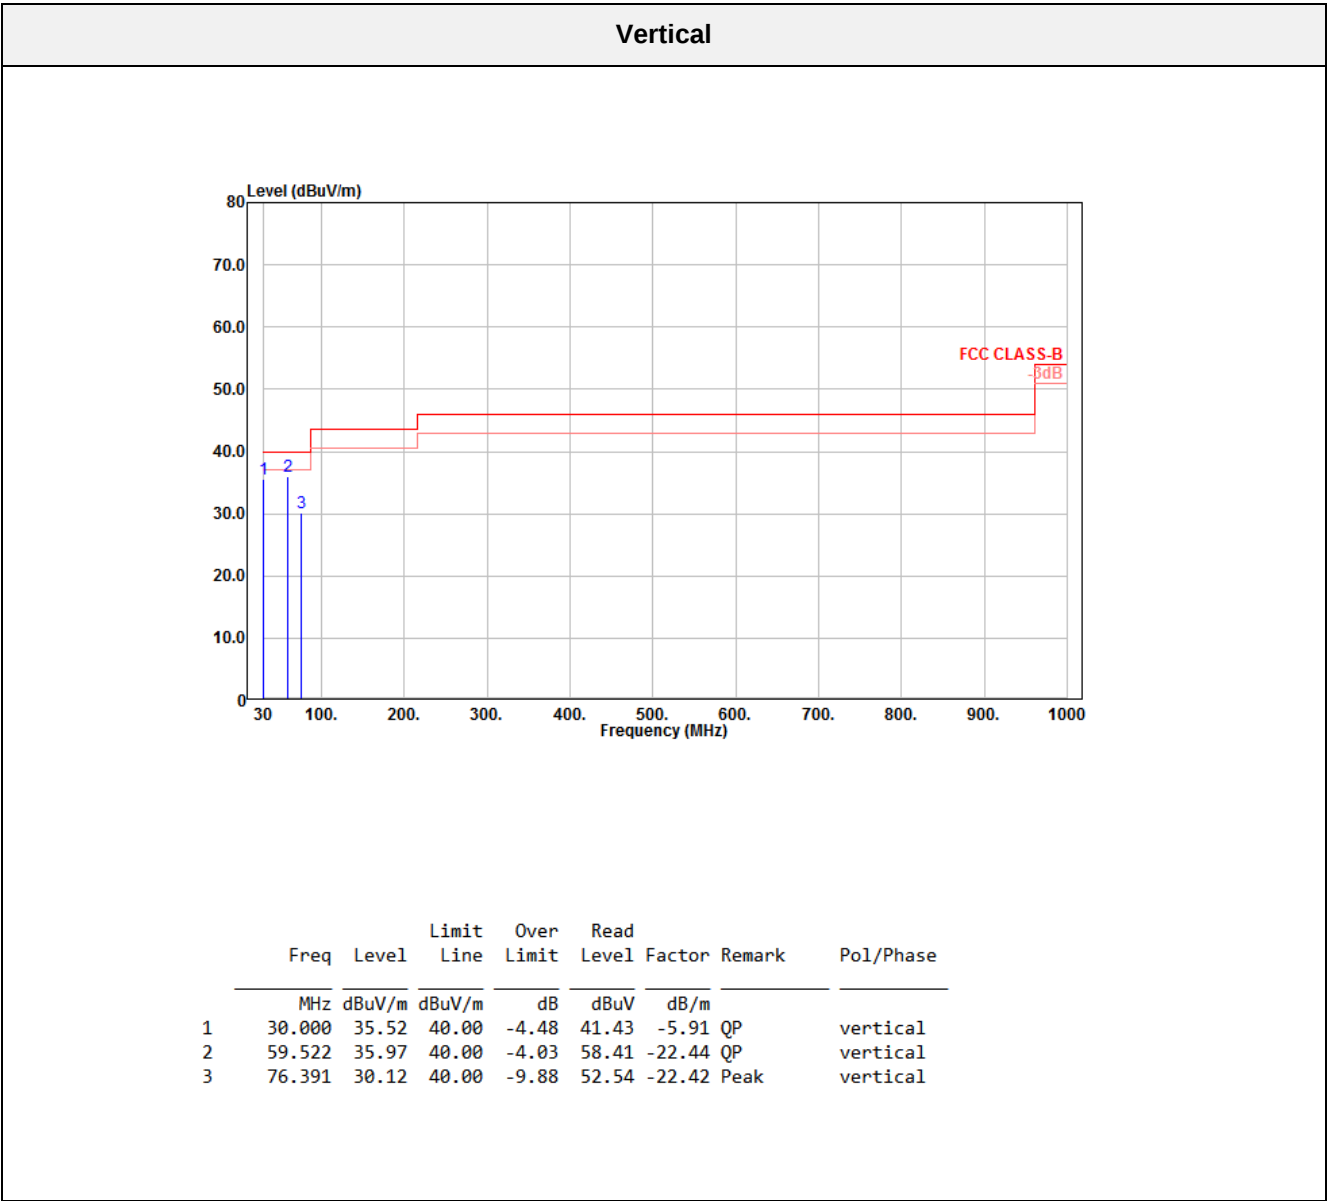

BLE 1 Mbps mode**Fundamental and Band Edge:**

Pre-scan with Horizontal and Vertical, the worst case worse case was Horizontal.

Low CH Horizontal Peak							Low CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.855	52.70	74.00	-21.30	61.19	-8.49	Peak	2337.971	36.29	54.00	-17.71	44.85	-8.56	Average
2401.884			26.48	108.96	-8.48	Peak	2402.174	80.84			89.32	-8.48	Average
Mid CH Horizontal Peak							Mid CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2311.652	53.66	74.00	-20.34	62.28	-8.62	Peak	2312.203	41.80	54.00	-12.20	50.41	-8.61	Average
2439.971	100.66			109.03	-8.37	Peak	2439.971	81.13			89.50	-8.37	Average
2488.435	43.38	74.00	-30.62	51.61	-8.23	Peak	2488.159	34.17	54.00	-19.83	42.40	-8.23	Average
High CH Horizontal Peak							High CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2479.799	99.06			107.31	-8.25	Peak	2480.022	79.81			88.06	-8.25	Average
2483.593	55.40	74.00	-18.60	63.64	-8.24	Peak	2483.704	32.54	54.00	-21.46	40.78	-8.24	Average

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz:

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4804.000	52.86	54.00	-1.14	53.86	-1.00	Average	4804.000	52.38	54.00	-1.62	53.38	-1.00	Average
4804.000	66.97	74.00	-7.03	67.97	-1.00	Peak	4804.000	62.26	74.00	-11.74	63.26	-1.00	Peak
7206.000	44.24	54.00	-9.76	42.45	1.79	Average	7206.000	45.37	54.00	-8.63	43.58	1.79	Average
7206.000	56.46	74.00	-17.54	54.67	1.79	Peak	7206.000	58.30	74.00	-15.70	56.51	1.79	Peak

Mid CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4880.000	52.94	54.00	-1.06	53.79	-0.85	Average	4880.000	51.59	54.00	-2.41	52.44	-0.85	Average
4880.000	65.50	74.00	-8.50	66.35	-0.85	Peak	4880.000	61.50	74.00	-12.50	62.35	-0.85	Peak
7320.000	45.51	54.00	-8.49	43.35	2.16	Average	7320.000	45.78	54.00	-8.22	43.62	2.16	Average
7320.000	57.47	74.00	-16.53	55.31	2.16	Peak	7320.000	59.67	74.00	-14.33	57.51	2.16	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4960.000	53.15	54.00	-0.85	53.95	-0.80	Average	4960.000	52.78	54.00	-1.22	53.58	-0.80	Average
4960.000	66.50	74.00	-7.50	67.30	-0.80	Peak	4960.000	62.17	74.00	-11.83	62.97	-0.80	Peak
7440.000	43.68	54.00	-10.32	44.48	-0.80	Average	7440.000	44.39	54.00	-9.61	41.74	2.65	Average
7440.000	57.10	74.00	-16.90	54.45	2.65	Peak	7440.000	57.03	74.00	-16.97	54.38	2.65	Peak

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

BLE 2 Mbps mode**Fundamental and Band Edge:**

Pre-scan with Horizontal and Vertical, the worst case worse case was Horizontal.

Low CH Horizontal Peak							Low CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.420	51.20	74.00	-22.80	59.69	-8.49	Peak	2356.812	37.91	54.00	-16.09	46.45	-8.54	Average
2402.609	98.41			106.88	-8.47	Peak	2402.029	94.14			102.62	-8.48	Average
Mid CH Horizontal Peak							Mid CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2311.927	49.49	74.00	-24.51	58.10	-8.61	Peak	2311.927	41.71	54.00	-12.29	50.32	-8.61	Average
2439.696	99.52			107.89	-8.37	Peak	2439.971	95.15			103.52	-8.37	Average
2485.130	44.75	74.00	-29.25	52.99	-8.24	Peak	2485.406	37.25	54.00	-16.75	45.49	-8.24	Average
High CH Horizontal Peak							High CH Horizontal Average						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2480.580	99.23			107.48	-8.25	Peak	2480.036	94.84			103.09	-8.25	Average
2484.094	57.12	74.00	-16.88	65.36	-8.24	Peak	2483.500	40.45	54.00	-13.55	48.69	-8.24	Average

$Result = Reading + Correct Factor$

$Margin = Result - Limit$

$Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain$

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz:

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4804.000	41.99	54.00	-12.01	43.02	-1.03	Average	4804.000	40.98	54.00	-13.02	42.01	-1.03	Average
4804.000	60.20	74.00	-13.80	61.23	-1.03	Peak	4804.000	57.64	74.00	-16.36	58.67	-1.03	Peak
7206.000	34.67	54.00	-19.33	32.86	1.81	Average	7206.000	35.55	54.00	-18.45	33.74	1.81	Average
7206.000	44.73	74.00	-29.27	42.92	1.81	Peak	7206.000	47.08	74.00	-26.92	45.27	1.81	Peak

Mid CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4880.000	43.12	54.00	-10.88	44.00	-0.88	Average	4880.000	41.81	54.00	-12.19	42.69	-0.88	Average
4880.000	59.59	74.00	-14.41	60.47	-0.88	Peak	4880.000	55.29	74.00	-18.71	56.17	-0.88	Peak
7320.000	35.03	54.00	-18.97	32.91	2.12	Average	7320.000	36.00	54.00	-18.00	33.88	2.12	Average
7320.000	46.89	74.00	-27.11	44.77	2.12	Peak	7320.000	48.94	74.00	-25.06	46.82	2.12	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
4960.000	41.73	54.00	-12.27	42.52	-0.79	Average	4960.000	41.21	54.00	-12.79	42.01	-0.80	Average
4960.000	58.61	74.00	-15.39	59.40	-0.79	Peak	4960.000	54.22	74.00	-19.78	55.02	-0.80	Peak
7430.435	45.63	74.00	-28.37	43.03	2.60	Peak	7440.000	35.52	54.00	-18.48	32.92	2.60	Average
7440.000	34.63	54.00	-19.37	32.03	2.60	Average	7440.000	46.83	74.00	-27.17	44.23	2.60	Peak


Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Spurious Emission: 1 GHz to 26.5 GHz: the output power worst case is BLE 2M High Channel.

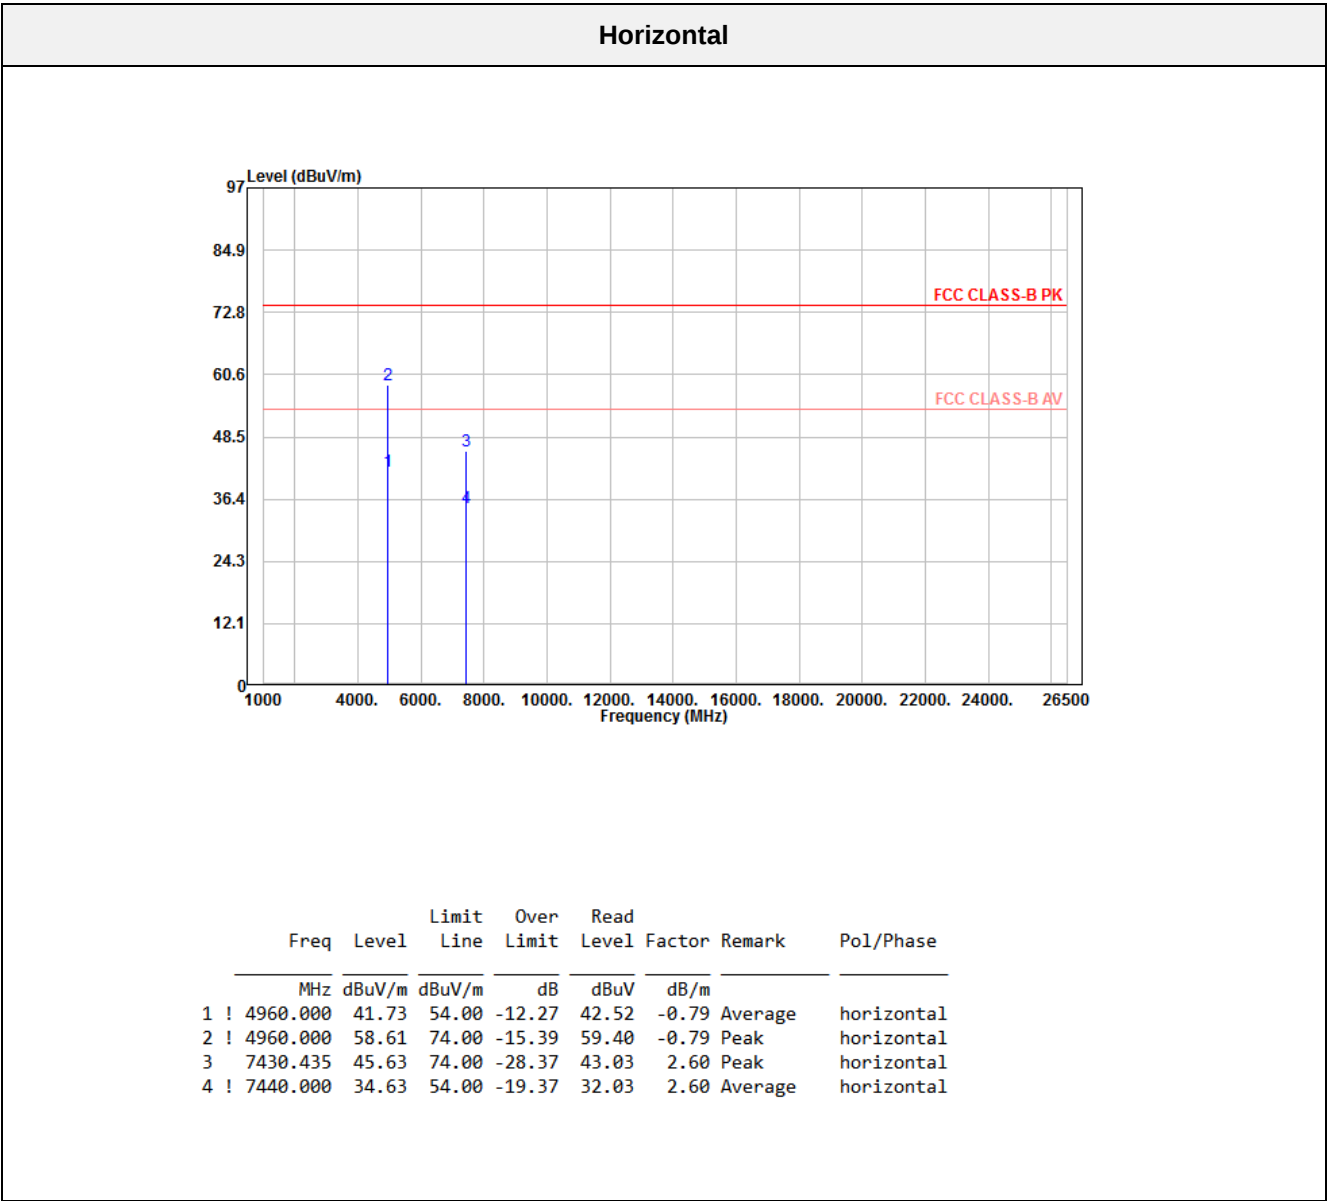

Vertical

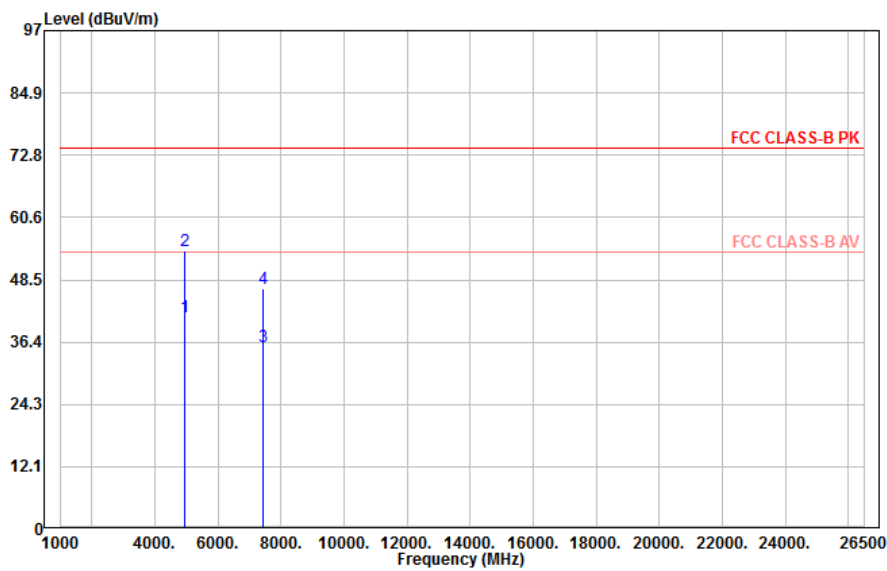


	Freq	Level	Limit	Over	Read			
	MHz	dBuV/m	Line	Limit	Level	Factor	Remark	Pol/Phase
1	4960.000	41.21	54.00	-12.79	42.01	-0.80	Average	vertical
2	4960.000	54.22	74.00	-19.78	55.02	-0.80	Peak	vertical
3	7440.000	35.52	54.00	-18.48	32.92	2.60	Average	vertical
4	7440.000	46.83	74.00	-27.17	44.23	2.60	Peak	vertical


Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
IEEE 802.11b mode				
Low	2412	50.81	≥ 20	Compliance
Mid	2437	51.17	≥ 20	Compliance
High	2462	50.32	≥ 20	Compliance
IEEE 802.11g mode				
Low	2412	54.15	≥ 20	Compliance
Mid	2437	53.62	≥ 20	Compliance
High	2462	50.07	≥ 20	Compliance
IEEE 802.11n HT20 mode				
Low	2412	51.25	≥ 20	Compliance
Mid	2437	52.75	≥ 20	Compliance
High	2462	50.22	≥ 20	Compliance
IEEE 802.11n HT40 mode				
Low	2422	50.40	≥ 20	Compliance
Mid	2437	54.20	≥ 20	Compliance
High	2452	50.24	≥ 20	Compliance
BLE 1 Mbps mode				
Low	2402	36.07	≥ 20	Compliance
Mid	2440	38.85	≥ 20	Compliance
High	2480	39.00	≥ 20	Compliance
BLE 2 Mbps mode				
Low	2402	43.25	≥ 20	Compliance
Mid	2440	38.24	≥ 20	Compliance
High	2480	37.85	≥ 20	Compliance


IEEE 802.11b mode:

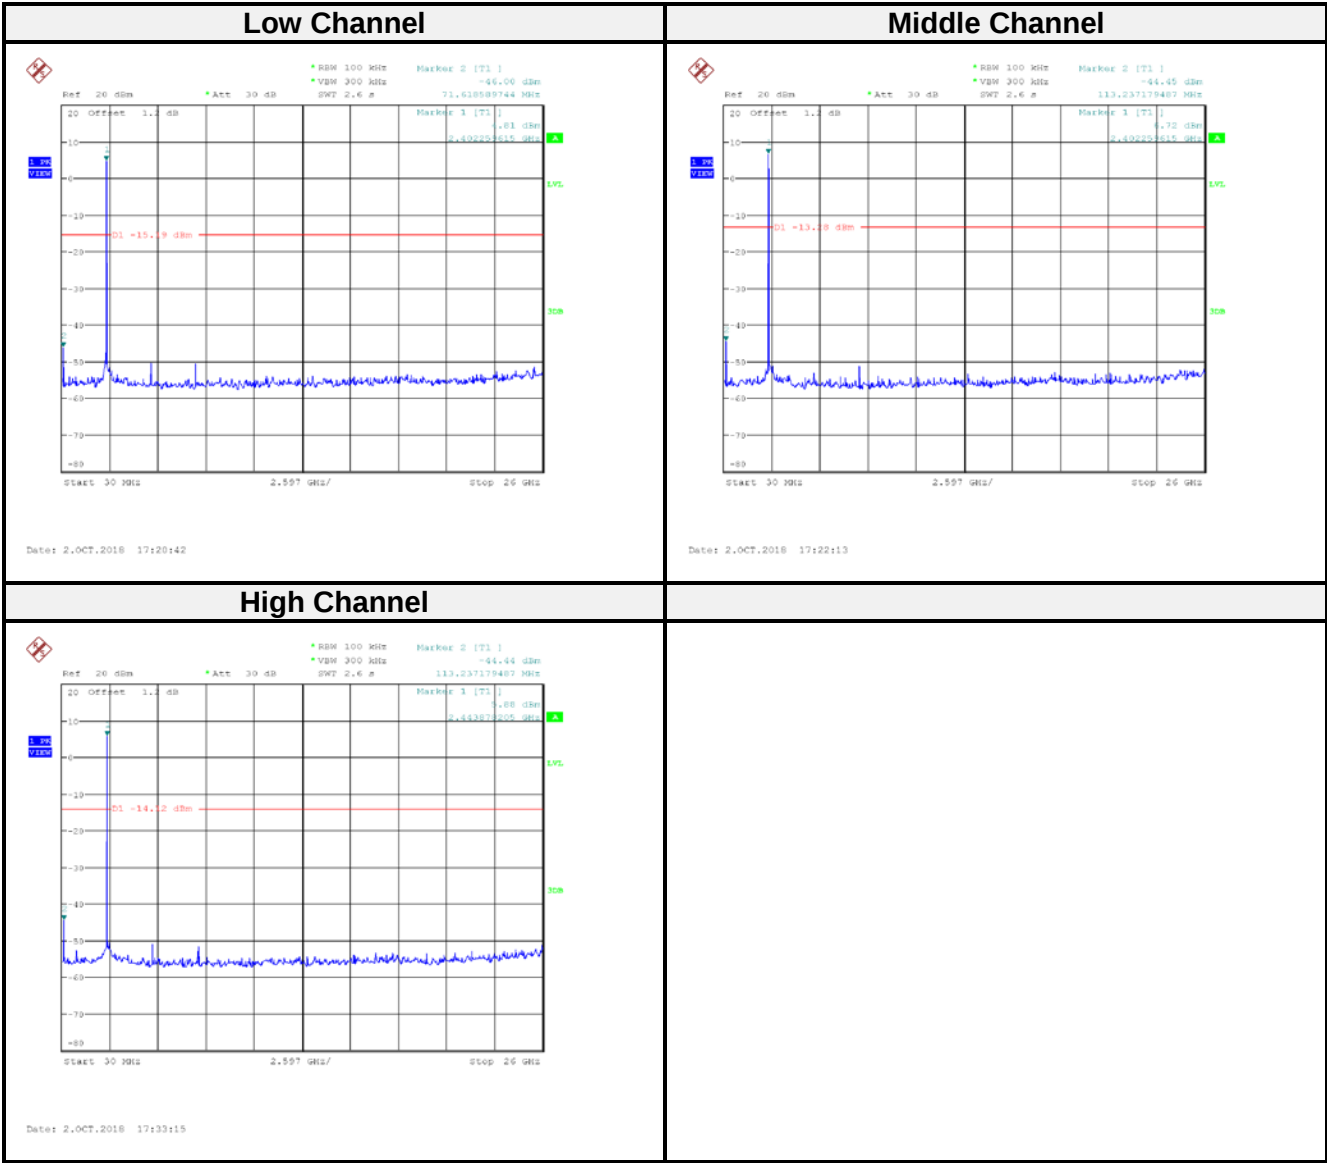


IEEE 802.11g mode:

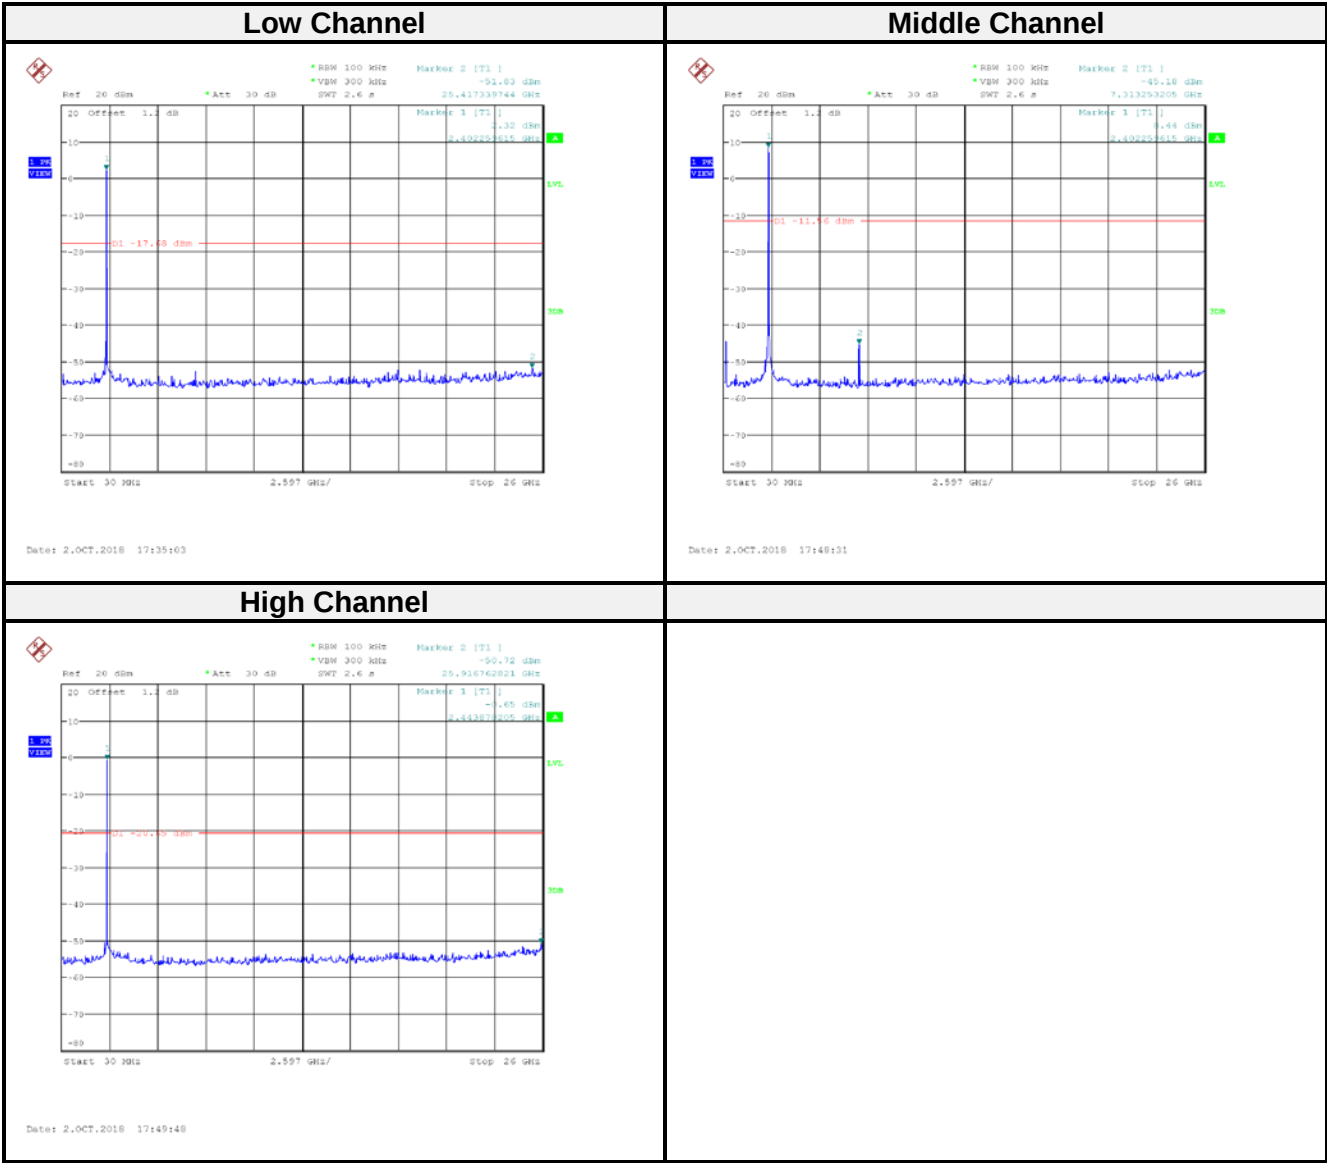


IEEE 802.11n HT20 mode:

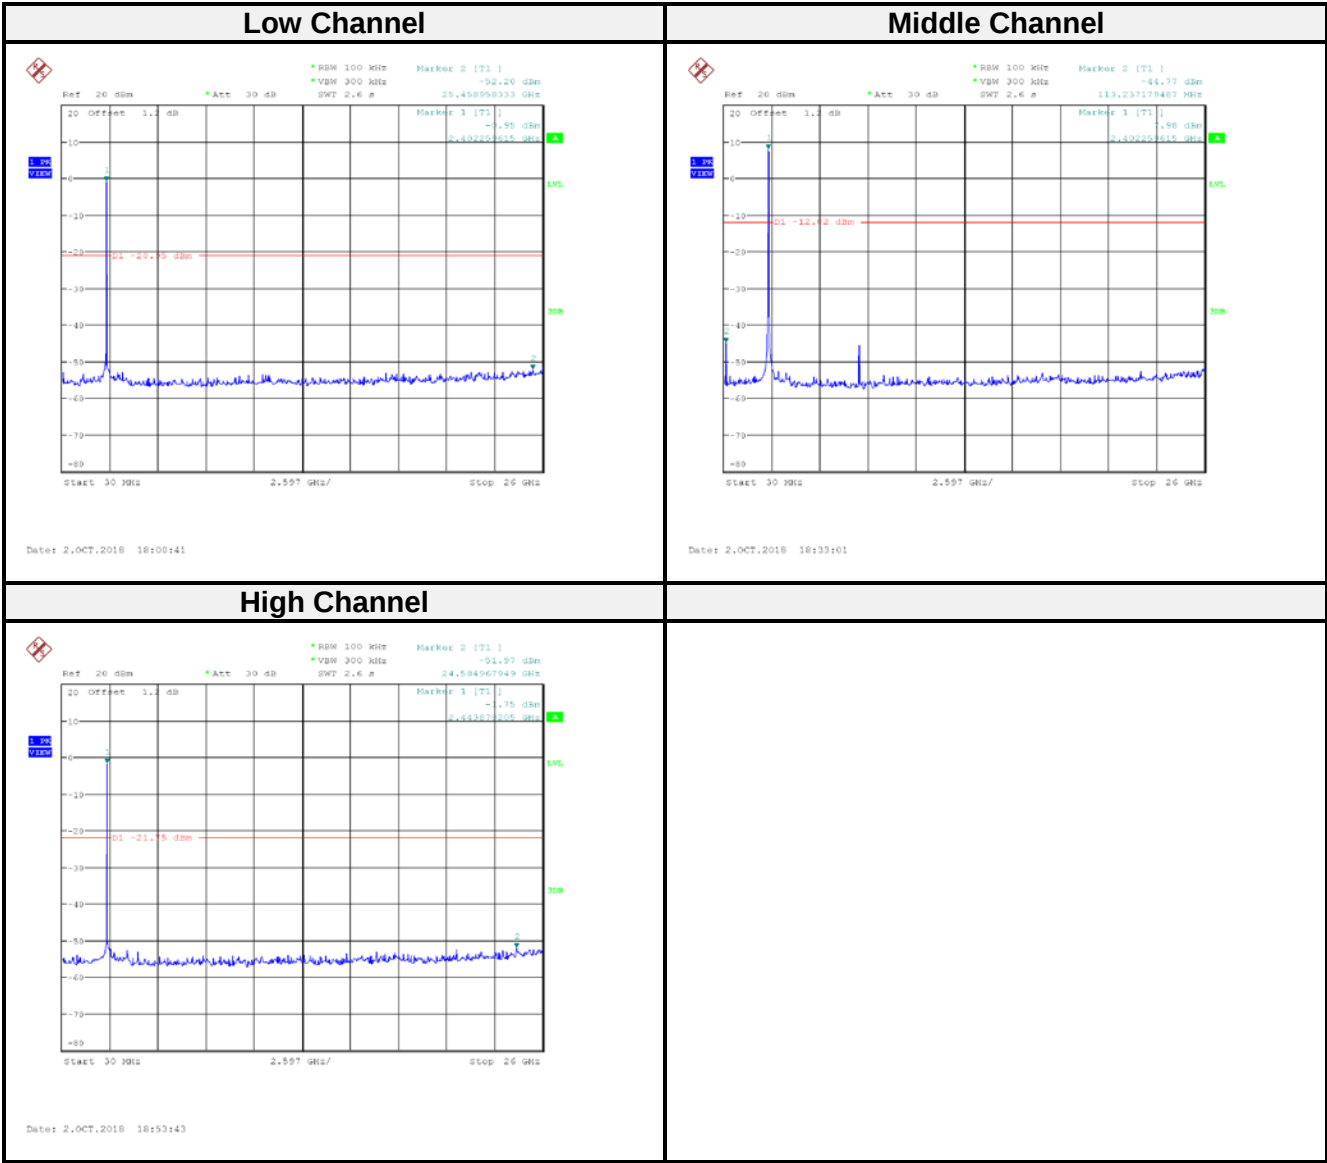


IEEE 802.11n HT40 mode:

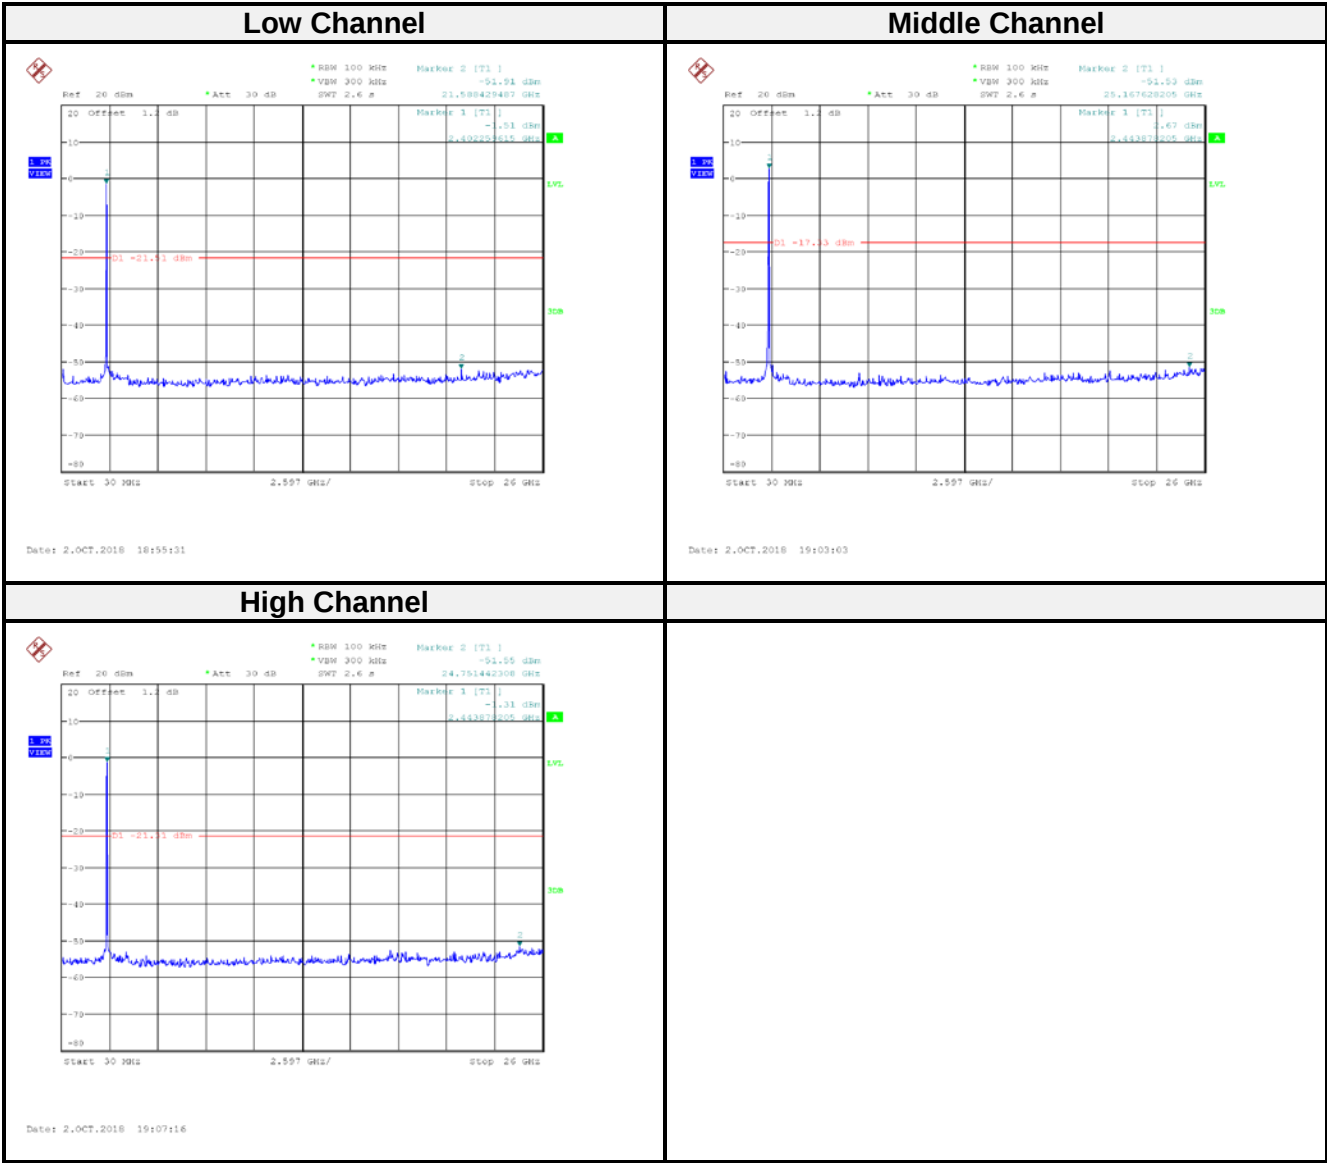

BLE 1 Mbps mode:

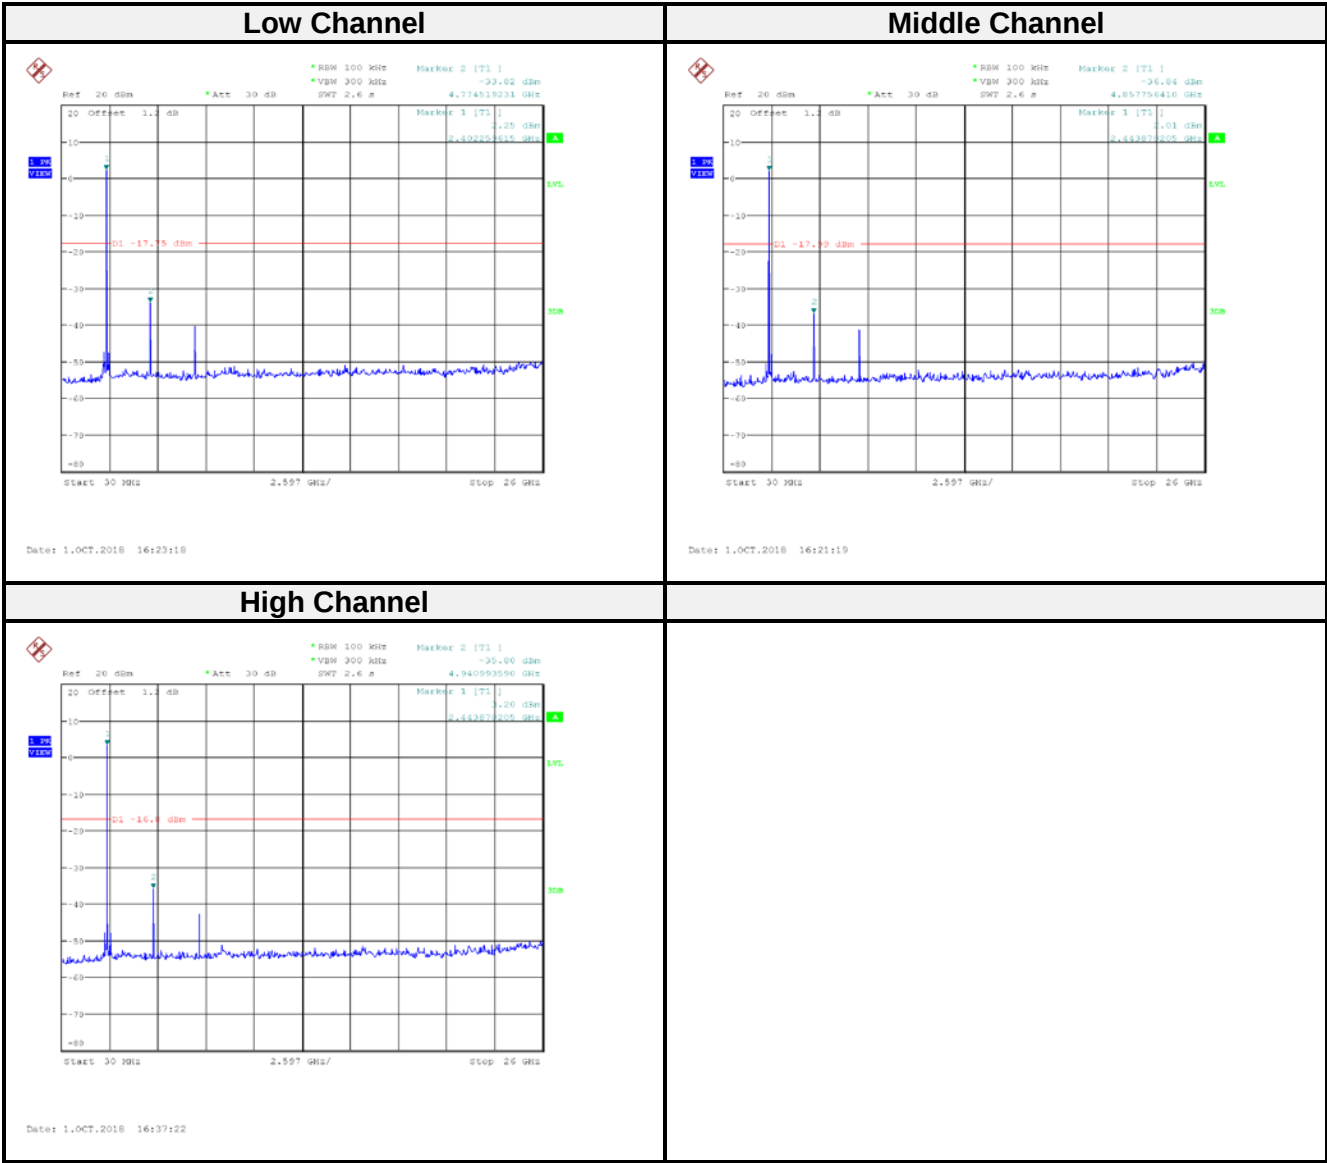

BLE 2 Mbps mode:

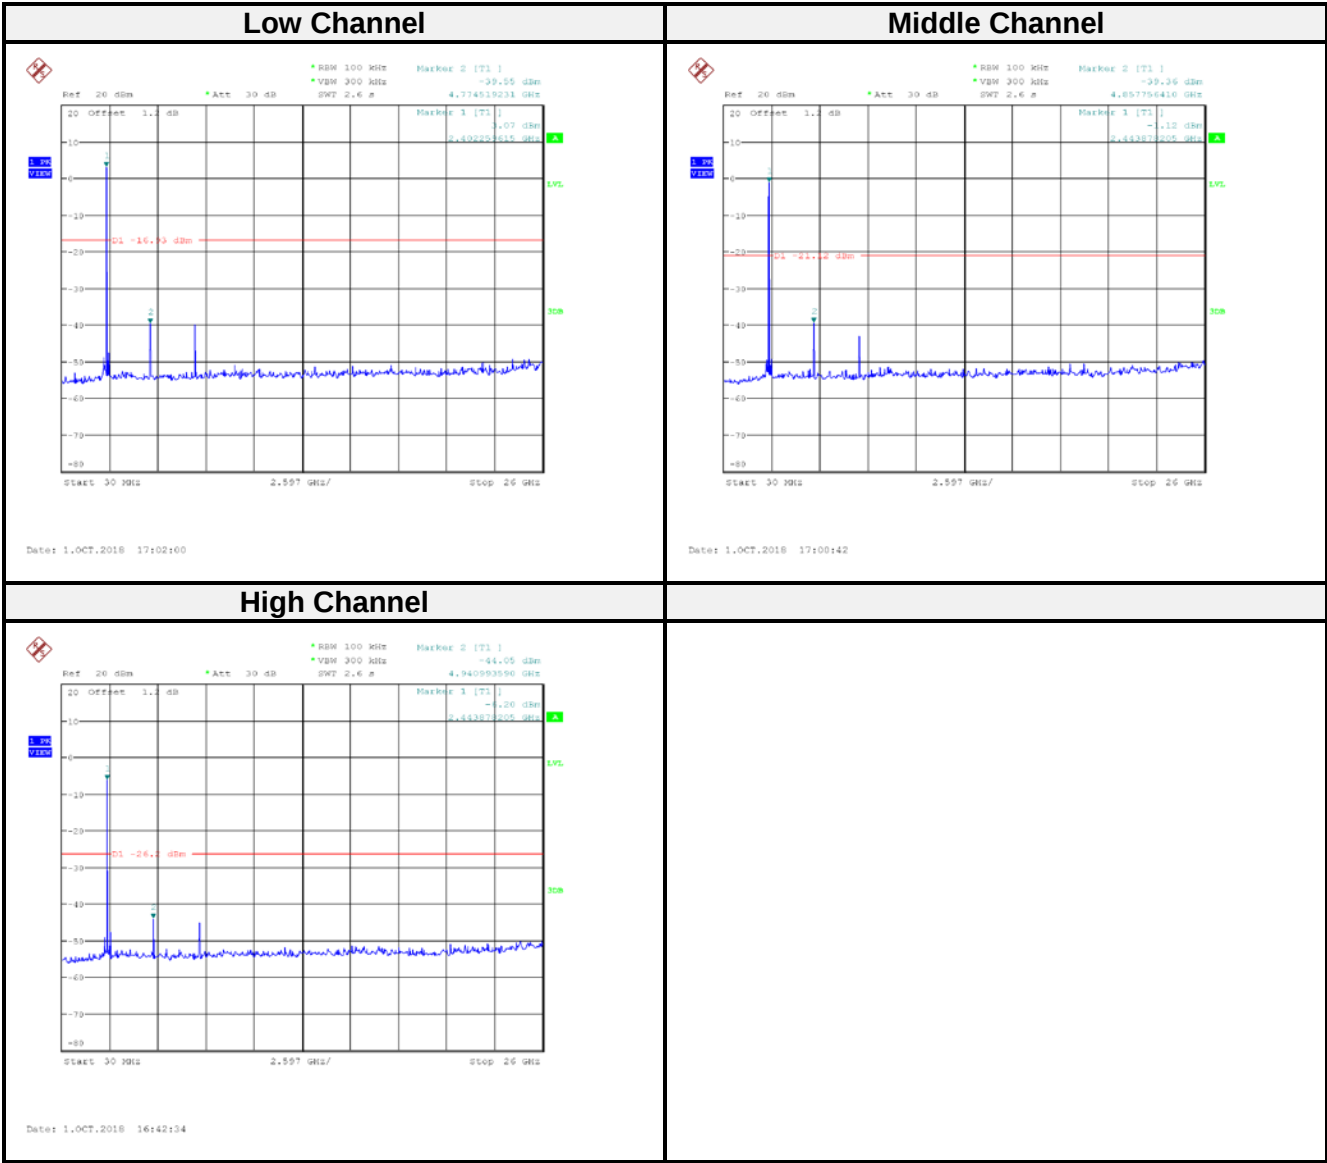

8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a) (2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Test Procedure

According to ANSI C63.10-2013

6 dB Emission Bandwidth

The steps for the first option are as follows:

- a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold.
e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	101140	2017/11/15	2018/11/14
Cable	WOKEN	SFL402	S02-160323-07	2018/02/12	2019/02/11

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

8.4 Test Environmental Conditions

Temperature:	22.1 °C
Relative Humidity:	61.0 %
ATM Pressure:	1015 hPa


The testing was performed by Eric Lee on 2018-10-01.

8.5 Test Results


Channel	Frequency (MHz)	99% Bandwidth (MHz)	6 dB OBW (MHz)	6dB Limit (MHz)	Result
IEEE 802.11b mode					
Low	2412	10.1282	14.8237	> 0.5	Compliance
Middle	2437	10.1282	14.8237	> 0.5	Compliance
High	2462	10.1282	14.9038	> 0.5	Compliance
IEEE 802.11g mode					
Low	2412	16.4103	17.3077	> 0.5	Compliance
Middle	2437	16.3462	23.3974	> 0.5	Compliance
High	2462	16.4103	17.3077	> 0.5	Compliance
IEEE 802.11n HT20 mode					
Low	2412	17.0513	17.8686	> 0.5	Compliance
Middle	2437	17.0513	31.4103	> 0.5	Compliance
High	2462	16.9872	17.8686	> 0.5	Compliance
IEEE 802.11n HT40 mode					
Low	2422	35.5128	36.0577	> 0.5	Compliance
Middle	2437	35.5128	36.0577	> 0.5	Compliance
High	2452	35.3846	36.0577	> 0.5	Compliance
BLE 1Mbps mode					
Low	2402	1.0481	0.7212	> 0.5	Compliance
Middle	2440	1.0529	0.7212	> 0.5	Compliance
High	2480	1.0481	0.7115	> 0.5	Compliance
BLE 2Mbps mode					
Low	2402	2.0513	1.1538	> 0.5	Compliance
Middle	2440	2.0513	1.1538	> 0.5	Compliance
High	2480	2.0673	1.1619	> 0.5	Compliance

Please refer to the following plots


IEEE 802.11b mode:

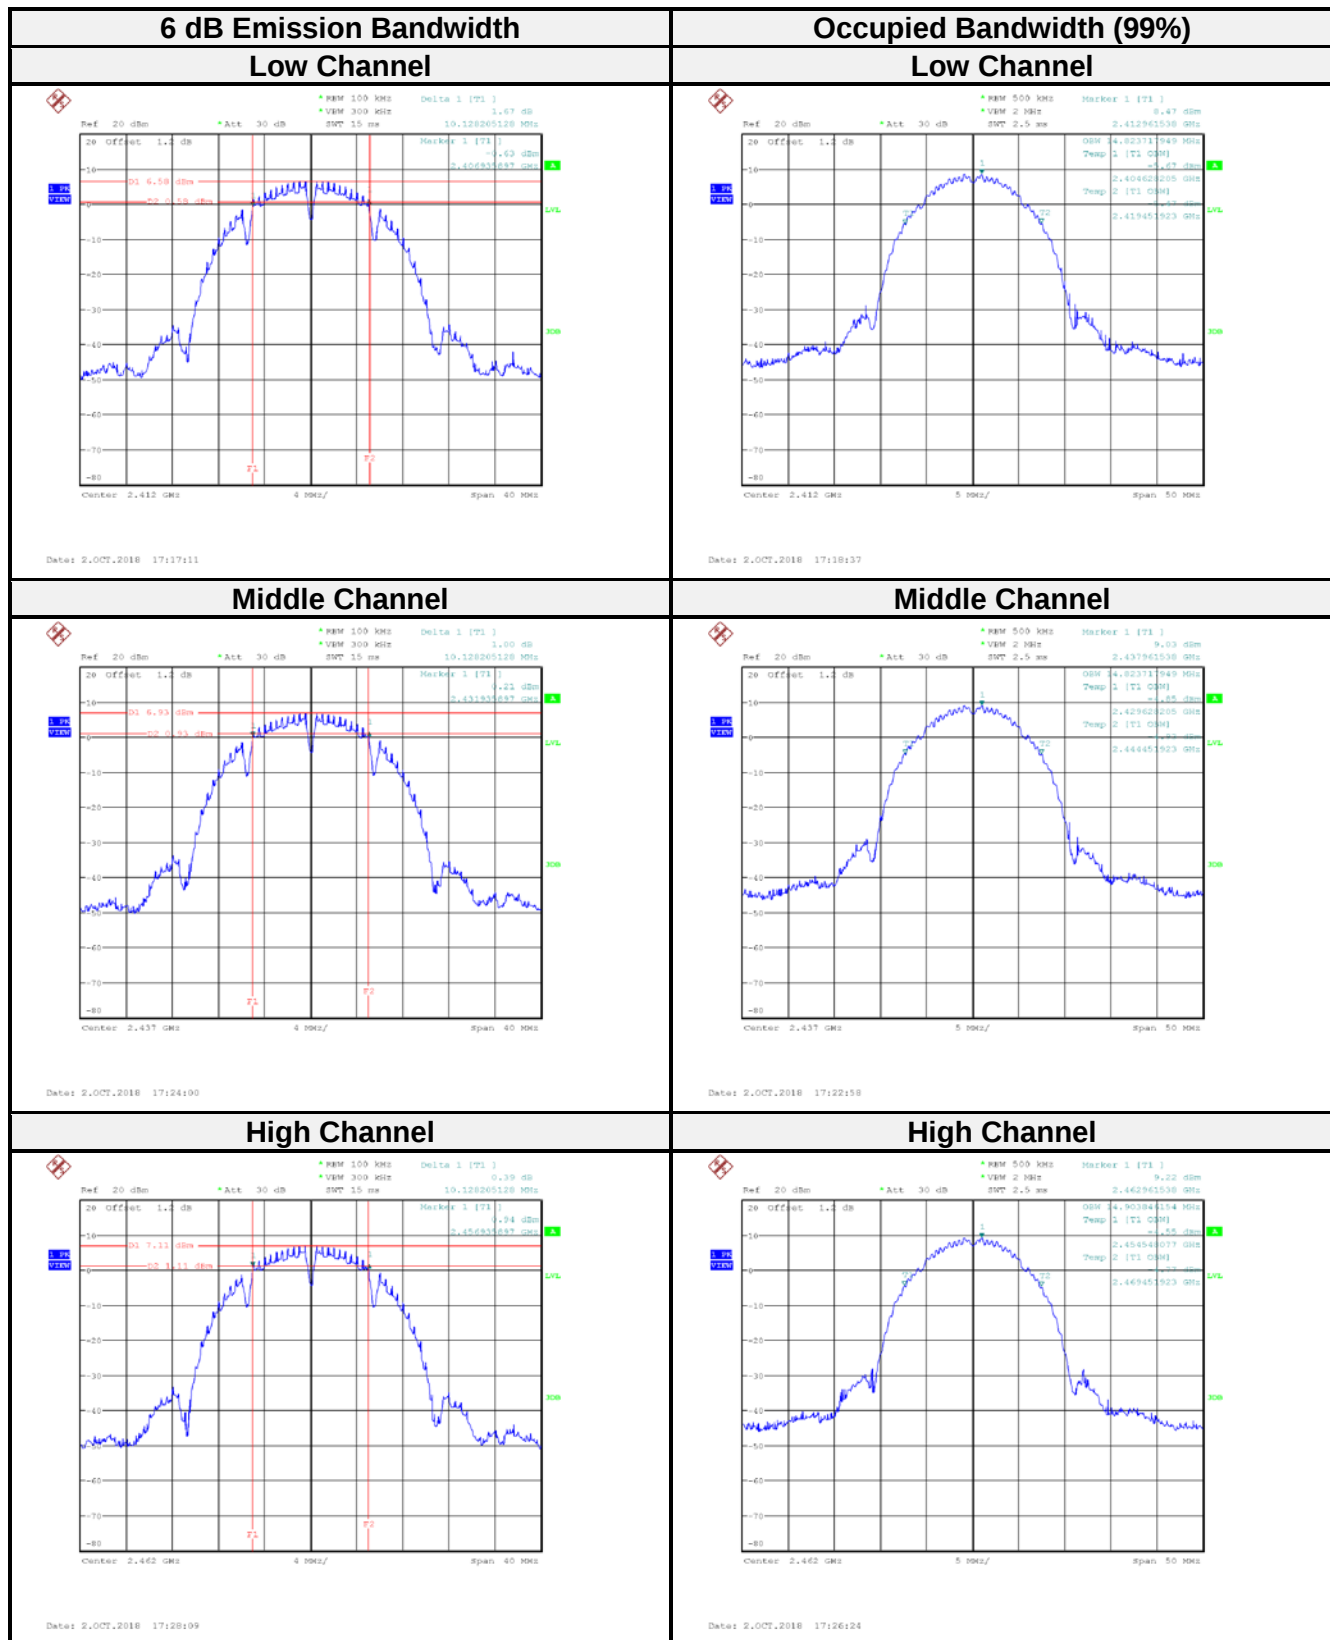


IEEE 802.11n HT20 mode:

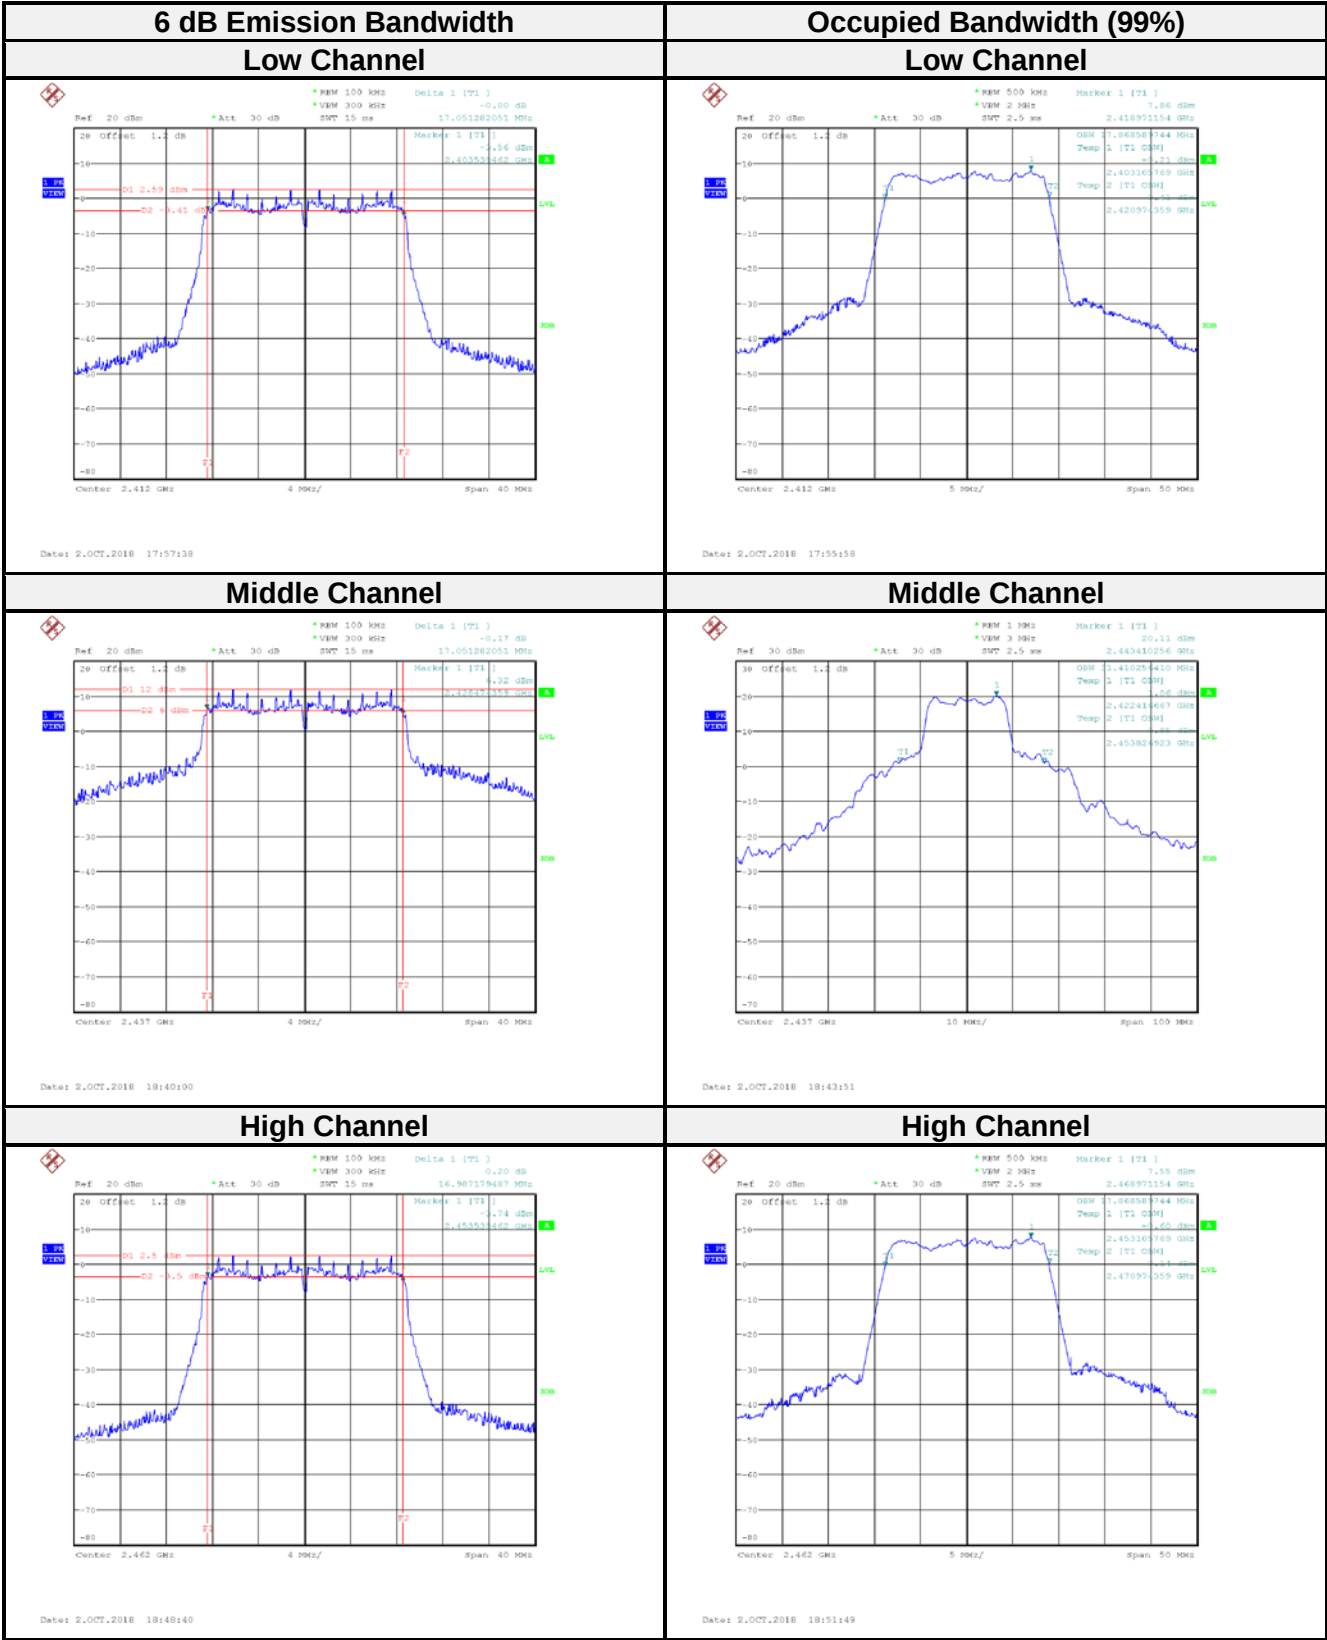


IEEE 802.11n HT40 mode:

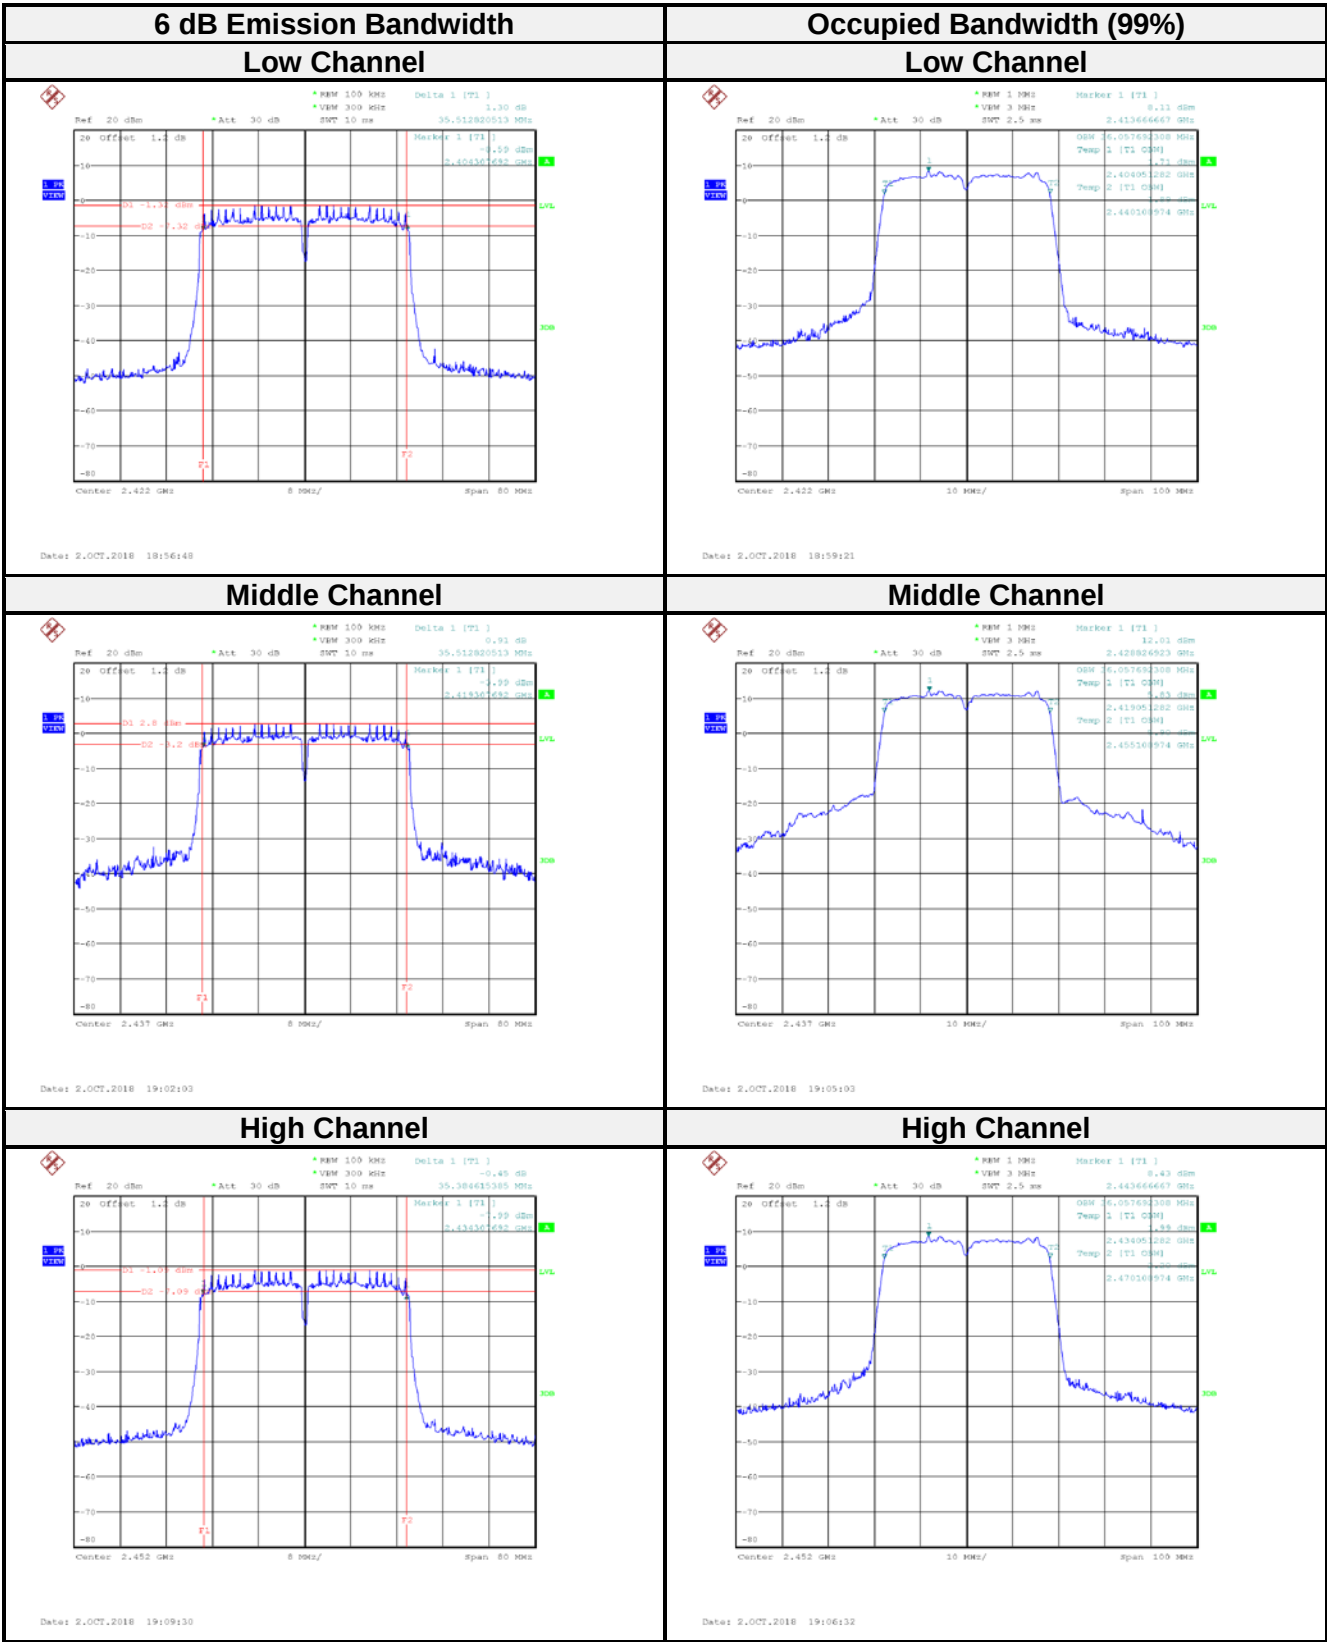

BLE 1 Mbps mode:

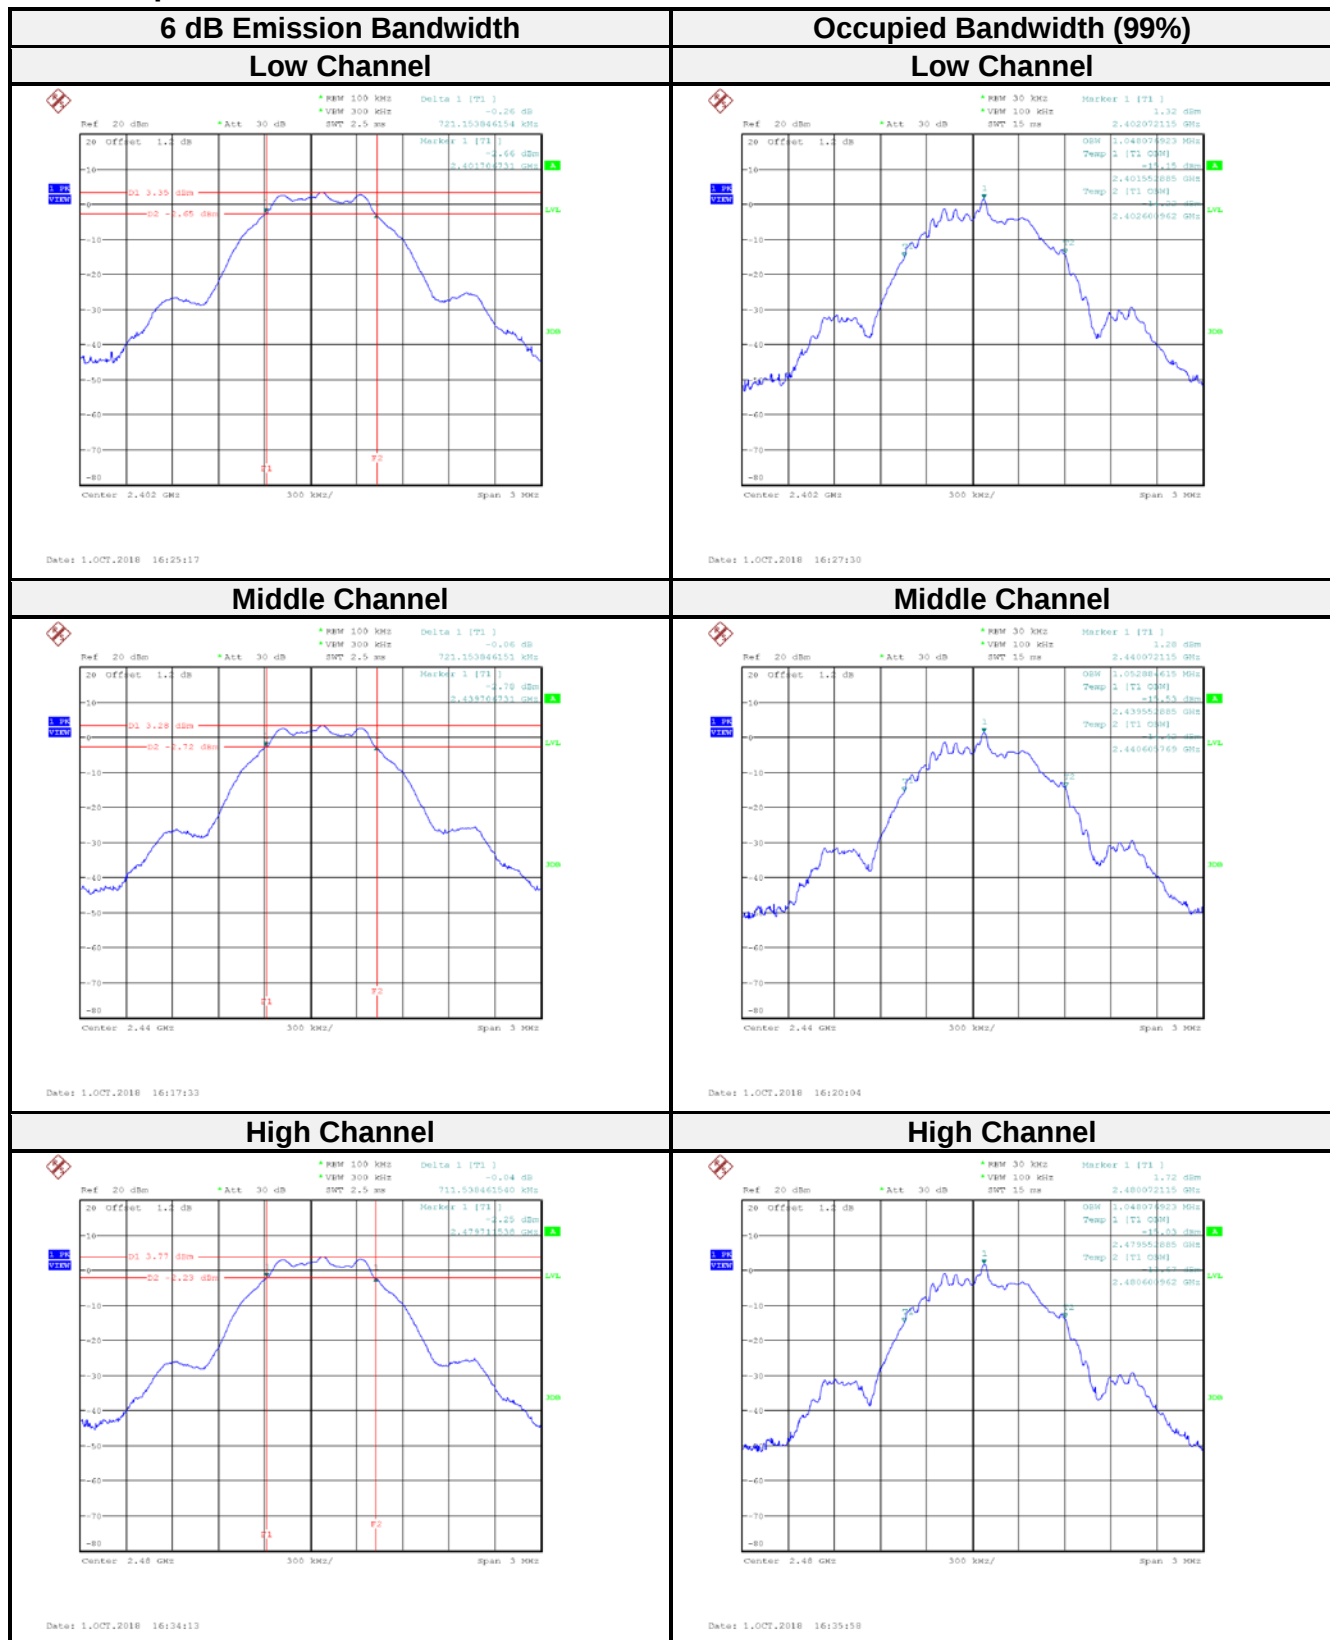

BLE 2 Mbps mode:

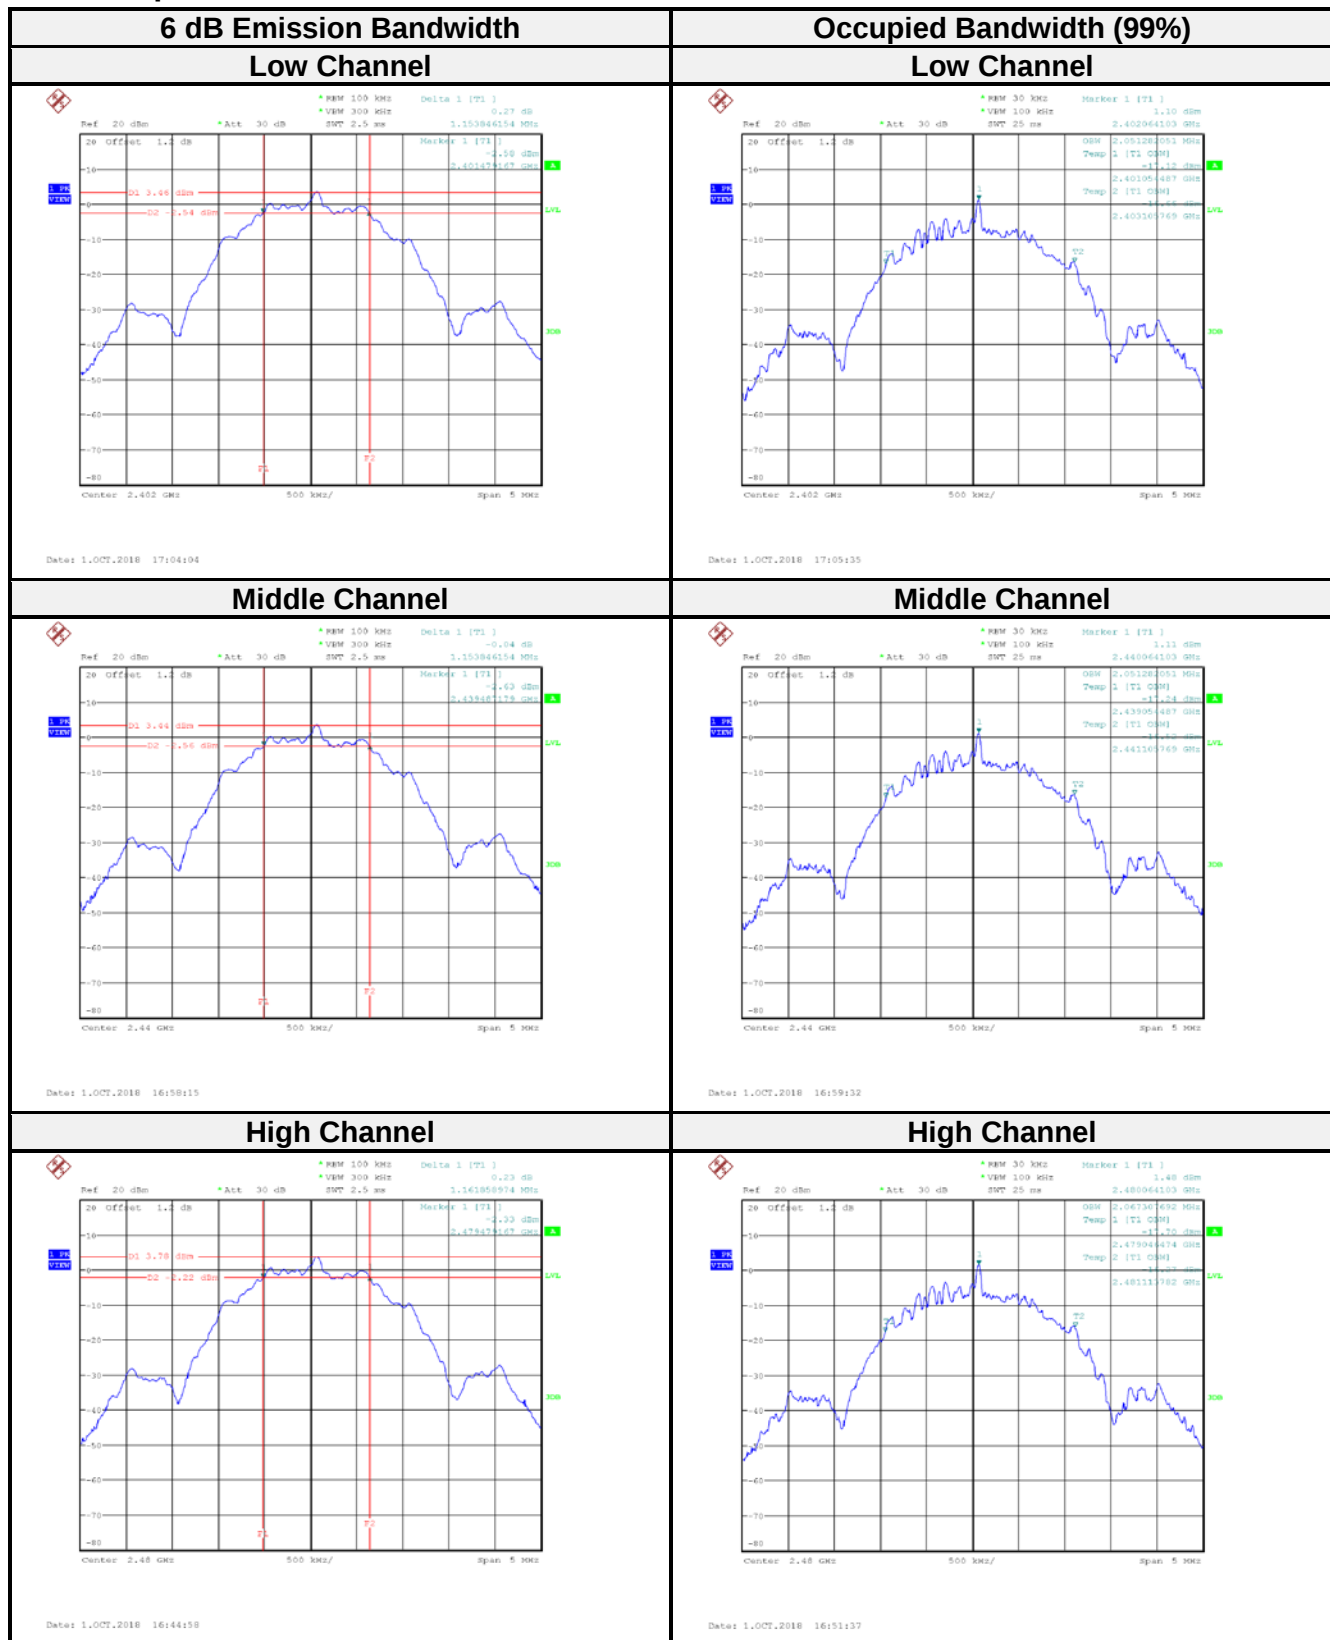

9 FCC §15.247(b)(3) – Maximum Output Power

9.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

9.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.
3. Add a correction factor to the display.

9.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2018/03/07	2019/03/06
Cable	WOKEN	SFL402	S02-160323-07	2018/02/12	2019/02/11

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

9.4 Test Environmental Conditions

Temperature:	22.1 °C
Relative Humidity:	61.0 %
ATM Pressure:	1015 hPa

The testing was performed by Eric Lee on 2018-10-01.

9.5 Test Results

Channel	Frequency (MHz)	Maximum peak Conducted Output Power (dBm)	Limit (dBm)	Result
IEEE 802.11b mode				
Low	2412	19.42	30	Compliance
Middle	2437	19.99	30	Compliance
High	2462	20.05	30	Compliance
IEEE 802.11g mode				
Low	2412	24.31	30	Compliance
Middle	2437	27.42	30	Compliance
High	2462	23.84	30	Compliance
IEEE 802.11n HT20 mode				
Low	2412	23.69	30	Compliance
Middle	2437	27.60	30	Compliance
High	2462	23.41	30	Compliance
IEEE 802.11n HT40 mode				
Low	2422	21.90	30	Compliance
Middle	2437	25.41	30	Compliance
High	2452	22.04	30	Compliance
BLE 1 Mbps mode				
Low	2402	3.32	30	Compliance
Middle	2440	3.29	30	Compliance
High	2480	3.37	30	Compliance
BLE 2 Mbps mode				
Low	2402	3.35	30	Compliance
Middle	2440	3.34	30	Compliance
High	2480	3.45	30	Compliance

10 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

10.1 Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

10.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	101140	2017/11/15	2018/11/14
Cable	WOKEN	SFL402	S02-160323-07	2018/02/12	2019/02/11

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

10.4 Test Environmental Conditions

Temperature:	22.1 °C
Relative Humidity:	61.0 %
ATM Pressure:	1015 hPa


The testing was performed by Eric Lee on 2018-10-01.

10.5 Test Results


Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	RESULT
IEEE 802.11b mode				
Low	2412	43.76	≥ 20	PASS
High	2462	56.36	≥ 20	PASS
IEEE 802.11g mode				
Low	2412	44.55	≥ 20	PASS
High	2462	52.30	≥ 20	PASS
IEEE 802.11n HT20 mode				
Low	2412	43.13	≥ 20	PASS
High	2462	50.86	≥ 20	PASS
IEEE 802.11n HT40 mode				
Low	2422	44.56	≥ 20	PASS
High	2452	44.82	≥ 20	PASS
BLE 1 Mbps mode				
Low	2402	48.42	≥ 20	PASS
High	2480	51.43	≥ 20	PASS
BLE 2 Mbps mode				
Low	2402	33.81	≥ 20	PASS
High	2480	52.73	≥ 20	PASS

Please refer to the following plots


IEEE 802.11b mode:

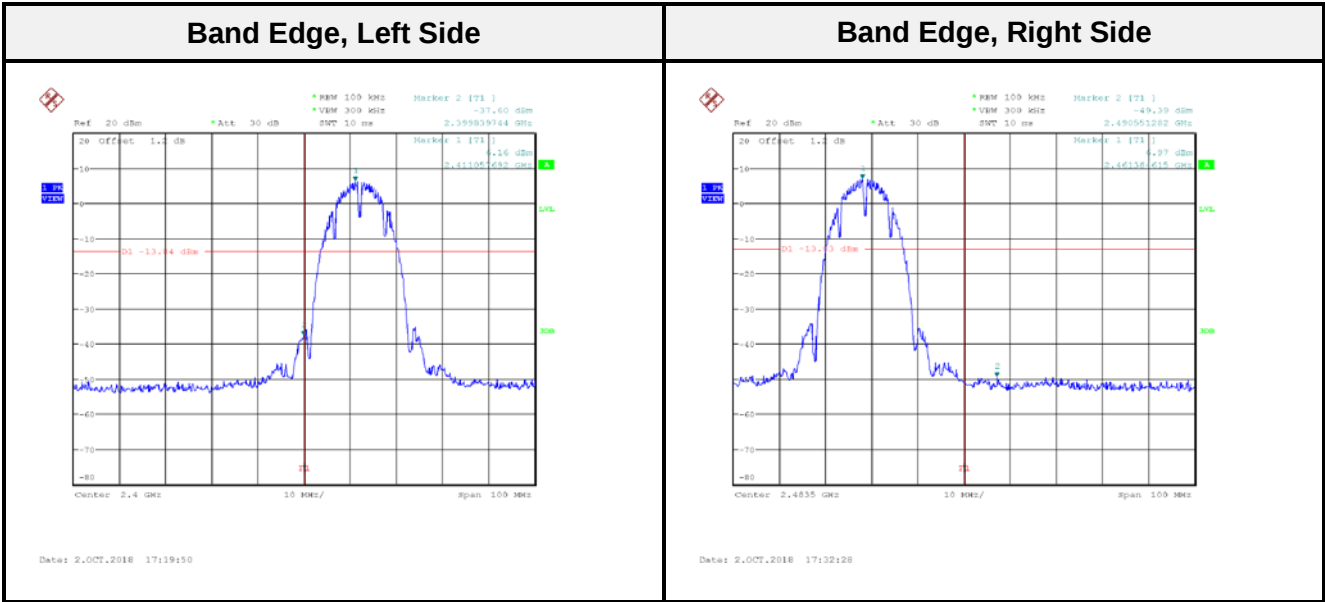


IEEE 802.11g mode:

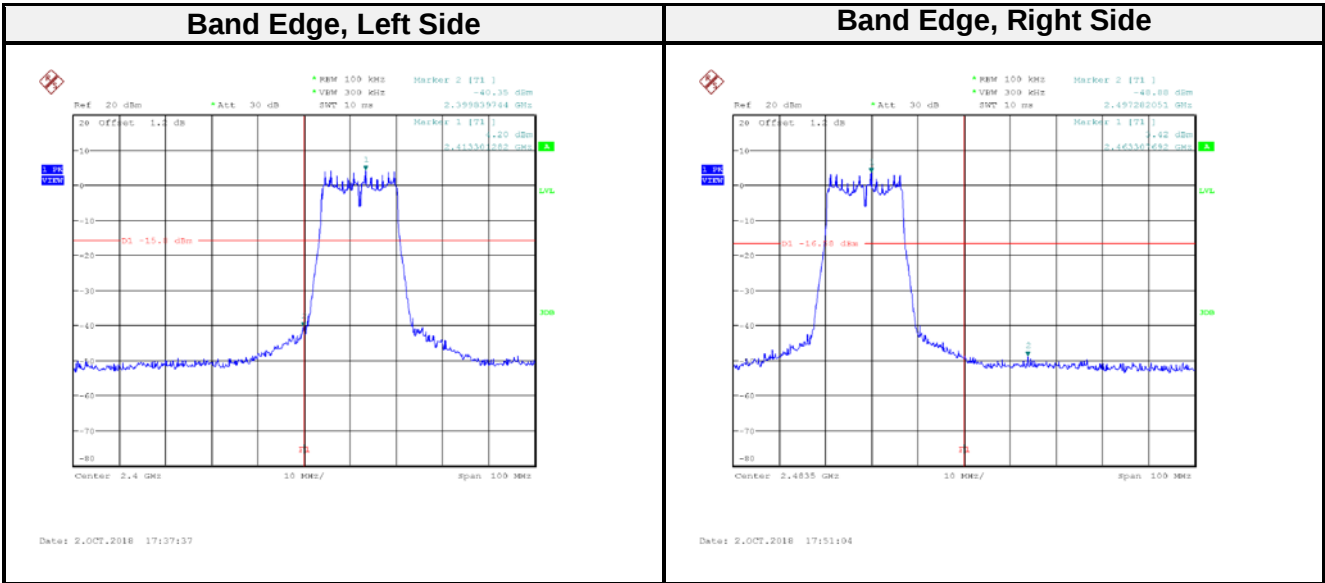


IEEE 802.11n HT20 mode:

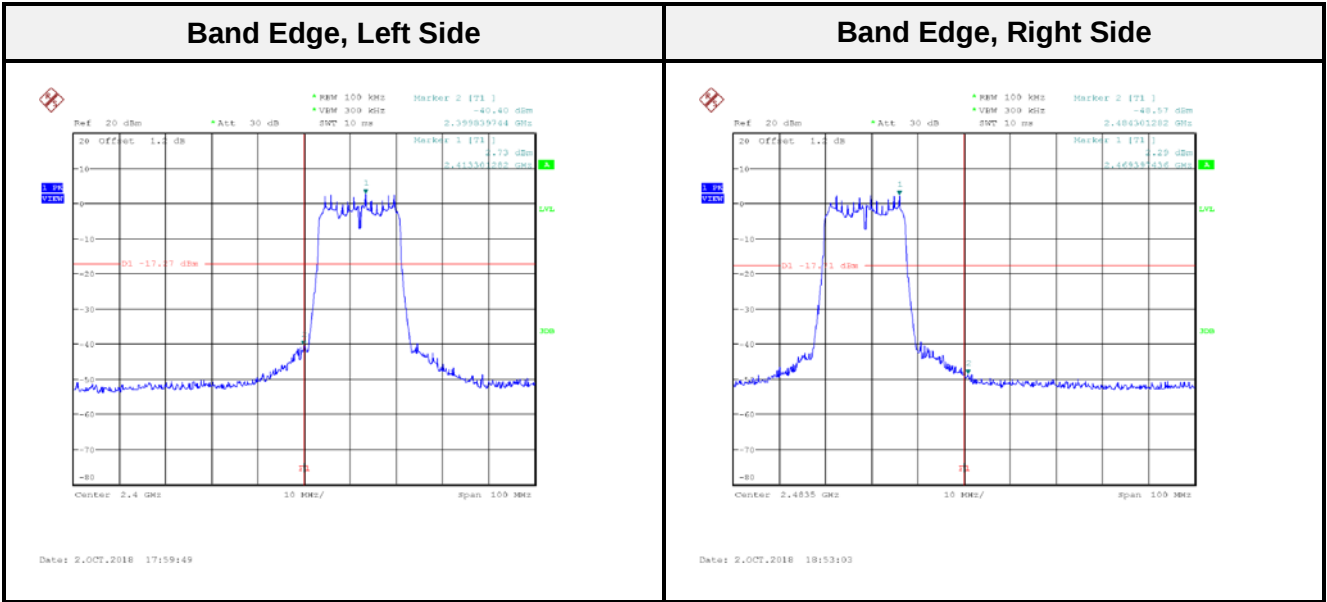


IEEE 802.11n HT40 mode:

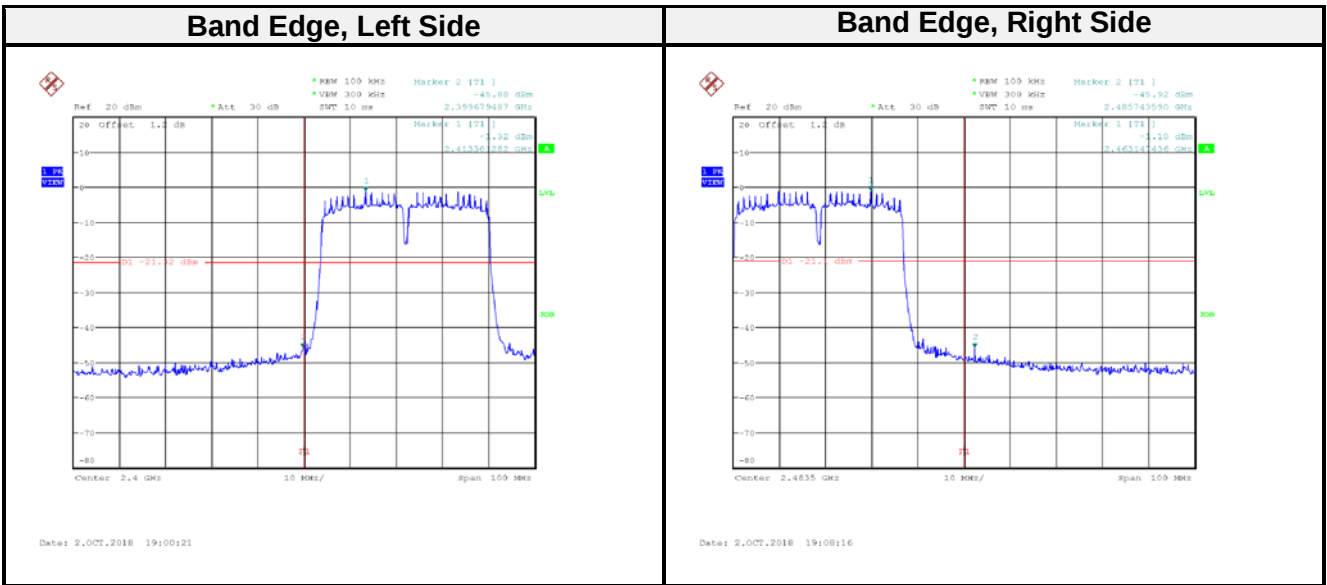

BLE 1 Mbps mode:

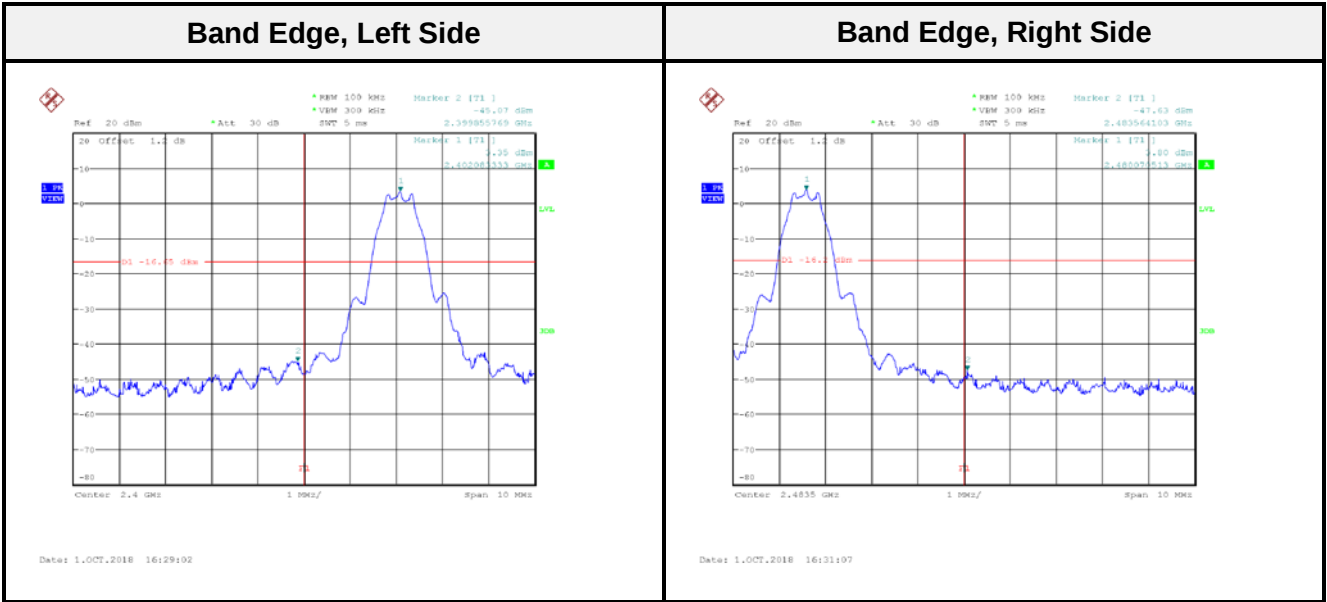

BLE 2 Mbps mode:

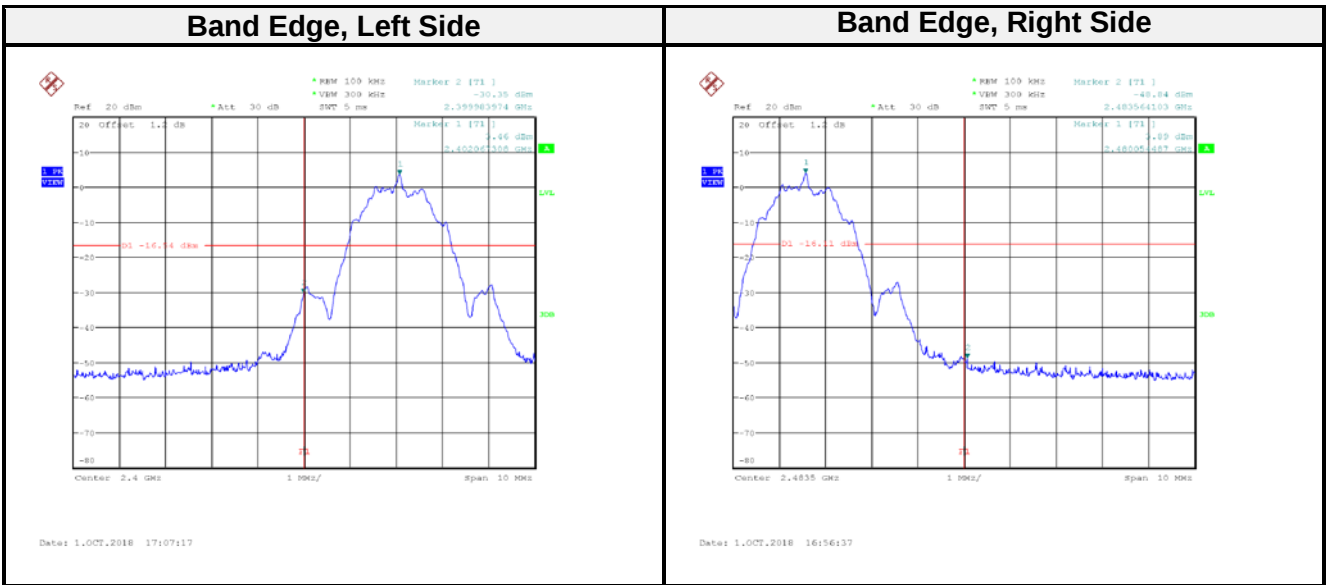

11 FCC §15.247(e) – Power Spectral Density

11.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Test Procedure

According to ANSI C63.10-2013

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$. e) Detector = peak. f) Sweep time = auto couple.
- g) Trace mode = max hold. h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

11.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	101140	2017/11/15	2018/11/14
Cable	WOKEN	SFL402	S02-160323-07	2018/02/12	2019/02/11

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

11.4 Test Environmental Conditions


Temperature:	22.1 °C
Relative Humidity:	61.0 %
ATM Pressure:	1015 hPa

The testing was performed by Eric Lee from 2018-10-01


11.5 Test Results

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
IEEE 802.11b mode				
Low	2412	-9.92	8	Compliance
Middle	2437	-9.70	8	Compliance
High	2462	-9.50	8	Compliance
IEEE 802.11g mode				
Low	2412	-12.53	8	Compliance
Middle	2437	-3.90	8	Compliance
High	2462	-10.75	8	Compliance
IEEE 802.11n HT20 mode				
Low	2412	-13.98	8	Compliance
Middle	2437	-5.24	8	Compliance
High	2462	-13.29	8	Compliance
IEEE 802.11n HT40 mode				
Low	2422	-16.72	8	Compliance
Middle	2437	-13.12	8	Compliance
High	2452	-16.45	8	Compliance
BLE 1 Mbps mode				
Low	2402	-11.95	8	Compliance
Middle	2440	-11.77	8	Compliance
High	2480	-11.50	8	Compliance
BLE 2 Mbps mode				
Low	2402	-14.32	8	Compliance
Middle	2440	-14.36	8	Compliance
High	2480	-13.94	8	Compliance


IEEE 802.11b mode:

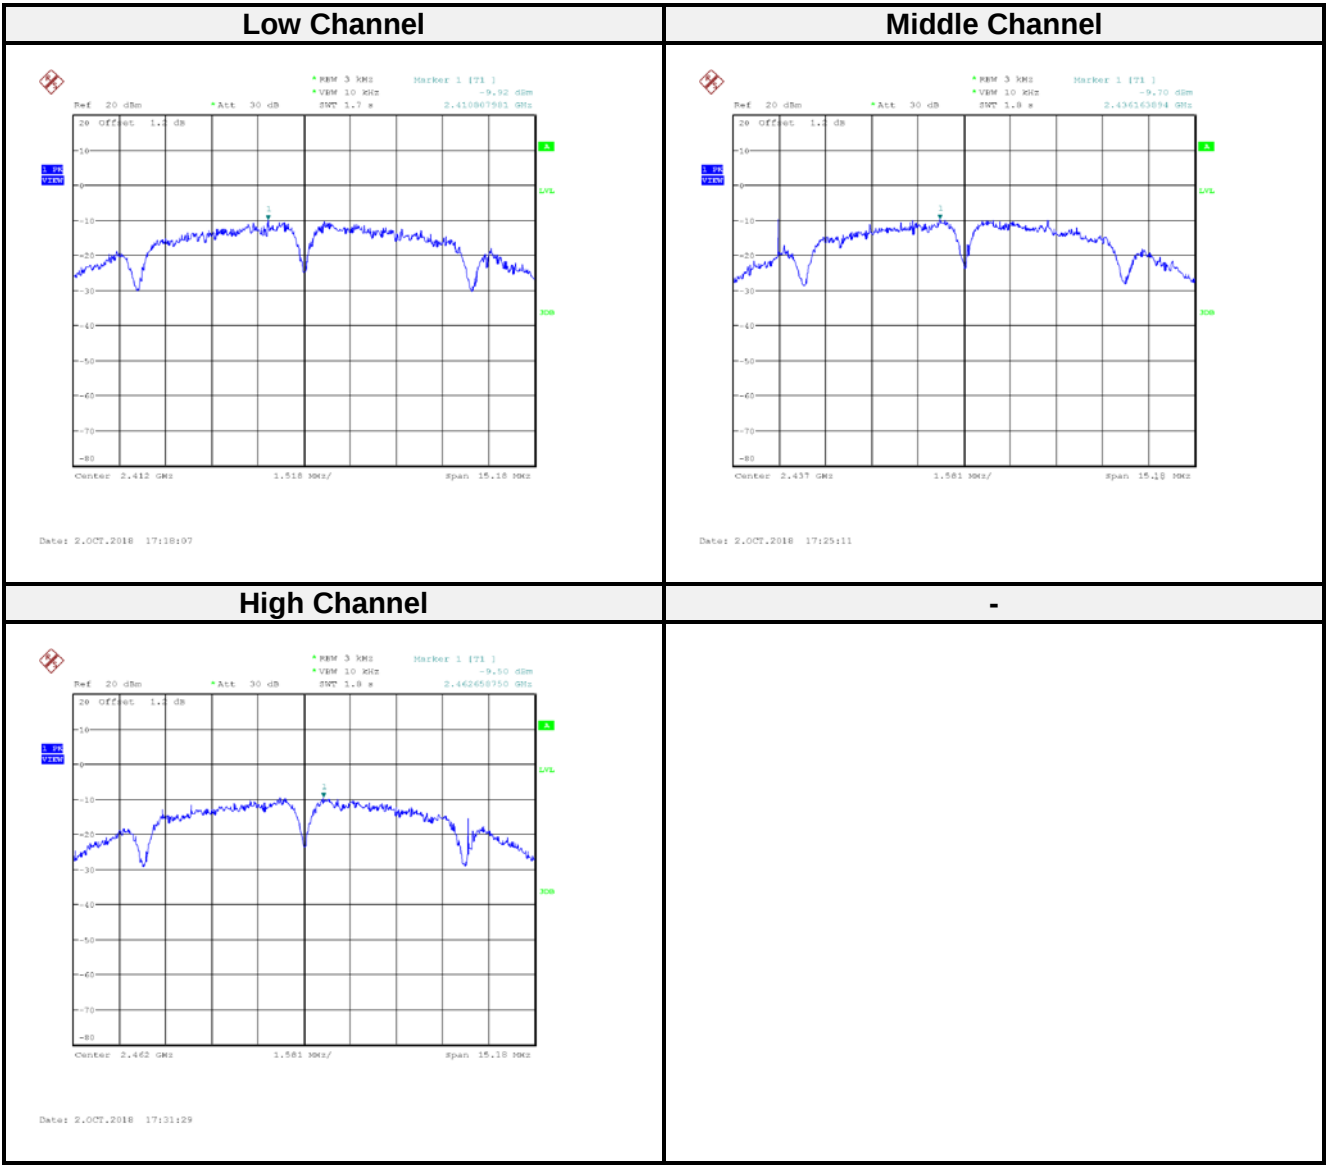


IEEE 802.11g mode:

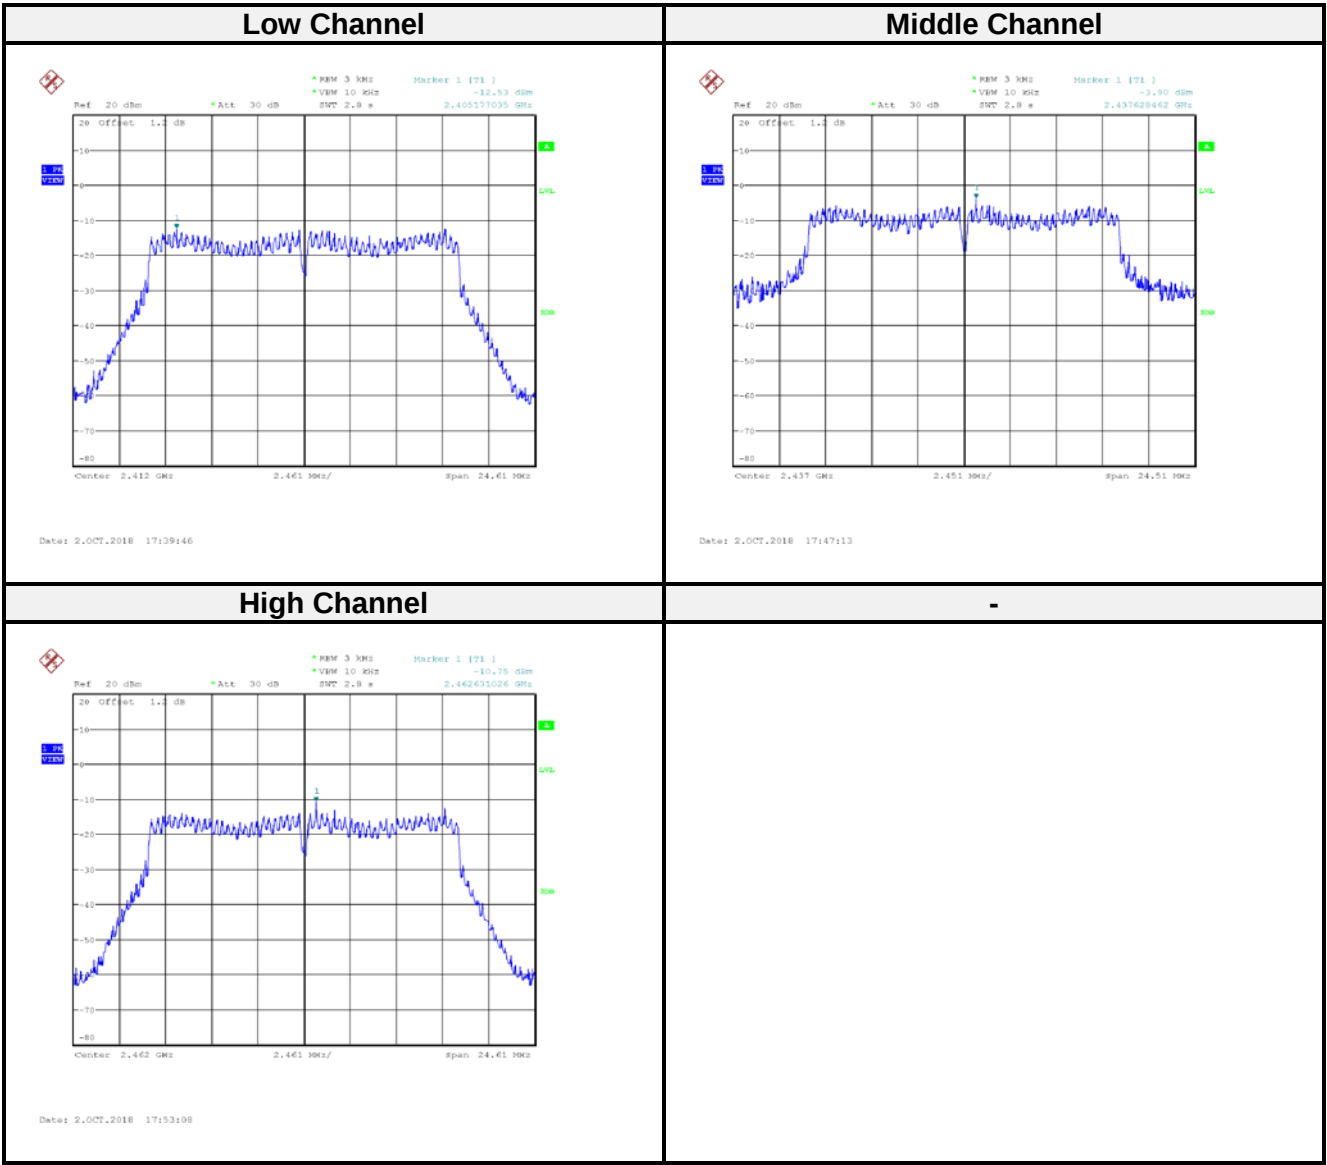


IEEE 802.11n HT20 mode:

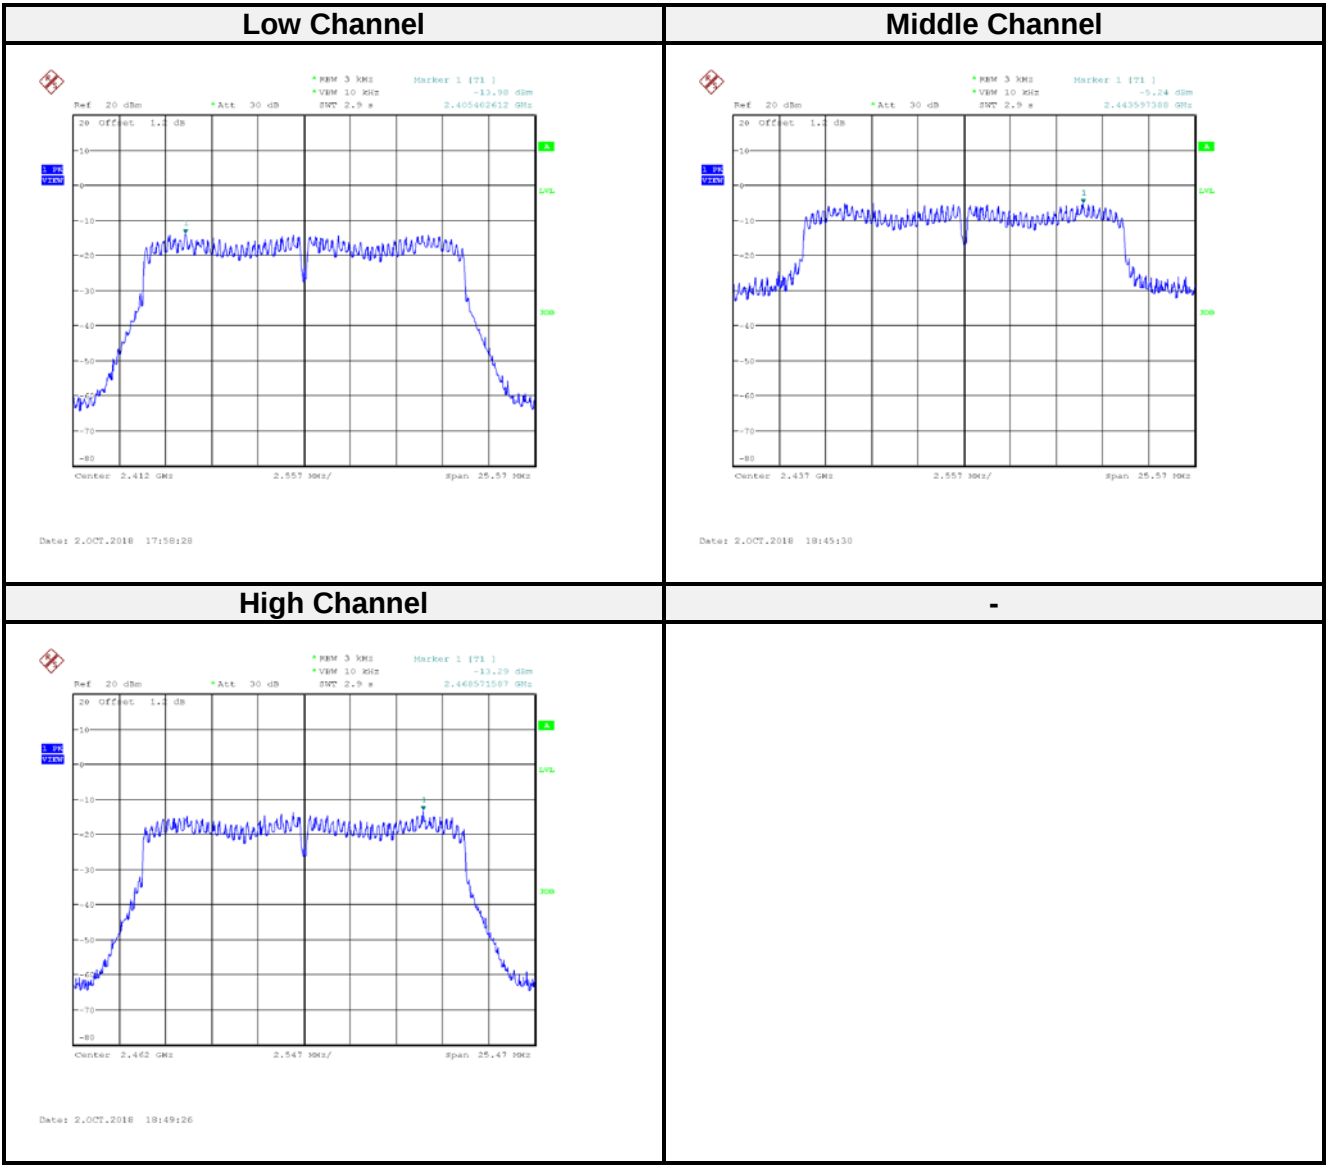


IEEE 802.11n HT40 mode:

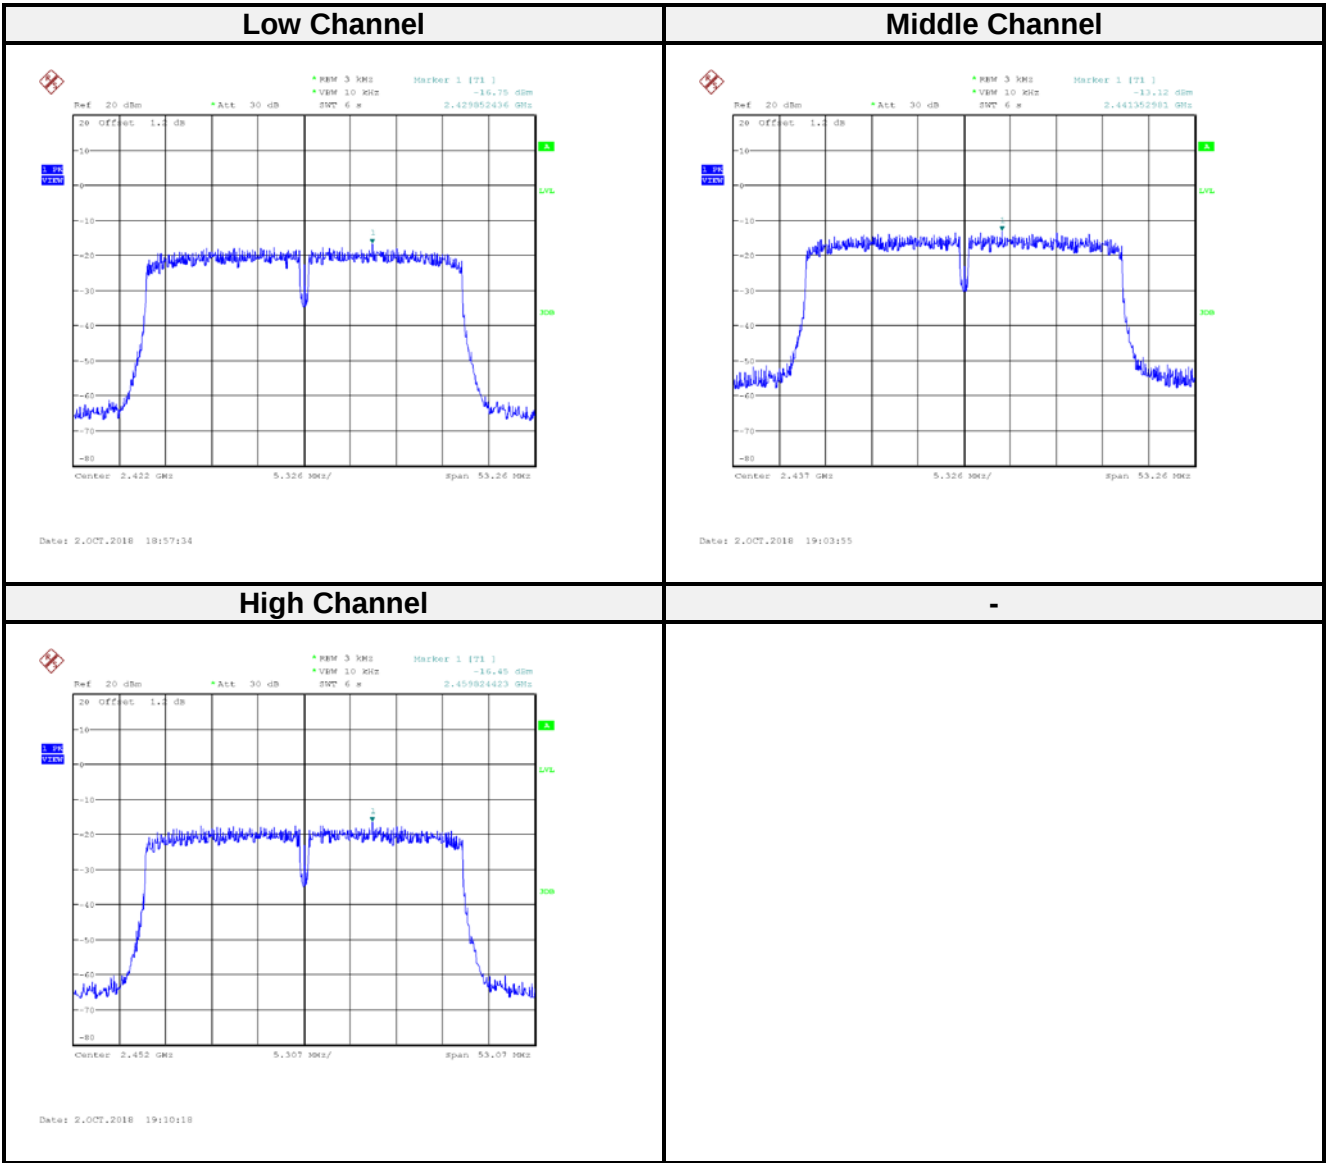

BLE 1 Mbps mode:

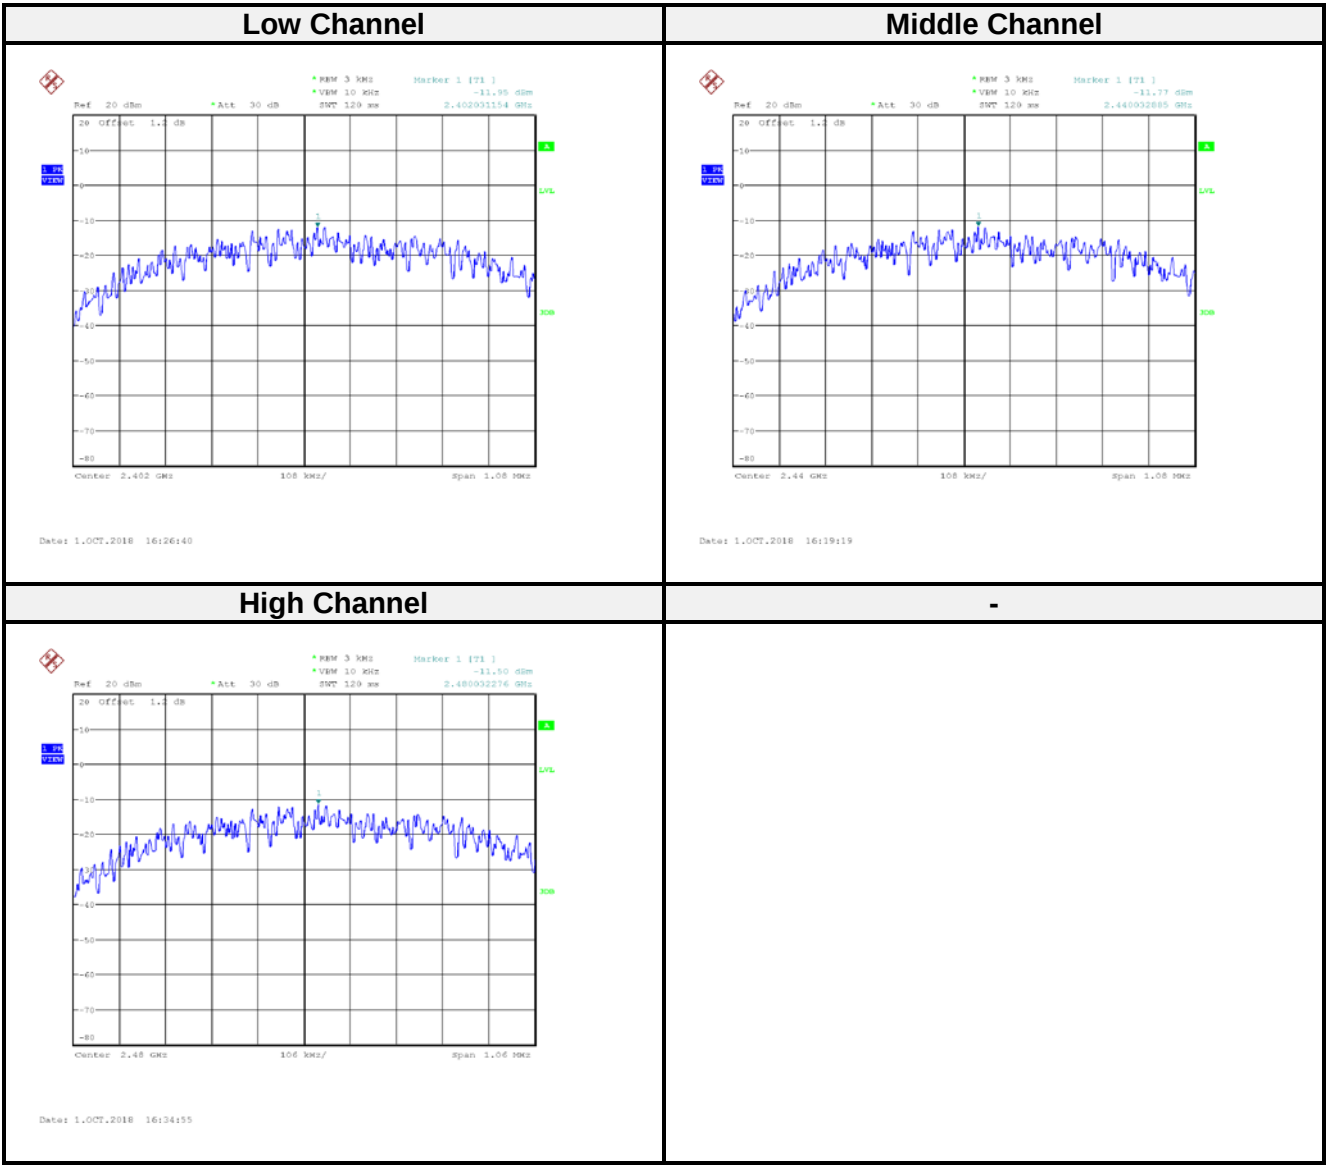

BLE 2 Mbps mode:

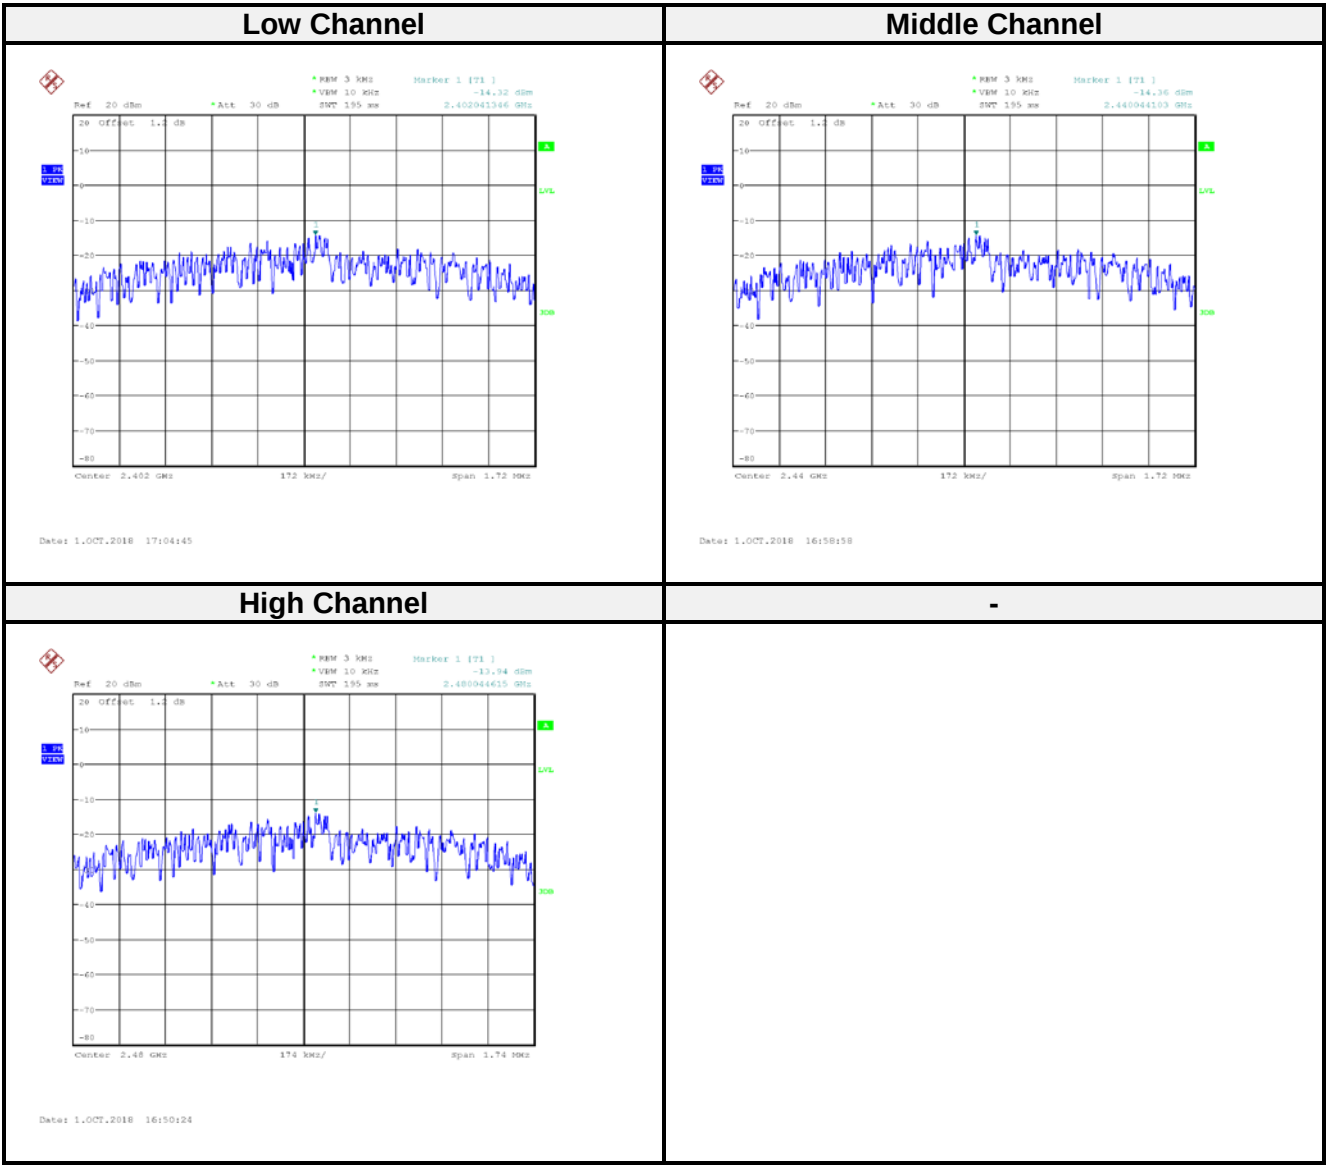

----- END OF REPORT -----