

FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi - Tech Industrial Park North, 9108# Beihuan Road, Nan shan District,
Shenzhen, 518057 China

FCC ID: YAMBD50XU1S


Report Type: Original Report	Product Type: DIGITAL PORTABLE RADIO
Report Number: RDG210326003-00A	
Report Date: 2021-05-24	
Reviewed By:	Gavin Xu RF Engineer 
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
TECHNICAL SPECIFICATION	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENT LIST	7
ENVIRONMENTAL CONDITIONS.....	7
SUMMARY OF TEST RESULTS.....	8
1 - RF EXPOSURE.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
2 - RF OUTPUT POWER.....	10
APPLICABLE STANDARD	10
TEST PROCEDURE	10
TEST DATA	10
3 - MODULATION CHARACTERISTIC	16
APPLICABLE STANDARD	16
TEST PROCEDURE	16
TEST DATA	16
4 – OCCUPIED BANDWIDTH & EMISSION MASK	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
6 - RADIATED SPURIOUS EMISSIONS	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
7 - FREQUENCY STABILITY	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46

TEST DATA46

8 - TRANSIENT FREQUENCY BEHAVIOR.....50

APPLICABLE STANDARD50

TEST PROCEDURE50

TEST DATA51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		DIGITAL PORTABLE RADIO
Test Model:		BD502 U(1)
Multiple Models:		BD505 U(1), BD506 U(1),BD508 U(1)
Model Difference:		Refer to the DOS letter
Adapter Information	Model:	HKA01212010-XQ
	Input:	AC 100-240V~50/60Hz, 0.5A
	Output:	DC 12V 1.0A 12.0W
Rated Input Voltage:		DC 7.2V from Battery or DC 12V from Base charger
Serial Number:		RDG210326003-RF-S1
EUT Received Date:		2021.03.27
EUT Received Status:		Good

Technical Specification

Operation Frequency Range (MHz):	400-470
Rated RF Output Power (Conducted) (W):	High power level: 4 Low power level: 1
Modulation Type:	FM, 4FSK
Channel Spacing (kHz):	12.5/25

Objective

This test report is prepared on behalf of **Hytera Communications Corporation Limited** in accordance with Part 2, and Part 22,74,80 and 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

the Code of federal Regulations Title 47, Part 2, Part 22, Part 74, Part 80 and Part 90

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

TIA-603-E-2016, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software

No software was tested in test.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Wenschel	Terminations	1440	MD477

Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

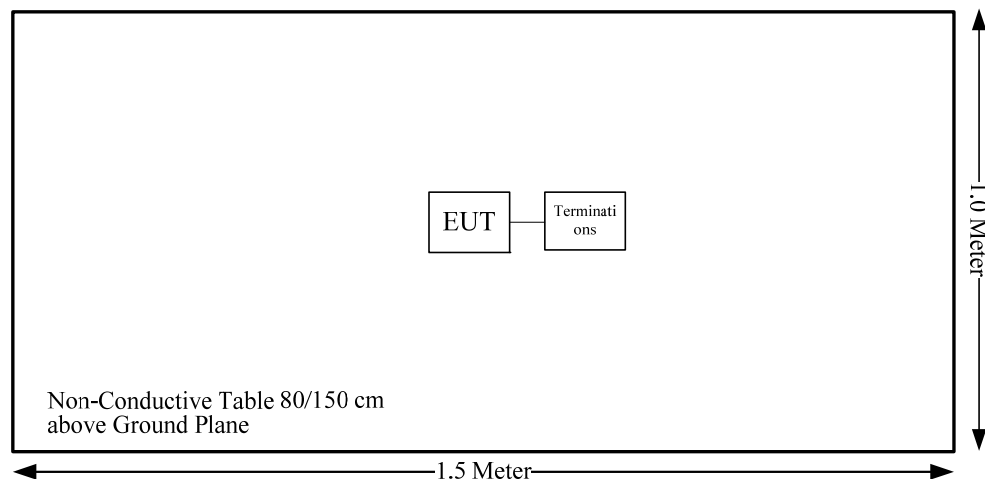

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiated emissions above 1GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
HUBER+SUHNER	Coaxial Cable	SUCOFLEX 126EA	MY369/26/26EA	2020-09-25	2021-09-25
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2020-09-05	2021-09-05
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2020-12-09	2021-12-08
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSEB 7	8463211015	2020-04-25	2021-04-24
Rohde & Schwarz	Spectrum Analyzer	FSEB 7	8463211015	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
R&S	Spectrum Analyzer	FSU 26	200160/026	2020-04-25	2021-04-24
R&S	Spectrum Analyzer	FSU 26	200160/026	2021-04-25	2022-04-24
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2020-09-05	2021-09-05
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	2020-05-06	2021-05-06
Weinschel	Coaxial Attenuators	53-20-34	LN749	2020-09-06	2021-09-06
E-Microwave	Coaxial Attenuators	EMCA30-200SN-6	OE00803029	2020-09-06	2021-09-06
HP	RF Communications Test Set	8920A	3438A05201	2020-07-07	2021-07-07
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2021-03-10	2022-03-09
UNI-T	Multimeter	UT39A	M130199938	2020-07-01	2021-07-01
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A
Ouli	Band Rejector Filter	400-470M	087	2021-01-23	2022-01-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Item:	RF Conducted	Radiated emissions
Temperature:	25.4°C~27.4°C	25.8°C
Relative Humidity:	39 %~49 %	40~47 %
ATM Pressure:	100.3 kPa~101.6 kPa	101.5 kPa
Tester:	Levi Shi	Burt Hu, Joker Chen
Test Date:	2021-04-16~2021-05-22	2021-04-08~2021-04-15

SUMMARY OF TEST RESULTS

S/N	FCC Rules	Description of Test	Results
1	§1.1310 and §2.1093	RF Exposure	Compliance
2	§2.1046; § 22.727; §80.215; §74.461; §90.205	RF Output Power	Compliance
3	§2.1047	Modulation Characteristic	Compliance
4	§2.1049; §22.357; § 22.731; §74.462; §80.205; §80.207 §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
5	§2.1051; §22.861; §74.462; §80.211; §90.210	Spurious Emission at Antenna Terminal	Compliance
6	§2.1053; §22.861; §74.462; §80.211; §90.210	Spurious Radiated Emissions	Compliance
7	§2.1055; § 22.355; §74.464; §80.209; §90.213	Frequency Stability	Compliance
8	§90.214	Transient Frequency Behavior	Compliance

1 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RDG210326003-20A.

2 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727, §74.461, §80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

RB/W Video B/W
100 kHz 300 kHz

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.


Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)		Note
				High Power Level	Low Power Level	High Power Level	Low Power Level	
12.5kHz	FM	Low	400.0125	36.300	30.720	36.81	30.79	FCC
		Middle	453.2125	36.610	30.700	36.81	30.79	FCC Part 90
		High	469.9875	36.370	29.860	36.81	30.79	
		Additional	455.0125	36.550	30.580	36.81	30.79	FCC Part 74
		Additional	454.0125	36.580	30.630	36.81	30.79	FCC Part 22
	4FSK	Low	400.0125	36.380	29.900	36.81	30.79	FCC
		Middle	453.2125	36.790	30.630	36.81	30.79	FCC Part 90
		High	469.9875	36.480	29.810	36.81	30.79	
		Additional	455.0125	36.560	30.530	36.81	30.79	FCC Part 74
		Additional	454.0125	36.600	30.610	36.81	30.79	FCC Part 22
25kHz	FM	Additional	459.9875	36.400	30.280	36.81	30.79	FCC Part 80
		Additional	455.0125	36.550	30.560	36.81	30.79	FCC Part 74
		Additional	454.0125	36.570	30.600	36.81	30.79	FCC Part 22

Note: The high rated power level is 4W(36dBm), and low rated power level is 1 W(30dBm).

The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.


FM, 12.5kHz:

FCC, Low Channel, 400.0125 MHz High Power

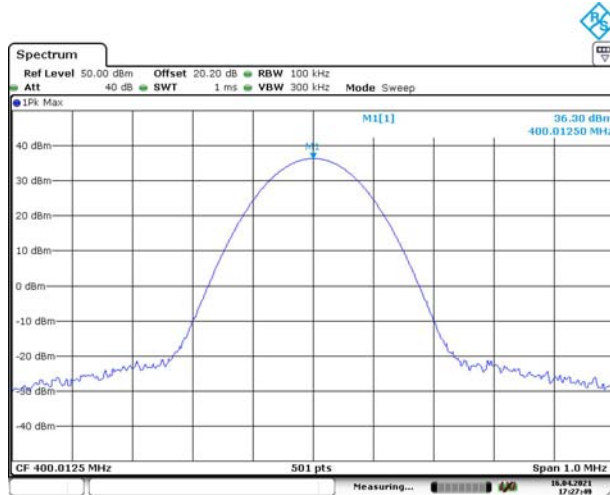


Date: 16.APR.2021 17:27:49

FCC, Low Channel, 400.0125 MHz Low Power

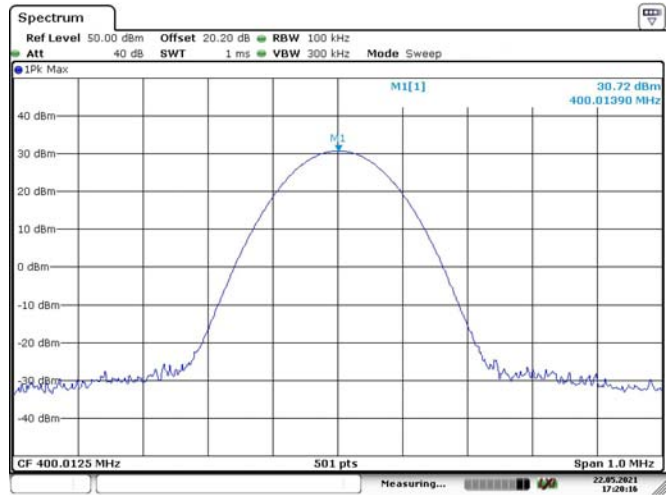


Date: 22.MAY.2021 17:28:16

Part 90, Middle Channel, 453.0125 MHz High Power

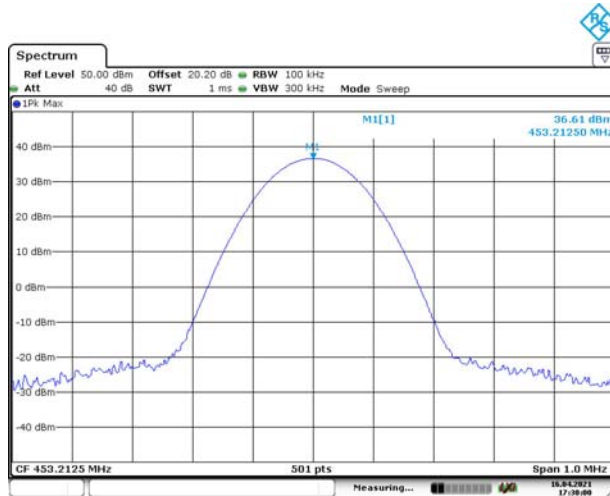


Date: 16.APR.2021 17:30:00

Part 90, Middle Channel, 453.0125 MHz Low Power

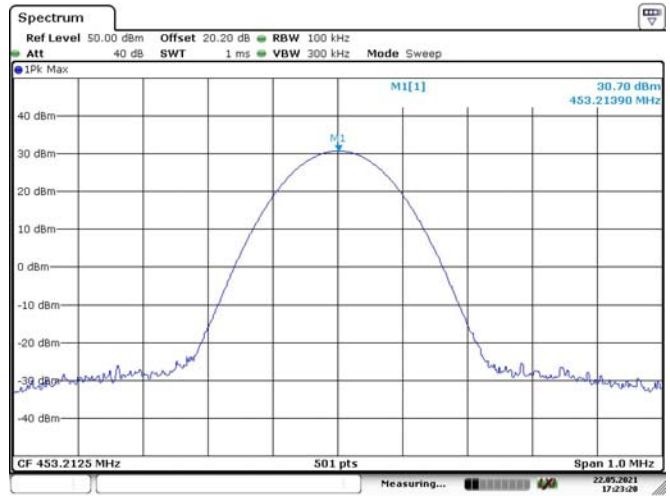


Date: 22.MAY.2021 17:23:28

Part 90, High Channel, 469.9875 MHz High Power

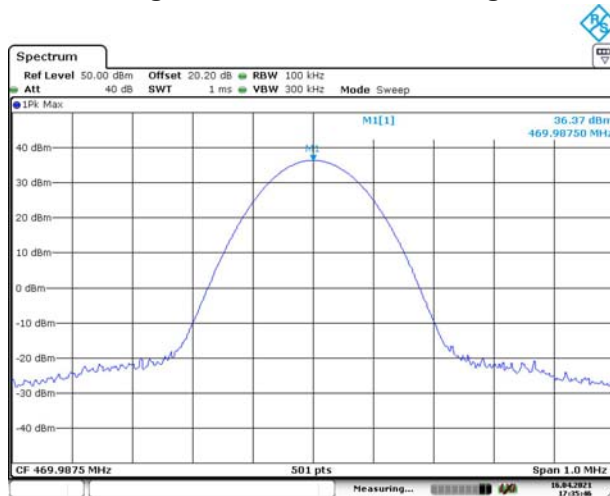


Date: 16.APR.2021 17:35:45

Part 90, High Channel, 469.9875 MHz Low Power

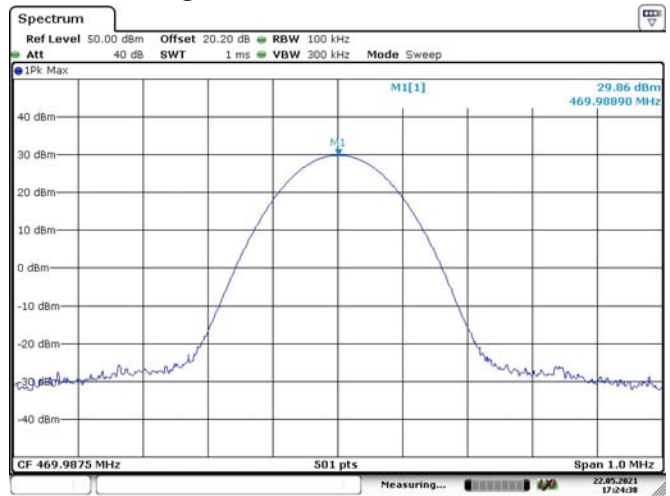


Date: 22.MAY.2021 17:24:38

Part 74, Additional Channel, 455.0125 MHz High Power

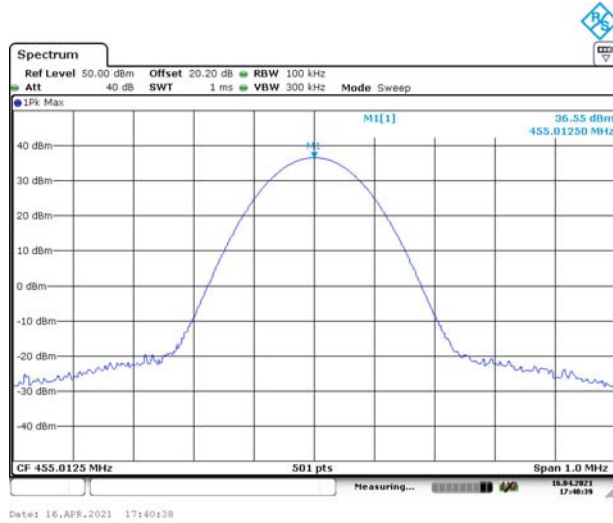


Part 74, Additional Channel, 455.0125 MHz Low Power




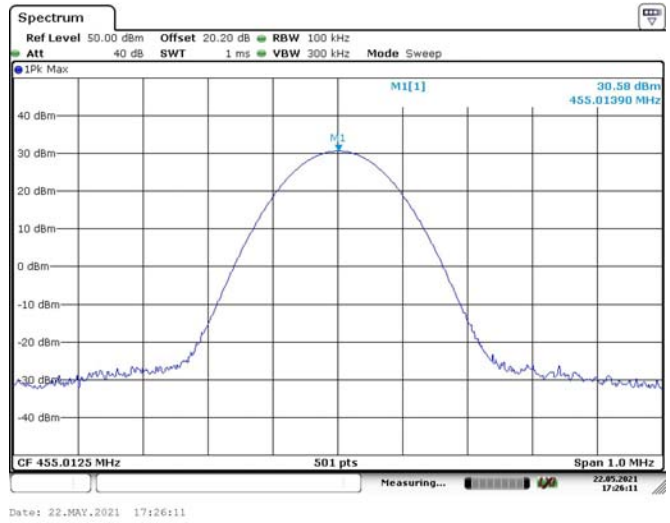


Part 22, Additional Channel, 454.0125 MHz High Power




Part 22, Additional Channel, 454.0125 MHz Low Power

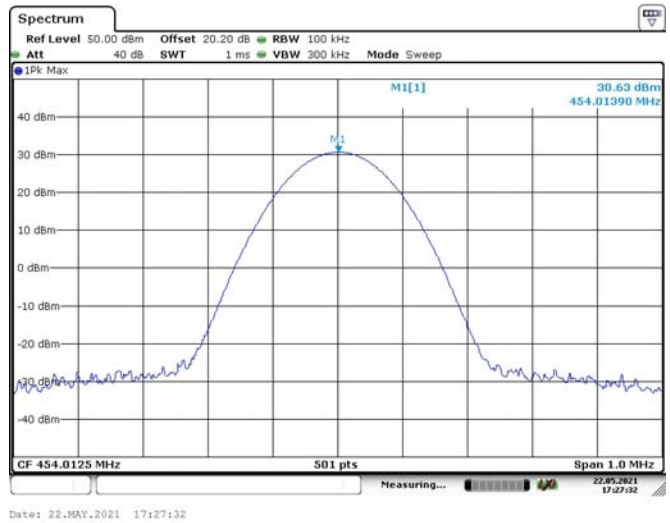


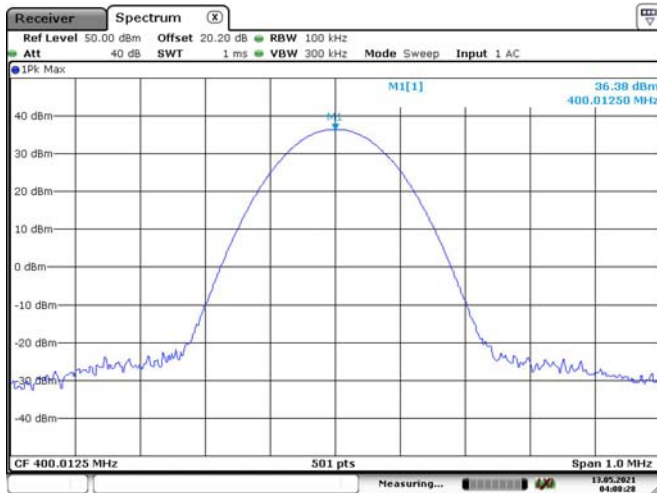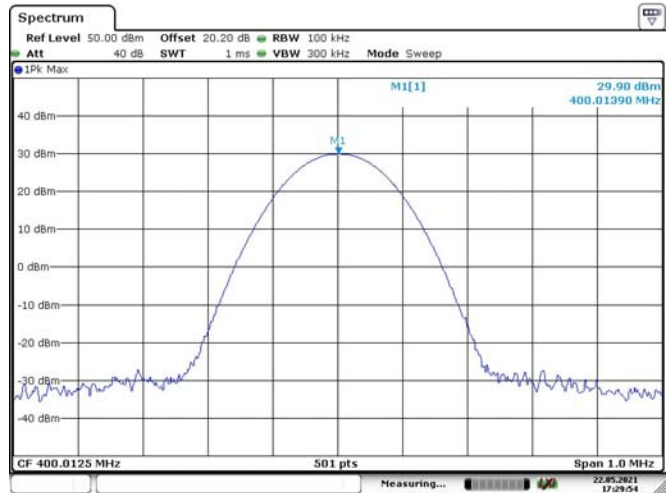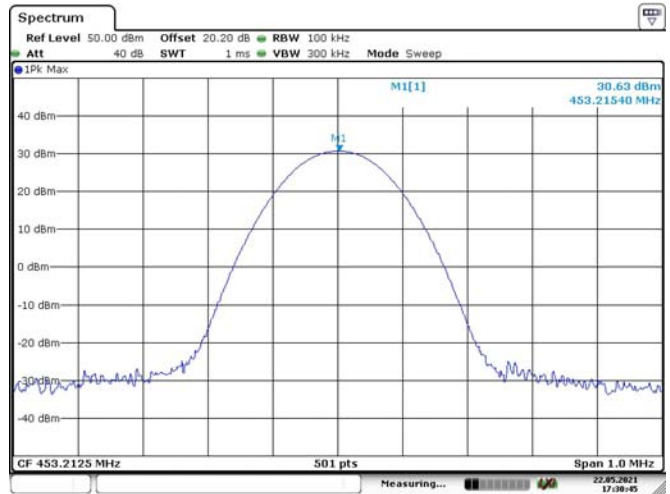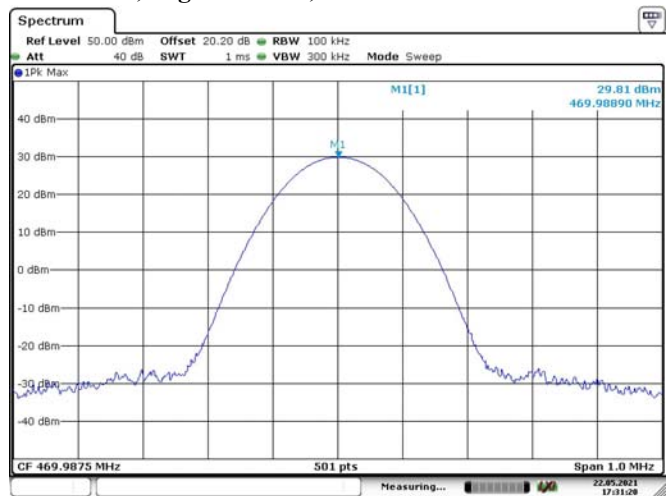4FSK, 12.5kHz:**FCC, Low Channel, 400.0125 MHz High Power****FCC, Low Channel, 400.0125 MHz Low Power****Part 90, Middle Channel, 453.2125 MHz High Power****Part 90, Middle Channel, 453.2125 MHz Low Power****Part 90, High Channel, 469.9875 MHz High Power****Part 90, High Channel, 469.9875 MHz Low Power**


Part 74, Additional Channel, 455.0125 MHz High Power

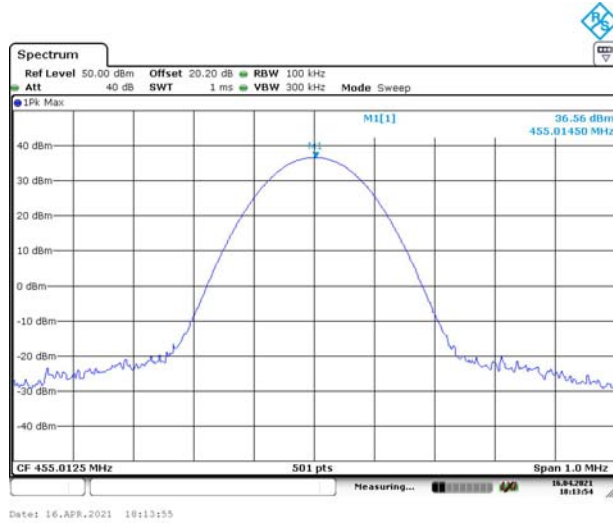


Part 74, Additional Channel, 455.0125 MHz Low Power

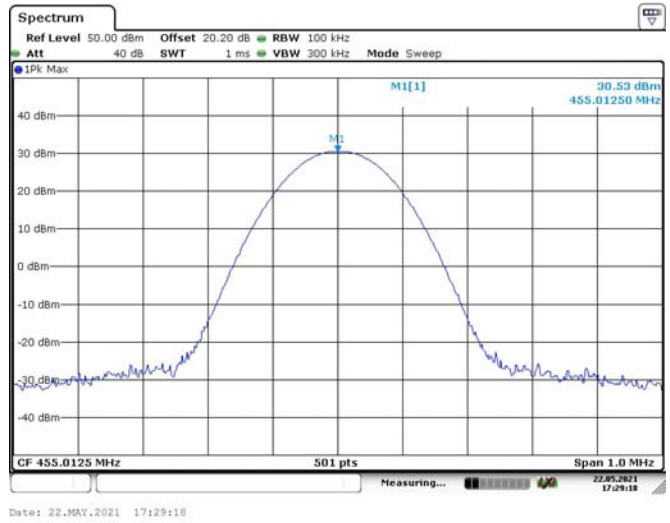

Part 22, Additional Channel, 454.0125 MHz High Power

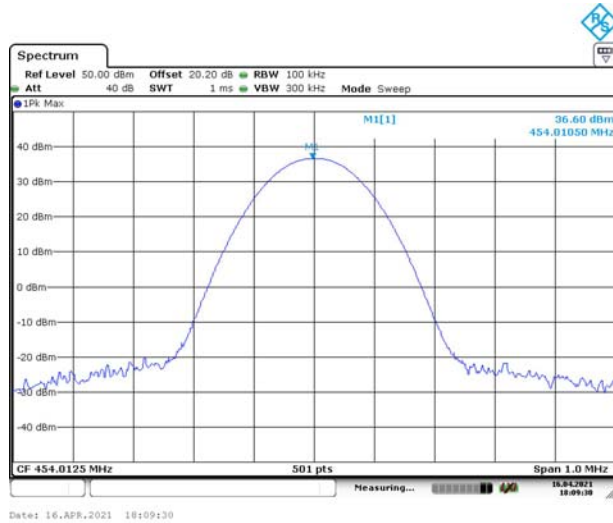


Part 22, Additional Channel, 454.0125 MHz Low Power

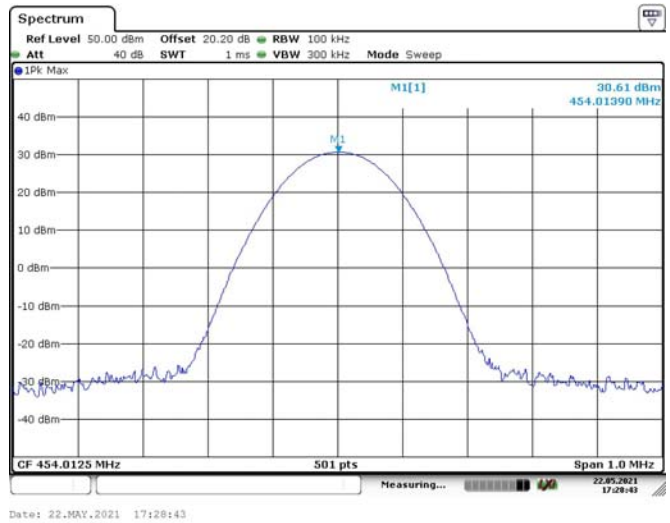


FM, 25kHz:

Part 80, Additional Channel, 459.9875 MHz High Power

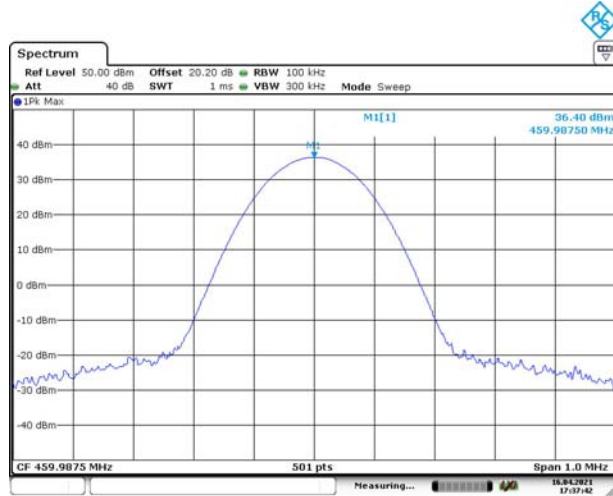


Date: 16.APR.2021 17:37:42

Part 80, Additional Channel, 459.9875 MHz Low Power

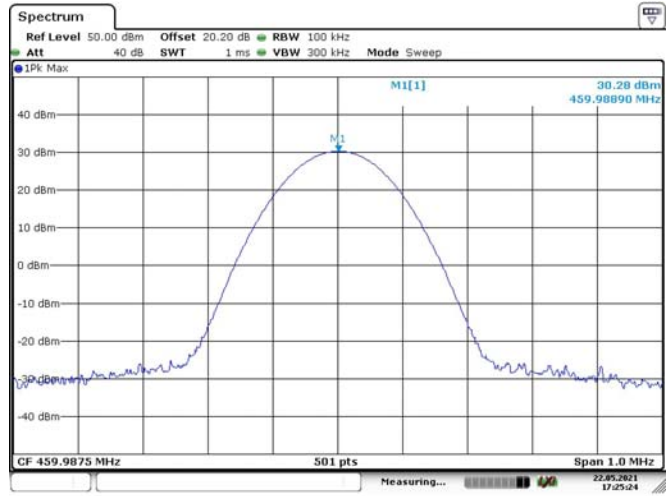


Date: 22.MAY.2021 17:25:24

Part 74, Additional Channel, 455.0125 MHz High Power

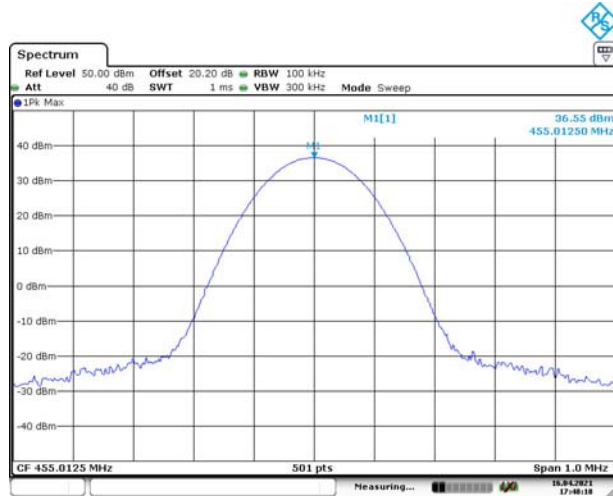


Date: 16.APR.2021 17:48:18

Part 74, Additional Channel, 455.0125 MHz Low Power

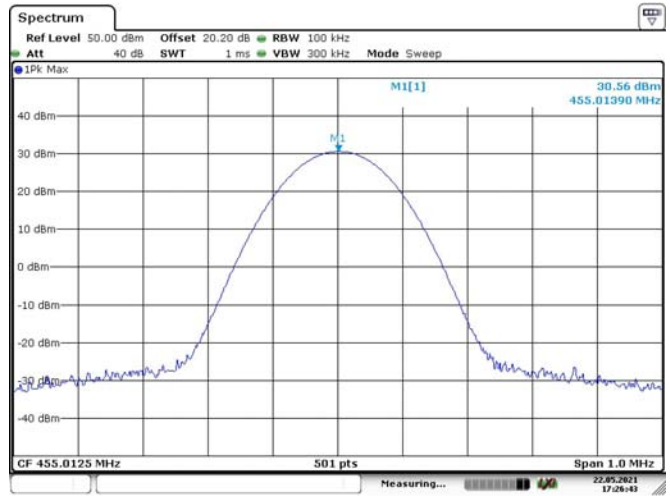


Date: 22.MAY.2021 17:26:44

Part 22, Additional Channel, 454.0125 MHz High Power

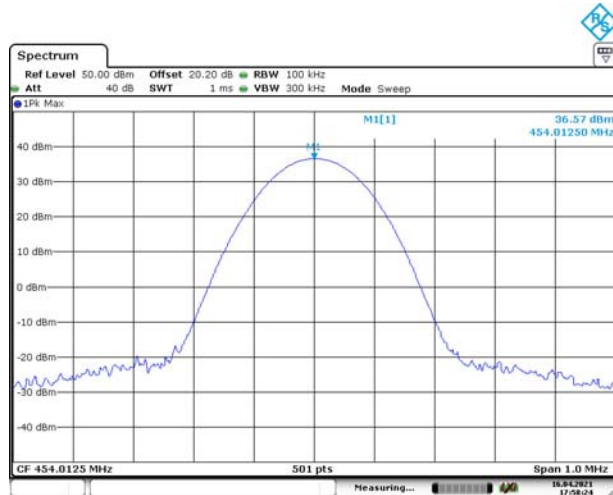

Date: 16.APR.2021 17:58:24

Part 22, Additional Channel, 454.01390 MHz Low Power

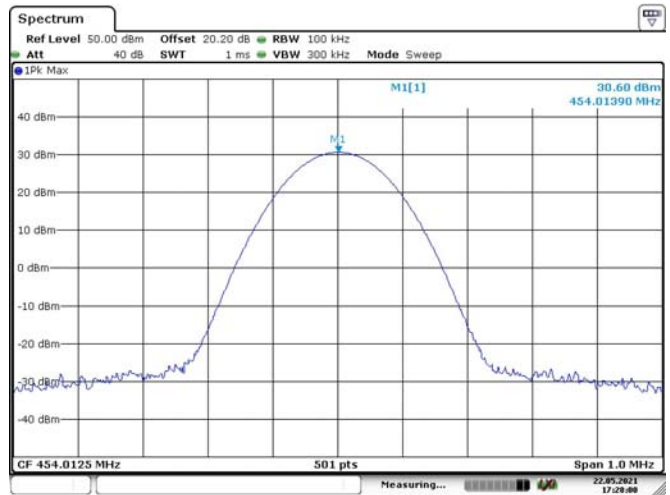

Date: 22.MAY.2021 17:28:00

3 - MODULATION CHARACTERISTIC

Applicable Standard

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA-603-E 2.2.3



Test Data

Test Mode: Transmitting

Test Result: Compliance.


Please refer to the following tables and plots.

Audio Frequency Response – High Power

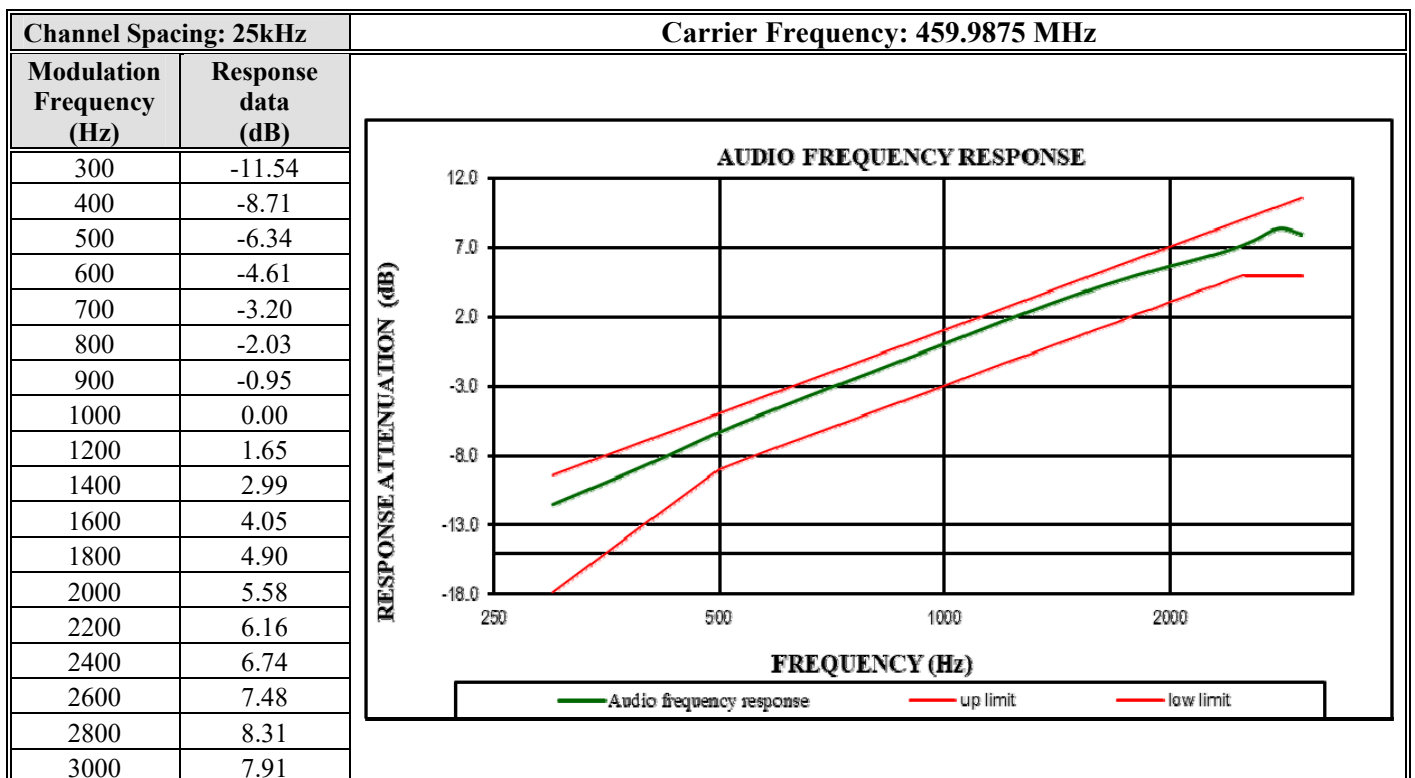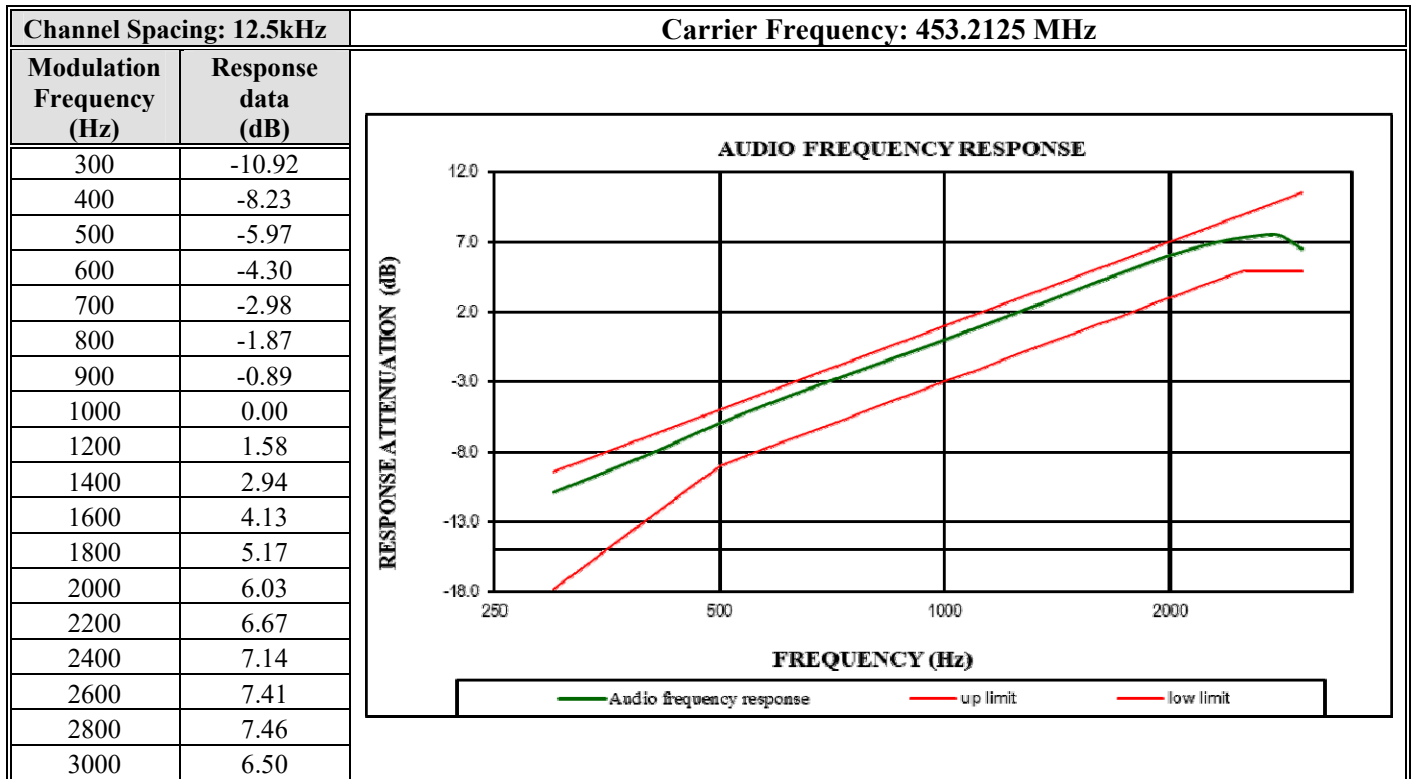


Modulation Limiting – High Power



Channel Spacing: 12.5kHz		Carrier Frequency: 453.2125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	0.575	0.081	0.624	0.085	2.5
400	0.768	0.084	0.823	0.079	2.5
500	0.994	0.082	1.020	0.084	2.5
600	1.192	0.068	1.185	0.090	2.5
700	1.389	0.073	1.374	0.072	2.5
800	1.592	0.071	1.622	0.077	2.5
900	1.743	0.076	1.762	0.074	2.5
1000	1.813	0.067	1.825	0.078	2.5
1200	1.950	0.070	1.968	0.074	2.5
1400	2.003	0.065	2.010	0.087	2.5
1600	2.003	0.080	2.020	0.078	2.5
1800	2.024	0.071	2.040	0.087	2.5
2000	2.037	0.079	2.010	0.088	2.5
2200	2.034	0.069	1.970	0.089	2.5
2400	1.981	0.069	1.890	0.090	2.5
2600	1.915	0.094	1.860	0.086	2.5
2800	1.810	0.076	1.780	0.072	2.5
3000	1.518	0.072	1.530	0.072	2.5

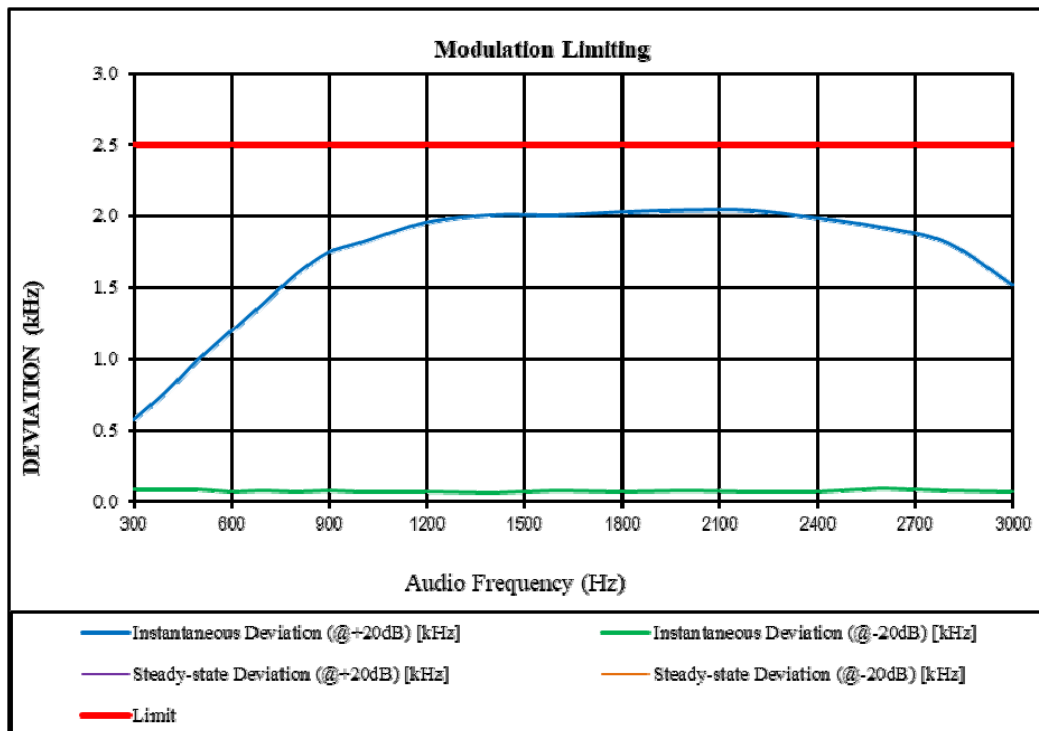

Channel Spacing: 25kHz		Carrier Frequency: 459.9875 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.041	0.071	0.987	0.061	5
400	1.425	0.069	1.435	0.074	5
500	1.905	0.083	1.924	0.073	5
600	2.295	0.077	2.296	0.081	5
700	2.725	0.082	2.710	0.080	5
800	3.136	0.087	3.153	0.072	5
900	3.423	0.066	3.435	0.069	5
1000	3.558	0.069	3.576	0.063	5
1200	3.886	0.070	3.864	0.079	5
1400	3.968	0.070	3.978	0.077	5
1600	3.928	0.089	3.954	0.061	5
1800	3.867	0.069	3.837	0.069	5
2000	3.798	0.081	3.758	0.066	5
2200	3.798	0.071	3.748	0.061	5
2400	3.722	0.067	3.711	0.086	5
2600	3.846	0.091	3.789	0.067	5
2800	3.923	0.082	3.902	0.074	5
3000	3.559	0.074	3.628	0.068	5

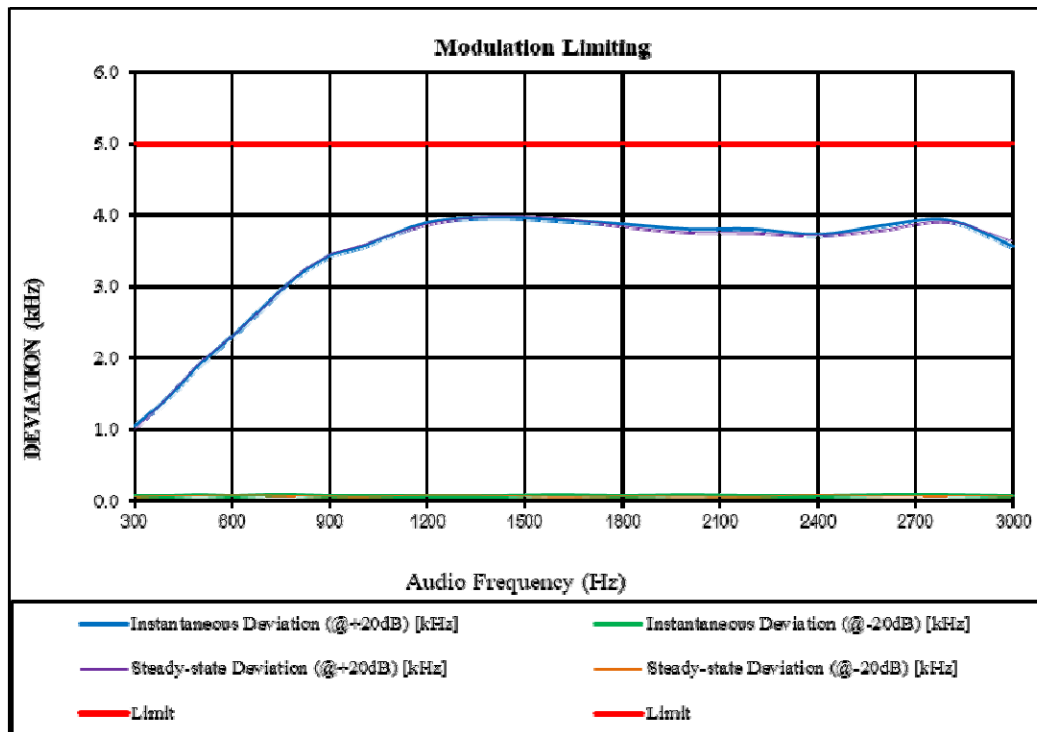

Audio Frequency Low Pass Filter Response – High Power

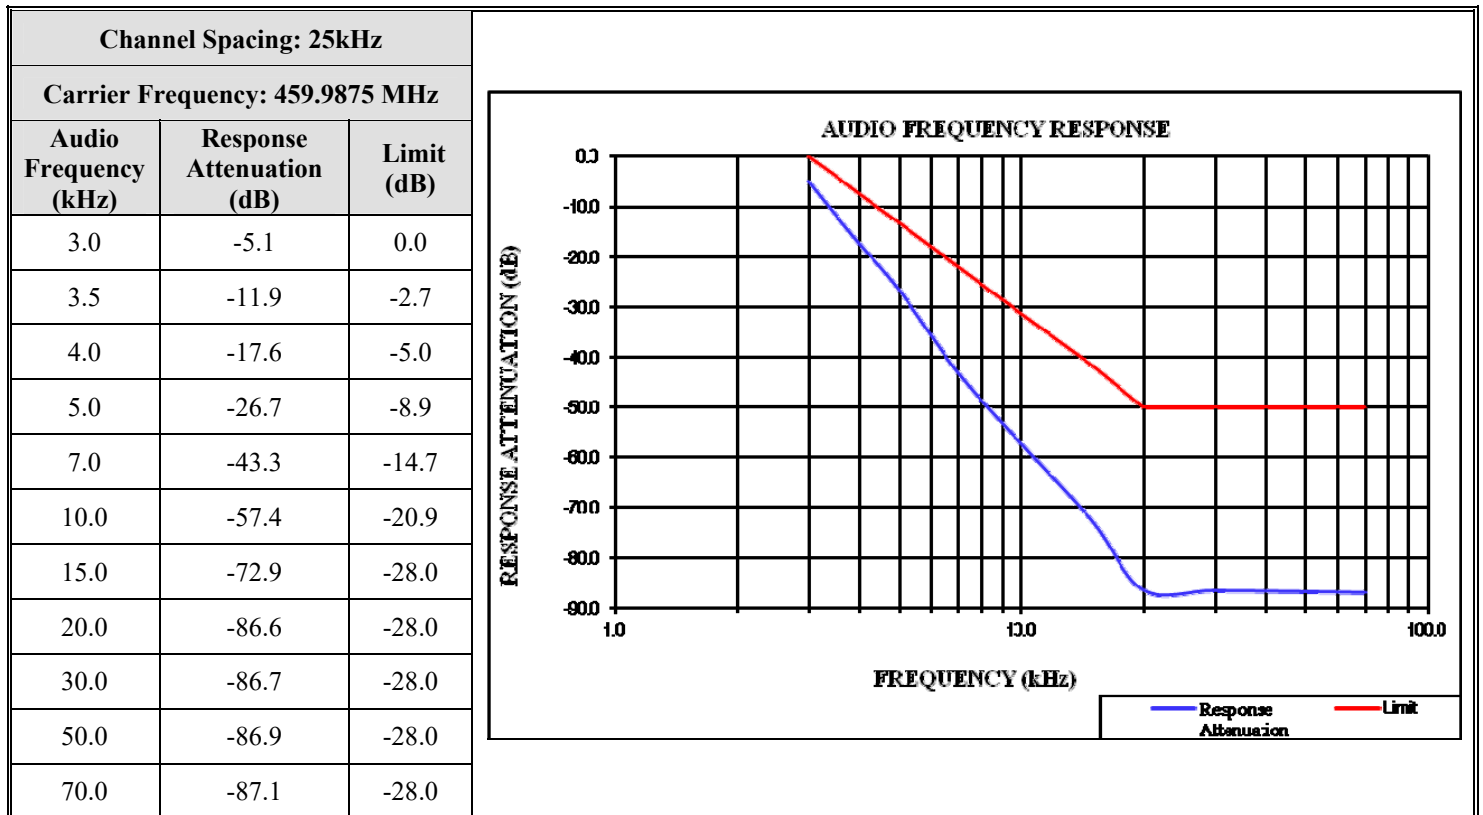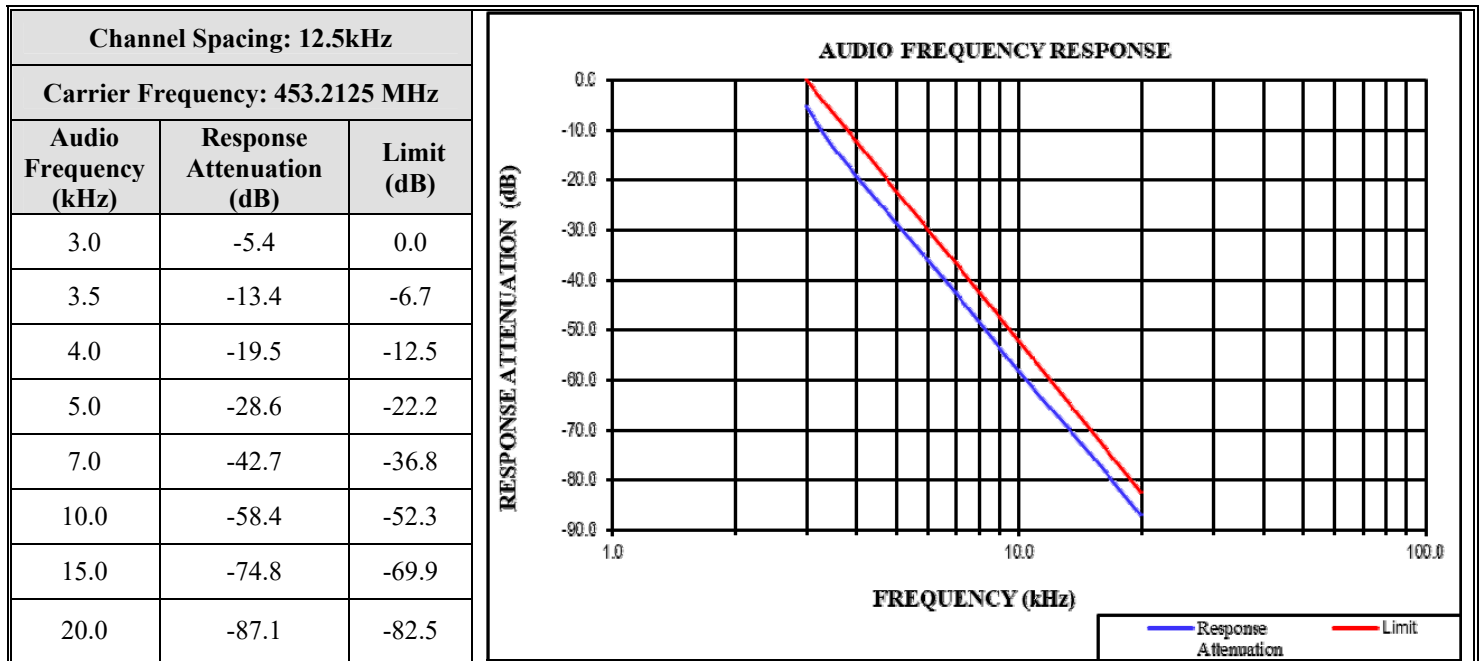

4 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, §80.205, §80.207, §90.209 and §90.210

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level		Note
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	
FM 12.5kHz	Low	400.0125	5.311	10.421	5.311	10.421	FCC
	Middle	453.2125	5.311	10.321	5.311	10.321	FCC Part 90
	High	469.9875	5.311	10.321	5.311	10.321	
	Additional	455.0125	5.311	10.421	5.311	10.421	FCC Part 74
	Additional	454.0125	5.311	10.321	5.311	10.321	FCC Part 22
4FSK 12.5kHz	Low	400.0125	7.415	9.419	7.615	10.120	FCC
	Middle	453.2125	7.415	9.719	7.816	9.419	FCC Part 90
	High	469.9875	7.315	9.218	7.515	10.120	
	Additional	455.0125	7.415	9.218	7.114	9.820	FCC Part 74
	Additional	454.0125	7.715	9.719	7.415	9.820	FCC Part 22
FM 25kHz	Additional	459.9875	10.621	15.832	10.621	15.832	FCC Part 80
	Additional	455.0125	10.621	15.832	10.621	15.832	FCC Part 74
	Additional	454.0125	10.621	15.832	10.621	15.832	FCC Part 22

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E



The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.



Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

FM, 12.5kHz, High Power:



Low Channel

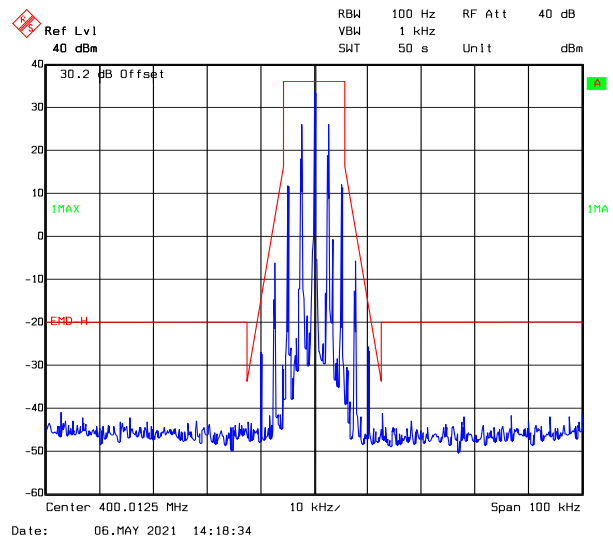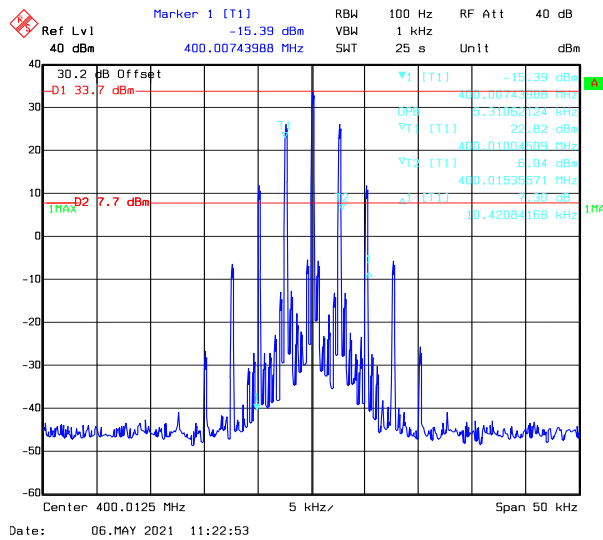



Middle Channel

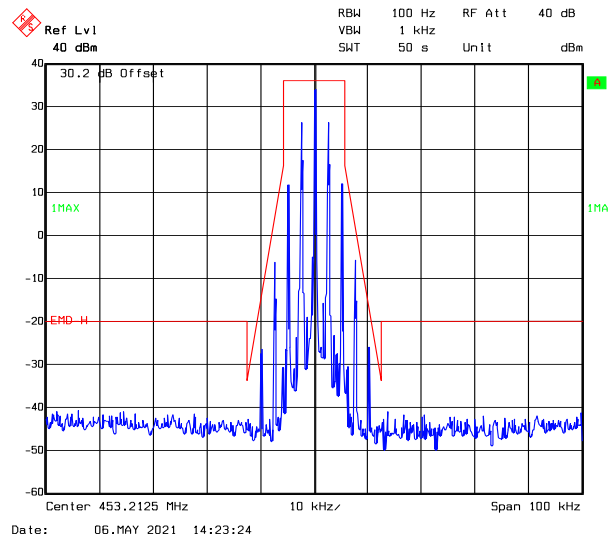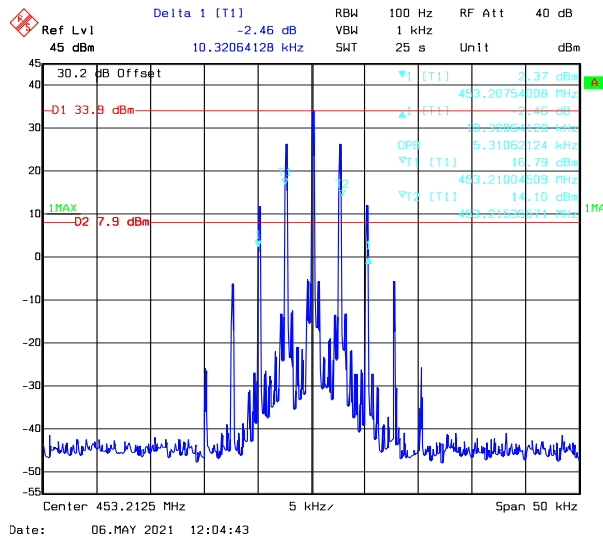



High Channel

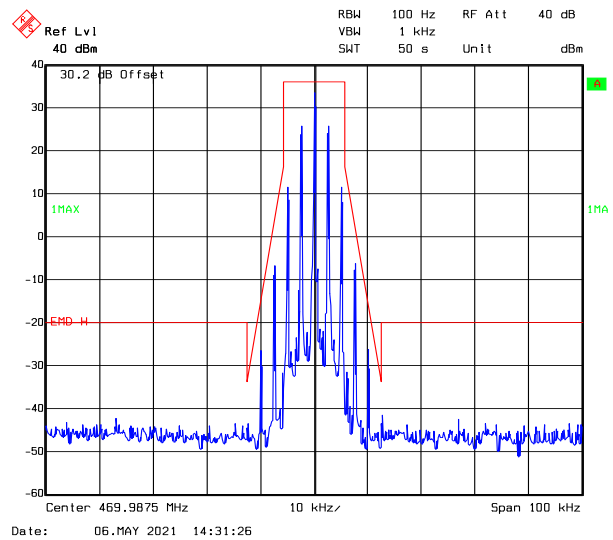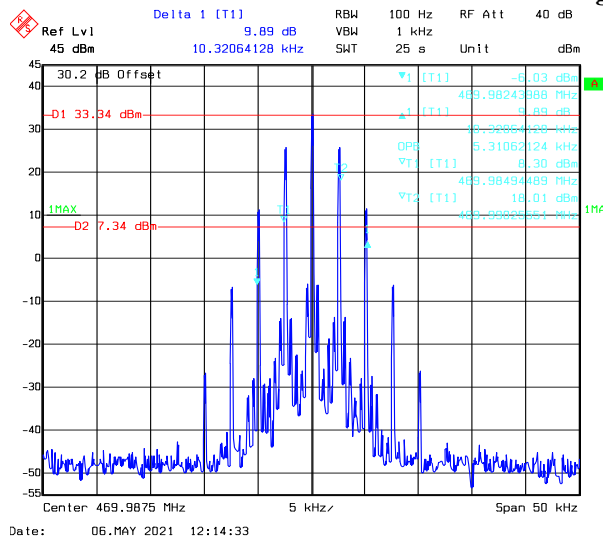

Additional Channel Part 74, 455.0125 MHz

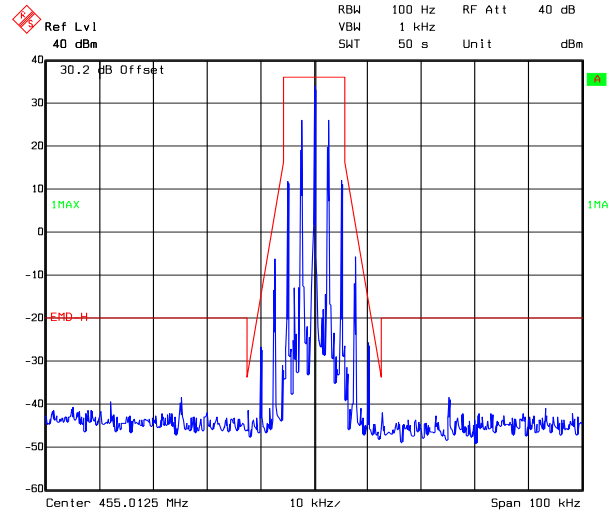
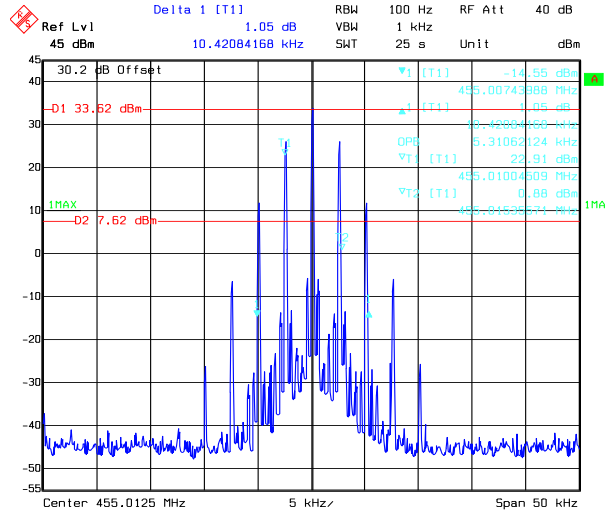


Additional Channel Part 22, 454.0125 MHz

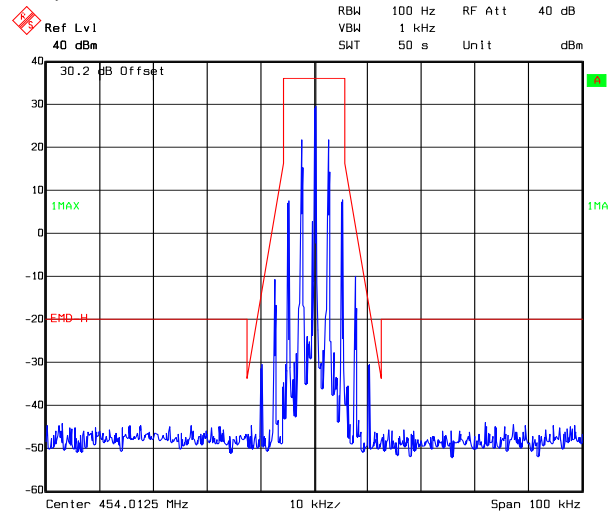
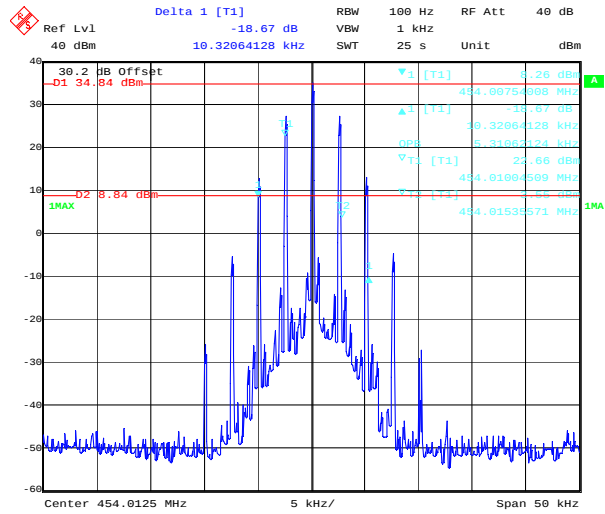


FM, 12.5kHz, Low Power:



Low Channel

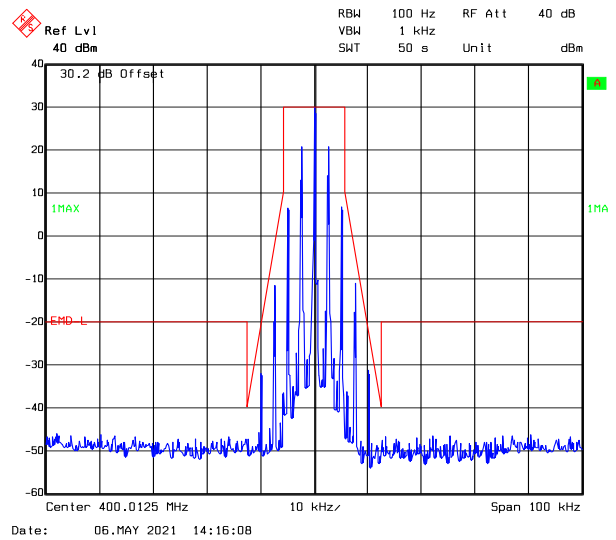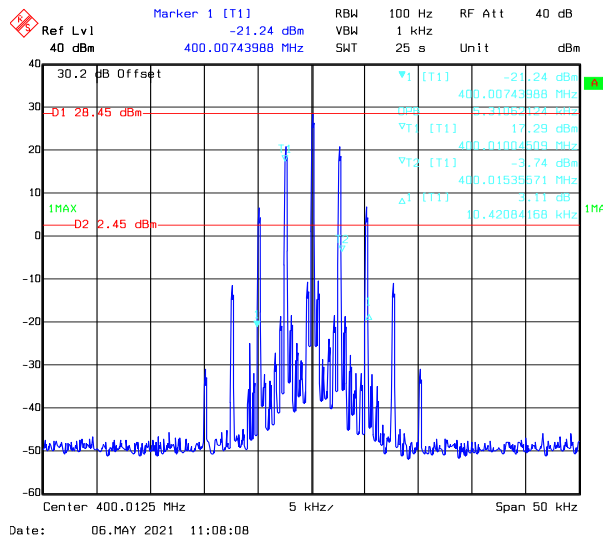

Middle Channel

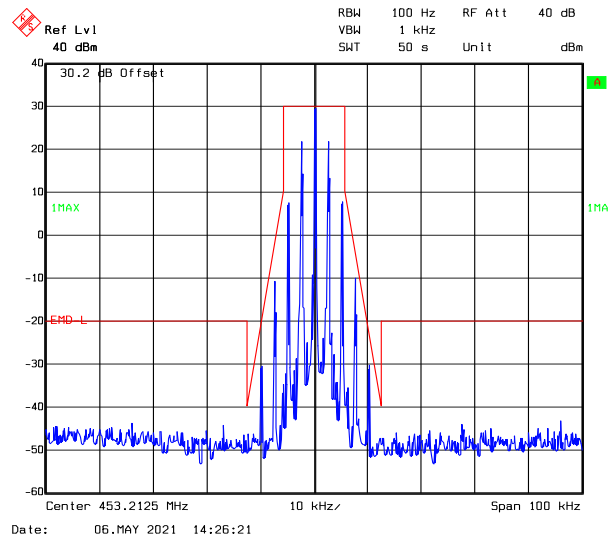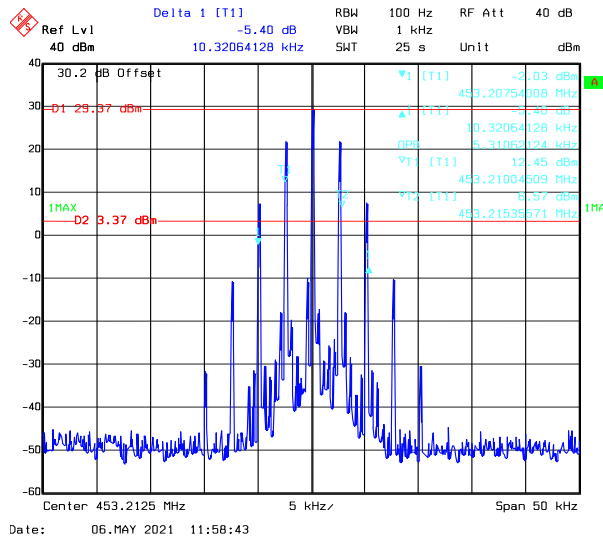

High Channel

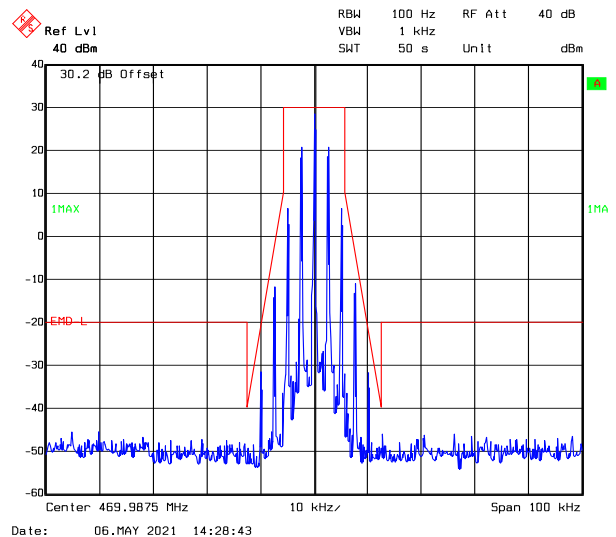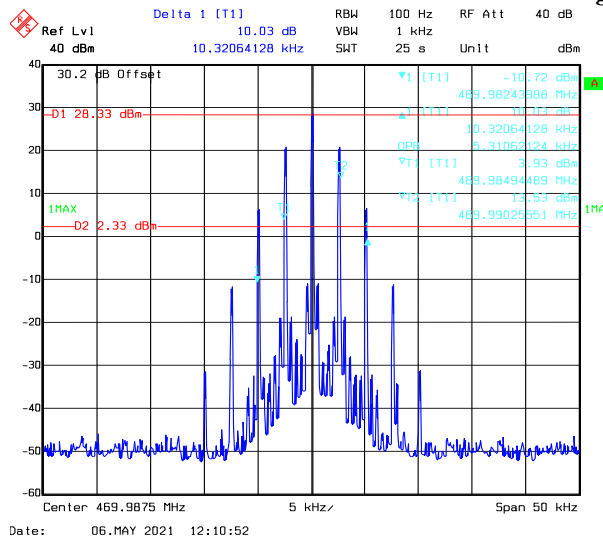

Marker 1 [T1] -19.25 dBm

Ref Lvl 40 dBm 455.00743988 MHz

RBW 100 Hz RF Att 40 dB

VBW 1 kHz

SMT 25 s Unit dBm

30.2 dB Offset

Y1 [T1] -19.25 dBm 455.00743988 MHz

D1 29.34 dBm

Y2 [T1] 18.55 dBm 455.01004809 MHz

Y3 [T1] -0.76 dBm 455.01535571 MHz

D2 3.34 dBm

Δ1 [T1] 30.42084168 kHz

1MAX

1MA

Center 455.0125 MHz 5 kHz/ Span 50 kHz

Ref Lvl 40 dBm
RBW 100 Hz
VBW 1 kHz
SWT 50 s
RF Att 40 dB
Unit dBm

30.2 dB Offset

1 MAX

END L

Center 455.0125 MHz 10 kHz/ Span 100 kHz

Delta 1 [T1]

Ref Lvl 0,48 dB

40 dBm 10.32064128 kHz

RBW 100 Hz

VBW 1 kHz

SMT 25 s

RF Att 40 dB

Unit dBm

30.2 dB Offset

D1 29.38 dBm

D2 3.38 dBm

1MAX

2MAX

3MAX

4MAX

5MAX

6MAX

7MAX

8MAX

9MAX

10MAX

11MAX

12MAX

13MAX

14MAX

15MAX

16MAX

17MAX

18MAX

19MAX

20MAX

21MAX

22MAX

23MAX

24MAX

25MAX

26MAX

27MAX

28MAX

29MAX

30MAX

31MAX

32MAX

33MAX

34MAX

35MAX

36MAX

37MAX

38MAX

39MAX

40MAX

41MAX

42MAX

43MAX

44MAX

45MAX

46MAX

47MAX

48MAX

49MAX

50MAX

51MAX

52MAX

53MAX

54MAX

55MAX

56MAX

57MAX

58MAX

59MAX

60MAX

61MAX

62MAX

63MAX

64MAX

65MAX

66MAX

67MAX

68MAX

69MAX

70MAX

71MAX

72MAX

73MAX

74MAX

75MAX

76MAX

77MAX

78MAX

79MAX

80MAX

81MAX

82MAX

83MAX

84MAX

85MAX

86MAX

87MAX

88MAX

89MAX

90MAX

91MAX

92MAX

93MAX

94MAX

95MAX

96MAX

97MAX

98MAX

99MAX

100MAX

101MAX

102MAX

103MAX

104MAX

105MAX

106MAX

107MAX

108MAX

109MAX

110MAX

111MAX

112MAX

113MAX

114MAX

115MAX

116MAX

117MAX

118MAX

119MAX

120MAX

121MAX

122MAX

123MAX

124MAX

125MAX

126MAX

127MAX

128MAX

129MAX

130MAX

131MAX

132MAX

133MAX

134MAX

135MAX

136MAX

137MAX

138MAX

139MAX

140MAX

141MAX

142MAX

143MAX

144MAX

145MAX

146MAX

147MAX

148MAX

149MAX

150MAX

151MAX

152MAX

153MAX

154MAX

155MAX

156MAX

157MAX

158MAX

159MAX

160MAX

161MAX

162MAX

163MAX

164MAX

165MAX

166MAX

167MAX

168MAX

169MAX

170MAX

171MAX

172MAX

173MAX

174MAX

175MAX

176MAX

177MAX

178MAX

179MAX

180MAX

181MAX

182MAX

183MAX

184MAX

185MAX

186MAX

187MAX

188MAX

189MAX

190MAX

191MAX

192MAX

193MAX

194MAX

195MAX

196MAX

197MAX

198MAX

199MAX

200MAX

201MAX

202MAX

203MAX

204MAX

205MAX

206MAX

207MAX

208MAX

209MAX

210MAX

211MAX

212MAX

213MAX

214MAX

215MAX

216MAX

217MAX

218MAX

219MAX

220MAX

221MAX

222MAX

223MAX

224MAX

225MAX

226MAX

227MAX

228MAX

229MAX

230MAX

231MAX

232MAX

233MAX

234MAX

235MAX

236MAX

237MAX

238MAX

239MAX

240MAX

241MAX

242MAX

243MAX

244MAX

245MAX

246MAX

247MAX

248MAX

249MAX

250MAX

251MAX

252MAX

253MAX

254MAX

255MAX

256MAX

257MAX

258MAX

259MAX

260MAX

261MAX

262MAX

263MAX

264MAX

265MAX

266MAX

267MAX

268MAX

269MAX

270MAX

271MAX

272MAX

273MAX

274MAX

275MAX

276MAX

277MAX

278MAX

279MAX

280MAX

281MAX

282MAX

283MAX

284MAX

285MAX

286MAX

287MAX

288MAX

289MAX

290MAX

291MAX

292MAX

293MAX

294MAX

295MAX

296MAX

297MAX

298MAX

299MAX

300MAX

301MAX

302MAX

303MAX

304MAX

305MAX

306MAX

307MAX

308MAX

309MAX

310MAX

311MAX

312MAX

313MAX

314MAX

315MAX

316MAX

317MAX

318MAX

319MAX

320MAX

321MAX

322MAX

323MAX

324MAX

325MAX

326MAX

327MAX

328MAX

329MAX

330MAX

331MAX

332MAX

333MAX

334MAX

335MAX

336MAX

337MAX

338MAX

339MAX

340MAX

341MAX

342MAX

343MAX

344MAX

345MAX

346MAX

347MAX

348MAX

349MAX

350MAX

351MAX

352MAX

353MAX

354MAX

355MAX

356MAX

357MAX

358MAX

359MAX

360MAX

361MAX

362MAX

363MAX

364MAX

365MAX

366MAX

367MAX

368MAX

369MAX

370MAX

371MAX

372MAX

373MAX

374MAX

375MAX

376MAX

377MAX

378MAX

379MAX

380MAX

381MAX

382MAX

3

Ref Lvl 100 Hz RF Att 40 dB
40 dBm BWB 1 kHz Unit dBm
SWT 50 s

30.2 dB Offset

1 MAX



END L

Center 454.0125 MHz 10 kHz/ Span 100 kHz



Date: 06.MAY 2021 14:42:27

4FSK, 12.5kHz, High Power:



Low Channel

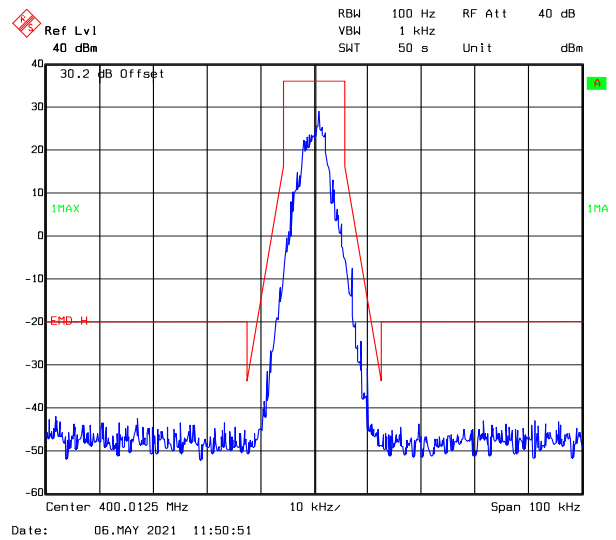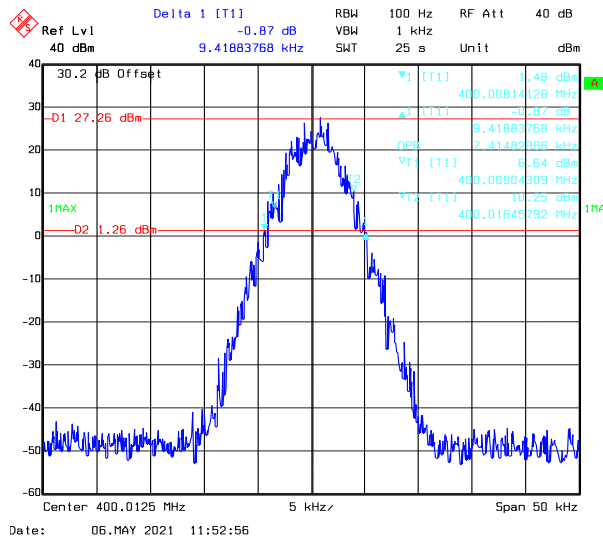



Middle Channel

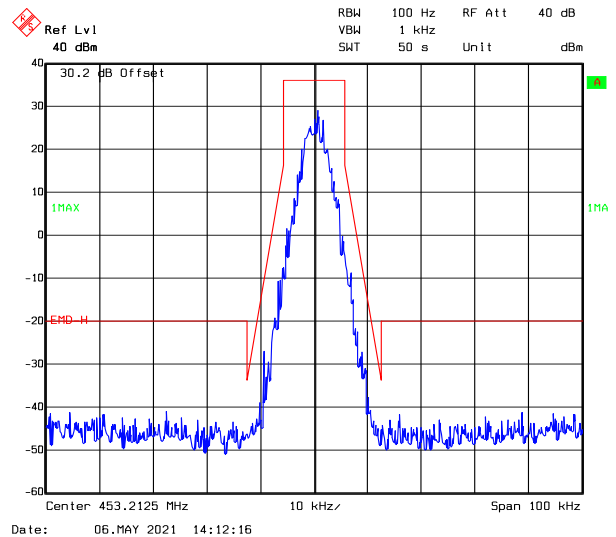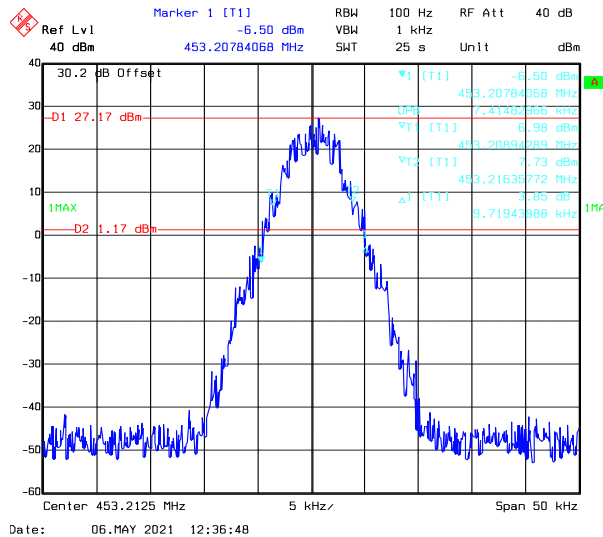



High Channel

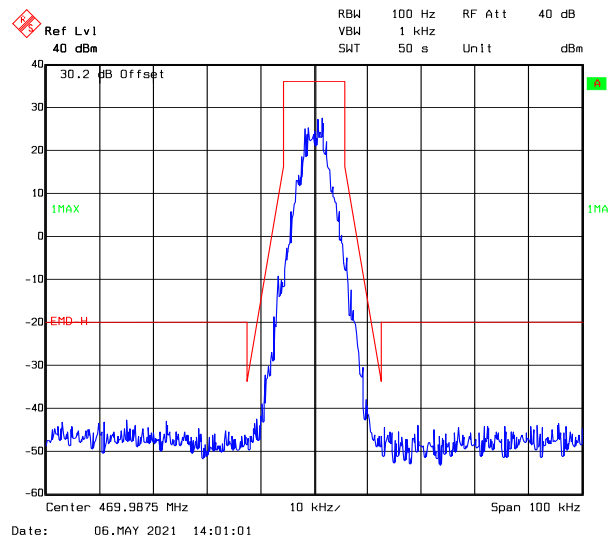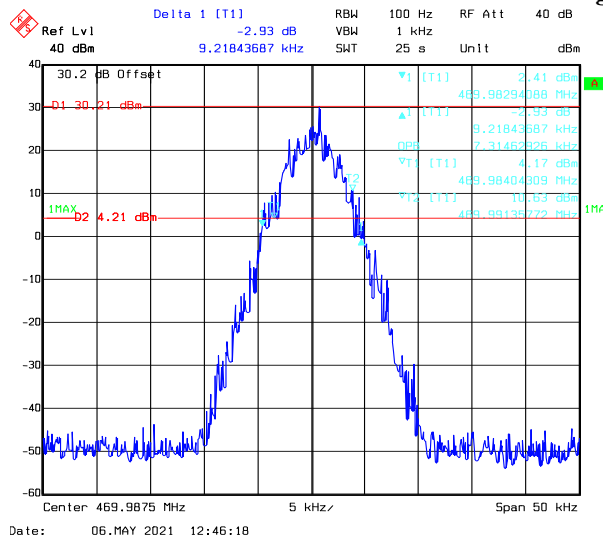

Additional Channel Part 74, 455.0125 MHz

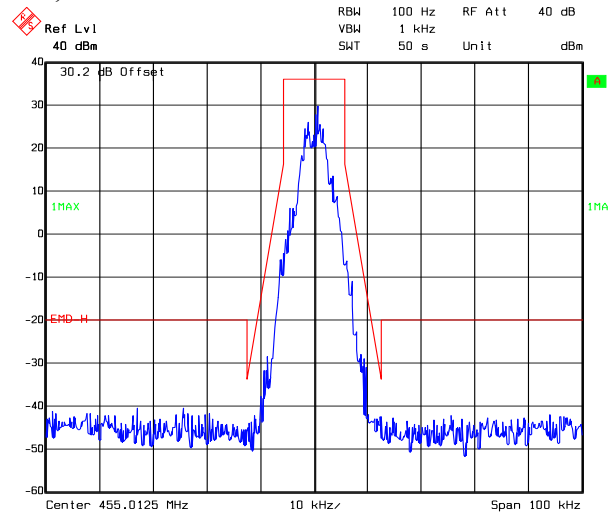
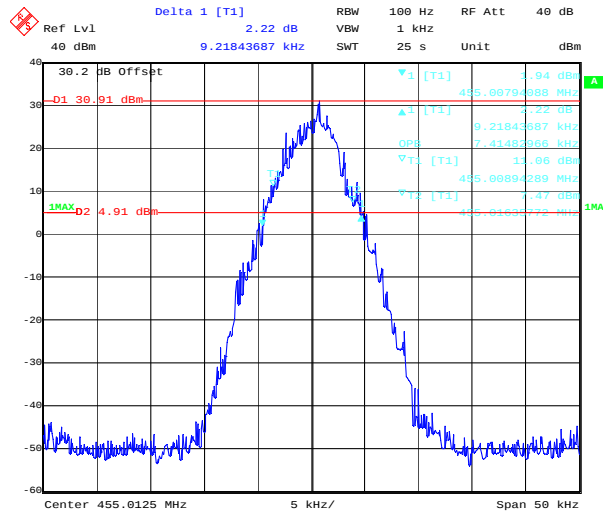


Additional Channel Part 22, 454.0125 MHz

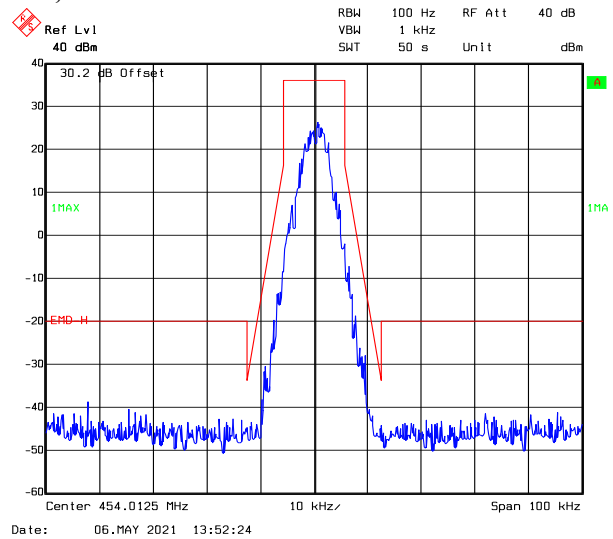
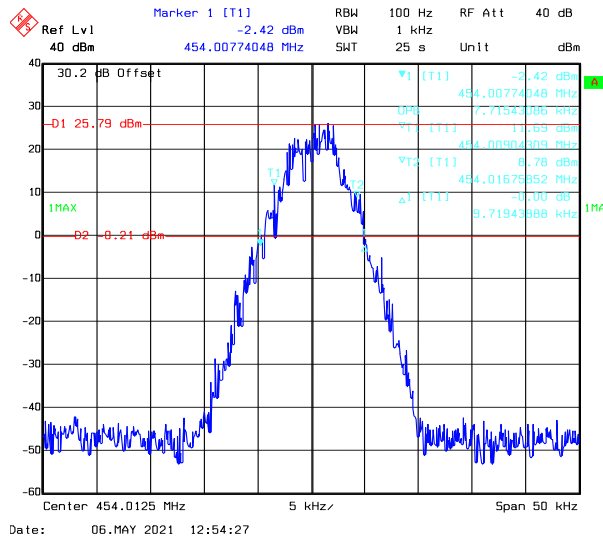


4FSK, 12.5kHz, Low Power:



Low Channel

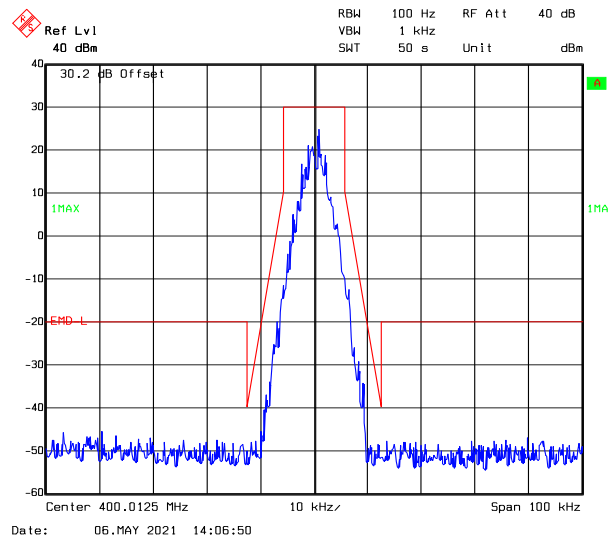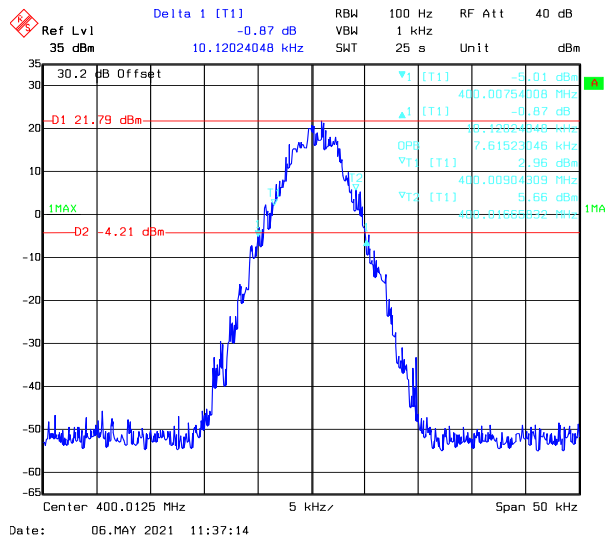


Middle Channel

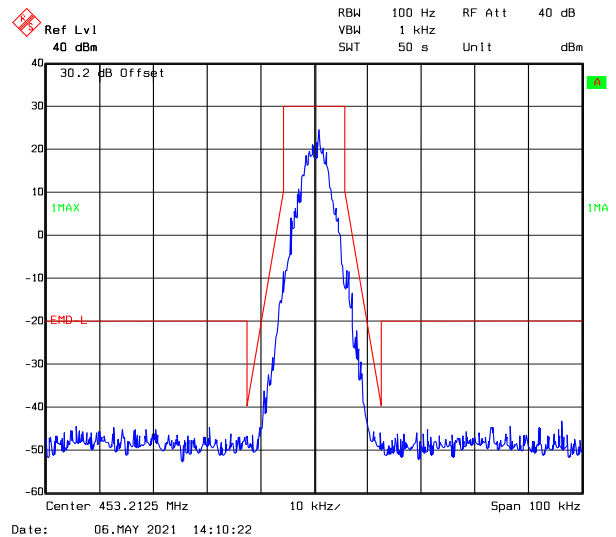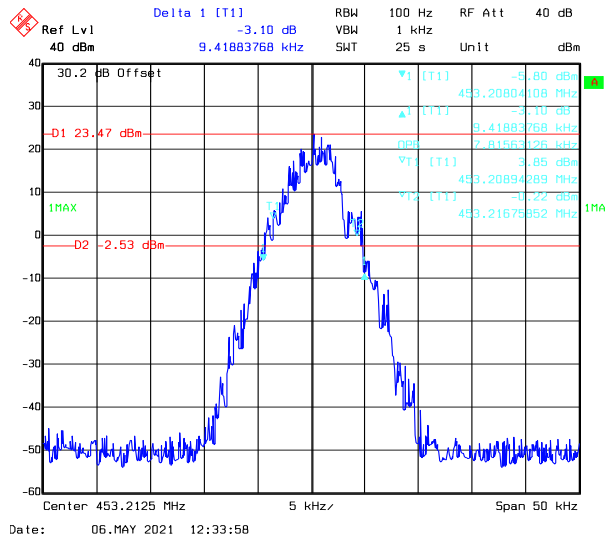


High Channel

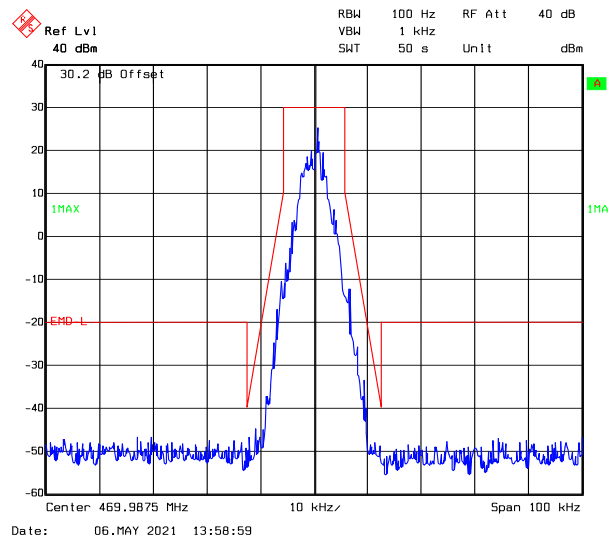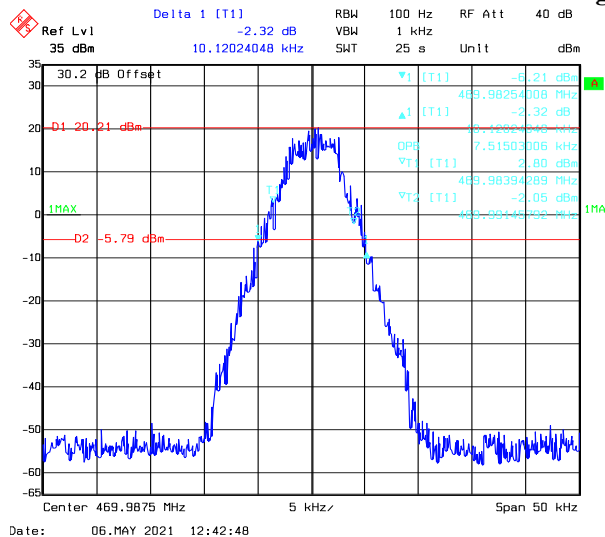

Additional Channel Part 74, 455.0125 MHz

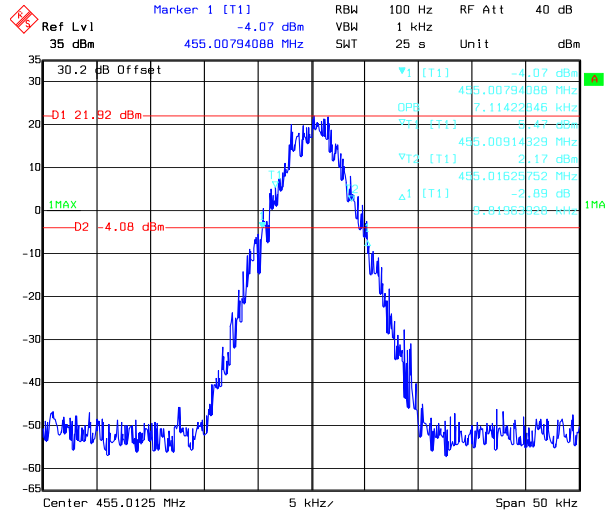


Date: 06.MAY 2021 13:01:30

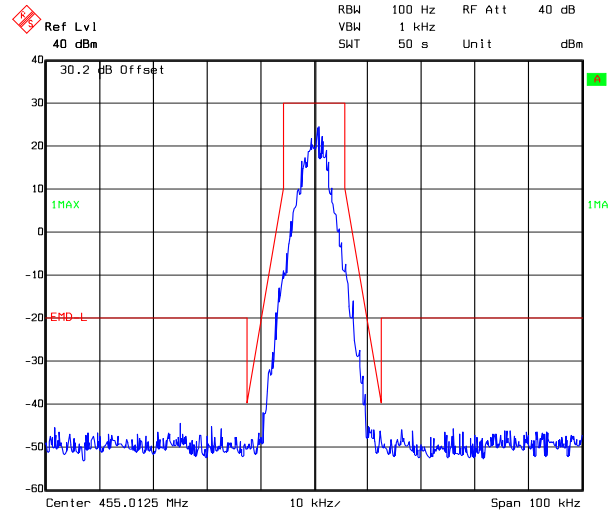


Date: 06.MAY 2021 13:48:07

Additional Channel Part 22, 454.0125 MHz

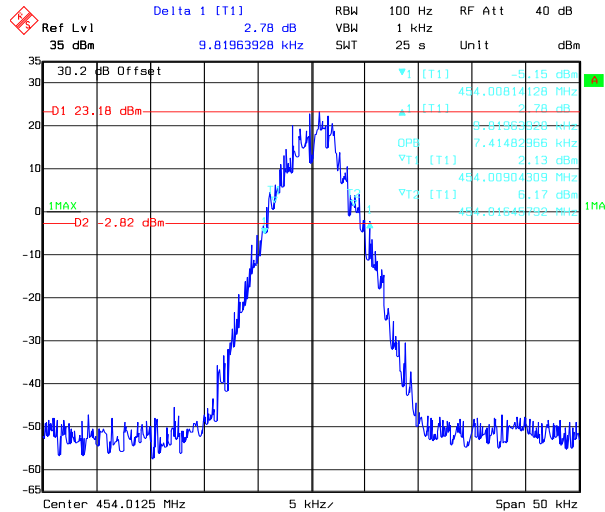

Date: 06.MAY 2021 12:51:06

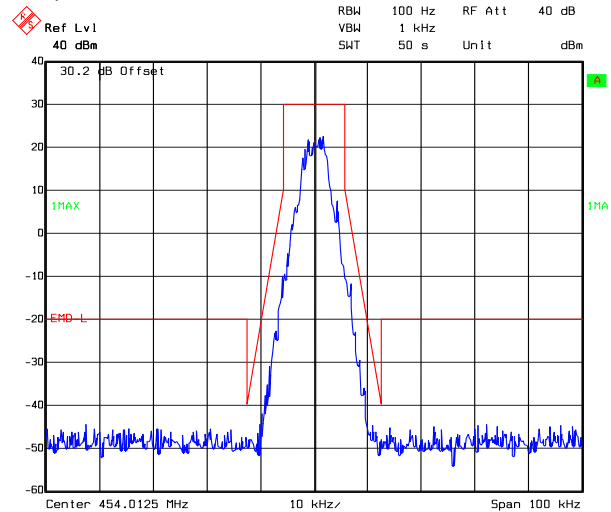

Date: 06.MAY 2021 13:56:03

Additional Channel Part 80, 459.9875 MHz



300 Hz RF Att 40 dB
3 kHz





300 Hz RF Att 40 dB
3 kHz





FM, 25 kHz, Low Power:



Additional Channel Part 80, 459.9875 MHz

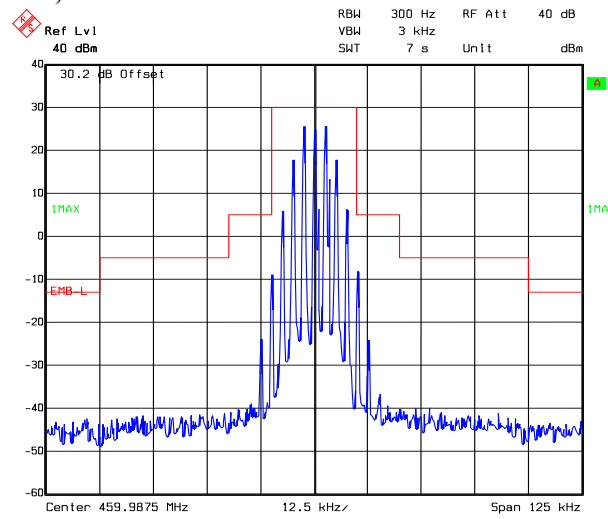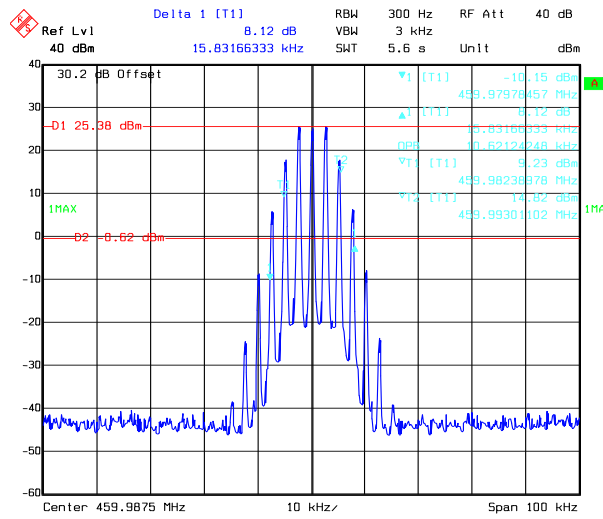

Additional Channel Part 74, 455.0125 MHz

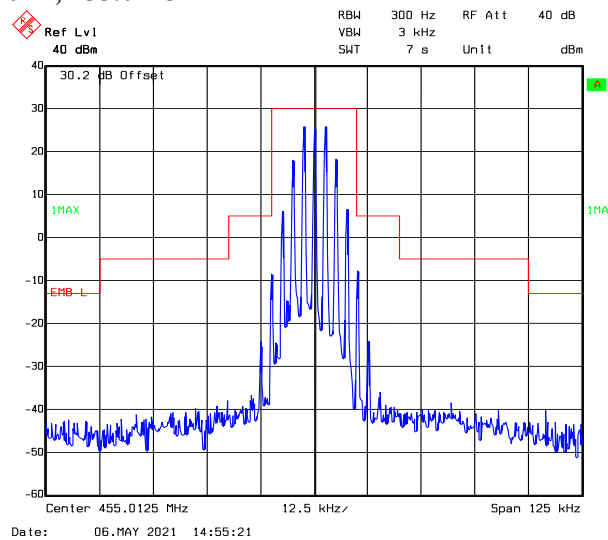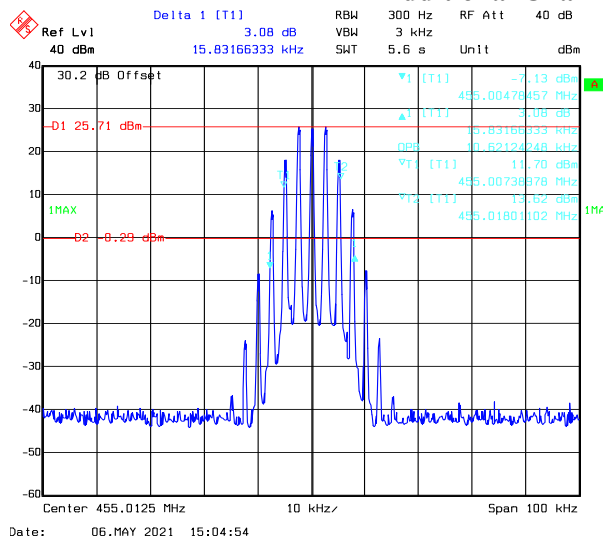

Additional Channel Part 22, 454.0125 MHz

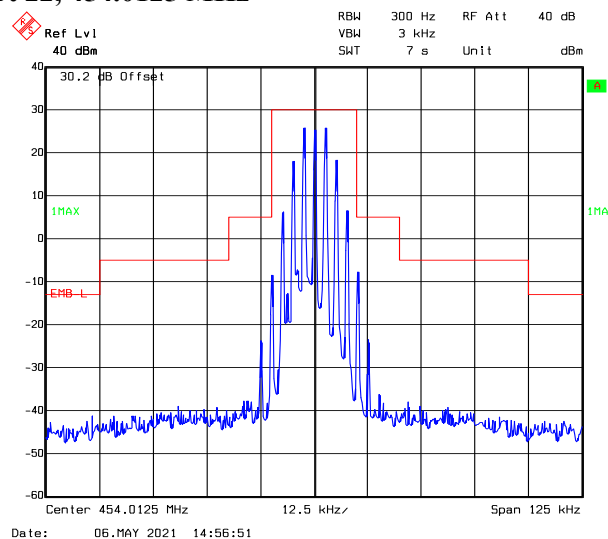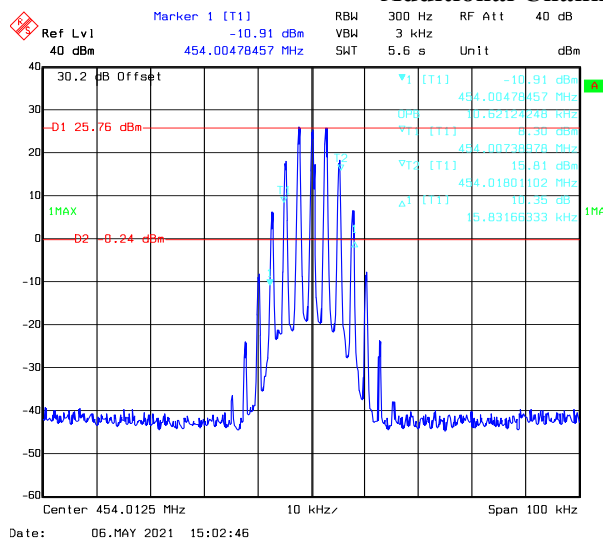

5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051, §22.861, §74.462, §80.211, and §90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data


Test Mode: Transmitting

Test Result: Compliance.


Test performed at high power level with Band reject filter, *please refer to the following plots.*

FM, 12.5kHz:

Low Channel, 400.0125 MHz

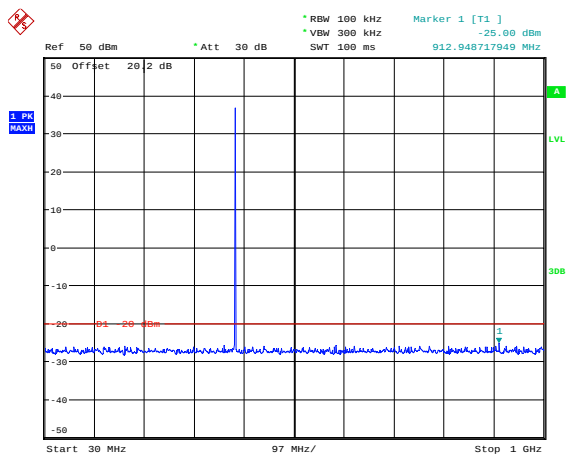


Date: 19.MAY.2021 10:11:26

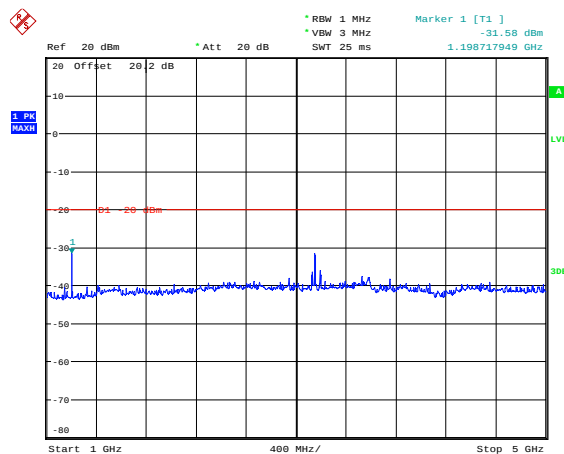


Date: 19.MAY.2021 10:48:45

Middle Channel, 453.2125 MHz

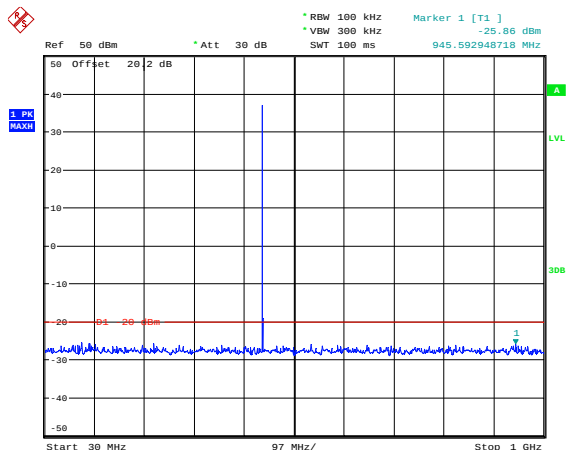


Date: 19.MAY.2021 10:12:39

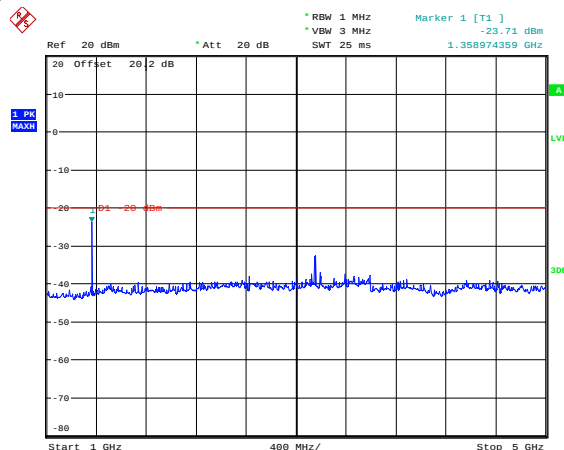


Date: 19.MAY.2021 10:50:40

High Channel, 469.9875 MHz

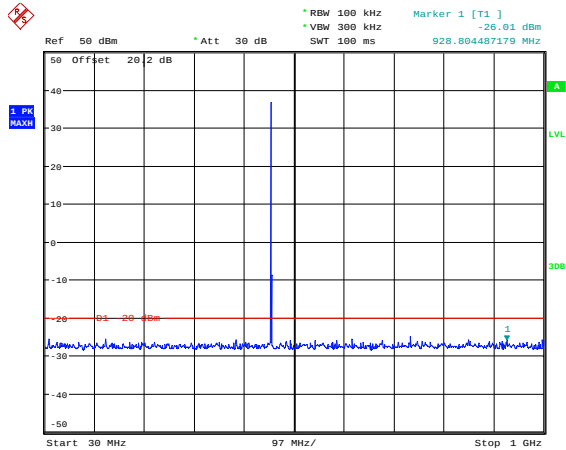


Date: 19.MAY.2021 10:19:40

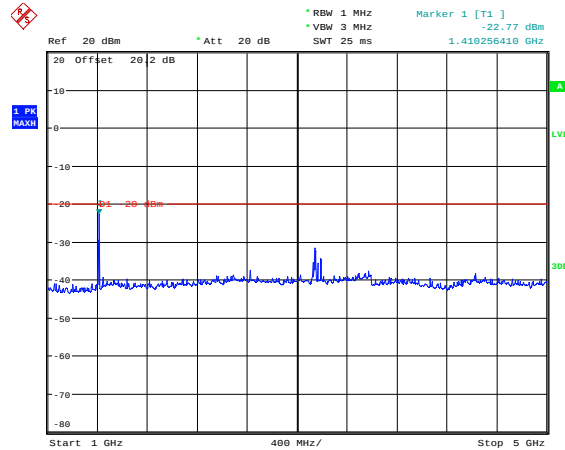


Date: 19.MAY.2021 10:52:46

4FSK, 12.5kHz:

Low Channel, 400.0125 MHz

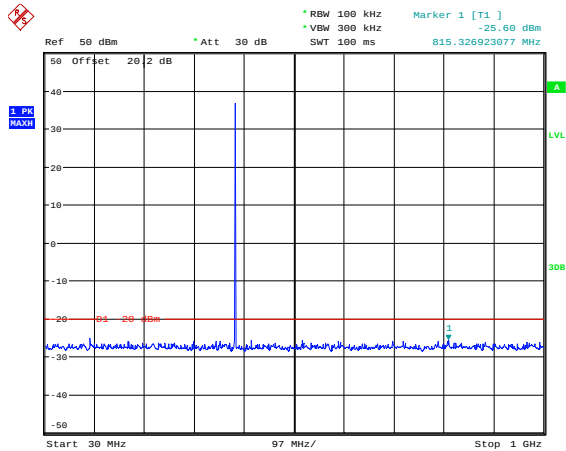


Date: 19.MAY.2021 10:38:18

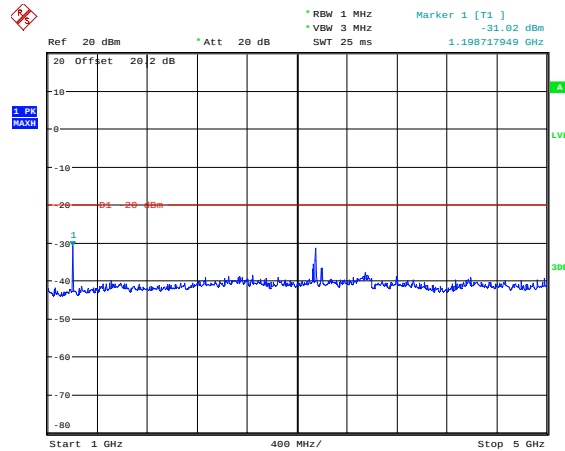


Date: 19.MAY.2021 10:57:55

Middle Channel, 453.2125 MHz

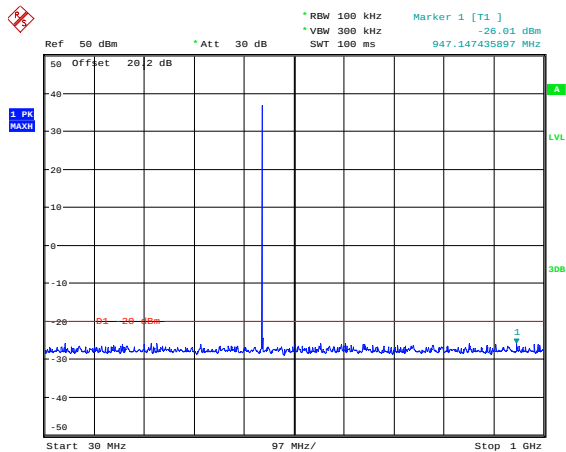


Date: 19.MAY.2021 11:13:50

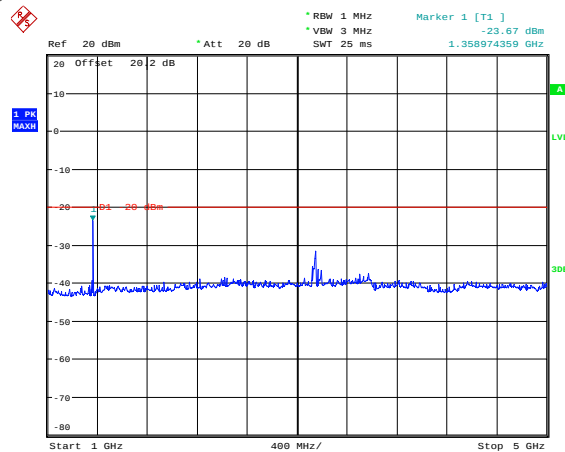


Date: 19.MAY.2021 10:58:58

High Channel, 469.9875 MHz

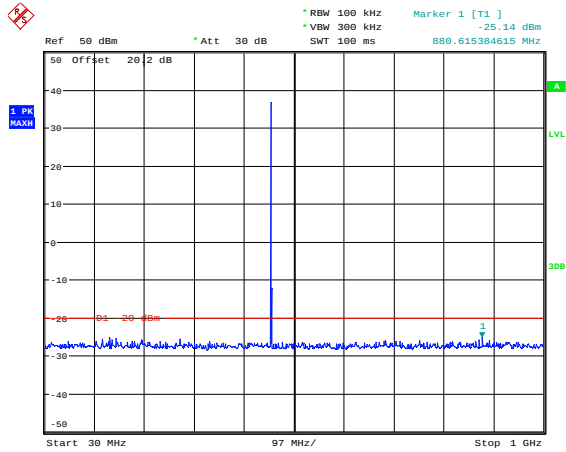


Date: 19.MAY.2021 10:42:37

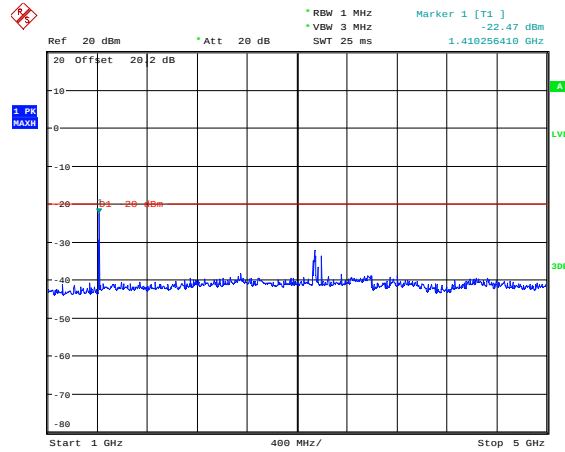


Date: 19.MAY.2021 11:00:28

Part 80:

FM,12.5kHz, 459.9875 MHz

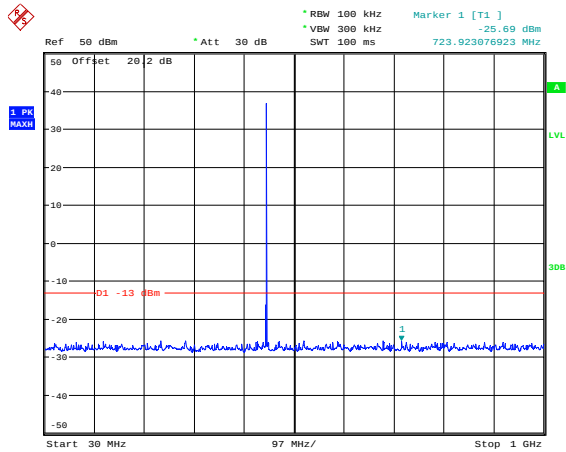


Date: 19.MAY.2021 10:18:08

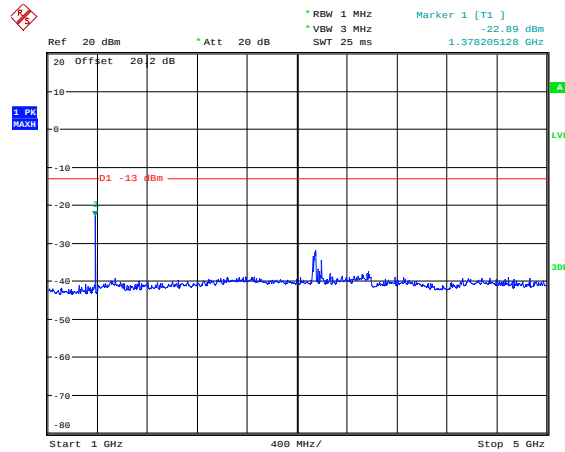


Date: 19.MAY.2021 11:02:09

Part 74:

FM,12.5kHz, 455.0125 MHz


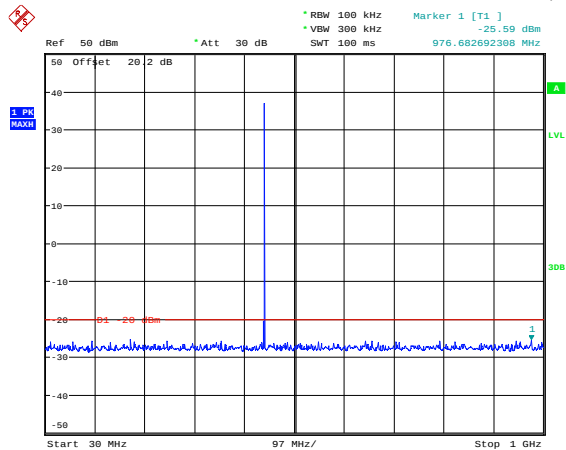


Date: 19.MAY.2021 10:30:17

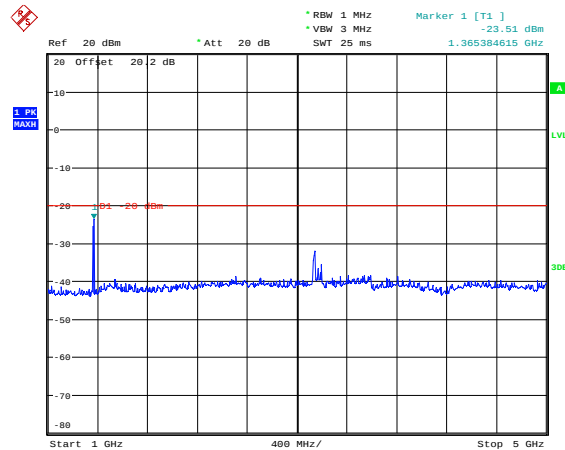

Date: 19.MAY.2021 10:54:32



FM,25kHz, 455.0125 MHz

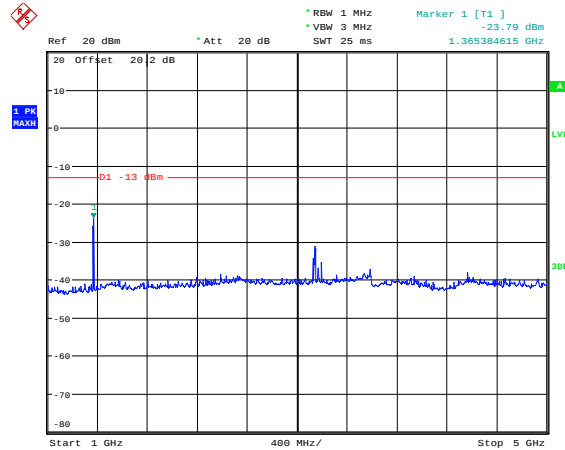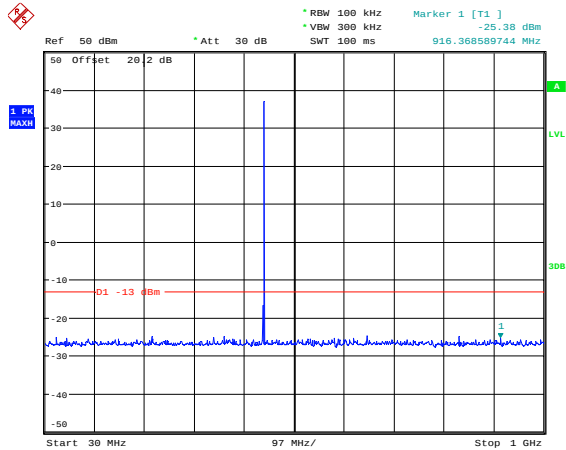

Date: 19.MAY.2021 10:27:59

Date: 19.MAY.2021 11:03:14

4FSK,12.5kHz, 455.0125 MHz (All emission under limit)

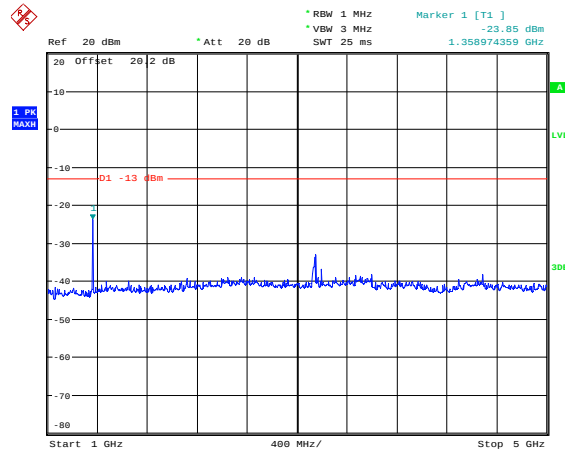
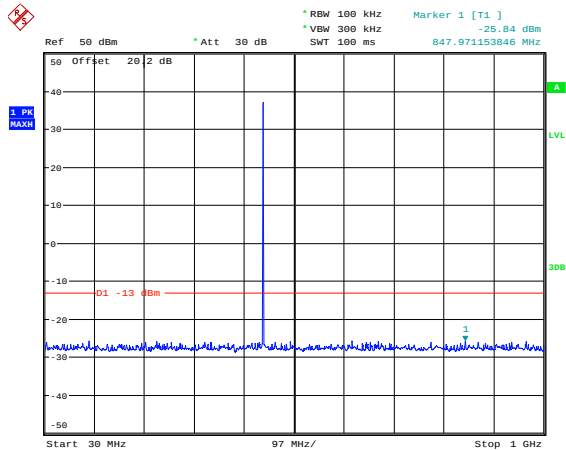


Date: 19.MAY.2021 10:35:07

Date: 19.MAY.2021 11:05:38

Part 22:



FM,12.5kHz, 454.0125 MHz

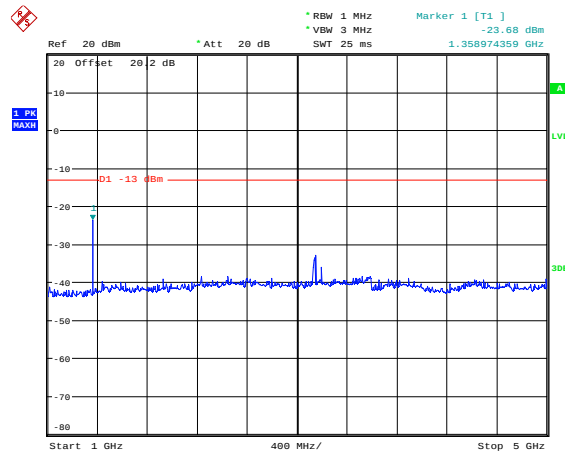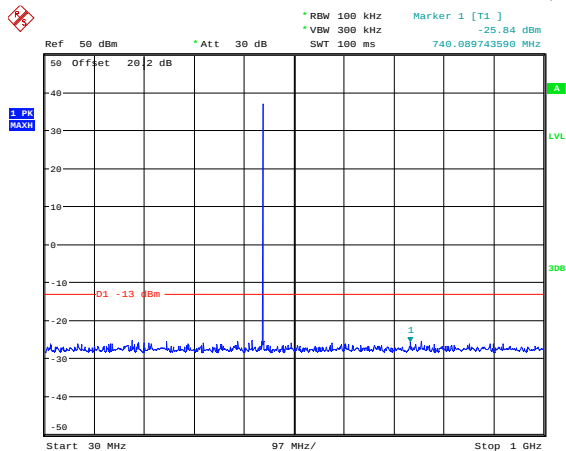

Date: 19.MAY.2021 10:33:24

Date: 19.MAY.2021 11:04:46



FM,25kHz, 454.0125 MHz

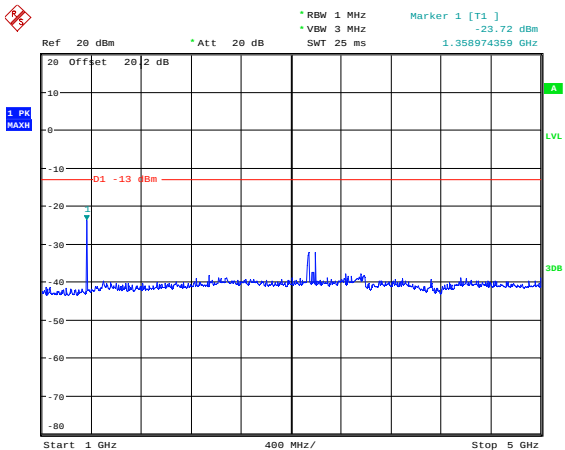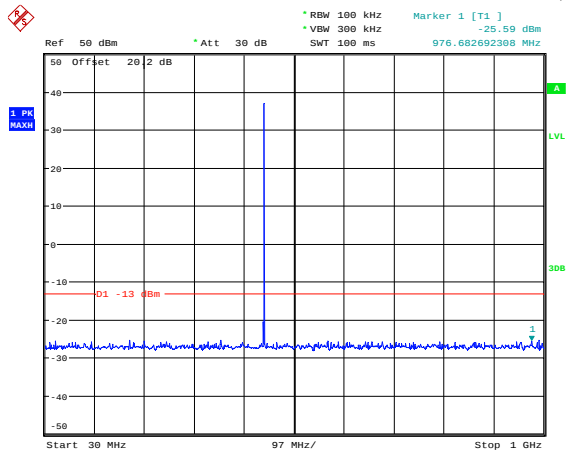

Date: 19.MAY.2021 10:32:14

Date: 19.MAY.2021 11:04:04

4FSK,12.5kHz, 454.0125 MHz

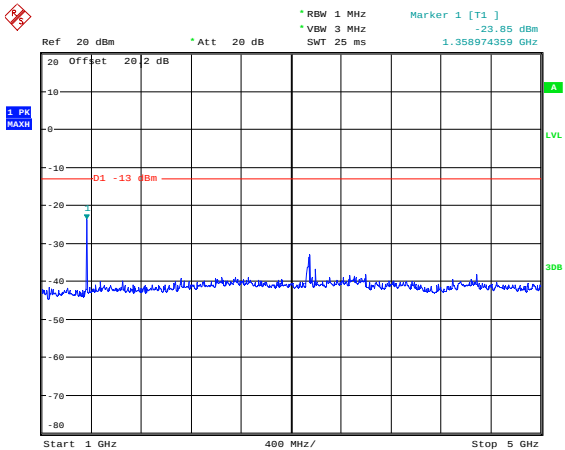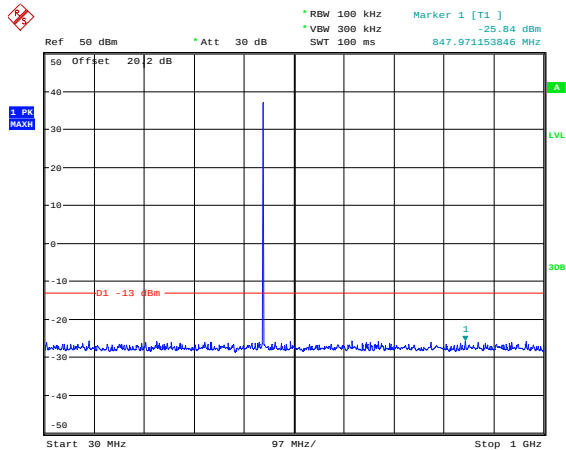

Date: 19.MAY.2021 10:35:07

Date: 19.MAY.2021 11:05:38

6 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, §80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ - the absolute level

Test Data

Test Mode: Transmitting

Test Result: Compliance.

Test performed at high power level with Band Rejector Filter, *please refer to the following table.*

30MHz - 5GHz:**Part 90**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	40.98	-57.55	0.00	0.49	-58.04	-20.00	38.04
800.03	V	45.26	-50.24	0.00	0.49	-50.73	-20.00	30.73
1200.04	H	39.35	-63.72	8.74	0.98	-55.96	-20.00	35.96
1200.04	V	39.00	-64.48	8.74	0.98	-56.72	-20.00	36.72
1600.05	H	39.35	-65.73	10.30	1.31	-56.74	-20.00	36.74
1600.05	V	39.10	-65.91	10.30	1.31	-56.92	-20.00	36.92
2000.06	H	38.63	-66.12	11.50	1.13	-55.75	-20.00	35.75
2000.06	V	39.24	-65.45	11.50	1.13	-55.08	-20.00	35.08
2400.08	H	38.96	-64.91	12.06	1.22	-54.07	-20.00	34.07
2400.08	V	38.81	-66.18	12.06	1.22	-55.34	-20.00	35.34
2800.09	H	38.74	-64.39	12.32	1.40	-53.47	-20.00	33.47
2800.09	V	38.83	-64.80	12.32	1.40	-53.88	-20.00	33.88
3200.10	H	38.97	-63.46	12.32	1.54	-52.68	-20.00	32.68
3200.10	V	38.89	-62.88	12.32	1.54	-52.10	-20.00	32.10
3600.11	H	38.82	-62.78	12.22	1.58	-52.14	-20.00	32.14
3600.11	V	38.74	-61.82	12.22	1.58	-51.18	-20.00	31.18
4000.13	H	39.21	-61.15	12.30	1.45	-50.30	-20.00	30.30
4000.13	V	38.63	-62.54	12.30	1.45	-51.69	-20.00	31.69
4FSK, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	41.06	-57.47	0.00	0.49	-57.96	-20.00	37.96
800.03	V	46.21	-49.29	0.00	0.49	-49.78	-20.00	29.78
1200.04	H	39.49	-63.58	8.74	0.98	-55.82	-20.00	35.82
1200.04	V	39.48	-64.00	8.74	0.98	-56.24	-20.00	36.24
1600.05	H	38.99	-66.09	10.30	1.31	-57.10	-20.00	37.10
1600.05	V	39.27	-65.74	10.30	1.31	-56.75	-20.00	36.75
2000.06	H	39.05	-65.70	11.50	1.13	-55.33	-20.00	35.33
2000.06	V	38.95	-65.74	11.50	1.13	-55.37	-20.00	35.37
2400.08	H	38.89	-64.98	12.06	1.22	-54.14	-20.00	34.14
2400.08	V	39.02	-65.97	12.06	1.22	-55.13	-20.00	35.13
2800.09	H	38.95	-64.18	12.32	1.40	-53.26	-20.00	33.26
2800.09	V	39.56	-64.07	12.32	1.40	-53.15	-20.00	33.15
3200.10	H	39.58	-62.85	12.32	1.54	-52.07	-20.00	32.07
3200.10	V	39.61	-62.16	12.32	1.54	-51.38	-20.00	31.38
3600.11	H	39.54	-62.06	12.22	1.58	-51.42	-20.00	31.42
3600.11	V	39.05	-61.51	12.22	1.58	-50.87	-20.00	30.87
4000.13	H	39.56	-60.80	12.30	1.45	-49.95	-20.00	29.95
4000.13	V	38.89	-62.28	12.30	1.45	-51.43	-20.00	31.43

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 453.2125MHz-12.5 kHz								
906.43	H	40.69	-54.68	0.00	0.51	-55.19	-20.00	35.19
906.43	V	44.39	-47.65	0.00	0.51	-48.16	-20.00	28.16
1359.64	H	38.78	-65.40	9.41	1.18	-57.17	-20.00	37.17
1359.64	V	38.91	-65.43	9.41	1.18	-57.20	-20.00	37.20
1812.85	H	38.74	-66.16	10.94	1.21	-56.43	-20.00	36.43
1812.85	V	39.13	-65.71	10.94	1.21	-55.98	-20.00	35.98
2266.06	H	39.06	-65.10	11.87	1.19	-54.42	-20.00	34.42
2266.06	V	38.88	-66.01	11.87	1.19	-55.33	-20.00	35.33
2719.28	H	38.51	-64.76	12.29	1.35	-53.82	-20.00	33.82
2719.28	V	39.14	-64.88	12.29	1.35	-53.94	-20.00	33.94
3172.49	H	38.89	-63.59	12.33	1.54	-52.80	-20.00	32.80
3172.49	V	38.89	-63.00	12.33	1.54	-52.21	-20.00	32.21
3625.70	H	38.93	-62.59	12.23	1.57	-51.93	-20.00	31.93
3625.70	V	38.83	-61.77	12.23	1.57	-51.11	-20.00	31.11
4078.91	H	39.19	-60.98	12.47	1.46	-49.97	-20.00	29.97
4078.91	V	39.12	-61.79	12.47	1.46	-50.78	-20.00	30.78
4532.13	H	38.95	-60.09	13.37	1.53	-48.25	-20.00	28.25
4532.13	V	38.81	-60.54	13.37	1.53	-48.70	-20.00	28.70
4FSK, Frequency: 453.2125MHz-12.5 kHz								
906.43	H	39.99	-55.38	0.00	0.51	-55.89	-20.00	35.89
906.43	V	45.10	-46.94	0.00	0.51	-47.45	-20.00	27.45
1359.64	H	38.98	-65.20	9.41	1.18	-56.97	-20.00	36.97
1359.64	V	39.03	-65.31	9.41	1.18	-57.08	-20.00	37.08
1812.85	H	38.77	-66.13	10.94	1.21	-56.40	-20.00	36.40
1812.85	V	38.77	-66.07	10.94	1.21	-56.34	-20.00	36.34
2266.06	H	38.58	-65.58	11.87	1.19	-54.90	-20.00	34.90
2266.06	V	38.77	-66.12	11.87	1.19	-55.44	-20.00	35.44
2719.28	H	39.00	-64.27	12.29	1.35	-53.33	-20.00	33.33
2719.28	V	38.47	-65.55	12.29	1.35	-54.61	-20.00	34.61
3172.49	H	38.73	-63.75	12.33	1.54	-52.96	-20.00	32.96
3172.49	V	38.89	-63.00	12.33	1.54	-52.21	-20.00	32.21
3625.70	H	39.03	-62.49	12.23	1.57	-51.83	-20.00	31.83
3625.70	V	39.08	-61.52	12.23	1.57	-50.86	-20.00	30.86
4078.91	H	38.59	-61.58	12.47	1.46	-50.57	-20.00	30.57
4078.91	V	39.03	-61.88	12.47	1.46	-50.87	-20.00	30.87
4532.13	H	38.99	-60.05	13.37	1.53	-48.21	-20.00	28.21
4532.13	V	38.96	-60.39	13.37	1.53	-48.55	-20.00	28.55

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 469.9875MHz-12.5 kHz								
939.98	H	41.22	-52.96	0.00	0.51	-53.47	-20.00	33.47
939.98	V	46.78	-44.29	0.00	0.51	-44.80	-20.00	24.80
1409.96	H	38.83	-65.70	9.62	1.24	-57.32	-20.00	37.32
1409.96	V	38.91	-65.70	9.62	1.24	-57.32	-20.00	37.32
1879.95	H	39.22	-65.63	11.14	1.18	-55.67	-20.00	35.67
1879.95	V	39.32	-65.47	11.14	1.18	-55.51	-20.00	35.51
2349.94	H	38.67	-65.31	11.99	1.21	-54.53	-20.00	34.53
2349.94	V	38.77	-66.19	11.99	1.21	-55.41	-20.00	35.41
2819.93	H	38.93	-64.16	12.33	1.41	-53.24	-20.00	33.24
2819.93	V	39.06	-64.47	12.33	1.41	-53.55	-20.00	33.55
3289.91	H	39.06	-63.22	12.28	1.56	-52.50	-20.00	32.50
3289.91	V	38.77	-62.59	12.28	1.56	-51.87	-20.00	31.87
3759.90	H	39.15	-61.95	12.25	1.53	-51.23	-20.00	31.23
3759.90	V	39.05	-61.76	12.25	1.53	-51.04	-20.00	31.04
4229.89	H	38.88	-60.92	12.81	1.49	-49.60	-20.00	29.60
4229.89	V	39.23	-61.18	12.81	1.49	-49.86	-20.00	29.86
4699.88	H	39.11	-59.35	13.24	1.50	-47.61	-20.00	27.61
4699.88	V	38.60	-59.94	13.24	1.50	-48.20	-20.00	28.20
4FSK, Frequency: 469.9875MHz-12.5 kHz								
939.98	H	40.63	-53.55	0.00	0.51	-54.06	-20.00	34.06
939.98	V	45.11	-45.96	0.00	0.51	-46.47	-20.00	26.47
1409.96	H	39.67	-64.86	9.62	1.24	-56.48	-20.00	36.48
1409.96	V	39.54	-65.07	9.62	1.24	-56.69	-20.00	36.69
1879.95	H	39.82	-65.03	11.14	1.18	-55.07	-20.00	35.07
1879.95	V	39.33	-65.46	11.14	1.18	-55.50	-20.00	35.50
2349.94	H	39.35	-64.63	11.99	1.21	-53.85	-20.00	33.85
2349.94	V	39.48	-65.48	11.99	1.21	-54.70	-20.00	34.70
2819.93	H	39.42	-63.67	12.33	1.41	-52.75	-20.00	32.75
2819.93	V	39.14	-64.39	12.33	1.41	-53.47	-20.00	33.47
3289.91	H	39.44	-62.84	12.28	1.56	-52.12	-20.00	32.12
3289.91	V	39.56	-61.80	12.28	1.56	-51.08	-20.00	31.08
3759.90	H	39.55	-61.55	12.25	1.53	-50.83	-20.00	30.83
3759.90	V	39.83	-60.98	12.25	1.53	-50.26	-20.00	30.26
4229.89	H	39.65	-60.15	12.81	1.49	-48.83	-20.00	28.83
4229.89	V	39.50	-60.91	12.81	1.49	-49.59	-20.00	29.59
4699.88	H	39.48	-58.98	13.24	1.50	-47.24	-20.00	27.24
4699.88	V	39.68	-58.86	13.24	1.50	-47.12	-20.00	27.12

Part 80

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 459.9875MHz-25 kHz								
919.98	H	40.76	-54.13	0.00	0.51	-54.64	-13.00	41.64
919.98	V	44.59	-47.06	0.00	0.51	-47.57	-13.00	34.57
1379.96	H	39.36	-64.96	9.50	1.20	-56.66	-13.00	43.66
1379.96	V	39.55	-64.90	9.50	1.20	-56.60	-13.00	43.60
1839.95	H	38.83	-66.05	11.02	1.20	-56.23	-13.00	43.23
1839.95	V	38.91	-65.91	11.02	1.20	-56.09	-13.00	43.09
2299.94	H	38.78	-65.31	11.92	1.20	-54.59	-13.00	41.59
2299.94	V	38.83	-66.09	11.92	1.20	-55.37	-13.00	42.37
2759.93	H	39.55	-63.65	12.30	1.38	-52.73	-13.00	39.73
2759.93	V	39.38	-64.44	12.30	1.38	-53.52	-13.00	40.52
3219.91	H	39.32	-63.08	12.31	1.55	-52.32	-13.00	39.32
3219.91	V	39.22	-62.46	12.31	1.55	-51.70	-13.00	38.70
3679.90	H	39.44	-61.91	12.24	1.55	-51.22	-13.00	38.22
3679.90	V	38.77	-61.91	12.24	1.55	-51.22	-13.00	38.22
4139.89	H	38.85	-61.17	12.61	1.48	-50.04	-13.00	37.04
4139.89	V	38.88	-61.83	12.61	1.48	-50.70	-13.00	37.70
4599.88	H	39.07	-59.73	13.32	1.52	-47.93	-13.00	34.93
4599.88	V	39.39	-59.63	13.32	1.52	-47.83	-13.00	34.83

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	40.96	-54.29	0.00	0.51	-54.80	-20.00	34.80
910.03	V	46.13	-45.80	0.00	0.51	-46.31	-20.00	26.31
1365.04	H	39.21	-65.01	9.43	1.19	-56.77	-20.00	36.77
1365.04	V	38.52	-65.85	9.43	1.19	-57.61	-20.00	37.61
1820.05	H	39.04	-65.86	10.96	1.21	-56.11	-20.00	36.11
1820.05	V	39.06	-65.77	10.96	1.21	-56.02	-20.00	36.02
2275.06	H	38.91	-65.23	11.89	1.19	-54.53	-20.00	34.53
2275.06	V	38.96	-65.94	11.89	1.19	-55.24	-20.00	35.24
2730.08	H	38.72	-64.53	12.29	1.36	-53.60	-20.00	33.60
2730.08	V	39.08	-64.89	12.29	1.36	-53.96	-20.00	33.96
3185.09	H	39.21	-63.25	12.33	1.54	-52.46	-20.00	32.46
3185.09	V	38.79	-63.04	12.33	1.54	-52.25	-20.00	32.25
3640.10	H	39.00	-62.48	12.23	1.57	-51.82	-20.00	31.82
3640.10	V	38.87	-61.75	12.23	1.57	-51.09	-20.00	31.09
4095.11	H	38.86	-61.27	12.51	1.47	-50.23	-20.00	30.23
4095.11	V	38.95	-61.90	12.51	1.47	-50.86	-20.00	30.86
4550.13	H	39.07	-59.91	13.36	1.53	-48.08	-20.00	28.08
4550.13	V	38.79	-60.48	13.36	1.53	-48.65	-20.00	28.65
FM, Frequency: 455.0125MHz-25 kHz								
910.03	H	39.90	-55.35	0.00	0.51	-55.86	-13.00	42.86
910.03	V	44.38	-47.55	0.00	0.51	-48.06	-13.00	35.06
1365.04	H	39.27	-64.95	9.43	1.19	-56.71	-13.00	43.71
1365.04	V	38.90	-65.47	9.43	1.19	-57.23	-13.00	44.23
1820.05	H	39.29	-65.61	10.96	1.21	-55.86	-13.00	42.86
1820.05	V	38.95	-65.88	10.96	1.21	-56.13	-13.00	43.13
2275.06	H	39.25	-64.89	11.89	1.19	-54.19	-13.00	41.19
2275.06	V	38.96	-65.94	11.89	1.19	-55.24	-13.00	42.24
2730.08	H	39.55	-63.70	12.29	1.36	-52.77	-13.00	39.77
2730.08	V	39.04	-64.93	12.29	1.36	-54.00	-13.00	41.00
3185.09	H	39.34	-63.12	12.33	1.54	-52.33	-13.00	39.33
3185.09	V	39.25	-62.58	12.33	1.54	-51.79	-13.00	38.79
3640.10	H	39.23	-62.25	12.23	1.57	-51.59	-13.00	38.59
3640.10	V	39.23	-61.39	12.23	1.57	-50.73	-13.00	37.73
4095.11	H	39.43	-60.70	12.51	1.47	-49.66	-13.00	36.66
4095.11	V	38.91	-61.94	12.51	1.47	-50.90	-13.00	37.90
4550.13	H	39.34	-59.64	13.36	1.53	-47.81	-13.00	34.81
4550.13	V	38.96	-60.31	13.36	1.53	-48.48	-13.00	35.48

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	40.50	-54.75	0.00	0.51	-55.26	-20.00	35.26
910.03	V	44.90	-47.03	0.00	0.51	-47.54	-20.00	27.54
1365.04	H	39.00	-65.22	9.43	1.19	-56.98	-20.00	36.98
1365.04	V	39.40	-64.97	9.43	1.19	-56.73	-20.00	36.73
1820.05	H	39.35	-65.55	10.96	1.21	-55.80	-20.00	35.80
1820.05	V	39.26	-65.57	10.96	1.21	-55.82	-20.00	35.82
2275.06	H	39.00	-65.14	11.89	1.19	-54.44	-20.00	34.44
2275.06	V	39.10	-65.80	11.89	1.19	-55.10	-20.00	35.10
2730.08	H	38.85	-64.40	12.29	1.36	-53.47	-20.00	33.47
2730.08	V	38.89	-65.08	12.29	1.36	-54.15	-20.00	34.15
3185.09	H	39.06	-63.40	12.33	1.54	-52.61	-20.00	32.61
3185.09	V	39.42	-62.41	12.33	1.54	-51.62	-20.00	31.62
3640.10	H	39.28	-62.20	12.23	1.57	-51.54	-20.00	31.54
3640.10	V	38.99	-61.63	12.23	1.57	-50.97	-20.00	30.97
4095.11	H	39.32	-60.81	12.51	1.47	-49.77	-20.00	29.77
4095.11	V	39.34	-61.51	12.51	1.47	-50.47	-20.00	30.47
4550.13	H	39.06	-59.92	13.36	1.53	-48.09	-20.00	28.09
4550.13	V	39.43	-59.84	13.36	1.53	-48.01	-20.00	28.01

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	39.68	-55.64	0.00	0.51	-56.15	-13.00	43.15
908.03	V	45.03	-46.96	0.00	0.51	-47.47	-13.00	34.47
1362.04	H	39.05	-65.15	9.42	1.18	-56.91	-13.00	43.91
1362.04	V	38.63	-65.72	9.42	1.18	-57.48	-13.00	44.48
1816.05	H	39.30	-65.60	10.95	1.21	-55.86	-13.00	42.86
1816.05	V	39.34	-65.50	10.95	1.21	-55.76	-13.00	42.76
2270.06	H	38.76	-65.40	11.88	1.19	-54.71	-13.00	41.71
2270.06	V	38.87	-66.03	11.88	1.19	-55.34	-13.00	42.34
2724.08	H	39.22	-64.04	12.29	1.36	-53.11	-13.00	40.11
2724.08	V	39.11	-64.88	12.29	1.36	-53.95	-13.00	40.95
3178.09	H	38.91	-63.56	12.33	1.54	-52.77	-13.00	39.77
3178.09	V	38.92	-62.95	12.33	1.54	-52.16	-13.00	39.16
3632.10	H	39.21	-62.29	12.23	1.57	-51.63	-13.00	38.63
3632.10	V	38.91	-61.70	12.23	1.57	-51.04	-13.00	38.04
4086.11	H	39.11	-61.04	12.49	1.47	-50.02	-13.00	37.02
4086.11	V	38.74	-62.14	12.49	1.47	-51.12	-13.00	38.12
4540.13	H	38.69	-60.32	13.37	1.53	-48.48	-13.00	35.48
4540.13	V	39.31	-60.00	13.37	1.53	-48.16	-13.00	35.16
FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	40.21	-55.11	0.00	0.51	-55.62	-13.00	42.62
908.03	V	46.12	-45.87	0.00	0.51	-46.38	-13.00	33.38
1362.04	H	38.91	-65.29	9.42	1.18	-57.05	-13.00	44.05
1362.04	V	38.45	-65.90	9.42	1.18	-57.66	-13.00	44.66
1816.05	H	38.72	-66.18	10.95	1.21	-56.44	-13.00	43.44
1816.05	V	38.64	-66.20	10.95	1.21	-56.46	-13.00	43.46
2270.06	H	39.00	-65.16	11.88	1.19	-54.47	-13.00	41.47
2270.06	V	38.75	-66.15	11.88	1.19	-55.46	-13.00	42.46
2724.08	H	38.60	-64.66	12.29	1.36	-53.73	-13.00	40.73
2724.08	V	38.65	-65.34	12.29	1.36	-54.41	-13.00	41.41
3178.09	H	38.44	-64.03	12.33	1.54	-53.24	-13.00	40.24
3178.09	V	38.65	-63.22	12.33	1.54	-52.43	-13.00	39.43
3632.10	H	38.64	-62.86	12.23	1.57	-52.20	-13.00	39.20
3632.10	V	38.82	-61.79	12.23	1.57	-51.13	-13.00	38.13
4086.11	H	38.79	-61.36	12.49	1.47	-50.34	-13.00	37.34
4086.11	V	38.40	-62.48	12.49	1.47	-51.46	-13.00	38.46
4540.13	H	38.48	-60.53	13.37	1.53	-48.69	-13.00	35.69
4540.13	V	38.41	-60.90	13.37	1.53	-49.06	-13.00	36.06

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 454.0125MHz-12.5 kHz								
908.03	H	40.29	-55.03	0.00	0.51	-55.54	-13.00	42.54
908.03	V	46.28	-45.71	0.00	0.51	-46.22	-13.00	33.22
1362.04	H	39.13	-65.07	9.42	1.18	-56.83	-13.00	43.83
1362.04	V	39.60	-64.75	9.42	1.18	-56.51	-13.00	43.51
1816.05	H	38.92	-65.98	10.95	1.21	-56.24	-13.00	43.24
1816.05	V	39.27	-65.57	10.95	1.21	-55.83	-13.00	42.83
2270.06	H	39.18	-64.98	11.88	1.19	-54.29	-13.00	41.29
2270.06	V	39.55	-65.35	11.88	1.19	-54.66	-13.00	41.66
2724.08	H	39.09	-64.17	12.29	1.36	-53.24	-13.00	40.24
2724.08	V	39.10	-64.89	12.29	1.36	-53.96	-13.00	40.96
3178.09	H	39.43	-63.04	12.33	1.54	-52.25	-13.00	39.25
3178.09	V	39.64	-62.23	12.33	1.54	-51.44	-13.00	38.44
3632.10	H	39.13	-62.37	12.23	1.57	-51.71	-13.00	38.71
3632.10	V	39.28	-61.33	12.23	1.57	-50.67	-13.00	37.67
4086.11	H	39.13	-61.02	12.49	1.47	-50.00	-13.00	37.00
4086.11	V	39.06	-61.82	12.49	1.47	-50.80	-13.00	37.80
4540.13	H	38.98	-60.03	13.37	1.53	-48.19	-13.00	35.19
4540.13	V	39.42	-59.89	13.37	1.53	-48.05	-13.00	35.05

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

7 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, §80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Test Mode: Transmitting

Test Result: Compliance. *Please refer to the following Tables.*

FCC Part 90:

FM,12.5kHz, Reference Frequency: 453.2125 MHz, Limit: ± 2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	453.2126393	-0.18
-20		453.2124328	0.15
-10		453.2126287	-0.37
0		453.2126818	-0.07
10		453.2126253	-0.07
20		453.2127204	0.15
30		453.2124868	0.62
40		453.2126691	0.71
50		453.2126007	-0.35
20	6.4	453.2126412	0.15
20	8.4	453.2126886	1.04

4FSK, 12.5kHz, Reference Frequency: 453.2125MHz, Limit: ± 2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	453.2124821	0.35
-20		453.2126555	1.15
-10		453.2125394	0.64
0		453.2126158	1.15
10		453.2126198	0.64
20		453.2127981	0.55
30		453.2126872	0.80
40		453.2125027	0.29
50		453.2124552	0.64
20	6.4	453.2125597	0.29
20	8.4	453.2124378	0.73

FCC Part 80:

FM, 25kHz, Reference Frequency: 459.9875MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	459.987651	0.39
-20		459.987796	0.24
-10		459.987683	0.61
0		459.987657	-0.37
10		459.987800	0.15
20		459.987720	0.15
30		459.987702	-0.76
40		459.987656	-0.50
50		459.987514	0.61
20	6.4	459.987561	0.02
20	8.4	459.987668	-0.11

FCC Part 74:

FM, 12.5kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	455.0124694	-0.07
-20		455.0124992	0.18
-10		455.0124911	-0.02
0		455.0124226	0.15
10		455.0124159	0.51
20		455.0126804	0.15
30		455.0125005	0.20
40		455.0125466	-0.15
50		455.0125328	0.37
20	6.4	455.0125982	0.97
20	8.4	455.0124618	0.15

4FSK, 12.5kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	455.0124041	0.18
-20		455.0126734	0.00
-10		455.0125407	-0.07
0		455.0126541	0.18
10		455.0125133	0.11
20		455.0128507	0.11
30		455.0126847	0.53
40		455.0126985	0.31
50		455.0124751	0.02
20	6.4	455.0125570	0.55
20	8.4	455.0125156	0.11

FM, 25kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	455.0124840	-0.15
-20		455.0125871	0.59
-10		455.0126968	-0.07
0		455.0124683	-0.51
10		455.0124199	-0.07
20		455.0126804	-0.07
30		455.0126763	-1.21
40		455.0124414	-0.07
50		455.0124984	-0.62
20	6.4	455.0124898	-0.04
20	8.4	455.0124081	-0.18

FCC Part 22:

FM, 12.5kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	454.0124744	0.22
-20		454.0124215	0.20
-10		454.0125365	0.77
0		454.0124012	0.11
10		454.0124589	0.15
20		454.0127204	0.15
30		454.0126505	0.20
40		454.0126134	-0.07
50		454.0125986	0.51
20	6.4	454.0124463	-0.66
20	8.4	454.0124911	0.70

4FSK, 12.5kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	454.0125465	0.00
-20		454.0124759	1.26
-10		454.0124840	1.06
0		454.0126358	0.04
10		454.0125941	0.55
20		454.0128006	0.44
30		454.0125814	-0.22
40		454.0125994	0.55
50		454.0124555	0.22
20	6.4	454.0124934	1.17
20	8.4	454.0126154	0.27

FM, 25kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.2	454.0126644	0.35
-20		454.0125226	-0.15
-10		454.0125925	-0.18
0		454.0124039	0.04
10		454.0125109	-0.15
20		454.0127204	0.15
30		454.0125672	-0.07
40		454.0126515	-0.51
50		454.0125235	0.00
20	6.4	454.0125345	-0.55
20	8.4	454.0125837	0.29


8 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

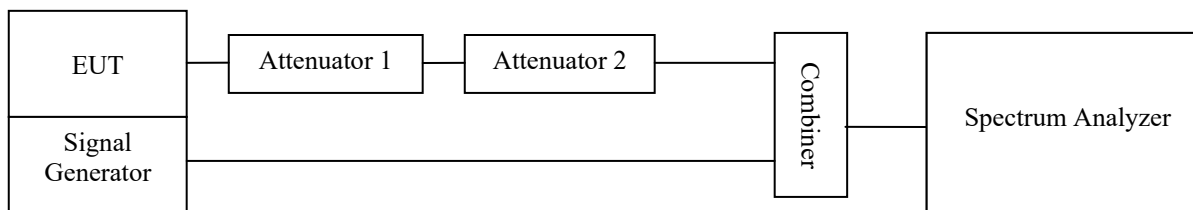


Test Data

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	$<10(t_1)$	± 12.5 kHz	Pass
	$<25(t_2)$	± 6.25 kHz	
	$<10(t_3)$	± 12.5 kHz	

453.2125_Turn On

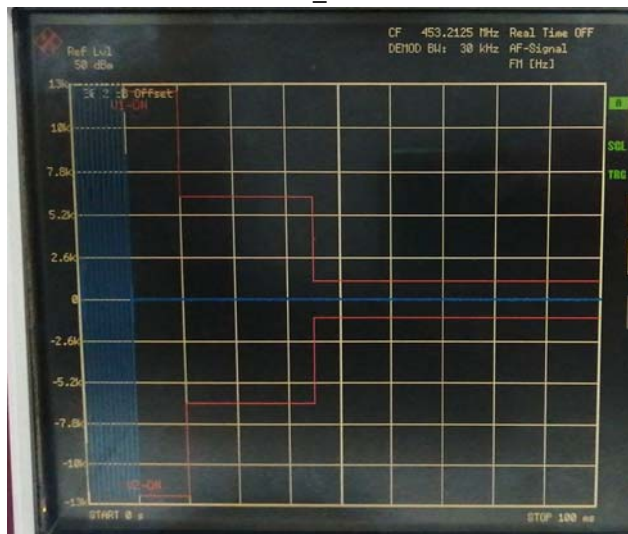

453.2125_Turn Off

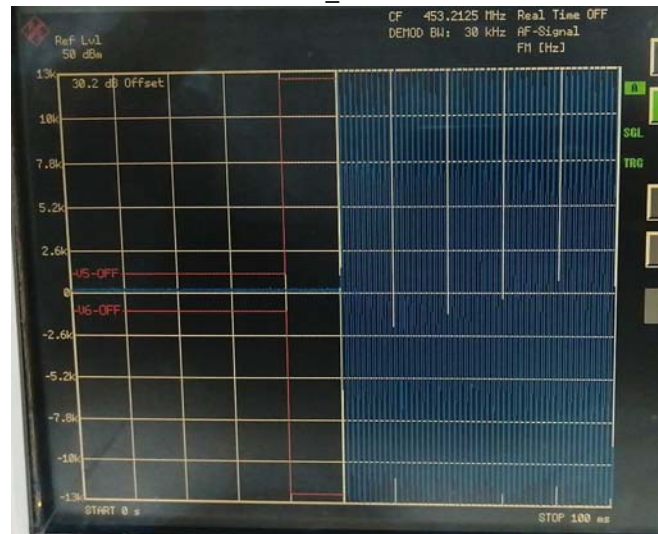******* END OF REPORT *******