

FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen,
518057 China

FCC ID: YAMRD98XSIVHF

Report Type: Original Report	Product Type: Digital Repeater
Report Number: RDG171207021-00A	
Report Date: 2018-01-17	
Rocky Kang	
Reviewed By:	RF Engineer
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
RESULT	10
FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1047 & §74.463 & §80.213 & §90.207- MODULATION CHARACTERISTIC	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA	13
FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK.....	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	65
APPLICABLE STANDARD	65
TEST PROCEDURE	65
TEST DATA	65
FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS.....	75
APPLICABLE STANDARD	75
TEST PROCEDURE	75
TEST DATA	75
FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY	79

APPLICABLE STANDARD	79
TEST PROCEDURE	79
TEST DATA	79
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....	85
APPLICABLE STANDARD	85
TEST PROCEDURE	85
TEST DATA	86

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hytera Communications Corporation Limited's* product, model number: *RD982Si VHF* (FCC ID: *YAMRD98XSIVHF*) in this report is a *Digital Repeater*, which was measured approximately: 482 mm (L) x 368 mm (W) x 99 mm (H), rated input voltage: DC 13.6V.

Notes: This series products model: RD985Si VHF, RD986Si VHF, RD988Si VHF and RD982Si VHF are electrically identical, and only are different for model number. Model RD982Si VHF was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 171207021 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-12-07.*

Objective

This test report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2, and Part 22, 74, 80, 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service

Part 80 – Stantions in the Maritme Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{dB}$
Unwanted Emission, conducted	$\pm 1.5\text{dB}$
All emissions, radiated	$\pm 4.88\text{dB}$
Temperature	$\pm 1^\circ\text{C}$
Supply voltages	$\pm 0.4\%$

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Load	N/A	N/A
Pro instrument	DC Power Supply	pps3300	N/A
N/A	Write frequency line	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
Shielding Detachable RF Cable	0.5	EUT	Load

Block Diagram of Test Setup

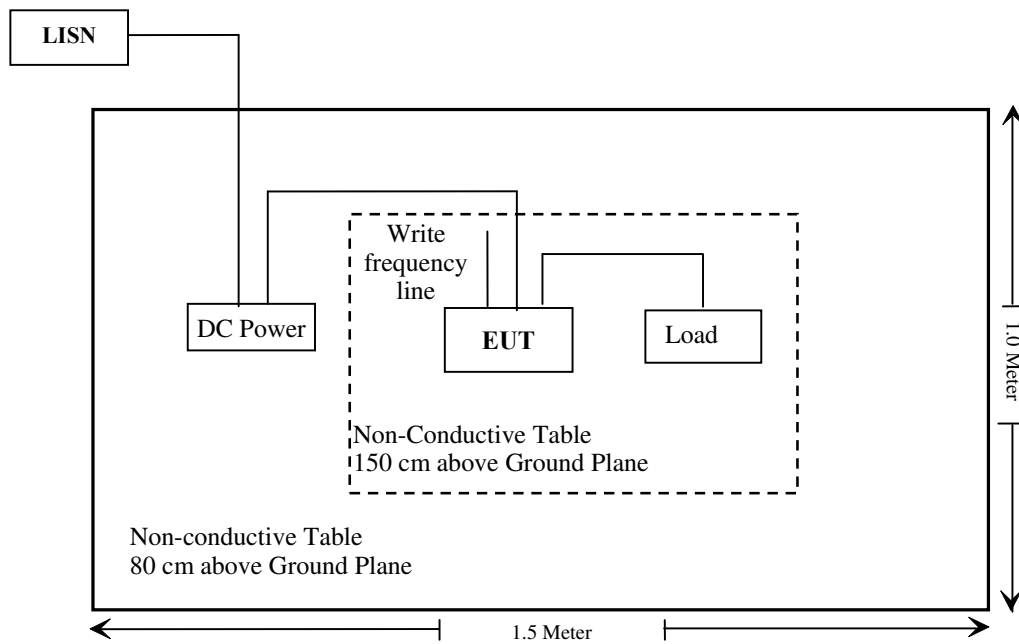

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307(b), §2.1091	Maximum Permissible exposure (MPE)	Compliance
§2.1046; § 22.727; §74.461; § 80.215; §90.205	RF Output Power	Compliance
§2.1047; §74.463; §80.213;§90.207	Modulation Characteristic	Compliance
§2.1049;§22.357;§ 22.731; §74.462; § 80.205; § 80.207;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861; §74.462; § 80.211;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861; §74.462; § 80.211;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355; §74.464; § 80.209;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Generator	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-17
Anritsu	Signal Generator	68369B	004114	2017-12-05	2018-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
HP Agilent	RF Communication Test Set	HP8920	3325U00859	2017-05-07	2018-05-07
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
WEINSCHEL	30dB Attenuator	53-30-43	PG633	2017-11-22	2018-05-22
N/A	Band Pass Filter	N/A	N/A	2017-11-19	2018-05-21

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Occupational/Controlled Exposure

Limits for occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	6
1.34-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5.0	6

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Max average output power (mW)	Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)				
136-174	3.5	2.24	25059.5	80	0.7	1.0

Note: Max tune-up output power is 47.0dBm (50119 mW), the duty cycle is 50%. So the average power is 25059.5 mW

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 80cm from nearby persons.

Result: Compliance

FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER**Applicable Standard**

FCC §2.1046, § 22.727, §74.461, § 80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2017-12-18

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	Conducted Output Power (dBm)	Conducted Output Power (W)	Note
Analog	12.5	136.0125	High	46.88	48.75	For Federal
			Low	36.93	4.93	
	12.5	151.0125	High	46.87	48.64	Part 22
			Low	36.92	4.92	
	12.5	153.0125	High	46.89	48.87	Part 74
			Low	36.90	4.90	
	12.5	155.7525	High	46.82	48.08	Part 90
			Low	36.89	4.89	
	12.5	173.9875	High	46.86	48.53	For Federal
			Low	36.91	4.91	
	25	136.0125	High	46.87	48.64	For Federal
			Low	36.95	4.95	
	25	151.0125	High	46.88	48.75	Part 22
			Low	36.93	4.93	
	25	153.0125	High	46.86	48.53	Part 74
			Low	36.85	4.84	
	25	155.7525	High	46.83	48.19	Part 80
			Low	36.92	4.92	
	25	173.9875	High	46.88	48.75	For Federal
			Low	36.94	4.94	
Digital	12.5	136.0125	High	46.84	48.31	For Federal
			Low	36.95	4.95	
	12.5	151.0125	High	46.88	48.75	Part 22
			Low	36.92	4.92	
	12.5	153.0125	High	46.83	48.19	Part 74
			Low	36.86	4.85	
	12.5	155.7525	High	46.85	48.42	Part 90
			Low	36.85	4.84	
	12.5	173.9875	High	46.86	48.53	For Federal
			Low	36.91	4.91	

Note: Rated high power is 50W, limit is 40-60W
Rated low power is 5W, limit is 4-6W

FCC §2.1047 & §74.463 & §80.213 & §90.207- MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047, §74.463, §80.213 and §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2017-12-19.


Test Mode: Transmitting

Result: Compliance.

Analog Modulation:**MODULATION LIMITING**

Carrier Frequency: 151.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	2.132	0.070	2.125	0.068	2.500
400	2.120	0.083	2.113	0.081	2.500
500	2.147	0.106	2.141	0.104	2.500
600	2.139	0.114	2.133	0.112	2.500
700	2.140	0.132	2.128	0.130	2.500
800	2.141	0.149	2.130	0.146	2.500
900	2.150	0.158	2.145	0.155	2.500
1000	2.153	0.173	2.148	0.170	2.500
1200	2.156	0.204	2.149	0.201	2.500
1400	2.152	0.232	2.146	0.229	2.500
1600	2.137	0.277	2.130	0.268	2.500
1800	2.108	0.289	2.099	0.280	2.500
2000	2.076	0.319	2.070	0.312	2.500
2100	2.066	0.330	2.057	0.322	2.500
2200	2.042	0.345	2.036	0.338	2.500
2300	2.019	0.356	2.012	0.349	2.500
2400	1.998	0.375	1.990	0.367	2.500
2500	1.976	0.378	1.967	0.370	2.500
2600	1.944	0.382	1.937	0.375	2.500
2700	1.921	0.397	1.915	0.388	2.500
2800	1.885	0.407	1.876	0.401	2.500
2900	1.844	0.411	1.835	0.404	2.500
3000	1.795	0.415	1.788	0.402	2.500

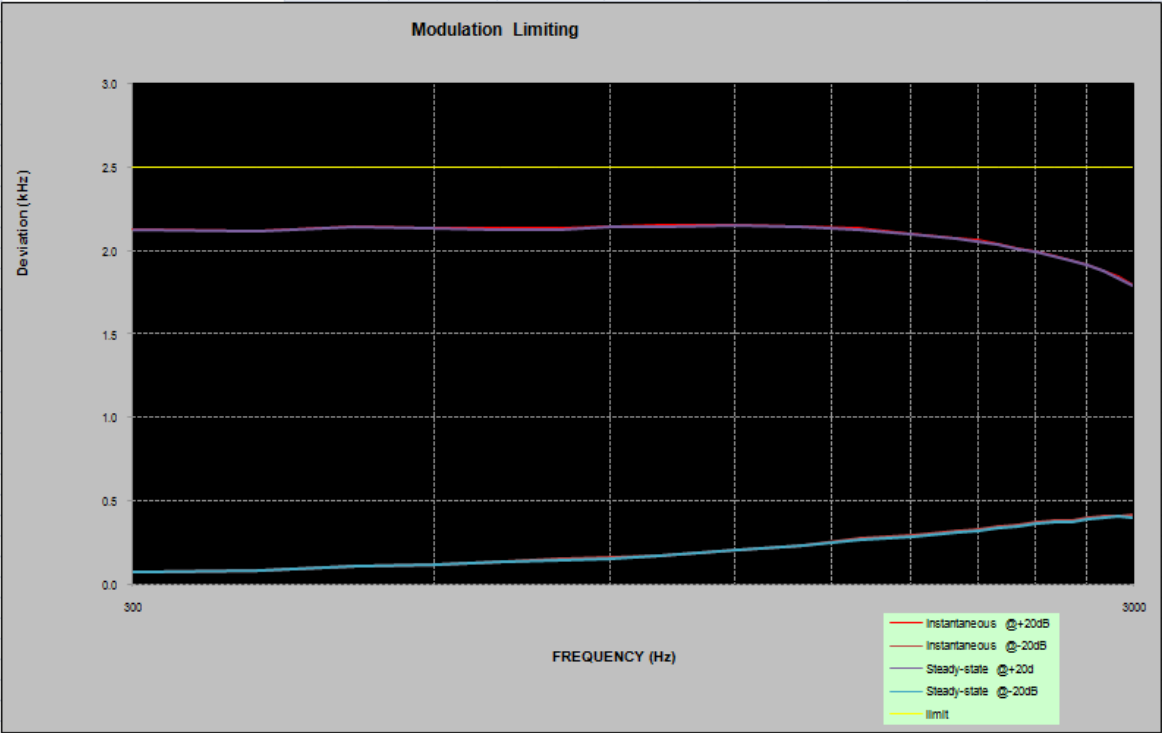

Audio Frequency Response

Carrier Frequency: 151.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.32
400	-8.40
500	-6.16
600	-4.35
700	-2.85
800	-1.64
900	-0.74
1000	0.00
1200	1.76
1400	2.93
1600	4.31
1800	4.89
2000	5.78
2100	6.06
2200	6.29
2300	6.59
2400	6.89
2500	6.81
2600	6.60
2700	6.53
2800	6.41
2900	5.95
3000	5.48

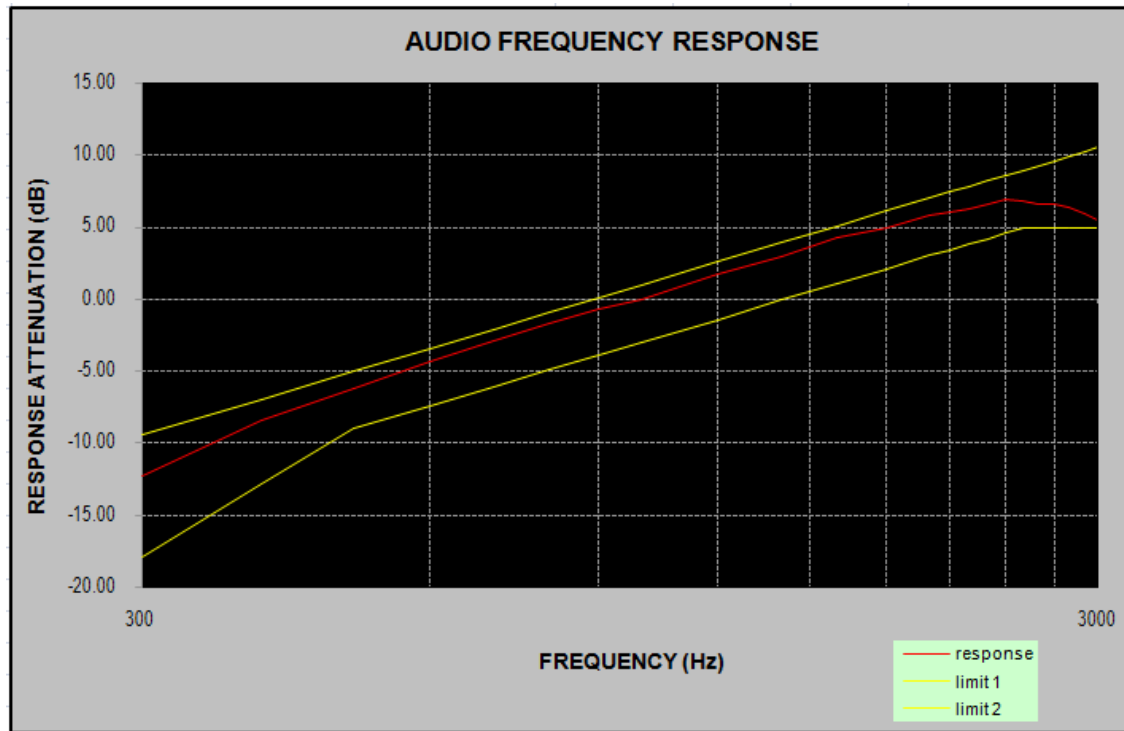

Audio frequency lows pass filter response

Carrier Frequency: 151.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-15.85	0.0
4.0	-74.55	-12.5
5.0	-84.95	-22.2
6.0	-83.25	-30.1
7.0	-82.45	-36.8
8.0	-89.95	-42.6
9.0	-87.45	-47.7
10.0	-87.75	-52.3
12.0	-91.25	-60.2
14.0	-91.35	-66.9
16.0	-90.05	-72.7
18.0	-91.95	-77.8
20.0	-92.05	-82.5

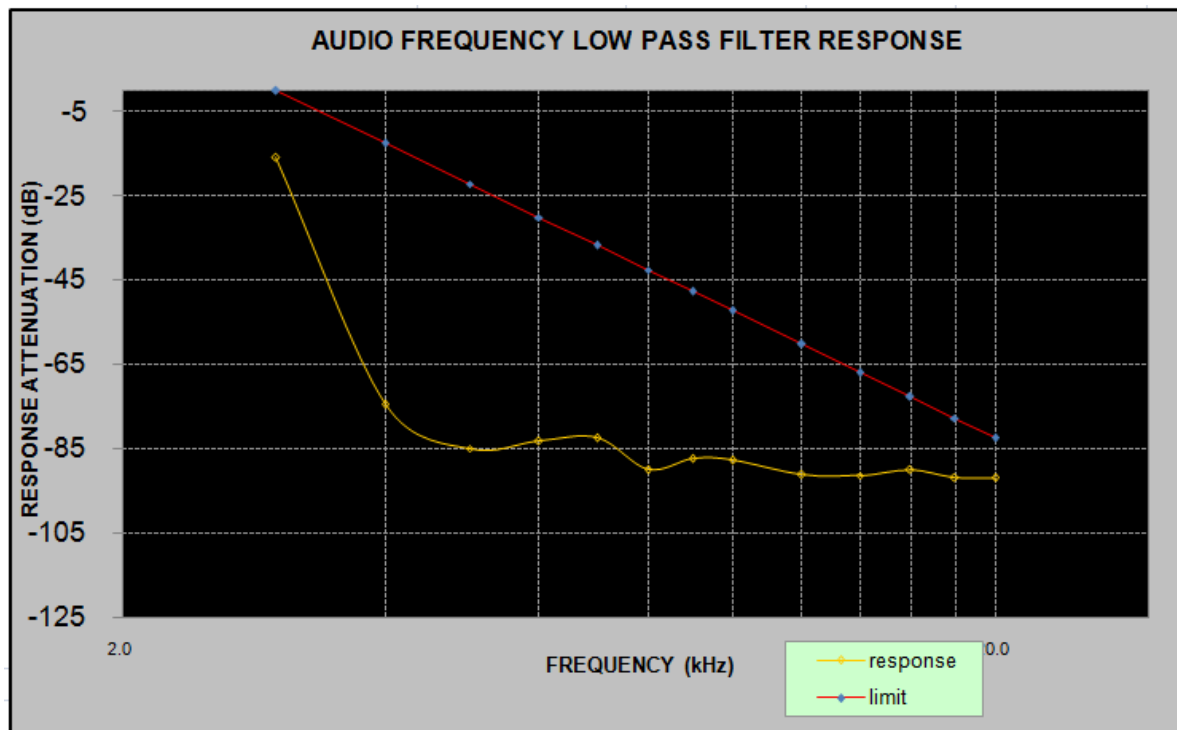

MODULATION LIMITING

Carrier Frequency: 151.0125 MHz, Channel Separation= 25 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	4.526	0.121	4.517	0.118	5.000
400	4.513	0.147	4.504	0.145	5.000
500	4.569	0.184	4.560	0.182	5.000
600	4.547	0.210	4.538	0.208	5.000
700	4.566	0.256	4.559	0.253	5.000
800	4.596	0.281	4.587	0.278	5.000
900	4.619	0.310	4.610	0.306	5.000
1000	4.631	0.335	4.622	0.332	5.000
1200	4.657	0.403	4.645	0.400	5.000
1400	4.659	0.456	4.650	0.452	5.000
1600	4.618	0.534	4.606	0.526	5.000
1800	4.638	0.574	4.630	0.566	5.000
2000	4.636	0.639	4.628	0.631	5.000
2100	4.601	0.661	4.588	0.655	5.000
2200	4.534	0.683	4.526	0.678	5.000
2300	4.552	0.719	4.543	0.710	5.000
2400	4.341	0.755	4.326	0.748	5.000
2500	4.215	0.766	4.204	0.759	5.000
2600	4.128	0.767	4.120	0.757	5.000
2700	4.035	0.792	4.027	0.784	5.000
2800	3.930	0.815	3.921	0.807	5.000
2900	3.817	0.823	3.806	0.816	5.000
3000	3.695	0.835	3.684	0.827	5.000

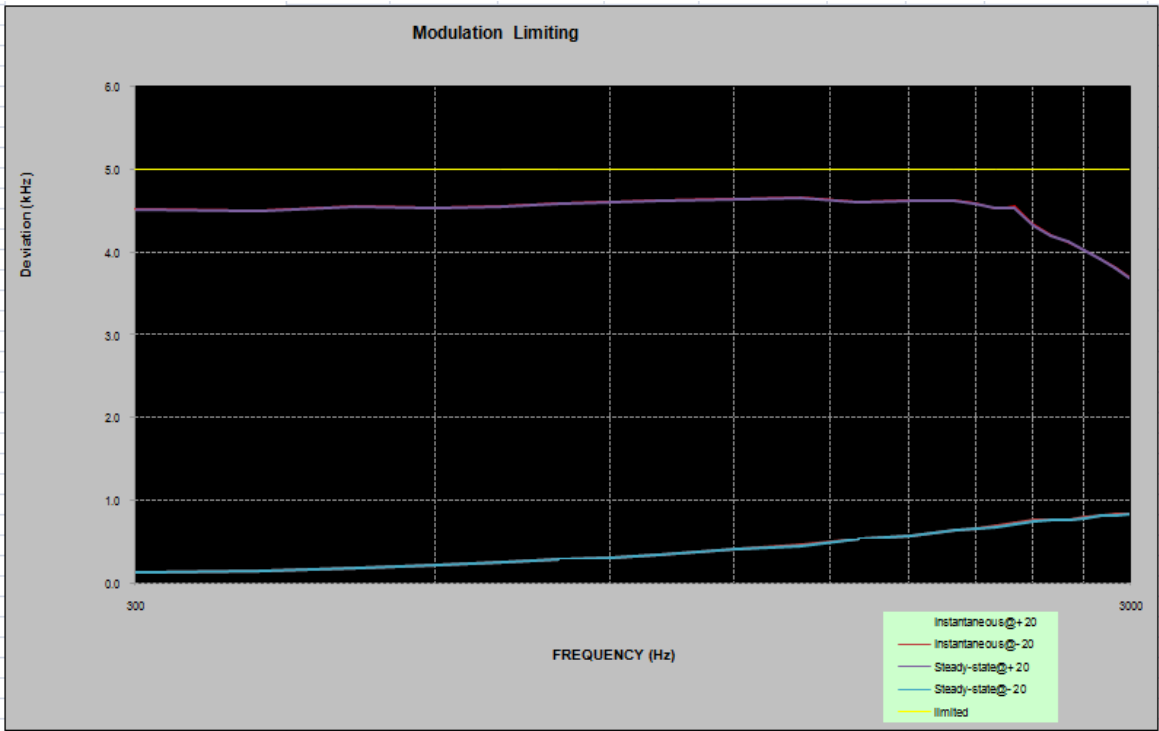

Audio Frequency Response

Carrier Frequency: 151.0125 MHz, Channel Separation= 25 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.73
400	-8.71
500	-6.21
600	-4.42
700	-2.88
800	-1.60
900	-0.71
1000	0.00
1200	1.83
1400	3.03
1600	4.42
1800	5.01
2000	5.90
2100	6.18
2200	6.40
2300	6.77
2400	7.05
2500	6.99
2600	6.77
2700	6.71
2800	6.57
2900	6.12
3000	5.63

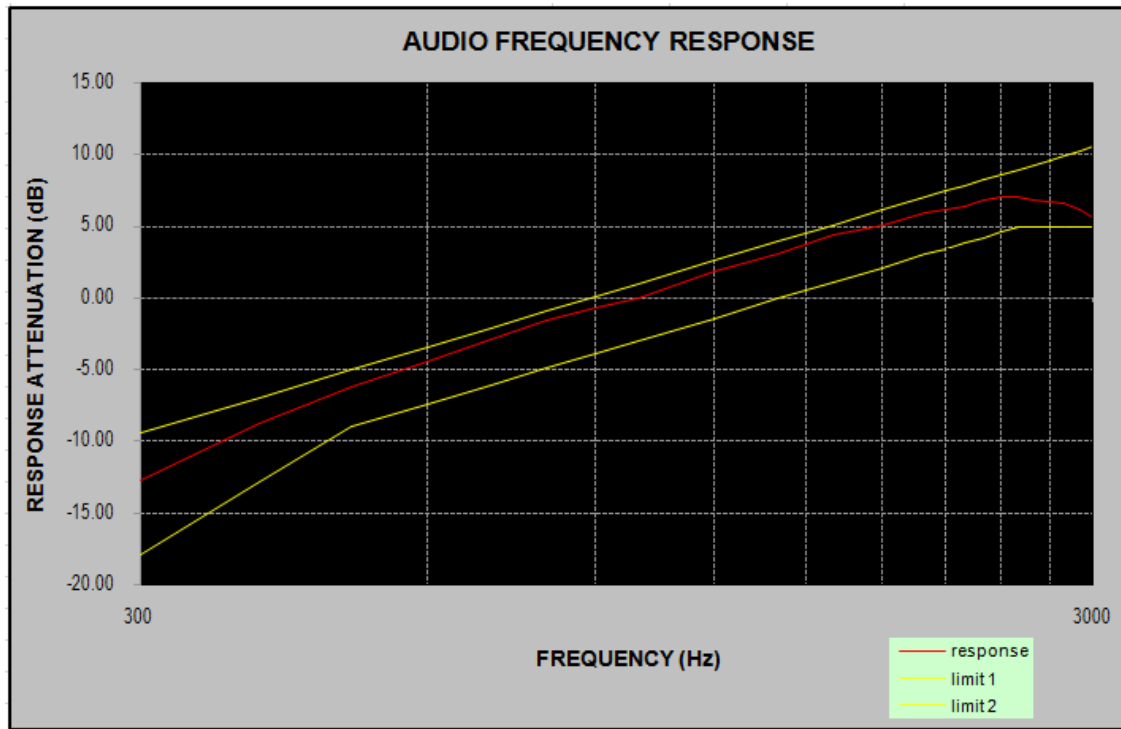

Audio frequency lows pass filter response

Carrier Frequency: 151.0125 MHz, Channel Separation= 25 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
1.0	0.0	/
3.0	-16.6	0.0
4.0	-24.5	-5.0
5.0	-27.8	-8.9
6.0	-44.2	-12.0
7.0	-45.1	-14.7
8.0	-49.6	-17.0
9.0	-50.9	-19.1
10.0	-54.4	-20.9
15.0	-60.7	-28.0
20.0	-67.8	-28.0
30.0	-73.6	-28.0
40.0	-75.8	-28.0
50.0	-79.0	-28.0
60.0	-80.3	-28.0
70.0	-86.1	-28.0

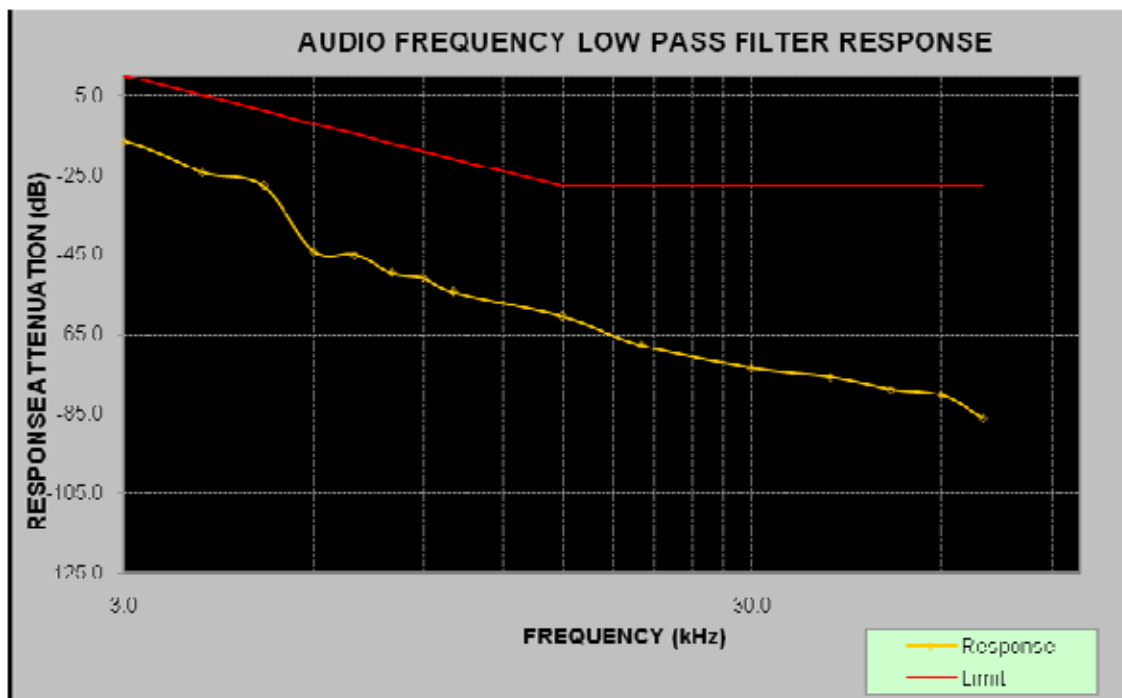

MODULATION LIMITING

Carrier Frequency: 153.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	2.124	0.071	2.128	0.073	2.500
400	2.123	0.086	2.127	0.088	2.500
500	2.141	0.104	2.146	0.106	2.500
600	2.134	0.114	2.138	0.117	2.500
700	2.135	0.129	2.139	0.131	2.500
800	2.130	0.153	2.136	0.156	2.500
900	2.144	0.162	2.149	0.167	2.500
1000	2.146	0.172	2.151	0.175	2.500
1200	2.155	0.211	2.162	0.214	2.500
1400	2.159	0.236	2.166	0.240	2.500
1600	2.142	0.274	2.148	0.278	2.500
1800	2.132	0.294	2.139	0.299	2.500
2000	2.116	0.327	2.124	0.333	2.500
2100	2.097	0.336	2.105	0.339	2.500
2200	2.082	0.346	2.091	0.351	2.500
2300	2.060	0.367	2.071	0.374	2.500
2400	2.045	0.389	2.056	0.396	2.500
2500	2.017	0.396	2.029	0.402	2.500
2600	1.991	0.389	2.002	0.395	2.500
2700	1.975	0.399	1.984	0.408	2.500
2800	1.934	0.412	1.943	0.425	2.500
2900	1.894	0.423	1.902	0.430	2.500
3000	1.845	0.422	1.857	0.434	2.500

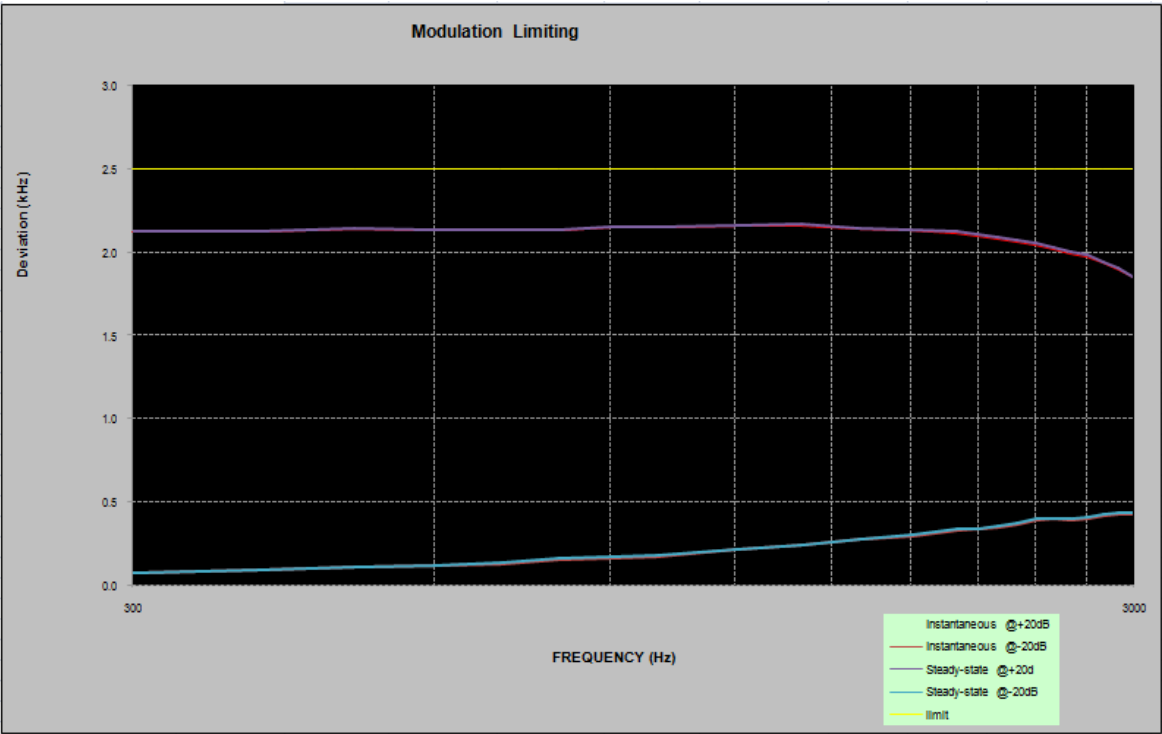

Audio Frequency Response

Carrier Frequency: 153.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-11.63
400	-8.13
500	-5.88
600	-4.26
700	-2.76
800	-1.56
900	-0.71
1000	0.00
1200	1.68
1400	2.93
1600	4.27
1800	4.84
2000	5.79
2100	6.04
2200	6.29
2300	6.68
2400	6.95
2500	6.90
2600	6.73
2700	6.67
2800	6.49
2900	6.08
3000	5.58

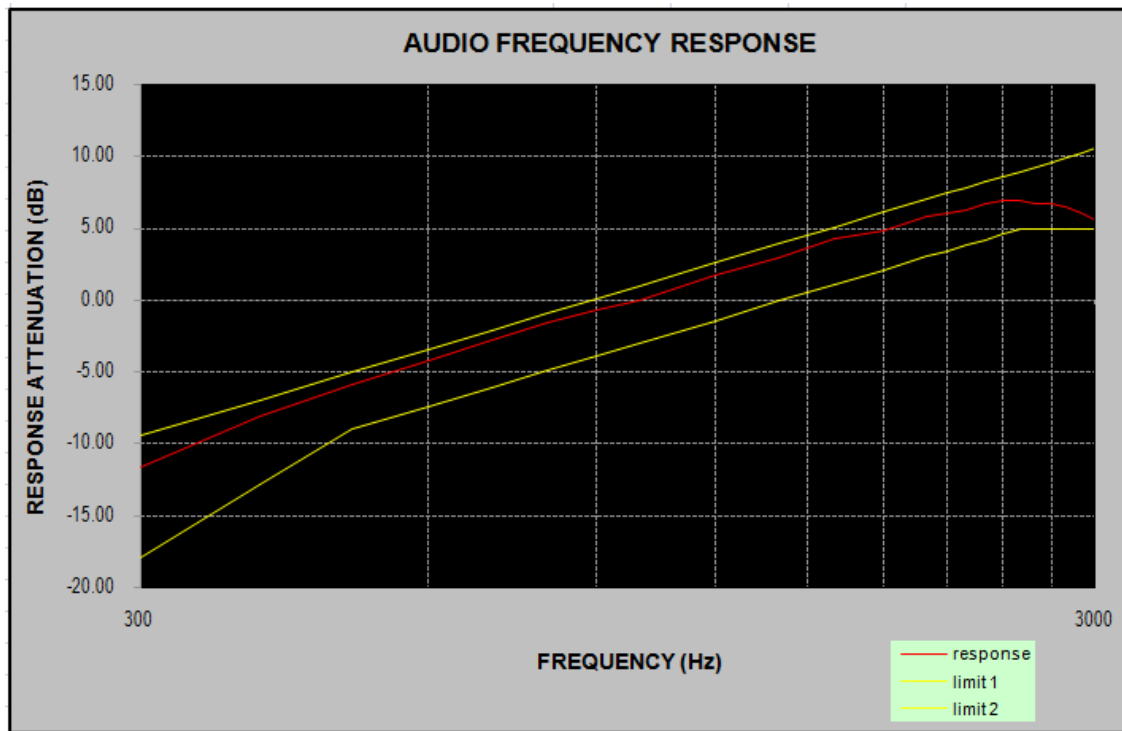

Audio frequency lows pass filter response

Carrier Frequency: 153.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-15.55	0.0
4.0	-72.55	-12.5
5.0	-88.85	-22.2
6.0	-88.85	-30.1
7.0	-83.85	-36.8
8.0	-87.95	-42.6
9.0	-88.75	-47.7
10.0	-84.35	-52.3
12.0	-89.15	-60.2
14.0	-88.55	-66.9
16.0	-89.45	-72.7
18.0	-91.65	-77.8
20.0	-87.25	-82.5

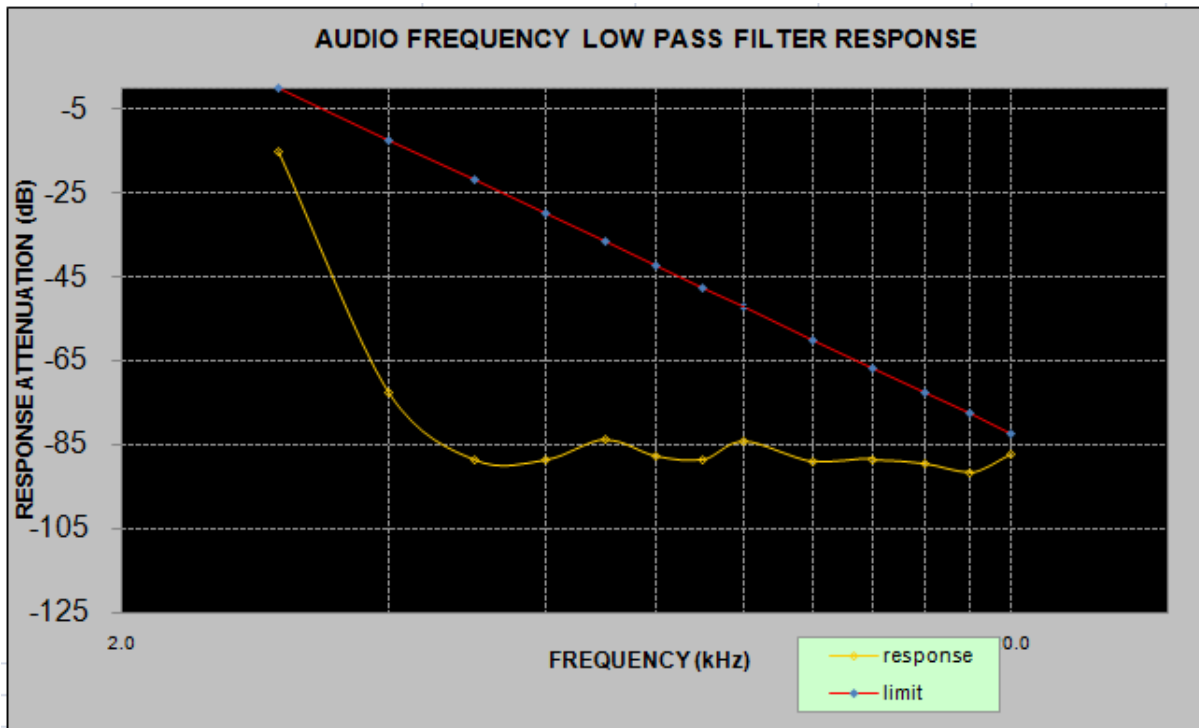

MODULATION LIMITING

Carrier Frequency: 153.0125 MHz, Channel Separation= 25 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	4.522	0.122	4.526	0.124	5.000
400	4.502	0.151	4.508	0.153	5.000
500	4.551	0.181	4.558	0.183	5.000
600	4.545	0.213	4.552	0.215	5.000
700	4.561	0.245	4.568	0.247	5.000
800	4.597	0.281	4.604	0.284	5.000
900	4.610	0.312	4.616	0.315	5.000
1000	4.631	0.334	4.638	0.337	5.000
1200	4.656	0.404	4.651	0.408	5.000
1400	4.648	0.459	4.642	0.463	5.000
1600	4.621	0.542	4.615	0.547	5.000
1800	4.672	0.578	4.666	0.583	5.000
2000	4.699	0.645	4.692	0.649	5.000
2100	4.661	0.667	4.653	0.671	5.000
2200	4.606	0.691	4.598	0.696	5.000
2300	4.532	0.733	4.525	0.738	5.000
2400	4.425	0.769	4.417	0.774	5.000
2500	4.291	0.775	4.276	0.779	5.000
2600	4.206	0.781	4.197	0.788	5.000
2700	4.114	0.803	4.103	0.809	5.000
2800	4.004	0.833	4.000	0.841	5.000
2900	3.885	0.841	3.878	0.849	5.000
3000	3.774	0.850	3.766	0.858	5.000

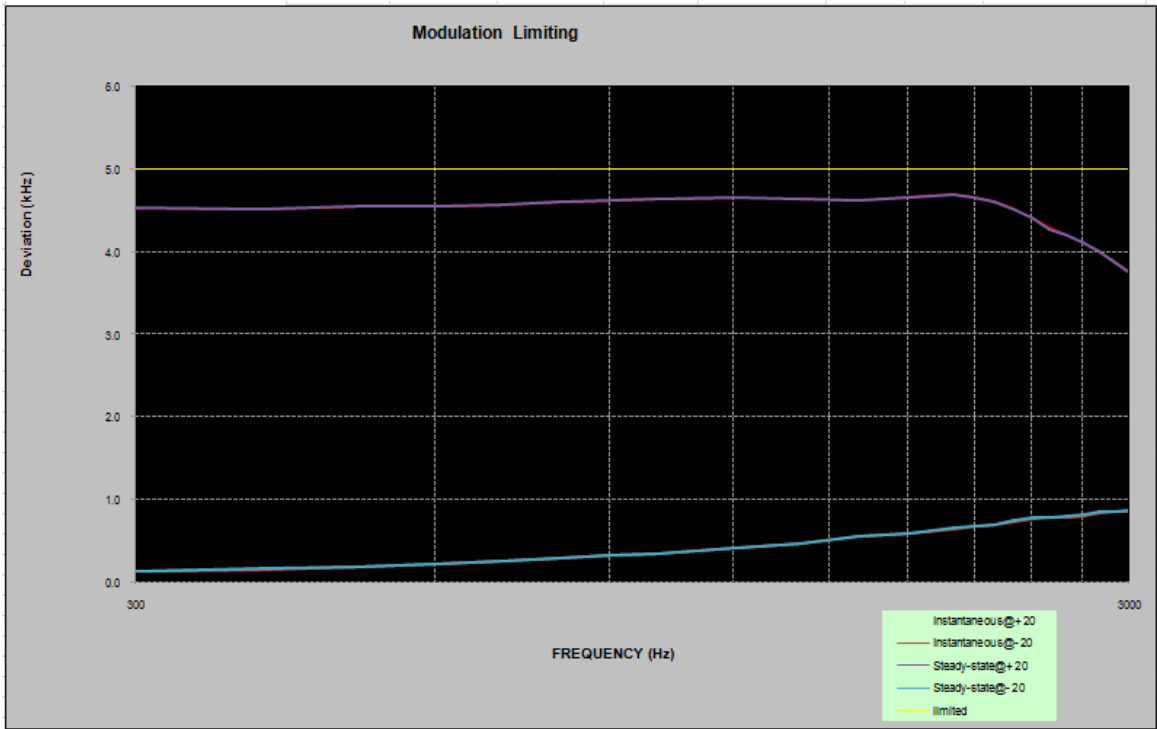

Audio Frequency Response

Carrier Frequency: 153.0125 MHz, Channel Separation= 25 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.77
400	-8.66
500	-6.25
600	-4.45
700	-2.91
800	-1.68
900	-0.77
1000	0.00
1200	1.78
1400	3.00
1600	4.41
1800	5.02
2000	5.99
2100	6.26
2200	6.50
2300	6.89
2400	7.18
2500	7.14
2600	6.92
2700	6.86
2800	6.72
2900	6.29
3000	5.77

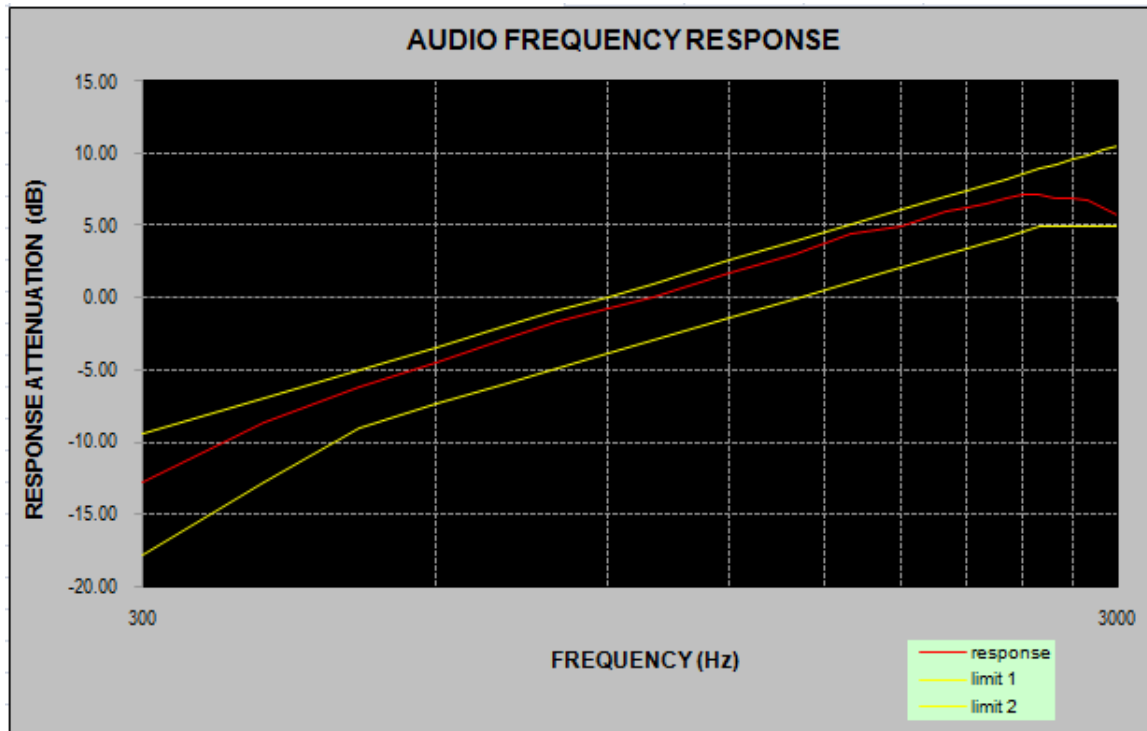

Audio frequency lows pass filter response

Carrier Frequency: 153.0125 MHz, Channel Separation= 25 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
1.0	0.0	/
3.0	-16.2	0.0
4.0	-24.3	-5.0
5.0	-27.4	-8.9
6.0	-44.8	-12.0
7.0	-44.2	-14.7
8.0	-49.3	-17.0
9.0	-50.7	-19.1
10.0	-54.6	-20.9
15.0	-60.4	-28.0
20.0	-66.4	-28.0
30.0	-73.9	-28.0
40.0	-73.5	-28.0
50.0	-78.2	-28.0
60.0	-79.7	-28.0
70.0	-85.4	-28.0

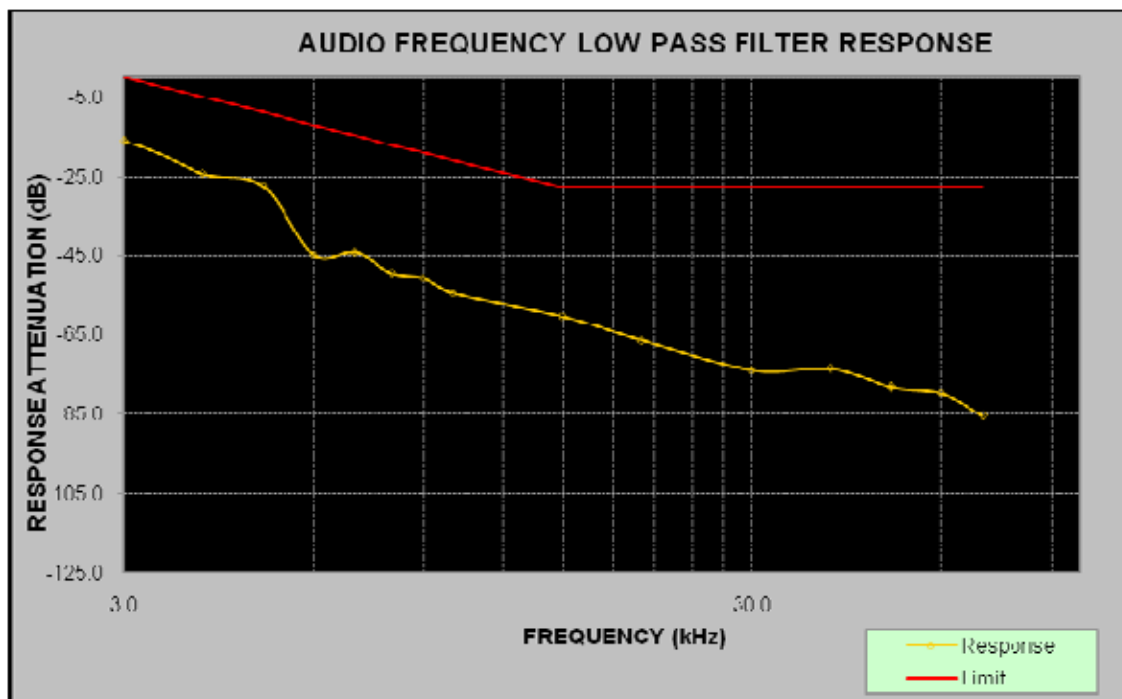

MODULATION LIMITING

Carrier Frequency: 155.7525 MHz, Channel Separation= 12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	2.082	0.395	2.086	0.398	2.500
400	2.070	0.407	2.074	0.409	2.500
500	2.091	0.410	2.096	0.413	2.500
600	2.087	0.422	2.093	0.425	2.500
700	2.081	0.439	2.088	0.441	2.500
800	2.076	0.444	2.082	0.446	2.500
900	2.079	0.453	2.087	0.457	2.500
1000	2.085	0.460	2.094	0.464	2.500
1200	2.089	0.488	2.096	0.491	2.500
1400	2.097	0.517	2.104	0.521	2.500
1600	2.100	0.541	2.108	0.544	2.500
1800	2.097	0.563	2.105	0.568	2.500
2000	2.087	0.587	2.095	0.592	2.500
2100	2.088	0.596	2.096	0.601	2.500
2200	2.074	0.610	2.081	0.614	2.500
2300	2.073	0.618	2.080	0.621	2.500
2400	2.061	0.628	2.073	0.630	2.500
2500	2.039	0.637	2.048	0.639	2.500
2600	2.017	0.641	2.029	0.644	2.500
2700	2.010	0.647	2.023	0.651	2.500
2800	1.971	0.663	1.984	0.669	2.500
2900	1.939	0.660	1.946	0.665	2.500
3000	1.894	0.667	1.905	0.671	2.500

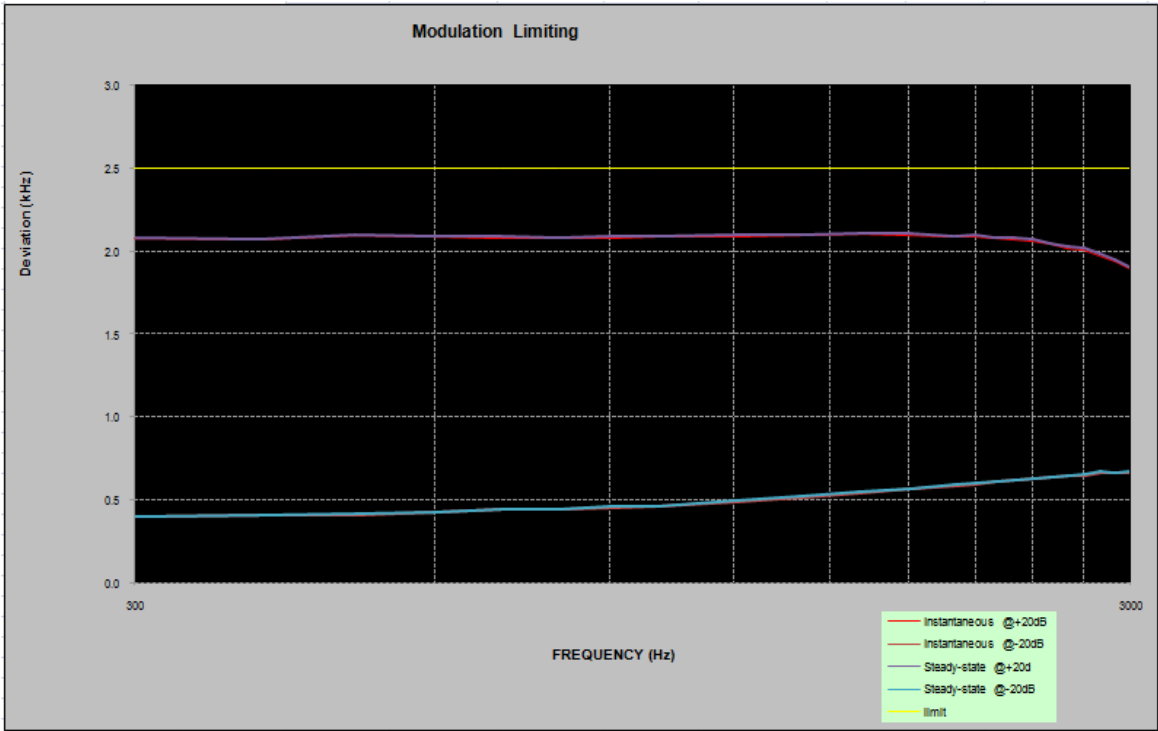

Audio Frequency Response

Carrier Frequency: 155.7525 MHz, Channel Separation= 12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-11.50
400	-8.09
500	-5.71
600	-4.10
700	-2.64
800	-1.39
900	-0.61
1000	0.00
1200	1.87
1400	3.12
1600	4.62
1800	5.20
2000	6.24
2100	6.49
2200	6.74
2300	7.14
2400	7.41
2500	7.43
2600	7.24
2700	7.14
2800	7.04
2900	6.58
3000	6.09

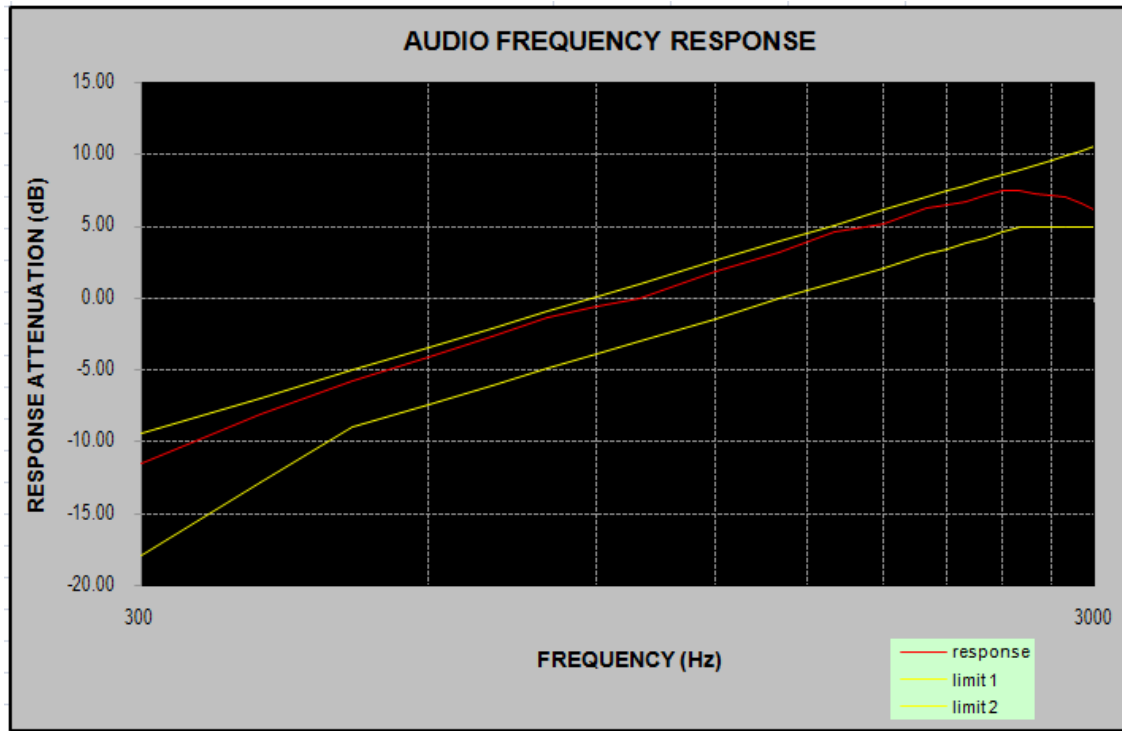

Audio frequency lows pass filter response

Carrier Frequency: 155.7525 MHz, Channel Separation= 12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-17.85	0.0
4.0	-73.15	-12.5
5.0	-88.45	-22.2
6.0	-87.85	-30.1
7.0	-84.75	-36.8
8.0	-88.85	-42.6
9.0	-86.85	-47.7
10.0	-87.25	-52.3
12.0	-89.95	-60.2
14.0	-89.55	-66.9
16.0	-89.95	-72.7
18.0	-92.35	-77.8
20.0	-90.75	-82.5

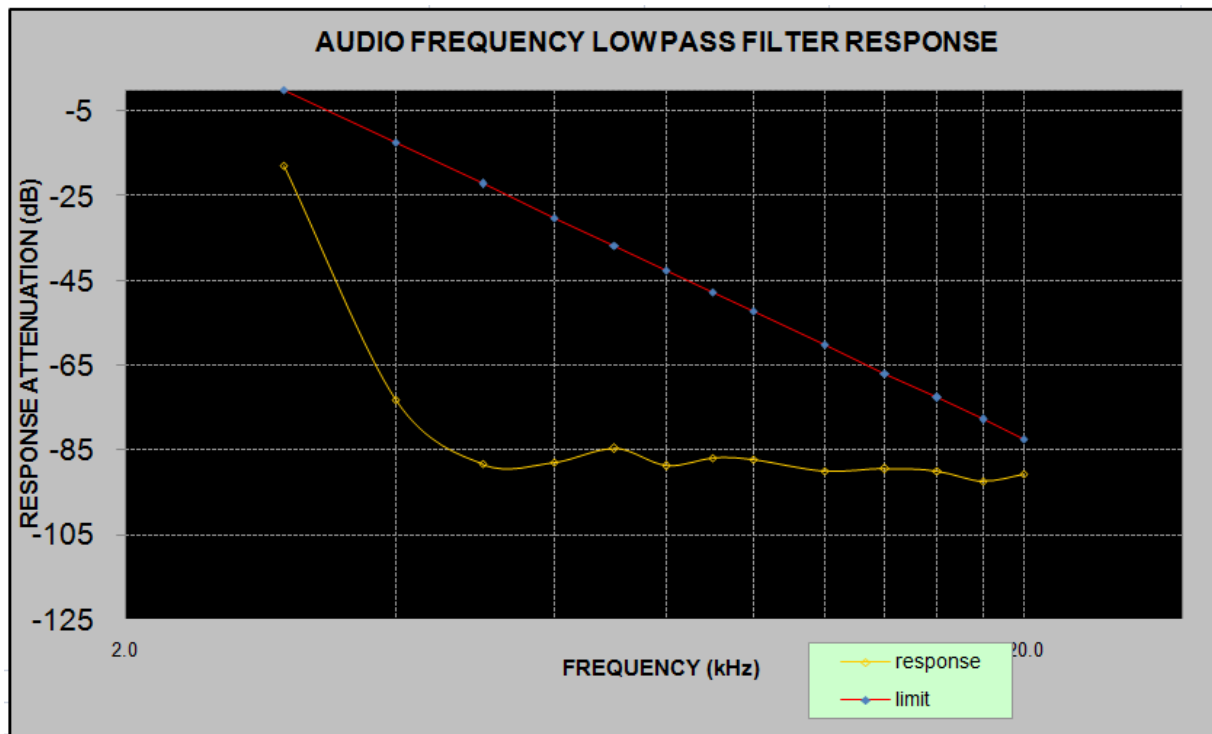

MODULATION LIMITING

Carrier Frequency: 155.7525 MHz, Channel Separation= 25 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	4.541	0.097	4.402	0.110	5.000
400	4.510	0.122	4.381	0.135	5.000
500	4.541	0.143	4.379	0.171	5.000
600	4.519	0.167	4.376	0.204	5.000
700	4.516	0.190	4.359	0.228	5.000
800	4.539	0.217	4.368	0.257	5.000
900	4.547	0.242	4.366	0.282	5.000
1000	4.556	0.256	4.362	0.320	5.000
1200	4.586	0.311	4.354	0.359	5.000
1400	4.603	0.358	4.317	0.435	5.000
1600	4.608	0.422	4.291	0.466	5.000
1800	4.744	0.449	4.311	0.538	5.000
2000	4.808	0.504	4.454	0.571	5.000
2100	4.789	0.531	4.427	0.622	5.000
2200	4.744	0.454	4.388	0.649	5.000
2300	4.672	0.580	4.329	0.668	5.000
2400	4.571	0.605	4.266	0.676	5.000
2500	4.438	0.613	4.191	0.719	5.000
2600	4.302	0.620	4.098	0.758	5.000
2700	4.207	0.637	4.074	0.775	5.000
2800	4.102	0.655	4.026	0.798	5.000
2900	3.969	0.663	3.922	0.847	5.000
3000	3.847	0.676	3.822	0.842	5.000

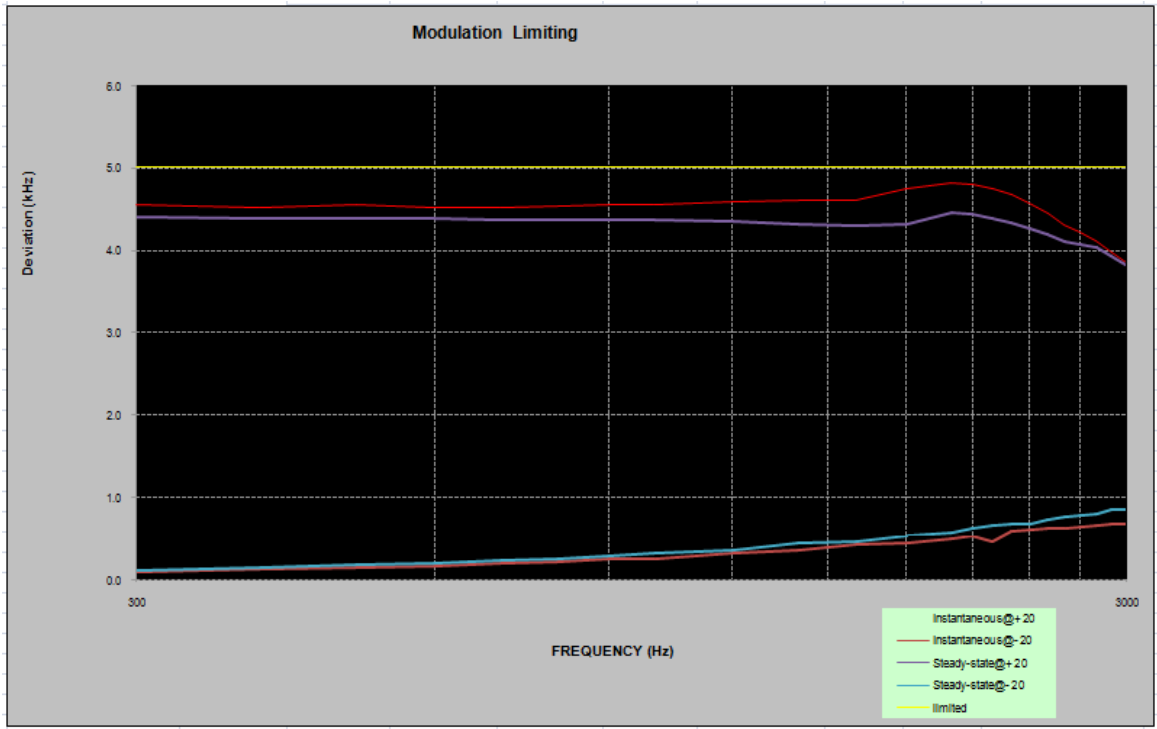

Audio Frequency Response

Carrier Frequency: 155.7525 MHz, Channel Separation= 25 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.65
400	-8.50
500	-6.07
600	-4.38
700	-2.83
800	-1.55
900	-0.63
1000	0.00
1200	1.84
1400	3.14
1600	4.54
1800	5.25
2000	6.23
2100	6.55
2200	6.84
2300	7.22
2400	7.52
2500	7.47
2600	7.29
2700	7.21
2800	7.09
2900	6.66
3000	6.17

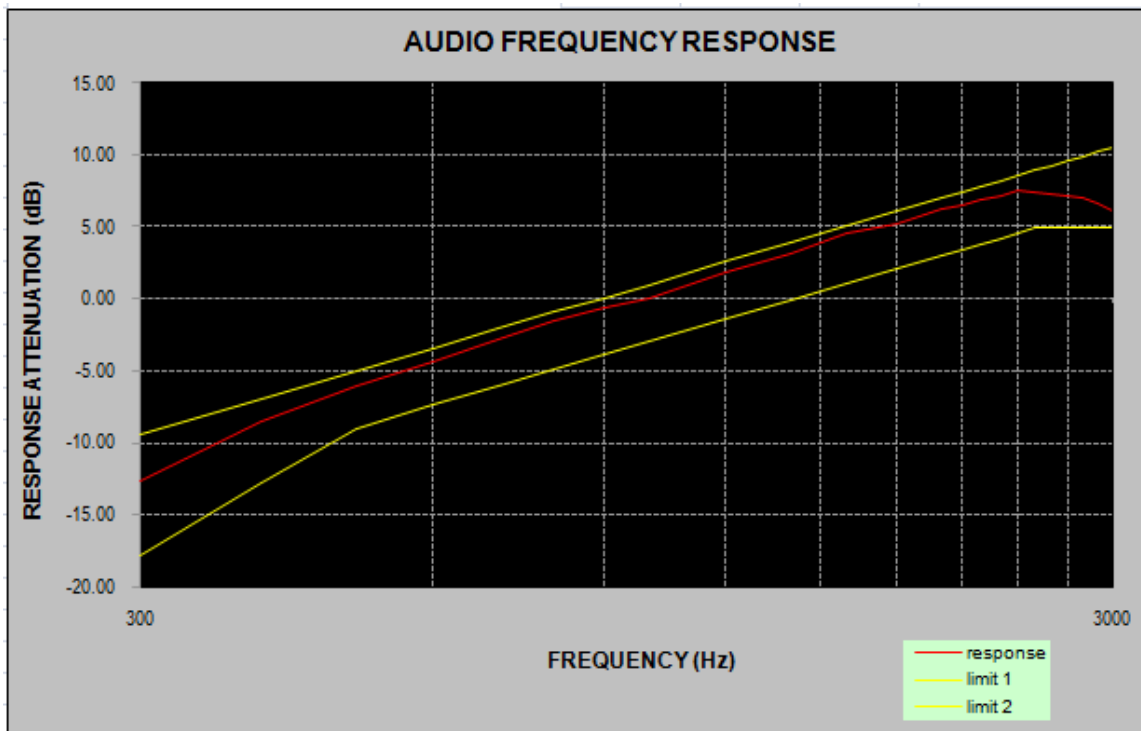

Audio frequency lows pass filter response

Carrier Frequency: 155.7525 MHz, Channel Separation= 25 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
1.0	0.0	/
3.0	-15.7	0.0
4.0	-25.1	-5.0
5.0	-28.6	-8.9
6.0	-44.1	-12.0
7.0	-46.3	-14.7
8.0	-50.1	-17.0
9.0	-51.2	-19.1
10.0	-54.9	-20.9
15.0	-61.2	-28.0
20.0	-68.4	-28.0
30.0	-74.1	-28.0
40.0	-75.2	-28.0
50.0	-78.4	-28.0
60.0	-81.7	-28.0
70.0	-86.9	-28.0

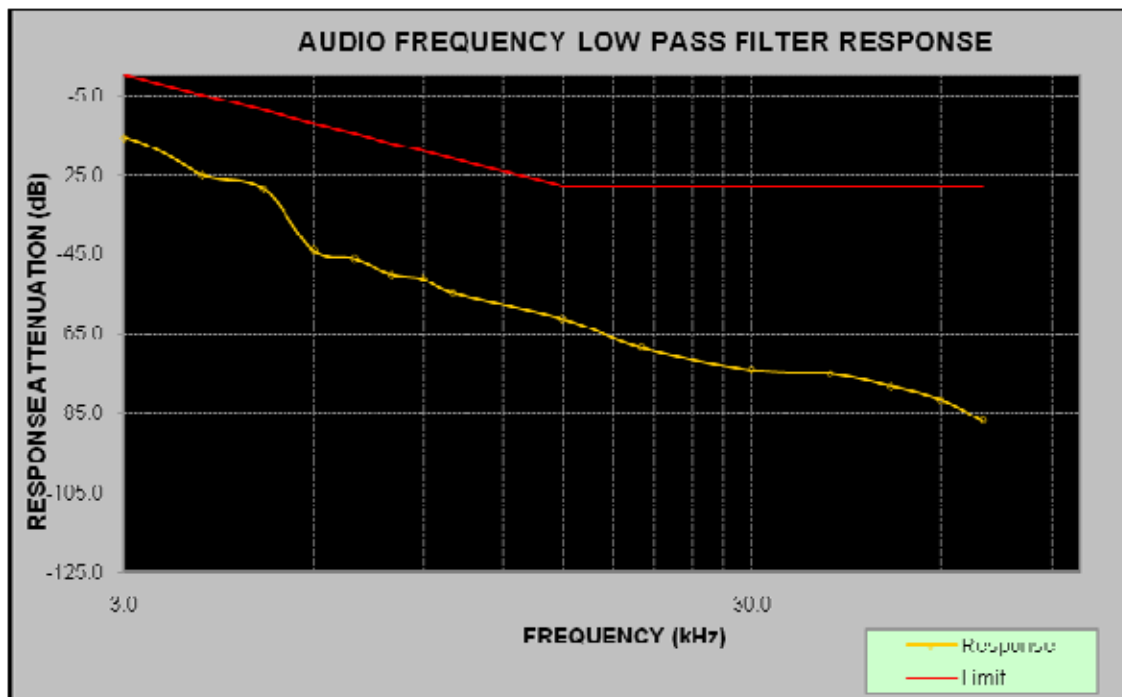

FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, § 80.205, § 80.207, §90.209 and §90.210

Emission Mask D - 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	50~56 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Dylan Li from 2017-12-18 to 2018-01-17.

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Digital	12.5	151.0125	Low	7.77	9.62	For Part 74
			High	7.69	9.78	
	12.5	153.0125	Low	7.61	9.21	For Part22
			High	7.77	9.86	
	12.5	155.7525	Low	7.93	9.86	For Part 90
			High	7.77	8.97	
Analog	12.5	151.0125	Low	9.94	10.26	For Part 74
			High	9.94	10.26	
	12.5	153.0125	Low	9.94	10.26	For Part22
			High	9.94	10.26	
	12.5	155.7525	Low	9.94	10.26	For Part 90
			High	9.94	10.26	

Note: Emission designator is base on calculation instead of measurement.

Emission Designator Per CFR 47 §2.201 & §2.202 & $B_n = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz}$ □ 11K0

F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.93 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E


Digital Modulation:

Frequency 151.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

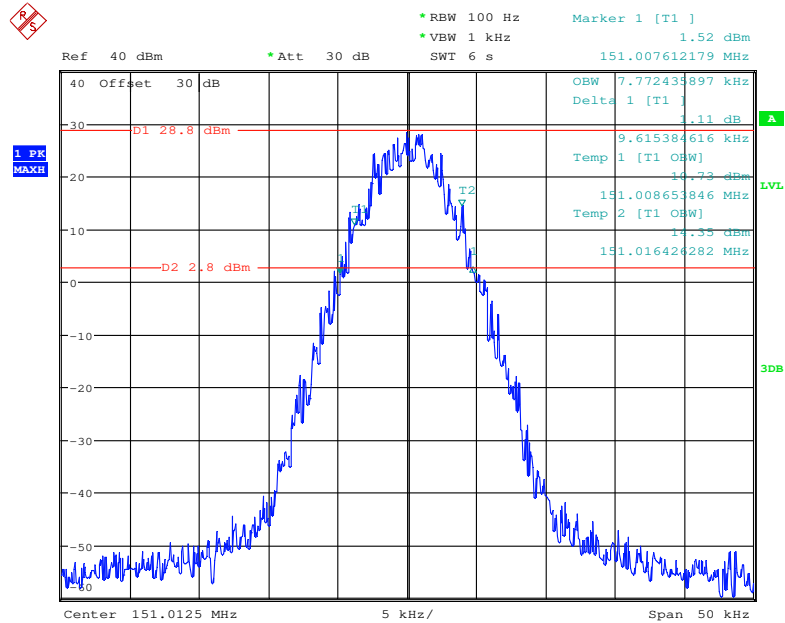


Date: 18.DEC.2017 21:00:04

Frequency 151.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

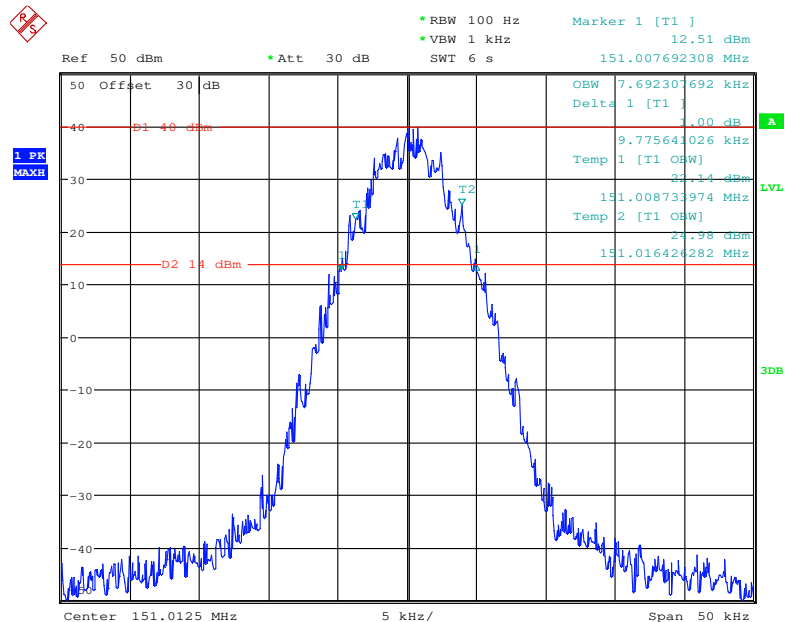


Date: 18.DEC.2017 20:57:54

Frequency 151.0125 MHz: Emission Mask D, Low Power

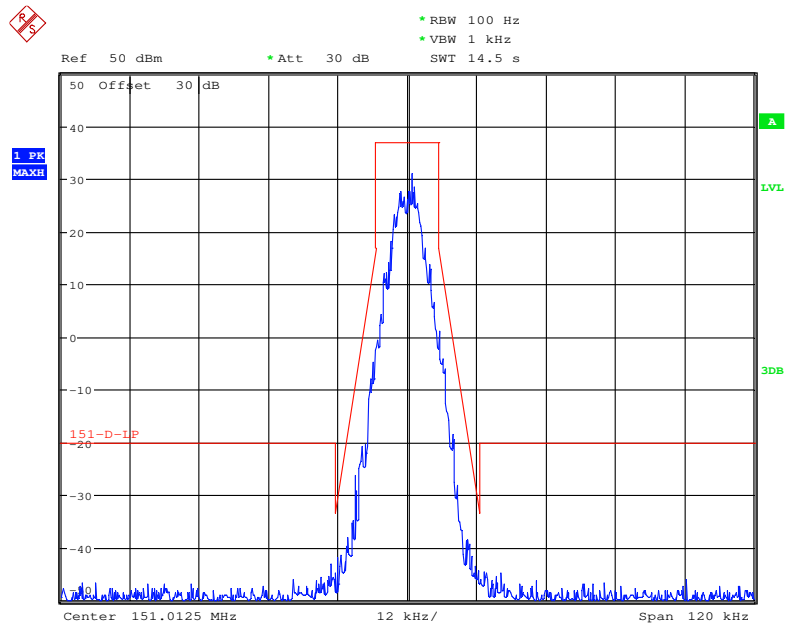


Date: 18.DEC.2017 21:33:06

Frequency 151.0125 MHz: Emission Mask D, High Power

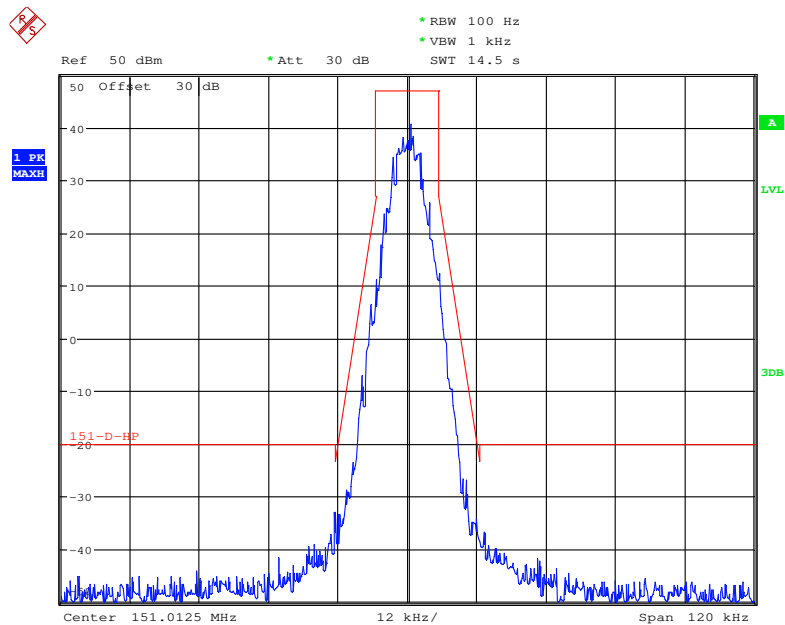


Date: 18.DEC.2017 21:34:41

Frequency 153.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

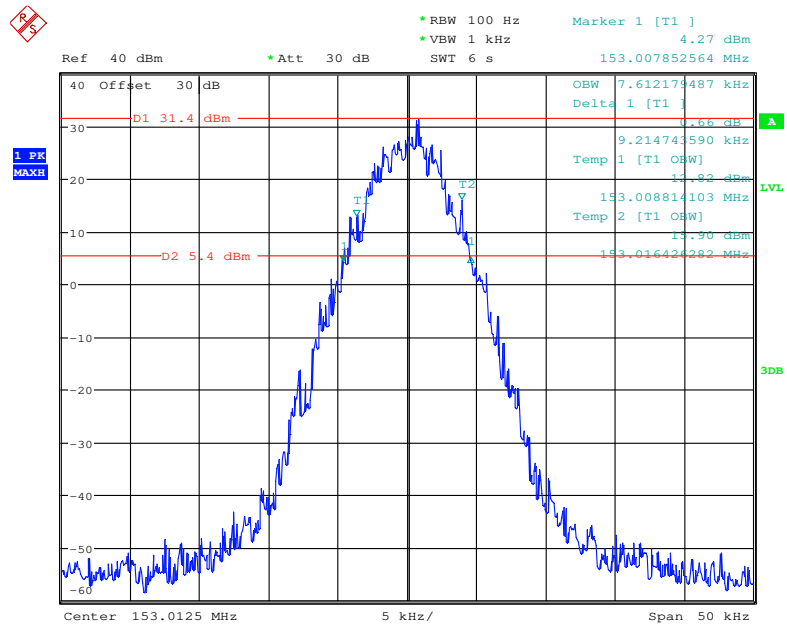


Date: 18.DEC.2017 21:01:40

Frequency 153.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

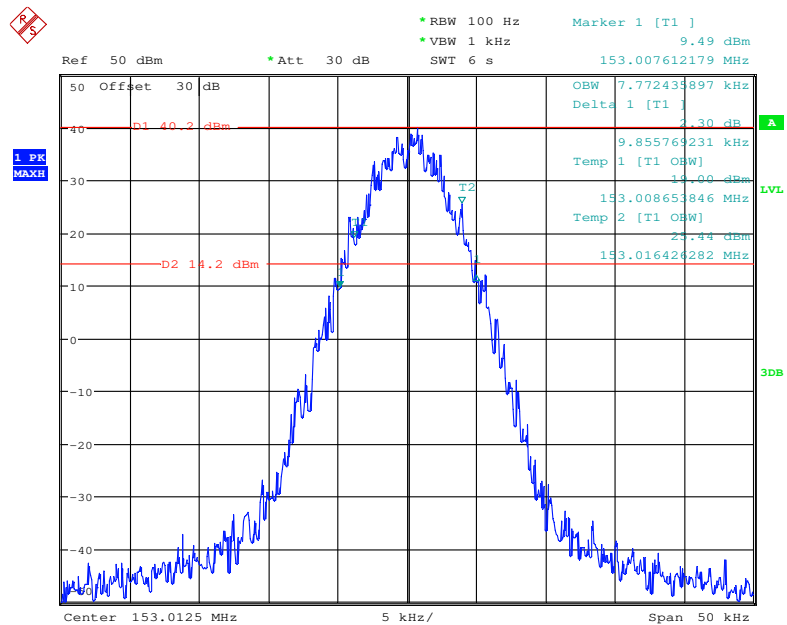


Date: 18.DEC.2017 21:09:30

Frequency 153.0125 MHz: Emission Mask D, Low Power

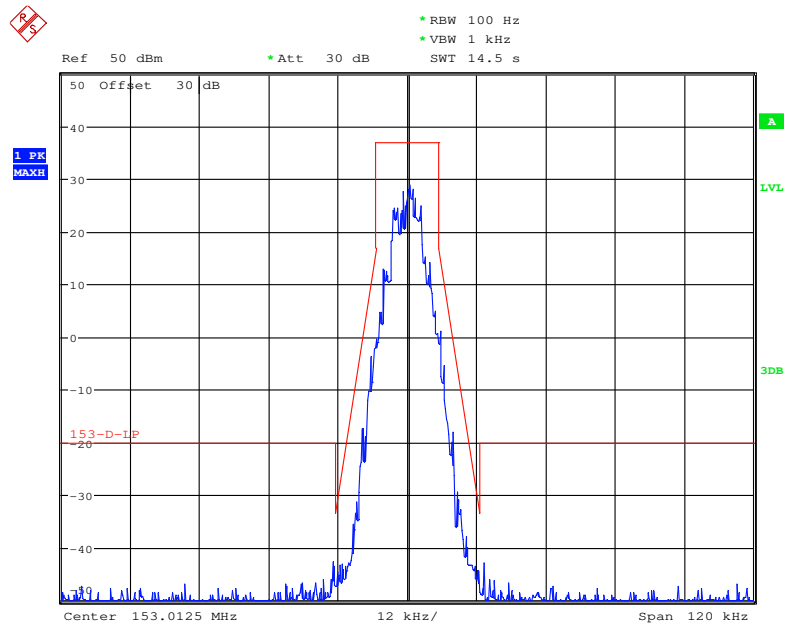


Date: 18.DEC.2017 21:26:16

Frequency 153.0125 MHz: Emission Mask D, High Power

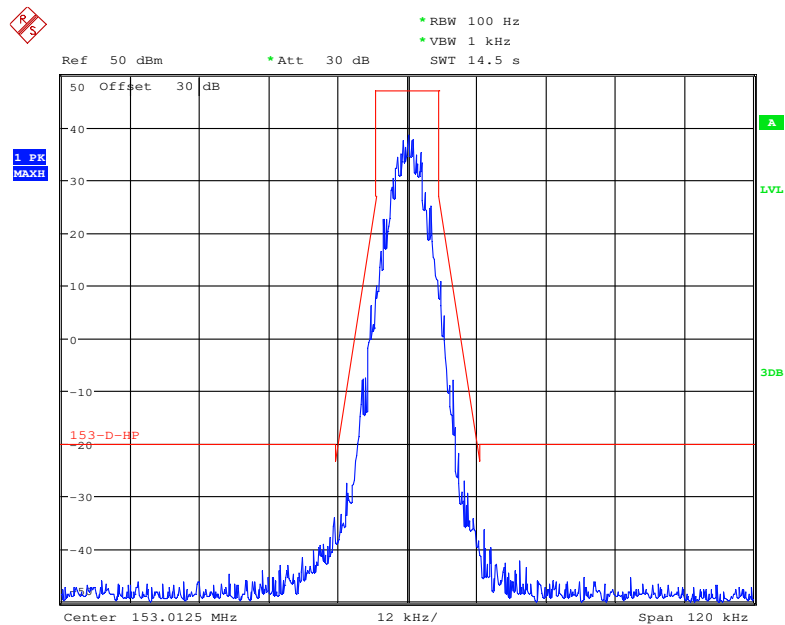


Date: 18.DEC.2017 21:25:25

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

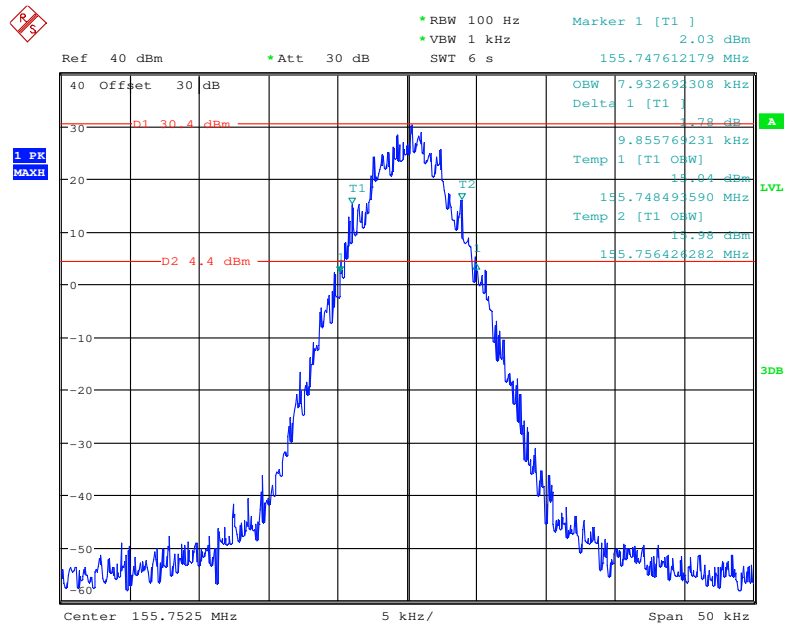


Date: 18.DEC.2017 21:12:21

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, High Power

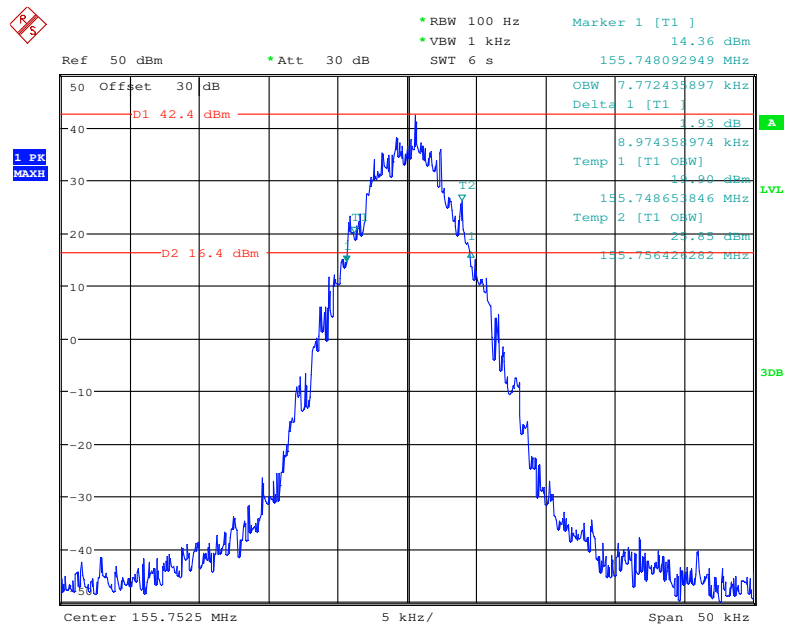


Date: 18.DEC.2017 21:10:48

Frequency 155.7525 MHz: Emission Mask D, Low Power

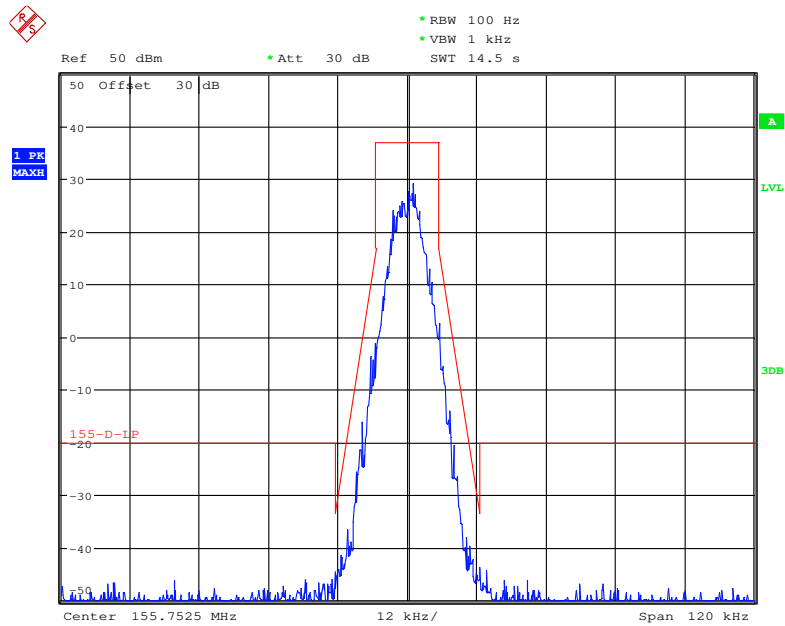


Date: 18.DEC.2017 21:16:52


Frequency 155.7525 MHz: Emission Mask D, High Power

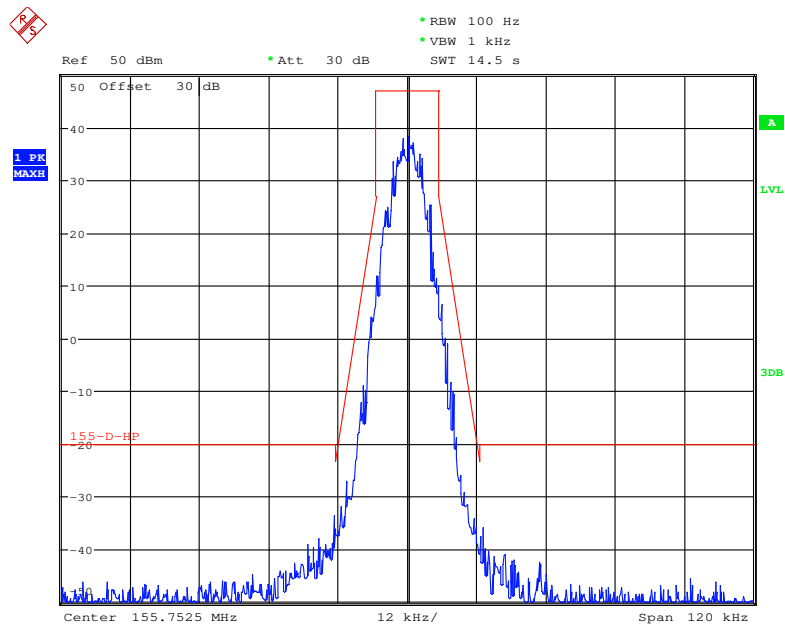

Date: 18.DEC.2017 21:17:35

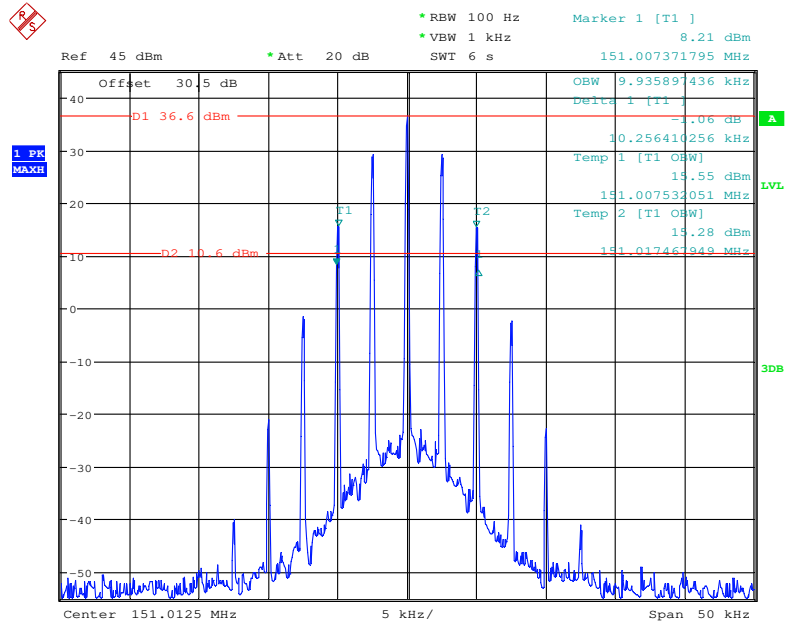
Analog Modulation 12.5k:**Frequency 151.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

Date: 2.JAN.2018 18:39:17

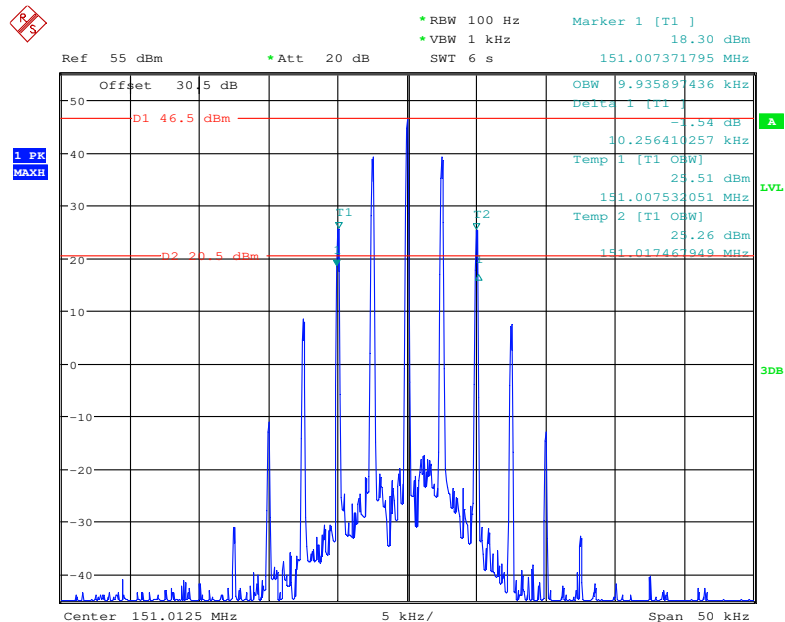Frequency 151.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power


Date: 2.JAN.2018 18:41:20

Frequency 151.0125 MHz: Emission Mask D, Low Power

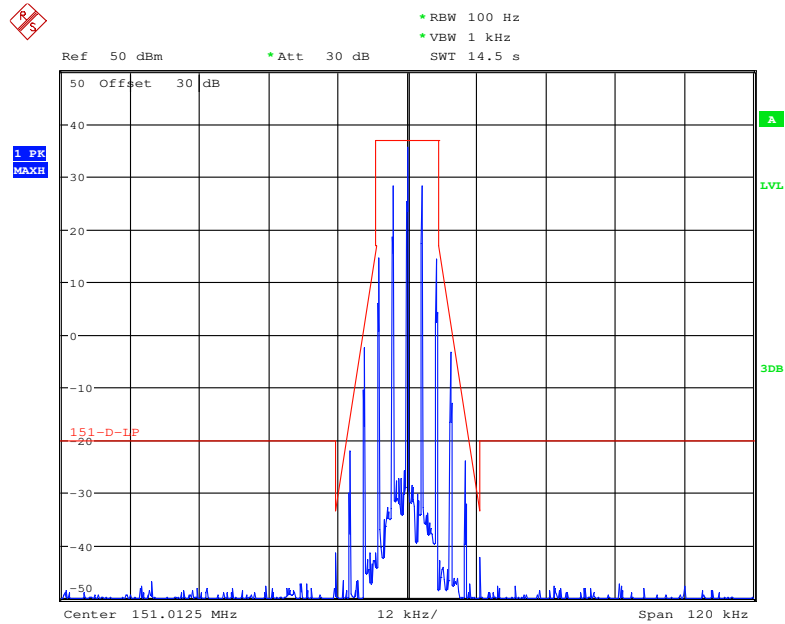


Date: 18.DEC.2017 21:44:07

Frequency 151.0125 MHz: Emission Mask D, High Power

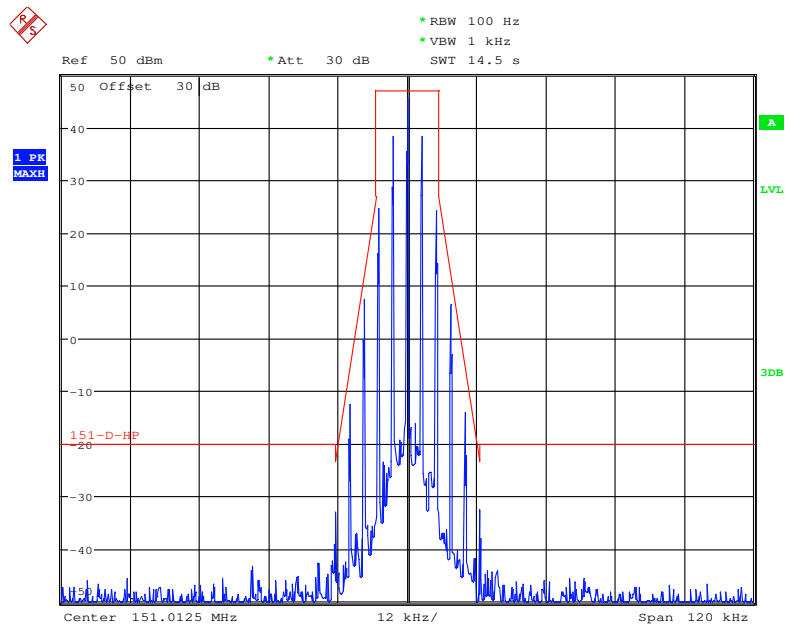


Date: 18.DEC.2017 21:44:49

Frequency 153.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

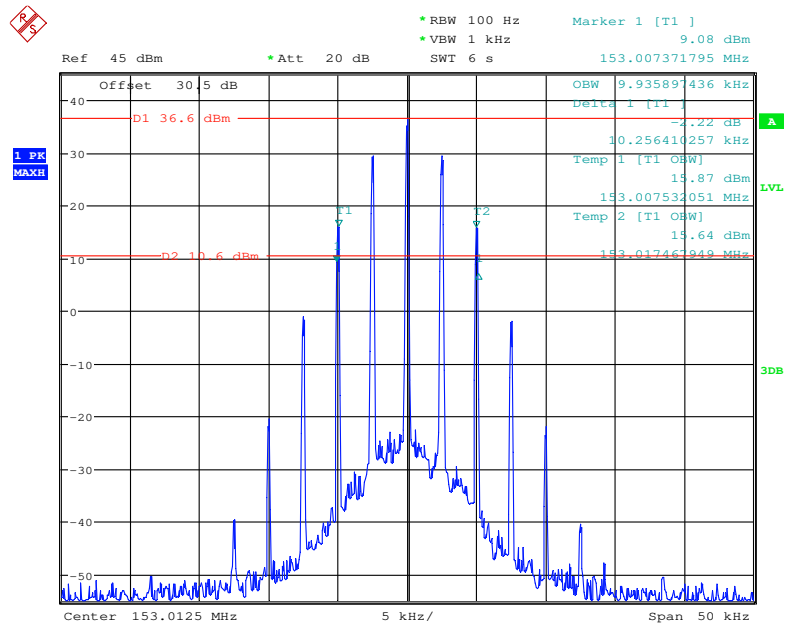


Date: 2.JAN.2018 18:43:55

Frequency 153.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

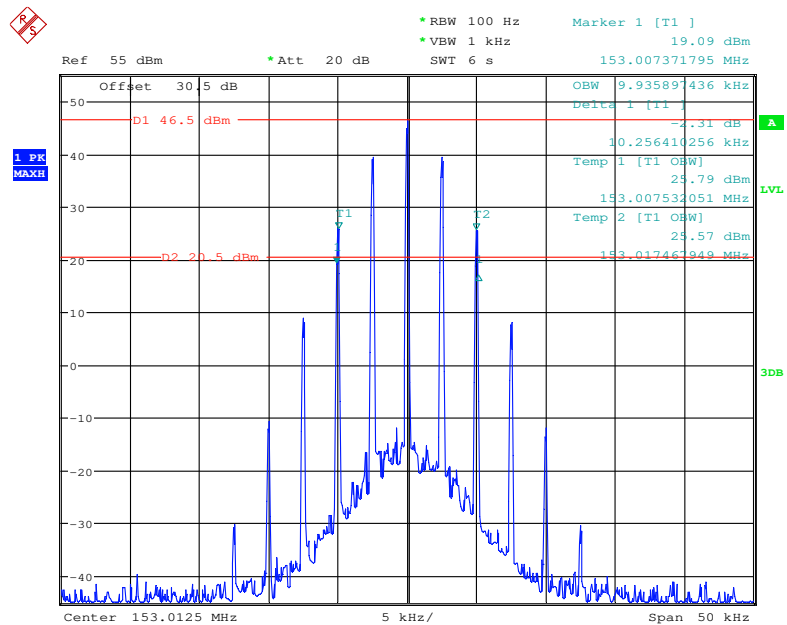


Date: 2.JAN.2018 18:42:43

Frequency 153.0125 MHz: Emission Mask D, Low Power

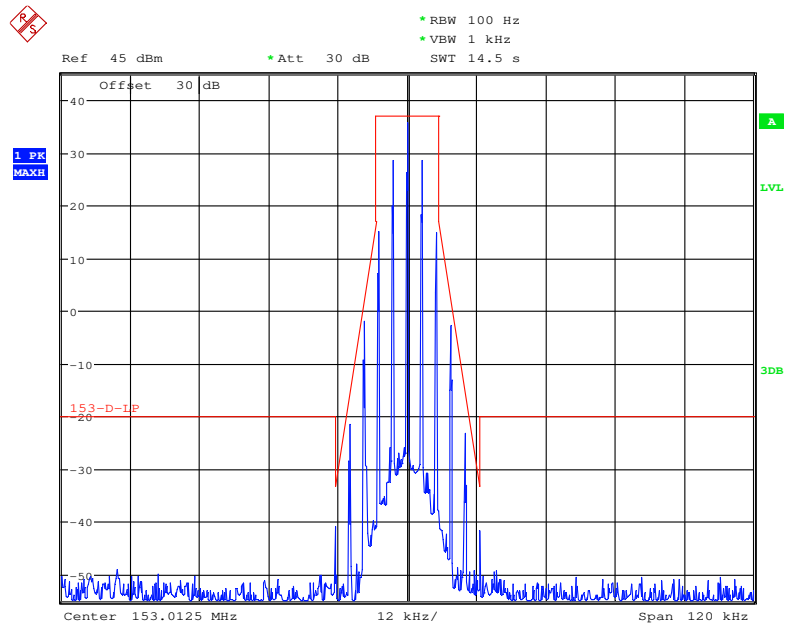


Date: 17.JAN.2018 19:14:01

Frequency 153.0125 MHz: Emission Mask D, High Power

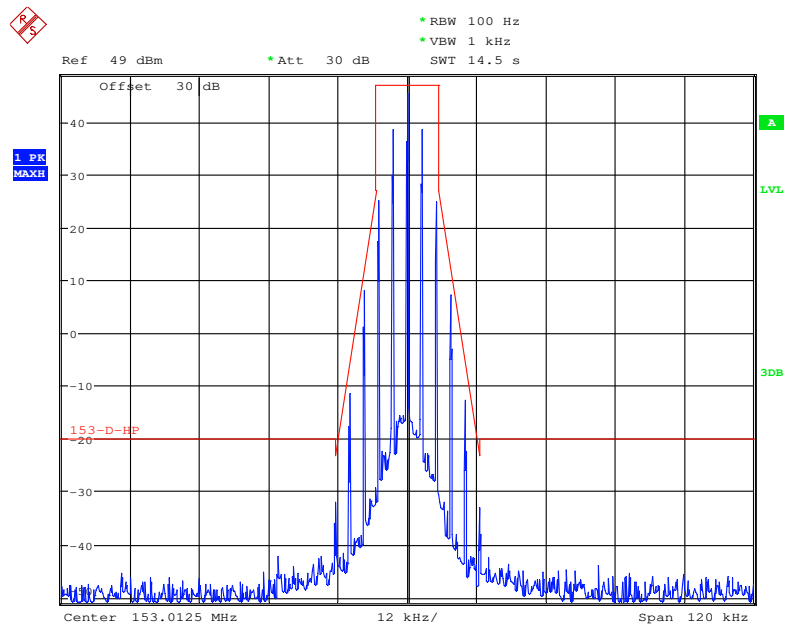


Date: 17.JAN.2018 19:12:04

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

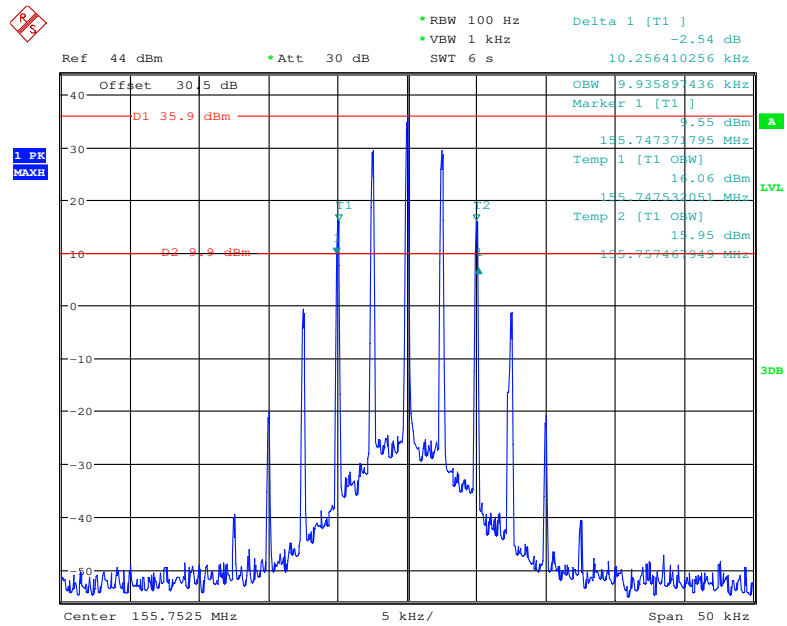


Date: 17.JAN.2018 19:19:25

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, High Power

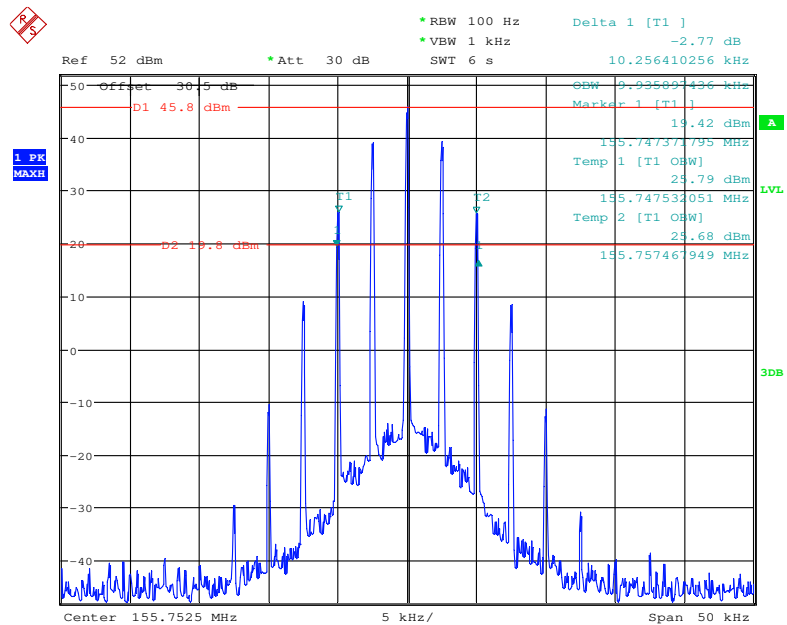


Date: 17.JAN.2018 19:20:58

Frequency 155.7525 MHz: Emission Mask D, Low Power

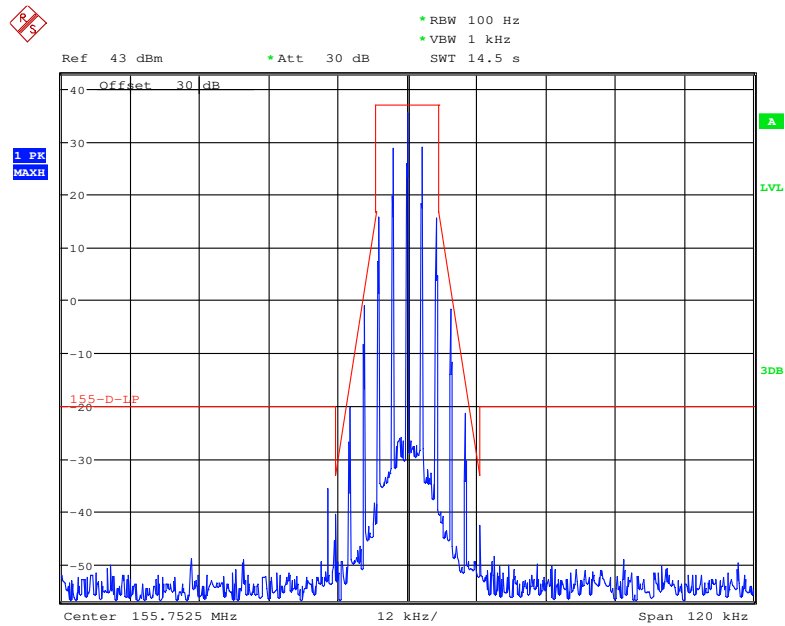

Date: 17.JAN.2018 19:26:54

Frequency 155.7525 MHz: Emission Mask D, High Power

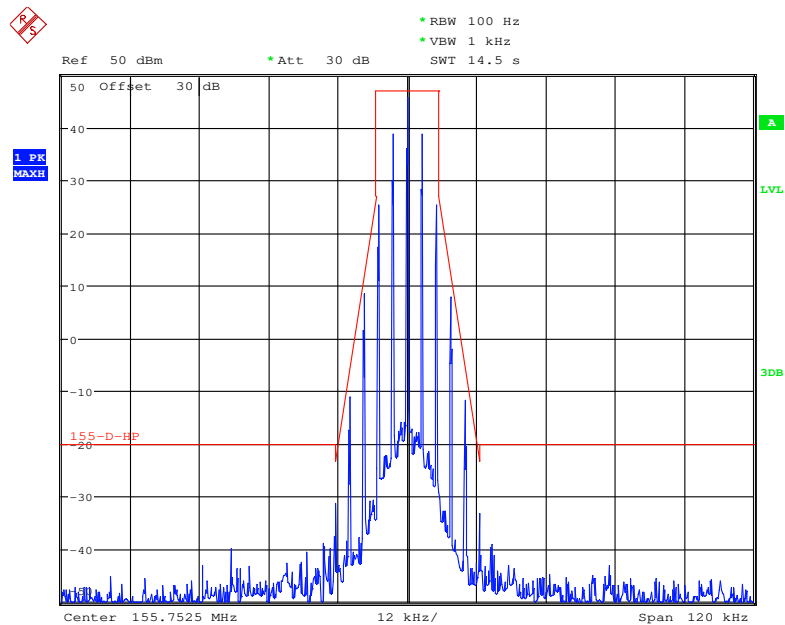

Date: 17.JAN.2018 19:28:06

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	25	151.0125	Low	14.90	15.71	For Part 22
	25		High	14.90	15.71	
	25	153.0125	Low	14.90	15.71	For Part 74
	25		High	14.90	15.71	
	25	155.7525	Low	14.90	15.71	For Part 80
	25		High	14.90	15.71	

Note: Emission designator is base on calculation instead of measurement.

Emission Designator Per CFR 47 §2.201& §2.202&, $B_n = 2M + 2D$


For FM Mode (Channel Spacing: 25 kHz)

Emission Designator 16K0F3E In this case, the maximum modulating frequency is 5.0 kHz with a 3 kHz deviation. $BW = 2(M+D) = 2(5 \text{ kHz} + 3 \text{ kHz}) = 16 \text{ kHz}$ $\square$ 16K0*

F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.


Analog Modulation 25k:

Frequency 151.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

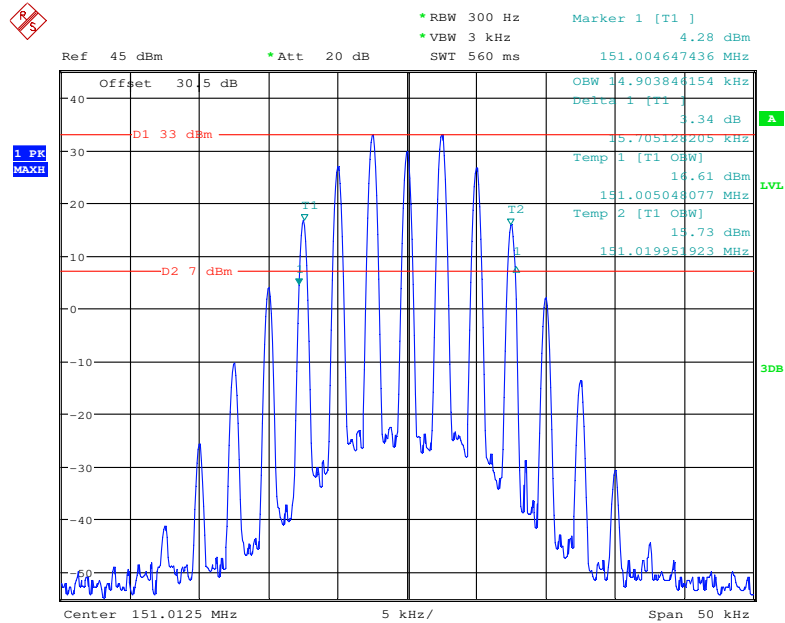


Date: 2.JAN.2018 18:52:24

Frequency 151.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

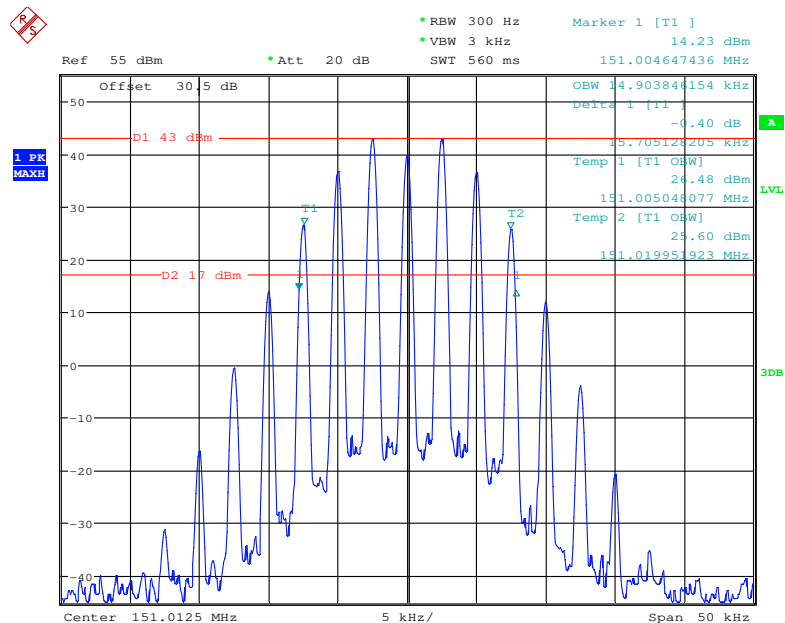


Date: 2.JAN.2018 18:50:47

Frequency 151.0125 MHz: Emission Mask B, Low Power

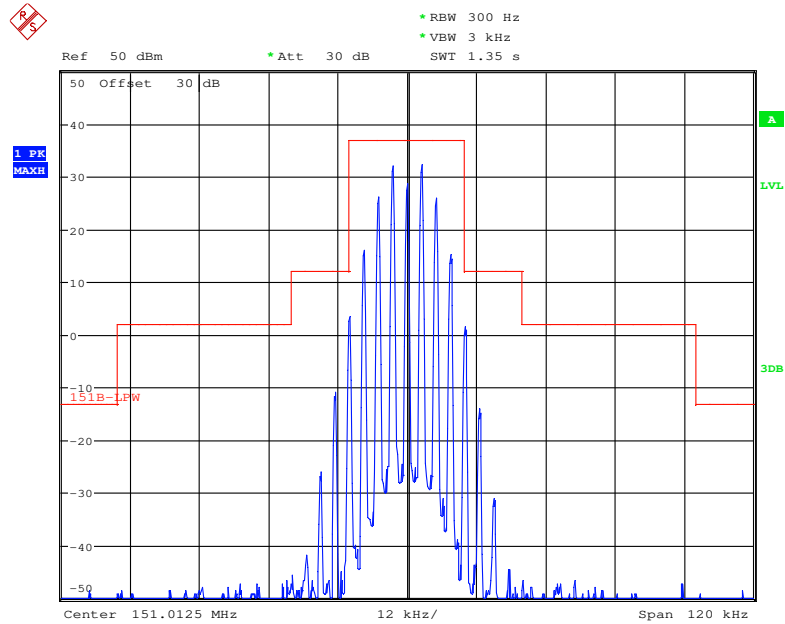


Date: 18.DEC.2017 22:18:45

Frequency 151.0125 MHz: Emission Mask B, High Power

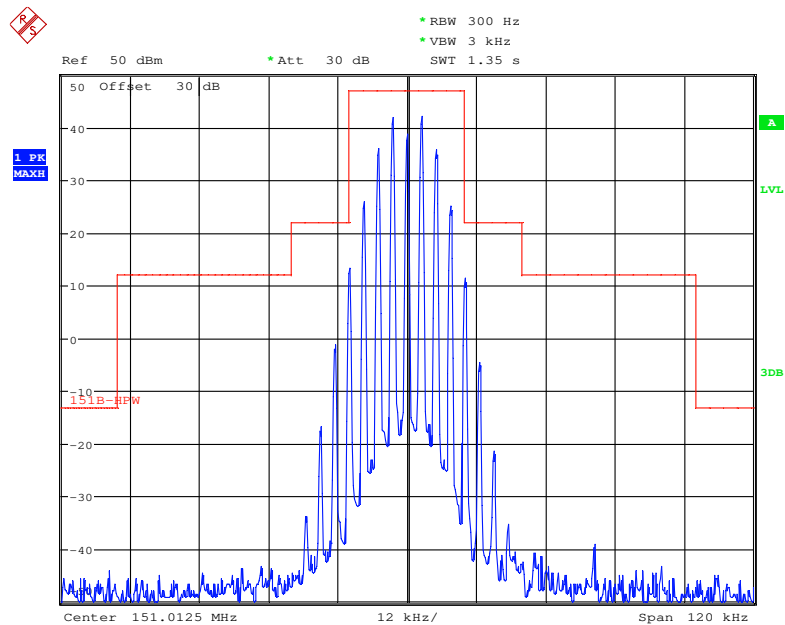


Date: 18.DEC.2017 22:18:04

Frequency 153.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

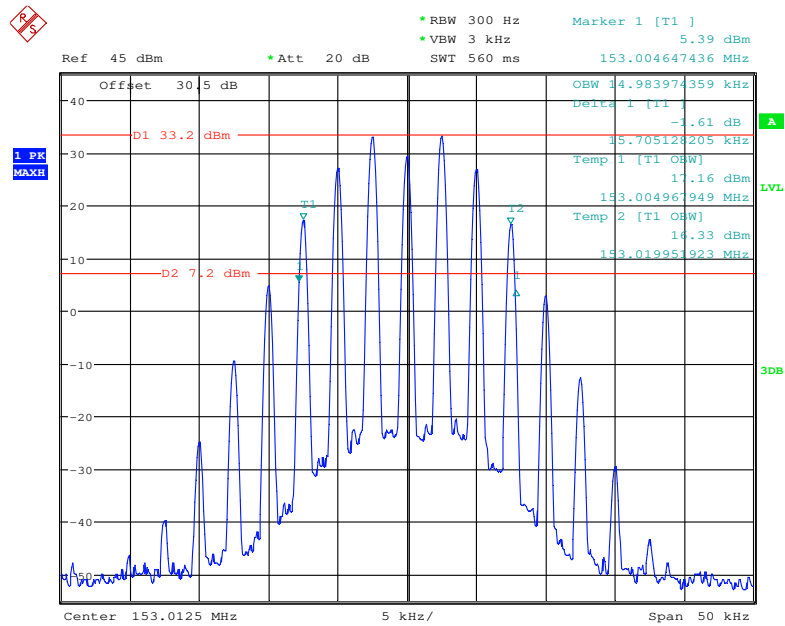


Date: 2.JAN.2018 18:49:10

Frequency 153.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

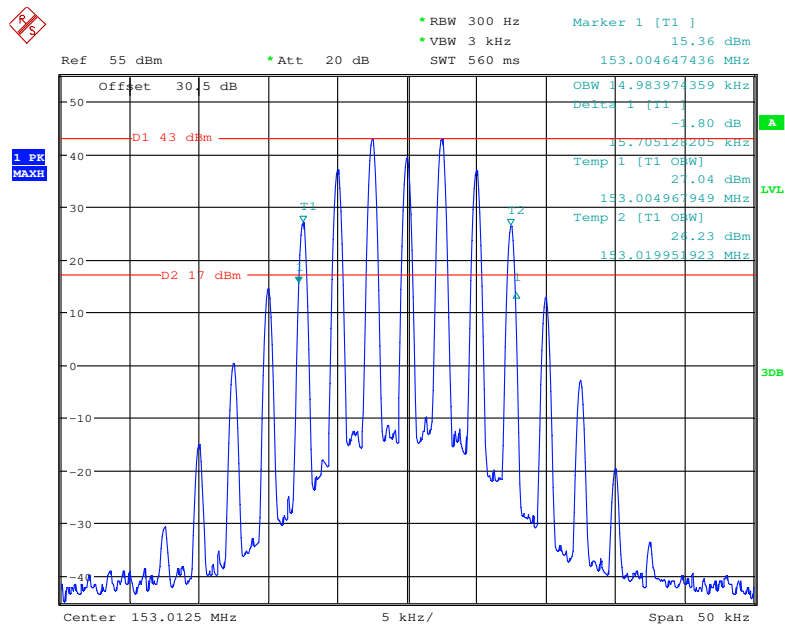


Date: 2.JAN.2018 18:49:53

Frequency 153.0125 MHz: Emission Mask B, Low Power

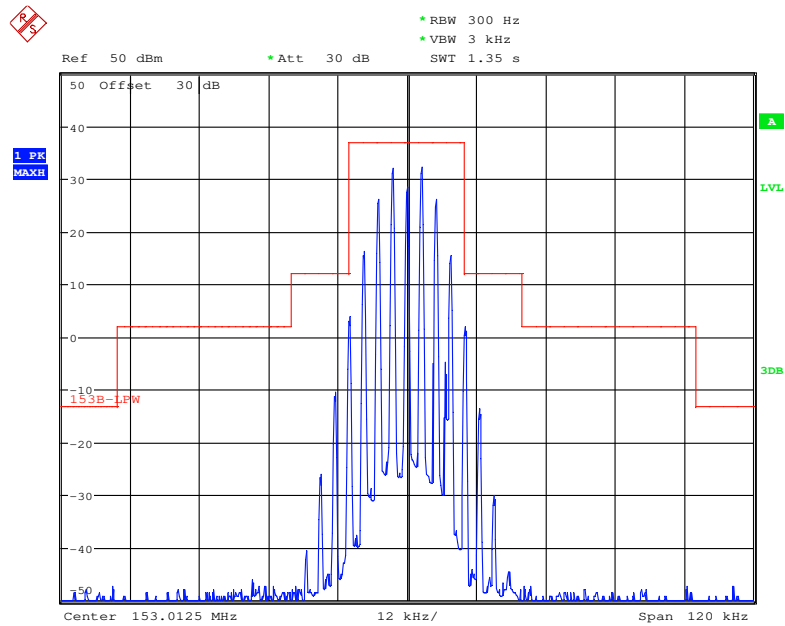


Date: 18,DEC.2017 22:19:42

Frequency 153.0125 MHz: Emission Mask B, High Power

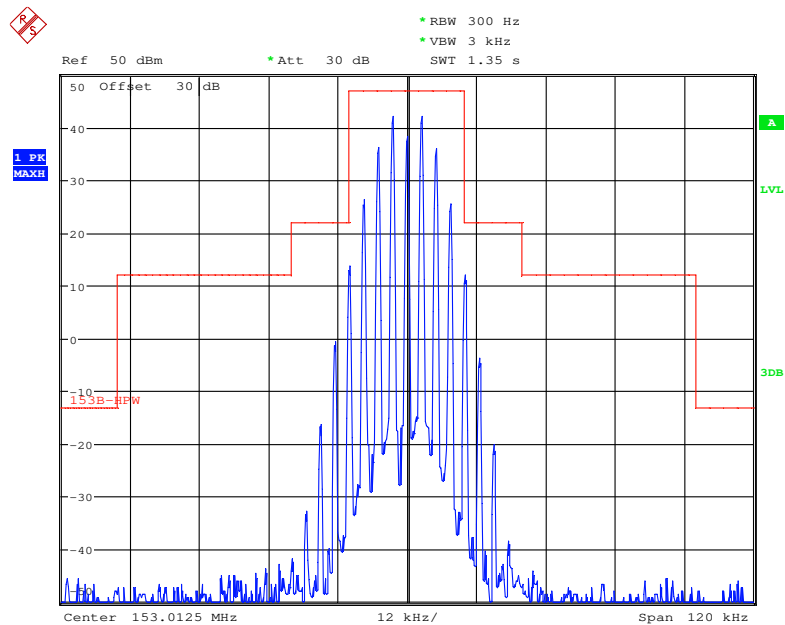


Date: 18,DEC.2017 22:20:12

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

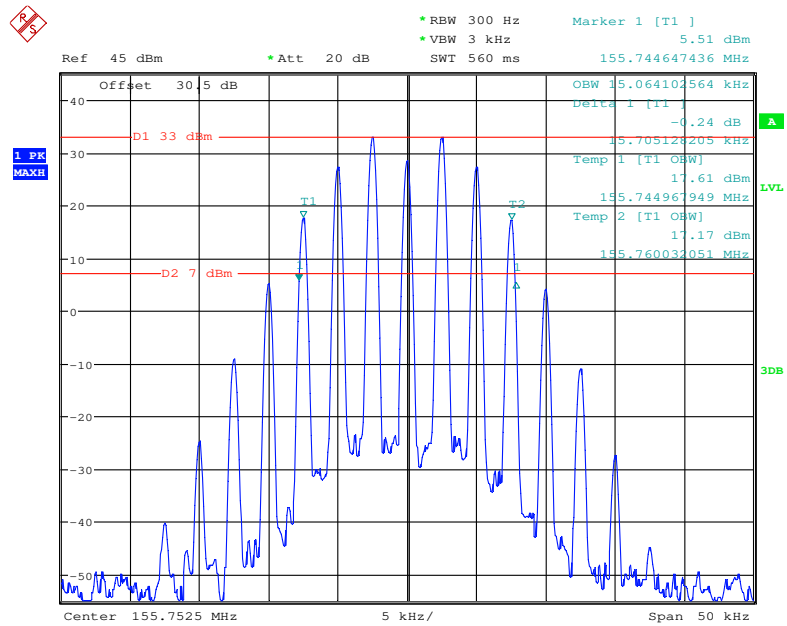


Date: 2.JAN.2018 18:48:03

Frequency 155.7525 MHz: 99% Occupied & 26 dB Bandwidth, High Power

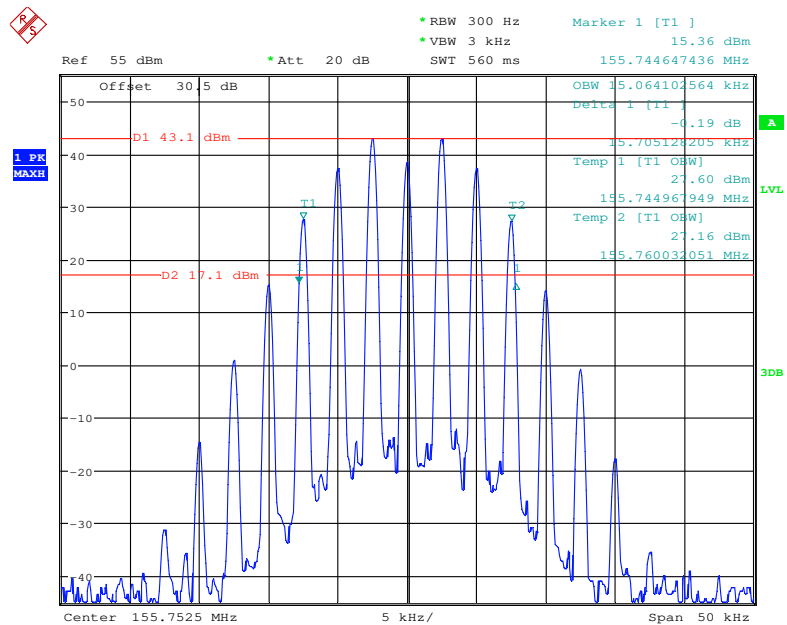


Date: 2.JAN.2018 18:47:09

Frequency 155.7525 MHz: Emission Mask B, Low Power

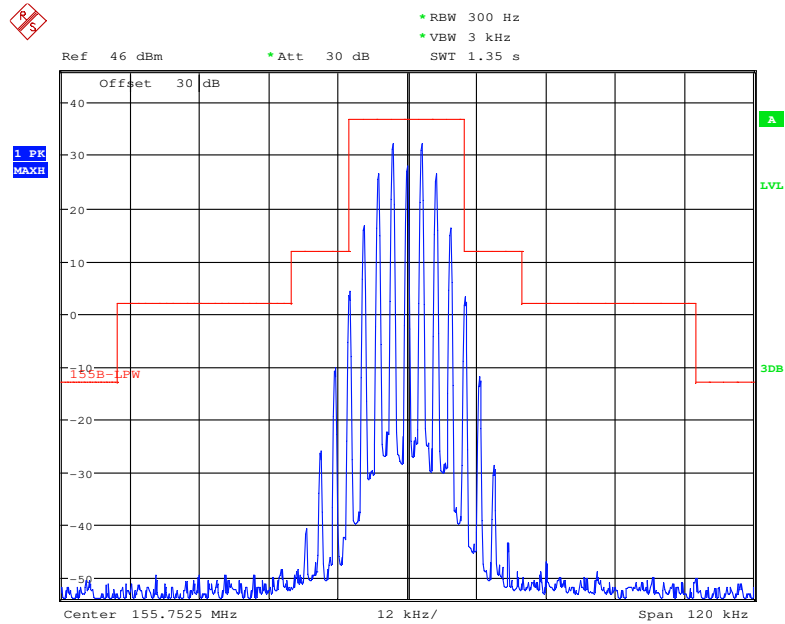

Date: 17.JAN.2018 19:29:19

Frequency 155.7525 MHz: Emission Mask B, High Power

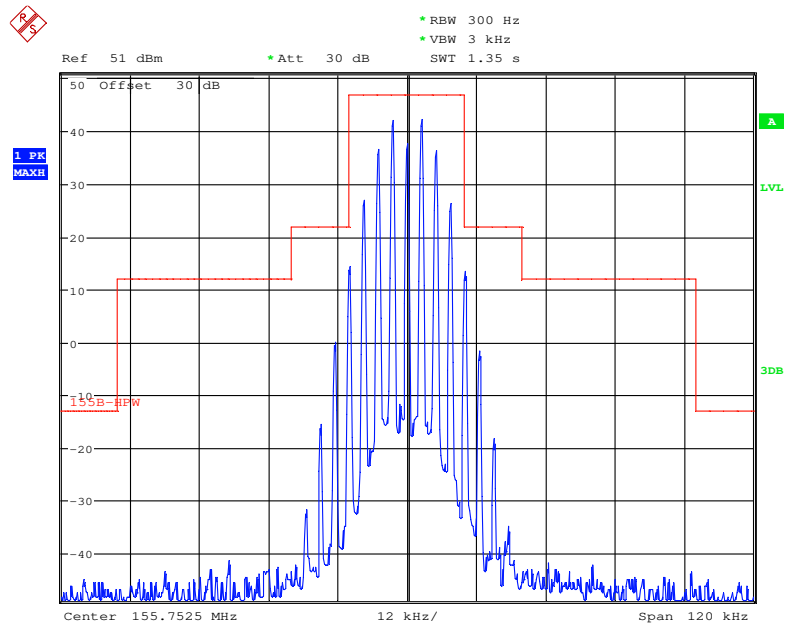

Date: 17.JAN.2018 19:30:02

FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.

2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.

3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Dylan Li on 2017-12-18.

Test Mode: Transmitting.

Note: Worst case at High power level, and please refer to the following plots.


Digital Modulation:

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 151.0125 MHz

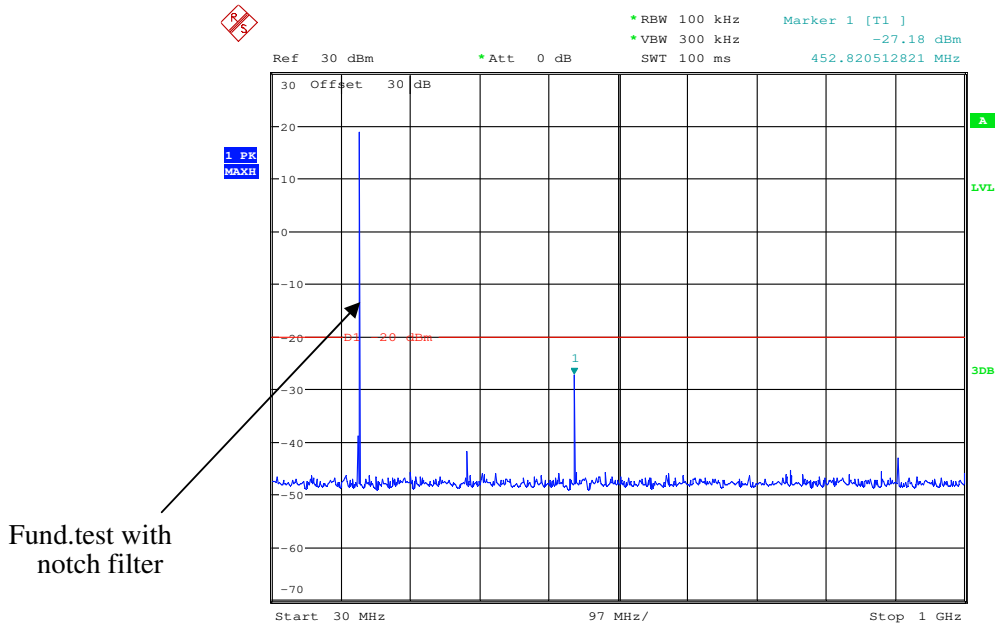


Date: 18.DEC.2017 20:44:00

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 151.0125 MHz

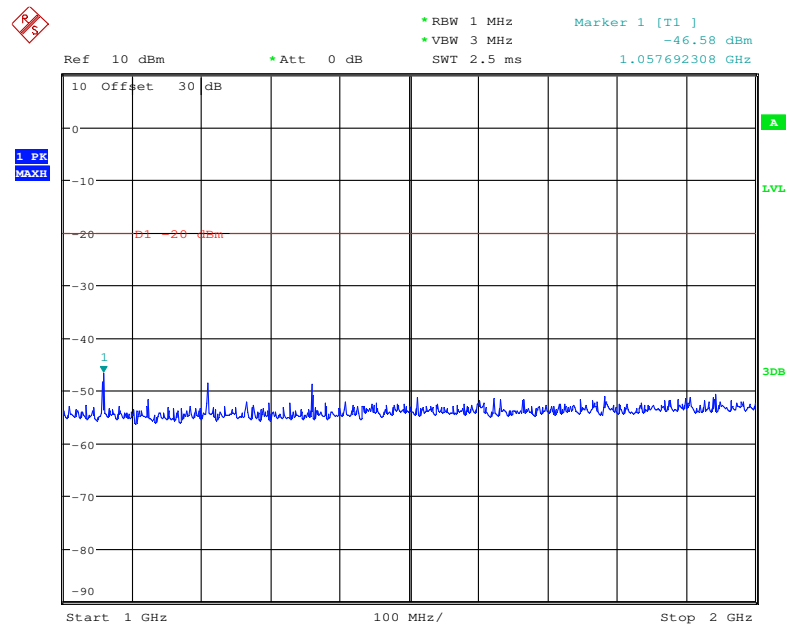


Date: 18.DEC.2017 20:52:34

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 153.0125 MHz

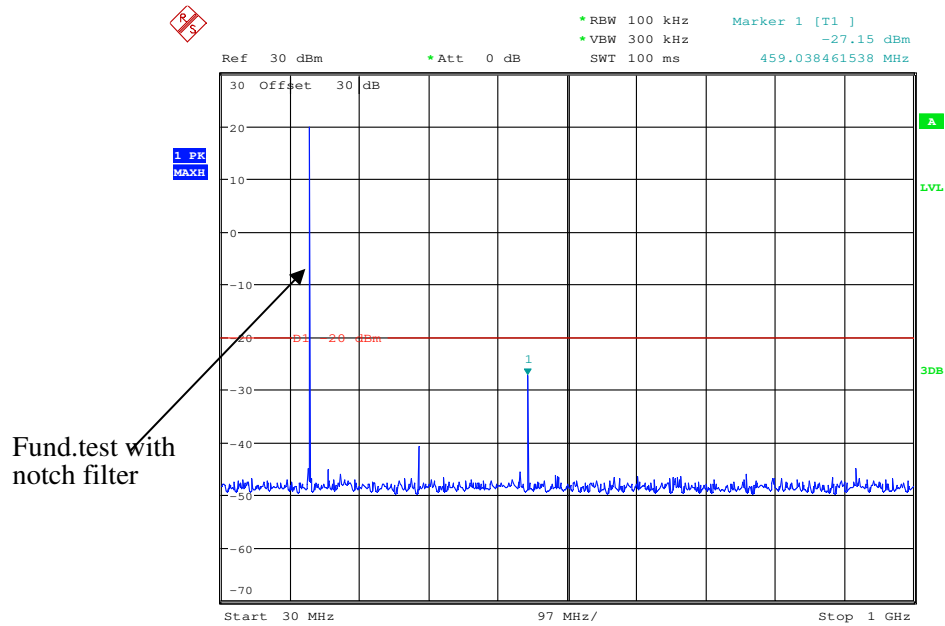

Date: 18.DEC.2017 20:44:39

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 153.0125 MHz

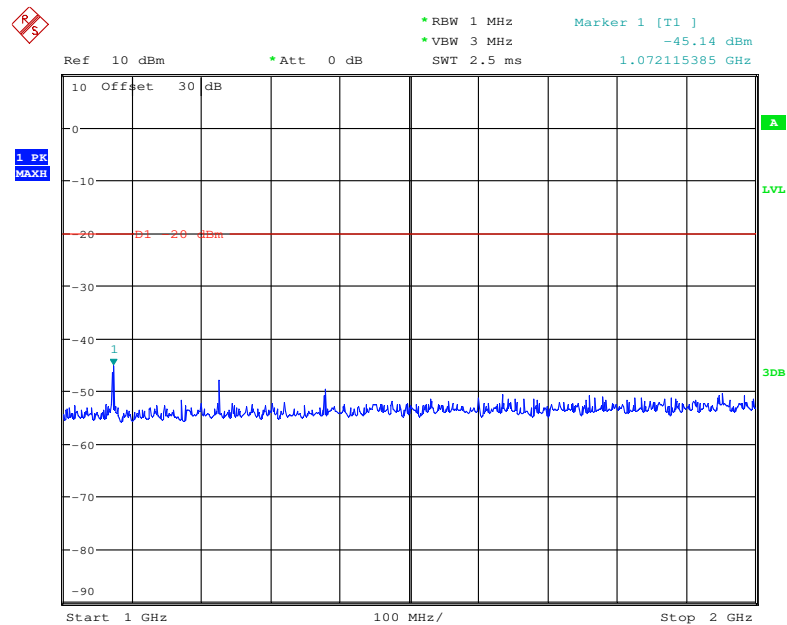

Date: 18.DEC.2017 20:52:50

Ref 30 dBm * Att 0 dB * RBW 100 kHz VBW 300 kHz SWT 100 ms Marker 1 [T1] -27.99 dBm 468.365384615 MHz

30 Offset 30 dB

1 PK MAXH


h

20 dBm

1

Start 30 MHz 97 MHz/ Stop 1 GHz


1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz

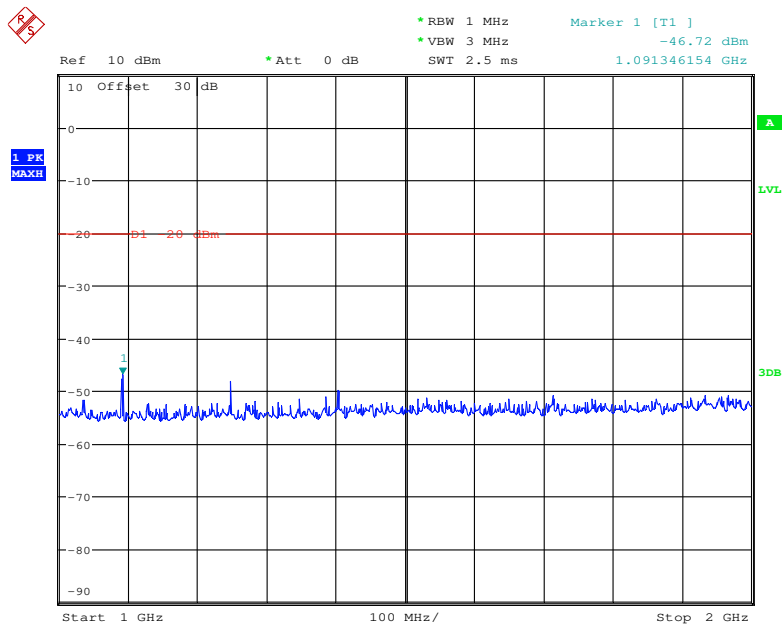

Page 68 of 87


Analog Modulation:

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 151.0125 MHz

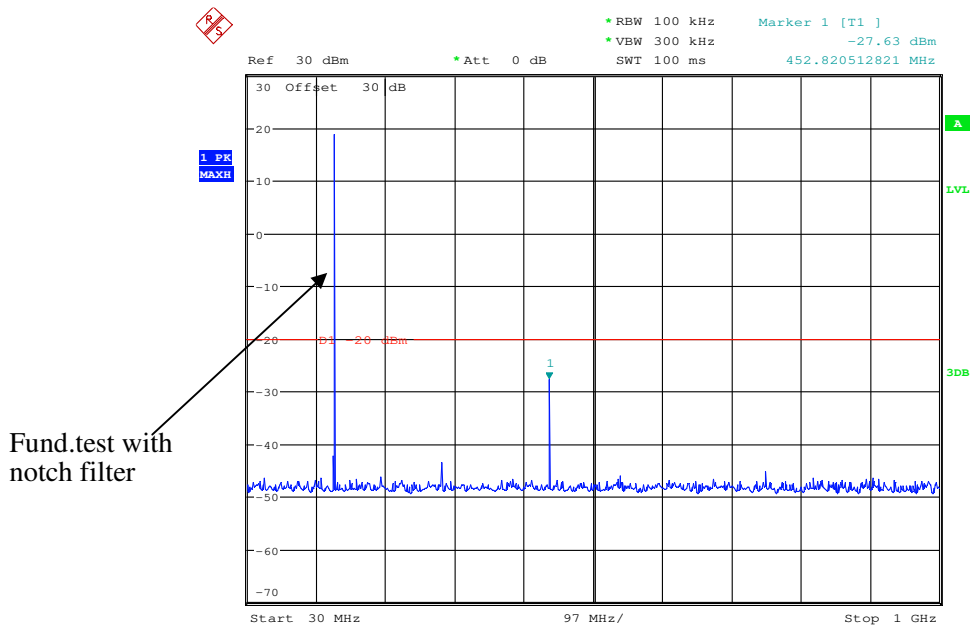


Date: 18.DEC.2017 20:45:32

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 151.0125 MHz

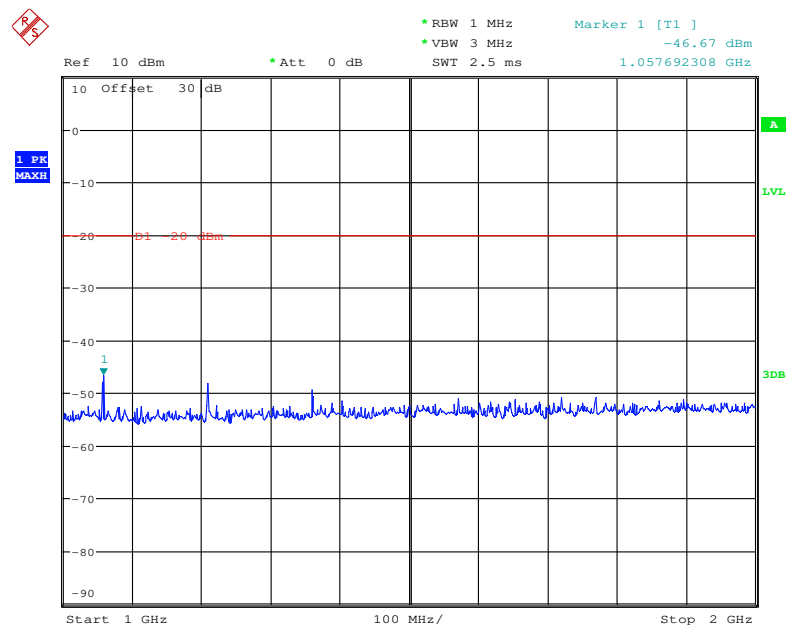


Date: 18.DEC.2017 20:52:22

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 153.0125 MHz

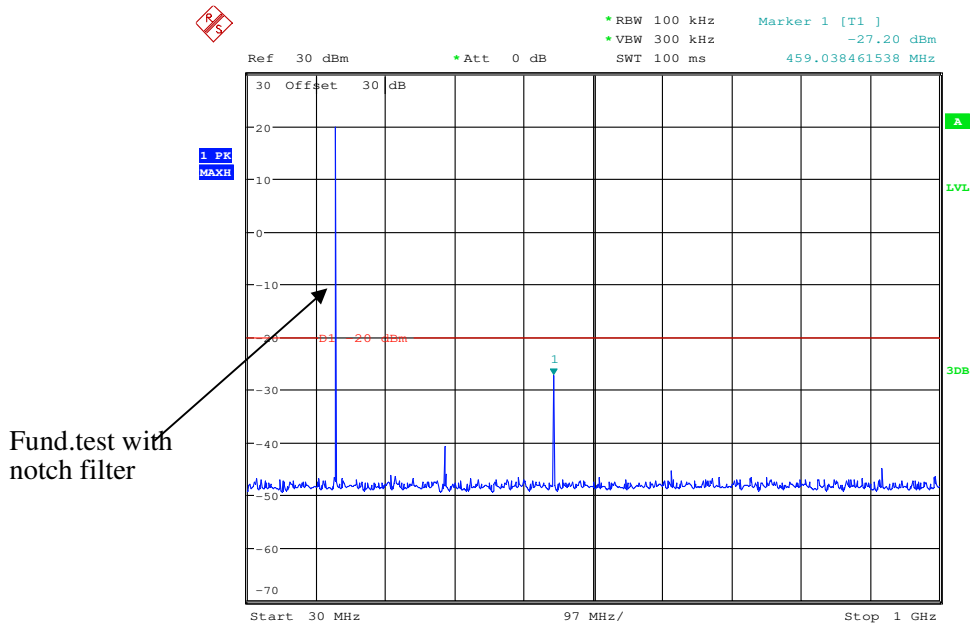

Date: 18.DEC.2017 20:48:37

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 153.0125 MHz

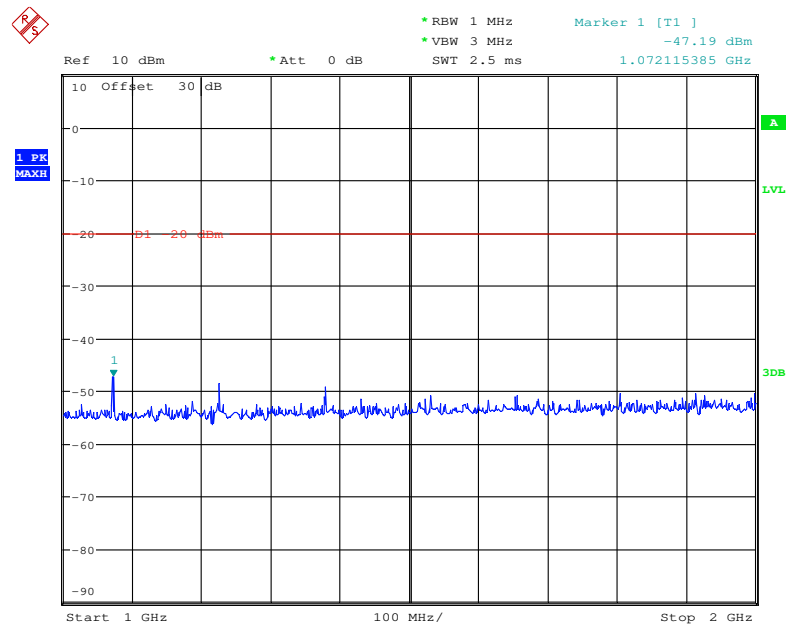

Date: 18.DEC.2017 20:52:05

Ref 30 dBm * Att 0 dB * RBW 100 kHz Marker 1 [T1] -27.90 dBm
 * VBW 300 kHz SWT 100 ms 468.365384615 MHz

30 Offset 30 dB


1 PK MAXH

20 dBm

1


Start 30 MHz 97 MHz/ Stop 1 GHz

1 GHz – 2 GHz, Channel Spacing 12.5 kHz, 155.7525 MHz

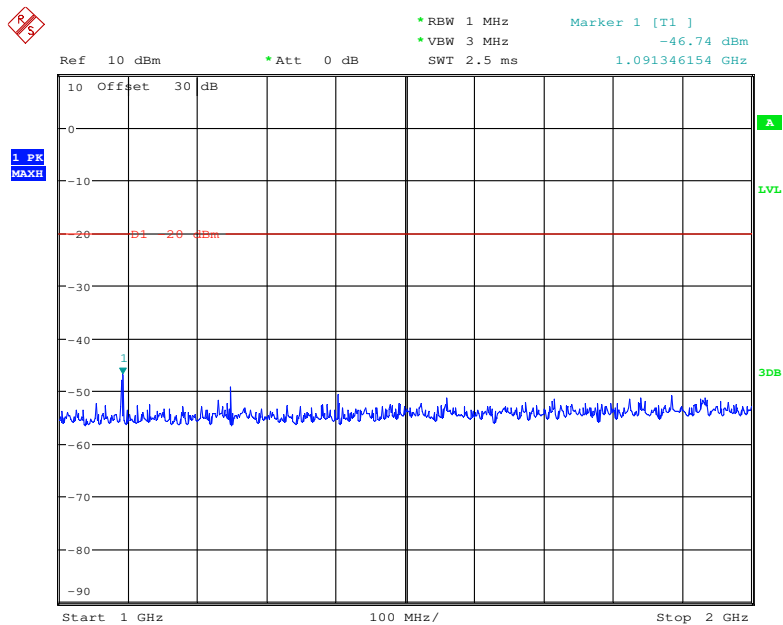


Page 71 of 87

30MHz – 1 GHz, Channel Spacing 25 kHz, 151.0125 MHz




Date: 18.DEC.2017 20:50:57

30MHz – 1 GHz, Channel Spacing 25 kHz, 153.0125 MHz

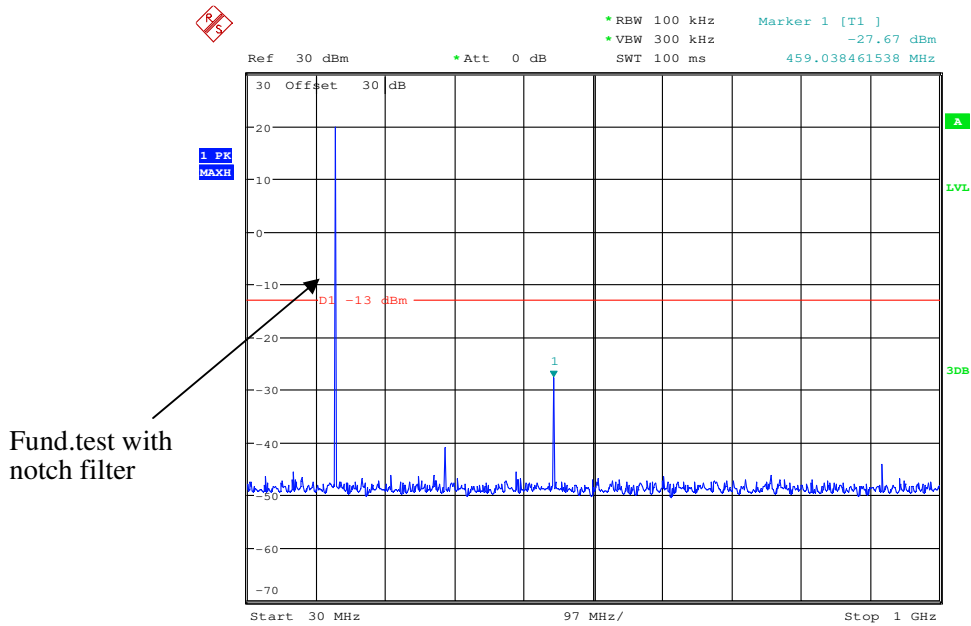


Date: 18.DEC.2017 20:49:41

1 GHz – 2 GHz, Channel Spacing 25 kHz, 153.0125 MHz

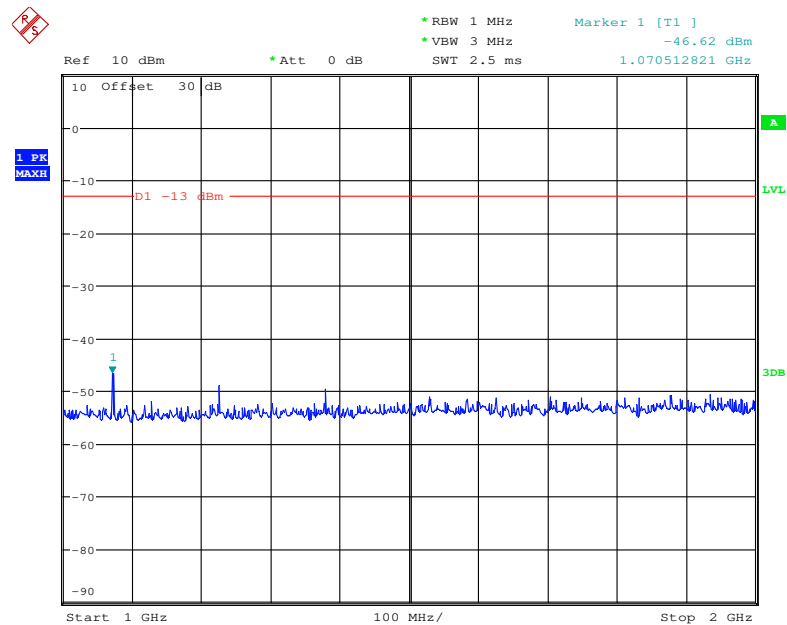


Date: 18.DEC.2017 20:51:14

30MHz – 1 GHz, Channel Spacing 25 kHz, 155.7525 MHz

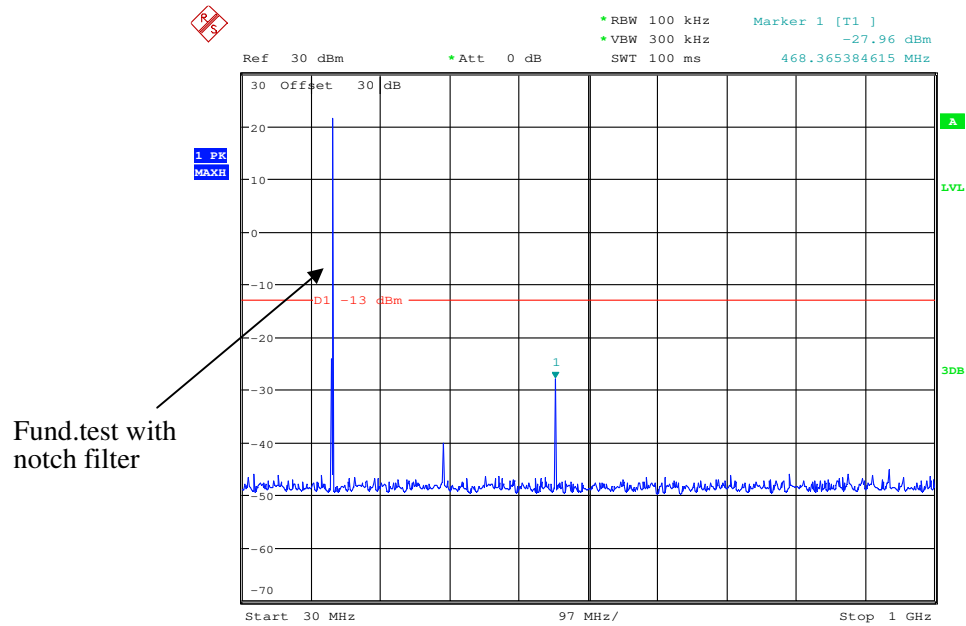

Date: 18.DEC.2017 20:49:28

1 GHz – 2 GHz, Channel Spacing 25 kHz, 155.7525 MHz

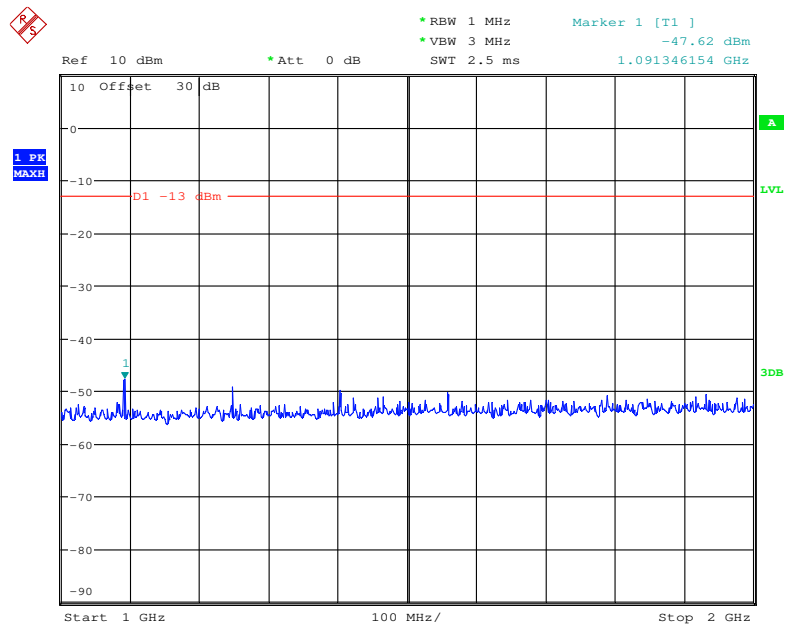

Date: 18.DEC.2017 20:51:26

FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, § 80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Spurious attenuation limit in dB = 43 + 10 log (P) for EUT with a 25 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-04.

Test Mode: Transmitting

Note: Worst case at High power level, and please refer to the following data.

30MHz - 2GHz:

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog 151.0125MHz-25 kHz										
453.0375	43.26	101	1.0	H	-60.4	0.47	0.0	-60.87	-13	47.87
453.0375	44.67	343	1.7	V	-54.5	0.47	0.0	-54.97	-13	41.97
604.05	42.97	324	2.3	H	-56.3	0.57	0.0	-56.87	-13	43.87
604.05	45.11	17	1.1	V	-53.0	0.57	0.0	-53.57	-13	40.57
1208.10	48.57	340	1.3	H	-59.4	1.50	7.20	-53.70	-13	40.70
1208.10	46.73	191	2.1	V	-60.9	1.50	7.20	-55.20	-13	42.20
1359.11	45.55	154	1.5	H	-62.4	1.60	8.30	-55.70	-13	42.70
1359.11	43.24	134	1.8	V	-65.0	1.60	8.30	-58.30	-13	45.30
Analog 153.0125MHz-25 kHz										
459.0375	45.22	131	2.3	H	-58.5	0.47	0.0	-58.97	-13	45.97
459.0375	44.39	42	2.1	V	-54.8	0.47	0.0	-55.27	-13	42.27
612.05	43.82	194	2.2	H	-55.1	0.57	0.0	-55.67	-13	42.67
612.05	44.56	343	1.4	V	-52.4	0.57	0.0	-52.97	-13	39.97
1224.10	49.64	105	2.5	H	-58.3	1.50	7.20	-52.60	-13	39.60
1224.10	48.71	18	2.2	V	-59.0	1.50	7.20	-53.30	-13	40.30
1377.11	46.62	250	1.2	H	-61.3	1.60	8.30	-54.60	-13	41.60
1377.11	44.18	176	1.1	V	-64.0	1.60	8.30	-57.30	-13	44.30
Analog 155.7525MHz-25 kHz										
467.2575	45.63	350	1.5	H	-58.2	0.47	0.0	-58.67	-13	45.67
467.2575	44.99	60	2.3	V	-55.4	0.47	0.0	-55.87	-13	42.87
623.01	44.38	319	1.8	H	-54.5	0.57	0.0	-55.07	-13	42.07
623.01	43.85	245	2.1	V	-53.1	0.57	0.0	-53.67	-13	40.67
1246.02	47.58	81	1.5	H	-60.4	1.50	7.20	-54.70	-13	41.70
1246.02	45.27	285	1.9	V	-62.4	1.50	7.20	-56.70	-13	43.70
1401.77	46.38	17	2.1	H	-61.6	1.60	8.30	-54.90	-13	41.90
1401.77	45.33	43	2.4	V	-62.9	1.60	8.30	-56.20	-13	43.20

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog 151.0125MHz-12.5 kHz										
453.0375	43.21	28	1.2	H	-60.5	0.47	0.0	-60.97	-20	40.97
453.0375	44.62	324	1.1	V	-54.6	0.47	0.0	-55.07	-20	35.07
604.05	44.59	109	2.4	H	-54.7	0.57	0.0	-55.27	-20	35.27
604.05	45.83	121	2.3	V	-52.3	0.57	0.0	-52.87	-20	32.87
1057.09	49.35	212	1.5	H	-59.2	1.60	6.90	-53.90	-20	33.90
1057.09	47.22	310	1.6	V	-62.2	1.60	6.90	-56.90	-20	36.90
1208.10	45.77	243	1.8	H	-62.2	1.50	7.20	-56.50	-20	36.50
1208.10	43.28	94	1.0	V	-64.4	1.50	7.20	-58.70	-20	38.70
Analog 153.0125MHz-12.5 kHz										
459.0375	43.99	4	1.1	H	-59.7	0.47	0.0	-60.17	-20	40.17
459.0375	43.07	280	1.1	V	-56.1	0.47	0.0	-56.57	-20	36.57
612.05	44.18	107	1.1	H	-54.7	0.57	0.0	-55.27	-20	35.27
612.05	44.33	107	2.0	V	-52.6	0.57	0.0	-53.17	-20	33.17
1224.10	47.29	135	1.4	H	-60.7	1.50	7.20	-55.00	-20	35.00
1224.10	46.45	260	1.5	V	-61.2	1.50	7.20	-55.50	-20	35.50
1377.11	45.76	63	2.4	H	-62.2	1.60	8.30	-55.50	-20	35.50
1377.11	44.18	283	2.2	V	-64.0	1.60	8.30	-57.30	-20	37.30
Analog 155.7525MHz-12.5 kHz										
467.2575	46.23	199	2.5	H	-57.6	0.47	0.0	-58.07	-20	38.07
467.2575	45.21	10	1.4	V	-55.2	0.47	0.0	-55.67	-20	35.67
623.01	44.83	233	1.8	H	-54.0	0.57	0.0	-54.57	-20	34.57
623.01	45.63	109	2.2	V	-51.3	0.57	0.0	-51.87	-20	31.87
1090.27	49.87	10	1.4	H	-58.7	1.60	6.90	-53.40	-20	33.40
1090.27	47.53	282	1.4	V	-61.9	1.60	6.90	-56.60	-20	36.60
1246.02	46.65	109	2.4	H	-61.3	1.50	7.20	-55.60	-20	35.60
1246.02	44.27	261	2.3	V	-63.4	1.50	7.20	-57.70	-20	37.70

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Digital 151.0125MHz-12.5 kHz										
453.0375	41.33	27	1.7	H	-62.4	0.47	0.0	-62.87	-20	42.87
453.0375	42.59	279	2.1	V	-56.6	0.47	0.0	-57.07	-20	37.07
604.05	43.25	299	2.1	H	-56.0	0.57	0.0	-56.57	-20	36.57
604.05	43.89	155	1.5	V	-54.2	0.57	0.0	-54.77	-20	34.77
1208.10	46.52	203	1.4	H	-61.5	1.50	7.20	-55.80	-20	35.80
1208.10	45.33	252	1.5	V	-62.3	1.50	7.20	-56.60	-20	36.60
1359.11	42.78	149	2.3	H	-65.2	1.60	8.30	-58.50	-20	38.50
1359.11	40.11	117	2.2	V	-68.1	1.60	8.30	-61.40	-20	41.40
Digital 153.0125MHz-12.5 kHz										
459.0375	43.68	251	1.7	H	-60.0	0.47	0.0	-60.47	-20	40.47
459.0375	42.95	323	1.7	V	-56.2	0.47	0.0	-56.67	-20	36.67
612.05	43.67	273	1.5	H	-55.2	0.57	0.0	-55.77	-20	35.77
612.05	44.64	15	1.3	V	-52.3	0.57	0.0	-52.87	-20	32.87
1071.09	48.52	157	1.0	H	-60.0	1.60	6.90	-54.70	-20	34.70
1071.09	46.33	76	1.9	V	-63.1	1.60	6.90	-57.80	-20	37.80
1224.10	45.29	44	1.5	H	-62.7	1.50	7.20	-57.00	-20	37.00
1224.10	43.37	282	1.8	V	-64.3	1.50	7.20	-58.60	-20	38.60
Digital 155.7525MHz-12.5 kHz										
467.2575	43.85	312	2.5	H	-60.0	0.47	0.0	-60.47	-20	40.47
467.2575	42.77	197	1.7	V	-57.6	0.47	0.0	-58.07	-20	38.07
623.01	44.65	291	1.7	H	-54.2	0.57	0.0	-54.77	-20	34.77
623.01	43.21	357	2.1	V	-53.8	0.57	0.0	-54.37	-20	34.37
1246.02	46.29	26	2.1	H	-61.7	1.50	7.20	-56.00	-20	36.00
1246.02	44.87	66	1.0	V	-62.8	1.50	7.20	-57.10	-20	37.10
1401.77	43.57	223	2.0	H	-64.4	1.60	8.30	-57.70	-20	37.70
1401.77	42.11	187	2.2	V	-66.1	1.60	8.30	-59.40	-20	39.40

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, § 80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2017-12-18.

Test Mode: Transmitting

Note: This device is a Base station.

For 12.5kHz:

For part 22:

Digital Modulation, Reference Frequency: 151.0125 MHz, Limit: ± 5.0 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	151.012486	-0.0927
40	13.6	151.012453	-0.3112
30	13.6	151.012464	-0.2384
20	13.6	151.012451	-0.3245
10	13.6	151.012474	-0.1722
0	13.6	151.012472	-0.1854
-10	13.6	151.012470	-0.1987
-20	13.6	151.012461	-0.2583
-30	13.6	151.012464	-0.2384
Frequency Stability versus Input Voltage			
20	11.6	151.012459	-0.2715

For part 74:

Digital Modulation, Reference Frequency: 153.0125 MHz, Limit: ± 2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	153.012446	-0.3529
40	13.6	153.012457	-0.2810
30	13.6	153.012451	-0.3202
20	13.6	153.012448	-0.3398
10	13.6	153.012467	-0.2157
0	13.6	153.012463	-0.2418
-10	13.6	153.012457	-0.2810
-20	13.6	153.012482	-0.1176
-30	13.6	153.012471	-0.1895
Frequency Stability versus Input Voltage			
20	11.6	153.012489	-0.0719

For part 90:

Digital Modulation, Reference Frequency: 155.7525 MHz, Limit: ± 2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	155.752446	-0.3467
40	13.6	155.752454	-0.2953
30	13.6	155.752455	-0.2889
20	13.6	155.752461	-0.2504
10	13.6	155.752440	-0.3852
0	13.6	155.752468	-0.2055
-10	13.6	155.752455	-0.2889
-20	13.6	155.752461	-0.2504
-30	13.6	155.752354	-0.9374
Frequency Stability versus Input Voltage			
20	11.6	155.752456	-0.2825

For part 22:

Analog Modulation, Reference Frequency: 151.0125 MHz, Limit: ± 5.0 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	151.012456	-0.2914
40	13.6	151.012465	-0.2318
30	13.6	151.012459	-0.2715
20	13.6	151.012458	-0.2781
10	13.6	151.012451	-0.3245
0	13.6	151.012449	-0.3377
-10	13.6	151.012462	-0.2516
-20	13.6	151.012452	-0.3179
-30	13.6	151.012451	-0.3245
Frequency Stability versus Input Voltage			
20	11.6	151.012482	-0.1192

For part 74:

Analog Modulation, Reference Frequency: 153.0125 MHz, Limit: ± 2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	153.012462	-0.2483
40	13.6	153.012453	-0.3072
30	13.6	153.012458	-0.2745
20	13.6	153.012446	-0.3529
10	13.6	153.012465	-0.2287
0	13.6	153.012449	-0.3333
-10	13.6	153.012466	-0.2222
-20	13.6	153.012461	-0.2549
-30	13.6	153.012458	-0.2745
Frequency Stability versus Input Voltage			
20	11.6	153.012472	-0.1830

For part 90:

Analog Modulation, Reference Frequency: 155.7525 MHz, Limit: ± 2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	155.752469	-0.1990
40	13.6	155.752475	-0.1605
30	13.6	155.752448	-0.3339
20	13.6	155.752462	-0.2440
10	13.6	155.752483	-0.1091
0	13.6	155.752477	-0.1477
-10	13.6	155.752461	-0.2504
-20	13.6	155.752487	-0.0835
-30	13.6	155.752463	-0.2376
Frequency Stability versus Input Voltage			
20	11.6	155.752473	-0.1734

For 25kHz

For part 22:

Analog Modulation, Reference Frequency: 151.0125 MHz, Limit: ± 5.0 ppm, 25 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	151.012468	-0.2119
40	13.6	151.012471	-0.1920
30	13.6	151.012459	-0.2715
20	13.6	151.012463	-0.2450
10	13.6	151.012451	-0.3245
0	13.6	151.012481	-0.1258
-10	13.6	151.012446	-0.3576
-20	13.6	151.012487	-0.0861
-30	13.6	151.012464	-0.2384
Frequency Stability versus Input Voltage			
20	11.6	151.012473	-0.1788

For part 74:

Analog Modulation, Reference Frequency: 153.0125 MHz, Limit: ± 2.5 ppm, 25 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	153.012455	-0.2941
40	13.6	153.012466	-0.2222
30	13.6	153.012472	-0.1830
20	13.6	153.012487	-0.0850
10	13.6	153.012451	-0.3202
0	13.6	153.012482	-0.1176
-10	13.6	153.012463	-0.2418
-20	13.6	153.012462	-0.2483
-30	13.6	153.012472	-0.1830
Frequency Stability versus Input Voltage			
20	11.6	153.012467	-0.2157

For part 80:

Analog Modulation, Reference Frequency: 155.7525 MHz, Limit: ± 5.0 ppm, 25 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature ($^{\circ}$)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	155.752471	-0.1862
40	13.6	155.752468	-0.2055
30	13.6	155.752474	-0.1669
20	13.6	155.752454	-0.2953
10	13.6	155.752476	-0.1541
0	13.6	155.752462	-0.2440
-10	13.6	155.752474	-0.1669
-20	13.6	155.752452	-0.3082
-30	13.6	155.752464	-0.2311
Frequency Stability versus Input Voltage			
20	11.6	155.752471	-0.1862

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

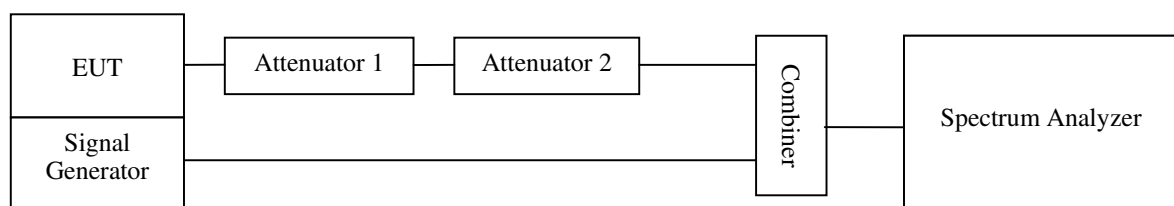

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Dylan Li on 2018-01-09.

Frequency(MHz)	Channel Separation(kHz)	Transient Period(ms)	Transient Frequency
155.7525	12.5	5(t1)	<+/-12.5 kHz
		20(t2)	<+/-6.25 kHz
		5(t3)	<+/-12.5 kHz


Please refer to the following plots.

Channel: 155.7525 MHz

Turn on

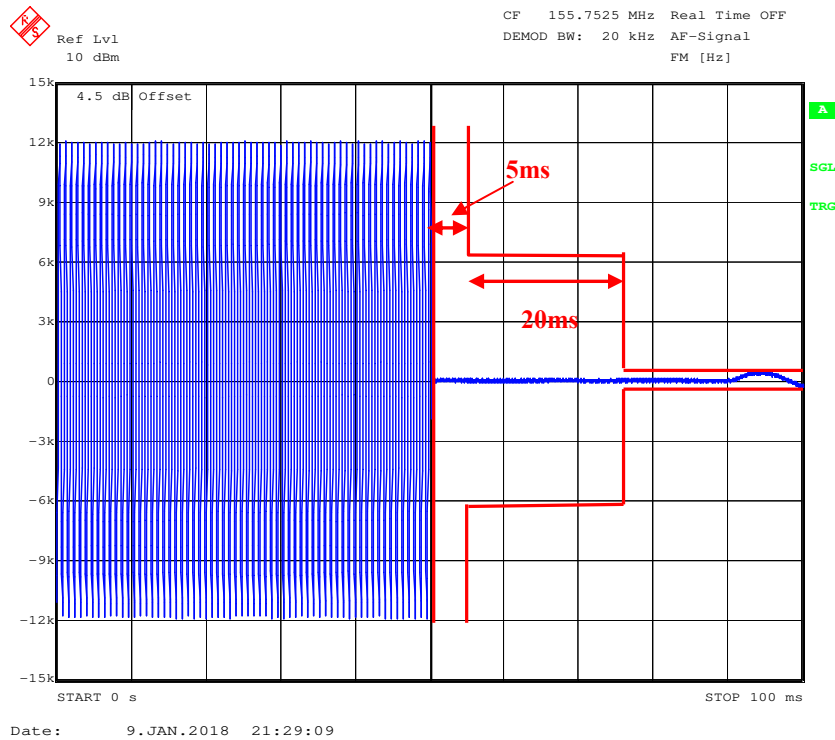

Turn off

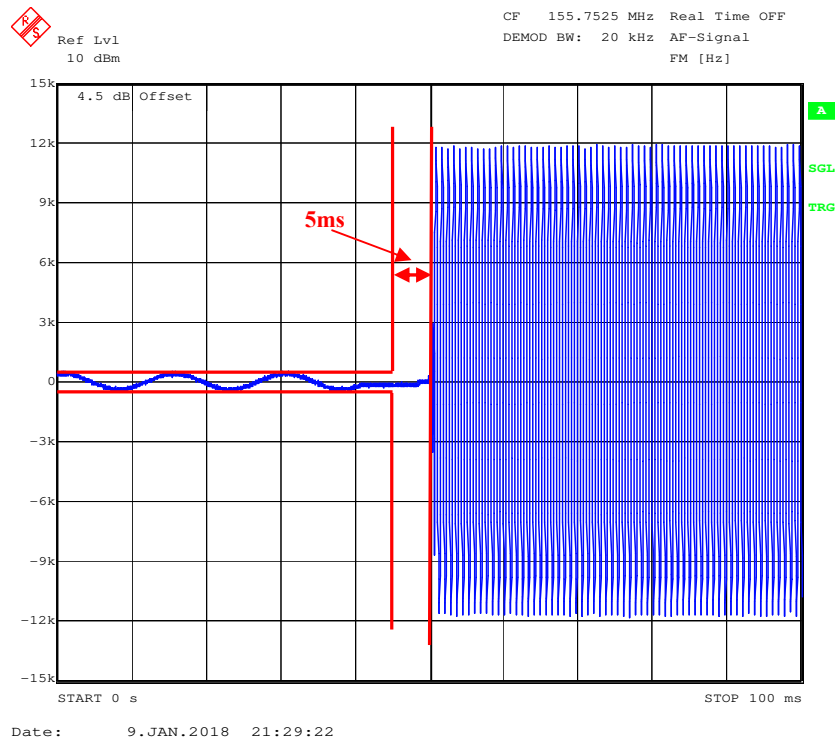

***** END OF REPORT *****