

Annex 2: Measurement diagrams to
TEST REPORT
 No.: 6-0461-14-3-1e

According to:

FCC Part 15.247
 RSS-247, Issue 1

for

Robert Bosch Car Multimedia GmbH

LCN2K70B10
 Radio Navigation System
 (Bluetooth 2.4GHz)

FCC ID: YBN-LCN2K70B10
IC: 9595A-LCN2K70B10
 PMN: Nissan LCN2Kai
 HVIN: LCN2K70B10

Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 FEDERAL COMMUNICATIONS COMMISSION USA MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 AUTHORIZED RF LABORATORY	 LAB CODE 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com			


Table of contents

1. CONDUCTED RF-MEASUREMENTS ON ANTENNA PORT.....	3
1.1. Conducted RF-power.....	3
1.2. 20-dB Bandwidth.....	8
1.3. Channel carrier frequency separation	13
1.4. 99% Occupied Bandwidth	14
1.5. Channel average Occupancy time and number of channels.....	17
1.6. 20dBc Emissions	25
2. CONDUCTED EMI MEASUREMENTS ON AC-MAINS PORT ACCORDING 15.207, CLASS B	45
3. RADIATED FIELD STRENGTH MEASUREMENTS ACCORD. §15.209&15.205.....	46
3.1. Magnetic field measurements $f < 30\text{MHz}$	46
3.2. Field strength measurements $30\text{MHz} < f < 1\text{GHz}$	49
3.3. Field strength measurements $f < 18\text{GHz}$	52
3.4. Field strength measurements $18\text{GHz} < f < 25\text{GHz}$	56
4. RADIATED BAND-EDGE MEASUREMENTS ACCORD. §15.209 & §15.205 (§15.247)	59
4.1. Channel 0 (left band edge).....	59
4.2. Channel 78 (right band edge).....	61
5. MPE CALCULATION.....	63


1. Conducted RF-measurements on antenna port

1.1. Conducted RF-power


1.1.1. DH5, channel 0, 39, 78

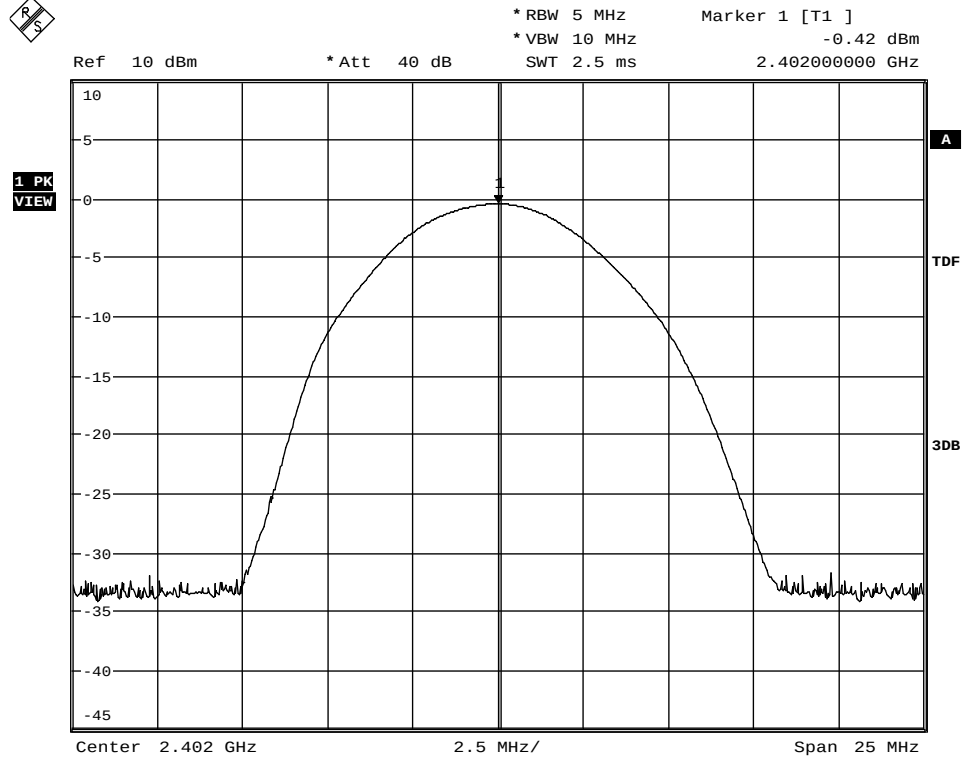


Date: 15.APR.2015 12:20:28

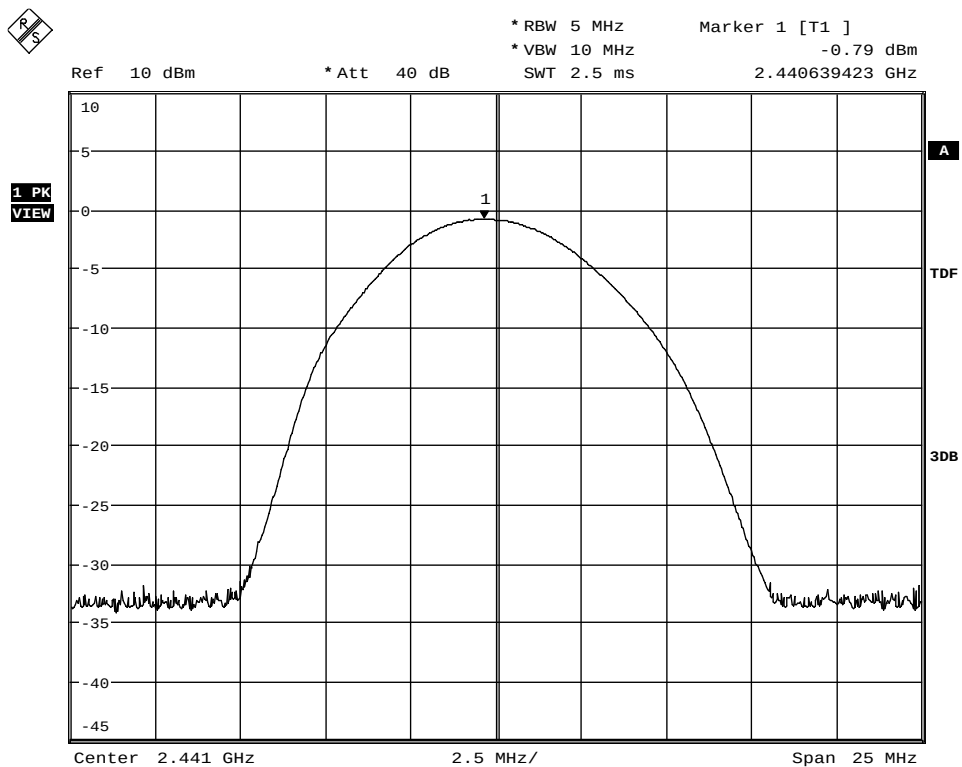


Date: 15.APR.2015 12:18:47

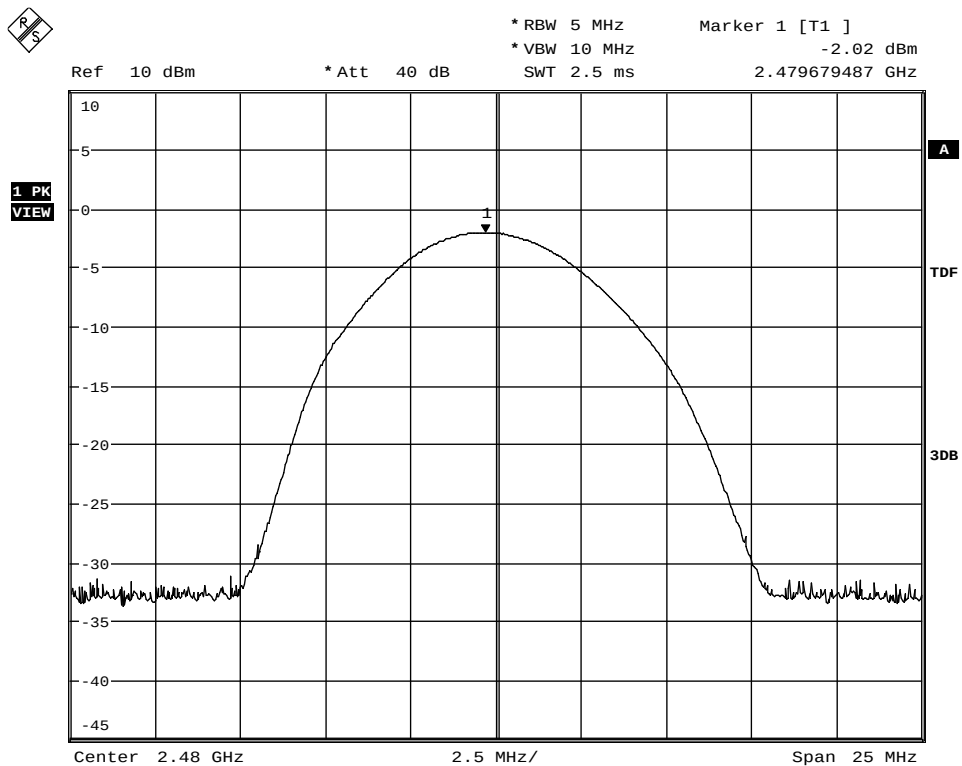


Date: 15.APR.2015 12:05:26

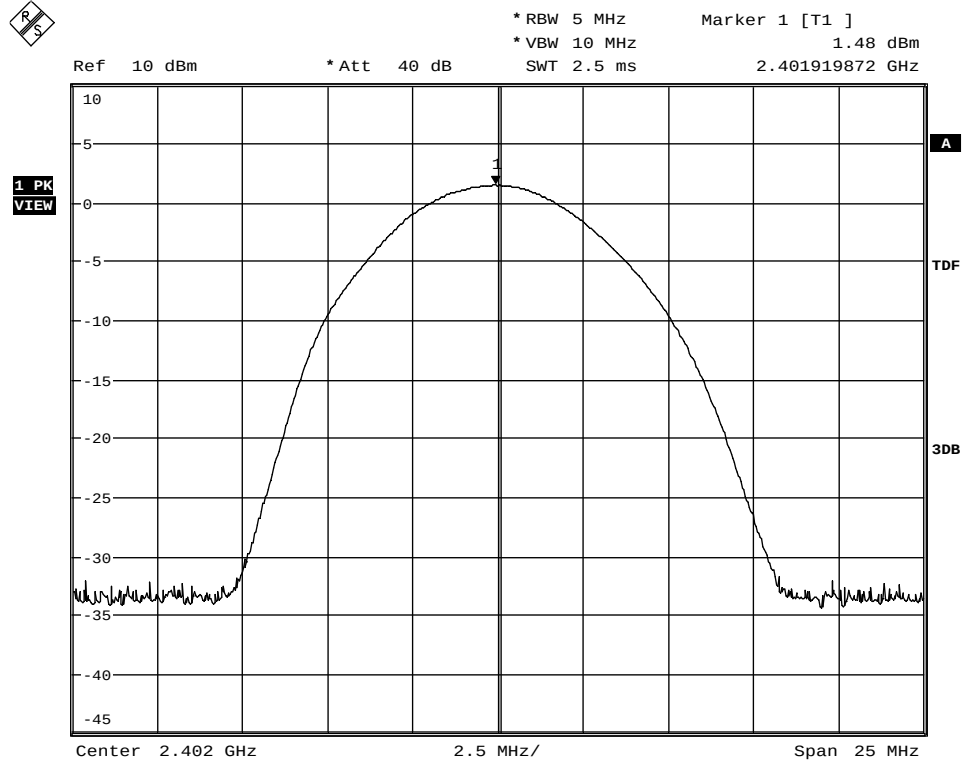1.1.2. 2DH5, channel 0, 39, 78

Date: 15.APR.2015 12:15:02

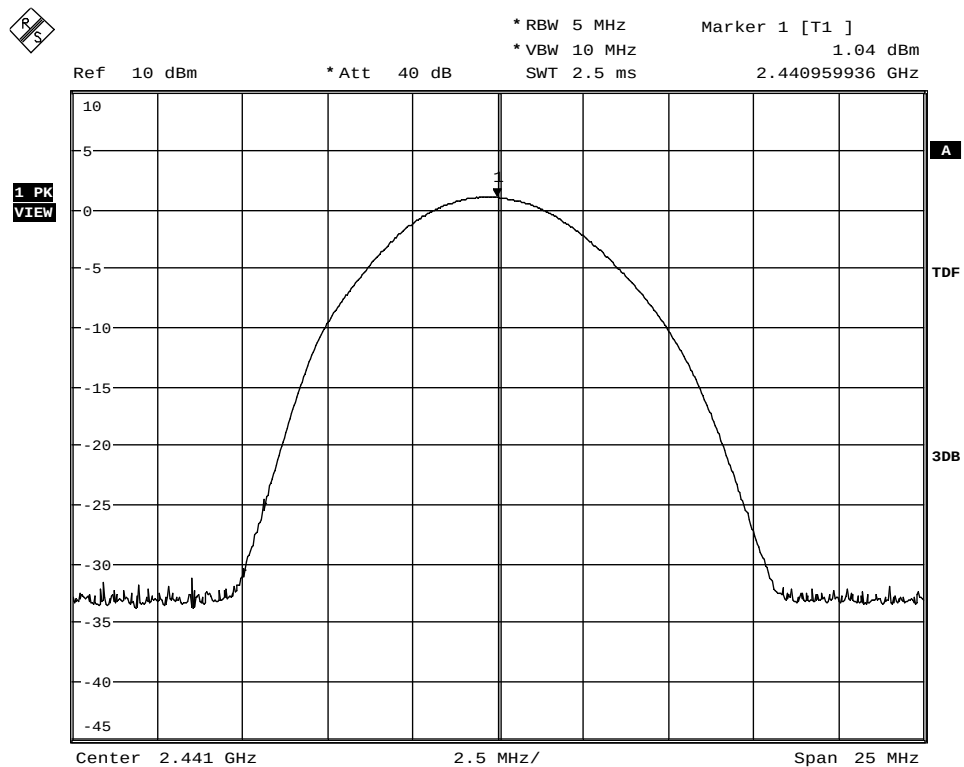

Date: 15.APR.2015 12:17:16



Ref 10 dBm *Att 40 dB *RBW 5 MHz *VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 1.83 dBm 2.401799679 GHz


1 PK VIEW

TDF


3DB

Center 2.402 GHz 2.5 MHz/ Span 25 MHz

TR6-0461-14-3-1e-A2

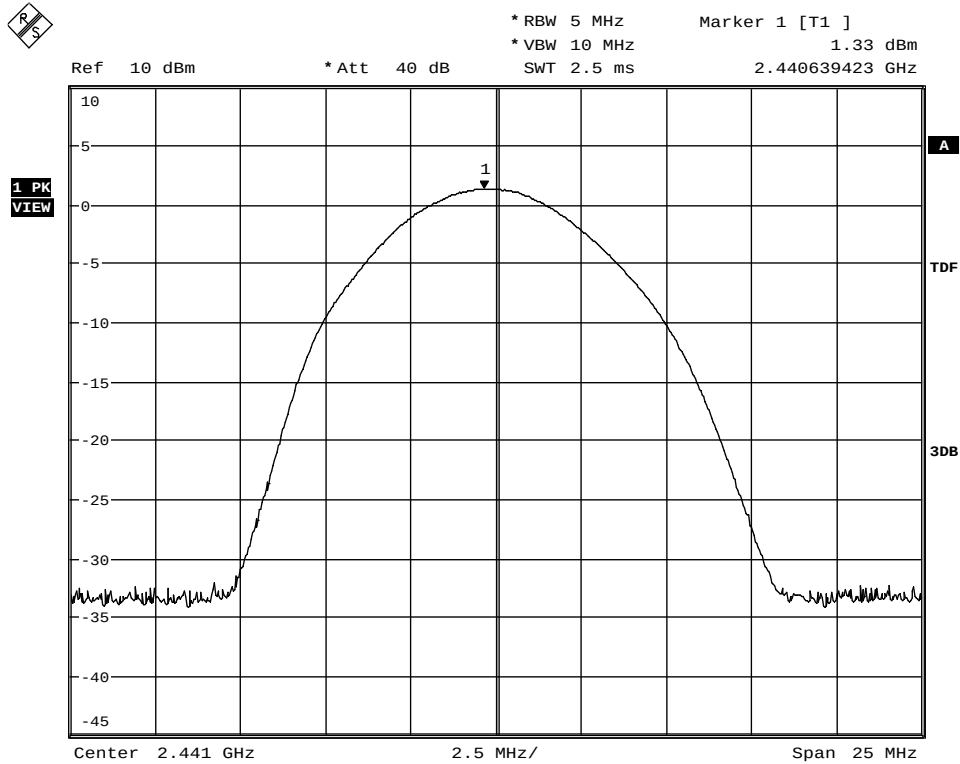


Date: 15.APR.2015 12:12:02

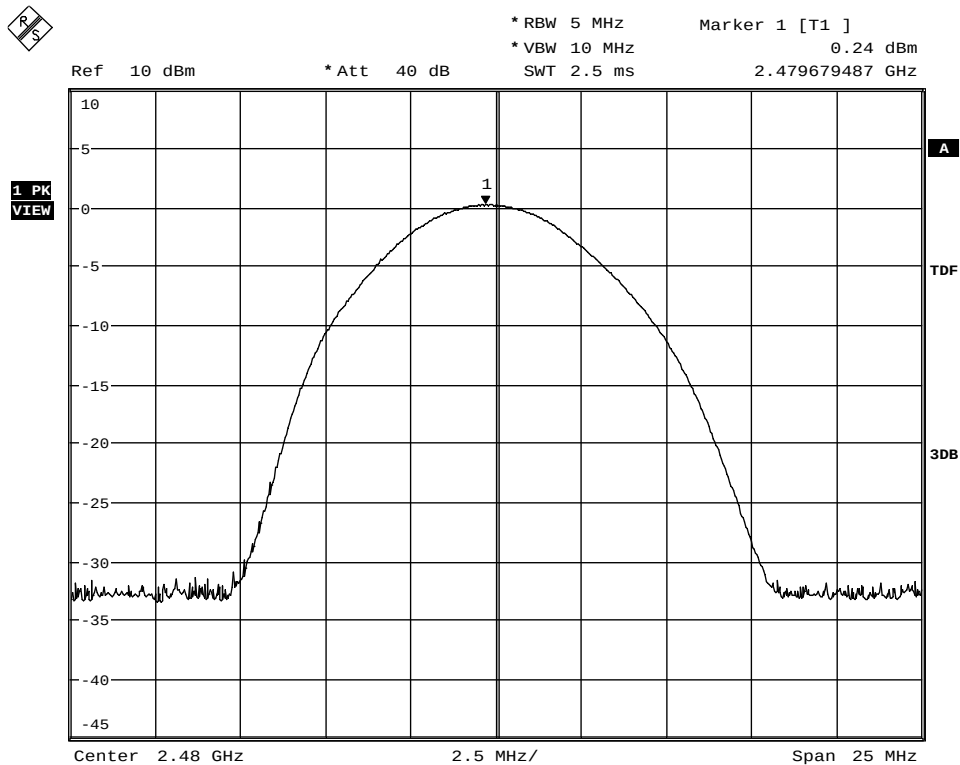


Date: 15.APR.2015 12:13:34

1.2. 20-dB Bandwidth


1.2.1. DH5, channel 0, 39, 78

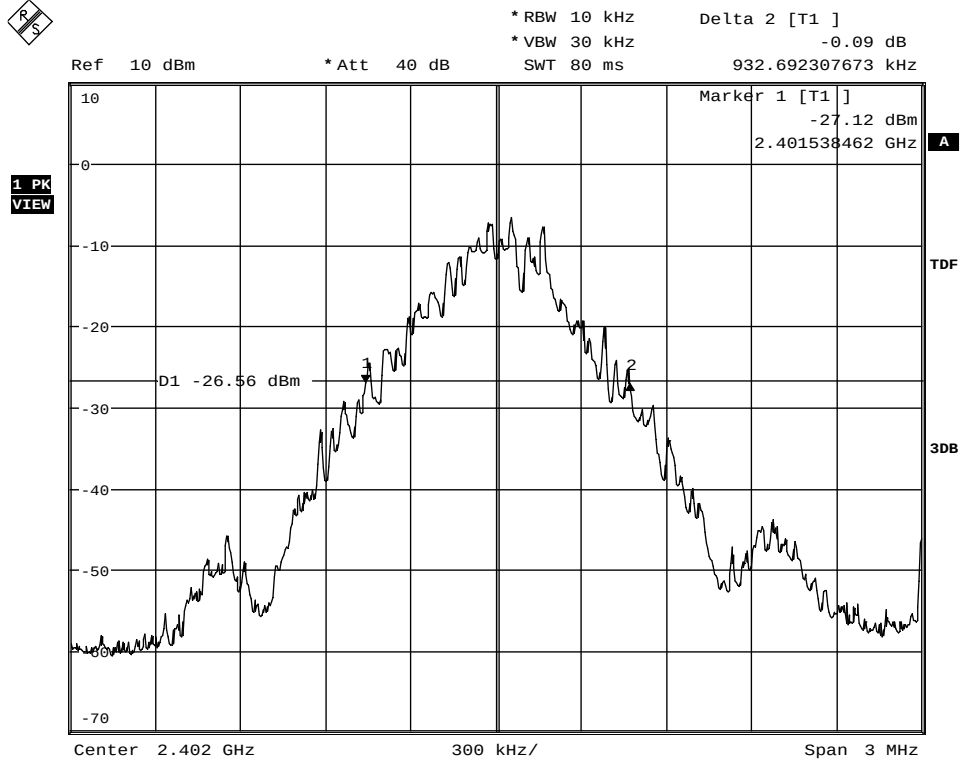


Date: 15.APR.2015 12:27:40

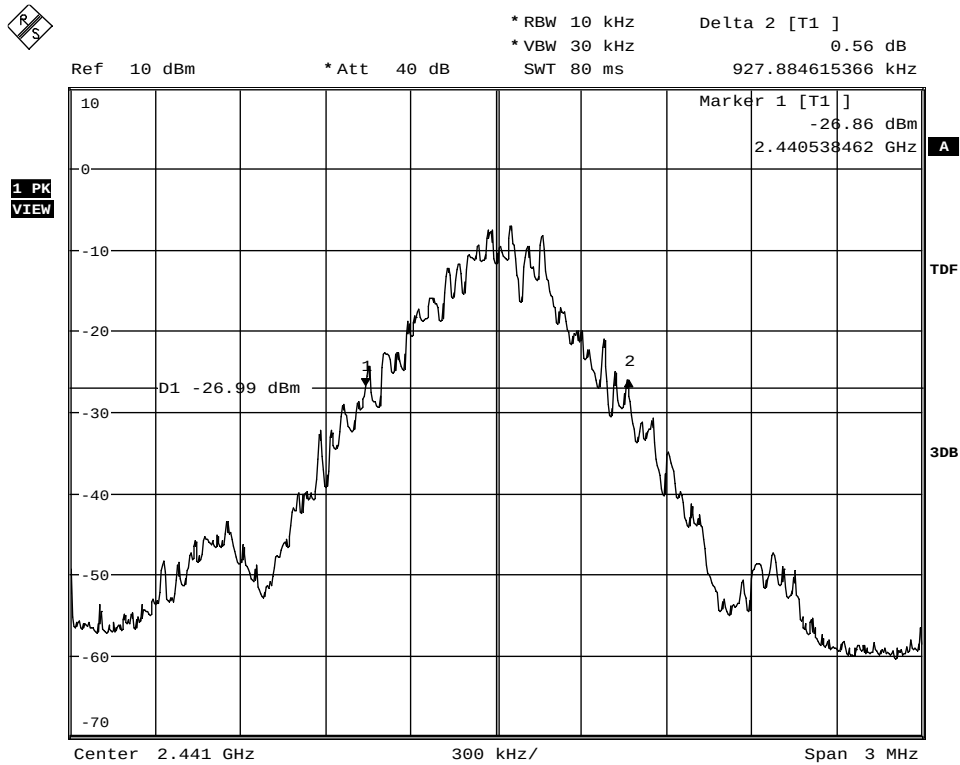


Date: 15.APR.2015 12:34:17

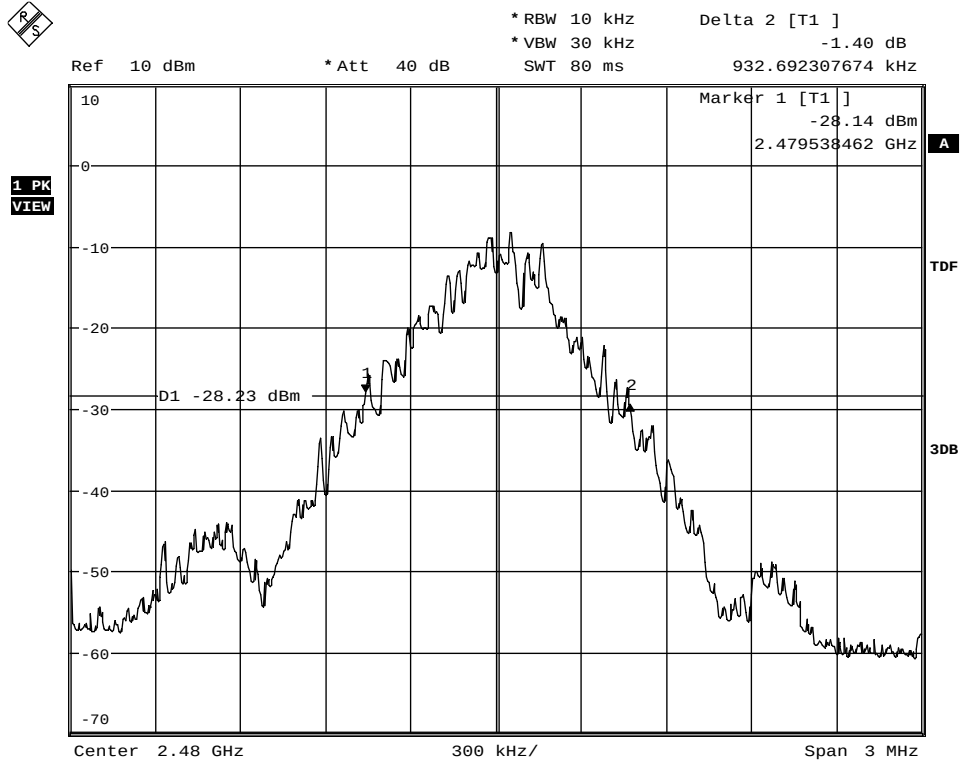


Date: 15.APR.2015 12:23:33

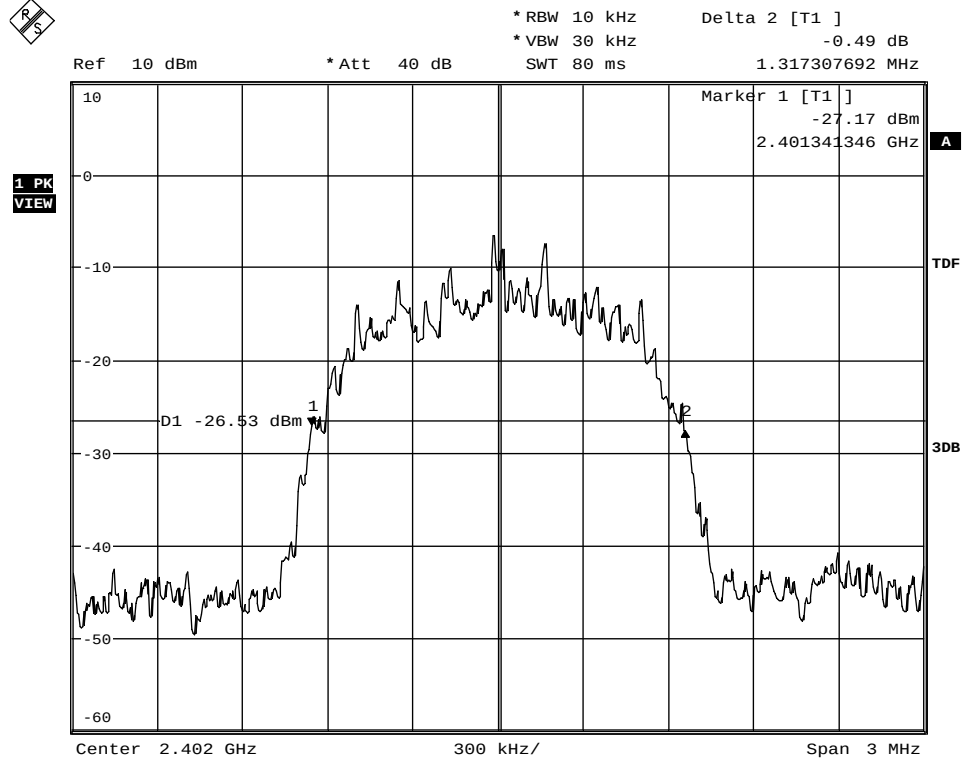1.2.2. 2DH5, channel 0, 39, 78

Date: 15.APR.2015 12:55:29

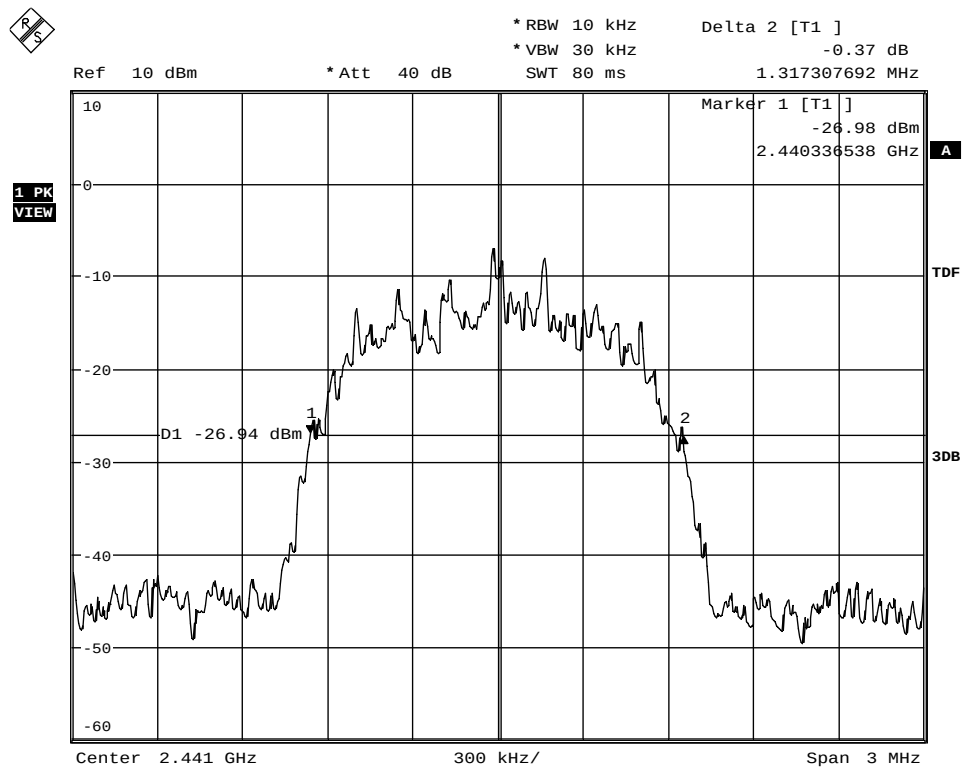


Date: 15.APR.2015 13:00:28

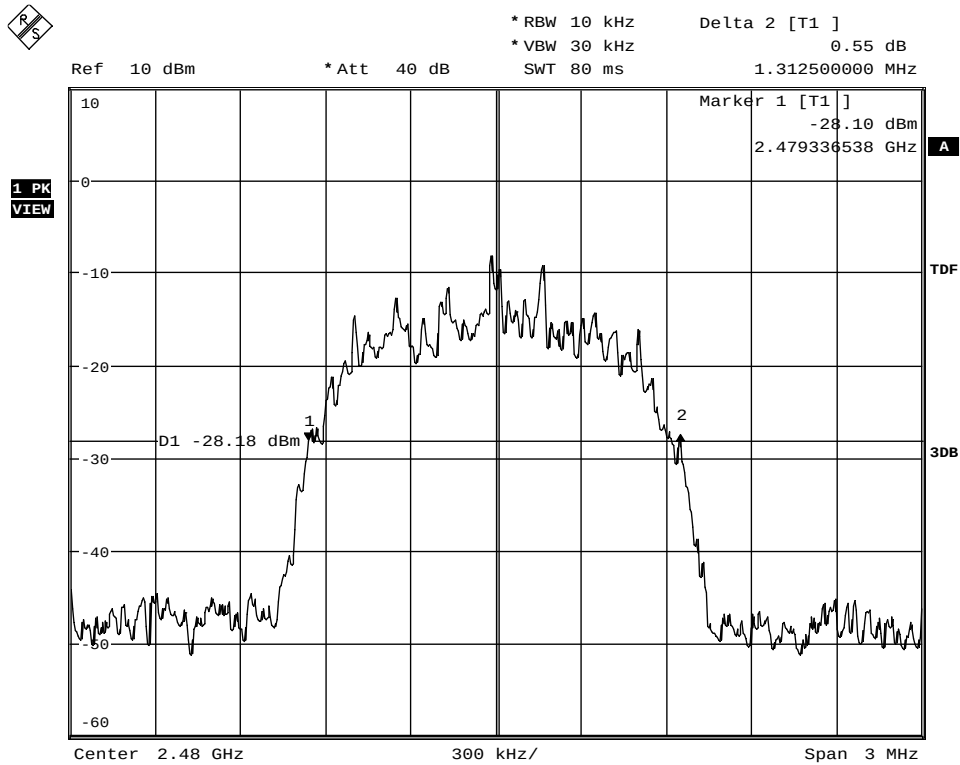


Date: 15.APR.2015 12:50:37


1.2.3. 3DH5, channel 0, 39, 78

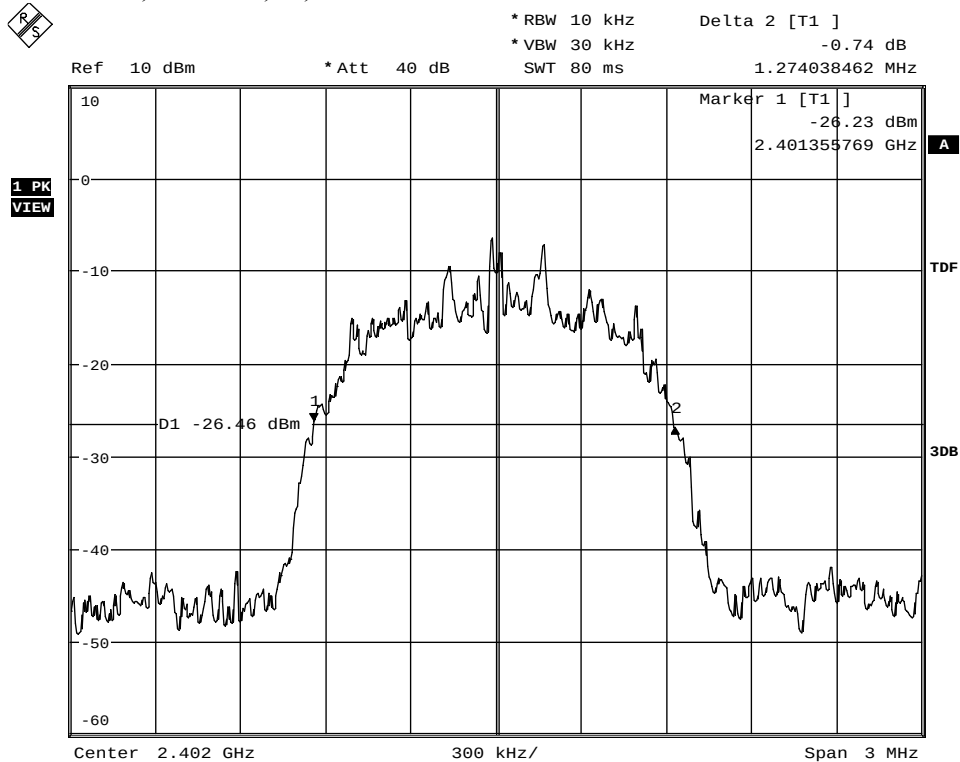

Date: 15.APR.2015 12:38:34

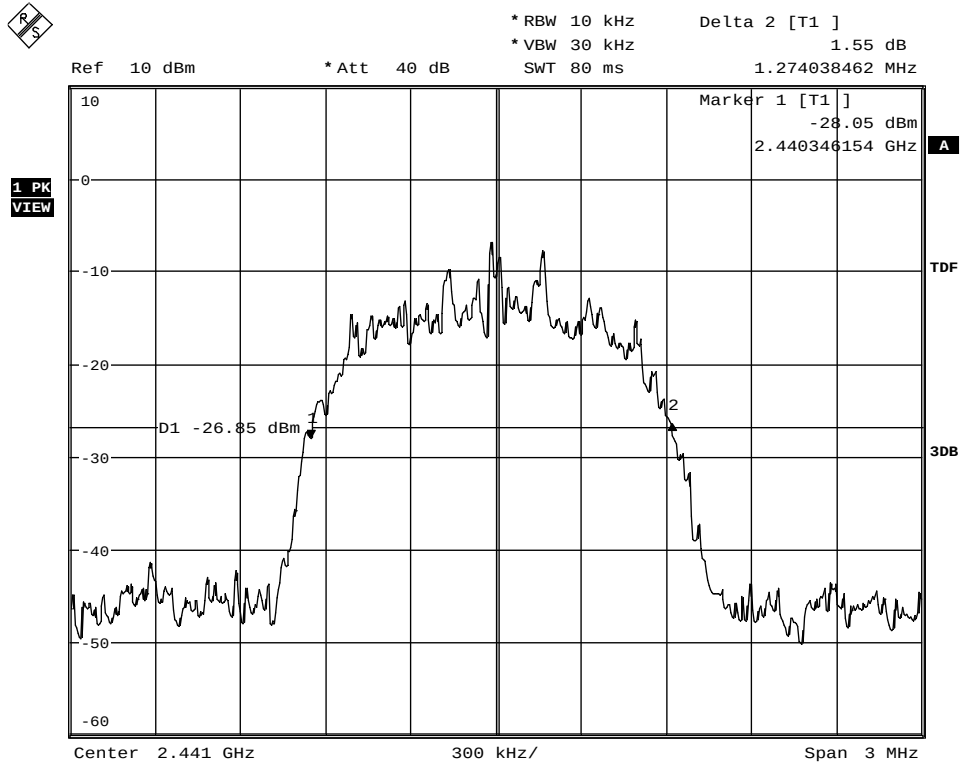


Date: 15.APR.2015 12:43:10

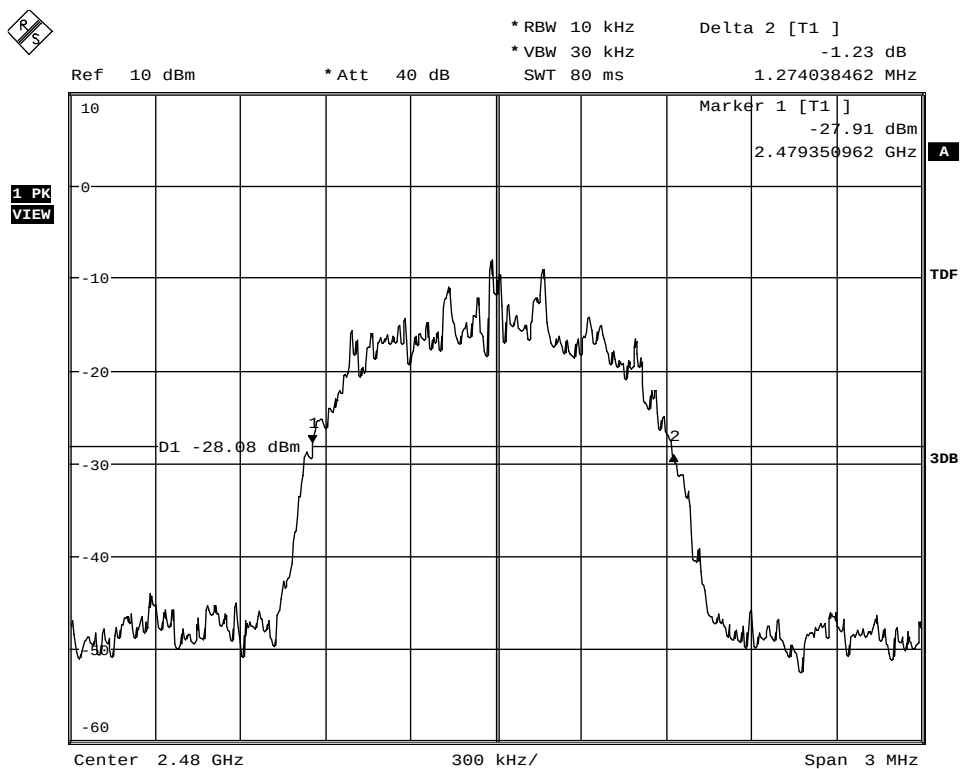


Date: 15.APR.2015 12:46:52

1.3. Channel carrier frequency separation

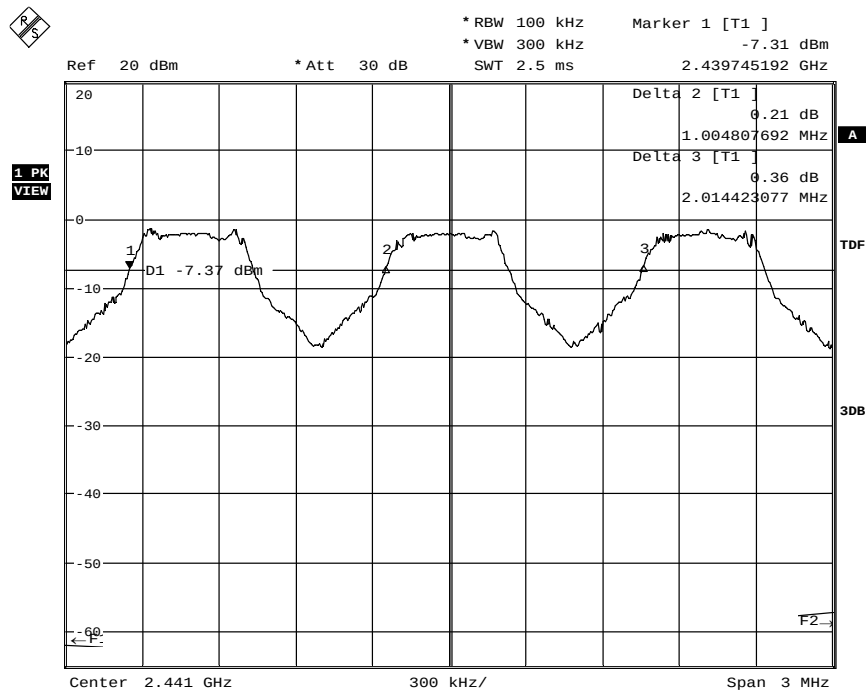

Date: 15.APR.2015 15:45:05

DH5 Packet type

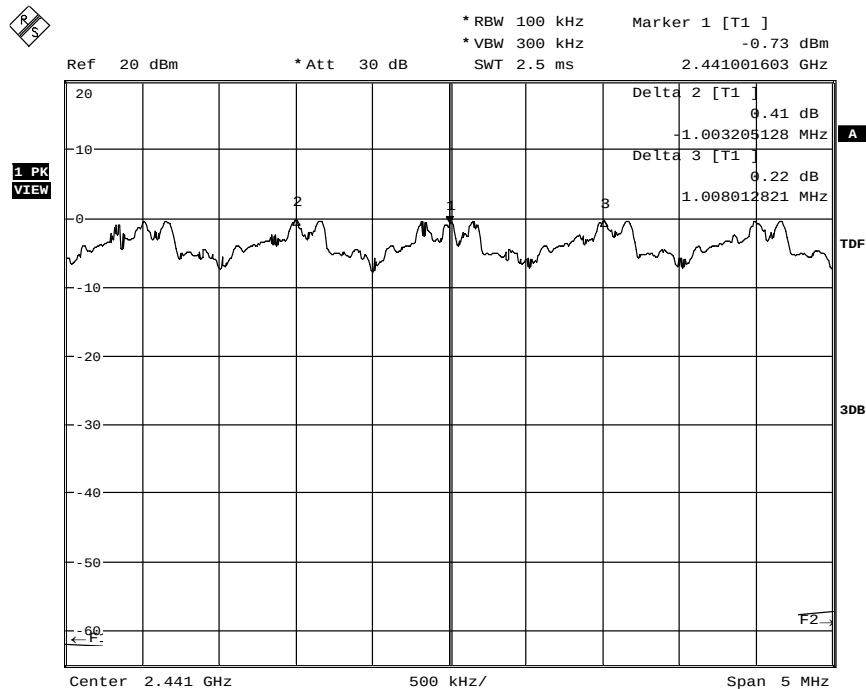


Date: 15.APR.2015 16:01:53


3DH5 packet type

1.4. 99% Occupied Bandwidth

1.4.1. Channel 0

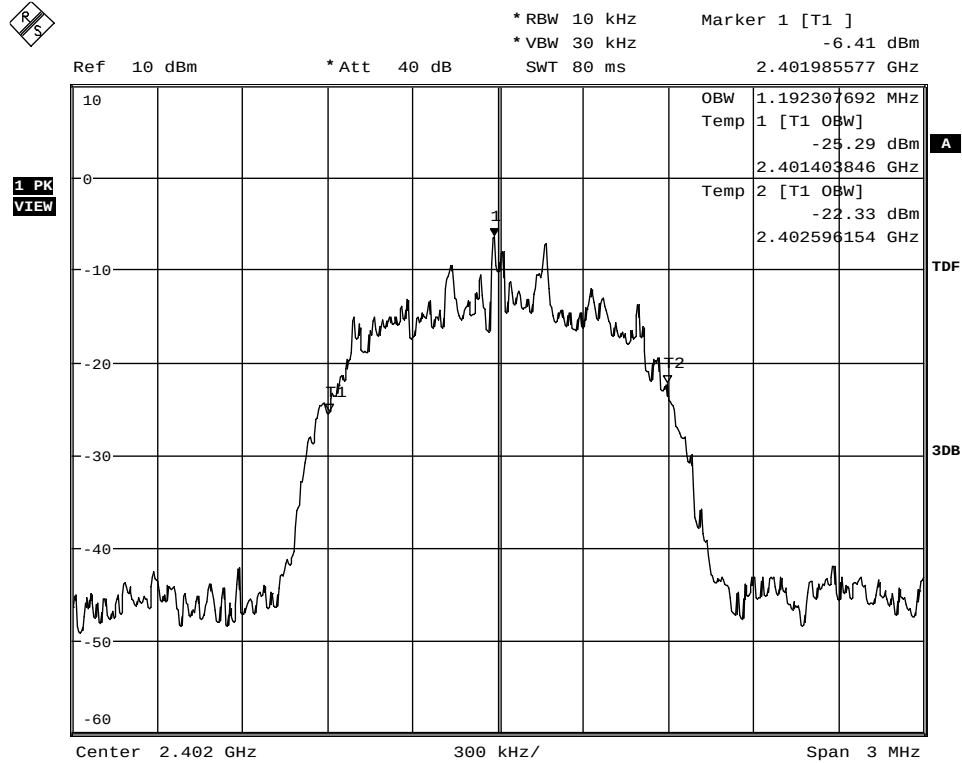


Date: 15.APR.2015 13:35:11

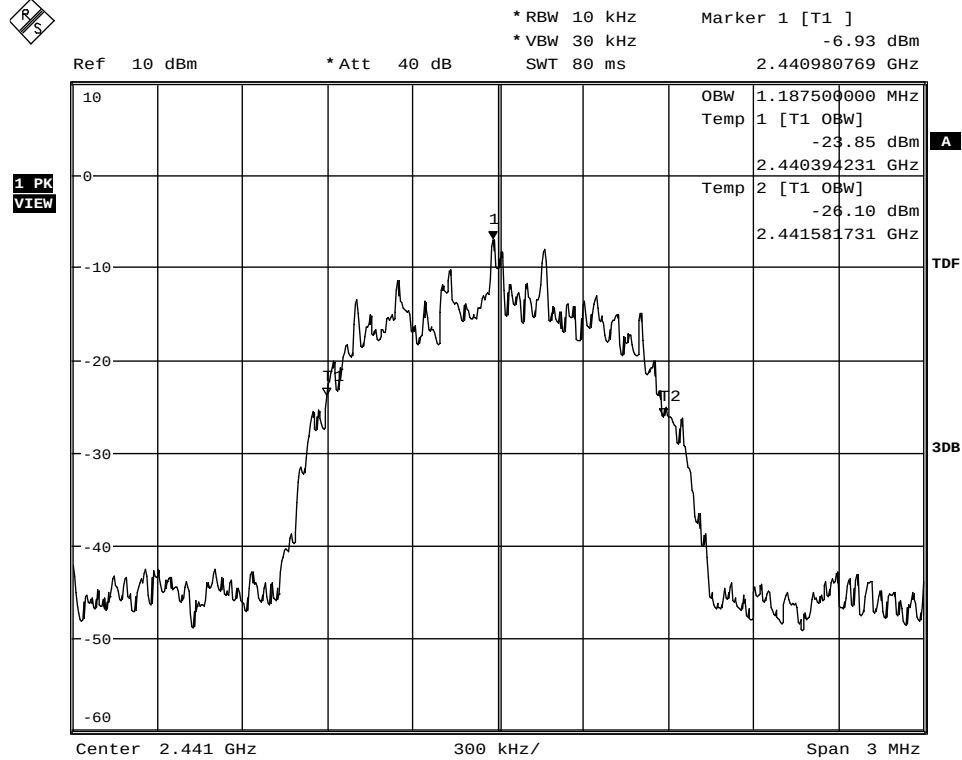1.4.2. Channel 39

Date: 15.APR.2015 13:24:59


1.4.3. Channel 78

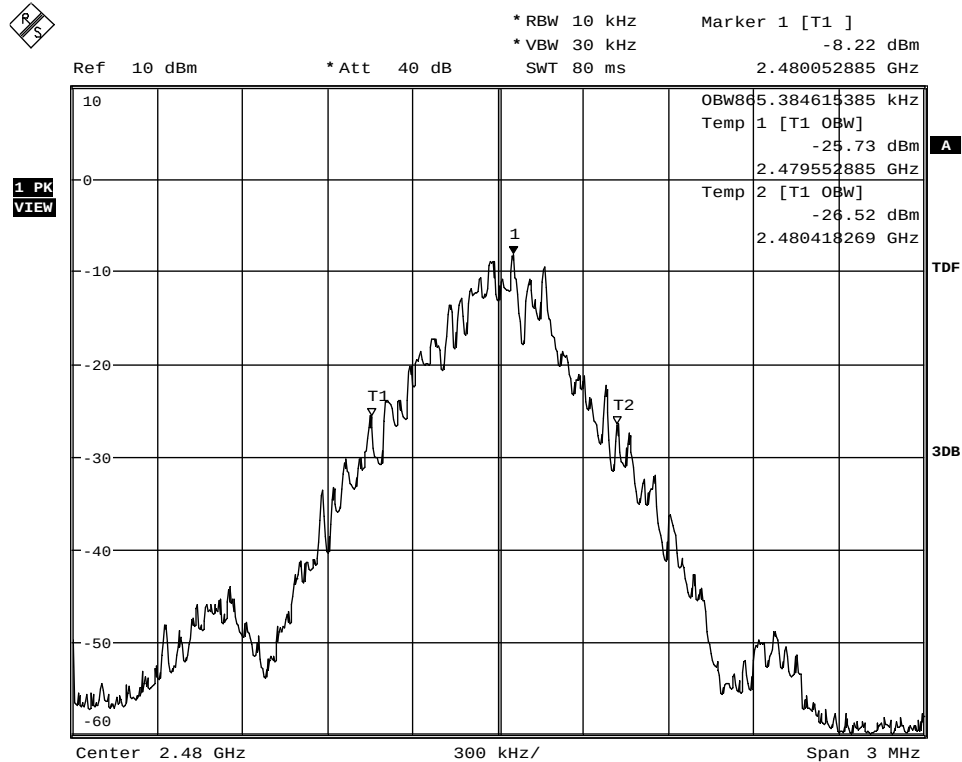

Date: 15.APR.2015 13:29:51


1.5. Channel average Occupancy time and number of channels

1.5.1. DH1

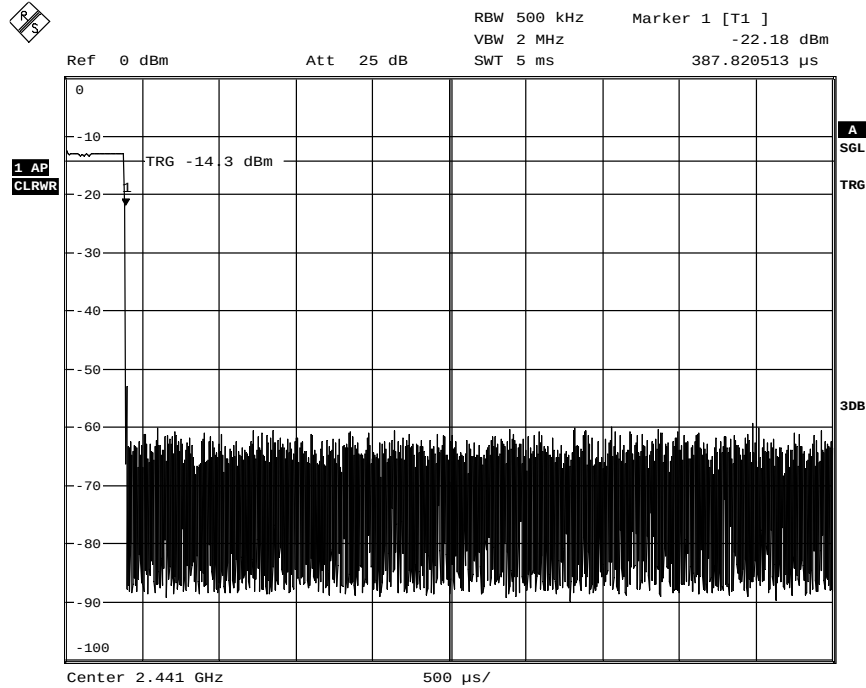


Date: 13.MAY.2015 14:24:54

1.5.2. DH3

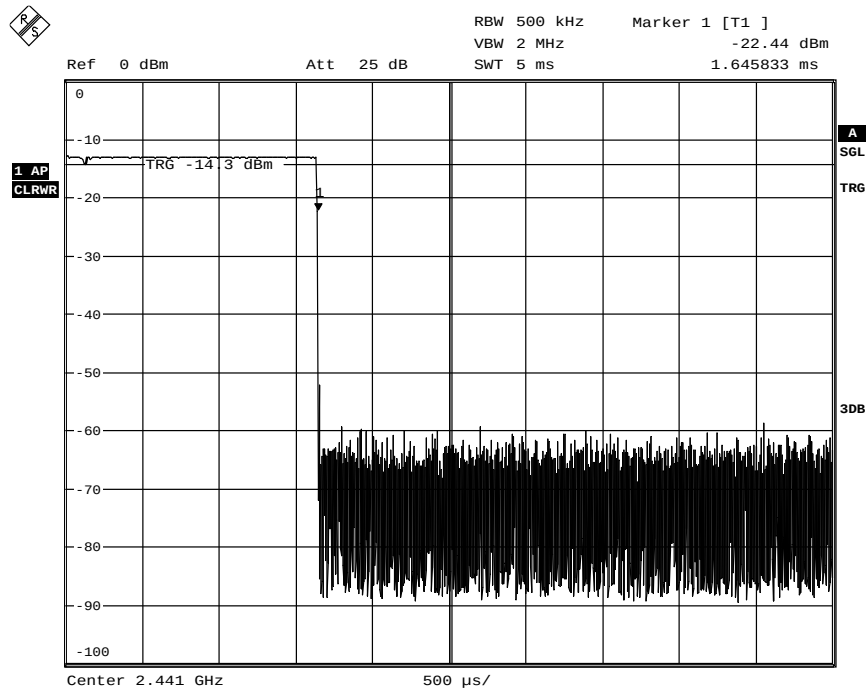


Date: 13.MAY.2015 14:26:02

1.5.3. DH5

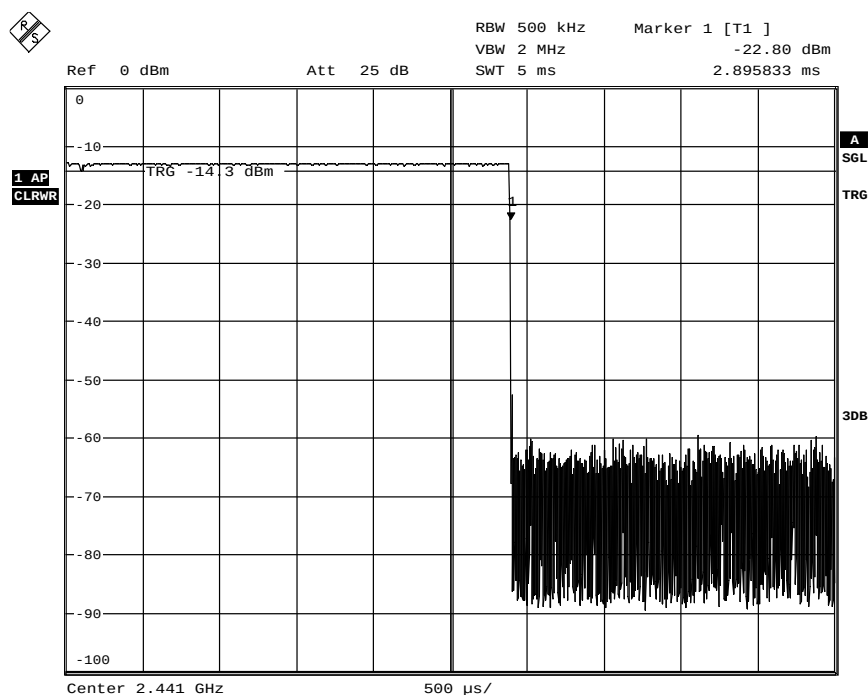


Date: 13.MAY.2015 14:26:33

1.5.4. 2DH1

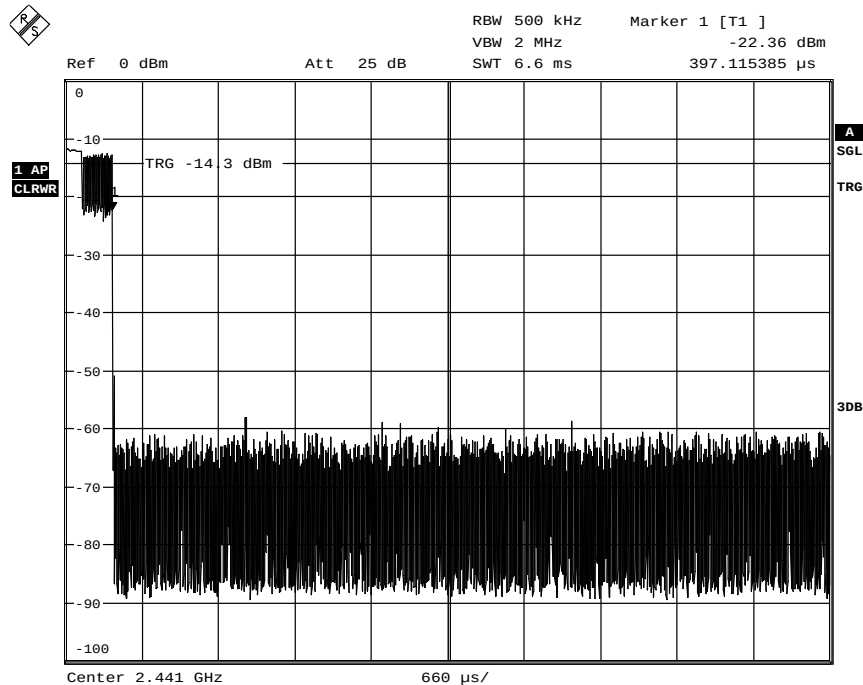


Date: 13.MAY.2015 14:29:58

1.5.5. 2DH3

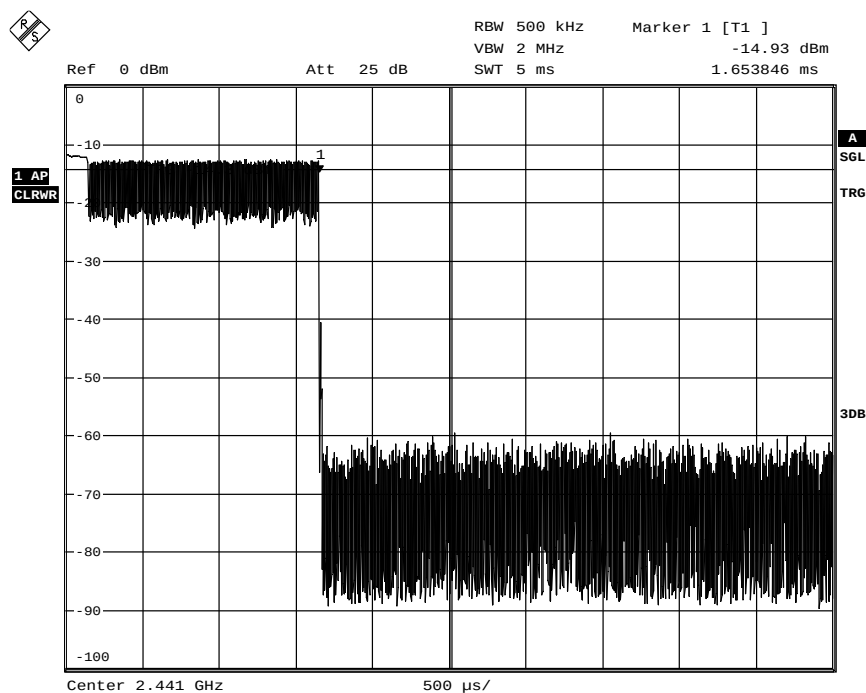


Date: 13.MAY.2015 14:29:17


1.5.6. 2DH5

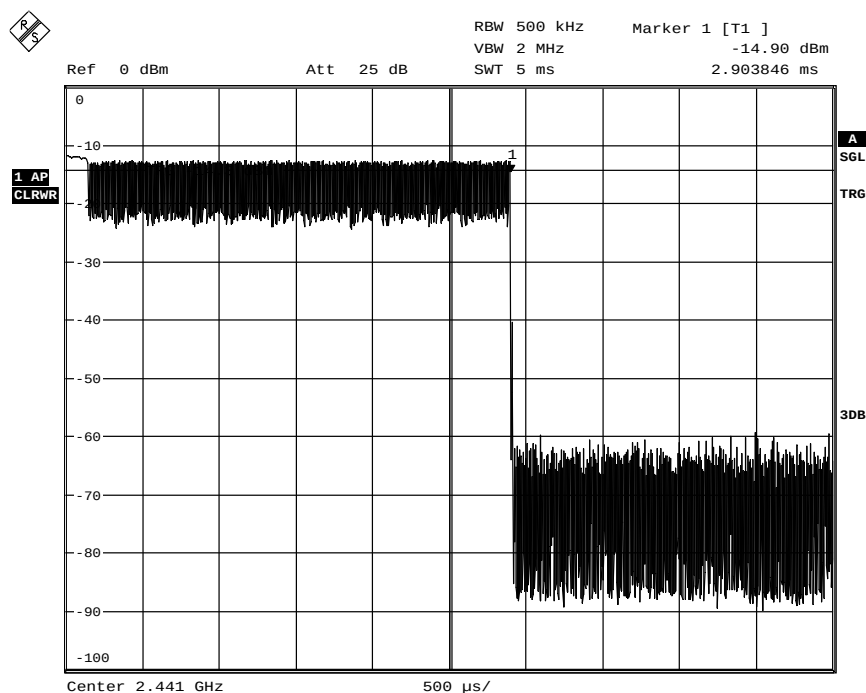


Date: 13.MAY.2015 14:28:48

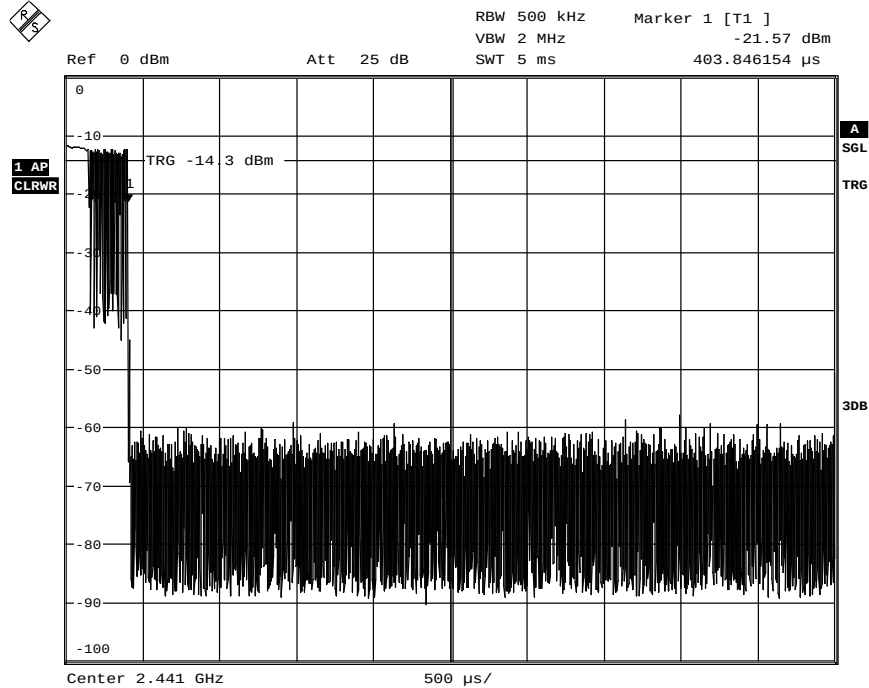1.5.7. 3DH1


Date: 13.MAY.2015 14:28:19

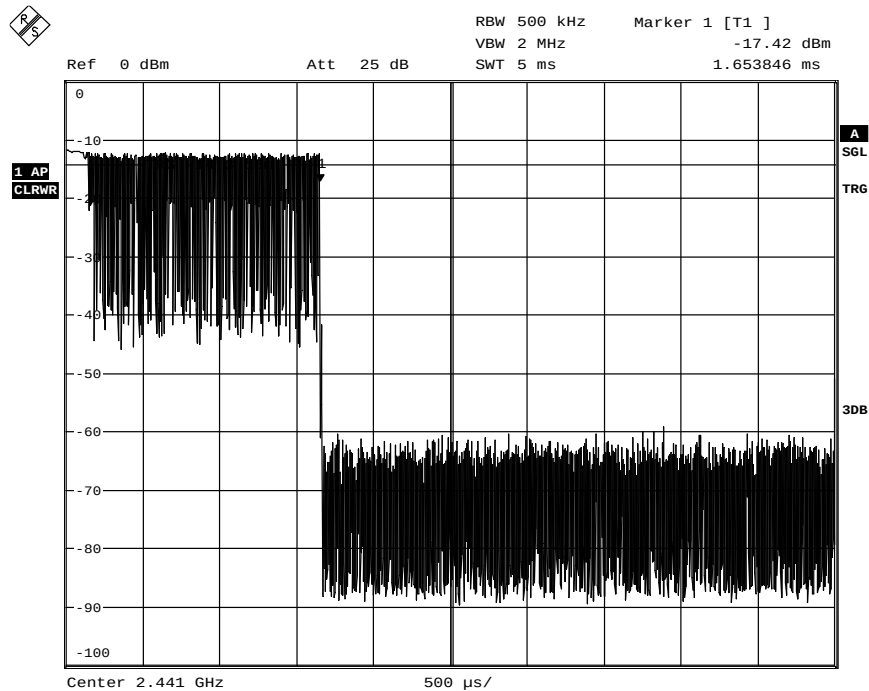1.5.8. 3DH3


Date: 13.MAY.2015 14:27:53

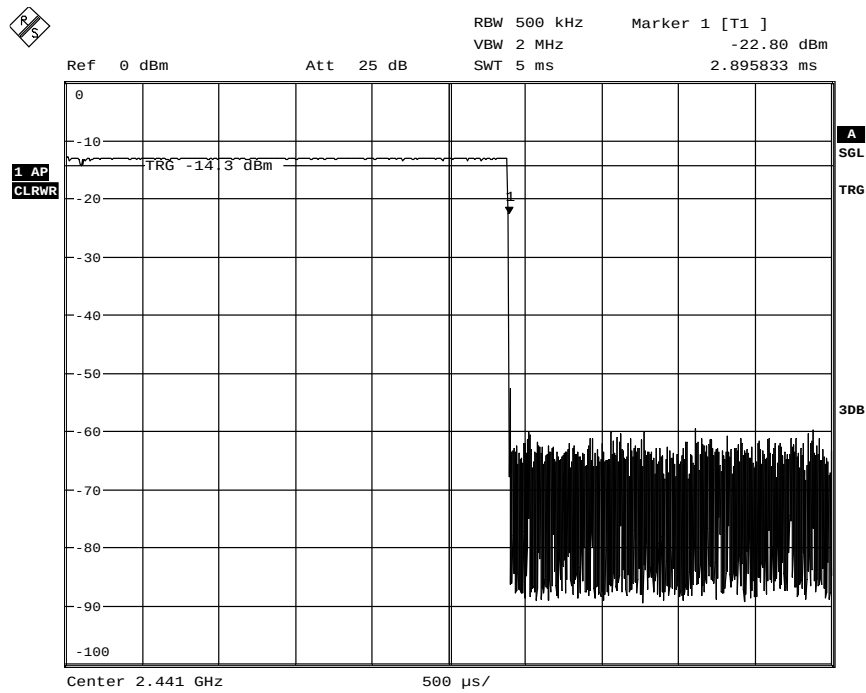1.5.9. 3DH5


Date: 13.MAY.2015 14:26:33

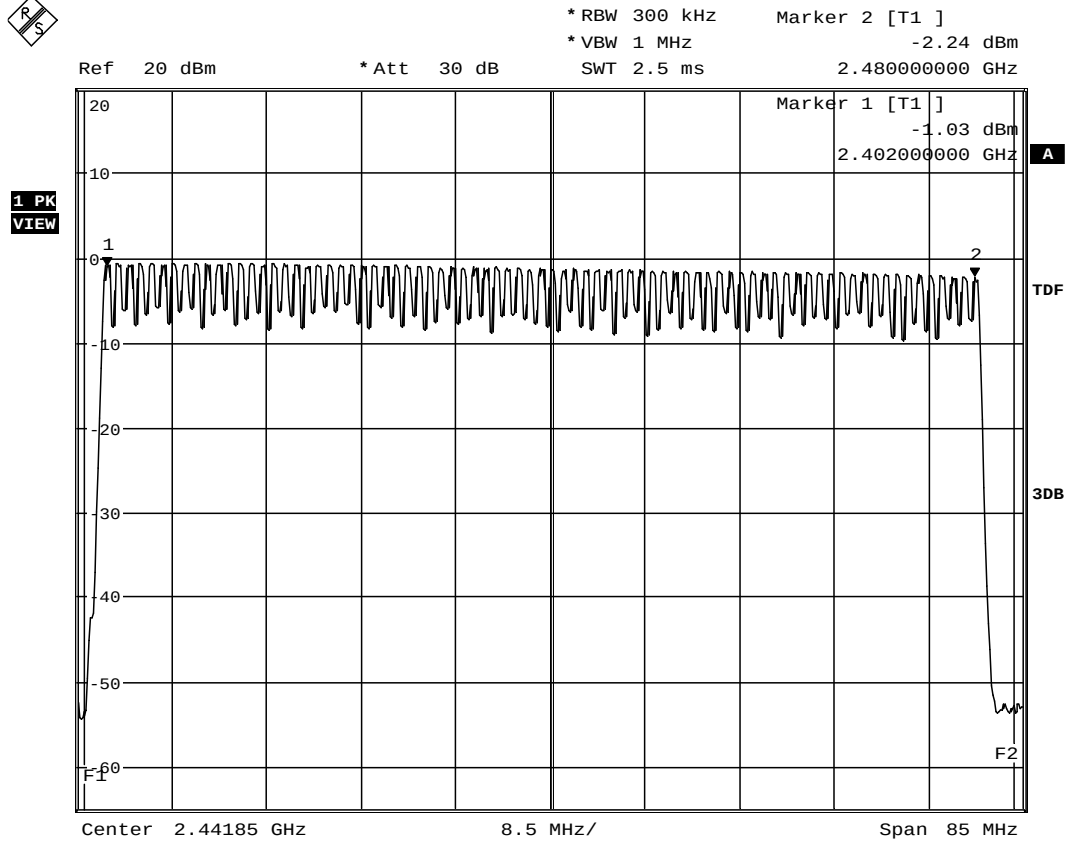1.5.10. DH5

Date: 15.APR.2015 15:38:23

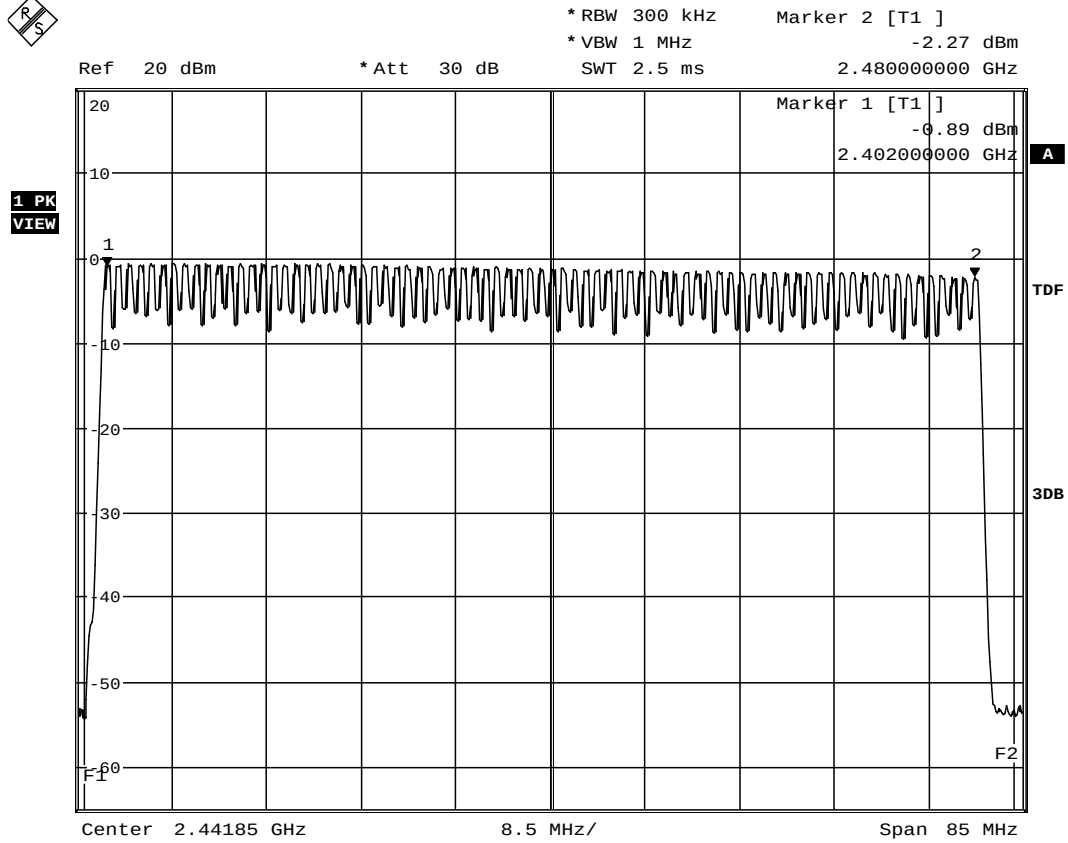1.5.11. 2DH5

Date: 15.APR.2015 15:35:38

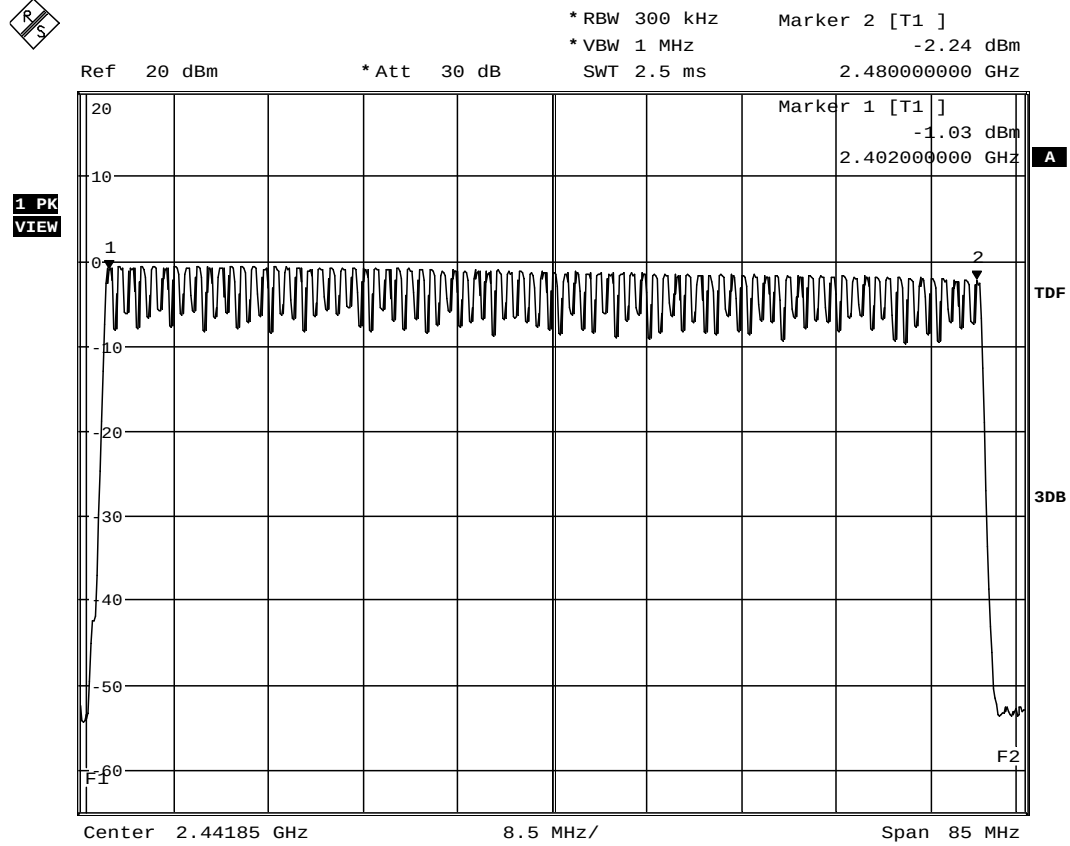
1.5.12. 3DH5

Date: 15.APR.2015 15:38:23

1.6. 20dBc Emissions


1.6.1. DH5

1.6.1.1. Channel 0 Reference

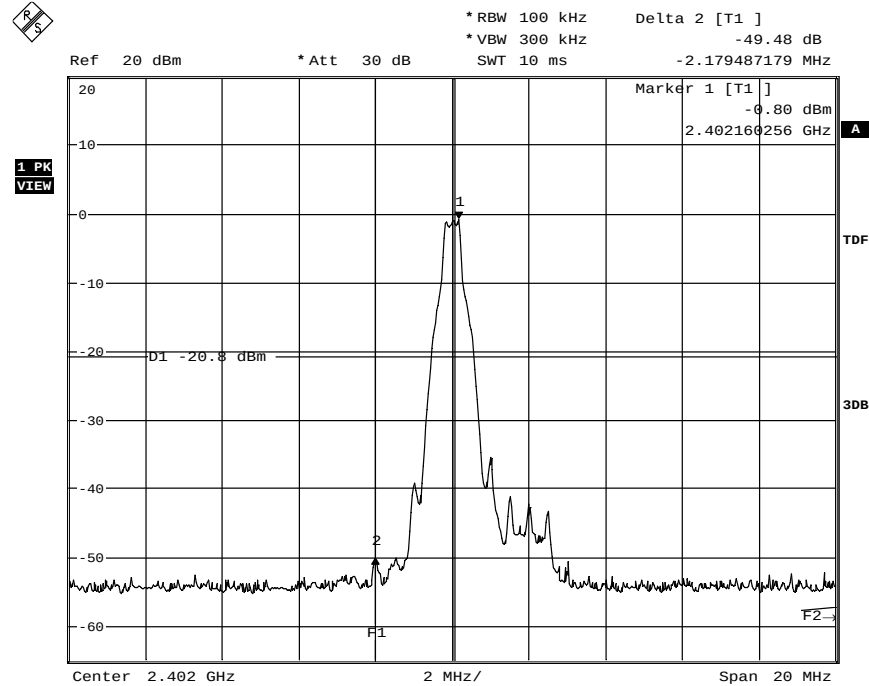


Date: 15.APR.2015 15:01:43

1.6.1.2. Sweep 1: 150kHz to 30MHz

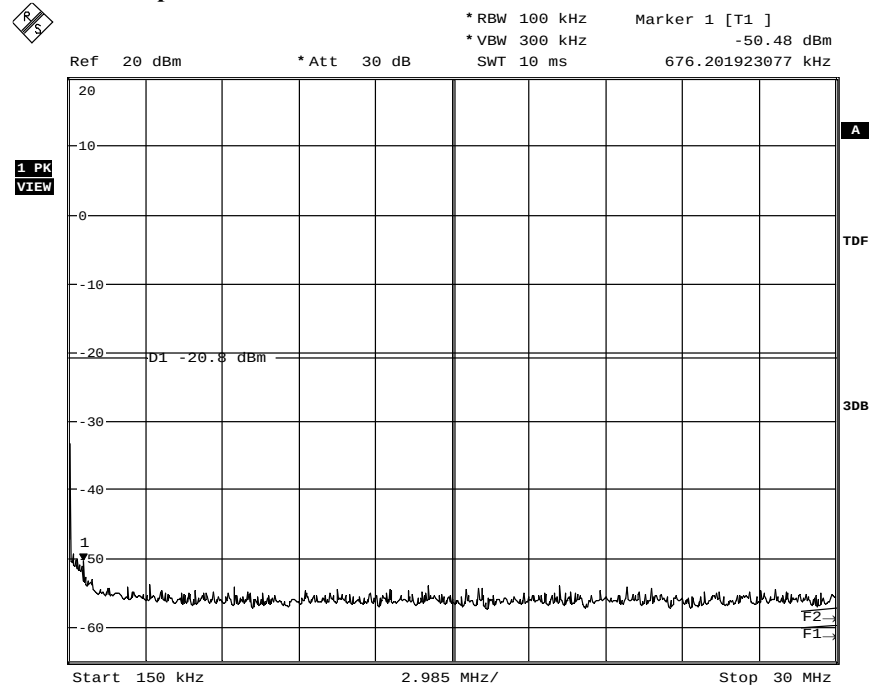


Date: 15.APR.2015 15:05:53

1.6.1.3. Sweep 2: 30MHz to 2.8GHz

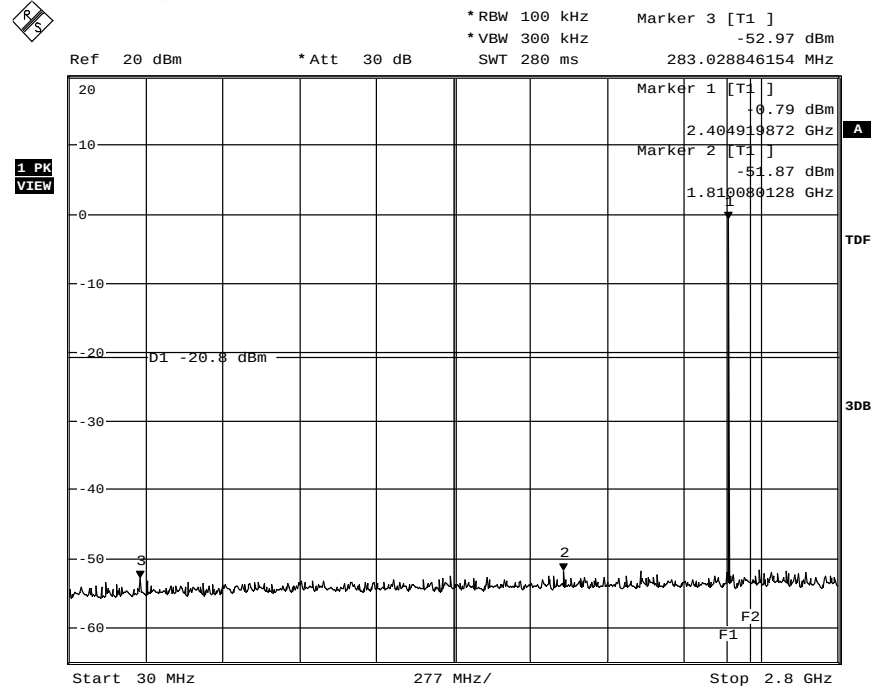


Date: 15.APR.2015 15:09:45

1.6.1.4. Sweep 2: 2.8GHz to 25GHz

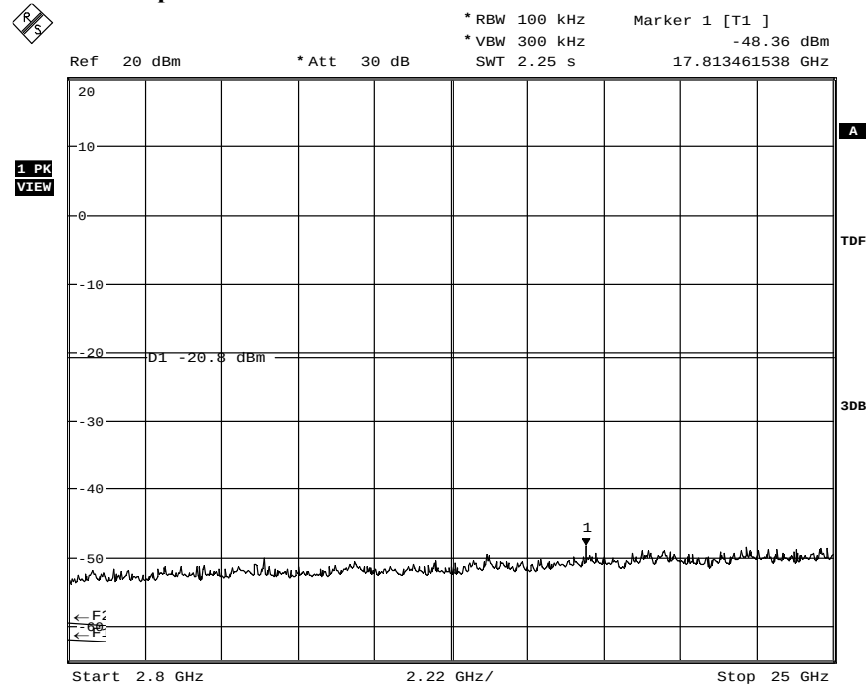


Date: 15.APR.2015 15:14:53

1.6.1.5. Sweep Band-Edge left at 2.4GHz

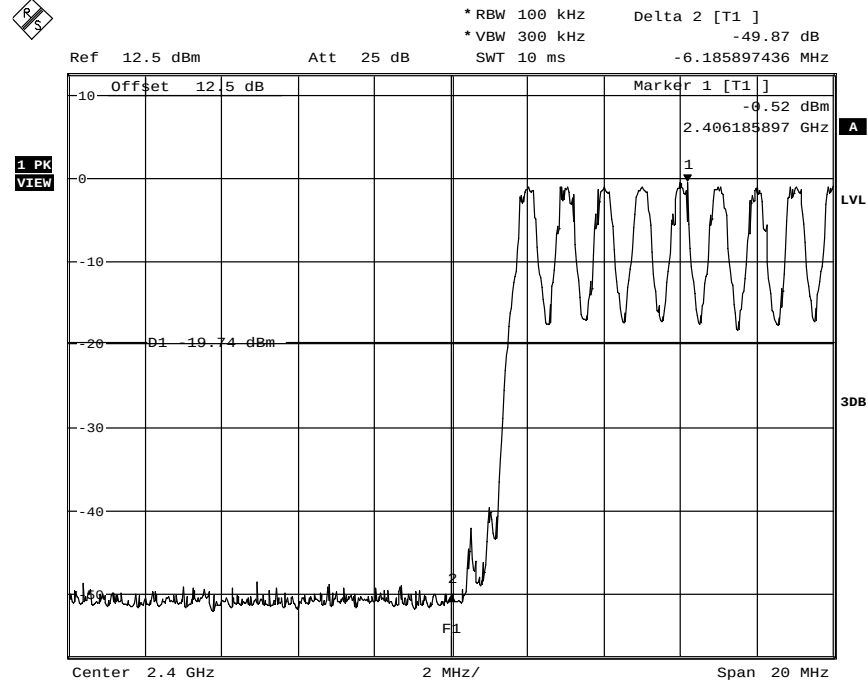


Date: 13.MAY.2015 14:44:49


1.6.1.6. Channel 39 Reference

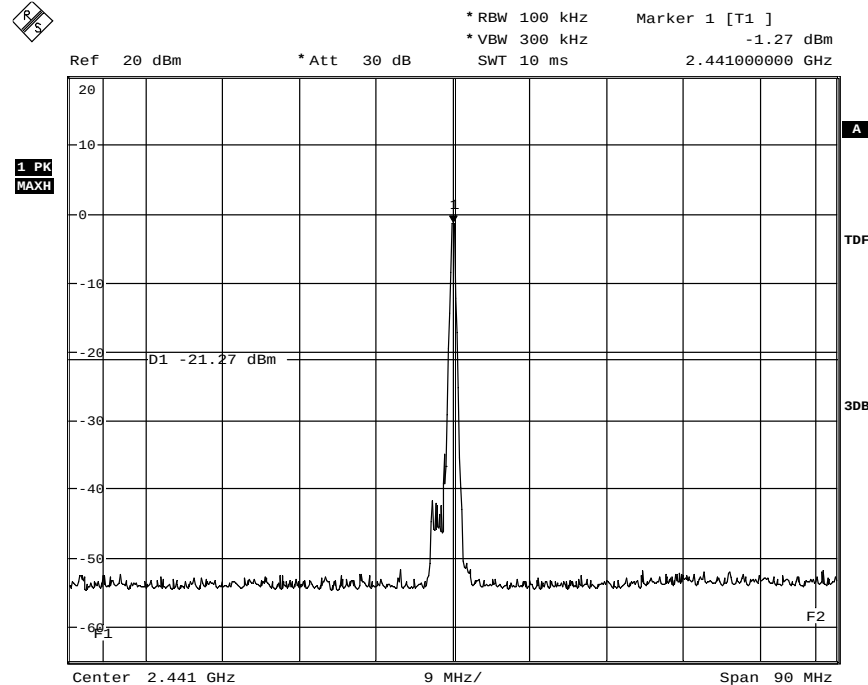


Date: 15.APR.2015 14:50:41

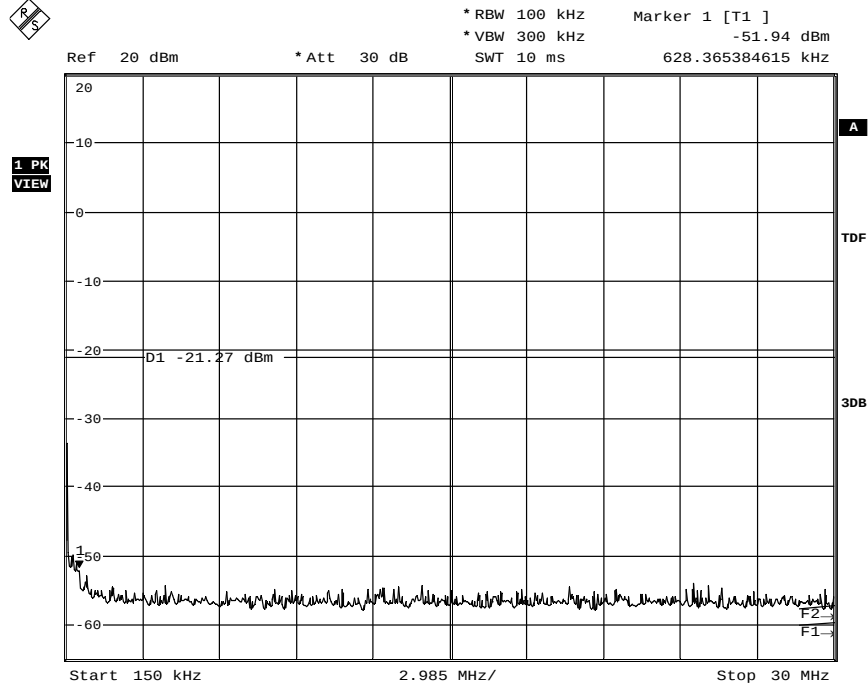1.6.1.7. Sweep 1: 150kHz to 30MHz


Date: 15.APR.2015 14:52:41

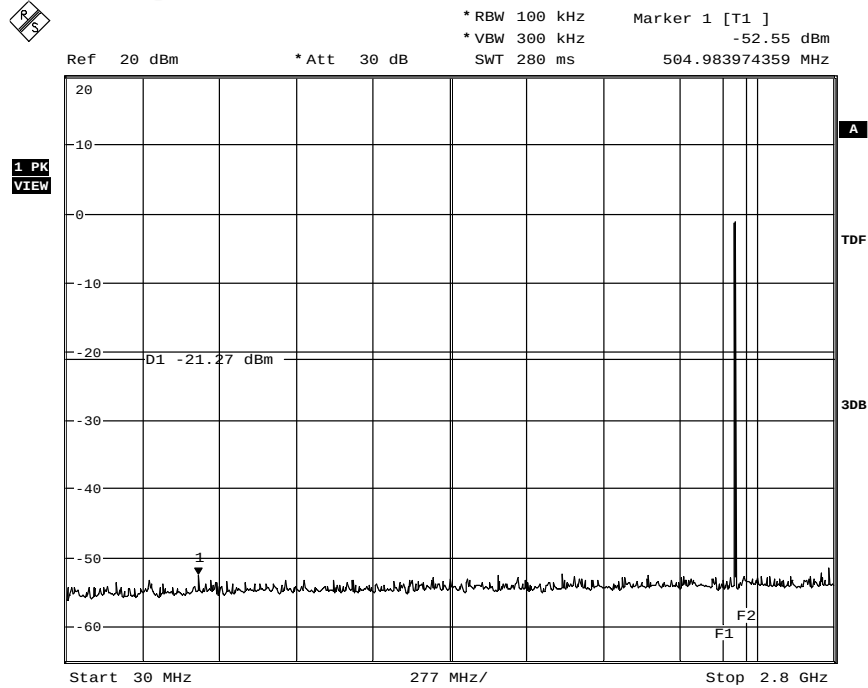1.6.1.8. Sweep 2: 30MHz to 2.8GHz


Date: 15.APR.2015 14:54:36

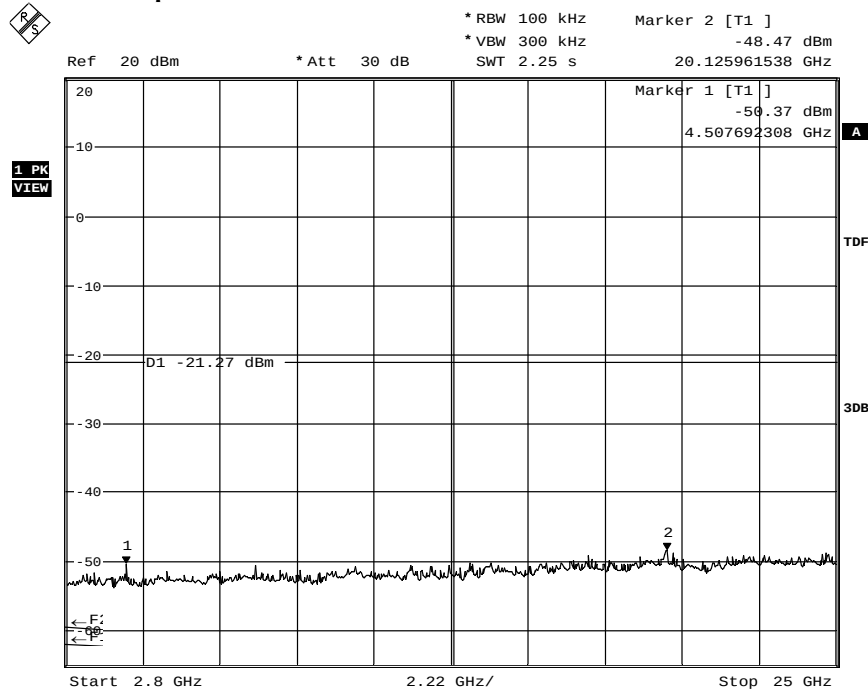1.6.1.9. Sweep 3: 2.8GHz to 25GHz

Date: 15.APR.2015 14:58:24

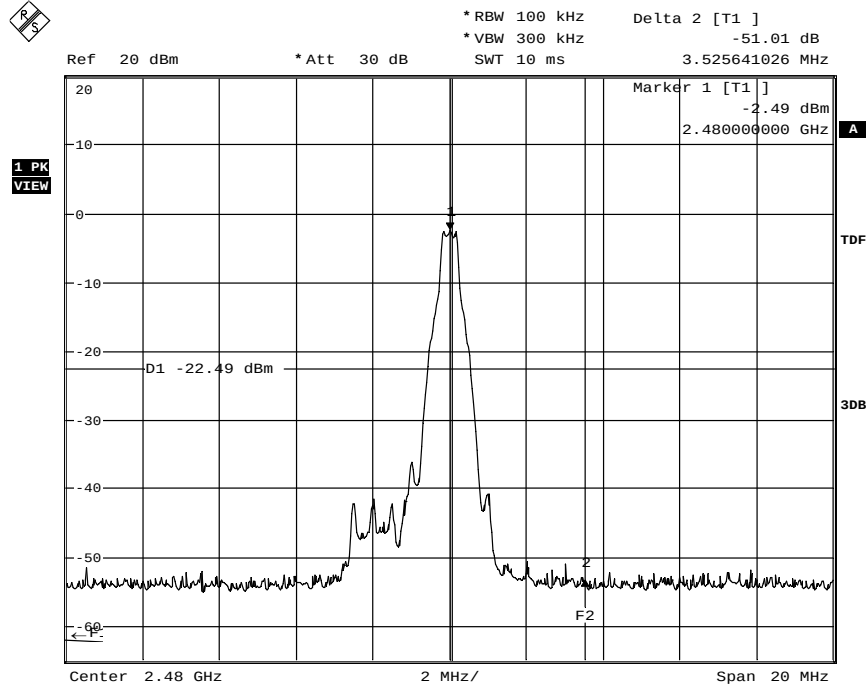
1.6.1.10. Channel 78 Reference

Date: 15.APR.2015 14:35:53

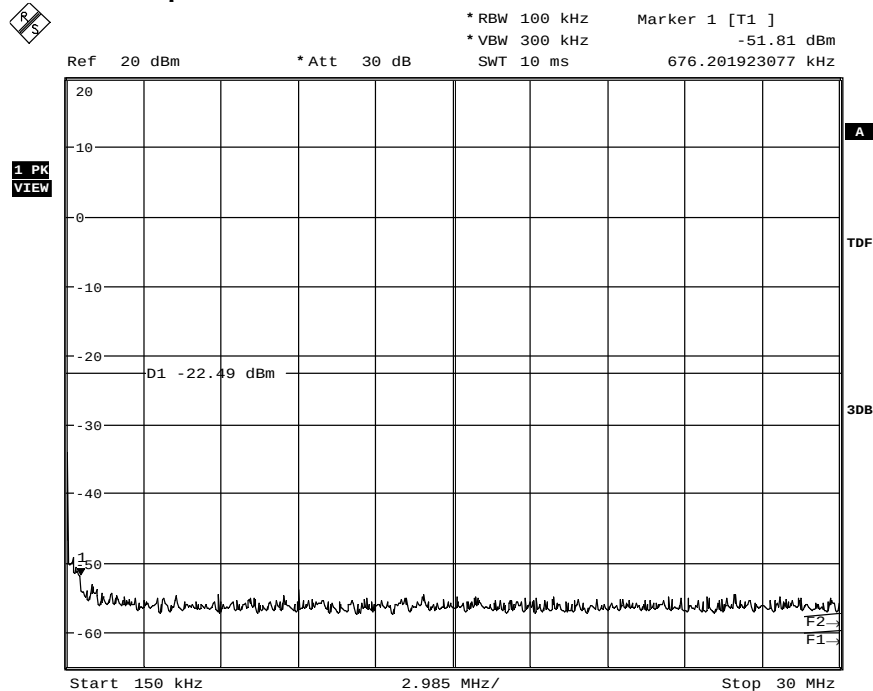1.6.1.11. Sweep 1: 150kHz to 30MHz


Date: 15.APR.2015 14:38:49

1.6.1.12. Sweep 2: 30MHz to 2.8GHz

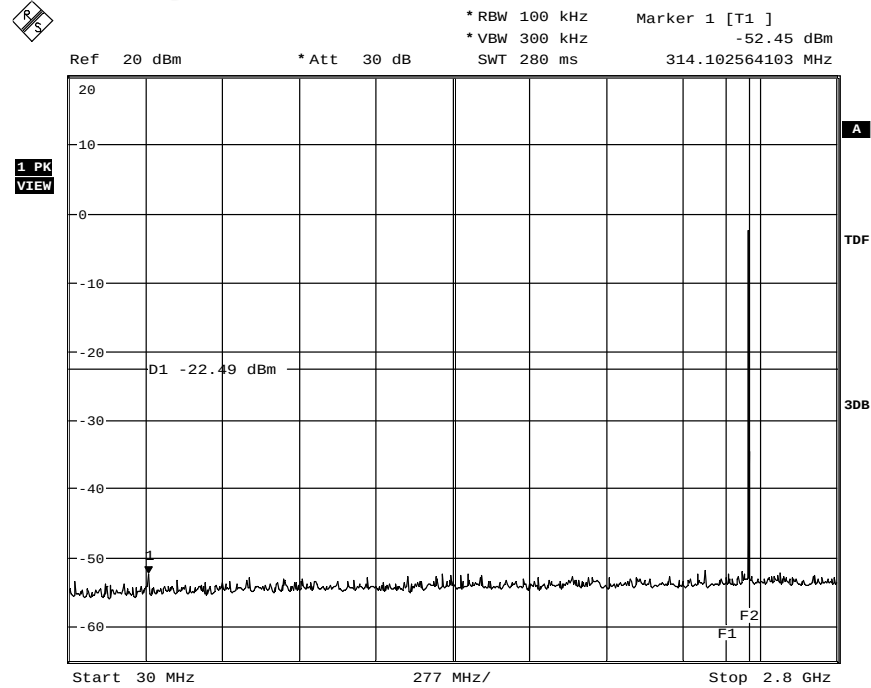


Date: 15.APR.2015 14:41:54


1.6.1.13. Sweep 3: 2.8GHz to 25GHz

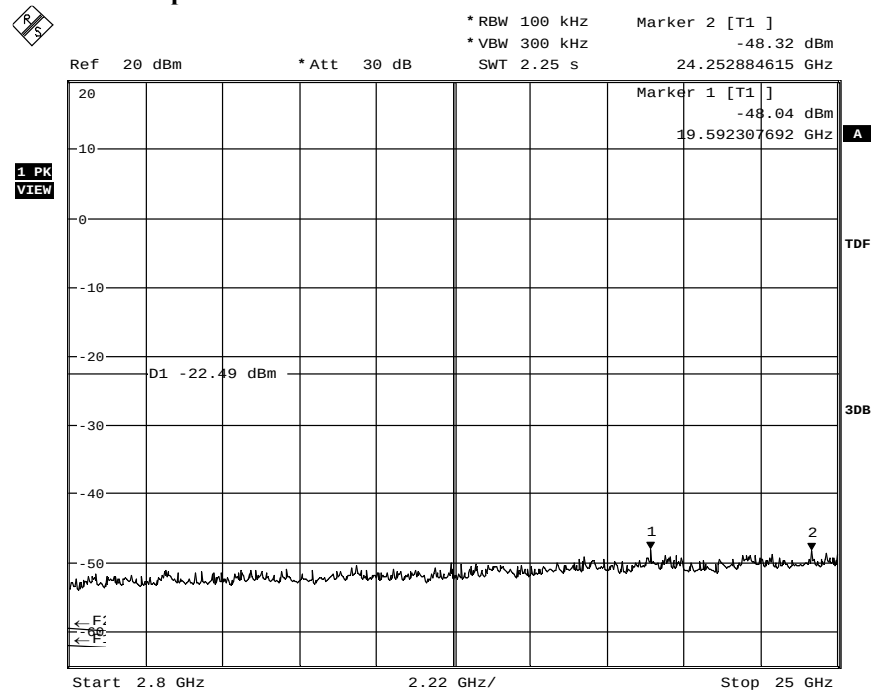


Date: 15.APR.2015 14:46:25

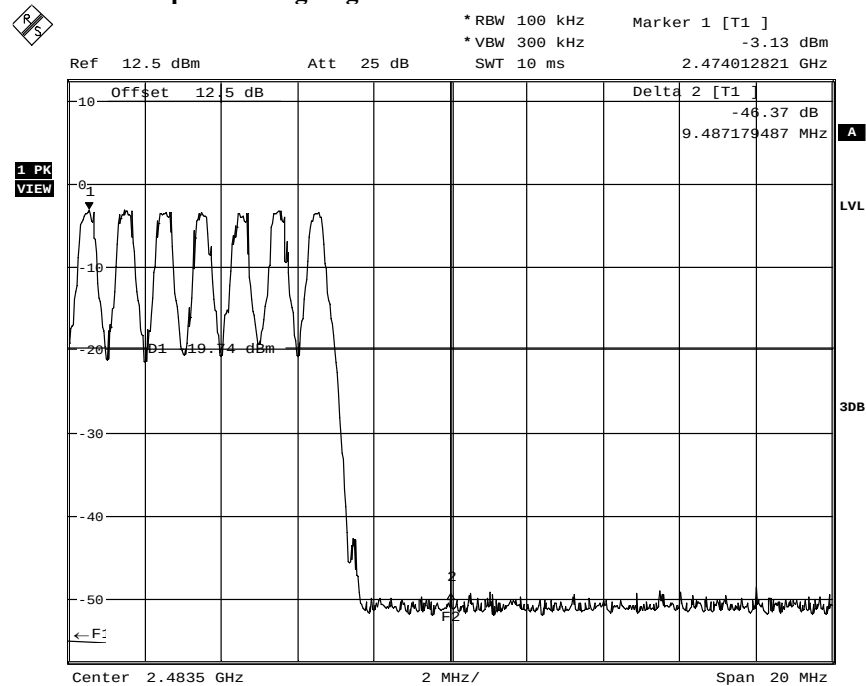1.6.1.14. Sweep Band-Edge right at 2483.5GHz

Date: 13.MAY.2015 14:46:29

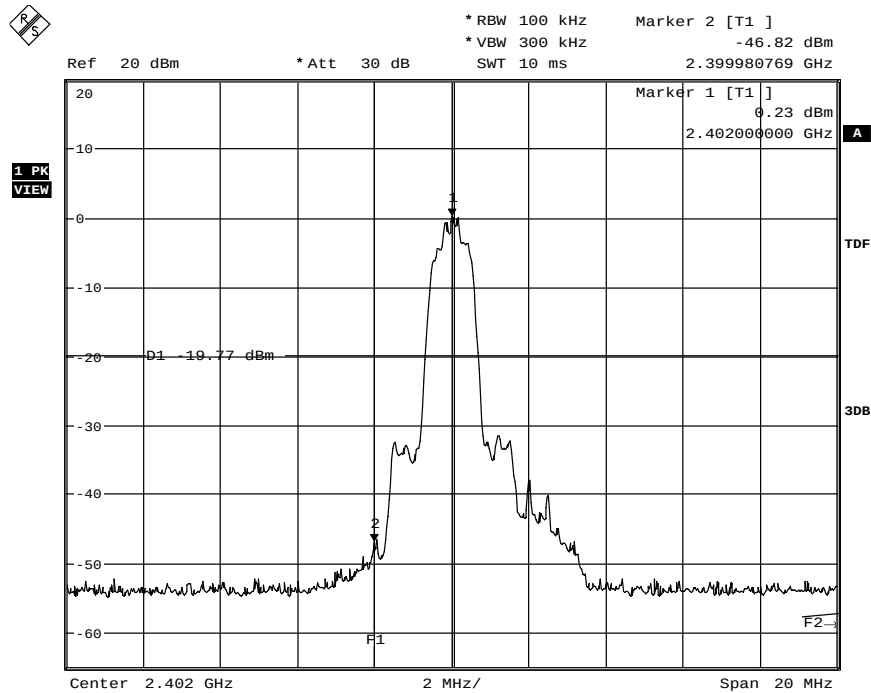
1.6.2. 2DH5**1.6.2.1. Channel 0 Reference**

Date: 15.APR.2015 15:21:02

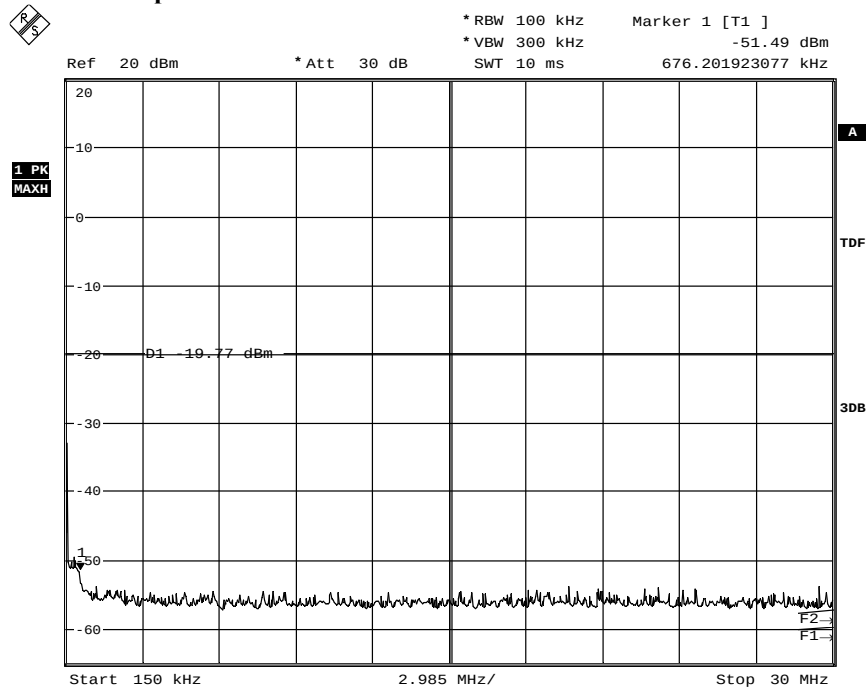1.6.2.2. Sweep 1: 150kHz to 30MHz


Date: 15.APR.2015 15:24:22

1.6.2.3. Sweep 2: 30MHz to 2.8GHz

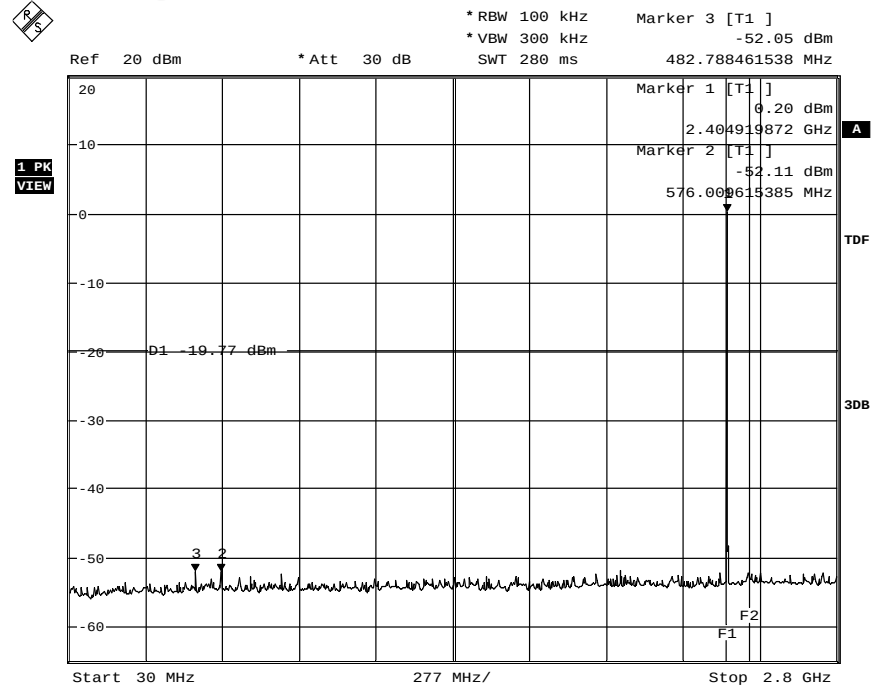


Date: 15.APR.2015 15:27:55


1.6.2.4. Sweep 2: 2.8GHz to 25GHz

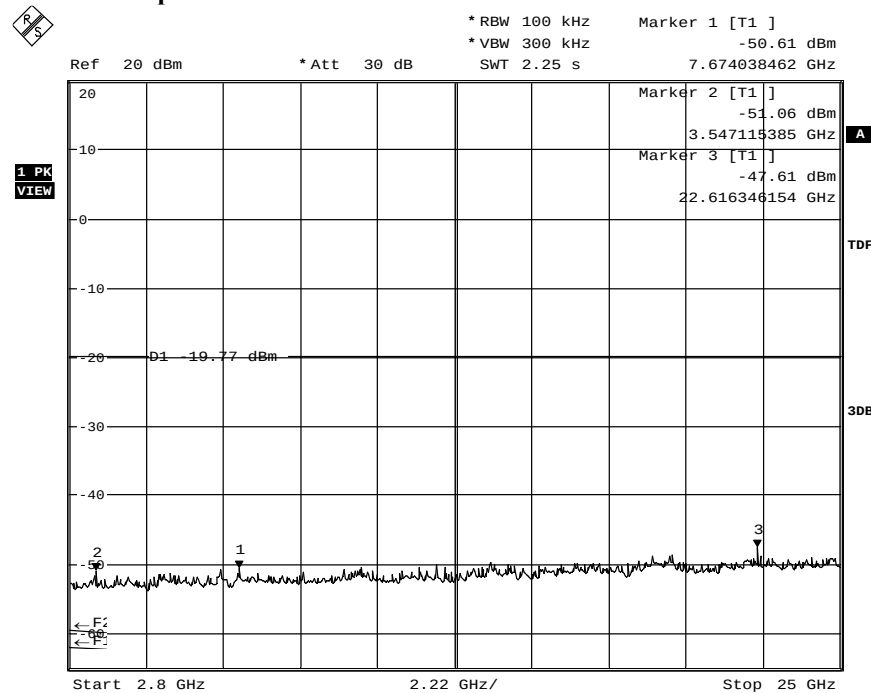

Date: 15.APR.2015 15:32:31

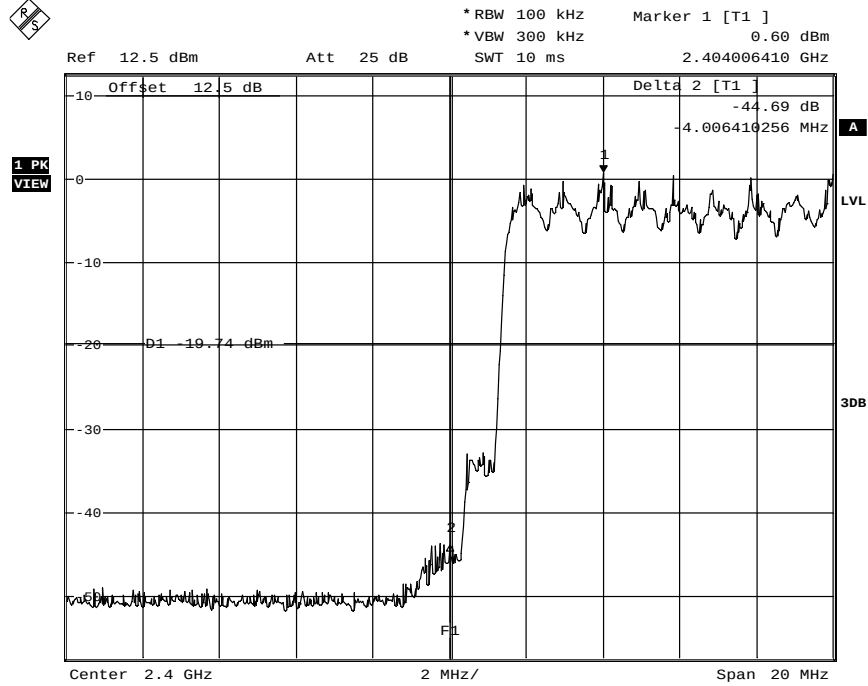1.6.2.5. Sweep Band-Edge left at 2.4GHz


Date: 13.MAY.2015 14:43:16

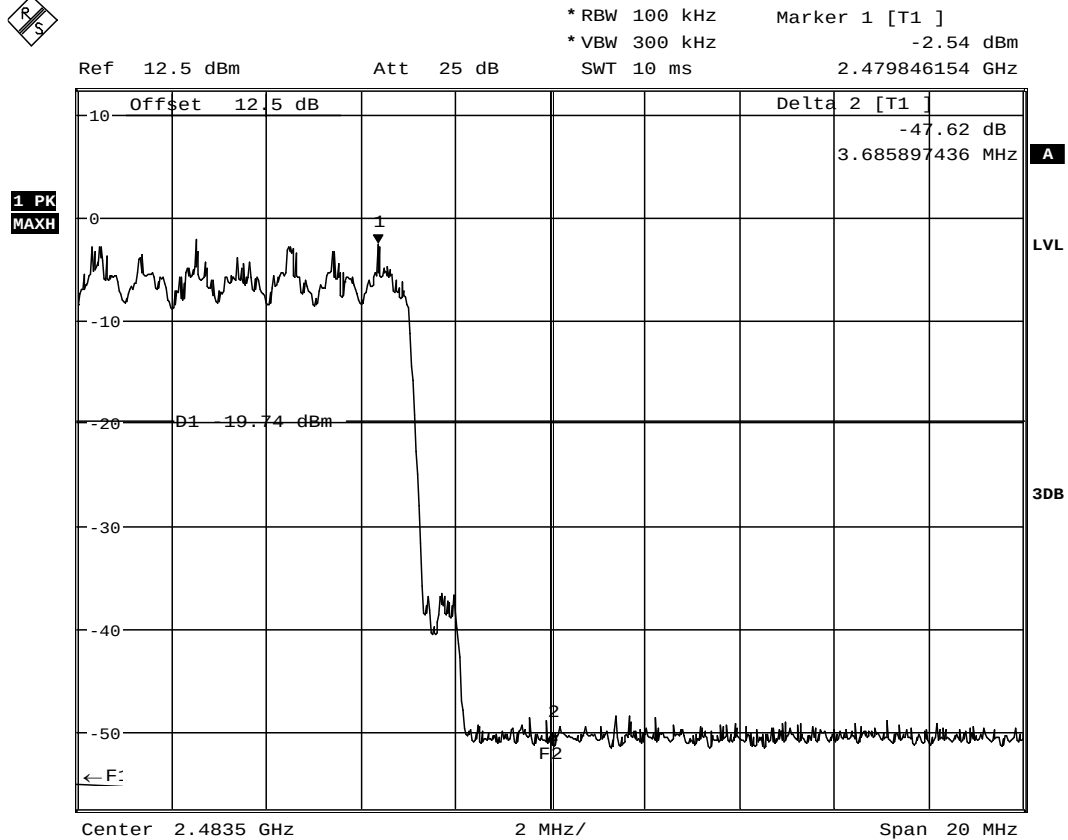1.6.2.6. Sweep Band-Edge right at 2483.5GHz

Date: 13.MAY.2015 14:49:04


1.6.3. 3DH5

1.6.3.1. Channel 0 Reference

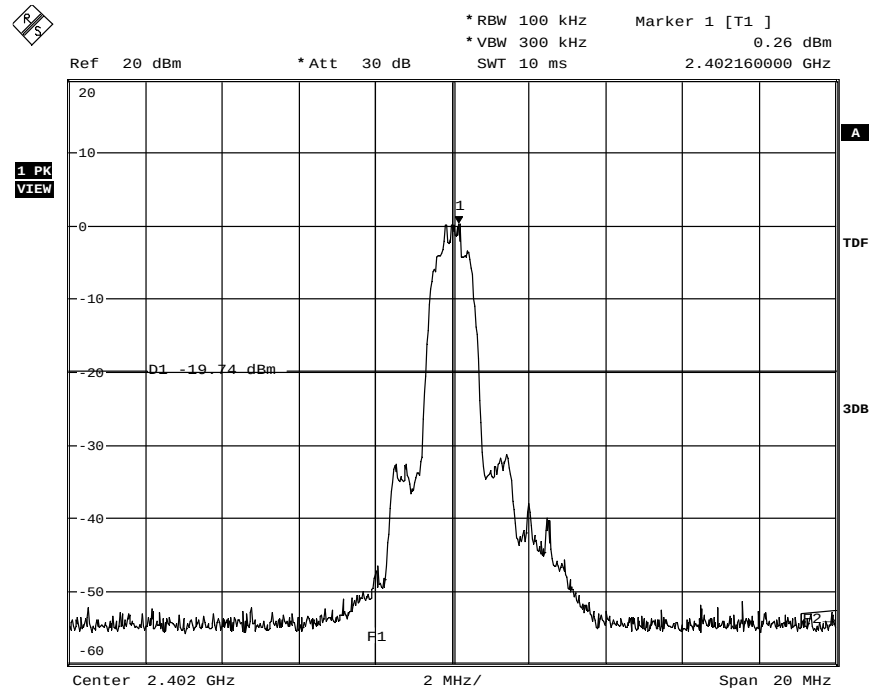


Date: 15.APR.2015 13:43:01

1.6.3.2. Sweep 1: 150kHz to 30MHz

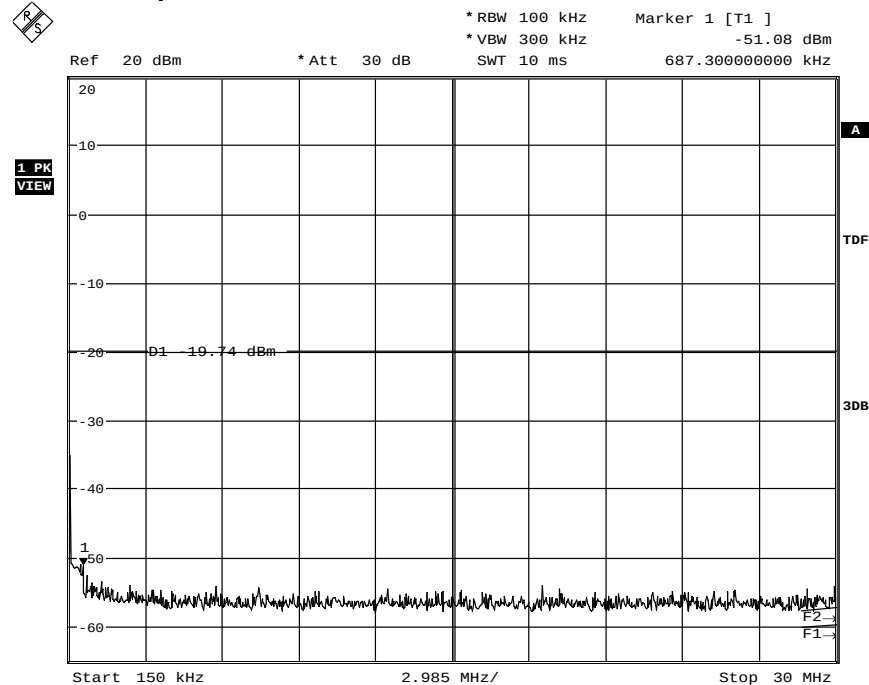


Date: 15.APR.2015 13:46:53

1.6.3.3. Sweep 2: 30MHz to 2.8GHz

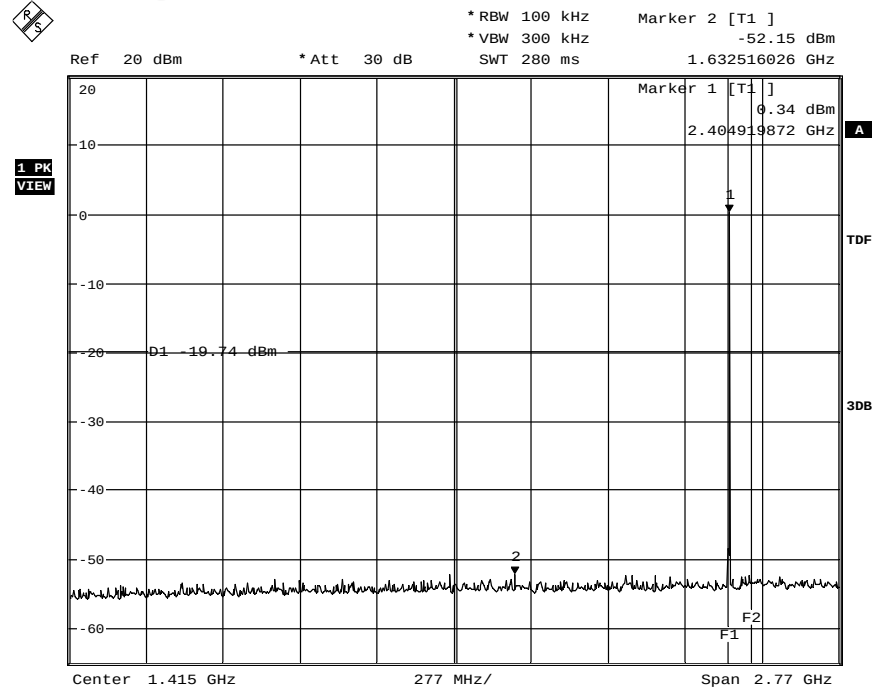


Date: 15.APR.2015 13:52:29

1.6.3.4. Sweep 2: 2.8GHz to 25GHz

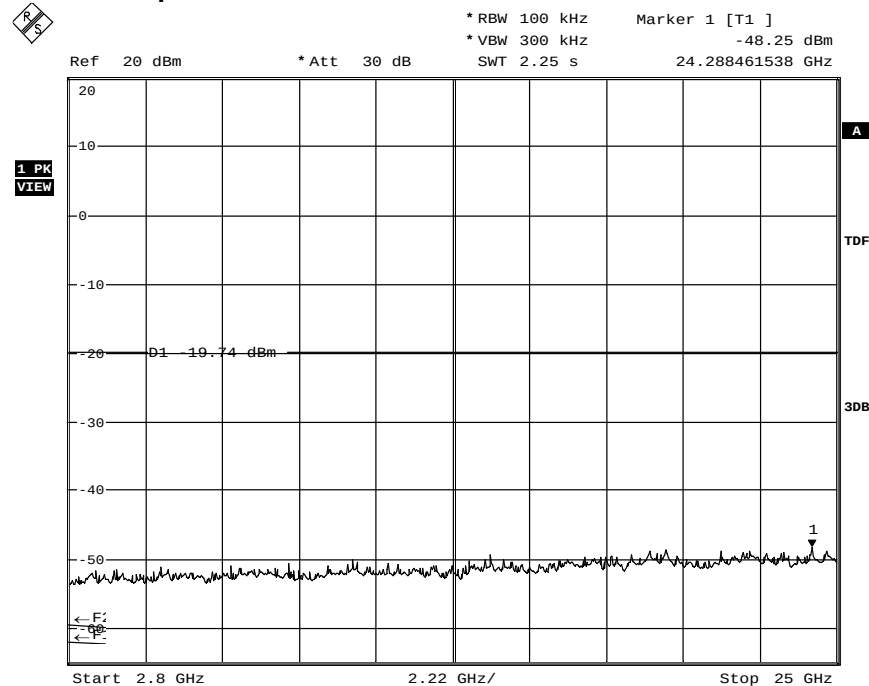


Date: 15.APR.2015 13:56:39

1.6.3.5. Sweep Band-Edge left at 2.4GHz

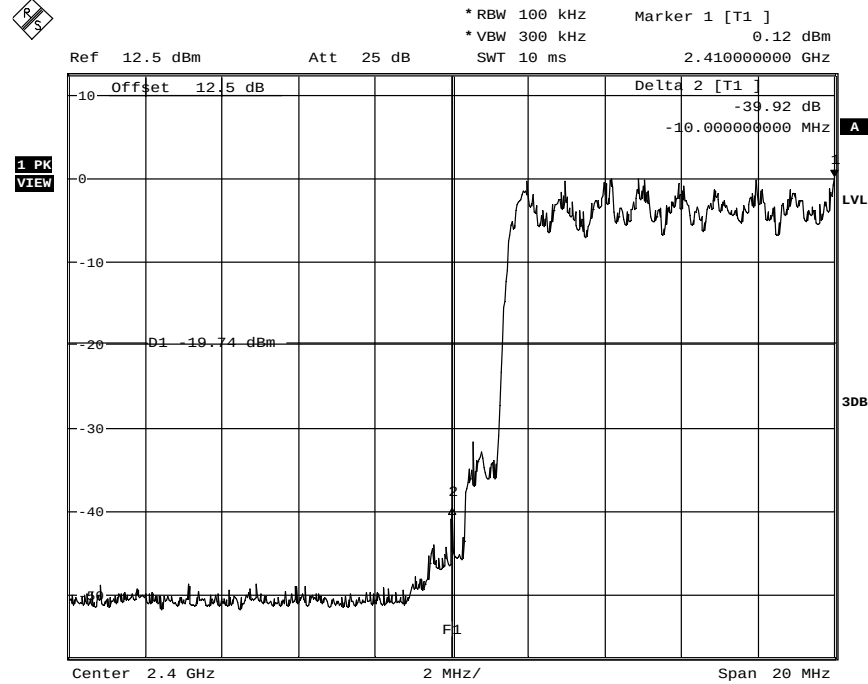


Date: 13.MAY.2015 14:40:36

1.6.3.6. Channel 39 Reference

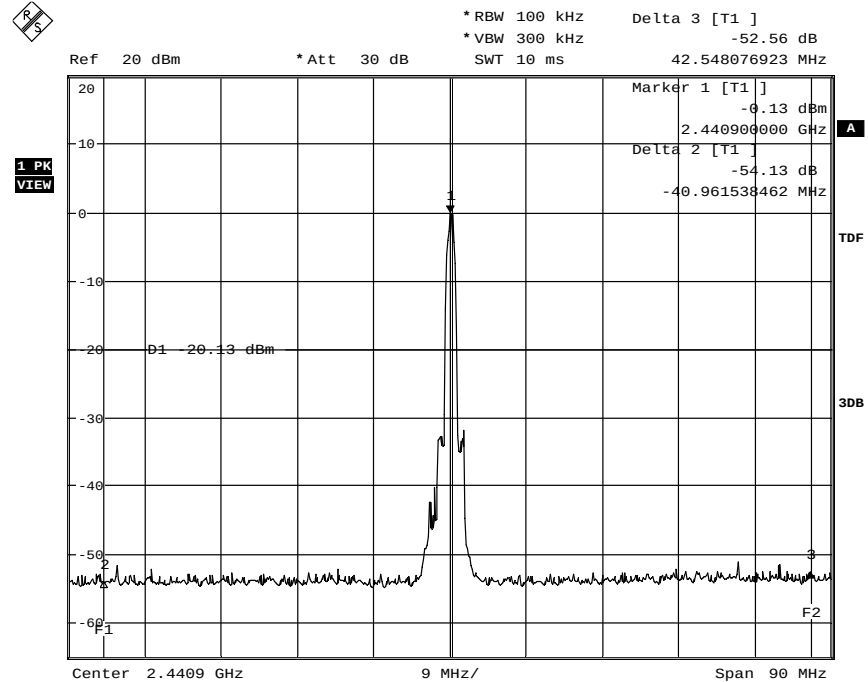


Date: 15.APR.2015 14:02:38

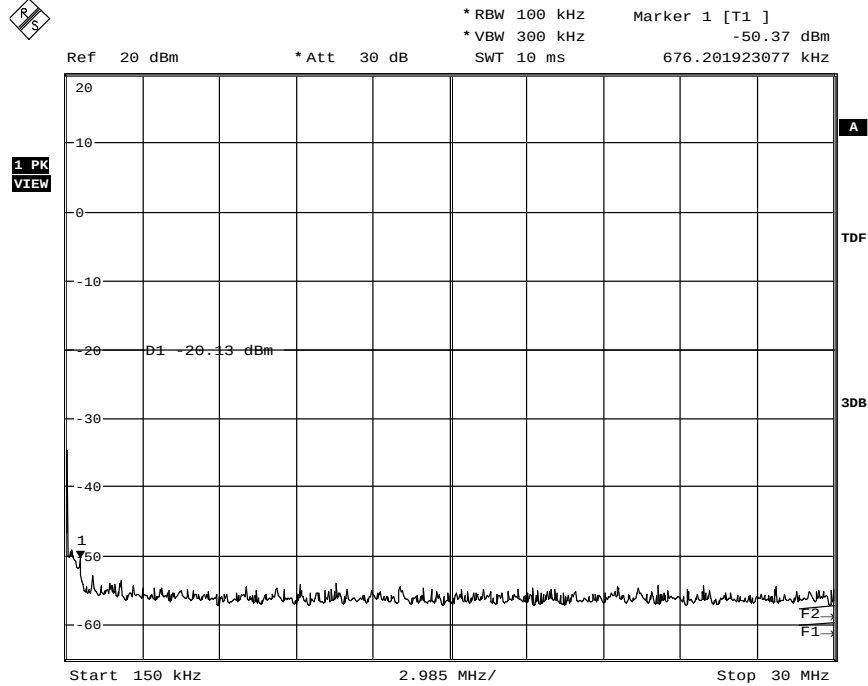1.6.3.7. Sweep 1: 150kHz to 30MHz


Date: 15.APR.2015 14:06:24

1.6.3.8. Sweep 2: 30MHz to 2.8GHz

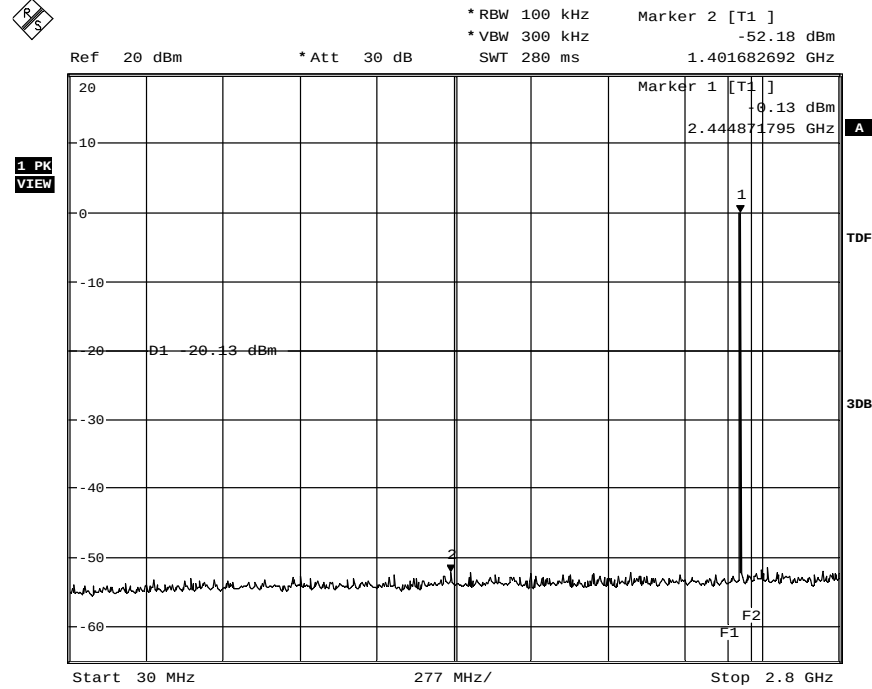


Date: 15.APR.2015 14:11:34


1.6.3.9. Sweep 3: 2.8GHz to 25GHz

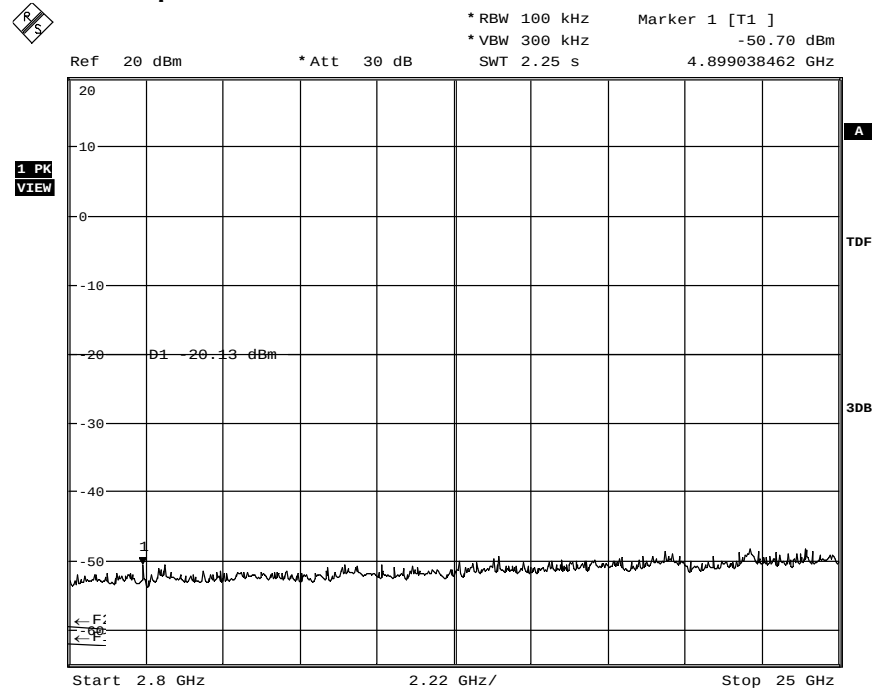


Date: 15.APR.2015 14:16:14

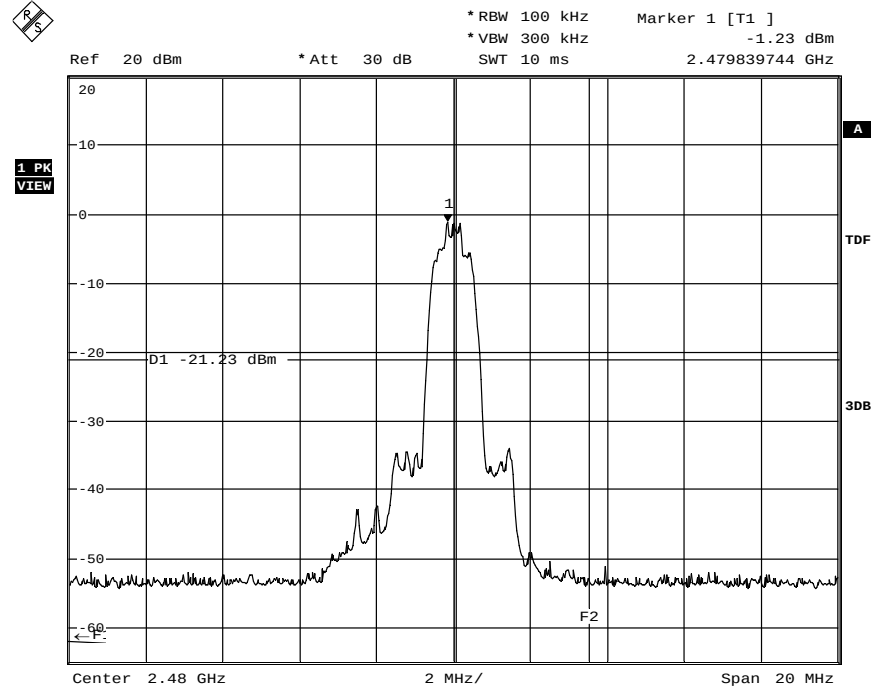1.6.3.10. Channel 78 Reference


Date: 15.APR.2015 14:21:29

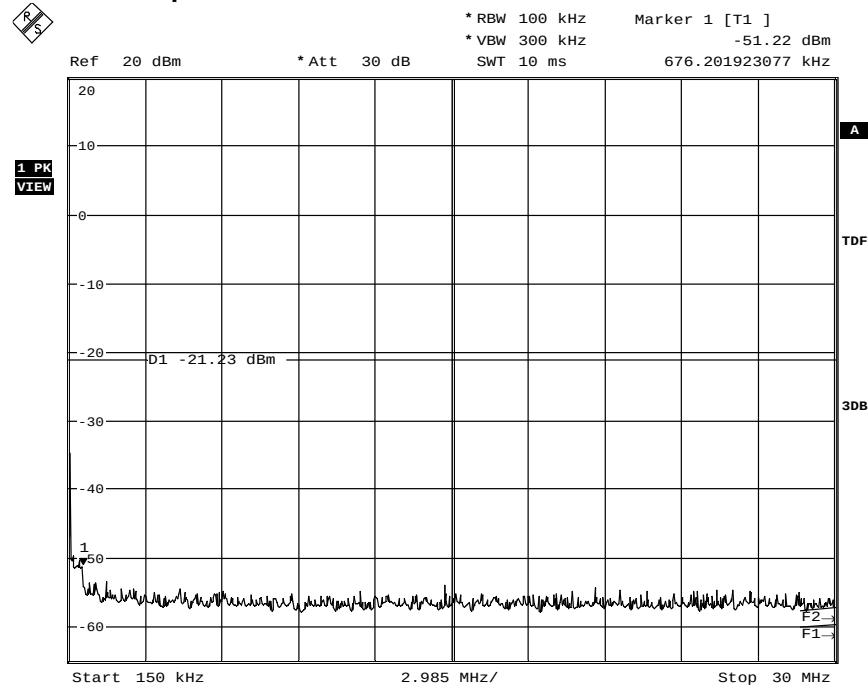1.6.3.11. Sweep 1: 150kHz to 30MHz


Date: 15.APR.2015 14:25:05

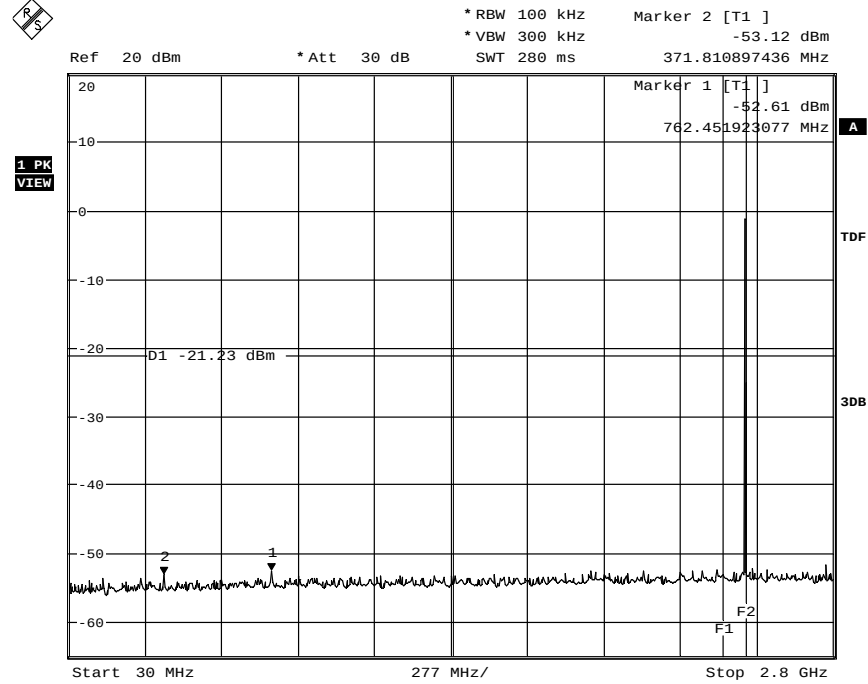1.6.3.12. Sweep 2: 30MHz to 2.8GHz

Date: 15.APR.2015 14:27:57

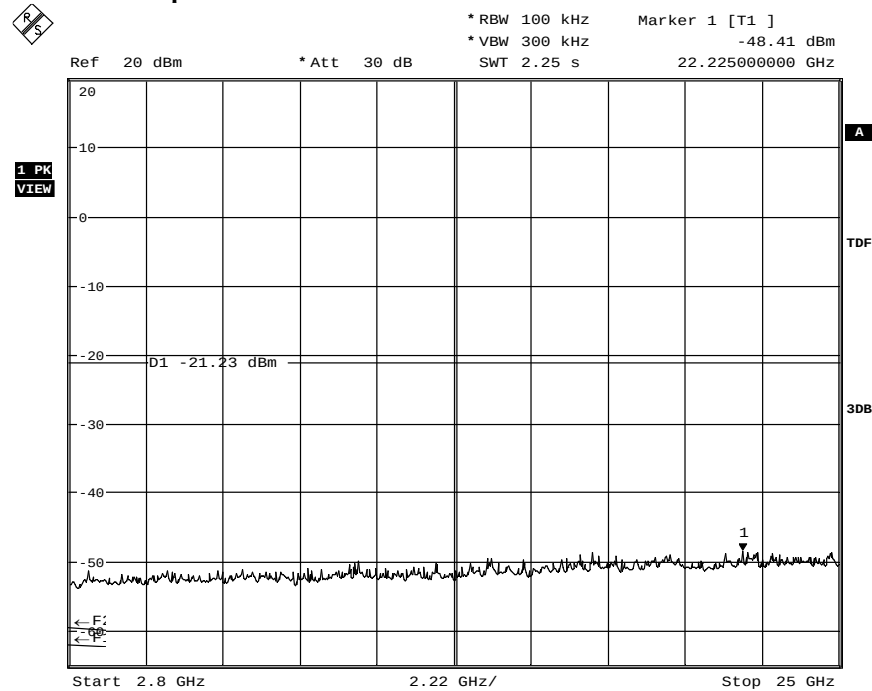1.6.3.13. Sweep 3: 2.8GHz to 25GHz

Date: 15.APR.2015 14:32:20

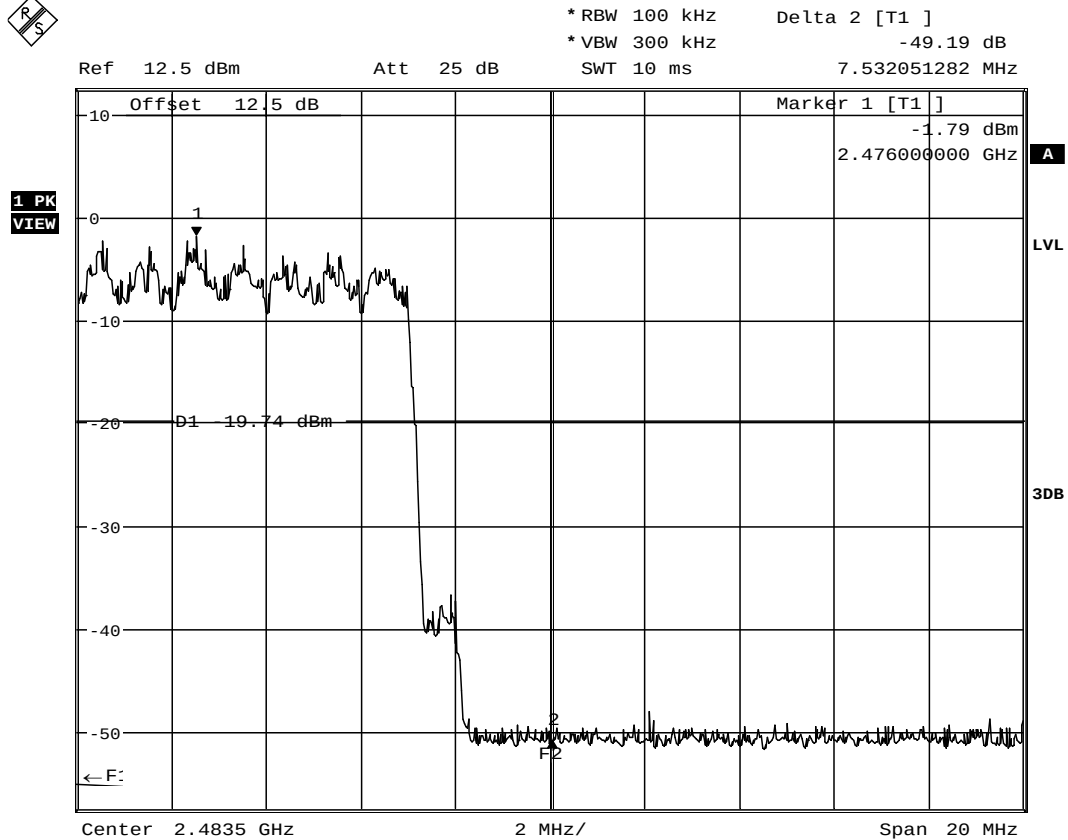1.6.3.14. Sweep Band-Edge right at 2483.5GHz

Date: 13.MAY.2015 14:50:46

2. Conducted EMI measurements on AC-mains port according 15.207, class B

Not applicable since powered from 12V car equipment

3. Radiated field strength measurements accord. §15.209&15.205

3.1. Magnetic field measurements $f < 30\text{ MHz}$

3.1.1. GFSK modulation

Diagram No. 2.04_TX_ch00_DH5

Test description:	Date: 23.04.2015 Page 1 of 1
Test site and distance:	Magnetic Field Strength Measurement related to 30/300 m distance
Version of Testsoftware:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Distance correction:	EMC32 V8.51.0
Technical Data:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	Please see page 2 for detailed data of measurement setup
Used filter:	height 1.00 m, parallel and 90° to EUT polarisation
Test specification:	bypass
	FCC 15.205 § 15.209; RSS-Gen: Issue 4


Operator:	HLA
Operating conditions:	BT TX Ch:00 _DH5
Power during tests:	13,5V DC
Comment 1:	
Comment 2:	

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10

HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC

FCC15.209_magn hor+vert

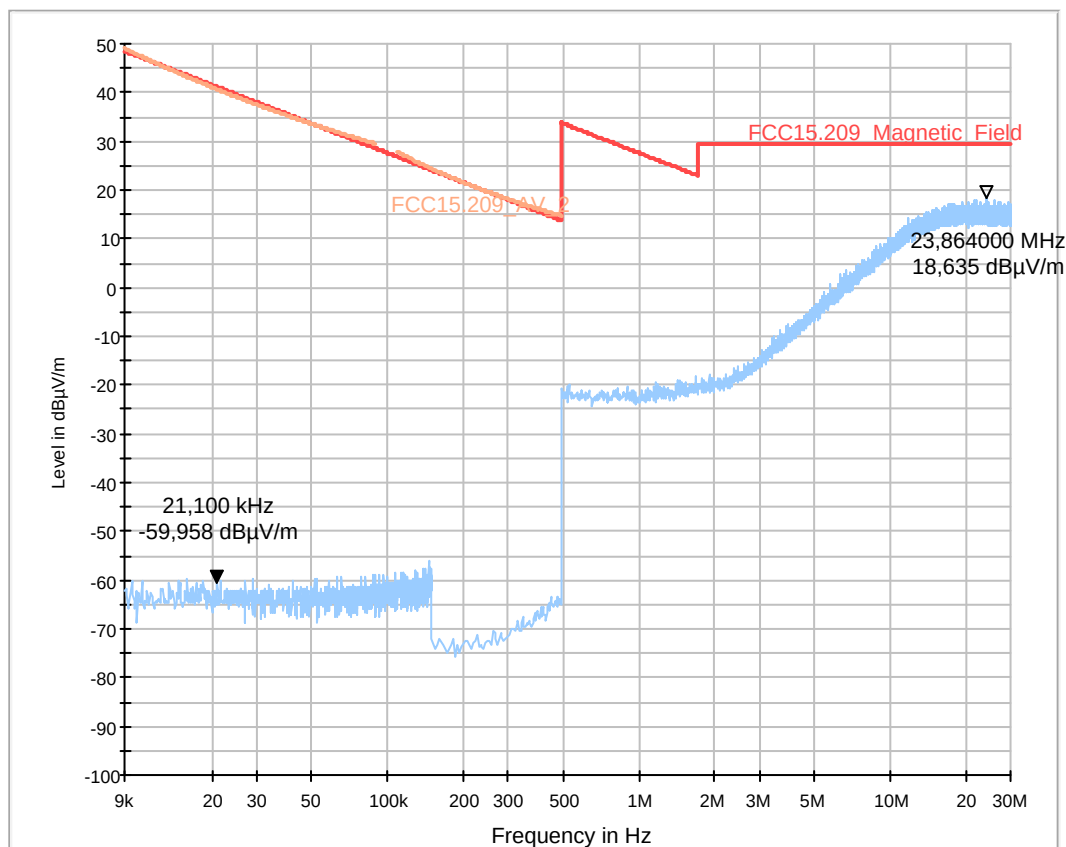

3.1.2. $\pi/4$ DQPSK modulation

Diagram No. 2.05_TX_ch39_2DH5


Test description:	Date: 23.04.2015 Page 1 of 1
Test site and distance:	Magnetic Field Strength Measurement related to 30/300 m distance
Version of Testsoftware:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Distance correction:	EMC32 V8.51.0
Technical Data:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	Please see page 2 for detailed data of measurement setup
Used filter:	height 1.00 m, parallel and 90° to EUT polarisation
Test specification:	bypass
	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	HLa
Operating conditions:	BT TX Ch:39_2DH5
Power during tests:	13,5V DC
Comment 1:	
Comment 2:	

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10

HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC

FCC15.209_magn hor+vert

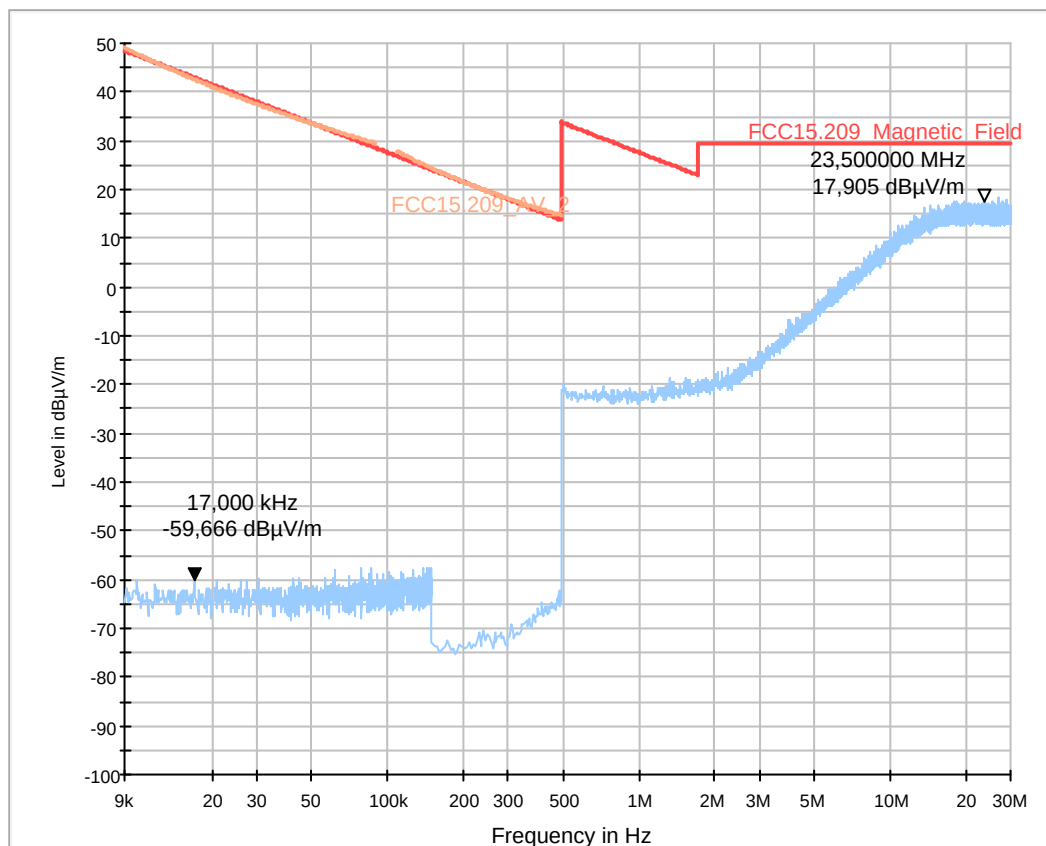

3.1.3. 8DPSK modulation

Diagram No. 2.06_TX_ch78_3DH5

Test description:	Date: 23.04.2015 Page 1 of 1
Test site and distance:	Magnetic Field Strength Measurement related to 30/300 m distance
Version of Testsoftware:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Distance correction:	EMC32 V8.51.0
Technical Data:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	Please see page 2 for detailed data of measurement setup
Used filter:	height 1.00 m, parallel and 90° to EUT polarisation
Test specification:	bypass
	FCC 15.205 § 15.209; RSS-Gen: Issue 4


Operator:	HLA
Operating conditions:	BT TX Ch:78_3DH5
Power during tests:	13,5V DC
Comment 1:	
Comment 2:	

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10

HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC

FCC15.209_magn hor+vert

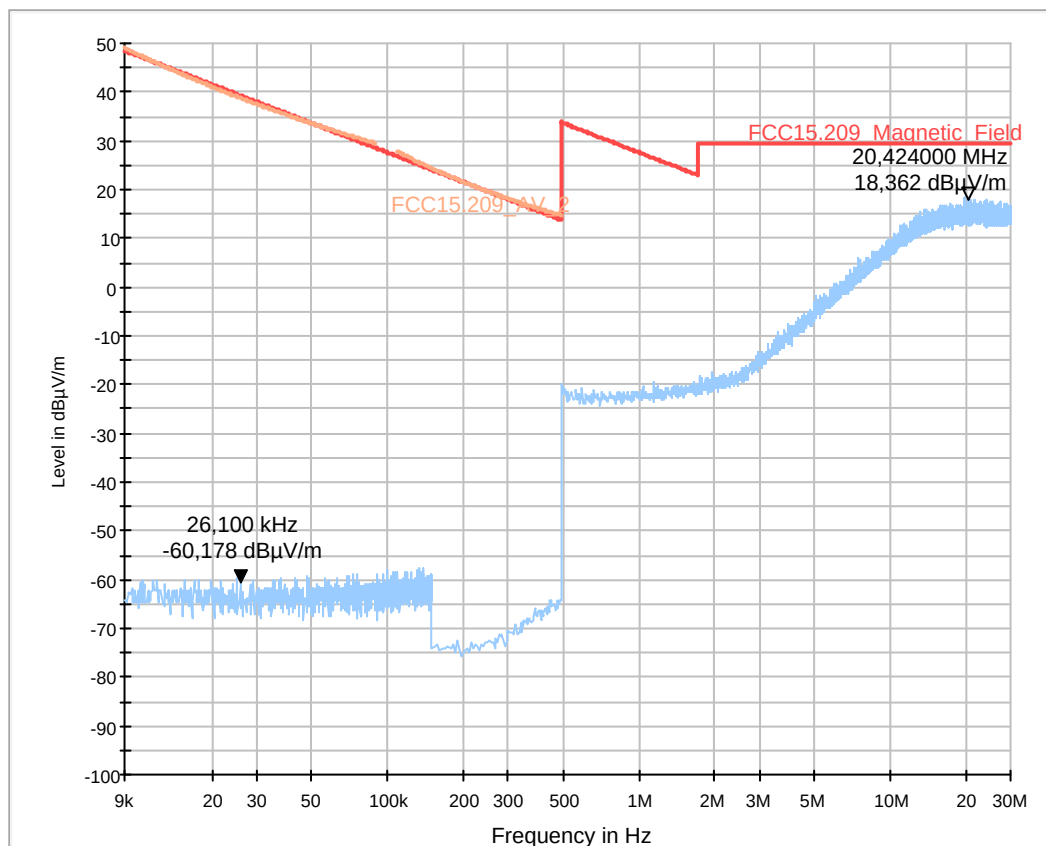

3.2. Field strength measurements 30MHz < f < 1GHz

3.2.1. GFSK modulation

Diagram No. 3.04_TX_ch0_DH5

22.04.2015 Page 1 of 1
 Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V8.51.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.109 Class B; RSS-Gen. Issue 4

Operator: HLa
 Operating conditions: BT TX Ch:00 _DH5
 Power during tests: 13,5V DC
 Comment 1:

EUT Information


Manufacturer: Bosch
 EuT: LCN2K70B10

 HW Version: 051
 SW Version: F014
 Serial Number: 3130494
 Connected Interfaces: -
 Power Supply: via external power supply, nomVolt: 13.50 VDC

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Measurement Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
192.190000	41.6	1000.0	120.000	181.0	H	288.0	12.2	1.9	43.5

FCC15.109_hor+vert

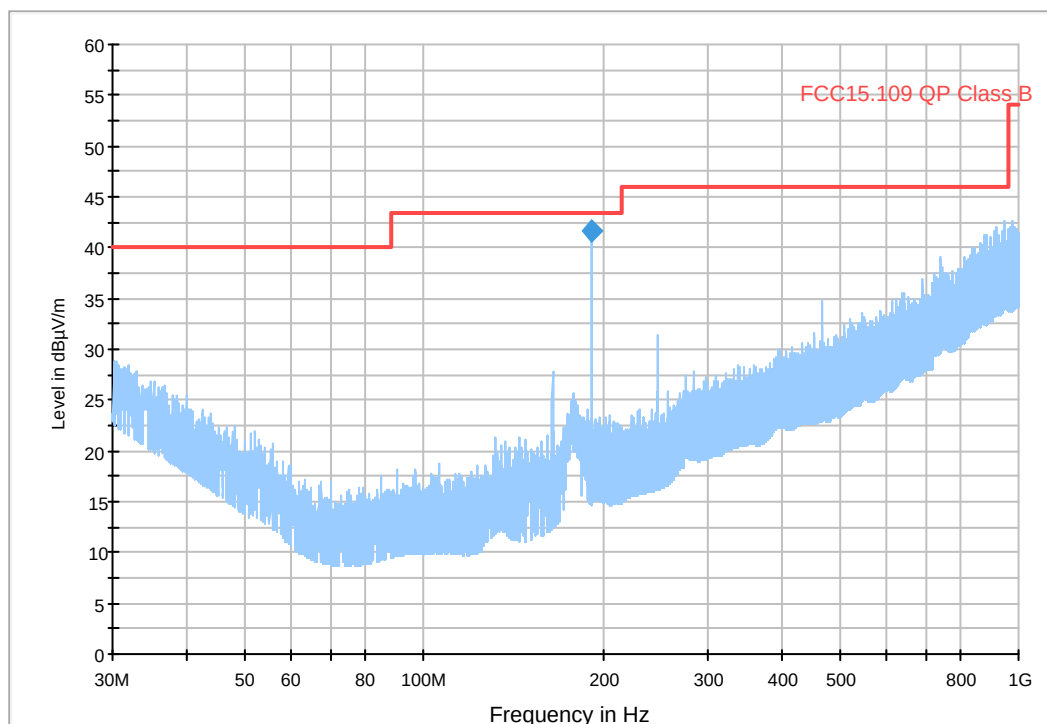

3.2.2. $\pi/4$ DQPSK modulation

Diagram No. 3.05_TX_ch39_2-DH5

22.04.2015 Page 1 of 1
 Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V8.51.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.109 Class B; RSS-Gen. Issue 4

 Operator: HLa
 Operating conditions: BT TX Ch:38_2-DH5
 Power during tests: 13,5V DC
 Comment 1:

EUT Information


Manufacturer: Bosch
 EuT: LCN2K70B10

 HW Version: 051
 SW Version: F014
 Serial Number: 3130494
 Connected Interfaces: -
 Power Supply: via external power supply, nomVolt: 13.50 VDC

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Measurement Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
192.190000	41.4	1000.0	120.000	168.0	H	279.0	12.2	2.1	43.5

FCC15.109_hor+vert

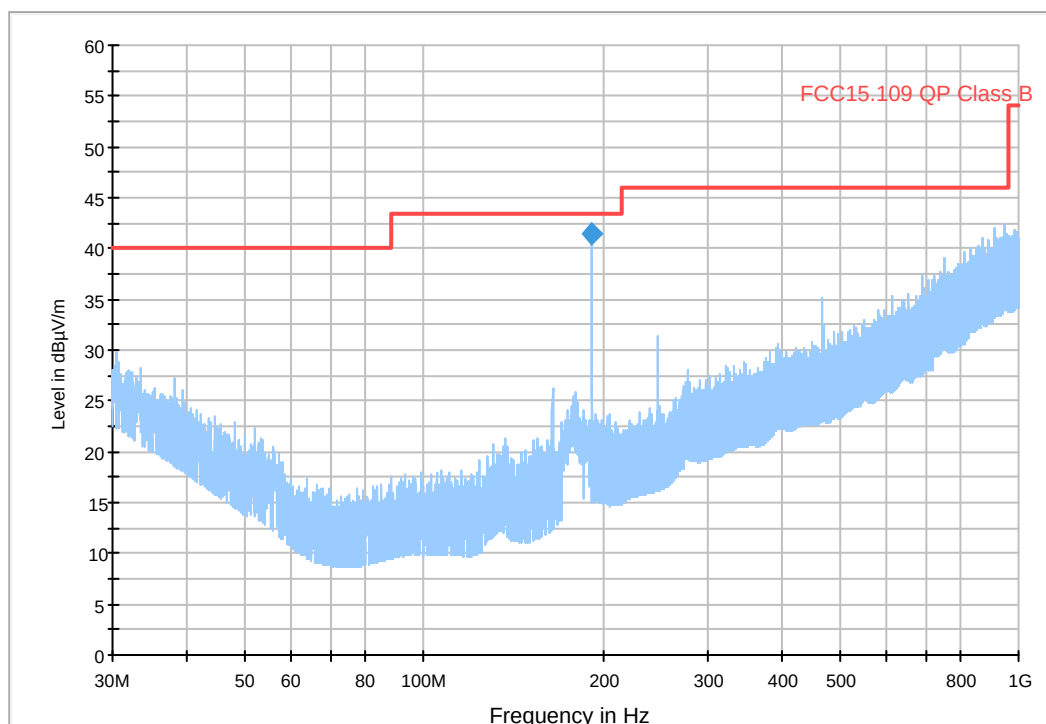

3.2.3. 8DPSK modulation

Diagram No. 3.06_TX_ch78_3-DH5

22.04.2015 Page 1 of 1
 Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V8.51.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.109 Class B; RSS-Gen. Issue 4

Operator: HLa
 Operating conditions: BT TX Ch:78_3DH5
 Power during tests: 13,5V DC
 Comment 1:

EUT Information


Manufacturer: Bosch
 EUT: LCN2K70B10

 HW Version: 051
 SW Version: F014
 Serial Number: 3130494
 Connected Interfaces: -
 Power Supply: via external power supply, nomVolt: 13.50 VDC

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Measurement Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
192.180000	41.0	1000.0	120.000	172.0	H	287.0	12.2	2.5	43.5

FCC15.109_hor+vert

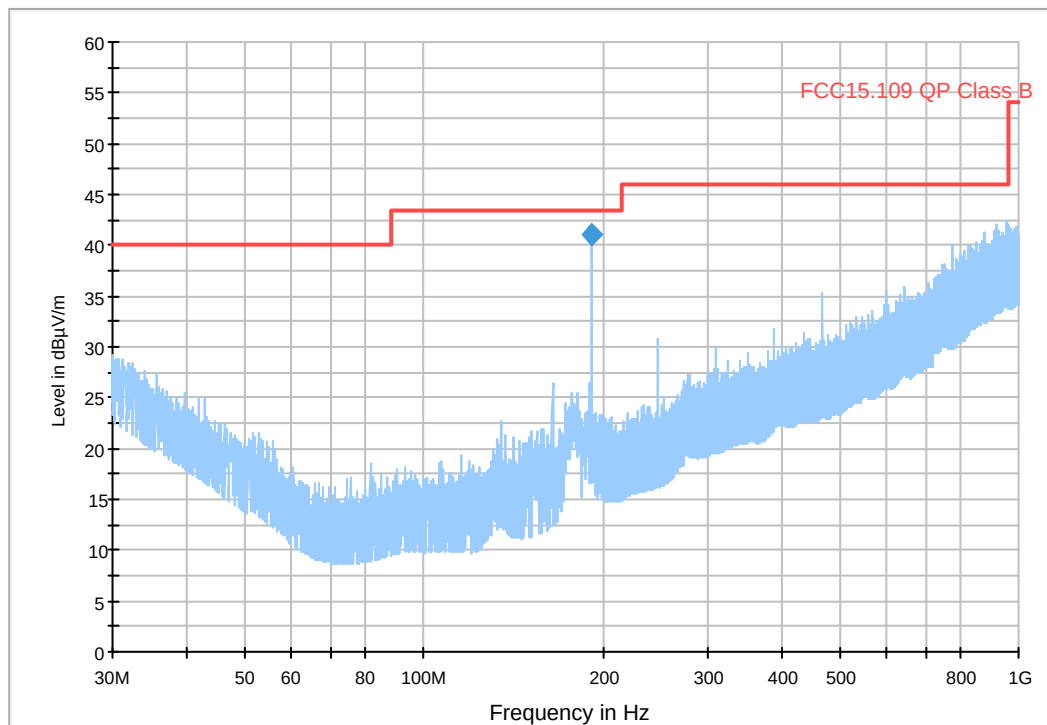

3.3. Field strength measurements $f < 18\text{GHz}$

3.3.1. GFSK modulation


Diagram No.: 4.04_Tx_ch0_DH5

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.247&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	MZs
Comment:	Channel no. low, DH5

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

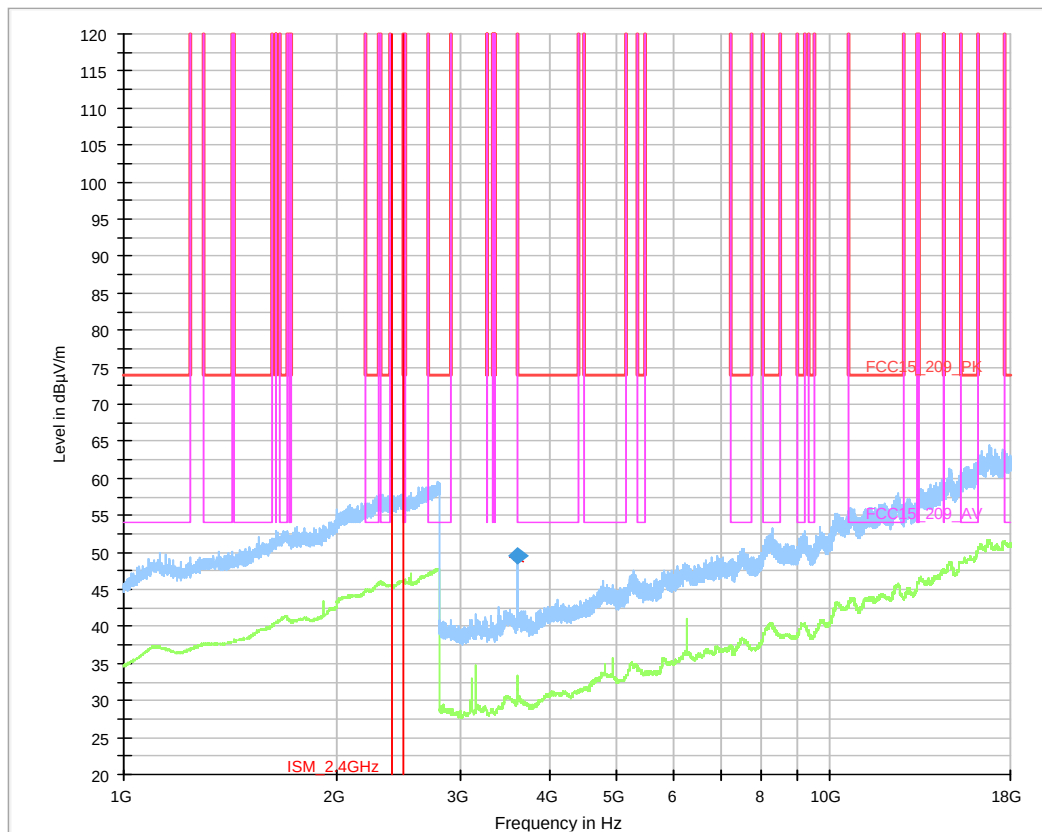

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	RMS (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)
3612.300000	49.49	---	74.00	24.51	100.0	1000.000	155.0	V	-6.0	0.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Correction	Comment
3612.300000	0.5	09:38:46 - 21.04.2015

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	RMS (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)
3612.300000	49.49	---	74.00	24.51	100.0	1000.000	155.0	V	-6.0	0.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Correction	Comment
3612.300000	0.5	09:38:46 - 21.04.2015

3.3.2. $\pi/4$ DQPSK modulation


Diagram No.: 4.05_TX_ch39_2-DH5

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.247&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	MZs
Comment:	Channel no. middle,2- DH5

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

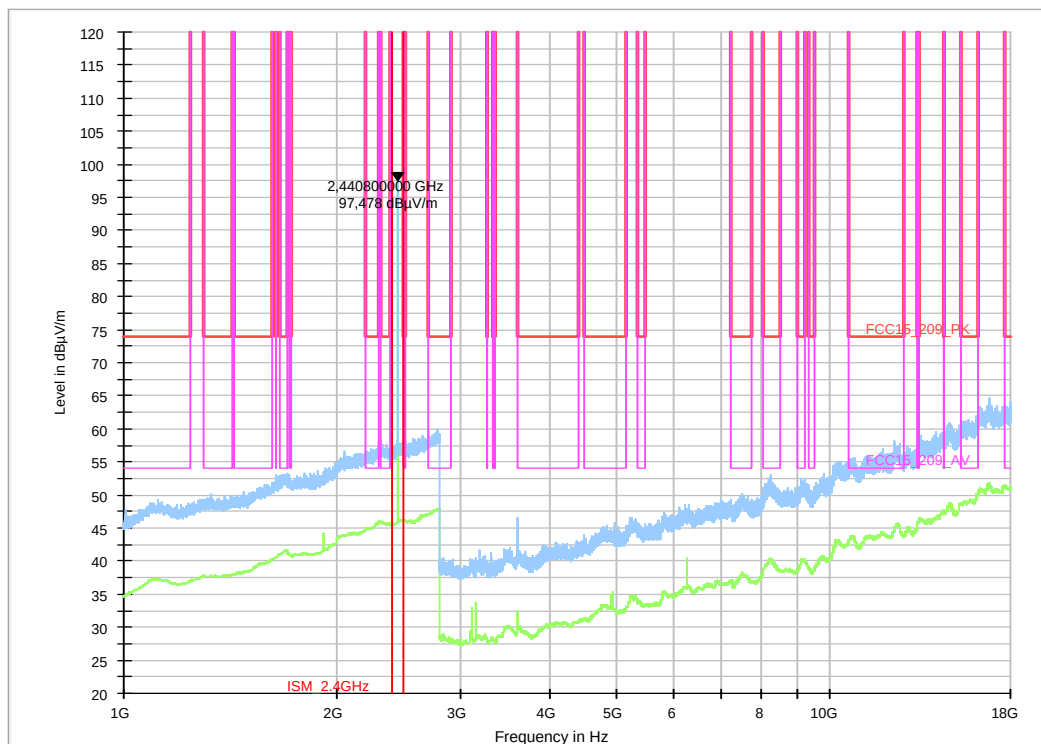

3.3.3. 8DPSK modulation


Diagram No.: 4.06_TX_ch78_3-DH5

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.247&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	MZs
Comment:	Channel no. high, 3-DH5

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

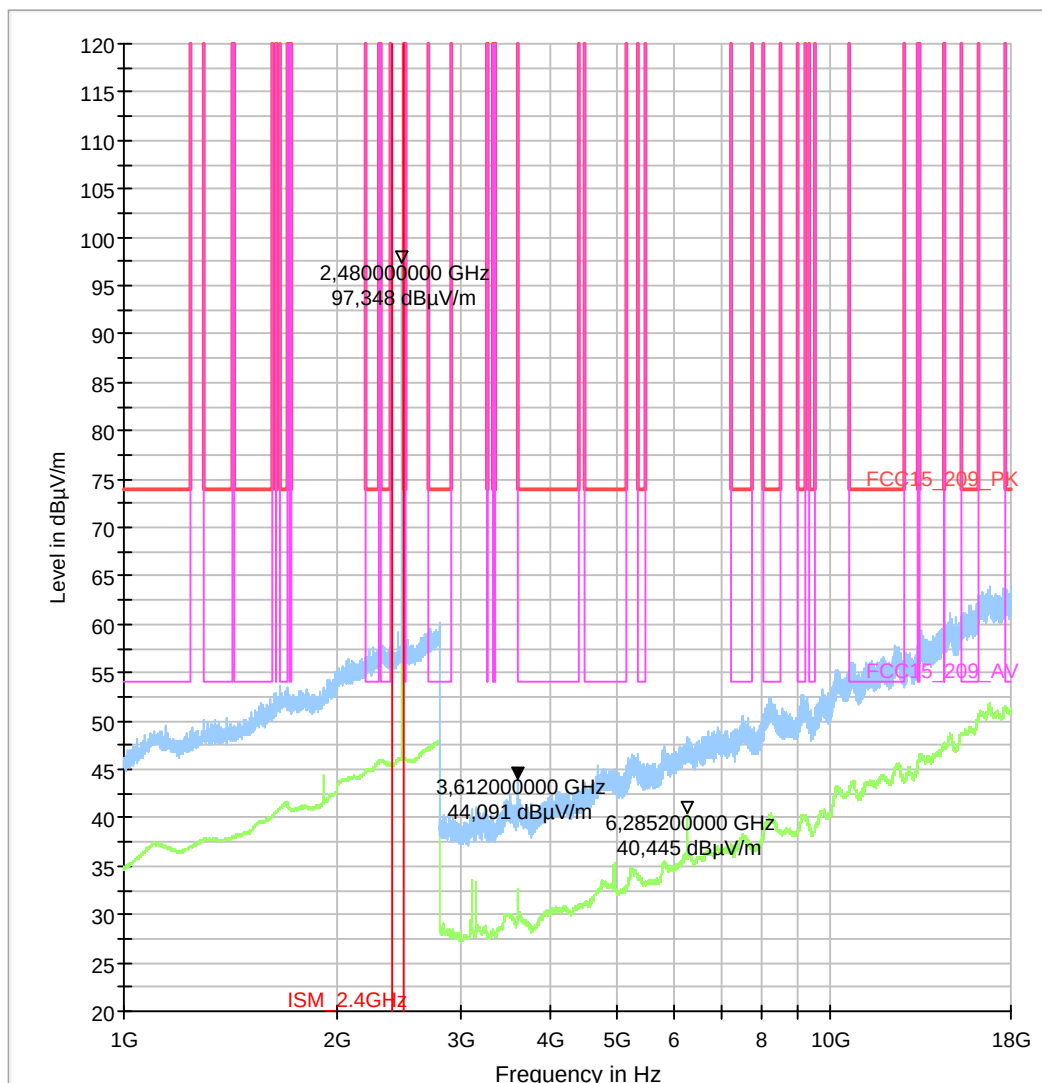

3.4. Field strength measurements 18GHz < f < 25GHz


3.4.1. GFSK modulation

Diagram No.: 4.07_TX_ch0_DH5

Common Information

Test Description:	Radiated field strength emission in 1m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.247, 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Distance correction factor	3 to 1m: -10.5 dB applying to measurement results
SW-Version:	EMC32 V8.53.0
Operation mode:	TX mode continuous
Operator Name:	MFr
Comment:	Channel 00. DH5

FCC_Sweep_15.407_18_40GHz_Pre

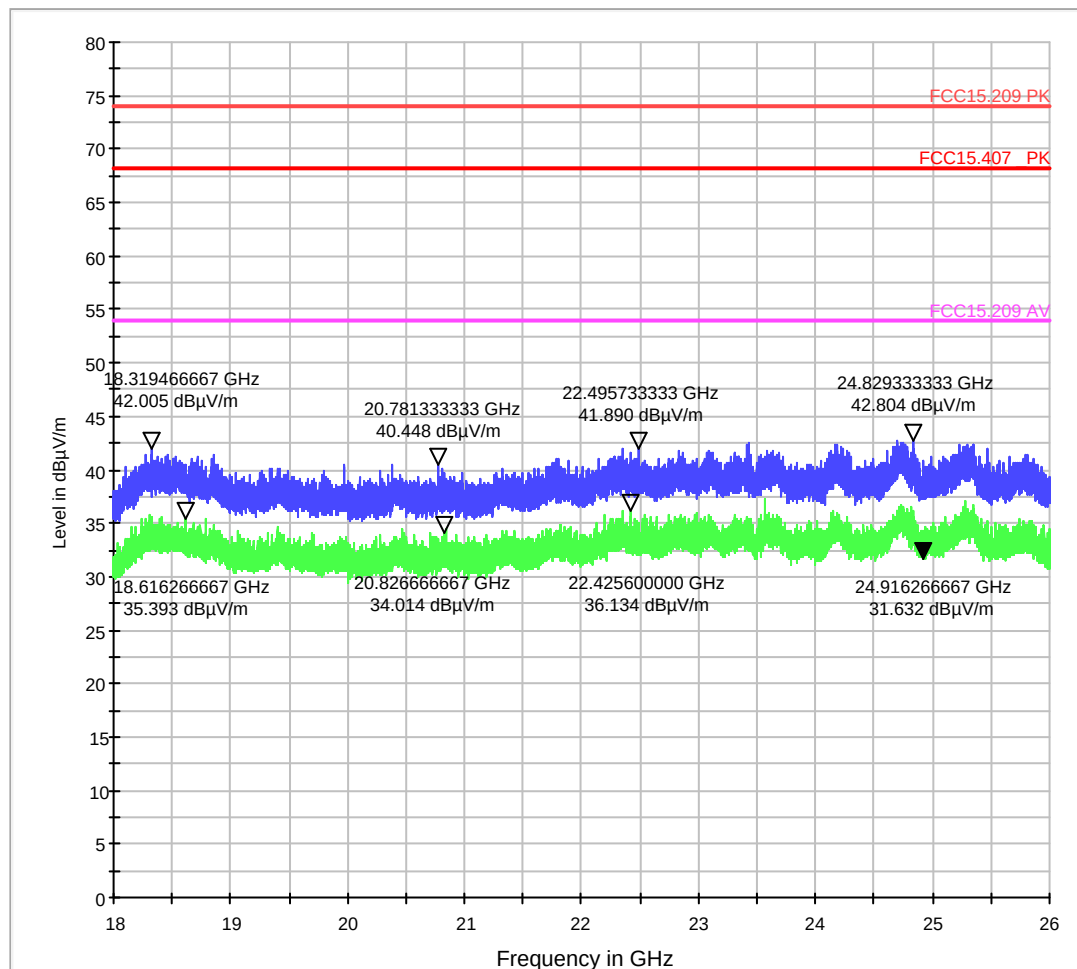


3.4.2. $\pi/4$ DQPSK modulation

Diagram No.: 4.08_TX_ch39_2-DH5

Common Information

Test Description:	Radiated field strength emission in 1m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.247, 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Distance correction factor	3 to 1m: -10.5 dB applying to measurement results
SW-Version:	EMC32 V8.53.0
Operation mode:	TX mode continuous
Operator Name:	MFr
Comment:	Channel 39 . 2DH5

FCC_Sweep_15.407_18_40GHz_Pre

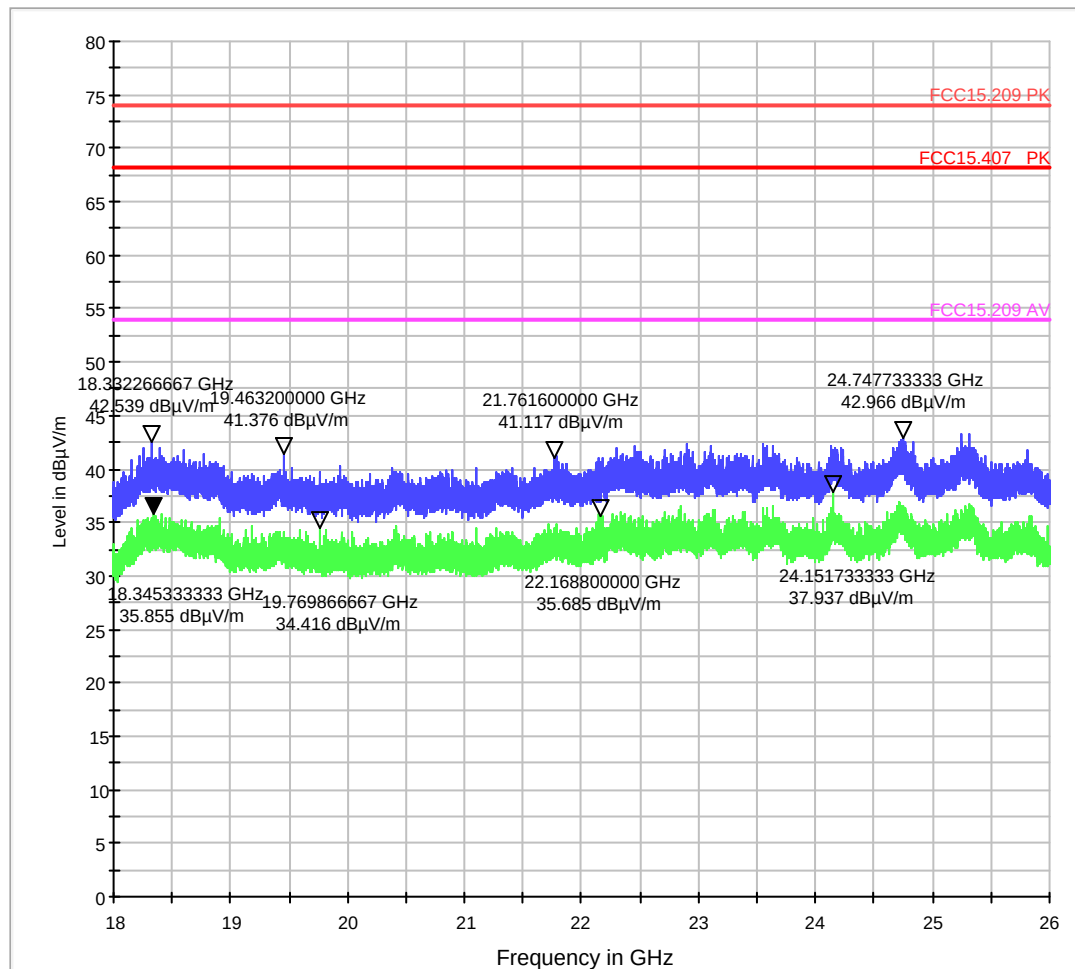


3.4.3. 8DPSK modulation

Diagram No.: 4.09_TX_ch78_3-DH5

Common Information

Test Description:	Radiated field strength emission in 1m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.247, 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Distance correction factor	3 to 1m: -10.5 dB applying to measurement results
SW-Version:	EMC32 V8.53.0
Operation mode:	TX mode continuous
Operator Name:	MFr
Comment:	Channel 78 . 3DH5

FCC_Sweep_15.407_18_40GHz_Pre

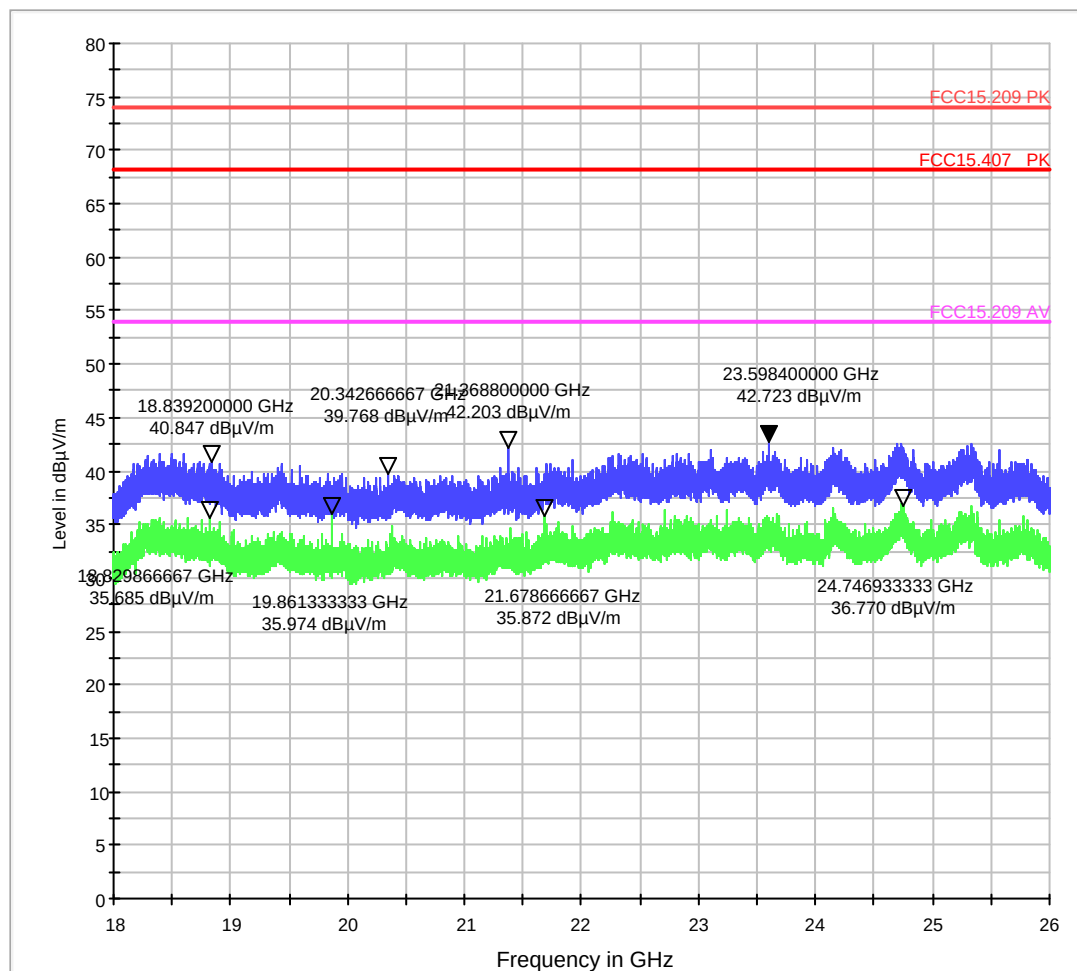

4. Radiated band-edge measurements accord. §15.209 & §15.205 (§15.247)

4.1. Channel 0 (left band edge)

Diagram No.: 9.01_BE_low_Ch00_DH5

Common Information

Test Description:	Radiated Band-Edge Emissions in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	MFr
Comment:	Channel no. low DH5

EUT Information

Manufacturer:	Bosch
EUT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

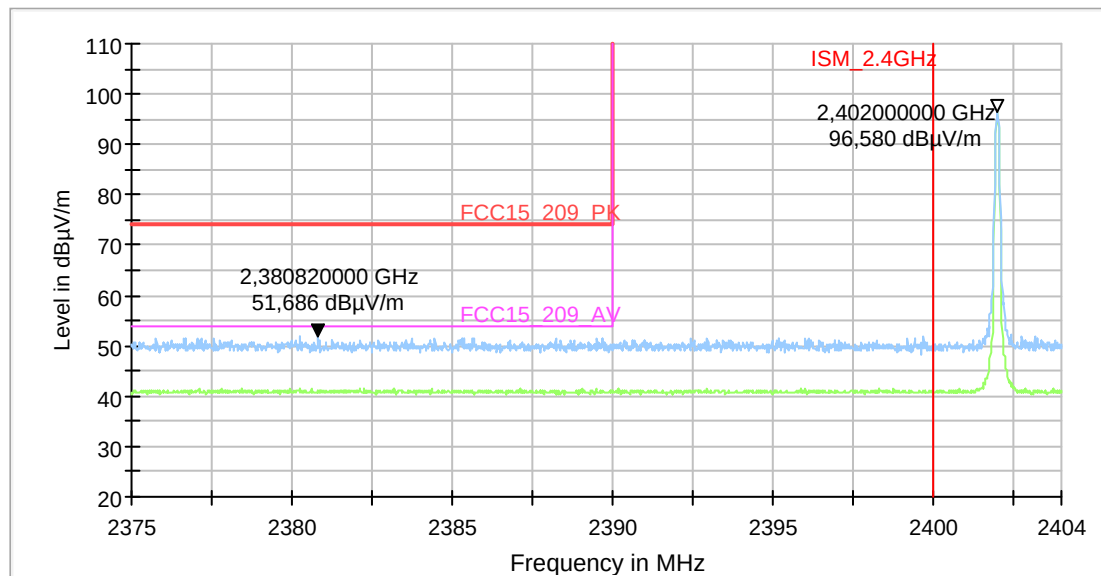



Diagram No.: 9.03_BE_low_Ch00_3-DH5

Common Information

Test Description:	Radiated Band-Edge Emissions in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	MFr
Comment:	Channel no00 low 3-DH5

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

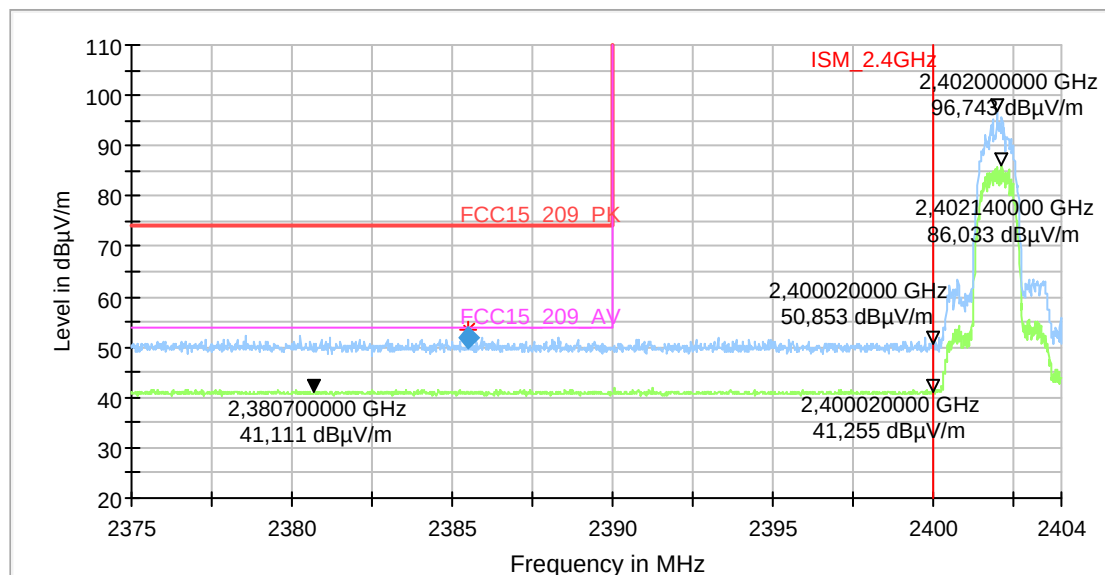

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)
2385.520000	51.83	---	74.00	22.17	100.0	100.000	155.0	H	211.0	90.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Correction	Comment
2385.520000	35.5	10:26:20 - 14.04.2015

4.2. Channel 78 (right band edge)

Diagram No.: 9.04_BE_high_Ch78_DH5

Common Information

Test Description:	Radiated Band-Edge Emissions in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	Lor
Comment:	Channel78 high DH5

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

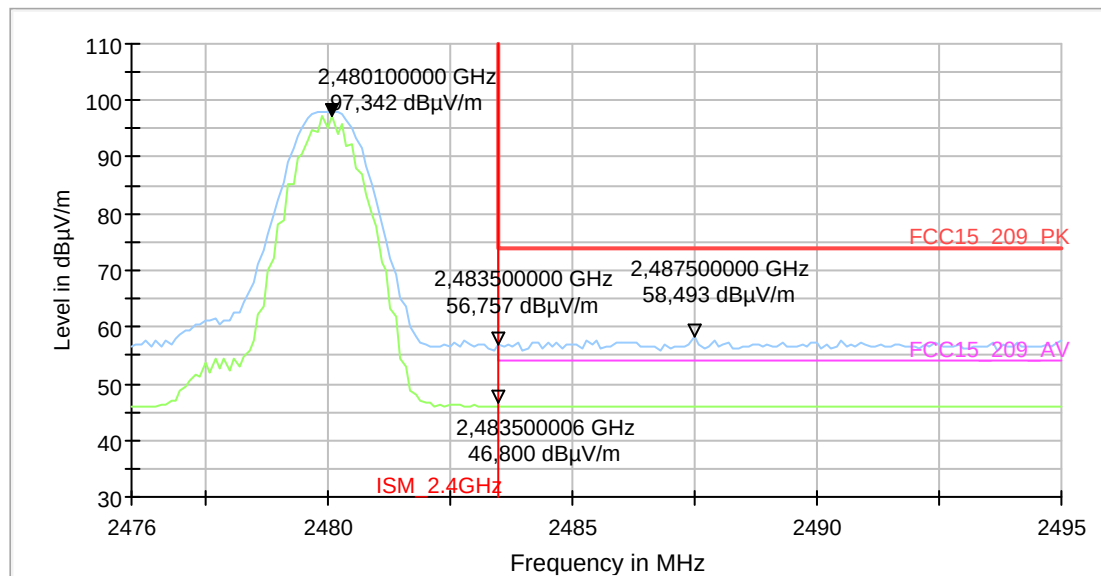



Diagram No.: 9.02_BE_high_Ch78_3DH5

Common Information

Test Description:	Radiated Band-Edge Emissions in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TX, continuous
Operator Name:	MFr
Comment:	Channel78 low 3DH5

EUT Information

Manufacturer:	Bosch
EuT:	LCN2K70B10
HW Version:	051
SW Version:	F014
Serial Number:	3130494
Connected Interfaces:	-
Power Supply:	via external power supply, nomVolt: 13.50 VDC
Comments:	

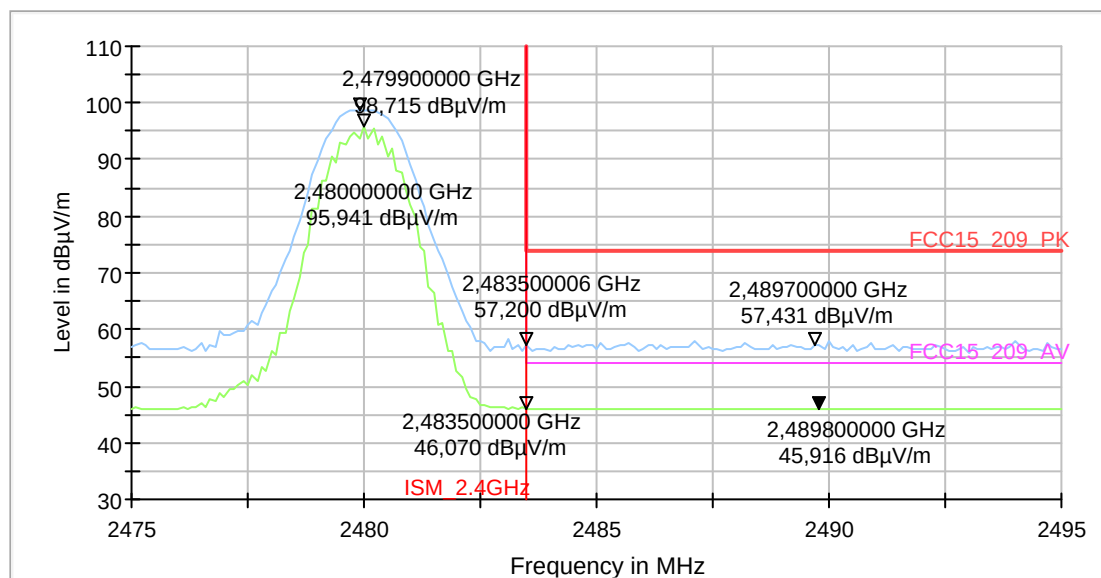

5. MPE calculation

A minimum distance to the user of 20cm is assumed.

Following calculations show assumption with the limits with a duty-cycle of 60%. (3 active slots maximum of a maximum of 5 slots)

Operation Mode	Frequency on channel (MHz)	Declared maximum conducted output power (dBm)	Antenna Gain Max. (dBi)	Max. positive tolerance according manufacturer (dB)	Declared maximum output power (Measured+ Tune-up) (dBm)	Duty cycle	Declared Maximum conducted output power (W)	Equivalent conducted output power (maximum conducted output power x duty cycle) (mW)
BT 2.4GHz	2402,0	1,83	4,20	0,00	6,03	60%	0,004	2,4
	2441,0	1,33	4,20		5,53		0,004	2,1
	2480,0	0,24	4,20		4,44		0,003	1,7

Maximum calculated MPE value:		
MPE-Limit:	1	[mW/cm ^2]
Highest MPE value:	0,0005	[mW/cm ^2]
Margin to limit	0,9995	[mW/cm ^2]

Note: the device is exempt from routine (RF exposure) evaluation because the eirp exemption limit for 2480MHz is 33.7dBm (see 2.5.2 of RSS-102 i5) which is way above the eirp of the BT transmitter under consideration