



Test report issued under the responsibility of:
EMITECH MONTPELLIER laboratory
MRA US-EU Designation Number: FR0006
Canadian CAB Identifier: FR0003

RADIO TEST REPORT

FCC 47 CFR PART 15: June 2023
RSS-210 _ Issue 10, December 2019 / AMD: April 2020

Company : **STMICROELECTRONICS (Rousset) SAS**
Address..... : 190 AVENUE CELESTIN COQ
13106 ROUSSET
FRANCE

Test item description. : **NFC card reader evaluation board**
Trade Mark. : STMICROELECTRONICS
Manufacturer..... : STMICROELECTRONICS
Model/Type reference..... : STEVAL-25R200SA (with Dual antenna)
FCC ID..... : YCPR200AD1
IC. : 8976A-R200AD1
Ratings..... : 5 V_{DC}

Testing Laboratory : **EMITECH MONTPELLIER laboratory**
Address..... : 145 rue de Massacan
34740 VENDARGUES
FRANCE

Report Reference No...... : **RR-EVE-22P033-8A**
Test procedure. : FCC IC Certification
Diffusion..... : Mr. David DAUBOIS
Applicant's name. : STMICROELECTRONICS
Date of issue..... : October 29, 2024
Total number of pages..... : 32
Revision..... : 0
Compiled by..... : Morgan PATEY
Approved by (+ signature)..... : Olivier AELBRECHT (Technical Manager)

*Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of
the whole manufactured products of the tested sample.*

REPORT INDEX:

1. GENERAL INFORMATIONS	3
2. REFERENCE DOCUMENT(S)	4
3. EQUIPMENT TECHNICAL DESCRIPTION	5
3.1. TEST CONDITIONS	5
3.2. EUT MARKING PLATE	5
3.3. EUT GENERAL VIEW	6
3.4. EUT MECHANICAL AND ELECTRICAL DESIGN	7
3.5. E.U.T. INPUT/OUTPUT PORTS	7
3.6. SUPPORTING EQUIPMENT USED DURING TEST	8
3.7. EUT RADIO SPECIFICATIONS	9
4. RESULT SUMMARY	10
5. MEASUREMENT UNCERTAINTY	12
6. TEST CONDITIONS AND RESULTS	13
6.1. AC POWER-LINE CONDUCTED EMISSIONS	13
6.2. OCCUPIED BANDWIDTH	16
6.3. RADIATED SPURIOUS EMISSIONS	18
6.4. FIELD STRENGTH IN THE BAND 13.553-13.567MHZ	27
6.5. FIELD STRENGTH OUTSIDE THE BAND 13.110-14.010MHZ	29
6.6. MEASUREMENT OF FREQUENCY STABILITY	31

REVISION HISTORY:

Revision	Date	Modified pages	Modifications
0	October 29, 2024	/	Creation

1. GENERAL INFORMATION

This document submits the results of Radio tests performed on the equipment **NFC card reader evaluation board STEVAL-25R200SA (with Dual antenna)** (denominated hereafter E.U.T.: equipment under test) according to document(s) listed in §2 of this test report.

TESTING PROCEDURE AND TESTING LOCATION:					
Testing Location		EMITECH MONTPELLIER laboratory & Open Area Test Site in SALINELLES (30)			
Address.		145 rue de Massacan 34740 VENDARGUES FRANCE			
Test procedure.		FCC IC Certification			
Tested by		Morgan PATEY			
Test supervisor		None			
Date of receipt of test item		N/A			
Date (s) of performance of tests		From August 28 th to September 01 st of 2023			
APPLICANT'S GENERAL INFORMATIONS:					
Company name		STMICROELECTRONICS (Rousset) SAS			
Company address.		190 AVENUE CELESTIN COQ 13106 ROUSSET FRANCE			
Person(s) present during the tests.		No representative for company attended the tests.			
Responsible		Mr. David DAUBOIS			
GENERAL REMARKS:					
The information in <i>italics</i> is declared by the manufacturer and is under his responsibility The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report the decimal separator is point.					
POSSIBLE TEST CASE VERDICTS:					
Test case does not apply to the test object.:		N/A			
Test case not performed.....		N/P			
Test object does meet the requirement.....		P (Pass)			
Test object does not meet the requirement.		F (Fail)			
DEFINITIONS AND ABBREVIATIONS:					
E.U.T.	Equipment Under Test	AE	Ancillary Equipment	Pk	Peak detector
RBW	Resolution BandWidth	VBW	Video BandWidth	QP	Quasi-peak detector
OATS	Open Area Test Site	FAR	Full Anechoic Room	Av	Average detector
VP	Vertical Polarization	HP	Horizontal Polarization	RMS	Root Mean Square
RF	Radio Frequency	N.T.R	Nothing To Report	N/C	Not Communicated

2. REFERENCE DOCUMENT(S)

NORMATIVE REFERENCES:

The following referenced documents are necessary for the application of the present test report.

FCC 47 CFR PART 15: June 2023

Code of federal regulations – Title 47 telecommunication - Part 15 - Radio frequency devices

FCC Part 15.225

Operation within the bands 13.553-13.567MHz

RSS-210, Issue 10, December 2019 / AMD: April 2020

Licence-Exempt Radio Apparatus: Category I Equipment

RSS-GEN: Issue 5 April 2018 / AMD 1: 2019 / AMD 2: 2021

General Requirements for Compliance of Radio Apparatus

ANSI C 63.10: 2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Although the product standard uses obsolete technical standards, the latest versions of standards achievable by the laboratory will be used for testing.

INFORMATIVE REFERENCES:

The following referenced documents are not necessary for the application of the present test report but they assist the user with regard to a particular subject area.

3. EQUIPMENT TECHNICAL DESCRIPTION


3.1. Test Conditions

Test item description. : NFC card reader evaluation board
Model/Type reference..... : STEVAL-25R200SA (with Dual antenna)
Trade Mark. : STMICROELECTRONICS
Serial number (S/N)..... : Not communicated
Part number (P/N). : Not communicated
Software version..... : *Not communicated*
Firmware version..... : *Not communicated*
Type of sample..... : Pre-serial
Function(s)..... : NFC demo board
Manufacturer name. : STMICROELECTRONICS
Address. : 776 RUE ALBERT CAQUOT
SKY SOPHIA BAT B
06410 BIOT
FRANCE



General product information:

N/A

3.2. EUT Marking plate

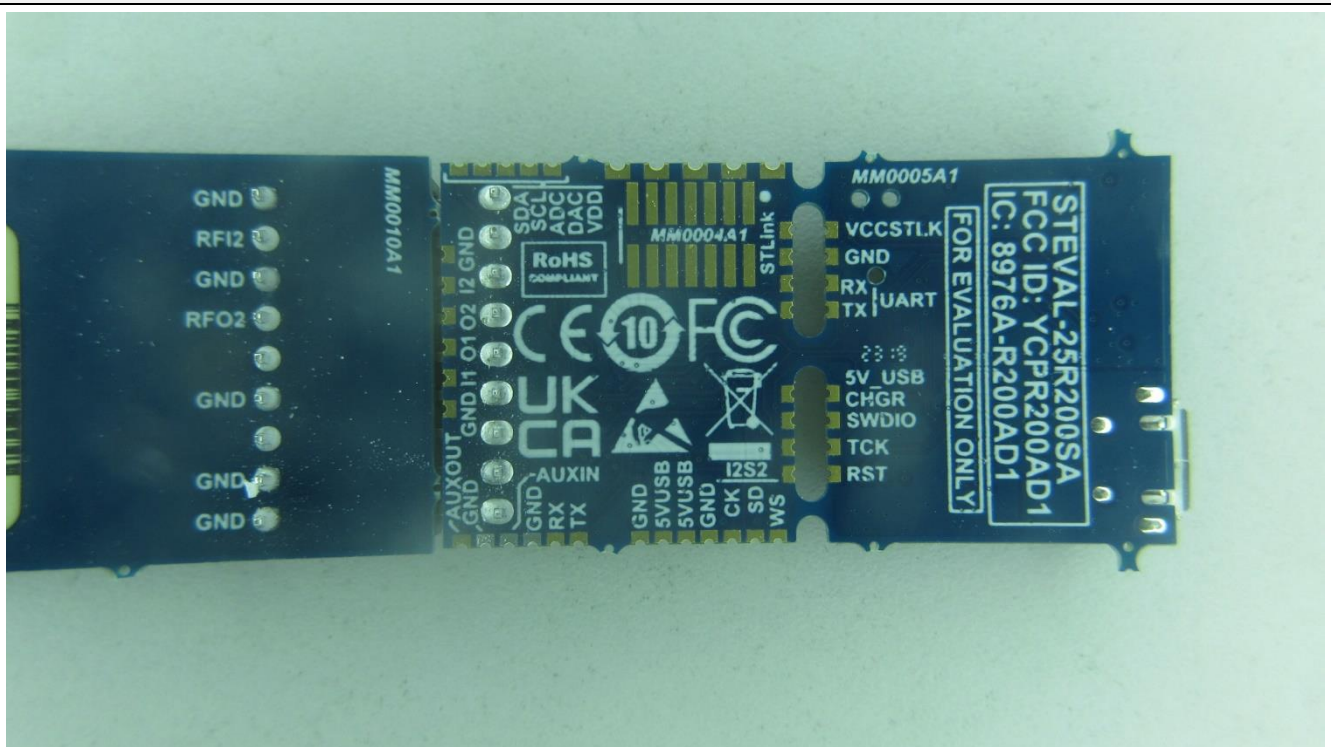

3.3.EUT General view

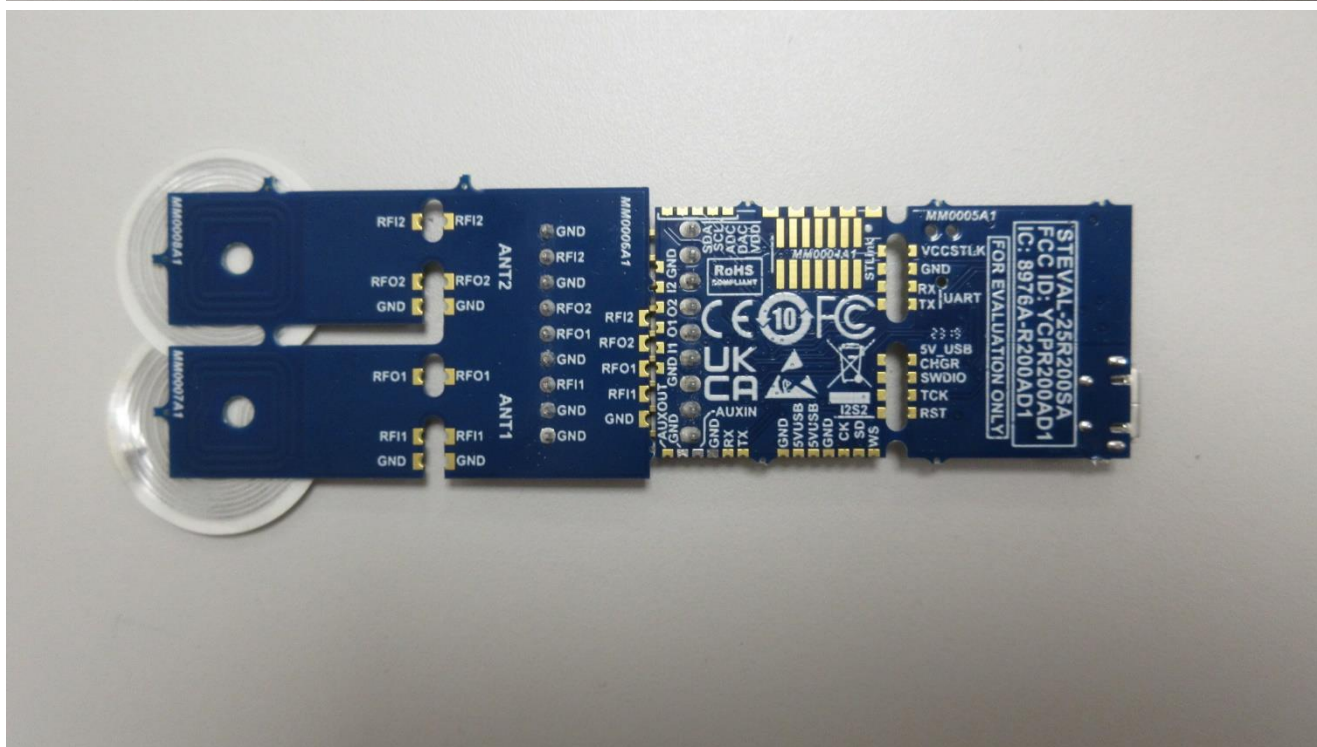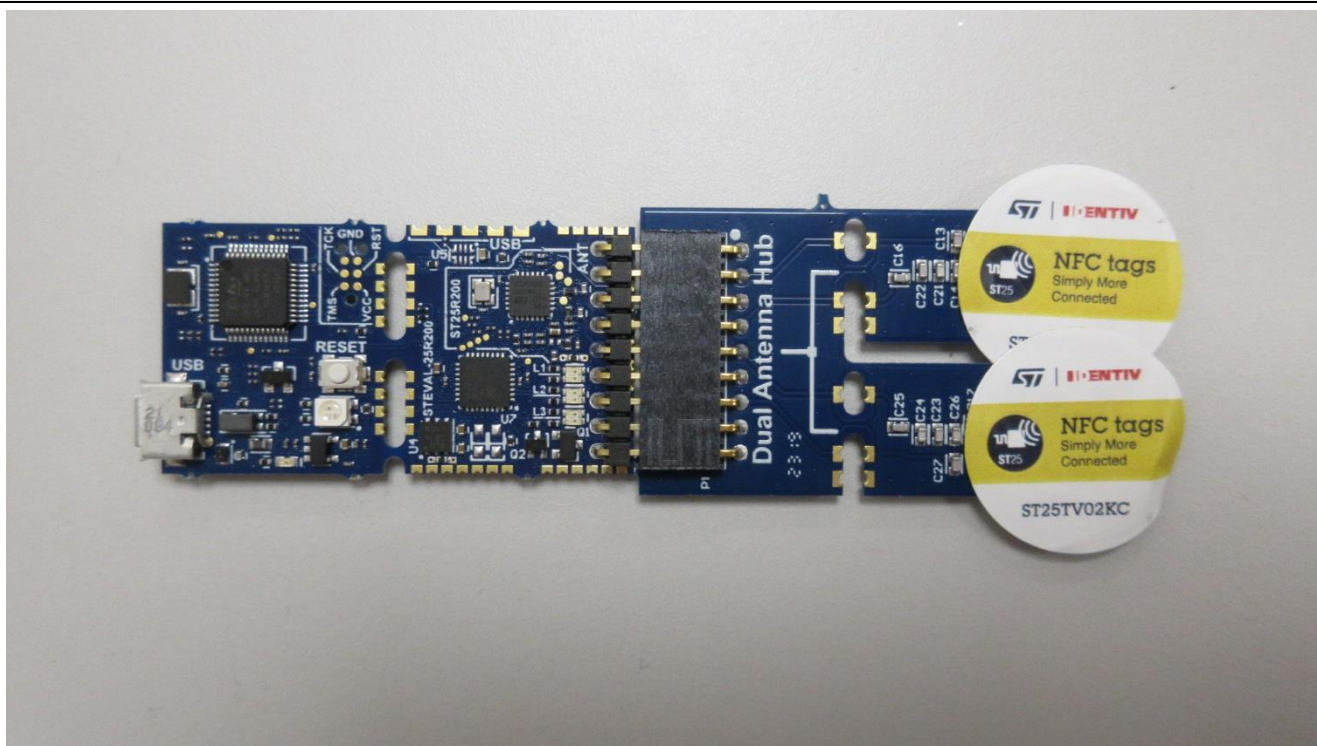


3.4.EUT Mechanical and Electrical Design

Power supply. : 5 Vdc
 Power supply range..... : 5 Vdc
 Power type..... : USB
 Power (W)..... : Not communicated
 Nominal current (A). : Not communicated
 Dimensions (L x W x H) (m). : Not communicated
 Weight (kg). : Not communicated
 Temperature range (°C). : +10 to +40
 Ground bounding strap..... : No

Comments:

N/A

3.5.E.U.T. Input/Output ports

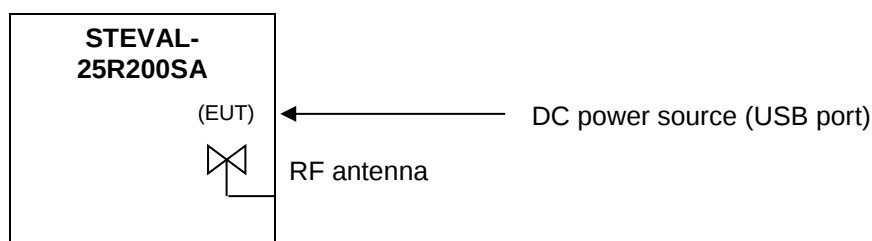

PORT	NAME	TYPE	LENGTH	CABLE TYPE	COMMENTS
0	Main frame	N/E	N/A	PCB	N/A
1	DC power source	USB	<3m	+/-	5Vdc
2	RF antenna	RF	N/A	N/A	PCB

AC/DC : AC/DC Converter port AC..... : Alternative current port DC..... : Direct current port
 I/O : Input or Output port TP : Telecommunication port RF : Radio frequency port
 N/E : Non Electrical port

3.6. Supporting Equipment Used During Test

Sample subject to the tests was tested with following equipment.

PRODUCT TYPE	MANUFACTURER	MODEL	N°EMITECH / COMMENTS
NFC TAG	STMICROELECTRONICS	ST25TV02KC	Used to maintain a NFC communications.
Power Bank	Xindao B.V.	P324.25	Used as EUT's power supply for OATS measurements
AC to 5Vdc USB converter	Pro-Power	MWUSB3U	Used as EUT's power supply.

NFC TAG (AE)



POWER BANK (AE)



AC TO 5Vdc USB CONVERTER (AE)



3.7. EUT Radio Specifications

a) GENERAL INFORMATIONS	
According to manufacturer's declarations :	
EUT type.....	Transceiver
Technology	RFID
Environmental profile.....	Data transmissions
Temperature range.....	+10°C to +40°C
Antenna type	PCB
Antenna Gain.....	Not communicated
Comments:	
N/A	
b) TRANSMITTER PARAMETERS (Tx)	
Frequency bands.....	13.553 MHz to 13.567 MHz
RF Power.....	Not communicated
Number of channels / Separation.....	1
Modulation type	AM
Duty cycle	100%
Tested frequency.....	13.56 MHz
c) RECEIVER PARAMETERS (Rx)	
Frequency bands.....	13.553 MHz to 13.567 MHz

4. RESULT SUMMARY

TEST DESIGNATION	SEVERITY	VERDICT	COMMENTS
GENERAL			
Labeling requirements		N/P	15.19 / See certification documents
Information to user		N/P	15.21 / See certification documents
Home-built devices		N/A	15.23
Kits		N/A	15.25
Special Accessories		N/P	15.27 / See certification documents
Inspection by the Commission		N/A	15.29
Measurement standards		PASS	15.31
Test procedure for CPU boards and computer power supplies		N/A	15.32
Frequency range of radiated measurements		PASS	15.33
Measurement detector functions and bandwidths		PASS	15.35
Transition provisions for compliance with the rules		N/P	15.37 / See certification documents
UNINTENTIONAL RADIATORS			
Equipment authorization			15.101
- Verification		N/A	
- Declaration of Conformity		N/A	
CPU boards and power supplies used in personal computers		N/A	15.102
Exempted device		N/A	15.103
Information to the user		N/P	See certification documents
Conducted limits	Class B	PASS	15.107
Radiated emission limits	Class B	PASS	15.109
Antenna power conduction limits for receivers		N/A	15.111
Power line carrier systems		N/A	15.113
TV interface devices, including cable system terminal devices		N/A	15.115
TV broadcast receivers		N/A	15.117
Cable ready consumer electronics equipment		N/A	15.118
Program blocking technology requirements for TV receivers		N/A	15.120
Scanning receivers and frequency converters used with scanning receivers		N/A	15.121
Labeling of digital cable ready products		N/A	15.123
INTENTIONAL RADIATORS			

TEST DESIGNATION	SEVERITY	VERDICT	COMMENTS
Equipment authorization requirement		PASS	15.201 / Transmitter part is subject to Certification procedure
Certified operating frequency range		N/A	15.202
Antenna requirement		PASS	15.203 / Dedicated integral antenna
External radio frequency power amplifiers and antenna modifications		N/A	15.204
Restricted bands of operation		PASS	15.205
Conducted limits		PASS	15.207
Radiated emission limits; general requirements		PASS	15.209
Tunnel radio systems		N/A	15.211
Modular transmitters		N/A	15.212
Cable locating equipment		N/A	15.213
Cordless telephones		N/A	15.214
Additional provisions to the general radiated emission limits		PASS	15.215
Operation within the band 13.110-14.010 MHz.		PASS	15.225
- Field strength in the band 13.553-13.567 MHz		PASS	(a)
- Field strength in the band 13.410-13.553 MHz and 13.567-13.710 MHz		PASS	(b)
- Field strength in the band 13.110-13.410 MHz and 13.710-14.010 MHz		PASS	(c)
- Field strength outside the band 13.110-14.010 MHz		PASS	(d)
- Frequency tolerance of the carrier signal		PASS	(e)
- Radio frequency powered tag		N/A	(f) EUT is an RFID reader

Sample subject to the test complies with the requirements of the reference document(s) listed in §2 of this test report and, where applicable, with deviation(s) specified in this document.

To declare, or not, the compliance with the specifications, it was not explicitly taken account of uncertainty associated with the results.

Opinion(s) and interpretation(s): N/A

5. MEASUREMENT UNCERTAINTY

PARAMETER	MAXIMAL EMITECH UNCERTAINTY	MINIMAL STANDARD UNCERTAINTY
Radio frequency	$\pm 1 \times 10^{-7}$	$\pm 1 \times 10^{-7}$
Occupied bandwidth		
RF power	$\pm 3.8 \%$	$\pm 5 \%$
Supply voltages	$\pm 3 \%$	$\pm 3 \%$
Temperature	$\pm 1 ^\circ\text{C}$	$\pm 1 ^\circ\text{C}$
Humidity	$\pm 5 \%$	$\pm 5 \%$
Conducted emission (FCC)		
(Artificial Mains Network) 150kHz – 30MHz	$\pm 3.4 \text{ dB}$	$\pm 3.4 \text{ dB}$
Radiated emission (electric field for FCC standard)		
9kHz – 30MHz	$\pm 2.7 \text{ dB}$	/
30MHz – 1GHz	$\pm 5.0 \text{ dB}$	/
1GHz – 18GHz	$\pm 5.3 \text{ dB}$	/
18GHz – 40GHz	$\pm 6.1 \text{ dB}$	/
40GHz – 140GHz	$\pm 5.7 \text{ dB}$	/

For the calculation of expanded uncertainty, the confidence interval is 95 % (k=2).

6. TEST CONDITIONS AND RESULTS

6.1. AC power-line conducted emissions

Reference standard:	FCC part 15.207 RSS-Gen
Test method:	ANSI C63.10: 2013
General test setup: EUT is set on an insulating support at 80cm above the horizontal ground reference plane, and at 40cm of the vertical ground reference plane. All power was connected to the system through Artificial Mains Network (AMN). The AMN is placed at 80cm from the boundary of the EUT and bonded to a ground reference plane.	

TESTED CABLE	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
120Vac / 60Hz	150kHz-30MHz	15.207	EMI4578	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	30 to 60 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: EUT power supply is done through a "standard power supply" which meets FCC and RSS requirements.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	GW Instek	APS-1102	17782	24/06/2023	24/08/2024
Cable	EMITECH	Current absorber sheath	18366	17/08/2023	17/10/2025
Cable	C&C	N-3m	14335	14/04/2023	14/06/2025
LISN	Rohde & Schwarz	ENV216	17925	24/09/2021	24/11/2023
Multimeter	FLUKE	8808A	10382	17/05/2023	17/07/2024
Receiver	Rohde & Schwarz	ESI	9704	18/11/2022	18/01/2024
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H1	7561	19/06/2023	19/08/2024
Thermohygrometer	Testo	608-H2	12268	24/10/2022	24/12/2024

Blank cells = Permanent validity


TEST SETUP PHOTO(S) – POWER SUPPLY USED FOR CONDUCTED MEASUREMENT



AC POWER-LINE CONDUCTED EMISSIONS - TABULATED RESULTS

120 VAC / 60 Hz					EMI4578
TERMINAL	FREQUENCY (MHz)	DETECTOR (Pk/QP/Av)	LEVEL (dBμV)	LIMIT (dBμV)	MARGIN (dB)
0.349	Neutral	Avg	29.29	48.98	-19.69
0.390	Neutral	Avg	41.05	48.06	-7.01
0.642	Neutral	Peak	37.30	46.00	-8.70
1.036	Neutral	Peak	35.16	46.00	-10.84
2.714	Neutral	Peak	33.09	46.00	-12.91
0.256	Line	Peak	39.06	51.57	-12.51
0.387	Line	Avg	35.07	48.13	-13.06
0.652	Line	Avg	18.54	46.00	-27.46
0.751	Line	Avg	21.33	46.00	-24.67
0.980	Line	Peak	38.90	46.00	-7.10
1.036	Line	Peak	38.54	46.00	-7.46
5.671	Line	Peak	37.55	50.00	-12.45

Supplementary information: When margin between peak measurements and Average or Qpeak limit(s) is > 6dB, no Average or Qpeak measurements were performed.

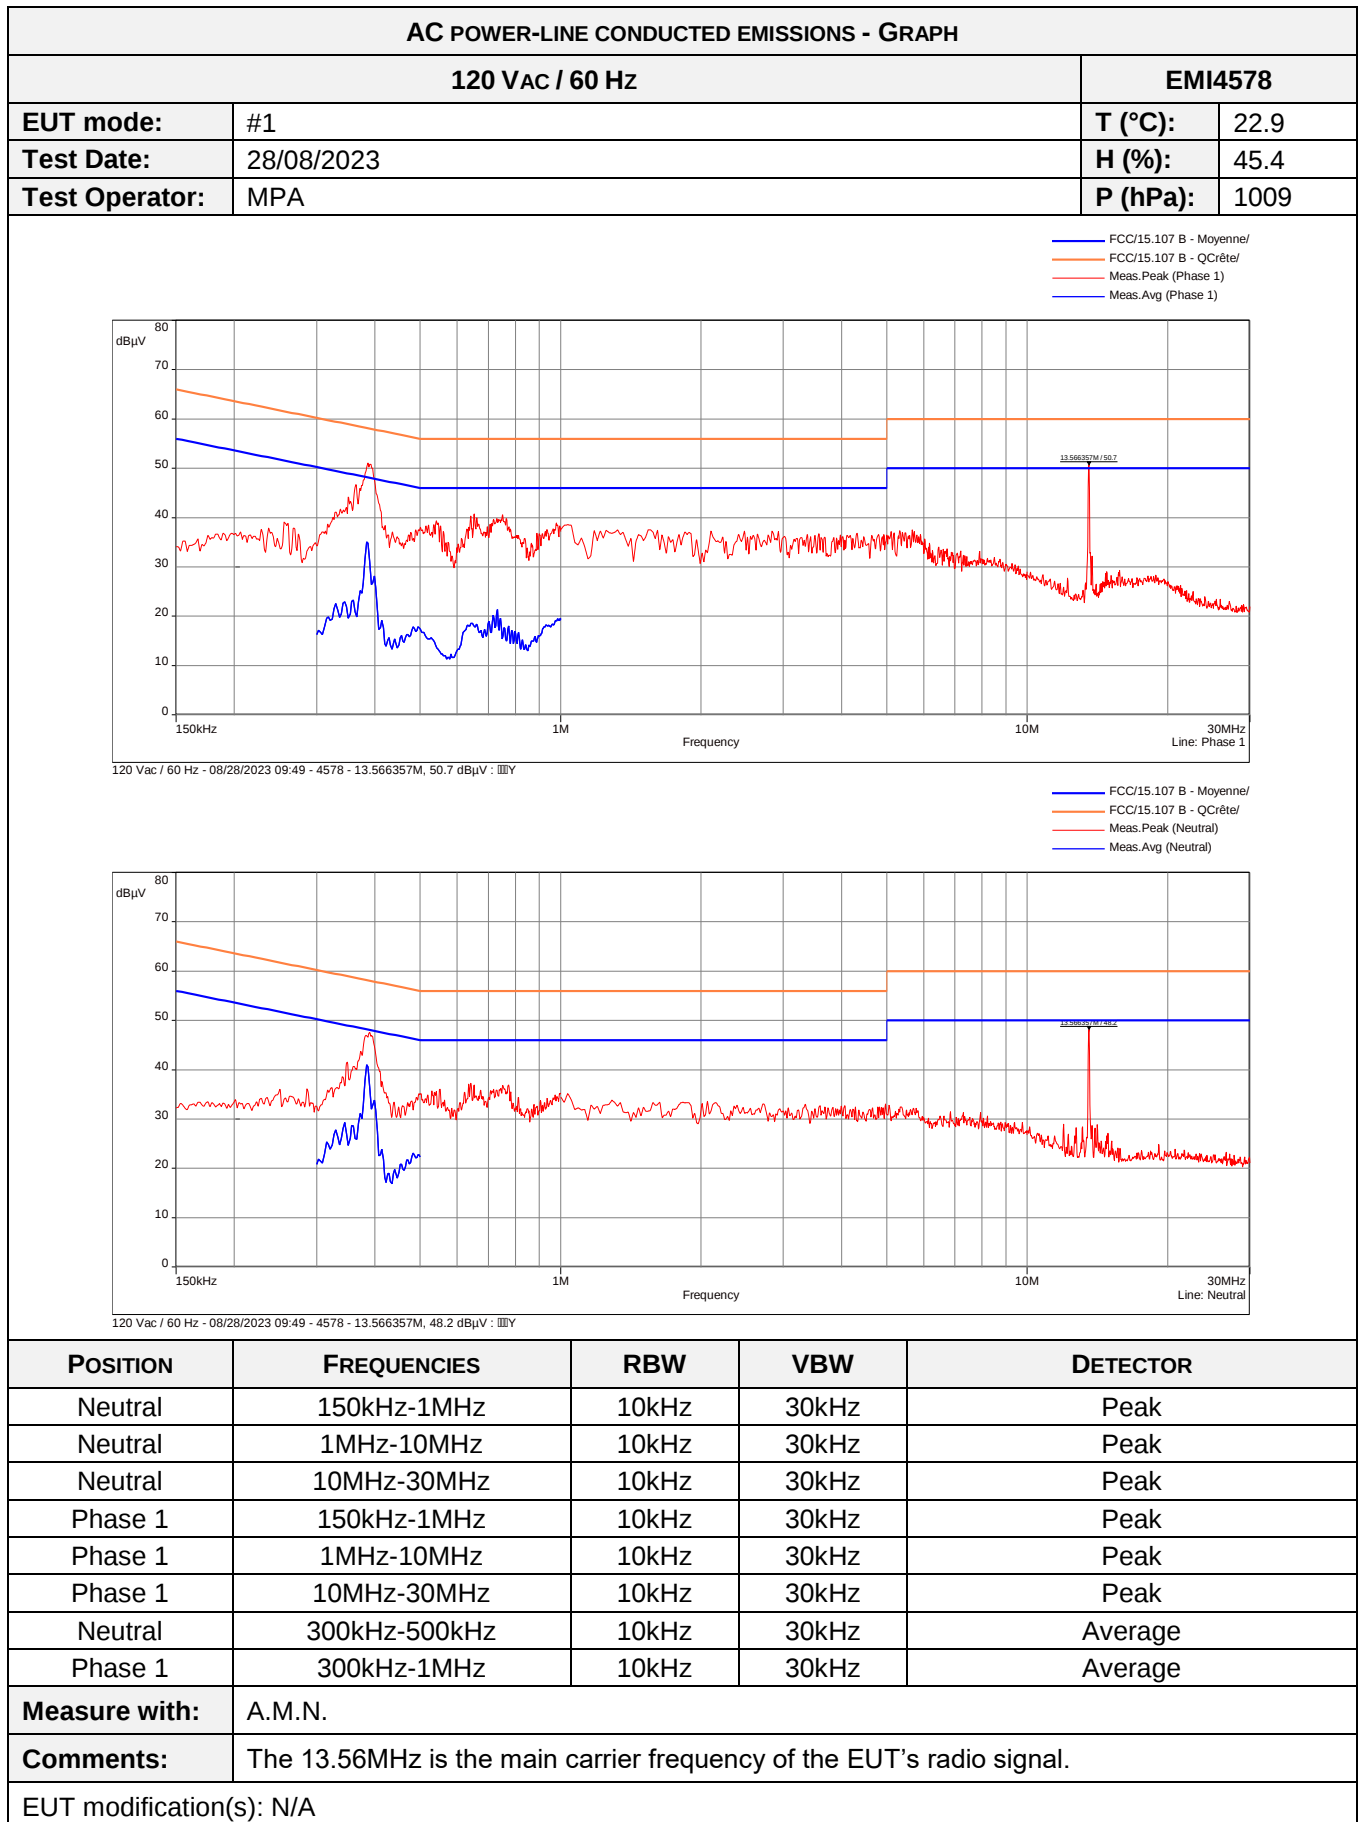

6.2. Occupied Bandwidth

Reference standard:	FCC part 15 Radio part 15.205 RSS-Gen
Test method:	ANSI C63.10: 2013
Test description: The occupied bandwidth (OBW) is the Frequency Range in which 99 % of the total mean power of a given emission falls. The residual part of the total power being denoted as β , which, in cases of symmetrical spectra, splits up into $\beta/2$ on each side of the spectrum. Unless otherwise specified, $\beta/2$ is taken as 0,5 %. The maximum occupied bandwidth includes all associated side bands above the appropriate emissions level and the frequency error or drift under extreme test conditions. EUT is connected to the measuring receiver via 50 Ω attenuator(s).	

TESTED CABLE	OBW	SEVERITY	RESULT TAB.	VERDICT
99% Bandwidth	10.900 kHz	<14kHz	EMI4470	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	20.7 °C
Relative Humidity	20 to 75 %	66.6 %
Atmospheric pressure	N/A	1020 hPa
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	EMITECH	3.5 cm	4653		
Attenuator	Radiall	R412720124	4391	30/09/2022	30/11/2025
Cable	MegaPhase	N-3m	14853	20/05/2022	20/07/2024
Receiver	Rohde & Schwarz	FSW43	14830	10/08/2022	10/11/2024
Thermohygrometer	Testo	608-H2	12268	24/10/2022	24/12/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	09/06/2021	09/02/2024

Blank cells = Permanent validity

OCCUPIED BANDWIDTH - GRAPH	
99% BANDWIDTH	
EMI4470	
EUT mode:	Tx mode
Test Date:	22/10/2024
Test Operator:	MPA
MultiViewSpectrum Ref Level 0.00 dBm RBW 300 Hz Att 0 dBSWT 6.97 ms (~8.9 ms)VBW 1 kHzMode FFT DC 1 Occupied Bandwidth	

6.3. Radiated spurious emissions

Reference standard:	FCC Part 15.225, 15.209 RSS-210, RSS-Gen
Test method:	ANSI C63.10: 2013
General test setup: For $f < 30\text{MHz}$, EUT is set on an insulating support at 80cm above the ground reference plane. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter in a semi-anechoic chamber. The EUT was rotated 360° in order to maximize radiated levels. Test antenna was oriented in 3 axes (0°, 45° and 90°). Final measurements (quasi-peak) were then performed in a 10-meter Open Area Test Site that complies to CISPR 16 in the same measurement conditions. For $f > 30\text{MHz}$, EUT is set on an insulating support at 80cm above the ground reference plane. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak or average) were then performed in a semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° about its azimuth and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated, where applicable. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Tx mode / 0°	9kHz-30MHz	§15.209	EMI4677	PASS
Tx mode / 45°	9kHz-30MHz	§15.209	EMI4678	PASS
Tx mode / 90°	9kHz-30MHz	§15.209	EMI4679	PASS
Radiated measurement	30MHz-1GHz	§15.209	EMI4634	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35°C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: From 9 kHz to 30MHz: limit indicated on the curves is calculated with 40 dB/decade extrapolation factor and 51.5 dB conversion factor. From 30MHz to 1GHz Quasi peak limit provided is the limit given in §15.209.		

TEST EQUIPMENT USED – 9 KHz TO 30 MHz					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	Rohde & Schwarz	HFH2-Z2	5825	16/08/2022	16/10/2024
Cable	/	N-1m	3625	02/05/2023	02/07/2025
Cable	Techniwave	N-3.5m	18353	25/01/2022	25/03/2024
Cable	Techniwave	N-4m	18355	25/01/2022	25/03/2024
Receiver	Rohde & Schwarz	FSW43	14830	10/08/2022	10/10/2024
Shielded enclosure	COMTEST	FAR-3m	18014	17/08/2021	17/10/2024
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H2	12269	07/06/2022	07/08/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	09/06/2021	09/02/2024


BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST EQUIPMENT USED – 30 MHz TO 1 GHz					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS lindgren	3142E	14523	27/01/2022	27/03/2025
Cable	SUCOFLEX	N-3m	14378	17/08/2023	17/10/2025
Cable	SUCOFLEX	N-6,5m	14380	17/08/2023	17/10/2025
Cable	Techniwave	N-8m	18349	17/08/2023	17/10/2025
Receiver	Rohde & Schwarz	ESW26	17791	08/02/2023	08/04/2024
Shielded enclosure	COMTEST	FAR-3m	18014	17/08/2021	17/10/2024
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H2	12268	24/10/2022	24/12/2024
Thermohygrometer	Testo	608-H2	12269	07/06/2022	07/08/2024

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

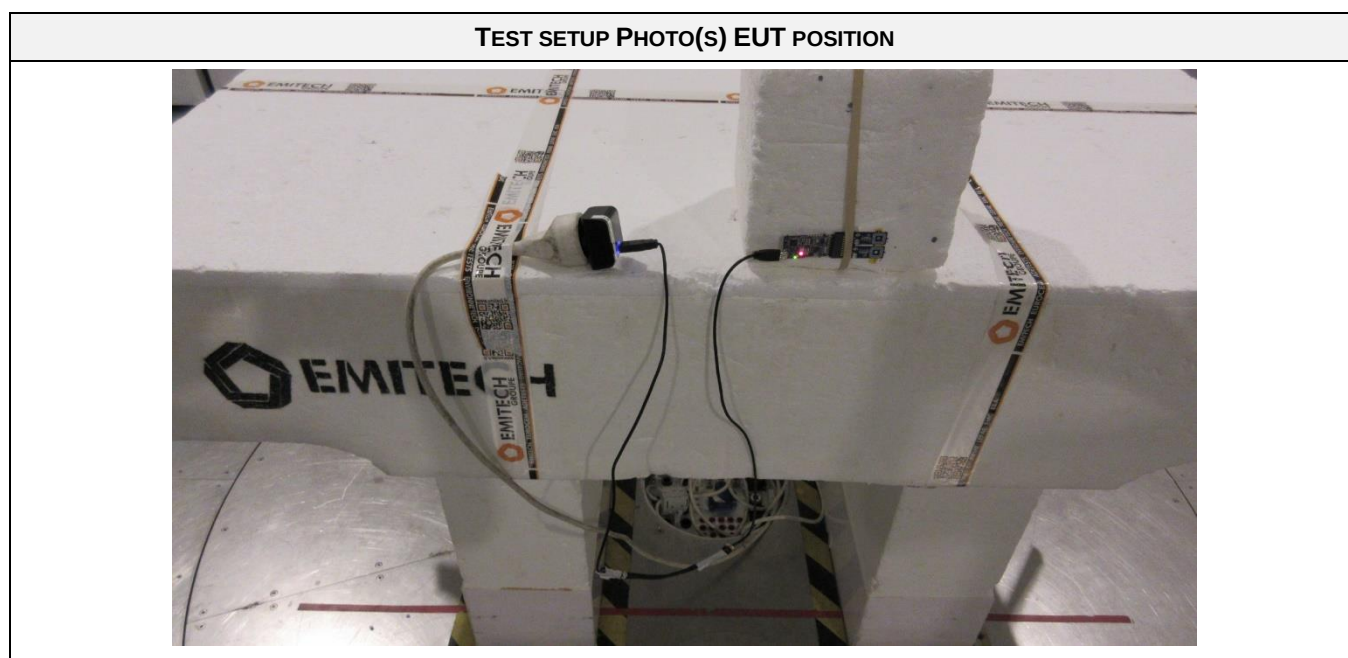

TEST SETUP PHOTO(S) RADIATED EMISSIONS (9kHz TO 30MHz)



TEST SETUP PHOTO(S) RADIATED EMISSIONS (30 MHz TO 1 GHz)





RADIATED SPURIOUS EMISSIONS – TABULATED RESULTS					
TX MODE / 0°					EMI4677
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμA/m)	AVERAGE/QPEAK LEVEL (dBμA/m)	AVERAGE/QPEAK LIMIT (dBμA/m)	MARGINING (dB)
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					


RADIATED SPURIOUS EMISSIONS – TABULATED RESULTS					
TX MODE / 45°					EMI4678
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμA/m)	AVERAGE/QPEAK LEVEL (dBμA/m)	AVERAGE/QPEAK LIMIT (dBμA/m)	MARGINING (dB)
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					


RADIATED SPURIOUS EMISSIONS – TABULATED RESULTS					
TX MODE / 90°					EMI4679
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμA/m)	AVERAGE/QPEAK LEVEL (dBμA/m)	AVERAGE/QPEAK LIMIT (dBμA/m)	MARGINING (dB)
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					

RADIATED SPURIOUS EMISSIONS – TABULATED RESULTS					
RADIATED MEASUREMENT					EMI4634
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμV/m)	QPEAK LEVEL (dBμV/m)	QPEAK LIMIT (dBμV/m)	MARGINING (dB)
35.497	Vertical	28.74	N/P	40.00	-11.26
40.670	Vertical	34.84	31.68	40.00	-8.32
52.375	Vertical	35.9	24.4	40.00	-15.6
54.283	Vertical	36.2	29.3	40.00	-10.7
56.126	Vertical	36.37	29.34	40.00	-10.66
67.799	Vertical	35.90	32.88	40.00	-7.12
86.521	Vertical	34.61	29.94	40.00	-10.06
94.507	Vertical	27.94	N/P	43.50	-15.56
94.927	Vertical	39.24	38.63	43.50	-4.87
122.024	Vertical	31.64	N/P	43.50	-11.86
135.572	Vertical	27.77	N/P	43.50	-15.73
149.152	Vertical	30.77	N/P	43.50	-12.73
153.259	Vertical	29.61	N/P	43.50	-13.89
176.281	Vertical	30.17	N/P	43.50	-13.33
189.829	Vertical	32.43	N/P	43.50	-11.07
203.409	Vertical	27.77	N/P	43.50	-15.73
216.958	Vertical	24.83	N/P	46.00	-21.17
244.086	Vertical	24.88	N/P	46.00	-21.12
271.215	Vertical	27.31	N/P	46.00	-18.69
298.311	Vertical	27.84	N/P	46.00	-18.16
325.440	Vertical	26.61	N/P	46.00	-19.39
352.568	Vertical	27.45	N/P	46.00	-18.55
461.050	Vertical	30.97	N/P	46.00	-15.03
542.436	Vertical	31.73	N/P	46.00	-14.27
30.000	Horizontal	23.53	N/P	40.00	-16.47
58.487	Horizontal	24.26	N/P	40.00	-15.74
67.799	Horizontal	36.68	36.29	40.00	-3.71
86.294	Horizontal	25.91	N/P	40.00	-14.09
94.927	Horizontal	25.82	N/P	43.50	-17.68
149.152	Horizontal	23.76	N/P	43.50	-19.74
176.281	Horizontal	25.32	N/P	43.50	-18.18
189.829	Horizontal	23.80	N/P	43.50	-19.7
203.409	Horizontal	21.09	N/P	43.50	-22.41
216.958	Horizontal	23.17	N/P	46.00	-22.83
244.086	Horizontal	25.31	N/P	46.00	-20.69
271.215	Horizontal	30.33	N/P	46.00	-15.67
298.311	Horizontal	30.64	N/P	46.00	-15.36
325.440	Horizontal	27.35	N/P	46.00	-18.65
352.568	Horizontal	31.91	N/P	46.00	-14.09
461.082	Horizontal	33.09	N/P	46.00	-12.91
488.179	Horizontal	30.49	N/P	46.00	-15.51
515.307	Horizontal	31.87	N/P	46.00	-14.13
542.436	Horizontal	33.80	N/P	46.00	-12.2
569.564	Horizontal	31.50	N/P	46.00	-14.5
Supplementary information: when margin between peak measurements and quasi-peak limit(s) is > 6dB, no quasi-peak measurements were performed					

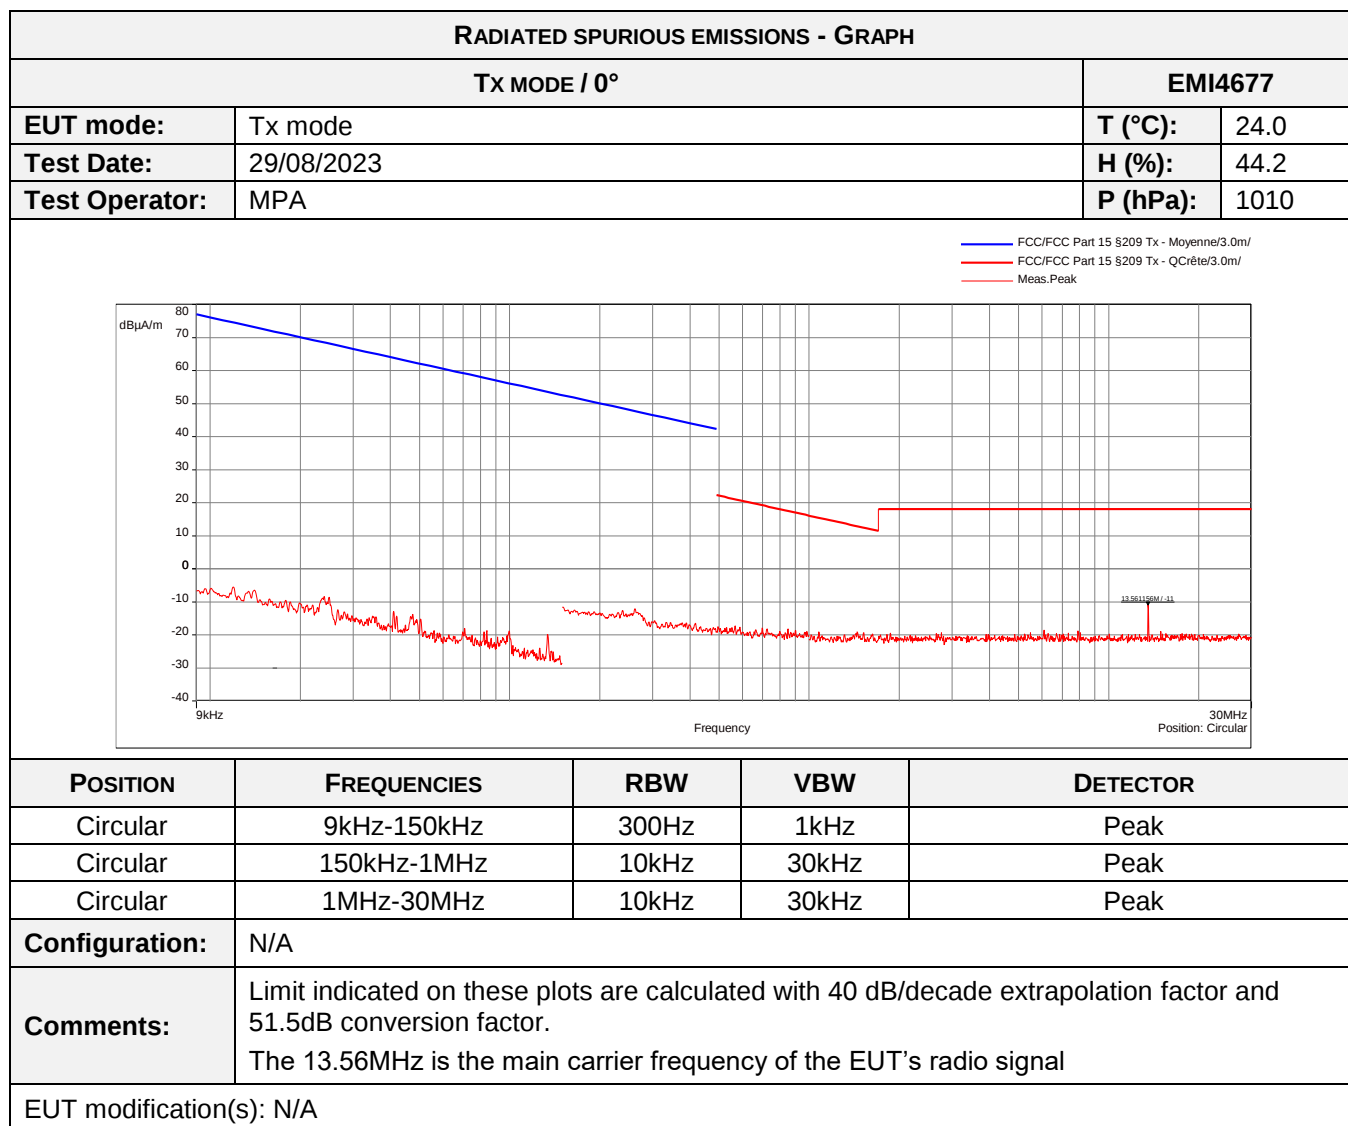

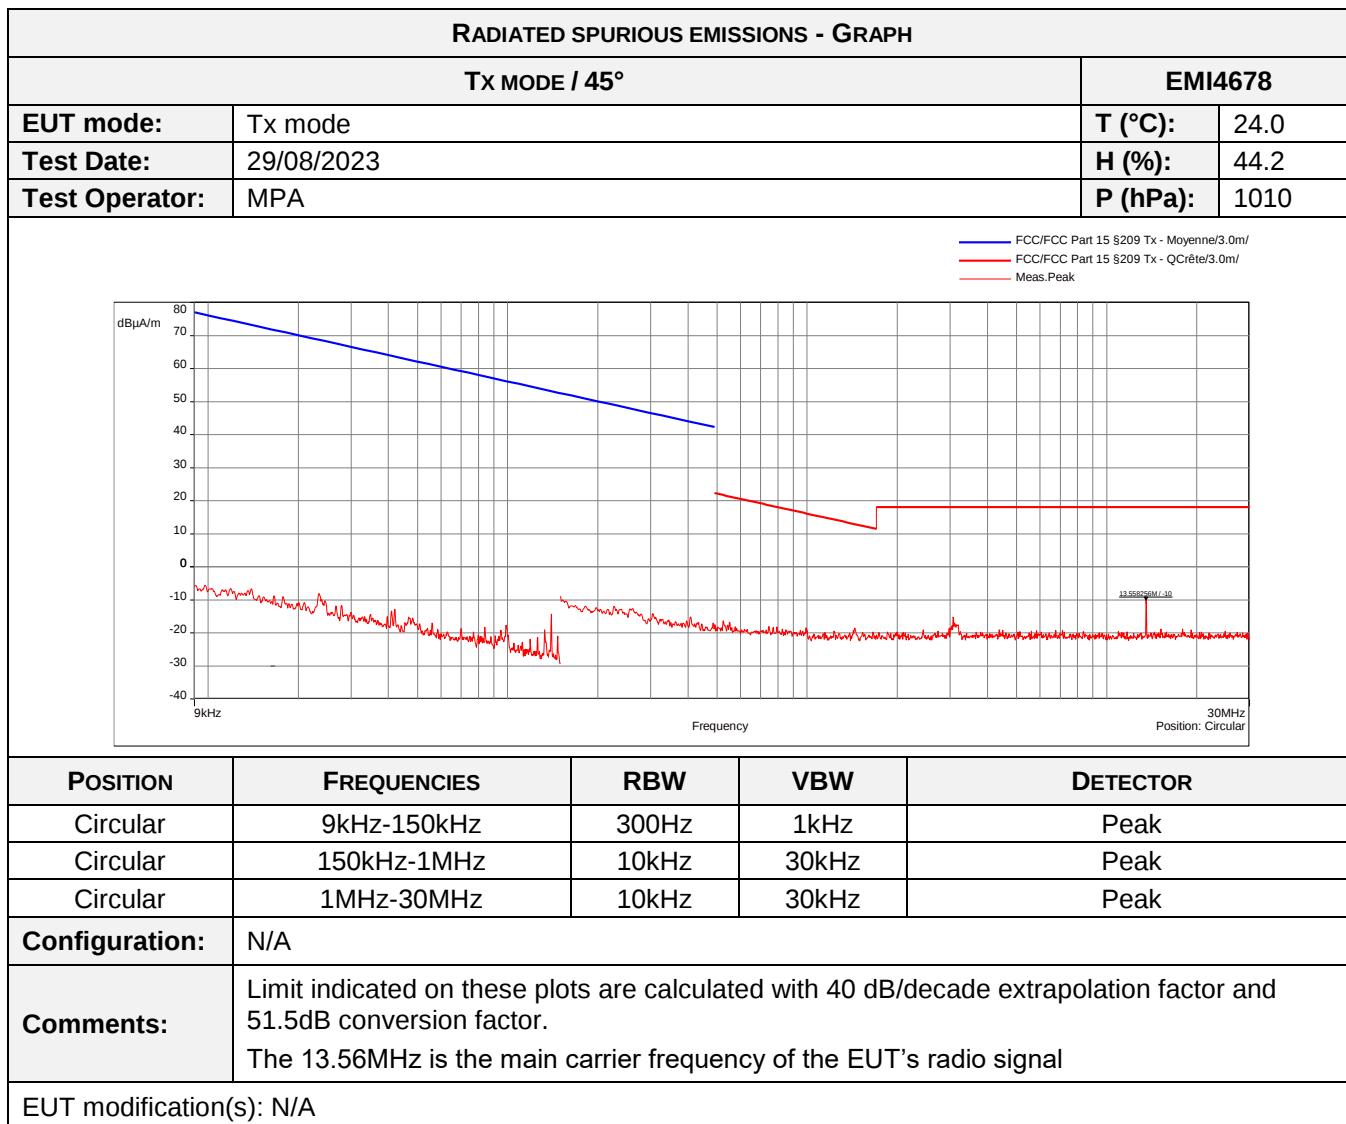

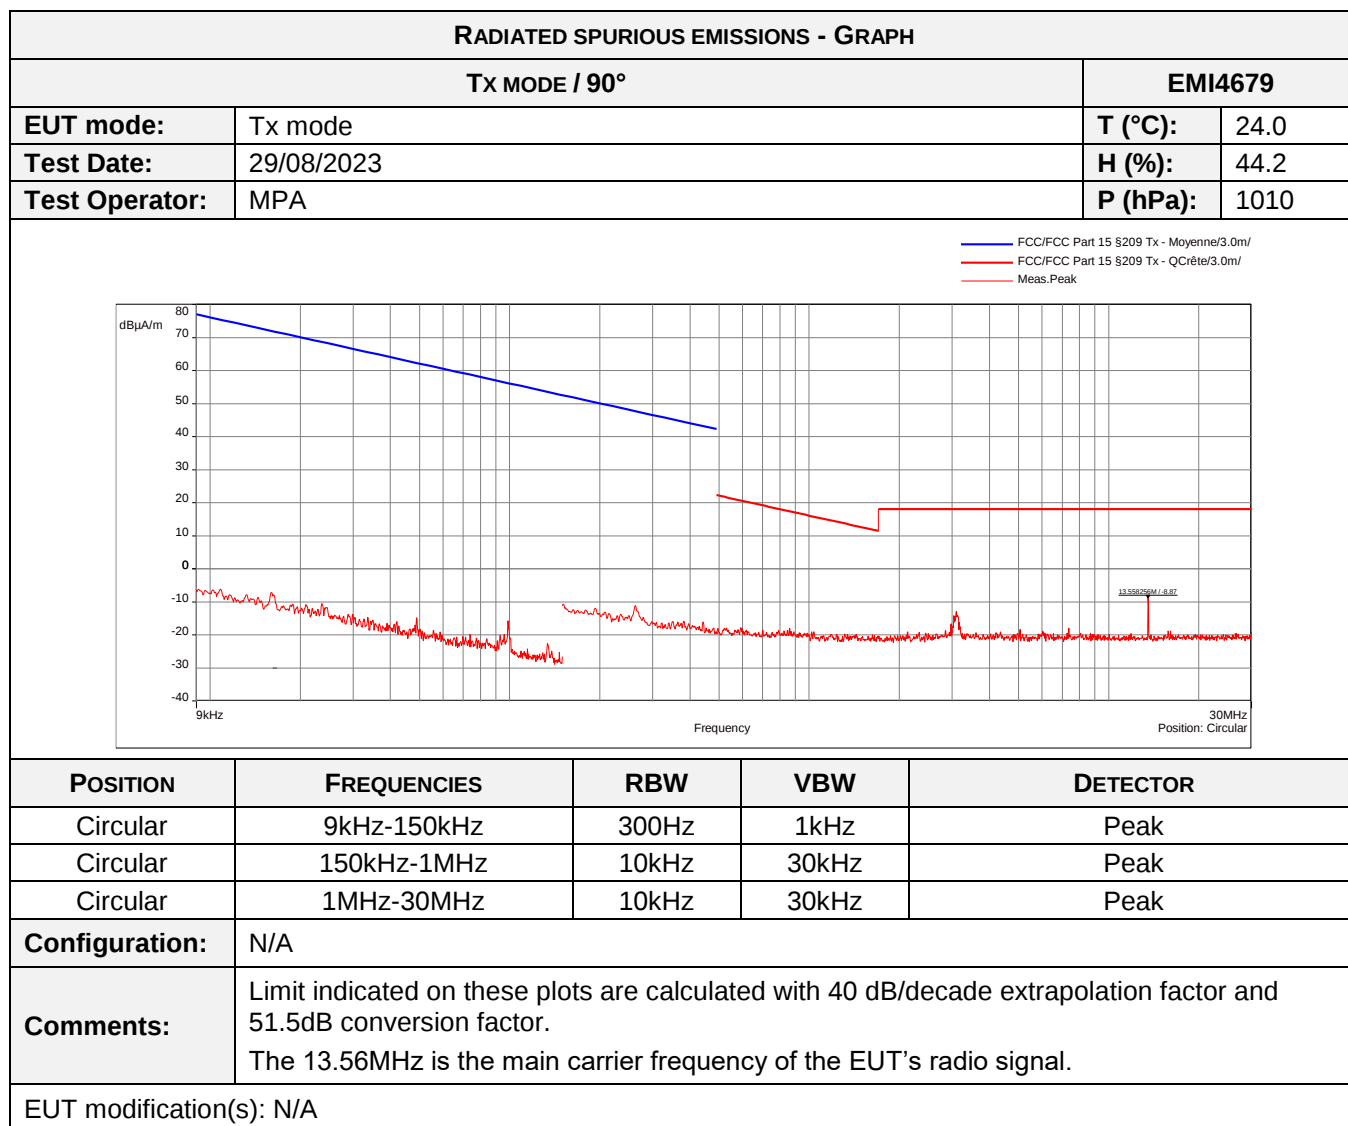

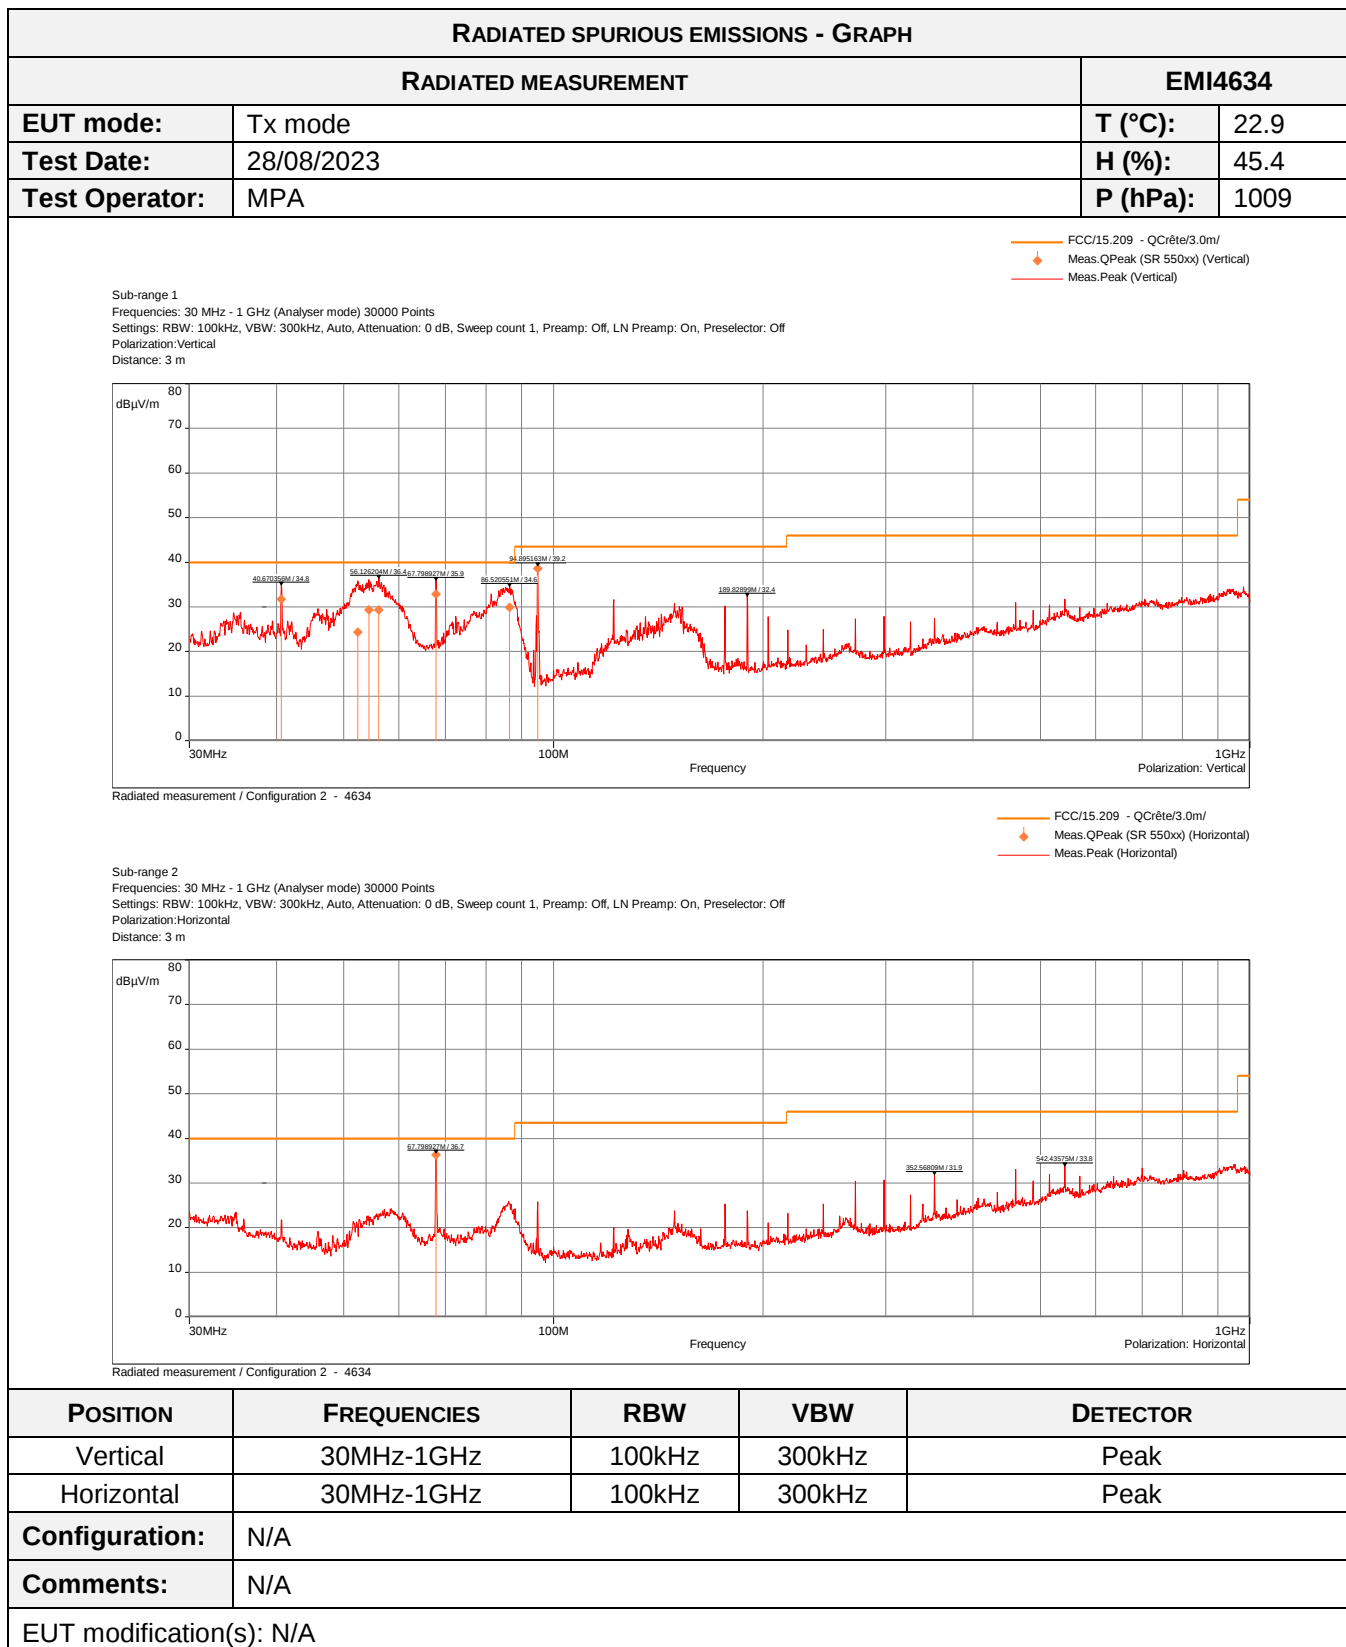

6.4. Field strength in the band 13.553-13.567MHz

Reference standard:	FCC Part 15.225 a) RSS-210
Test method:	ANSI C63.10: 2013
General test setup: EUT is set on an insulating support at 80cm. Measurements were then performed in a 10-meter Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° in order to maximize radiated levels. Test antenna was oriented in 3 axes (0°, 45° and 90°). For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	


TEST CASE	EUT MODE	SEVERITY	RESULT TAB.	VERDICT
Field strength / 13.56MHz	Tx mode	15848µV/m at 30m	EMI4400	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	22.6 °C
Relative Humidity	20 to 75 %	56.6 %
Atmospheric pressure	N/A	1017 hPa
Test method deviation: N/A		
Supplementary information: Only maximum level is recorded		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	Rohde & Schwarz	HFH2-Z2	5825	16/08/2022	16/10/2024
Cable	Huber + Suhner	N-10m	8472	16/08/2023	16/10/2025
Open area test site	EMITECH	Salinelles	3482	21/08/2021	21/10/2024
Receiver	Rohde & Schwarz	ESHS10	3371	04/05/2023	04/07/2024
Thermohygrometer	Testo	608-H2	12268	24/10/2022	24/12/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	09/06/2021	09/02/2024

Blank cells = Permanent validity

TEST SETUP PHOTO(S) – EUT POSITION

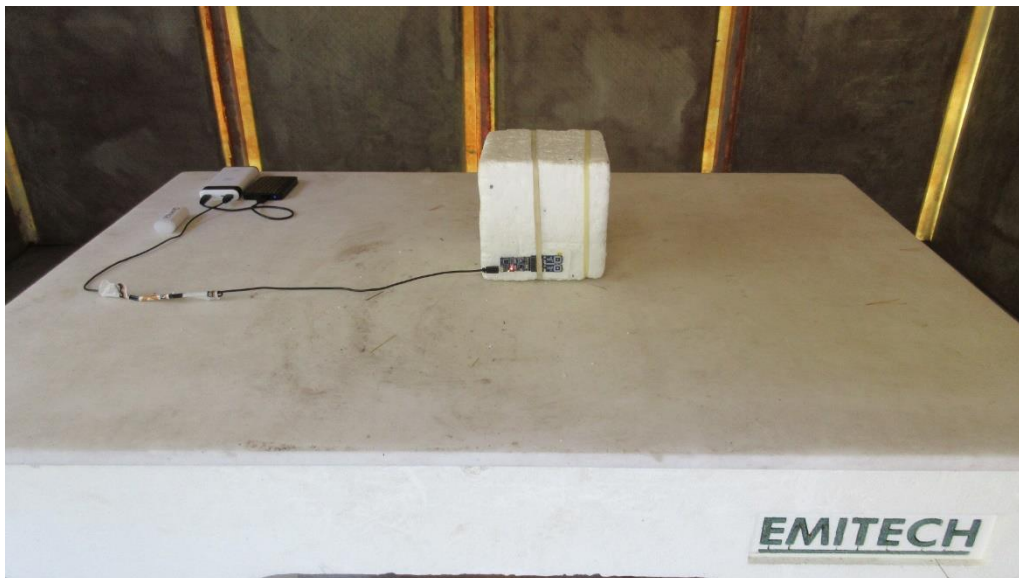

TEST SETUP PHOTO(S)



FIELD STRENGTH - TABULATED RESULTS				EMI4400
Frequency (MHz)	Polarization (°)	Level at 10m (dBμA/m)	Limit at 10m (dBμA/m)	Limit at 30m (μV/m)
13.56	0	-16.74	51.58	15848
13.56	45	-14.14	51.58	15848
13.56	90	-15.24	51.58	15848
Comments:	Maximun level at 10 m is -14.14 dBμA/m for a limit at 51.58 dBμA/m. Using an extrapolation factor of 40 dB/dec and a conversion factor of -51.5 dB, level at 30m is 18.28 dBμV/m for a limit at 84 dBμV/m.			

EUT MODIFICATIONS	OPERATOR	TEST DATE	RESULT TAB.
N/A	MPA	31/08/2023	EMI4400

6.5. Field strength outside the band 13.110-14.010MHz


Reference standard:	FCC Part 15.225 b) c) & d) RSS-210
Test method:	ANSI C63.10: 2013
General test setup: EUT is set inside the climatic enclosure. Carrier level are correlated with the maximum carrier level measured in normal conditions.	

FREQUENCY BAND	SEVERITY	RESULT TAB.	VERDICT
13.110-13.410MHz	106µV/m at 30m	See graphic	PASS
13.410-13.553MHz	334µV/m at 30m	See graphic	PASS
13.553-13.567MHz	15,848µV/m at 30m	See graphic & §6.4 of this report	PASS
13.567-13.710MHz	334µV/m at 30m	See graphic	PASS
13.710-14.010MHz	106µV/m at 30m	See graphic	PASS
Above 14.010MHz	§15.209	See graphic & §6.3 of this report	PASS
Below 13.110MHz	§15.209	See graphic & §6.3 of this report	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	EMITECH	3.5 cm	4653		
Attenuator	Radiall	R412720124	4391	30/09/2022	30/11/2025
Cable	MegaPhase	N-3m	14853	20/05/2022	20/07/2024
Receiver	Rohde & Schwarz	FPL1007	17908	02/11/2022	02/01/2024
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H2	12268	24/10/2022	24/12/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	09/06/2021	09/02/2024

Blank cells = Permanent validity

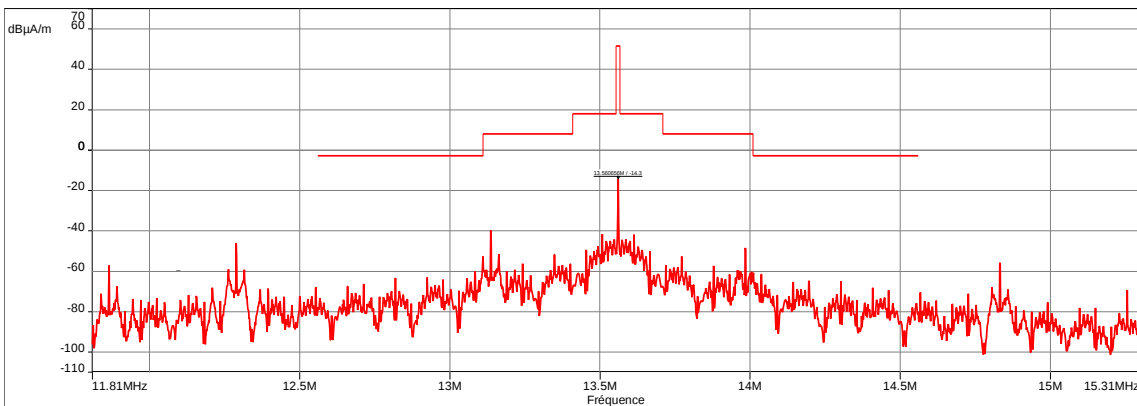FIELD STRENGTH IN THE BAND 13.110-14.010MHZ AND OUTSIDE – GRAPH					
FIELD STRENGTH IN THE BAND 13.110-14.010MHZ AND OUTSIDE				EMI4581	
EUT mode:	Tx mode			T (°C):	22.6
Test Date:	01/09/2023			H (%):	56.6
Test Operator:	MPA			P (hPa):	1017
Description Sous-bande 1 Fréquences:11.81 MHz - 15.31 MHz (Mode analyseur) 8000 Points Réglages: RBW: 300Hz, VBW: 1kHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off Position:Circulaire Distance: 10 m FCC/15.225 - Classe:Tx - QCrête/10.0m/ Mes.Peak  RFID Mask / 25°C / 5 Vdc / 22P033 min - 4654					
POSITION	FREQUENCIES		RBW	VBW	DETECTOR
Circular	11.81MHz-15.31MHz		300Hz	1kHz	Peak
Configuration:	N/A				
Comments:	Limit indicated on these plots are calculated with 40 dB/decade extrapolation factor and 51.5dB conversion factor.				
EUT modification(s): N/A					

6.6. Measurement of Frequency Stability

Reference standard:	FCC 47 CRF Part 15.225 e) RSS-210
Test method :	ANSI C63.10: 2013
General test setup: The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery. EUT is set inside the climatic enclosure. Carrier level are correlated with the maximum carrier level measured in normal conditions.	


TEST CASE	EUT MODE	SEVERITY	RESULT TAB.	VERDICT
Frequency stability	Tx mode	$\pm 0.01\%$	EMI4500	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	22.6 °C
Relative Humidity	20 to 75 %	56.6 %
Atmospheric pressure	N/A	1017 hPa
Test method deviation: Due to EUT's operating temperature range, measurement was performed at $+10^{\circ}\text{C}$ and $+40^{\circ}\text{C}$.		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	EMITECH	3.5 cm	4653		
Attenuator	Radiall	R412720124	4391	30/09/2022	30/11/2025
Cable	MegaPhase	N-3m	14853	20/05/2022	20/07/2024
Climatic enclosure	CLIMATS	EXCAL 7714-HA	14261	01/09/2022	01/11/2023
Receiver	Rohde & Schwarz	FPL1007	17908	02/11/2022	02/01/2024
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H2	12268	24/10/2022	24/12/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	09/06/2021	09/02/2024

Blank cells = Permanent validity

TEST SETUP PHOTO(S)

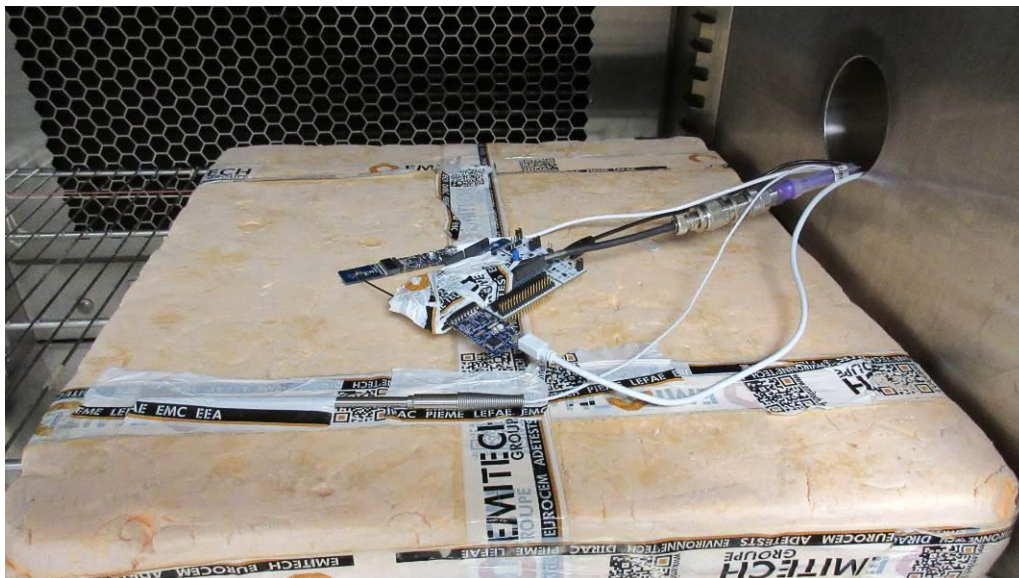

FREQUENCY STABILITY / CARD - TABULATED RESULTS					EMI4500
Test Case	Temperature (°C)	Power supply (Vdc)	Frequency (MHz)	Frequency error (%)	Limit (%)
Normal conditions	+25	5	13.5606154	-	+/- 0.01%
Extremes conditions	0	5	13.5606454	+0.00022	
	+60	5	13.5605475	-0.00050	

EUT MODIFICATIONS	OPERATOR	TEST DATE	RESULT TAB.
N/A	MPA	01/09/2023	EMI4500

End of test report