

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

4.1 Conducted Antenna Port Measurement

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, $k=1$	1.000	0.10	0.01
2	Cable attenuation	1.00 dB	Normal, $k=2$	2.000	0.50	0.25
3	Receiver sinewave accuracy	0.08 dB	Normal, $k=2$	2.000	0.04	0.00
4	Receiver pulse amplitude	0.00 dB	Rectangular	1.732	0.00	0.00
5	Receiver pulse repetition rate	0.00 dB	Rectangular	1.732	0.00	0.00
6	Noise floor proximity	0.00 dB	Rectangular	1.732	0.00	0.00
7	Frequency interpolation	0.10 dB	Rectangular	1.732	0.06	0.00
8	Mismatch	0.07 dB	U-shaped	1.414	0.05	0.00
Combined standard uncertainty				Normal	0.52 dB	
Expanded uncertainty				Normal, $k=2$	1.03 dB	

4.2 Radiated Measurement (30MHz to 1GHz)

Input Quantity (Contribution) X_i	Value		Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
Receiver reading	0.10	dB	Normal, $k=1$	1.000	0.10	0.01
Attenuation: antenna-receiver	0.20	dB	Normal, $k=2$	2.000	0.10	0.01
Antenna factor AF	0.75	dB	Normal, $k=2$	2.000	0.38	0.14
Receiver sinewave accuracy	1.10	dB	Normal, $k=2$	2.000	0.55	0.30
Receiver pulse amplitude	1.50	dB	Rectangular	1.732	0.87	0.75
Receiver pulse repetition rate	1.50	dB	Rectangular	1.732	0.87	0.75
Noise floor proximity	0.50	dB	Rectangular	1.732	0.29	0.08
Mismatch: antenna-receiver	0.95	dB	U-shaped	1.414	0.67	0.45
AF frequency interpolation	0.30	dB	Rectangular	1.732	0.17	0.03
AF height deviations	0.10	dB	Rectangular	1.732	0.06	0.00
Directivity difference at 3 m	3.12	dB	Rectangular	1.732	1.80	3.24
Phase center location at 3 m	1.00	dB	Rectangular	1.732	0.58	0.33
Cross-polarisation	0.90	dB	Rectangular	1.732	0.52	0.27
Balance	0.00	dB	Rectangular	1.732	0.00	0.00
Site imperfections	3.64	dB	Triangular	2.449	1.49	2.21
Separation distance at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
Effect of setup table material	0.40	dB	Rectangular	1.732	0.23	0.05
Table height at 3 m	0.10	dB	Normal, $k=2$	2.000	0.05	0.00
Near-field effects	0.00	dB	Triangular	2.449	0.00	0.00
Effect of ambient noise on OATS	0.00	dB				0.00
Combined standard uncertainty				Normal	2.95 dB	
Expanded uncertainty				Normal, $k=2$	5.89 dB	


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

4.3 Radiated Measurement (Above 1GHz)

Input Quantity (Contribution) X_i	Value		Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
Receiver reading	0.10	dB	Normal, k=1	1.000	0.10	0.01
Attenuation: antenna-receiver	0.30	dB	Normal, k=2	2.000	0.15	0.02
Preamplifier Gain	0.20	dB	Normal, k=2	2.000	0.10	0.01
Antenna factor AF	0.37	dB	Normal, k=2	2.000	0.19	0.03
Sinewave accuracy	0.57	dB	Normal, k=2	2.000	0.29	0.08
Instability of preamp gain	1.21	dB	Rectangular	1.732	0.70	0.49
Noise floor proximity	0.70	dB	Rectangular	1.732	0.40	0.16
Mismatch: antenna-preamplifier	1.41	dB	U-shaped	1.414	1.00	0.99
Mismatch: preamplifier-receiver	1.30	dB	U-shaped	1.414	0.92	0.85
AF frequency interpolation	0.30	dB	Rectangular	1.732	0.17	0.03
Directivity difference at 3 m	1.50	dB	Rectangular	1.732	0.87	0.75
Phase center location at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
Cross-polarisation	0.90	dB	Rectangular	1.732	0.52	0.27
Site imperfections VSWR (Method 2)	4.16	dB	Triangular	2.449	1.70	2.89
Effect of setup table material	1.15	dB	Rectangular	1.732	0.66	0.44
Separation distance at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
Table height at 3 m	0.00	dB	Normal, k=1	2.000	0.00	0.00
Combined standard uncertainty				Normal	2.66 dB	
Expanded uncertainty				Normal, k=2	5.32 dB	


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

5 Test Setup Diagrams

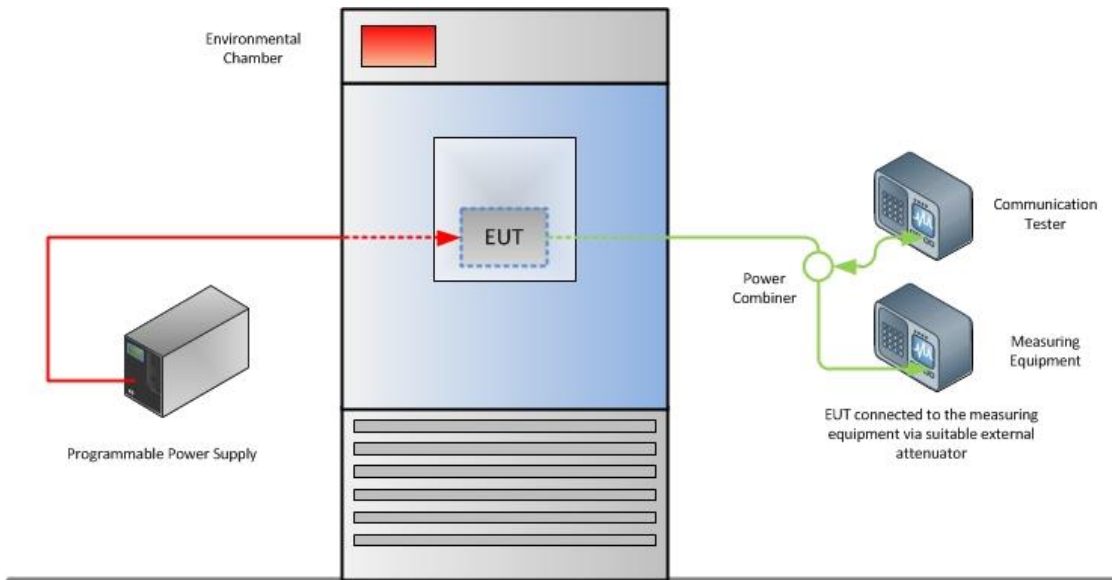


Frequency Stability Test Configuration

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

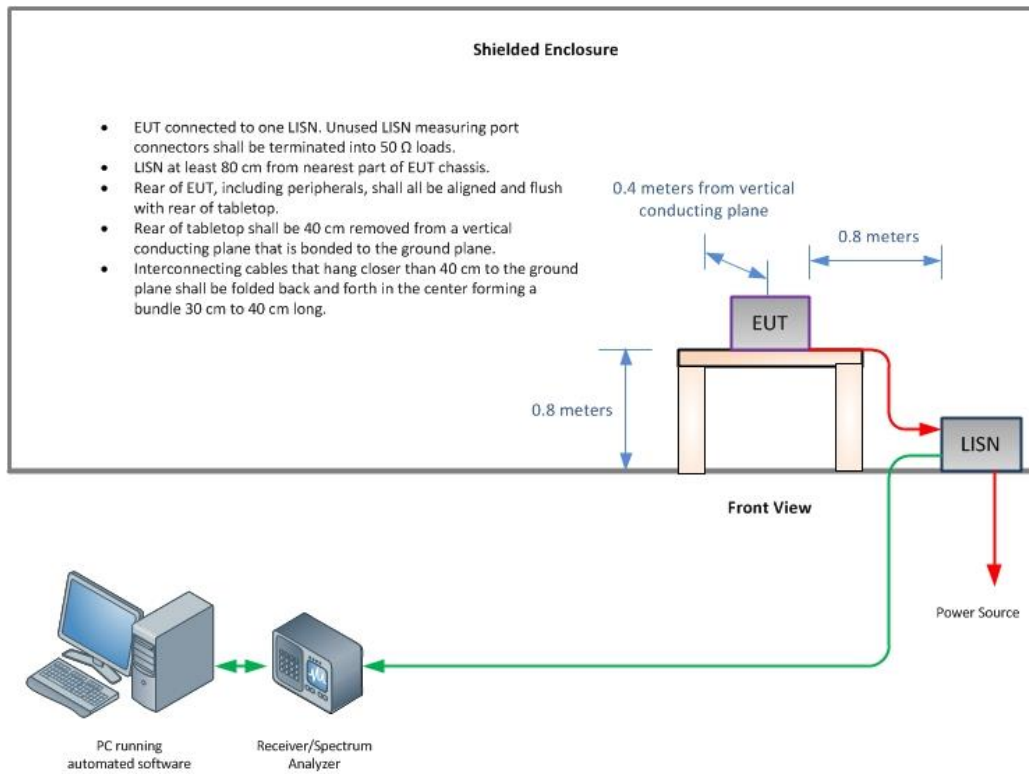


Conducted Emissions Test Configuration (if applicable)

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

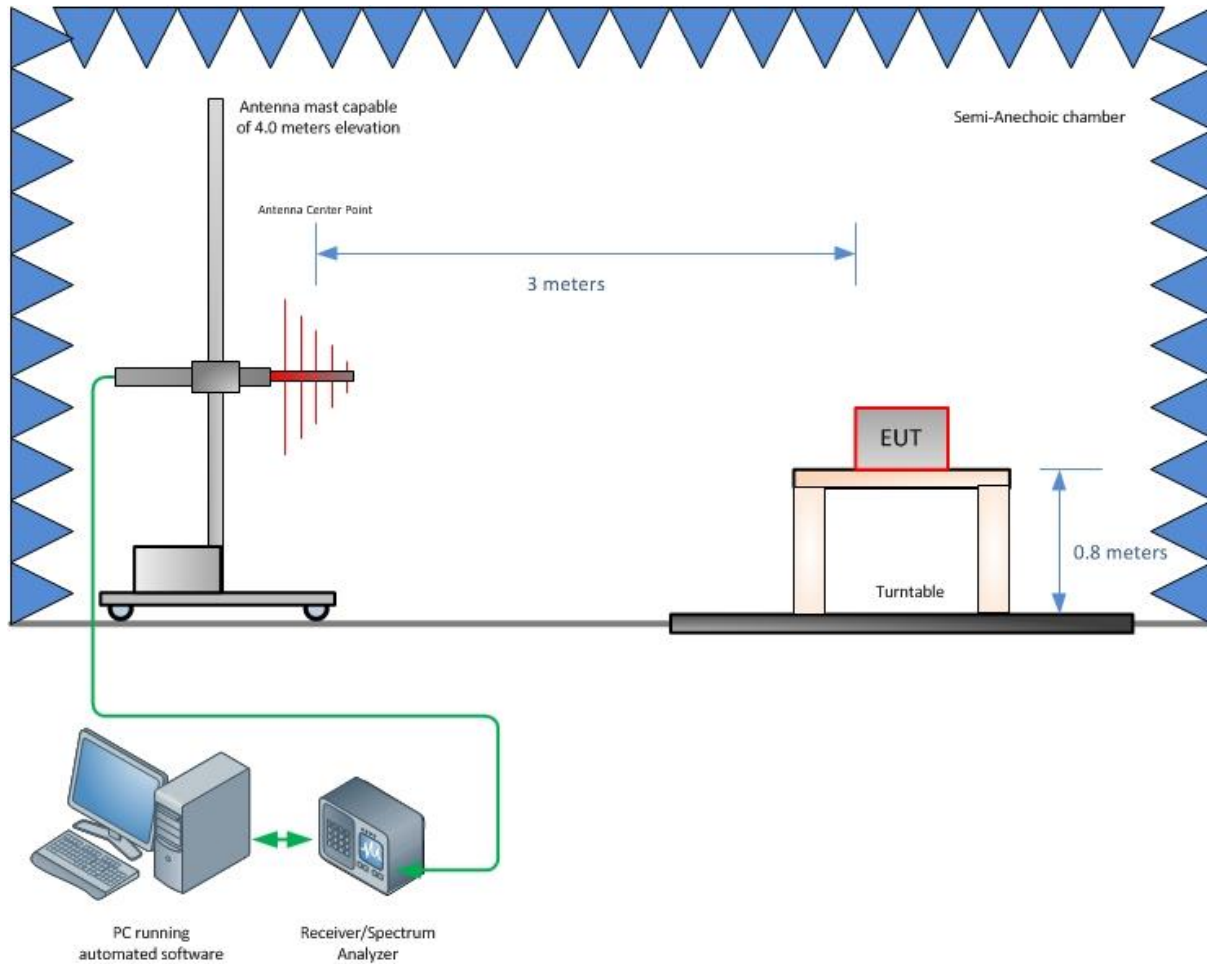

Radiated Emission Test Setup (Below 1GHz)

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

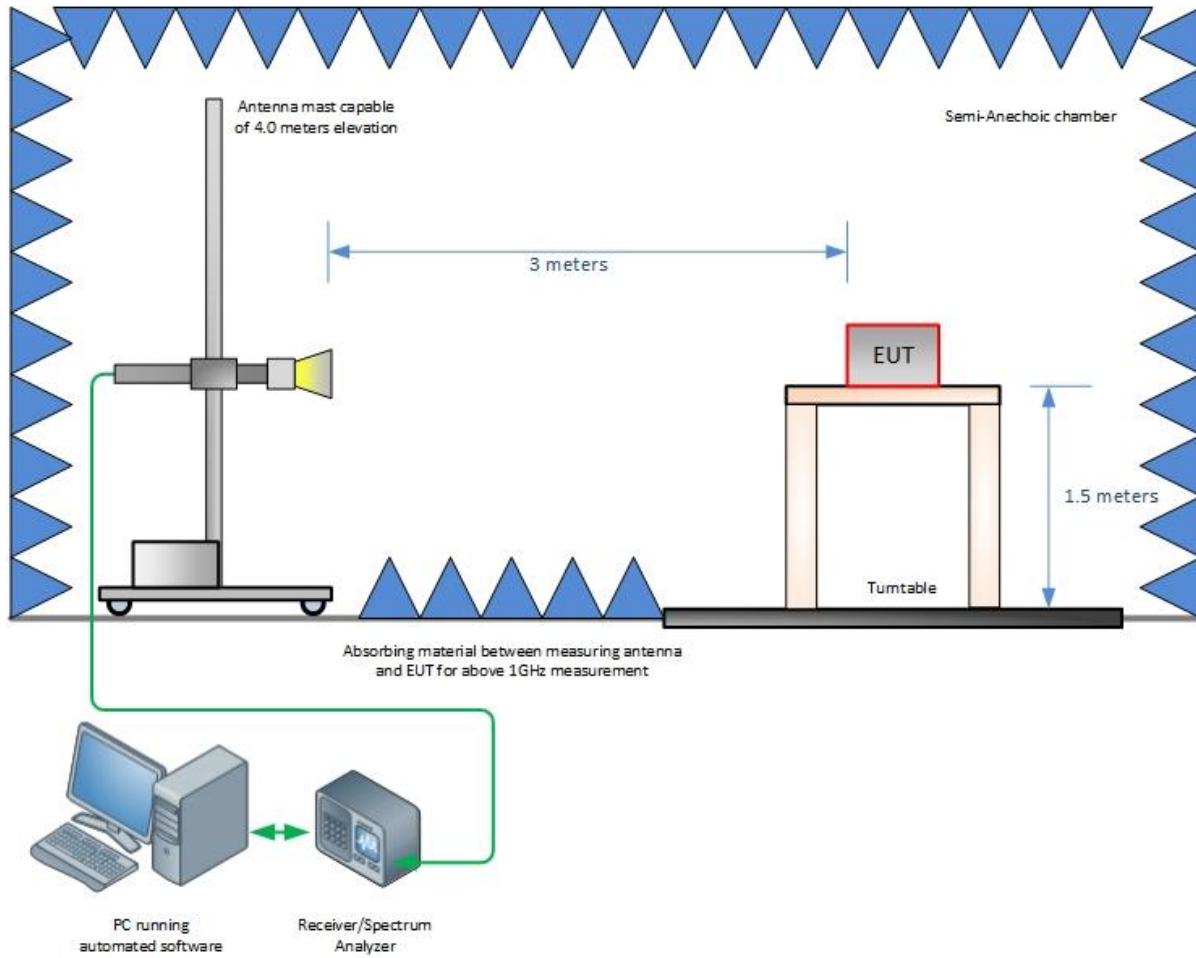

Radiated Emission Test Setup (Above 1GHz)



6 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

