

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 13 Uplink 5MHz Bandwidth Middle Channel Conducted Spurious Emissions (1559-1610 MHz)




10:39:30 19.07.2023

LTE Band 13 Uplink 5MHz Bandwidth High Channel Conducted Spurious Emissions




10:41:42 19.07.2023

LTE Band 13 Uplink 5MHz Bandwidth High Channel Conducted Spurious Emissions (763-775 MHz)

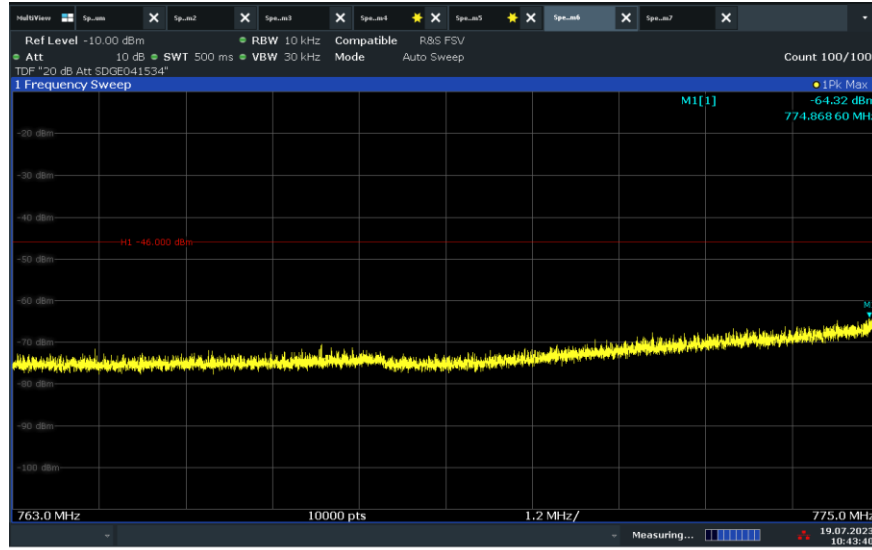


LTE Band 13 Uplink 5MHz Bandwidth High Channel Conducted Spurious Emissions (793-806 MHz)

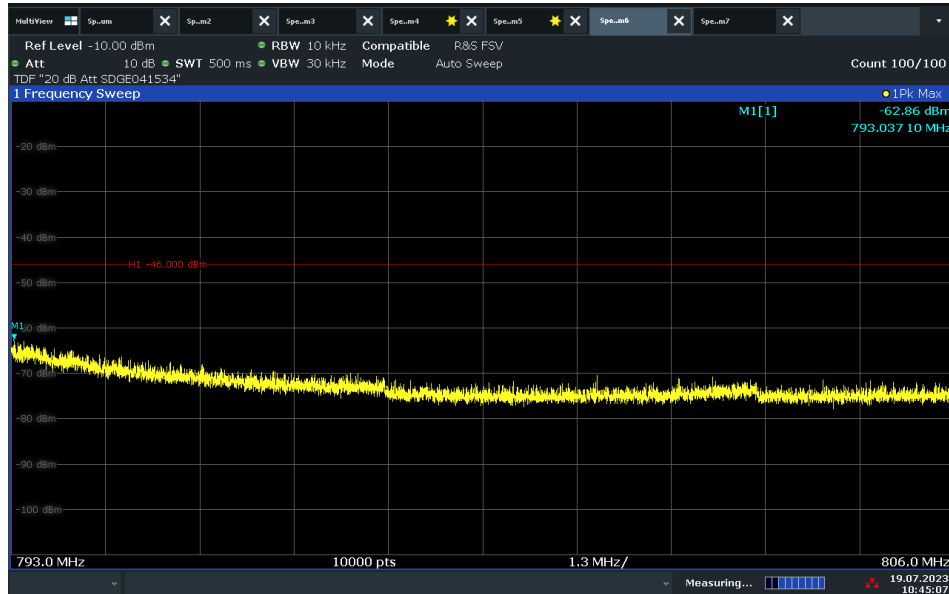

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 13 Uplink 5MHz Bandwidth High Channel Conducted Spurious Emissions (1559-1610 MHz)

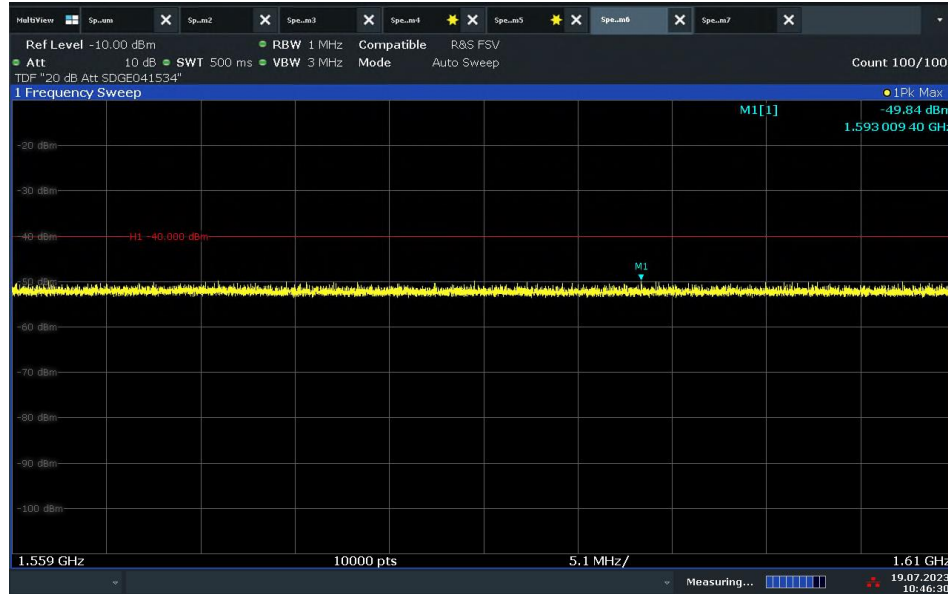

10:46:31 19.07.2023

LTE Band 13 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions




10:49:50 19.07.2023




FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 13 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions (763-775 MHz)

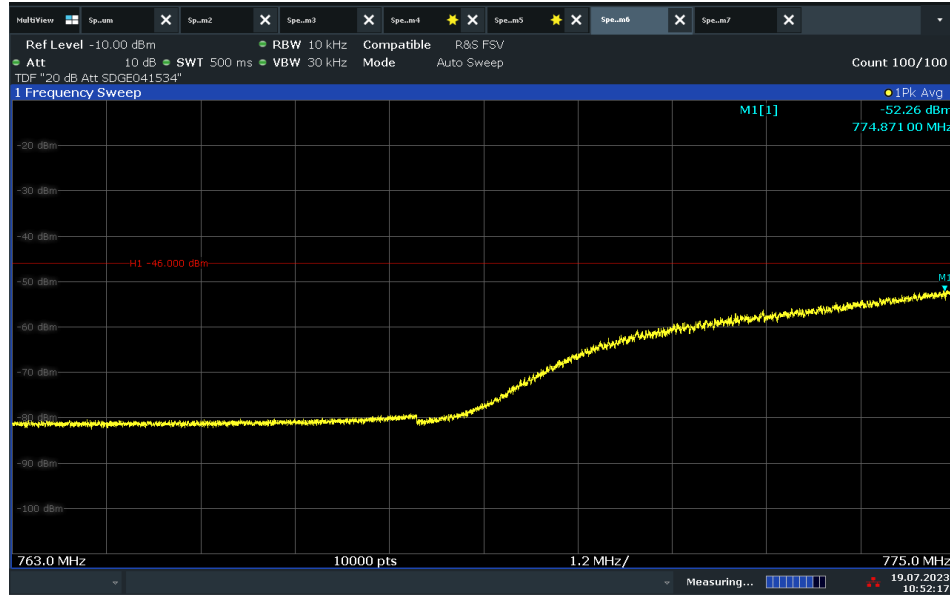

10:52:18 19.07.2023

LTE Band 13 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions (793-806 MHz)

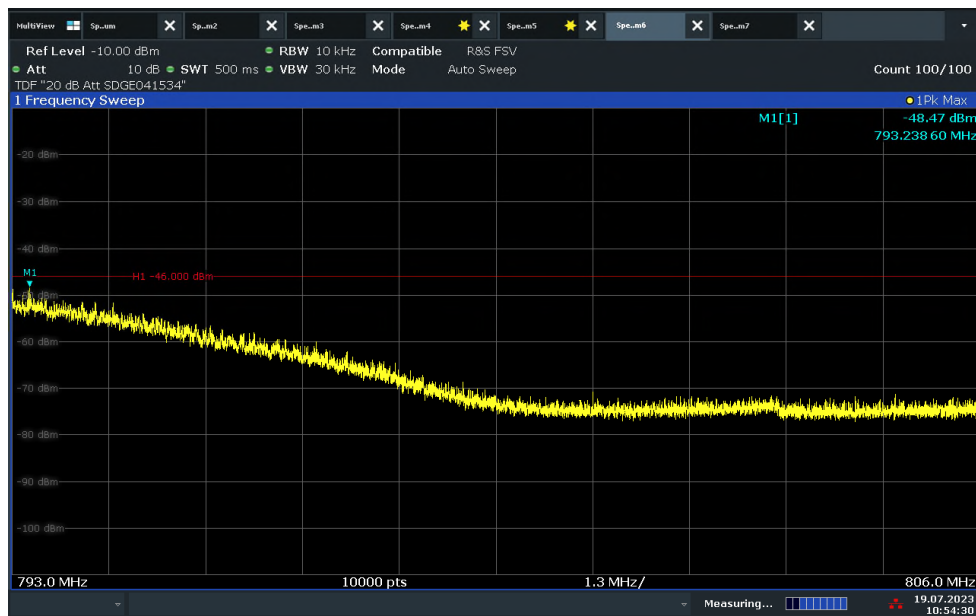

10:54:31 19.07.2023




FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 13 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions (1559-1610 MHz)



10:56:32 19.07.2023

LTE Band 25 5MHz Bandwidth Downlink Middle Channel Conducted Spurious Emissions

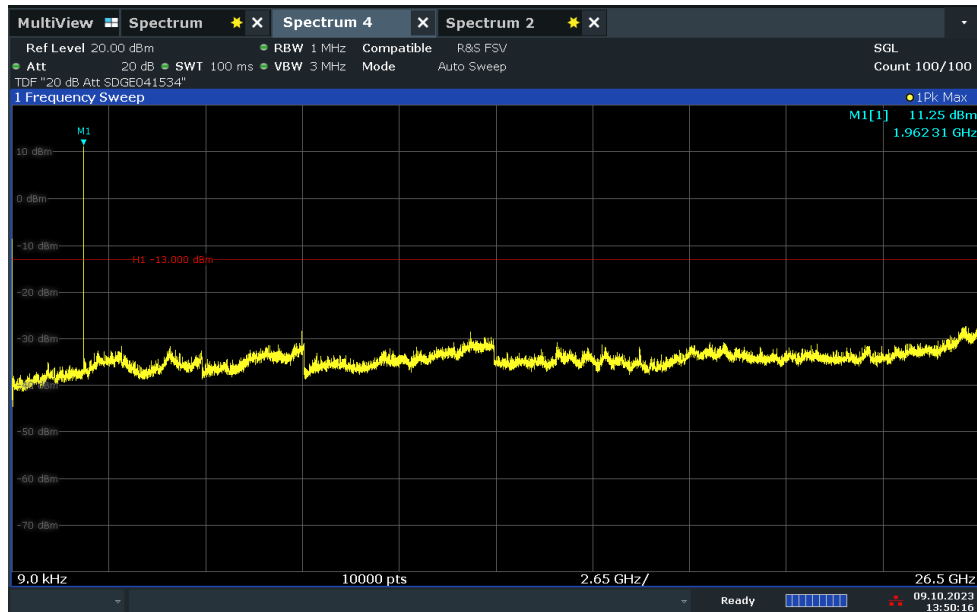


13:50:17 09.10.2023




FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 25 10MHz Bandwidth Downlink Middle Channel Conducted Spurious Emissions

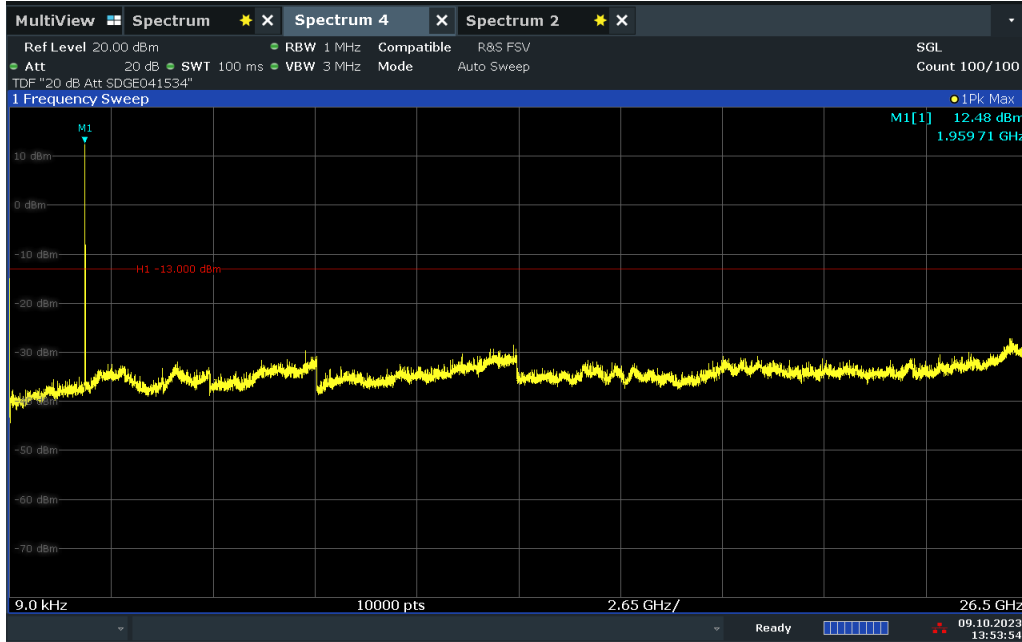

13:53:55 09.10.2023


LTE Band 25 15MHz Bandwidth Downlink Middle Channel Conducted Spurious Emissions

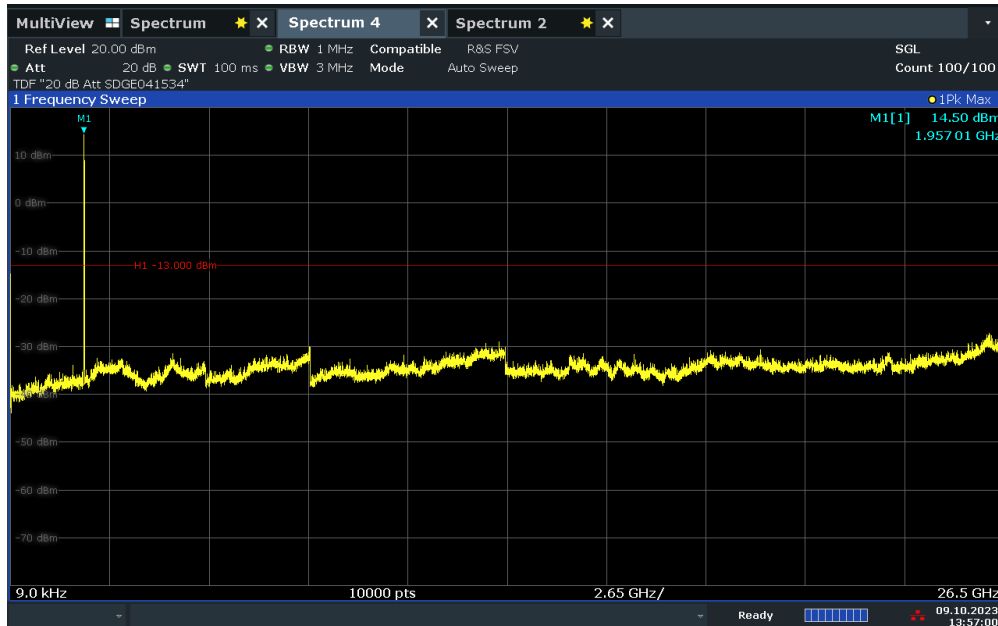

13:57:00 09.10.2023


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 25 20MHz Bandwidth Downlink Middle Channel Conducted Spurious Emissions

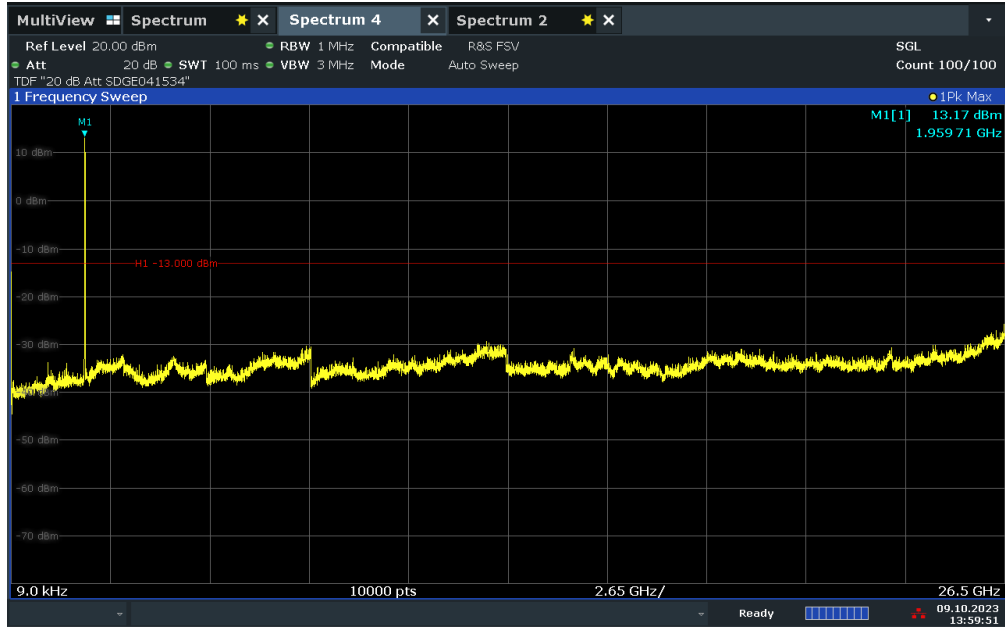

13:59:51 09.10.2023

LTE Band 25 5MHz Bandwidth Uplink Middle Channel Conducted Spurious Emissions

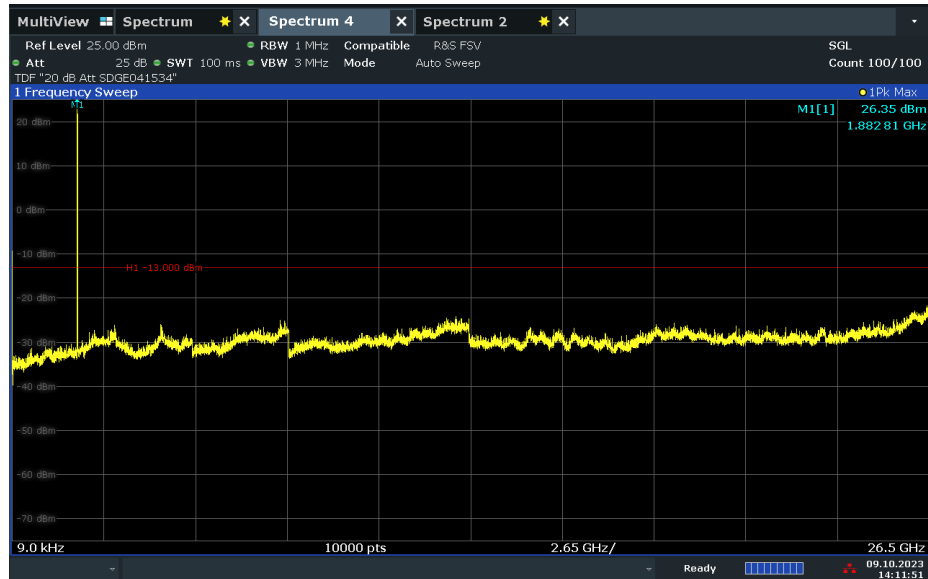


14:11:52 09.10.2023




FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 25 10MHz Bandwidth Uplink Middle Channel Conducted Spurious Emissions

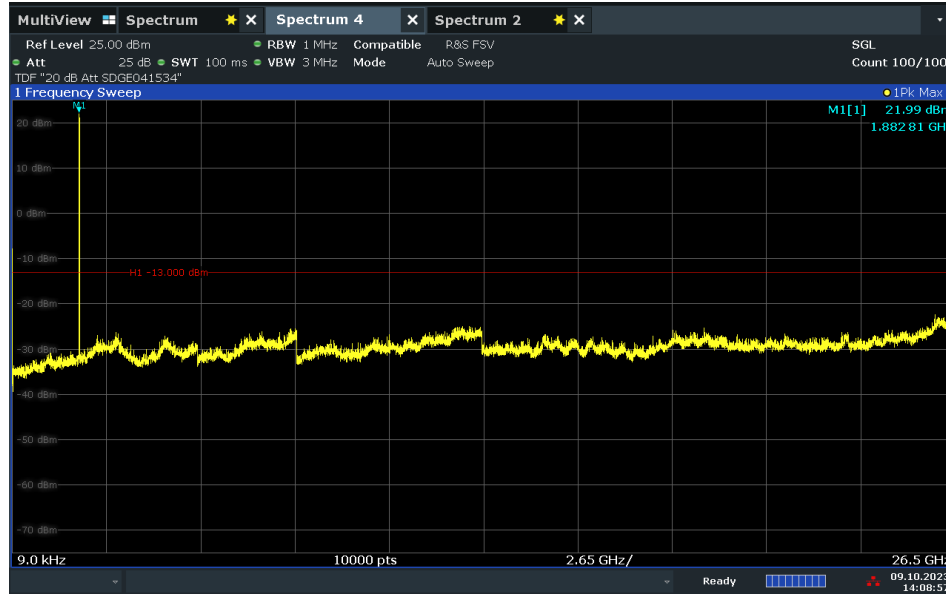

14:08:58 09.10.2023


LTE Band 25 15MHz Bandwidth Uplink Middle Channel Conducted Spurious Emissions

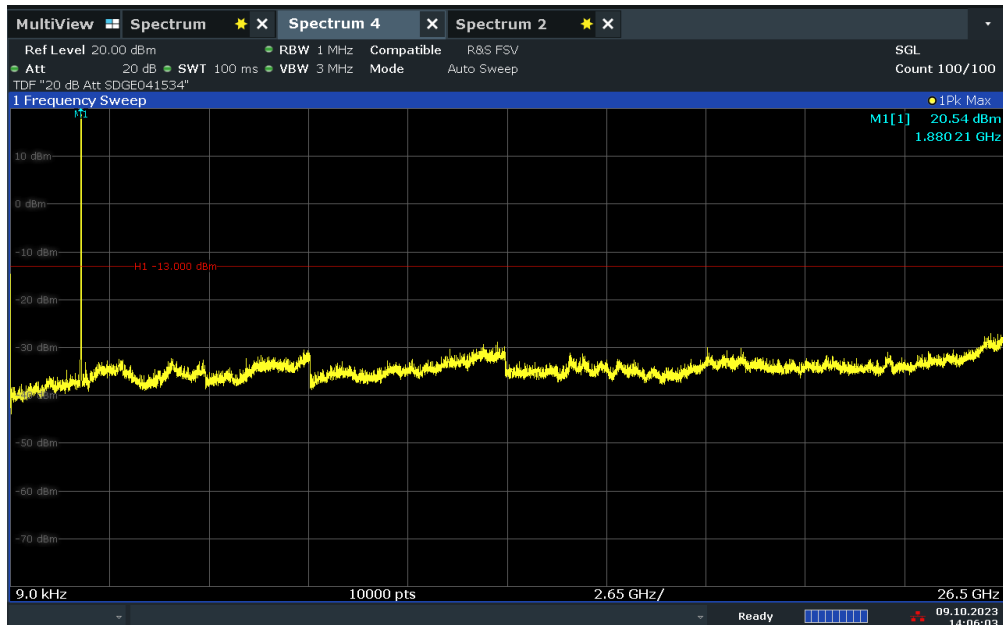

14:06:04 09.10.2023


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 25 20MHz Bandwidth Uplink Middle Channel Conducted Spurious Emissions

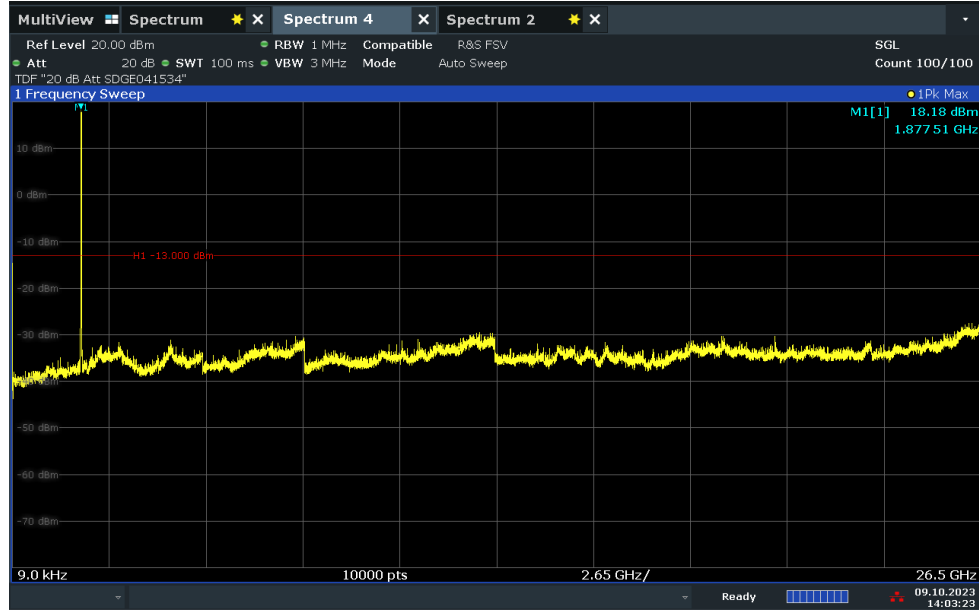

14:03:24 09.10.2023

2 Bands per antenna port Conducted Spurious Emissions Downlink: Band 2 20MHz BW Middle Ch & Band 4 20MHz BW Middle Ch

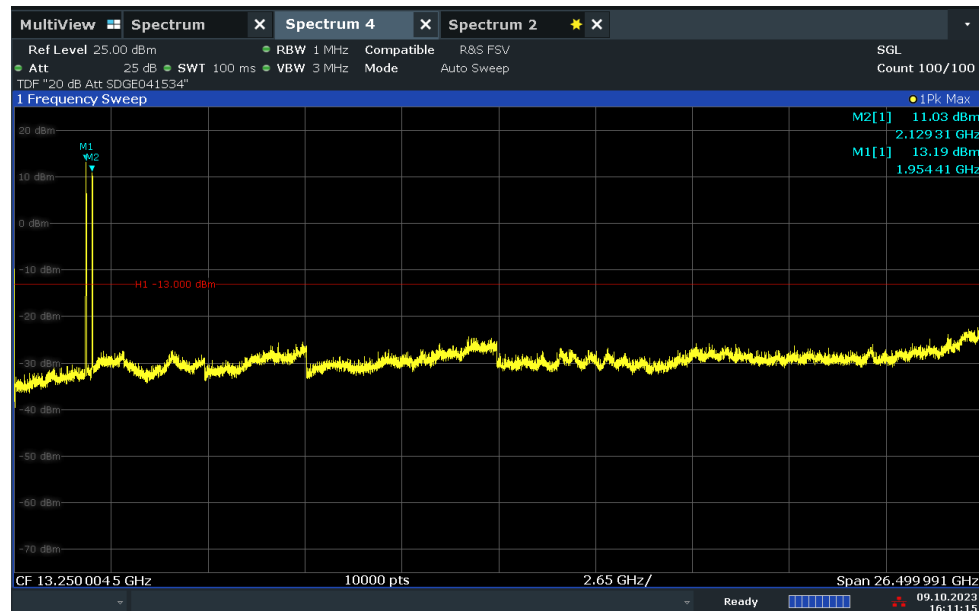


16:11:15 09.10.2023



Product Service

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

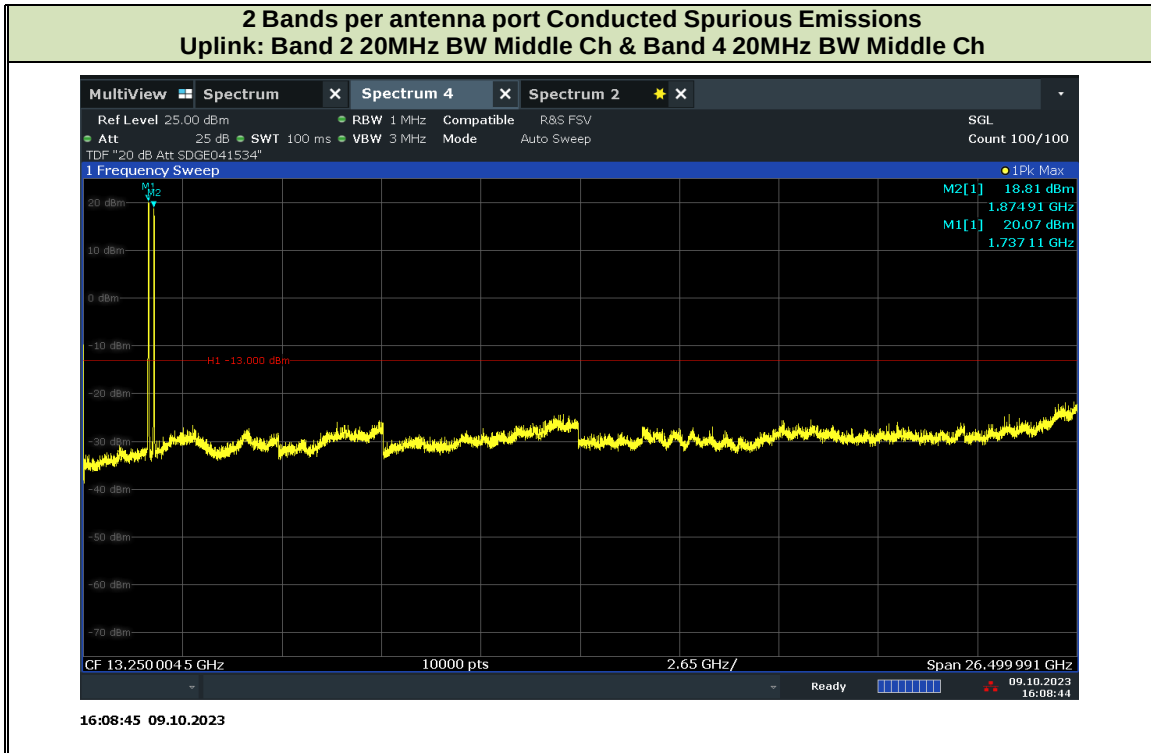

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.7 Noise Limit

2.7.1 Specification Reference

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(A)
FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I)
KDB935210 D04, Clause 7.7

2.7.2 Standard Applicable

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(A) Noise Limits.:

The transmitted noise power in dBm/MHz of frequency selective consumer boosters outside the licensee's spectrum blocks at their uplink and downlink ports shall not exceed the following limits:

(1) -103 dBm/MHz - RSSI

(i) Where RSSI is the downlink composite signal power received in dBm for frequencies in the band of operation outside the licensee's spectrum block as measured after spectrum block filtering is applied and is referenced to the booster's donor port for each band of operation. RSSI is expressed in negative dB units relative to 1 mW.

(ii) Boosters with MSCL less than 40 dB, shall reduce the Noise output in (A) by 40 dB - MSCL, where MSCL is the minimum coupling loss in dB between the wireless device and booster's server port. MSCL must be calculated or measured for each band of operation and provided in compliance test reports.

(2)(i) Maximum downlink noise power shall not exceed $-102.5 \text{ dBm/MHz} + 20 \text{ Log}_{10}(\text{Frequency})$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

(ii) Compliance with Noise limits will use instrumentation calibrated in terms of RMS equivalent voltage, and with booster input ports terminated or without input signals applied within the band of measurement.

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I) Transmit Power Off Mode.

When the consumer booster cannot otherwise meet the noise and gain limits defined herein it must operate in "Transmit Power OFF Mode." In this mode of operation, the uplink and downlink noise power shall not exceed -70 dBm/MHz and uplink gain shall not exceed the lesser of 23 dB or MSCL.

2.7.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.7.4 Date of Test/Initial of test personnel who performed the test

August 29 and September 29, 2023/MARG

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.7.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature 24.5 - 26.7°C
Relative Humidity 45.0 - 49.6%
ATM Pressure 98.9 - 99.0kPa

2.7.7 Additional Observations

- This is conducted Test. Test procedure is per Section 7.7 of KDB935210 (D04 Provider Specific Booster Measurements v02r03). Appropriate offset (line losses) applied.
- The EUT operated in Test Mode with the gain set to the maximum gain and a minimum bandwidth setting (5MHz).
- For Maximum Noise (frequency Dependent) testing, setup the EUT according to Figure 6 of Section 7.7 of KDB935210.
- Maximum Noise (frequency Dependent) evaluations are conducted at Server Port. Operational downlink band for LTE Band 2, 4, 5, 12, 13 and 25 were tested.
- For Maximum Noise (RSSI Dependent and Transmit Power off mode) and Noise Response Time tests, set up the EUT according to Figure 7 or 8 of Section 7.7 of KDB935210 as appropriate.
- Maximum Noise (RSSI Dependent and Transmit Power off mode) and Noise Response Time evaluations are conducted at Donor Port and Server Port. Operational uplink and downlink bands for LTE Band 2, 4, 5, 12, 13 and 25 were tested. The signal generator was configured to transmit: 4.1 MHz AWGN.

2.7.8 Test Results

Maximum Noise (Frequency Dependent)				
Band	Frequency Range (MHz)	Max Noise (dBm/MHz)	Limit* (dBm/MHz)	Margin (dB)
LTE Band 2 Downlink	1930-1990	-54.33	-37.01	17.32
LTE Band 4 Downlink	2110 - 2155	-53.72	-37.72	16
LTE Band 5 Downlink	869 - 894	-53.59	-44.05	9.54
LTE Band 12 Downlink	729 - 746	-53.82	-45.50	8.32
LTE Band 13 Downlink	746 - 756	-54.35	-44.65	9.7
LTE Band 25 Downlink	1930 - 1995	-53.93	-37	16.93

*: $-102.5 \text{ dBm/MHz} + 20 \log_{10}(\text{Frequency})$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz. (Downlink only)



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

Maximum Noise (RSSI Dependent and Transmit Power off mode)					
Band	Frequency (MHz)	RRSI level (dBm)	Max Noise (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
LTE Band 2 Downlink	1930 - 1990	-57.11	-55.9	-51	4.9
		-56.82	-56.86	-51.8	5.06
		-56.92	-57.1	-51.9	5.2
		-56.89	-57.29	-51.8	5.49
		-57.12	-57.26	-51	6.26
		-56.84	-57.27	-51.8	5.47
LTE Band 2 Uplink	1850 - 1910	-57.84	-56.83	-50.3	6.53
		-57.51	-56.87	-50.5	6.37
		-57.3	-56.87	-50.6	6.27
		-57.67	-56.9	-50.4	6.5
		-57.67	-56.85	-50.4	6.45
		-57.29	-56.89	-50.6	6.29
LTE Band 4 Downlink	2110 - 2155	-56.42	-55.75	-51.5	4.25
		-56.03	-56.17	-51.9	4.27
		-56.67	-56.15	-50.4	5.75
		-56.44	-56.6	-51.5	5.1
		-56.32	-56.62	-51.5	5.12
		-56.11	-56.55	-51.9	4.65
LTE Band 4 Uplink	1710 - 1755	-57.22	-56.43	-51.1	5.33
		-57.22	-56.51	-51.1	5.41
		-57.37	-57.1	-50.8	6.3
		-57.13	-57.19	-51	6.19
		-57.31	-57.3	-50.8	6.5
		-56.97	-57.31	-51	6.31
LTE Band 5 Downlink	869 - 894	-56.38	-56.36	-51	5.36
		-56.34	-56.32	-51	5.32
		-56.19	-56.22	-50.8	5.42
		-56.16	-56.18	-50.8	5.38
		-56.24	-56.23	-51	5.23
		-56.46	-56.46	-51.2	5.26
LTE Band 5 Uplink	824 - 849	-54.12	-54.04	-54	0.04
		-54.29	-54.14	-54.1	0.04
		-54.13	-54.06	-54	0.06



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

		-54.11	-54.03	-54	0.03
		-54.14	-54.35	-54	0.35
		-54.18	-54.28	-54	0.28
LTE Band 12 Downlink	729 - 746	-56.64	-56.65	-51.3	5.35
		-56.94	-56.92	-52	4.92
		-56.17	-56.18	-50.8	5.38
		-56.37	-56.67	-51	5.67
		-56.64	-56.66	-51.3	5.36
		-56.46	-56.48	-51.2	5.28
LTE Band 12 Uplink	699 - 716	-54.15	-54.04	-54	0.04
		-54.27	-54.14	-54.1	0.04
		-54.16	-54.06	-54	0.06
		-54.1	-54.03	-54	0.03
		-54.13	-54.35	-54	0.35
		-54.18	-54.28	-54	0.28
LTE Band 13 Downlink	746 - 756	-56.46	-56.43	-51.2	5.23
		-56.43	-56.45	-51.2	5.25
		-56.92	-56.87	-52	4.87
		-56.78	-56.75	-51.5	5.25
		-56.28	-56.32	-50.9	5.42
		-56.92	-56.9	-52	4.9
LTE Band 13 Uplink	777 - 787	-54.1	-54.04	-54	0.04
		-54.25	-54.14	-54.1	0.04
		-54.1	-54.06	-54	0.06
		-54.1	-54.03	-54	0.03
		-54.11	-54.35	-54	0.35
		-54.16	-54.28	-54	0.28
LTE Band 25 Downlink	1930 - 1995	-57.11	-55.65	-50.9	4.75
		-57.19	-55.84	-50.9	4.94
		56.9	-56.92	-50.8	6.12
		-57.29	-57.24	-51	6.24
		-56.94	-57.29	-50.8	6.49
		-56.62	-57.35	-51	6.35
LTE Band 25 Uplink	1850 - 1915	-57.49	-56.56	-50.09	6.47
		-57.73	-57.05	-50.5	6.55
		-57.66	-57.33	-50.4	6.93
		-57.4	-57.43	-50.3	7.13
		-57.43	-57.4	-50.3	7.1



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

		-57.35	-57.37	-50.2	7.17
--	--	--------	--------	-------	------

Noise Response Time				
Band	Frequency (MHz)	Noise Response Time (Sec)	Limit (Sec)	Margin (Sec)
LTE Band 2 Downlink	1930-1990	0.422	3	2.575
LTE Band 2 Uplink	1850-1910	0.762	3	2.238
LTE Band 4 Downlink	2110 - 2155	0.442	3	2.558
LTE Band 4 Uplink	1710 - 1755	0.788	3	2.212
LTE Band 5 Downlink	869 - 894	0.462	3	2.538
LTE Band 5 Uplink	824 - 849	0.918	3	2.082
LTE Band 12 Downlink	729 - 746	0.496	3	2.504
LTE Band 12 Uplink	699 - 716	0.576	3	2.424
LTE Band 13 Downlink	746 - 756	0.473	3	2.527
LTE Band 13 Uplink	777 - 787	0.678	3	2.322
LTE Band 25 Downlink	1930 - 1995	0.427	3	2.573
LTE Band 25 Uplink	1850 - 1915	0.718	3	2.282

N/A*: Not Applicable. Maximum Noise always complies with Noise Limit requirement. There is no noise limit change during testing.



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.8 Uplink Inactivity

2.8.1 Specification Reference

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(J)
KDB935210 D04, Clause 7.8

2.8.2 Standard Applicable

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(J) Uplink Inactivity:

Uplink Inactivity. When a consumer booster is not serving an active device connection after 5 seconds the uplink noise power shall not exceed -70 dBm/MHz.

2.8.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration C and D

2.8.4 Date of Test/Initial of test personnel who performed the test

August 31, 2023/MARG

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature	25.8°C
Relative Humidity	53.3%
ATM Pressure	99.0kPa

2.8.7 Additional Observations

- This is conducted Test.
- Test procedure is per Section 7.8 of KDB935210 (D04 Provider Specific Booster Measurements v02r03). Appropriate offset (line losses) applied.
- The EUT operated in Normal Mode with a minimum bandwidth setting (5MHz).
- Setup the EUT according to Figure 1 of Section 6.3.2 of KDB935210.
- Evaluations are conducted at NU antenna ports.
- Operational uplink bands for LTE Band 2, 4, 5, 12, 13, 25 were tested.
- Signal: 5MHz LTE.




FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.8.8 Test Results

Uplink Inactivity				
Band	Frequency (MHz)	UL Inactive Time (Sec)	Limit (Sec)	Margin (Sec)
LTE Band 2	1880	1.51	5.0	3.49
LTE Band 4	1732.5	1.52	5.0	3.48
LTE Band 5	836.6	1.49	5.0	3.51
LTE Band 12	707.5	1.53	5.0	3.47
LTE Band 13	782	1.54	5.0	3.46
LTE Band 25	1882.5	1.50	5.0	3.5


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.8.9 Sample test Plots

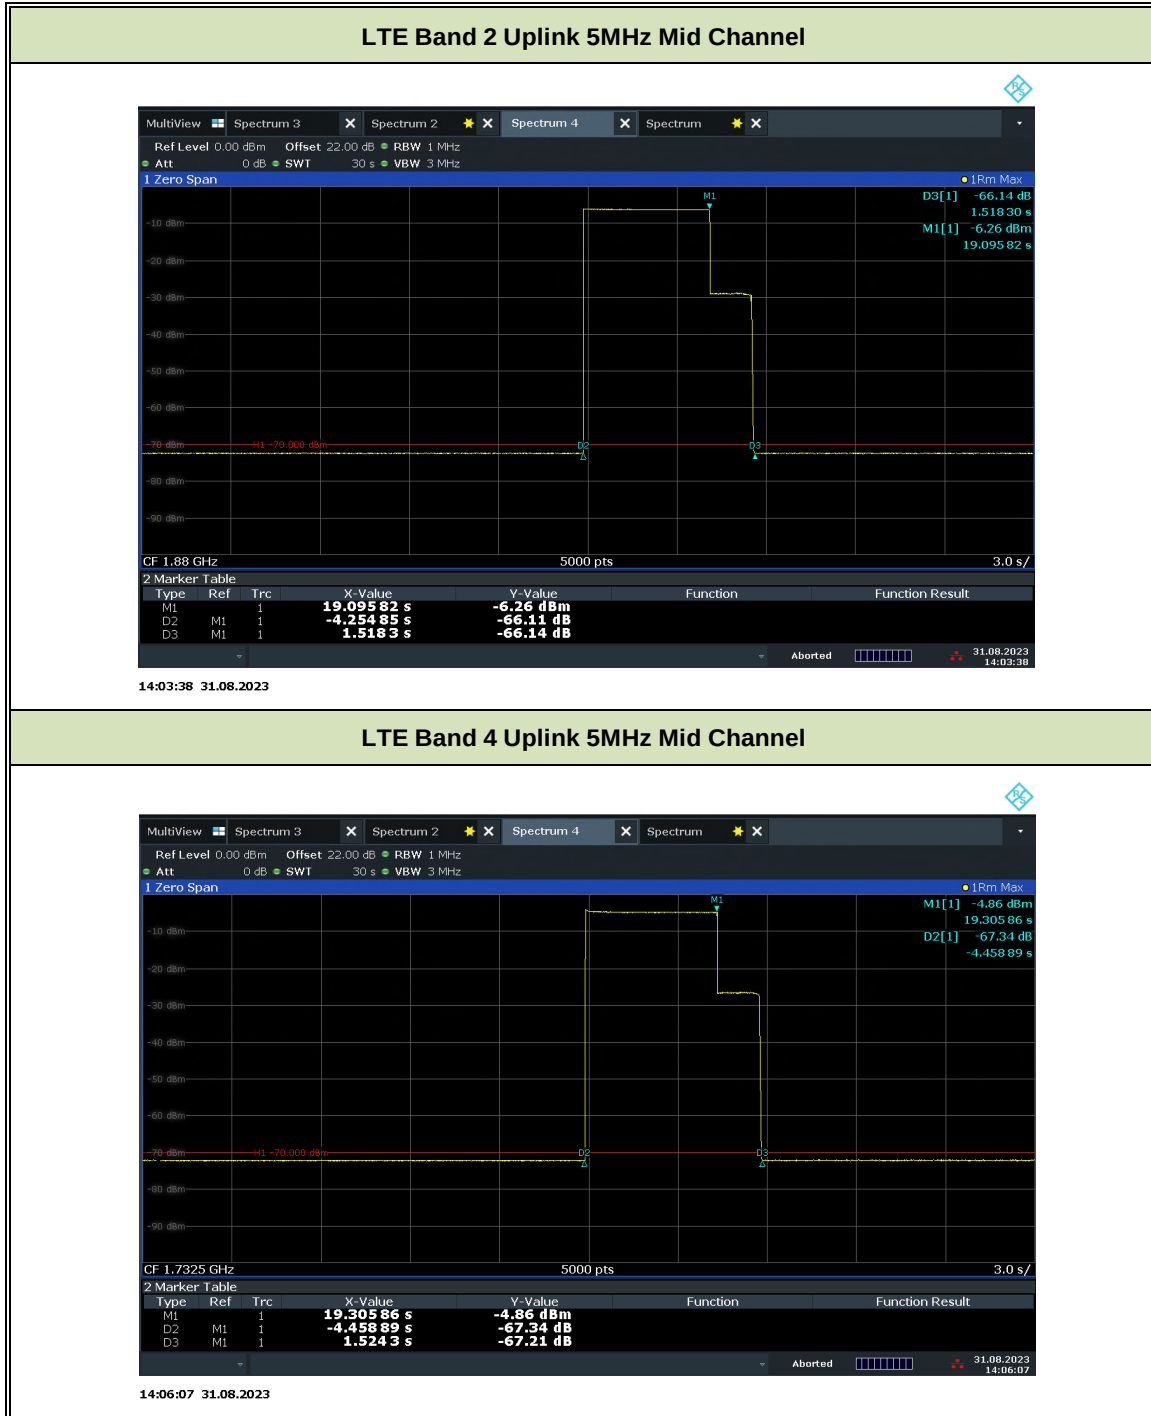


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 5 Uplink 5MHz Mid Channel

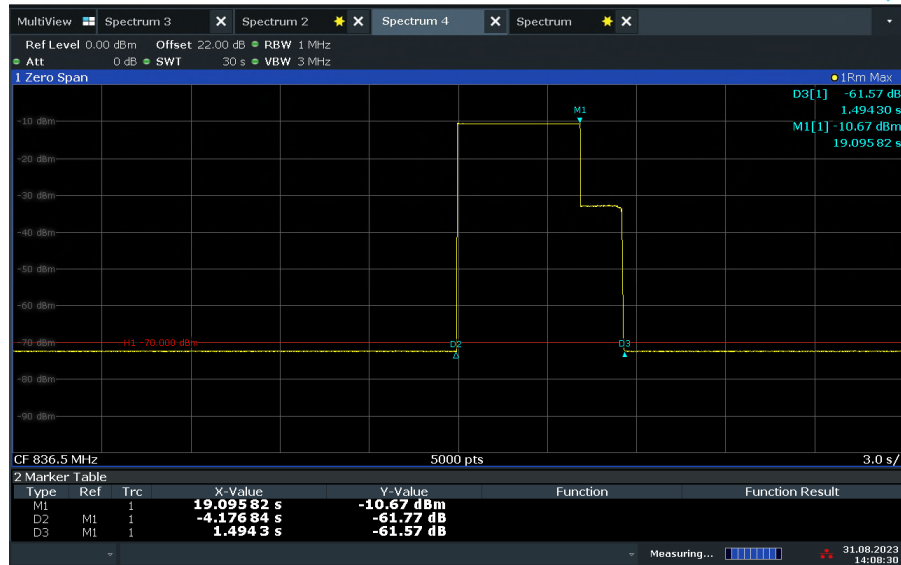

14:08:31 31.08.2023


LTE Band 12 Uplink 5MHz Mid Channel

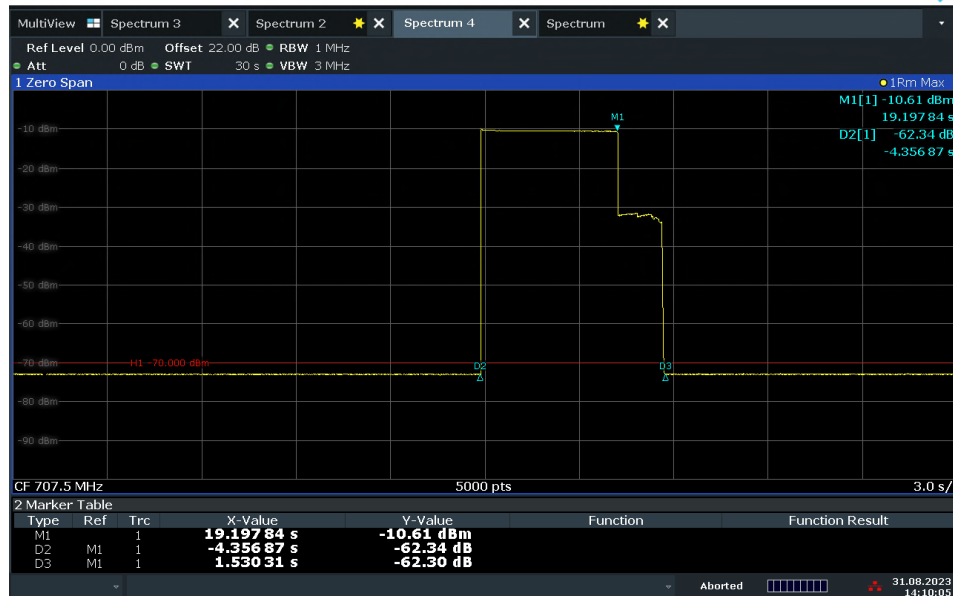

14:10:05 31.08.2023

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 13 Uplink 5MHz Mid Channel

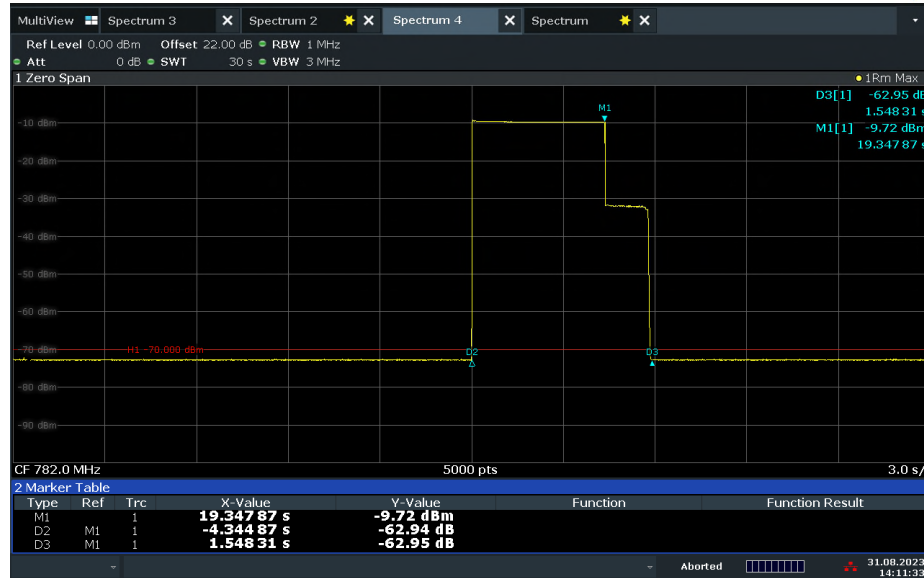

14:11:34 31.08.2023

LTE Band 25 Uplink 5MHz Mid Channel



14:16:23 31.08.2023

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.9 Variable Booster Gain

2.9.1 Specification Reference

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(C)(1)
FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I)
KDB935210 D04, Clause 7.9

2.9.2 Standard Applicable

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(C)(1) Booster Gain Limits:
The gain of the frequency selective consumer booster shall meet the limits below.

1) The uplink and downlink gain in dB of a frequency selective consumer booster referenced to its input and output ports shall not exceed BSCL - 28dB - (40 dB - MSCL).

(i) Where BSCL is the coupling loss between the booster's donor port and the base station's input port, and MSCL is the minimum coupling loss in dB between the wireless device and the booster's server port. MSCL must be calculated or measured for each band of operation and provided in compliance test reports.

(ii) In order of preference, BSCL is determined as follows: determine path loss between the base station and the booster; such measurement shall be based on measuring the received forward pilot/control channel power at the booster and reading the pilot/control channel transmit power from the base station as defined in the system information messages sent by the base station; estimate BSCL by assuming that the base station is transmitting at a level of +25 dBm per channel (assume a small, lightly loaded cell) and measuring the total received signal power level within the channel in dBm (RPCH) received at the booster input port. BSCL is then calculated as 25– RPCH; or assume that the BSCL is 70dB without performing any measurement.

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I) Transmit Power Off Mode.

When the consumer booster cannot otherwise meet the noise and gain limits defined herein it must operate in "Transmit Power OFF Mode." In this mode of operation, the uplink and downlink noise power shall not exceed -70 dBm/MHz and uplink gain shall not exceed the lesser of 23 dB or MSCL.

2.9.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration C and D

2.9.4 Date of Test/Initial of test personnel who performed the test

September 22, 2023/MARG

2.9.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.9.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature 25.8°C
Relative Humidity 53.3%
ATM Pressure 99.0kPa

2.9.7 Additional Observations

- This is conducted Test.
- Test procedure is per Section 7.9 of KDB935210 (D04 Provider Specific Booster Measurements v02r03). Appropriate offset (line losses) applied.
- The EUT operated in Normal Mode
- Setup the EUT according to Figure 1 of Section 6.3.2 of KDB935210.
- Evaluations are conducted at worst according to Maximum Booster Gain test result.
- Variable Gain: Operational uplink and downlink bands for LTE Band 2, 4, 5, 12, 13, 25 were tested.
- Uplink Gain Timing: Operational uplink bands for LTE Band 2, 4, 5, 12, 13, 25 were tested.
- Signal: 5MHz LTE.
- MSCL: $L_p = 20\log f + 20\log d - 27.5$

Where: L_p = Basic free space path loss,
 f = frequency in MHz,
 d = separation distance in meters (2m)
lowest MSCL value was utilized.

- BSCL: The coupling loss (in dB) between the donor port (NU) of the Consumer Booster and the input port of the Base Station

2.9.8 Test Results

LTE B2 Downlink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-42	67	-12.81	15.83	34	18.17
-52	77	3.7	42.39	44	1.61
-62	87	3.9	52.65	54	1.35
-72	97	4.18	63.14	64	0.86
-82	107	4.46	73.1	74	0.9
-92	117	4.49	83.43	84	0.57



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE B2 Uplink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-52	77	-35.64	2.36	45	42.64
-62	87	-24.98	13.02	55	41.98
-72	97	-14.96	23.04	65	41.96
-82	107	-4.88	33.12	75	41.88
-92	117	5.69	43.69	85	41.31
-102	127	15.52	53.52	95	41.48

LTE B4 Downlink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-41.6	66.6	-16.75	72.79	33	20.21
-51.6	76.6	0.24	40.09	43	2.91
-61.6	86.6	0.56	50.22	53	2.78
-71.6	96.6	0.78	60.4	63	2.6
-81.6	106.6	0.8	70.55	73	2.45
-91.6	116.6	1.01	80.66	83	2.36

LTE B4 Uplink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-52.1	77.1	-5.01	32.99	45	12.01
-62.1	87.1	16.42	54.42	55	0.58
-72.1	97.1	21.27	59.57	65	5.73
-82.1	107.1	21.23	59.53	75	15.77
-92.1	117.1	21.18	59.18	85	25.82
-102.1	127.1	21.19	59.19	95	35.81



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE B5 Downlink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-53.9	78.9	2.82	41.43	46	6.23
-63.9	88.9	3.14	51.58	56	4.57
-73.9	98.9	3.1	61.57	66	4.42
-83.9	108.9	3.47	72.14	76	4.43
-93.9	118.9	3.88	82.51	86	3.86
-103.9	128.9	3.88	92.24	96	3.49

3.76

LTE B5 Uplink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-53.9	78.9	-6.61	33.39	46	12.61
-63.9	88.9	4.44	44.44	56	11.56
-73.9	98.9	14	54	66	12
-83.9	108.9	18.8	58.8	76	17.2
-93.9	118.9	18.35	58.43	86	27.57
-103.9	128.9	18.39	58.35	96	37.65



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE B12 Downlink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-53.2	78.2	3.18	41.45	45	5.12
-63.2	88	4.41	52.55	55	3.55
-73.2	98.2	4.42	62.78	65	2.45
-83.2	108.2	4.63	72.81	75	2.22
-93.2	118.2	4.6	83.08	85	2.19
-103.2	128.2	4.91	93.69	95	1.92

LTE B12 Uplink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-55.5	80.5	-7.04	32.96	57.5	24.54
-65.5	90.5	3.65	43.65	67.5	23.85
-75.5	100.5	14.14	54.14	77.5	23.36
-85.5	110.5	18.31	58.31	87.5	29.19
-95.5	120.5	18.25	58.25	97.5	39.25
-105.5	130.5	18.25	58.25	100	41.75

LTE B13 Downlink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-54.3	79.3	3.98	42.29	46	3.71
-64.3	89.3	4.47	53.35	56	2.65
-74.3	99.3	4.89	63.38	66	2.62
-84.3	109.3	5.13	73.48	76	2.52
-94.3	119.3	5.5	84.48	86	1.52
-104.3	129.3	5.7	94.63	96	1.37



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE


LTE B13 Uplink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-53.5	78.5	-8.22	31.78	45.5	13.72
-63.5	88.5	4.83	44.83	55.5	10.67
-73.5	98.5	15.15	55.15	65.5	10.35
-83.5	108.5	19.82	59.82	75.5	15.68
-93.5	118.5	19.24	59.24	85.5	26.26
-103.5	128.5	19.21	59.21	95.5	36.29

LTE B25 Downlink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-52.7	77.7	2.43	41.71	44	2.29
-62.7	87.7	2.73	52.16	54	1.84
-72.7	97.7	3.03	62.7	64	1.3
-82.7	107.7	3.38	73.34	74	0.66
-92.7	117.7	3.41	82.65	84	1.35
-102.7	127.7	3.72	93.07	94	0.93

LTE B25 Uplink Gain vs RPCH and BSCL - Middle Channel					
RPCH Power (dBm)	BSCL (dB)	Measured Power (dBm)	Gain (dB)	Limit (dB)	Margin (dB)
-52.1	77.1	-6.3	31.7	45	13.3
-62.1	87.1	6.31	44.31	55	10.69
-72.1	97.1	16.8	54.8	65	10.2
-82.1	107.1	22.22	60.22	75	14.78
-92.1	117.1	22.22	60.22	85	24.78
-102.1	127.1	22.19	60.19	95	34.8

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE


2.9.9 Test Results Plots

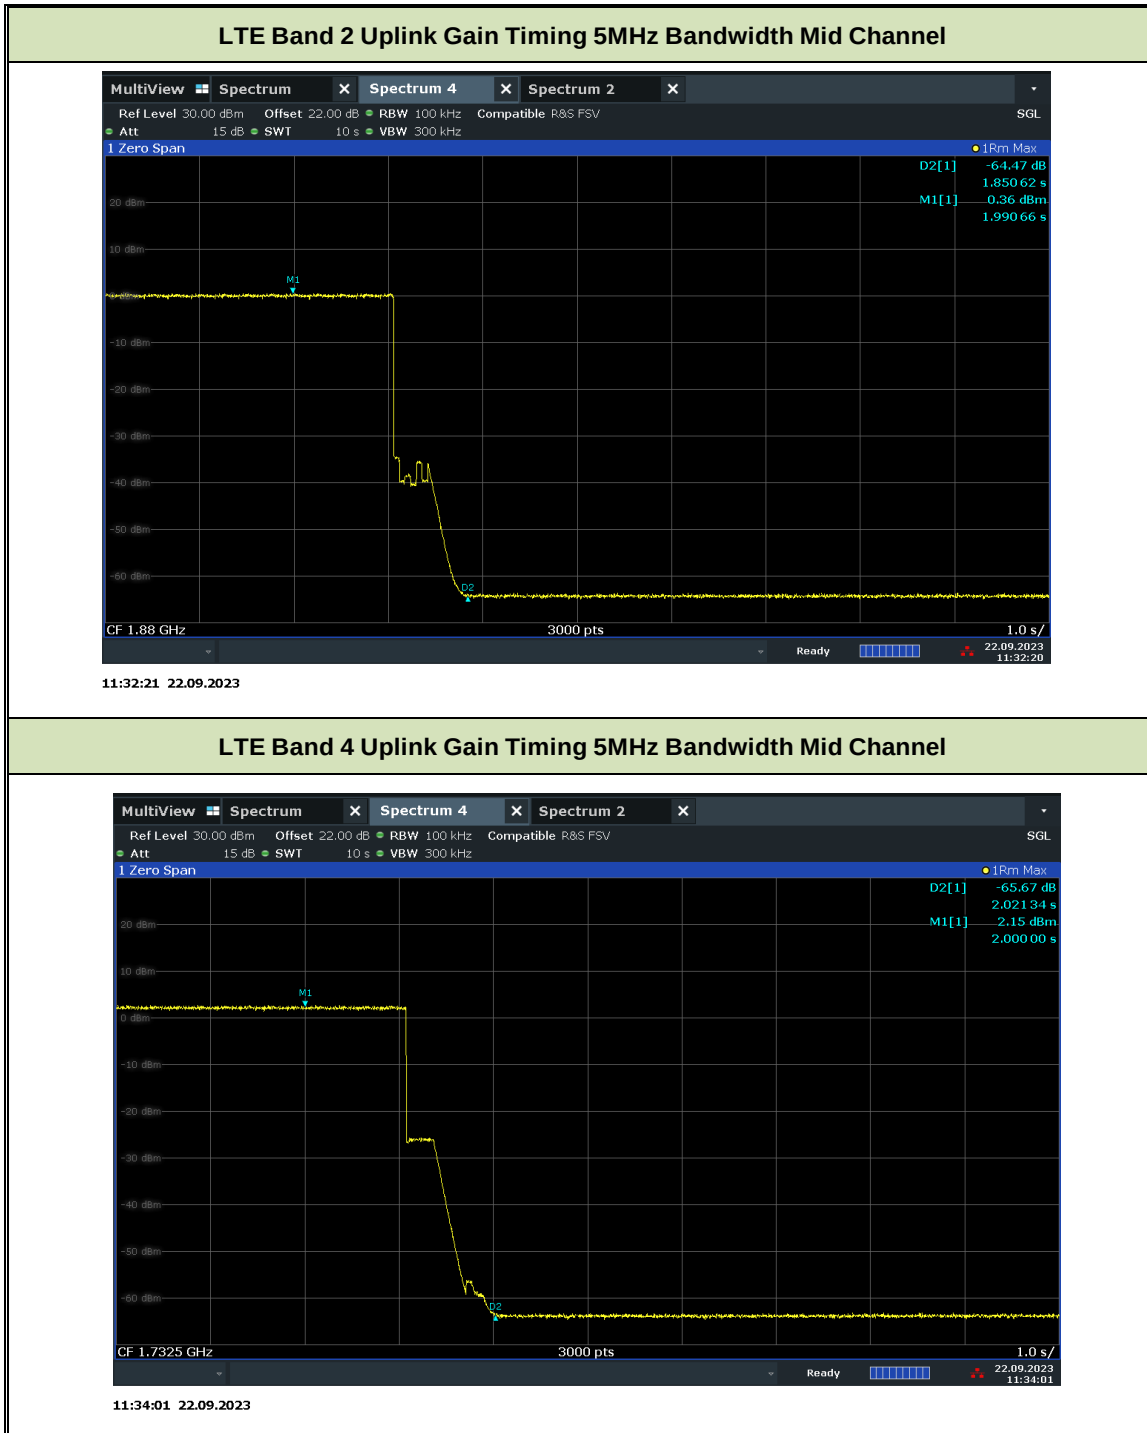




FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 13 Uplink Gain Timing_5MHz Bandwidth Mid Channel

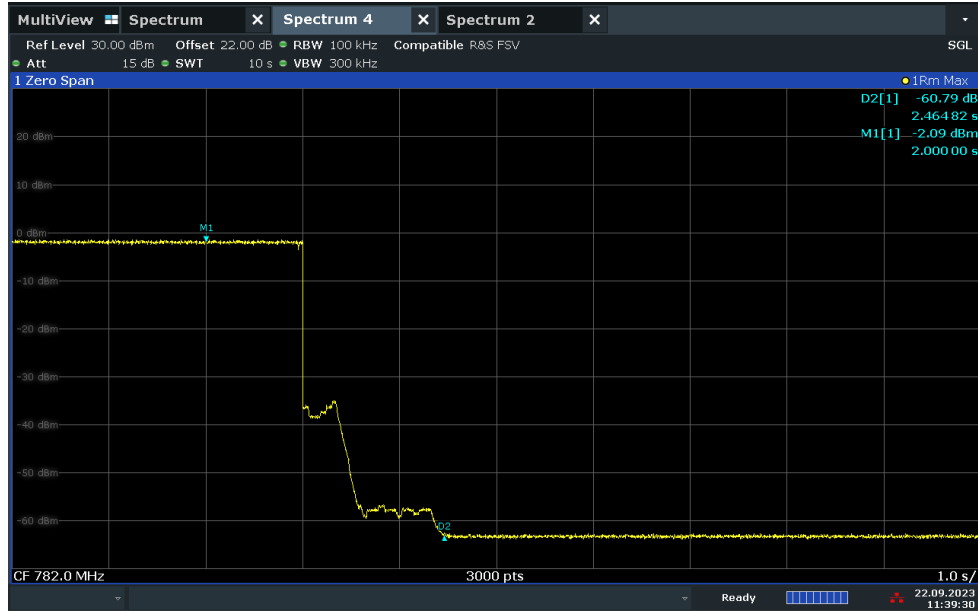

11:39:30 22.09.2023

LTE Band 25 Uplink Gain Timing_5MHz Bandwidth Mid Channel

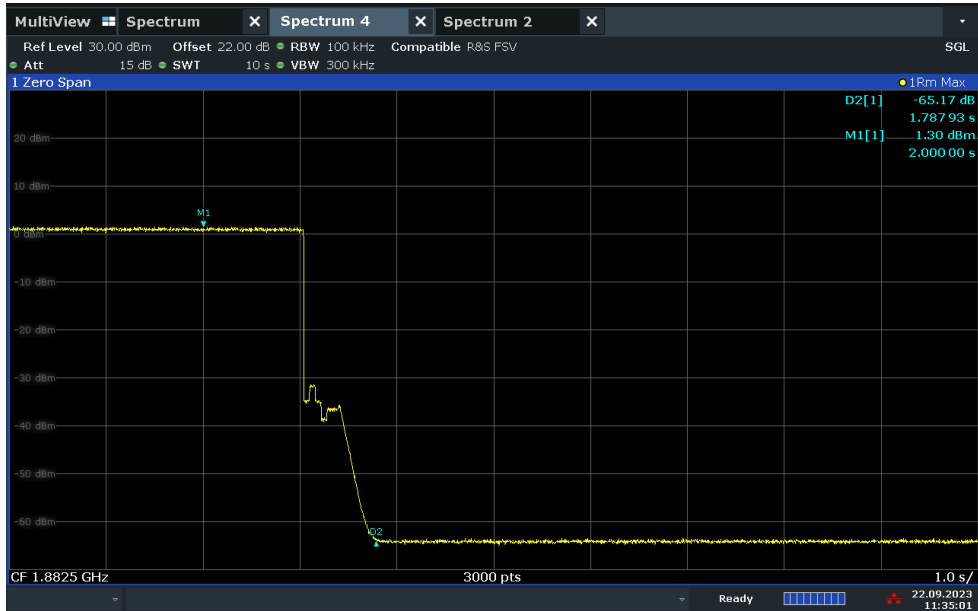

11:35:01 22.09.2023



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

2.10 Occupied Bandwidth

2.10.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1049
FCC 47 CFR Part 22, Clause 22.917(b)
FCC 47 CFR Part 24, Clause 24.238(b)
RSS-Gen, Clause 6.6

2.10.2 Standard Applicable

FCC 47 CFR Part 24, Clause 24.238(b)

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

26dB Bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least 26 dB below the transmitter power.

Using the occupied bandwidth measurement function in the spectrum analyzer, the 99% occupied bandwidth was measured.

In addition, the 26dB bandwidth was measured in accordance with FCC KDB 971168 D01 V0202 Clause 4.1 using the ndB measurement function in the spectrum analyzer.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be at least 3x RBW.

2.10.3 Equipment Under Test and Modification State

Serial No: 560311000026/ Test Configuration A and B

2.10.4 Date of Test/Initial of test personnel who performed the test

July 19, and October 11 2023 / MARG

2.10.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.10.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature	21.8 - 24.3 °C
Relative Humidity	40.0 – 45.3 %
ATM Pressure	99.8 – 101.1kPa

2.10.7 Additional Observations

- This is a conducted test. Both 26dB bandwidth and 99% bandwidth presented.



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

- Using the occupied bandwidth measurement function in the spectrum analyzer, the 99% occupied bandwidth was measured.
- The 26dB bandwidth is measured in accordance with ANSI C63.26 clause 5.4.3 using the ndB measurement function in the spectrum analyzer.
- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The RBW is set to 1% of the OBW while the VBW is $\geq 3X$ RBW.
- The detector is peak, and the trace mode is max hold.
- The transducer factor (TDF) used is from the external attenuators and cables used.
- Per Client request only High Channel was tested for Band 25
- All low, middle, and high channels were verified for Band 2, 4, 5, 12, 13.
- Only test plots for middle channel presented as the representative configuration except for Band 25.

2.10.8 Test Results

LTE Band 2 Downlink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	625	1932.5	4.44	4.77
	900	1960	4.45	4.76
	1175	1987.5	4.45	4.77
10 MHz	650	1935	8.88	9.46
	900	1960	8.91	9.49
	1150	1985	8.91	9.49
15 MHz	675	1937.5	12.95	14.37
	900	1960	13.27	14.18
	1125	1982.5	13.36	14.29
20 MHz	700	1940	17.67	18.92
	900	1960	17.70	18.95
	1100	1980	17.79	18.98

LTE Band 2 Uplink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	18625	1852.5	4.44	4.74
	18900	1880	4.44	4.77
	19175	1907.5	4.44	4.76
10 MHz	18650	1855	8.87	9.44



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

	18900	1880	8.91	9.50
	19150	1905	8.89	9.45
15 MHz	18675	1857.5	13.21	14.16
	18900	1880	13.34	14.22
	19125	1902.5	13.29	14.18
20 MHz	18700	1860	17.67	18.82
	18900	1880	17.78	18.92
	19100	1900	17.71	18.85

LTE Band 4 Downlink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	1975	2112.5	4.45	4.79
	2175	2132.5	4.45	4.78
	2375	2152.5	4.45	4.78
10 MHz	2000	2115	8.90	9.51
	2175	2132.5	8.90	9.51
	2350	2150	8.92	9.53
15 MHz	2025	2117.5	13.32	14.23
	2175	2132.5	13.30	14.24
	2325	2147.5	13.35	14.33
20 MHz	2050	2120	17.76	18.99
	2175	2132.5	17.80	19.10
	2300	2145	17.77	19.07

LTE Band 4 Uplink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	19975	1712.5	4.45	4.74
	20175	1732.5	4.45	4.78
	20375	1752.5	4.45	4.77
10 MHz	20000	1715	8.90	9.46
	20175	1732.5	8.91	9.49



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

	20350	1750	8.90	9.46
15 MHz	20025	1717.5	13.33	14.23
	20175	1732.5	13.34	14.24
	20325	1747.5	13.35	14.21
20 MHz	20050	1720	17.76	18.85
	20175	1732.5	17.78	18.94
	20300	1745	17.76	18.81
LTE Band 5 Downlink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	2425	871.5	4.44	4.76
	2525	881.5	4.45	4.75
	2625	891.5	4.44	4.75
10 MHz	2450	874	8.89	9.47
	2525	881.5	8.89	9.45
	2600	889	8.91	9.48

LTE Band 5 Uplink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	20425	826.5	4.43	4.73
	20525	836.5	4.43	4.74
	20625	846.5	4.43	4.75
10 MHz	20450	829	8.91	9.46
	20525	836.5	8.84	9.40
	20600	844	8.91	9.45

LTE Band 12 Downlink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	5035	731.5	4.45	4.75
	5095	737.5	4.43	4.76
	5155	743.5	4.45	9.46



FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

10 MHz	5060	734	8.92	9.44
	5095	737.5	8.88	9.45
	5130	741	8.91	9.47

LTE Band 12 Uplink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	23035	701.5	4.44	4.75
	23095	707.5	4.47	4.76
	23155	713.5	4.46	4.78
10 MHz	23060	704.0	8.85	9.38
	23095	707.5	8.92	9.45
	23130	711.0	8.91	9.46


LTE Band 13 Downlink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	5205	748.5	4.44	4.77
	5230	751.0	4.46	4.78
	5255	753.5	4.44	4.76
10 MHz	-	-	-	-
	5230	751.0	8.93	9.48
	-	-	-	-

LTE Band 13 Uplink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	23205	779.5	4.44	4.75
	23230	782.0	4.45	4.76
	23255	784.5	4.45	4.77
10 MHz	-	-	-	-
	23230	782.0	8.93	9.46
	-	-	-	-

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE


LTE Band 25 Downlink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	8665	1992.5	4.46	4.78
10 MHz	8640	1990.0	8.90	9.48
15 MHz	8615	1987.5	13.32	14.23
20 MHz	8590	1985.0	17.77	19.02

LTE Band 25 Uplink				
Bandwidth (MHz)	Channels	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
5 MHz	26665	1912.5	4.44	4.75
10 MHz	26640	1910.0	8.88	9.44
15 MHz	26615	1907.5	13.26	14.12
20 MHz	26590	1905.0	17.64	18.76

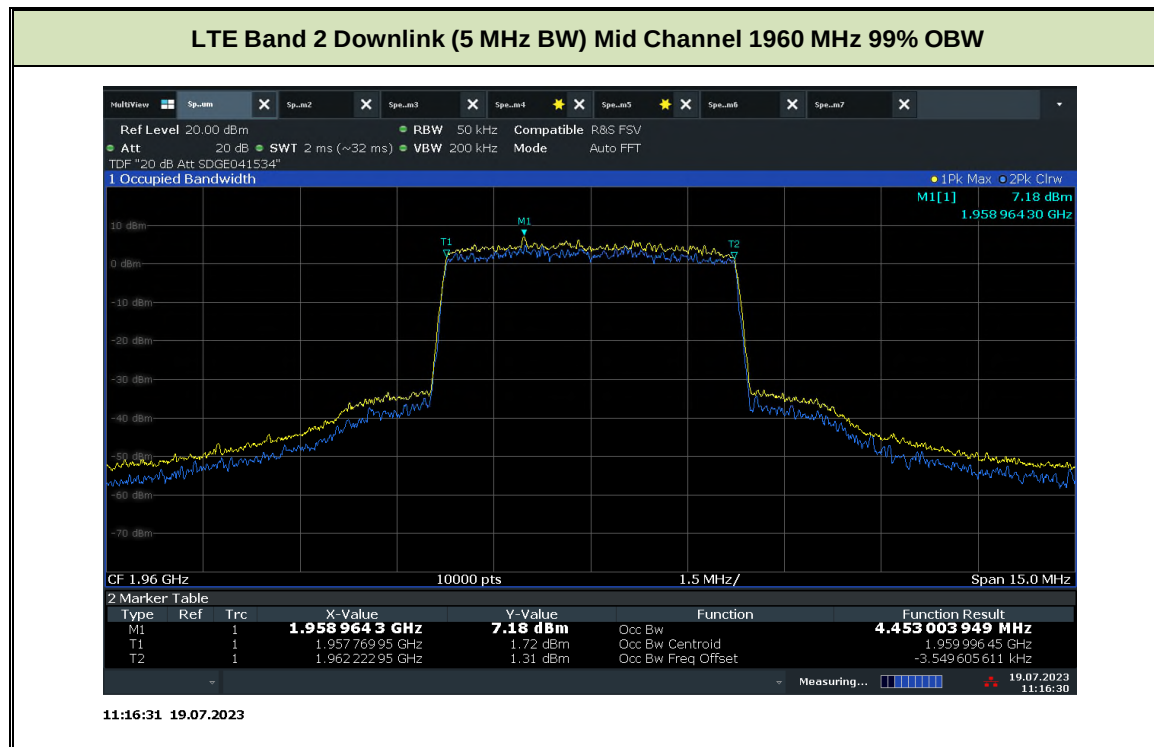


FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

LTE Band 2 Downlink (5 MHz BW) Mid Channel 1960 MHz -26dB BW

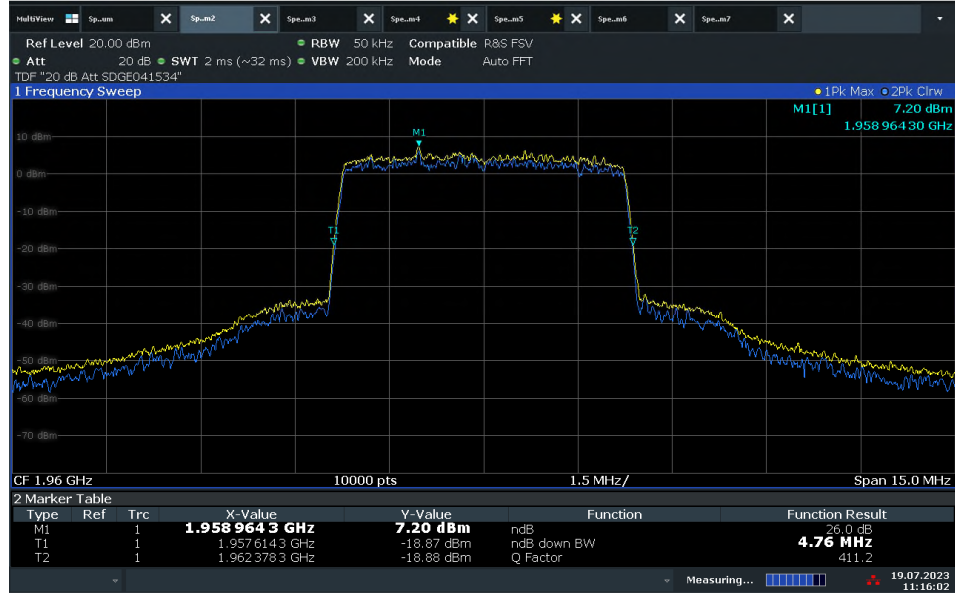


11:16:03 19.07.2023

LTE Band 2 Downlink (10 MHz BW) Mid Channel 1960 MHz 99% OBW

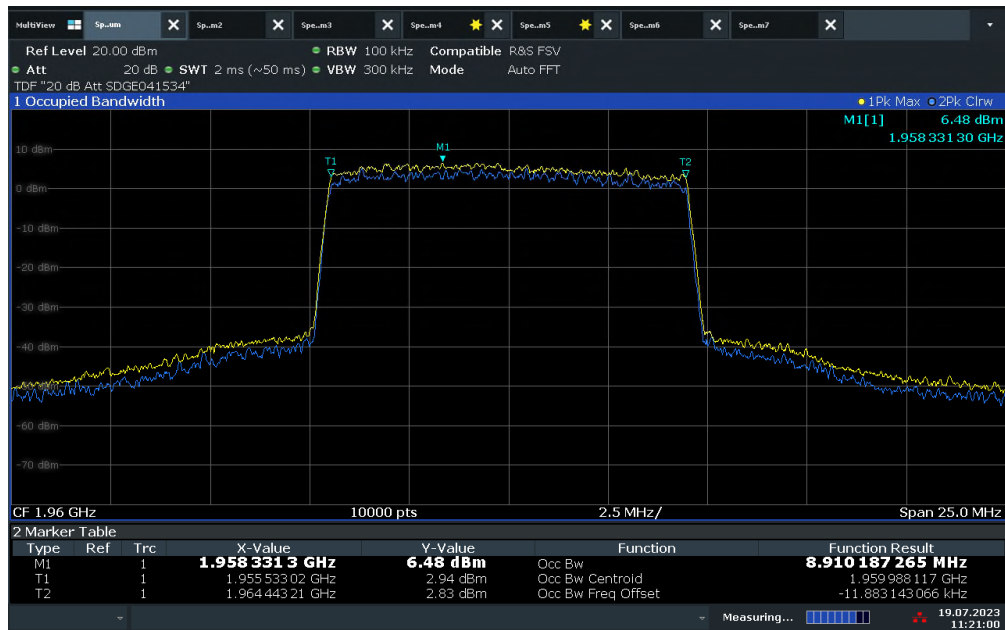


11:21:01 19.07.2023

FCC ID: YETG43-BBBE
IC No.: 9298A-G43BBBE

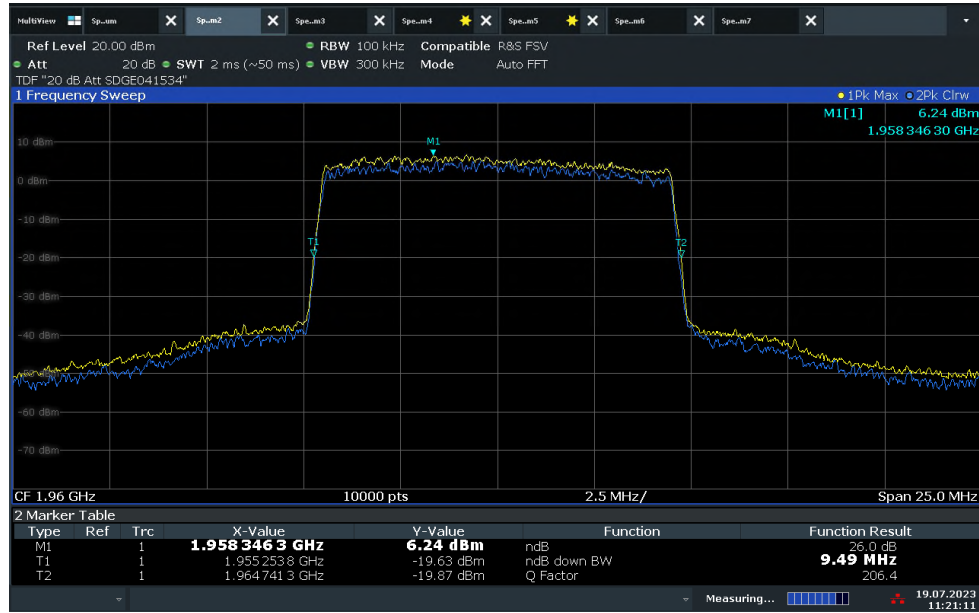LTE Band 2 Downlink (10 MHz BW) Mid Channel 1960 MHz -26 dB BW

11:21:12 19.07.2023

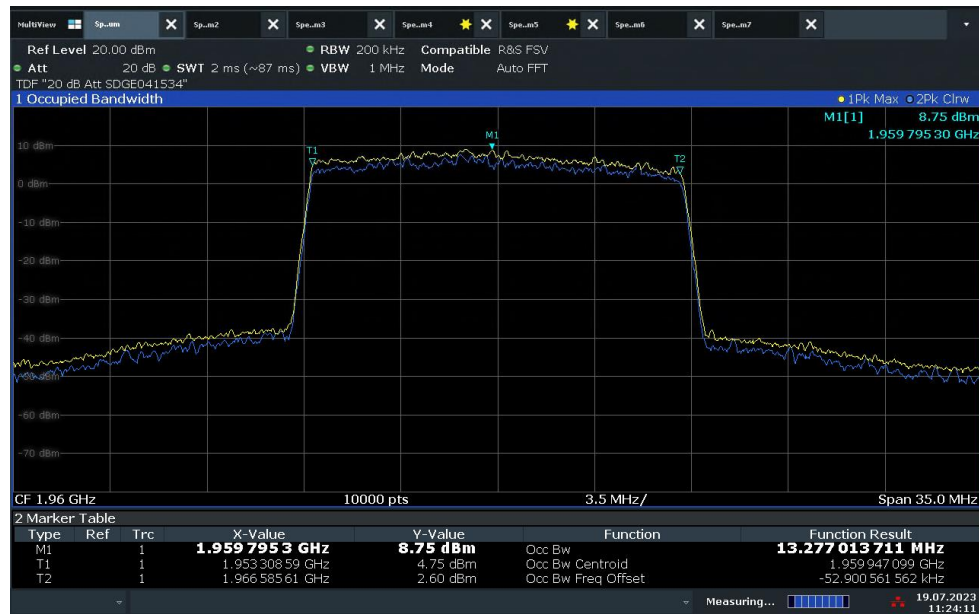LTE Band 2 Downlink (15 MHz BW) Mid Channel 1960 MHz 99% OBW

11:21:12 19.07.2023