

Produkte
Products

Prüfbericht - Nr.: 14044067 001		Seite 1 von 14	
<i>Test Report No.:</i>		<i>Page 1 of 14</i>	
Auftraggeber: <i>Client:</i>		Stadlbauer Marketing + Vertrieb GmbH Rennbahn Allee 1, 5412 Puch Salzburg, Austria	
Gegenstand der Prüfung: <i>Test Item:</i>		Short Range Device - Radio Controlled Toy Transmitter (2.4GHz)	
Bezeichnung: <i>Identification:</i>	370401010, 401010	Serien-Nr.: <i>Serial No.:</i>	Engineering sample
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000345491-006	Eingangsdatum: <i>Date of Receipt:</i>	15.04.2016
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>		Test sample is not damaged and suitable for testing.	
Prüfort: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. 8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong	
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C RSS-Gen Issue 4 RSS-102 Issue 5 RSS-210 Issue 8 ANSI C63.10-2013	
Prüfergebnis: <i>Test Results:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .	
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Hong Kong Ltd. 8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong	
geprüft/ tested by:		kontrolliert/ reviewed by:	
06.07.2016	Joey Leung Project Manager	06.07.2016	Benny Lau Senior Project Manager
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>
	Unterschrift <i>Signature</i>		Unterschrift <i>Signature</i>
Sonstiges: Other Aspects		FCC ID: YFA370401010 IC: 12260A-370401010	
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode.....	5
Principle of Configuration Selection	5
Test Operation and Test Software	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
List of Test and Measurement Instruments.....	8
Measurement Uncertainty	9
Results FCC Part 15 – Subpart C / RSS-210 Issue 8.....	10
FCC 15.203 – Antenna Requirement 1.....	Pass 10
FCC 15.204 – Antenna Requirement 2.....	Pass 10
RSS-Gen 6.3 – External Control.....	Pass 10
RSS-Gen 8.3 – Antenna Requirement	Pass 10
FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains.....	N/A 11
FCC 15.215(c) – 20 dB Bandwidth	Pass 11
RSS-Gen 6.6 – Occupied Bandwidth.....	Pass 11
FCC 15.249(a) / RSS-210 A2.9(a) – Field Strength of Fundamental and Harmonics.....	Pass 12
FCC 15.249 (d), 15.205 / RSS-210 (b) – Out Of Band Radiated Emission	Pass 14

Appendix 1 – Test protocols	3 pages
Appendix 2 – Test setup	4 pages
Appendix 3 – EUT External Photos	4 pages
Appendix 4 – EUT Internal Photos	4 pages
Appendix 5 – RF exposure information	2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2405 - 2475MHz
Type of modulation	GFSK
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nom} : 6.0 V (4 x 1.5V AA size battery)

Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

FCC ID: YFA370401010

IC: 12260A-370401010

Models	Product description
370401010, 401010	Radio Controlled Toy Transmitter

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual
Rating Label

Independent Operation Modes

The basic operation mode is transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

During testing, the EUT was programmed to test mode by manufacturer. Change of transmitting frequency can be achieved by pressing a built-in button on EUT. Output power of EUT was set to fixed level throughout testing.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- none

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz, the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz, the EUT was placed at the middle of the 1.5 m height turntable. And the turntable is 3 meters far from the measuring antenna. In addition, RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

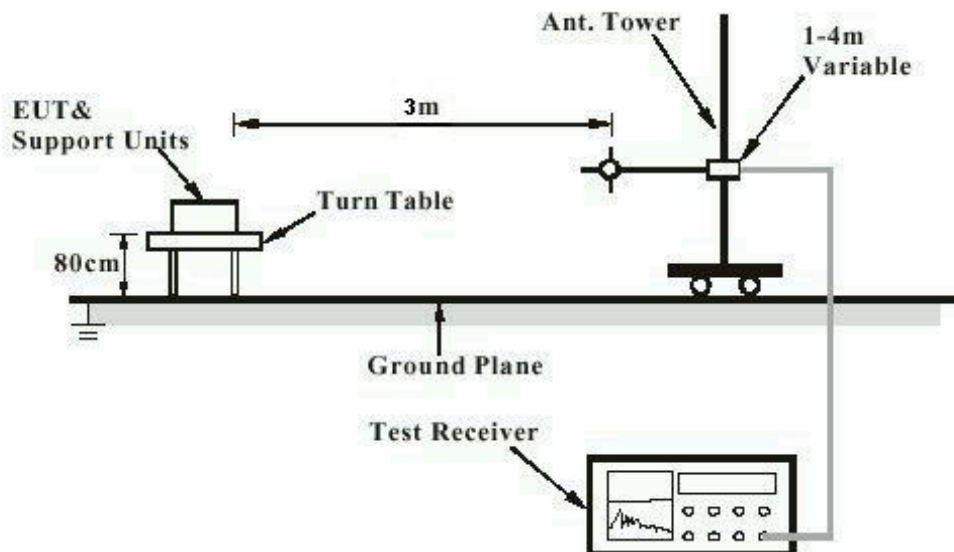

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

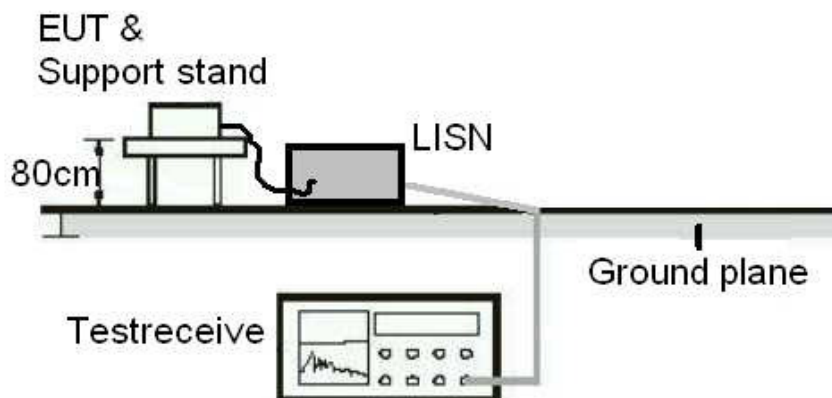

List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC/ IC Registration number: 90656 / 4780A-1)

Radiated Emission

Equipment	Manufacturer	Type	S/N	Last Cal. Date	Due Date
Semi anechoic Chamber	Frankonia	Nil	Nil	14 Apr 2016	14 Apr 2017
Test Receiver	R & S	ESU40	100190	07 Dec 2015	07 Dec 2016
Bi conical Antenna	R & S	HK116	100241	01 Sep 2015	01 Sep 2017
Log Periodic Antenna	R & S	HL223	841516/017	01 Sep 2015	01 Sep 2017
Coaxial cable	Harbour	LL335	N/A	10 Jun 2016	10 Jun 2018
Microwave amplifier 0.5 26.5GHz, 25dB gain	HP	83017A	3950M00241	17 Jul 2014	17 Jul 2016
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	28 Oct 2015	28 Oct 2017
Horn Antenna	EMCO	3115	9002 3347	26 Aug 2015	26 Aug 2017
Active Loop Antenna	EMCO	6502	9107-2651	15 Aug 2015	15 Aug 2016

TÜV Rheinland Hong Kong Ltd

Radio Frequency Test

Equipment	Manufacturer	Type	S/N	Last Cal. Date	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP30	100610	20 Jan 2016	19 Jan 2017

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 3.43\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.68\text{dB}$ (30MHz to 200MHz) and $\pm 5.73\text{dB}$ (200MHz to 1000MHz) and $\pm 5.57\text{dB}$ (above 1GHz).

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-210 Issue 8

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	Antenna type:	Fixed Integral wire antenna
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

RSS-Gen 6.3 – External Control		Pass
IC Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.		
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	Pass	

RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.		
Results:	a) Antenna type: b) Manufacturer c) model no d) Gain with reference to an isotropic radiator:	Fixed Integral wire antenna N/A N/A 0 dBi
Verdict:	Pass	

FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A
There is no AC power input or output ports on the EUT.	

FCC 15.215(c) – 20 dB Bandwidth	Pass			
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure RBW/VBW : 100 kHz / 300 kHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%				
Requirement:	The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.			
Results:	For test protocols refer to Appendix 1, page 2-3.			
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2405	2403.980	> 2400	2407.400	< 2483.5
2445	2444.080	> 2400	2447.400	< 2483.5
2475	2473.700	> 2400	2475.680	< 2483.5

RSS-Gen 6.6 – Occupied Bandwidth		Pass	
IC Requirement : N/A			
Test Specification : RSS-Gen Mode of operation : Tx mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%			
Results:		Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.	
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)
2405	2404.080	2407.280	3.200
2445	2444.180	2447.300	3.120
2475	2473.780	2475.560	1.780

FCC 15.249(a) / RSS-210 A2.9(a) – Field Strength of Fundamental and Harmonics			Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz RBW/VBW : 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%			
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.			
Results: PASS.			
Fundamental Frequency 2405MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2404.936	85.82	114.0 / PK	
2405.000	43.01	94.0 / AV	
Fundamental Frequency 2405MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2406.955	89.11	114.0 / PK	
2405.000	43.37	94.0 / AV	
Harmonics 2405MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4810.449	65.41	74.0 / P	
4810.032	42.60	54.0 / A	
7214.647	62.36	74.0 / P	
7214.840	45.66	54.0 / A	
Harmonics 2405MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4809.487	69.20	74.0 / P	
4810.064	43.16	54.0 / A	
7214.455	62.96	74.0 / P	
7214.904	45.59	54.0 / A	
Fundamental Frequency 2445MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2443.205	86.84	114.0 / PK	
2444.936	42.81	94.0 / AV	

Fundamental Frequency 2445MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2443.782	88.06	114.0 / PK	2443.782	88.06	114.0 / PK
2444.936	43.28	94.0 / AV	2444.936	43.28	94.0 / AV
Harmonics 2445MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4889.327	66.36	74.0 / P	4889.327	66.36	74.0 / P
4890.000	42.44	54.0 / A	4890.000	42.44	54.0 / A
7332.917	62.13	74.0 / P	7332.917	62.13	74.0 / P
7335.064	44.47	54.0 / A	7335.064	44.47	54.0 / A
Harmonics 2445MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4887.340	68.42	74.0 / P	4887.340	68.42	74.0 / P
4889.904	42.99	54.0 / A	4889.904	42.99	54.0 / A
7334.327	63.81	74.0 / P	7334.327	63.81	74.0 / P
7335.000	44.74	54.0 / A	7335.000	44.74	54.0 / A
Fundamental Frequency 2475MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2475.737	86.76	114.0 / PK	2475.737	86.76	114.0 / PK
2475.000	42.96	94.0 / AV	2475.000	42.96	94.0 / AV
Fundamental Frequency 2475MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2475.032	88.84	114.0 / PK	2475.032	88.84	114.0 / PK
2475.032	43.60	94.0 / AV	2475.032	43.60	94.0 / AV
Harmonics 2475MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4947.404	64.31	74.0 / PK	4947.404	64.31	74.0 / PK
4949.904	42.37	54.0 / AV	4949.904	42.37	54.0 / AV
Harmonics 2475MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4954.904	66.70	74.0 / PK	4954.904	66.70	74.0 / PK
4949.968	42.92	54.0 / AV	4949.968	42.92	54.0 / AV

FCC 15.249 (d), 15.205 / RSS-210 (b) – Out Of Band Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Detector : Peak Frequency range : 9kHz – 25GHz RBW/VBW : 1 MHz / 3 MHz for f > 1 GHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%		
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.		
Tx frequency 2405MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	48.03	74.0 / PK
2400.000	33.84	54.0 / AV
Tx frequency 2405MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	53.73	74.0 / PK
2400.000	33.59	54.0 / AV
Tx frequency 2445MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2445MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2475MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	46.12	74.0 / PK
2483.500	33.13	54.0 / AV
Tx frequency 2475MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	45.25	74.0 / PK
2483.500	33.11	54.0 / AV