



Overview, Connector-Interface

TABLE OF CONTENTS


Page	Description
1	Overview, Connector-Interface
2	FPGA Configuration HPS NAND Flash, Clocking RTC, Temperature Sense
3	DDR4 SDRAM
4	ETH-Port 0 & 1
5	ETH-Port 2, GXBs
6	USB
7	Power

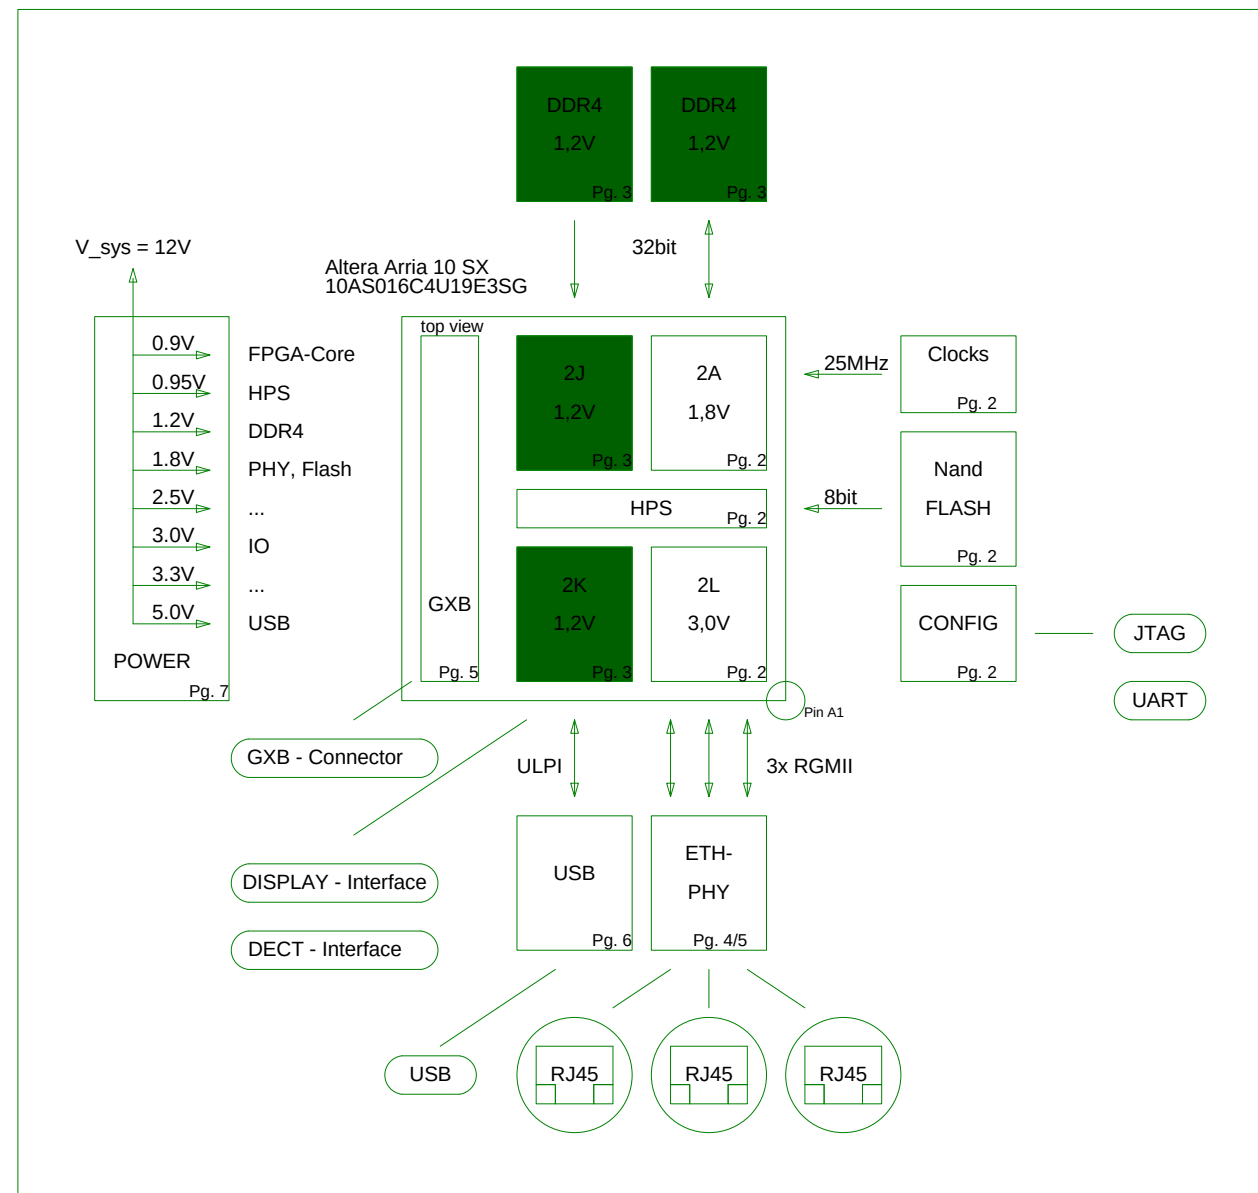


Debug LEDs

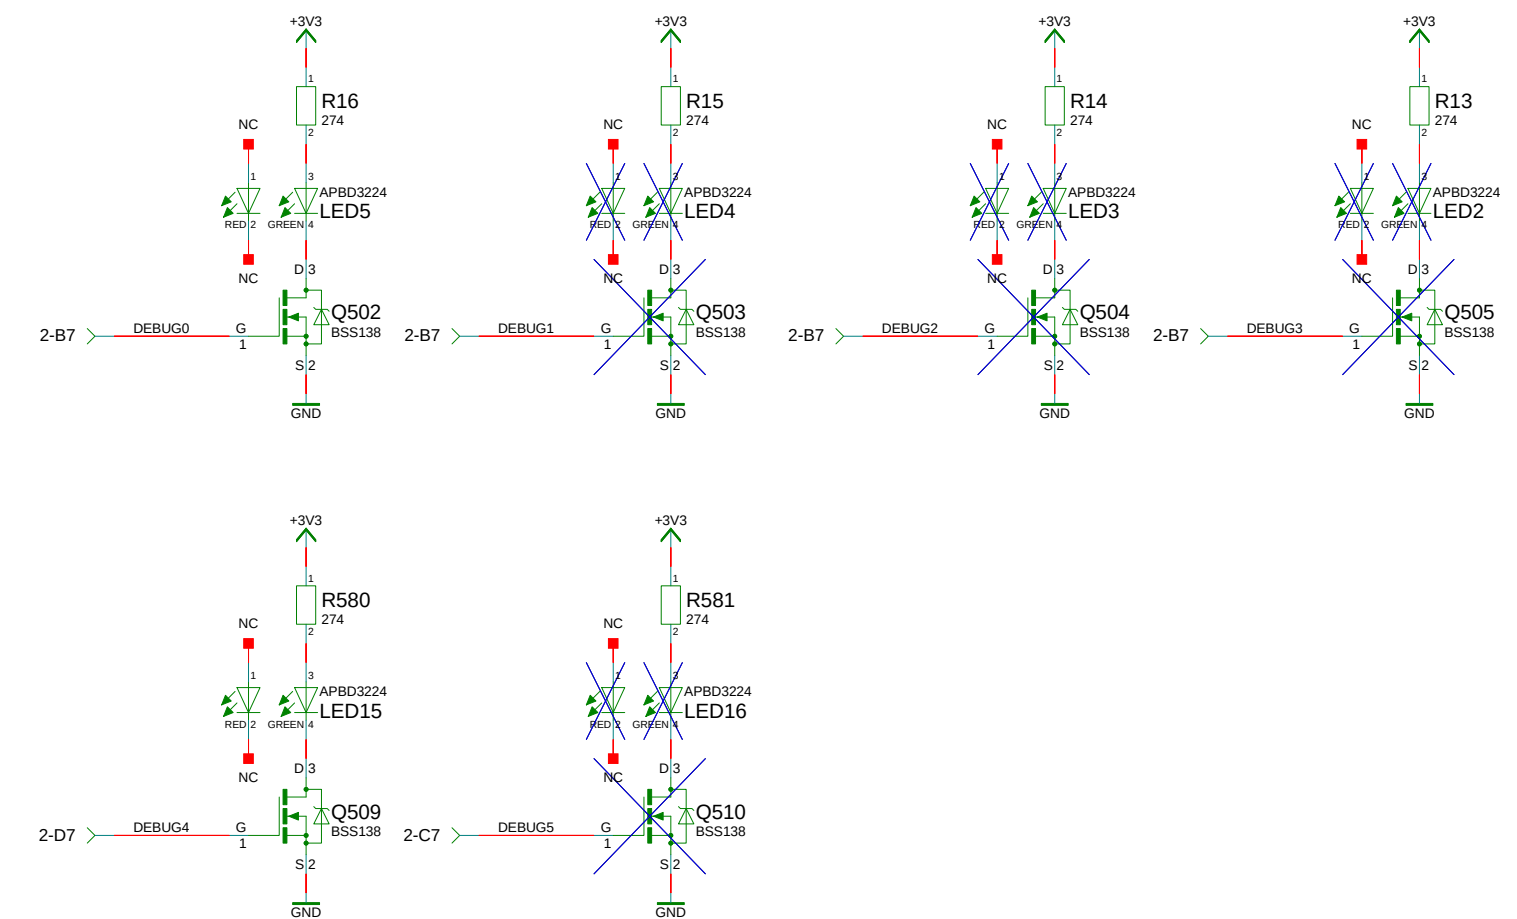


DECT-Interface (1V8)

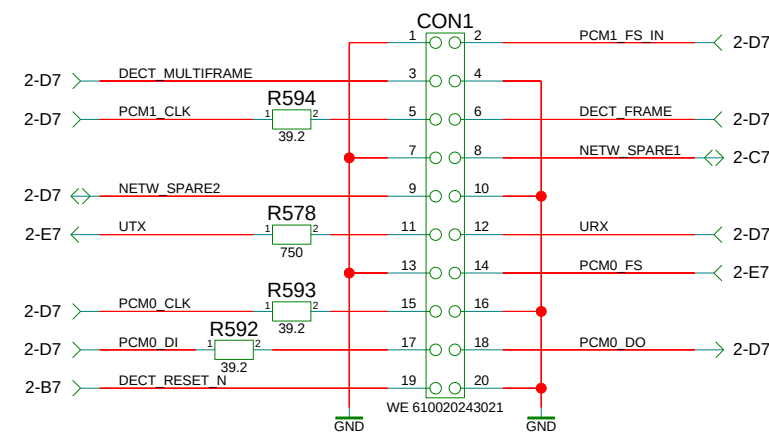


Local Power

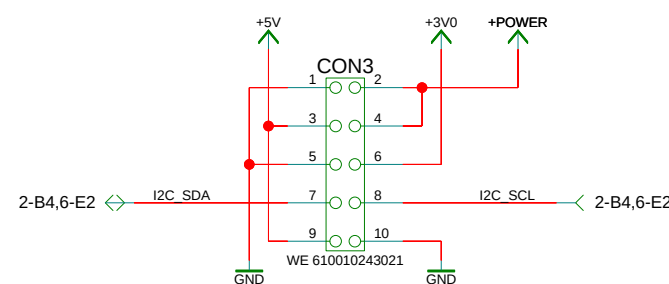


Display - Interface (3V0)

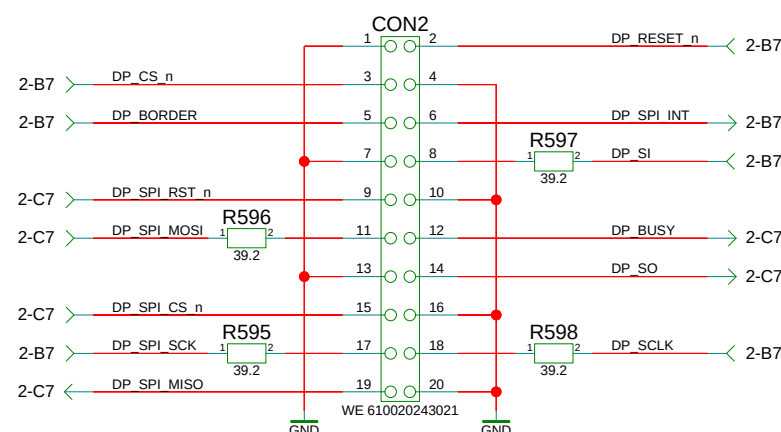




PoE

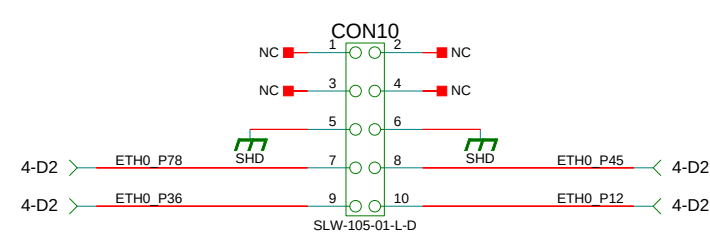

PoU (remote Power)

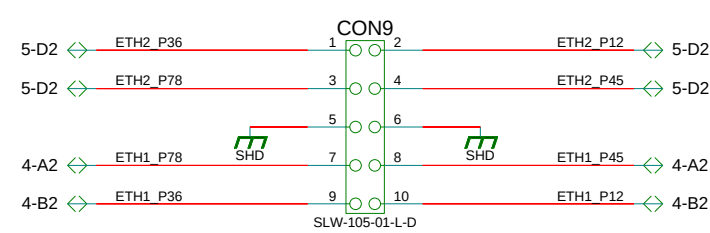


EMI - shield

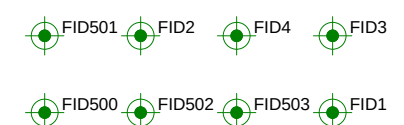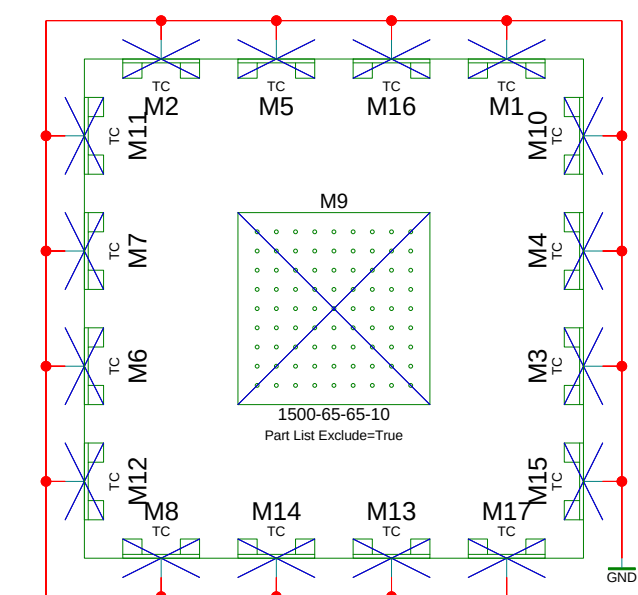


Overview, Connector-Interface							
Drawn by	FLW	14.06.2017	Title			RAD_MAIN	
Approved	MFI	04.08.2017	DWG NO			3123-D	
Released	FWA	04.08.2017					
Saved	04/08/2017:14:45		Replacement for	3123-C			
			Sheet	1 1 / 7			


DDR4 SDRAM

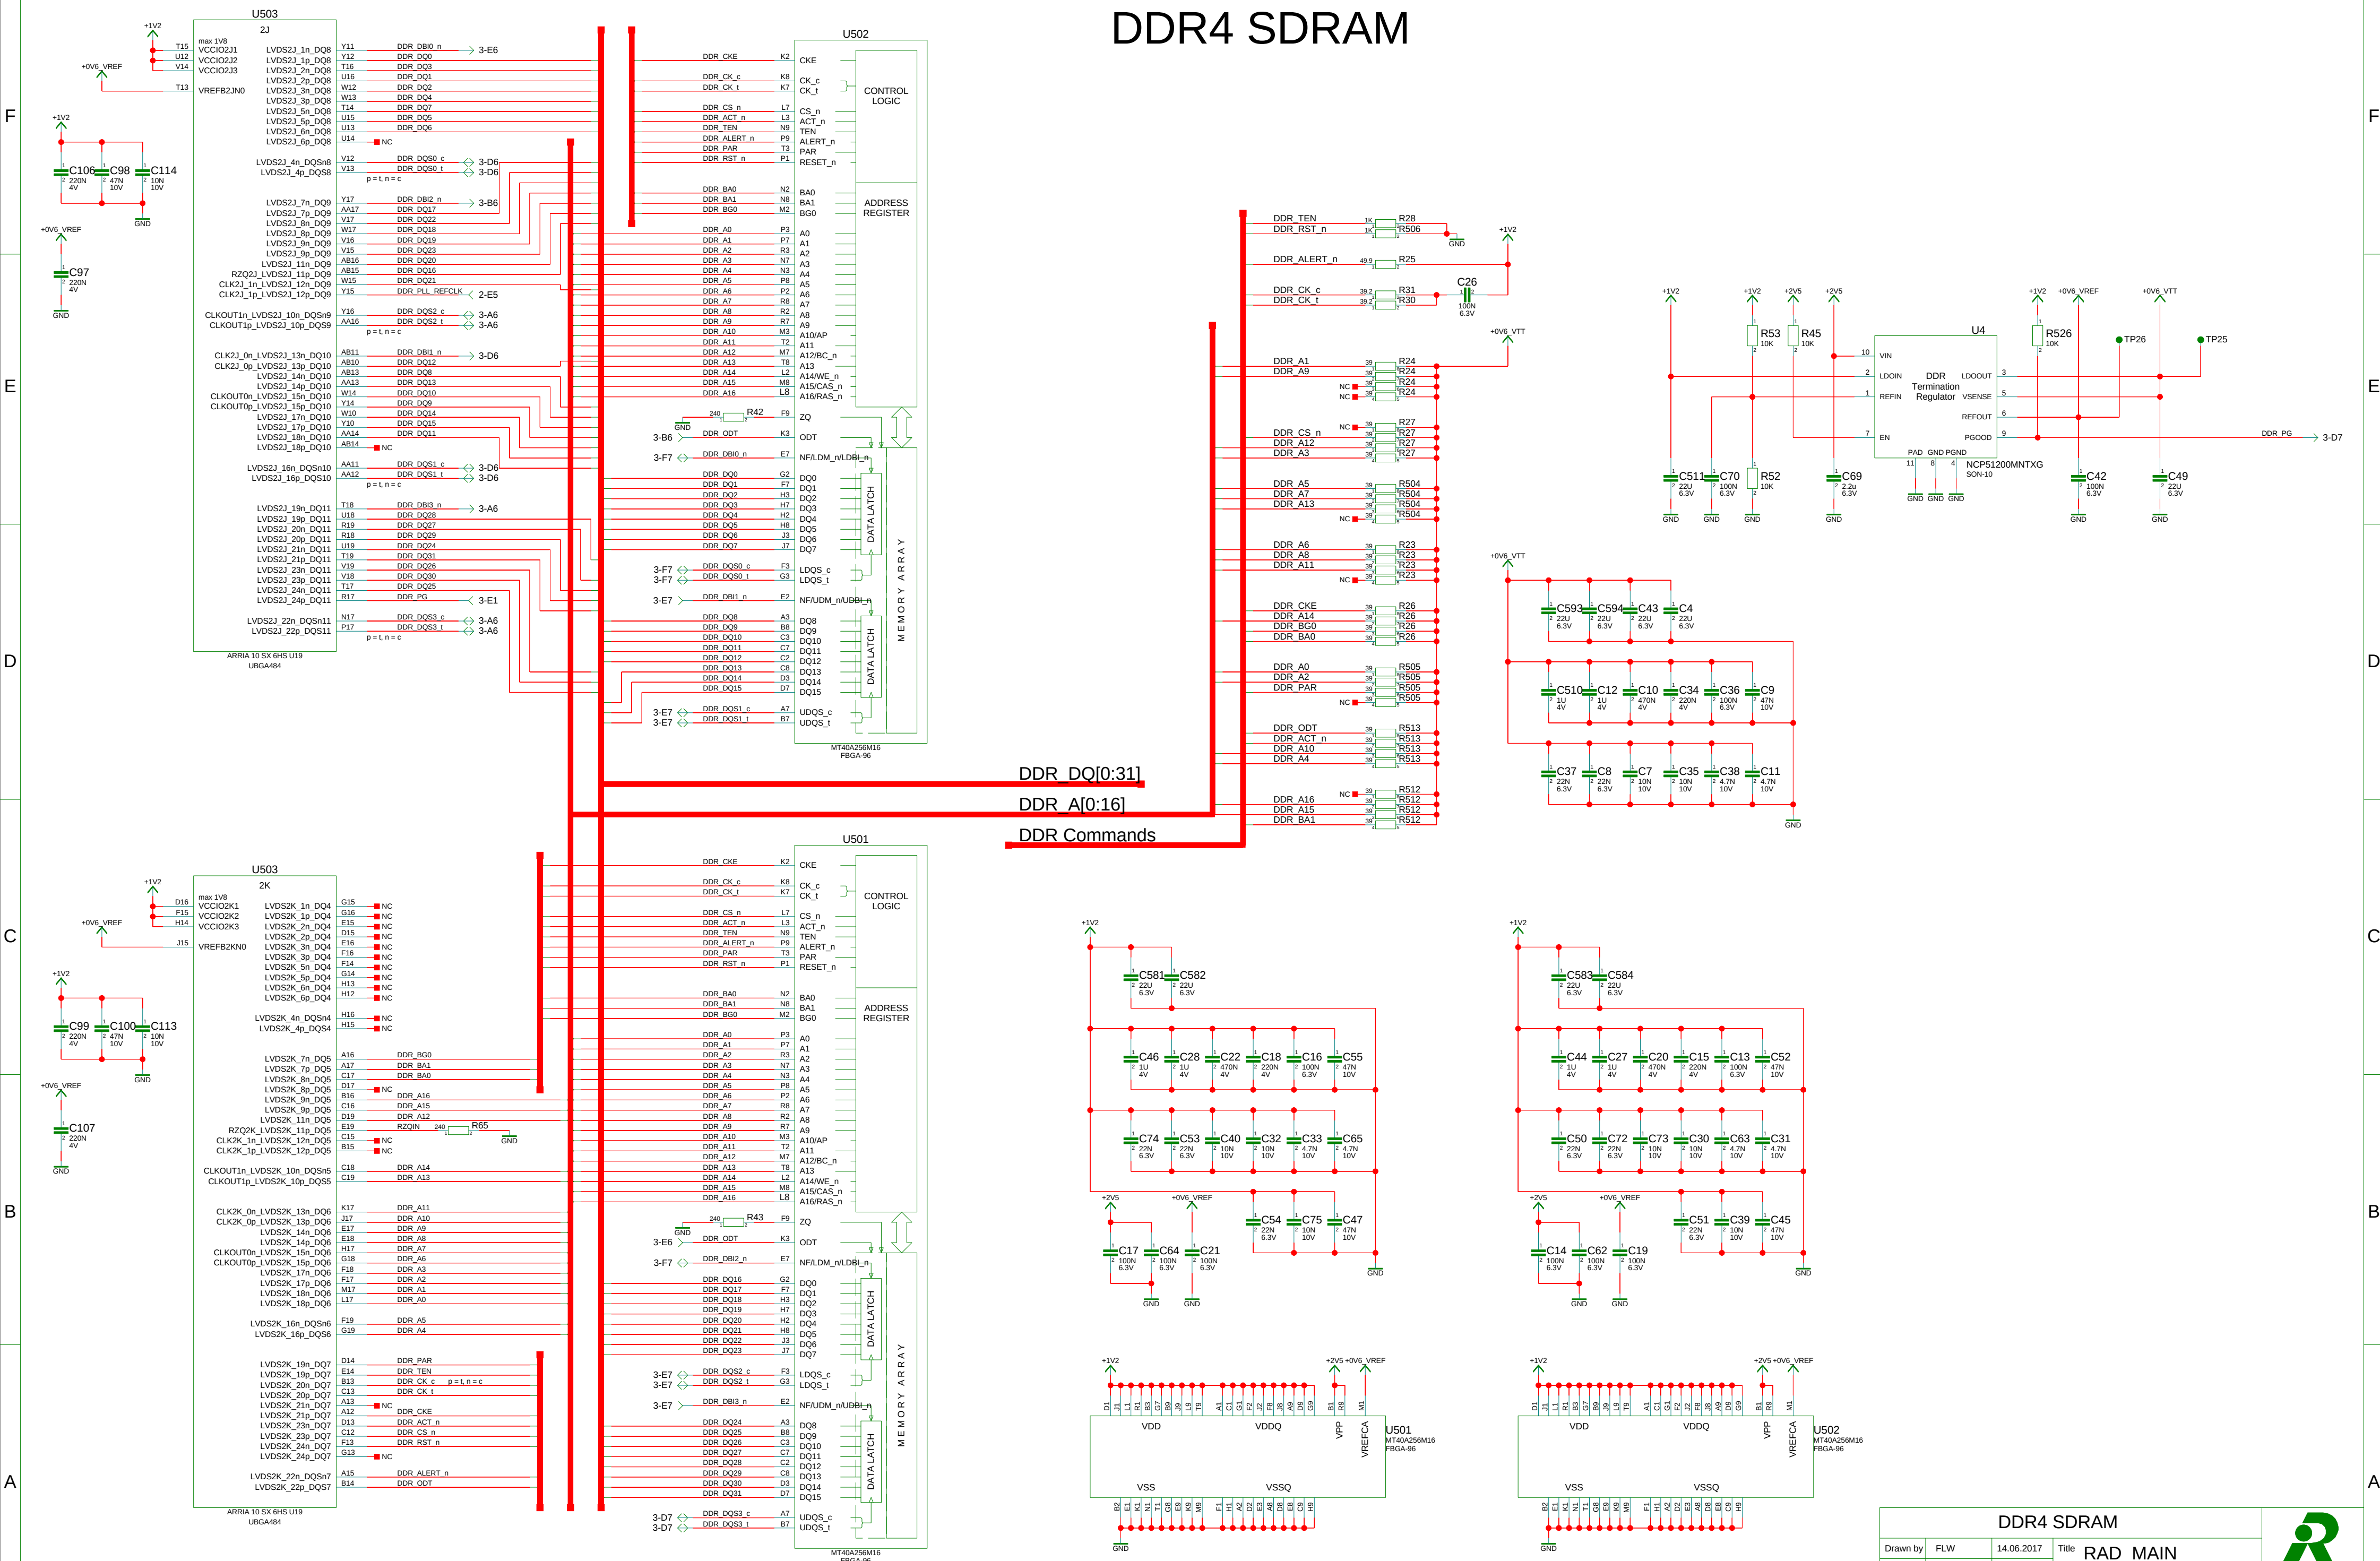

ETH-Port 0 IP

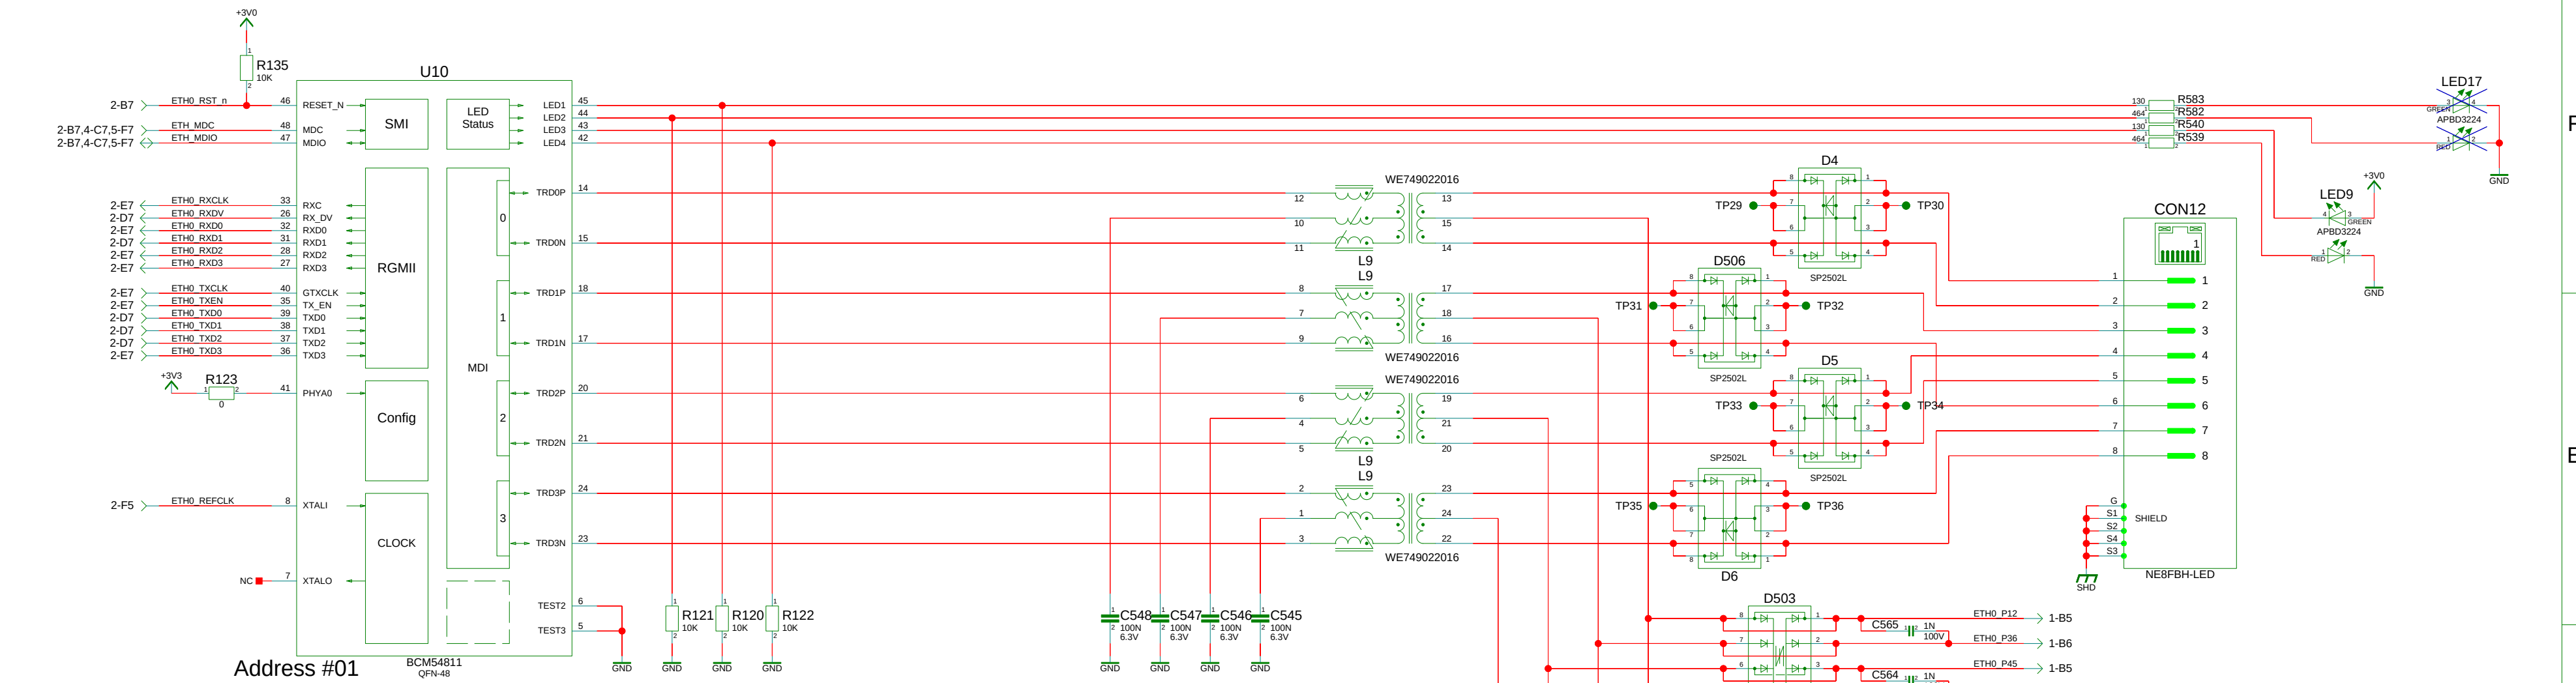


ETH-Port 1 ULLI A

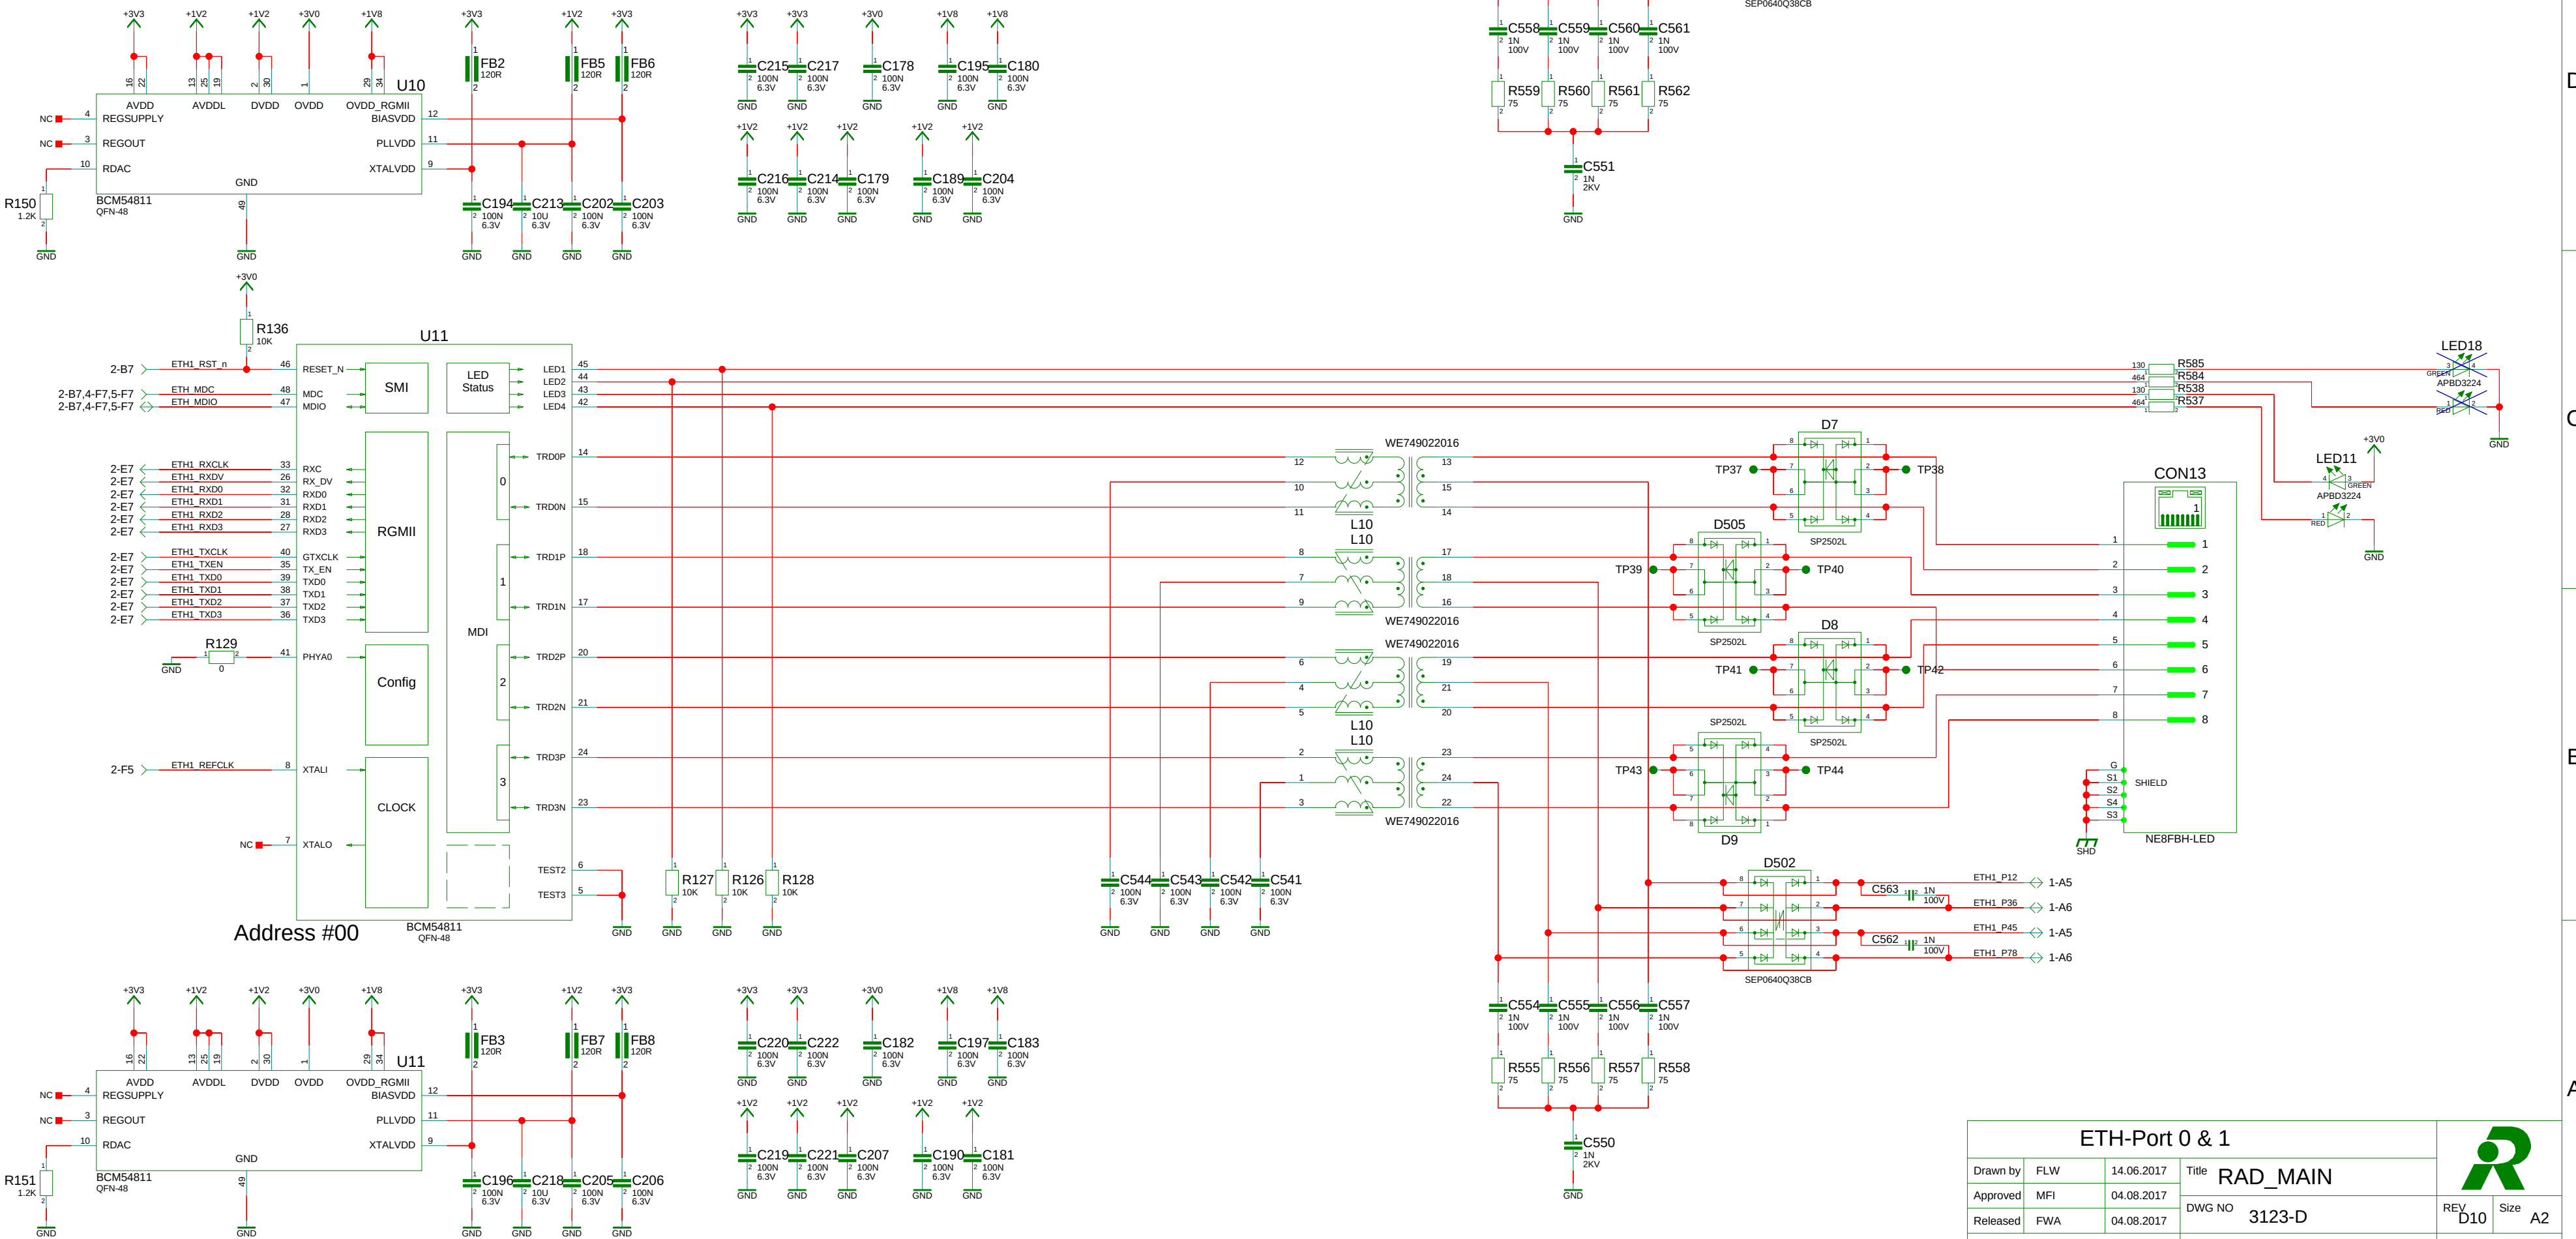


ETH-Port 0 & 1					
Drawn by	FLW	14.06.2017	Title		
Approved	MFI	04.08.2017	DWG NO	3123-D	REV D10 Size A2
Released	FWA	04.08.2017	Replacement for	3123-C	Sheet 41 / 7
Saved	04/08/2017:14:45				


ETH-Port 2 ULLI B

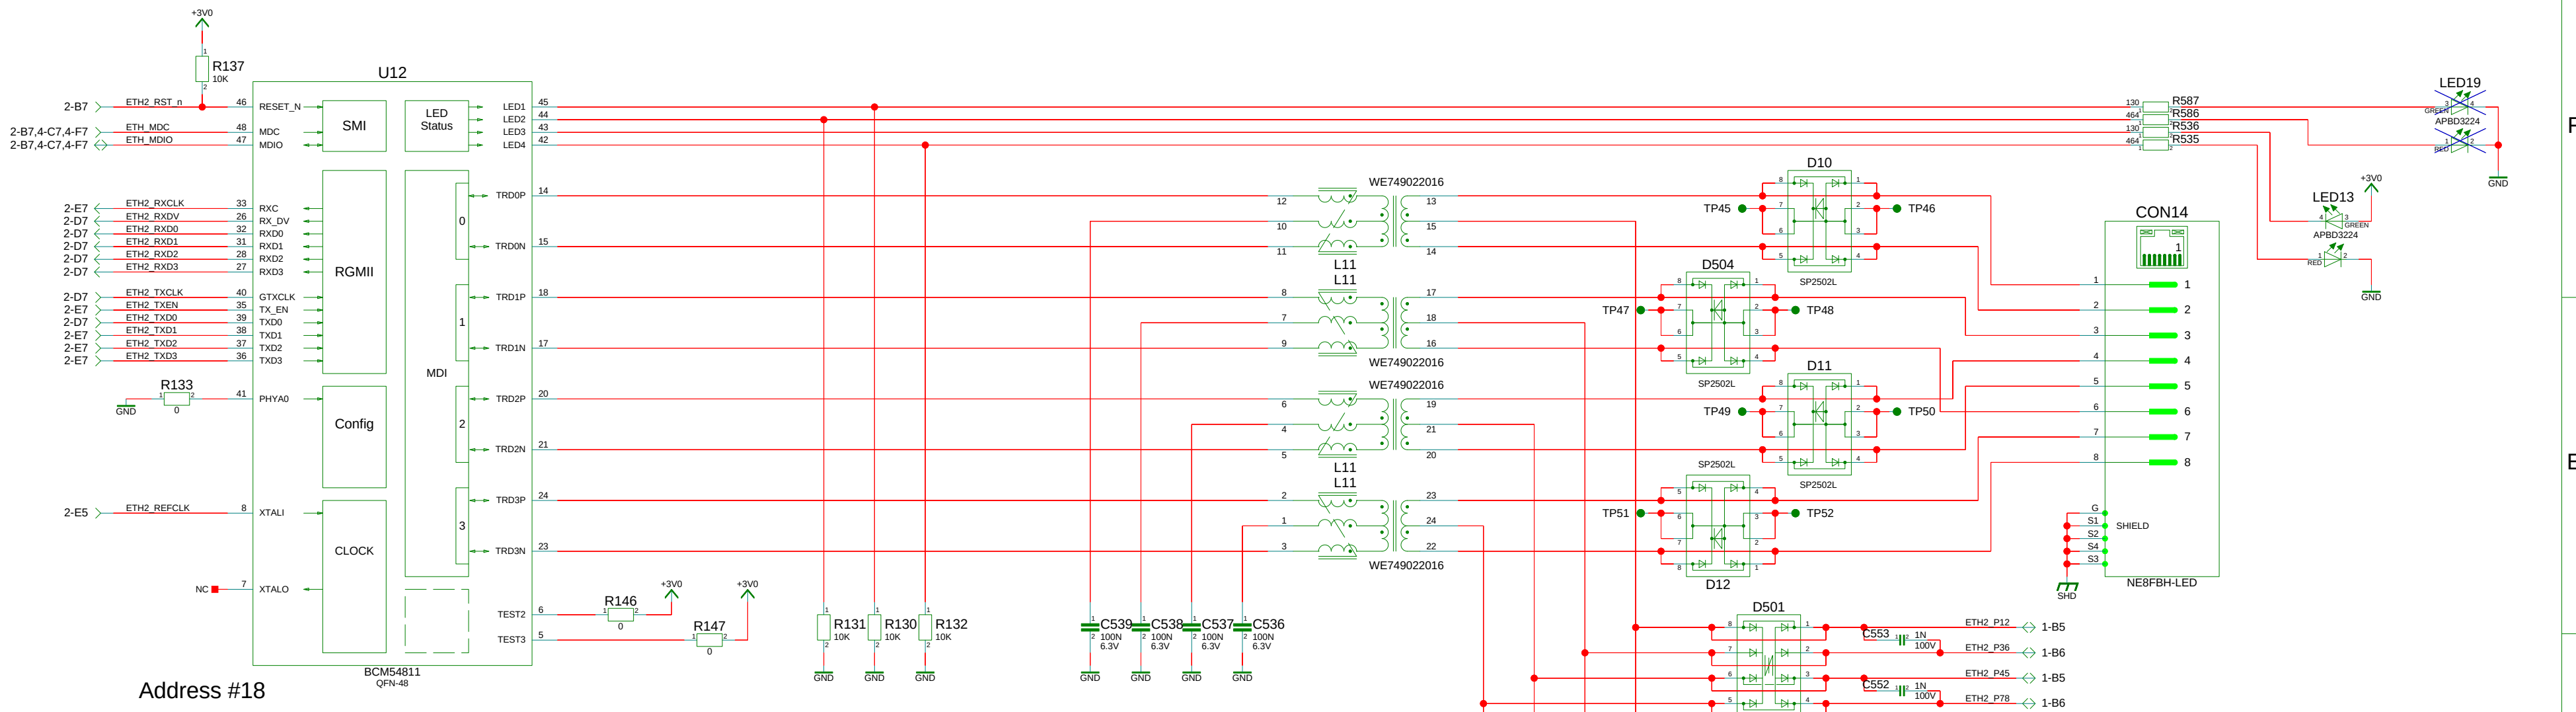

Address #18

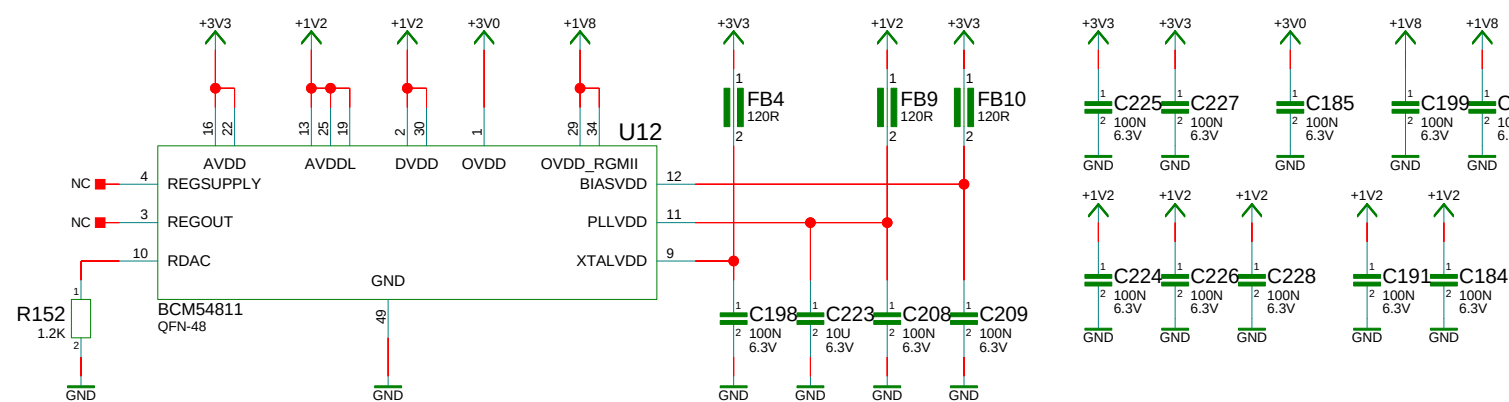


GXB

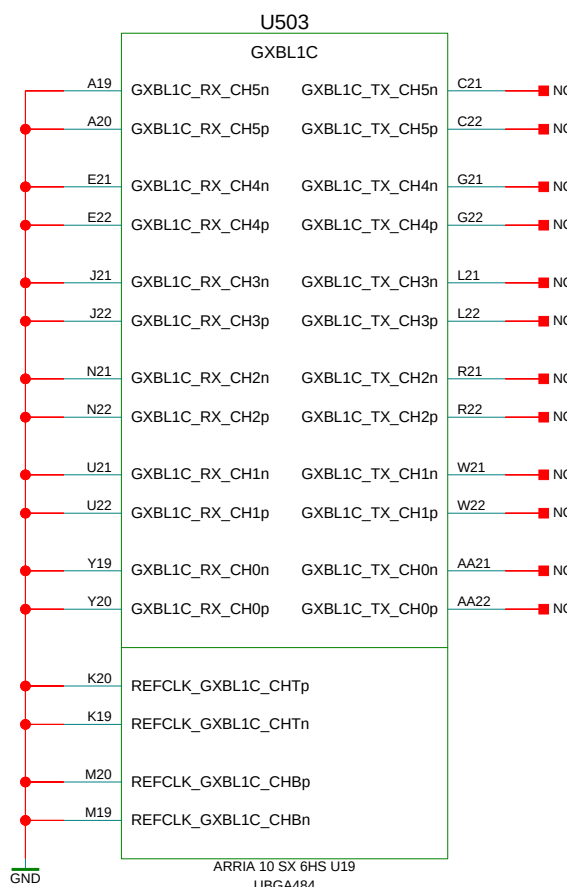


ETH-Port 2, GXBs					
Drawn by	FLW	14.06.2017	Title		
Approved	MFI	04.08.2017	DWG NO	3123-D	
Released	FWA	04.08.2017			
Saved	04/08/2017:14:45		Replacement for	3123-C	
				REV	D10
				Size	A2
				Sheet	1 / 7


ORing

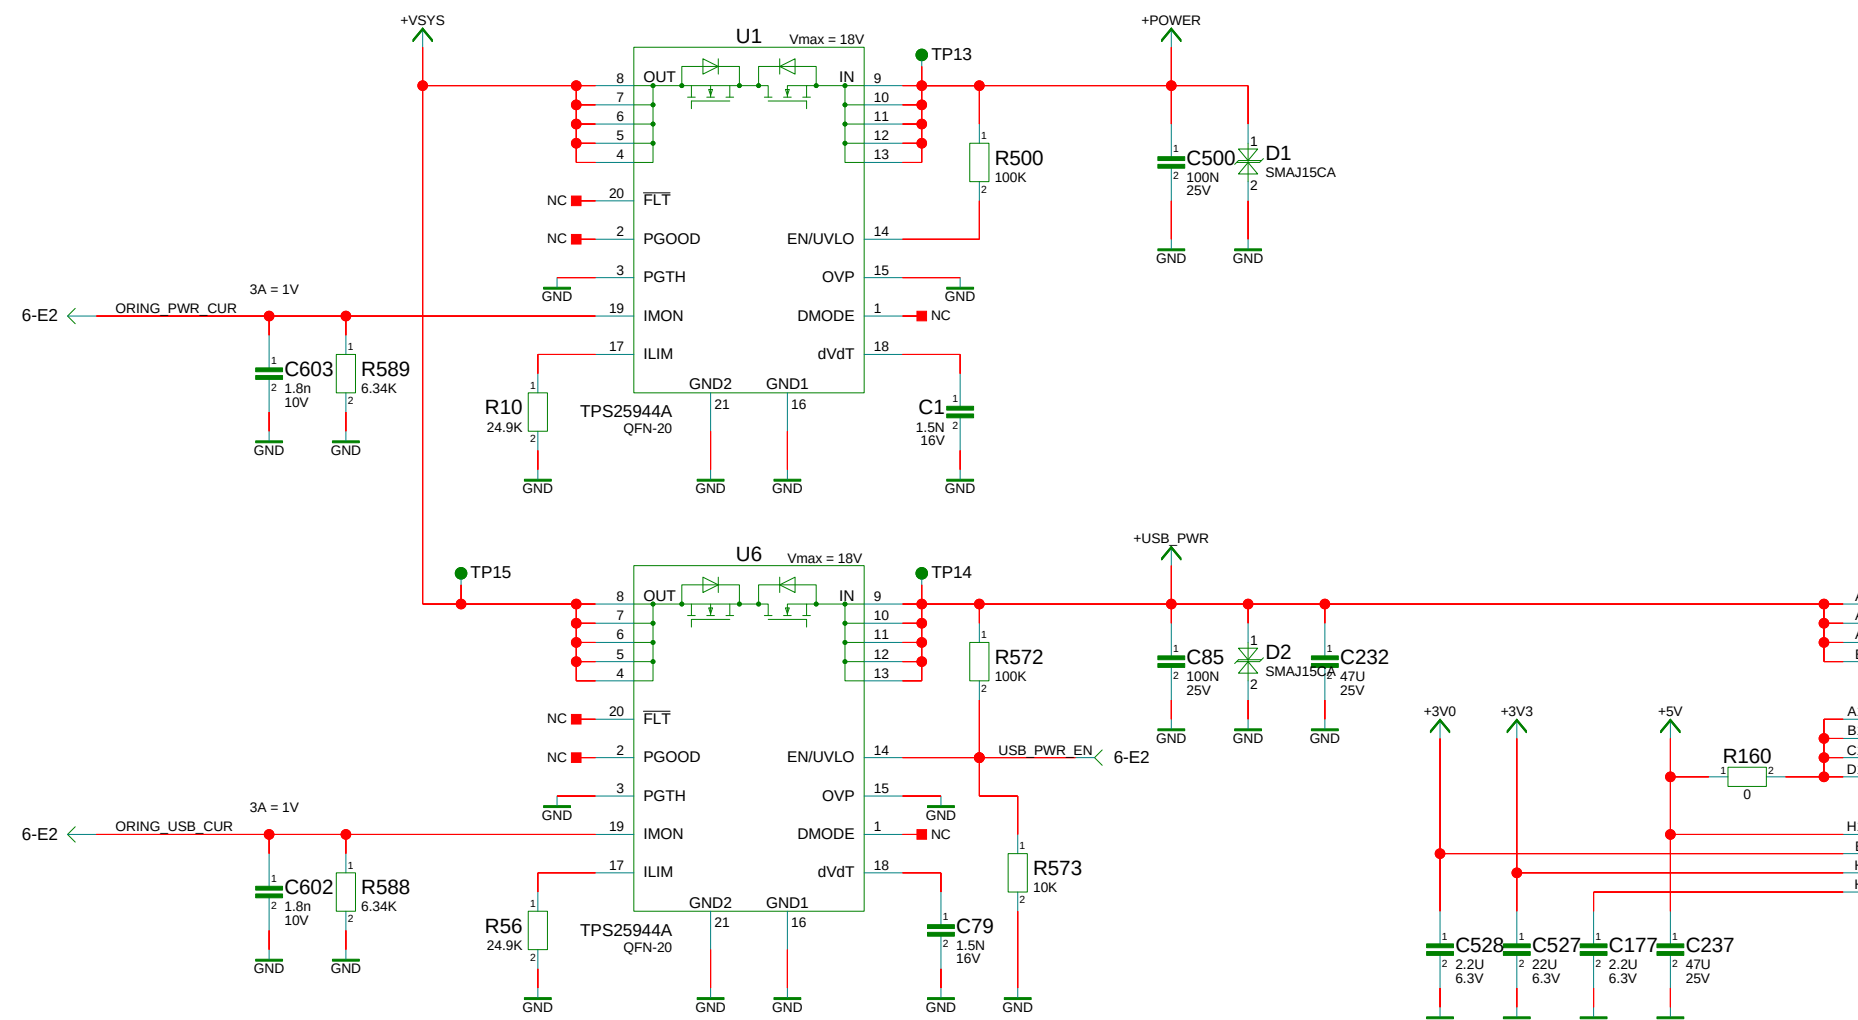


USB - POWER

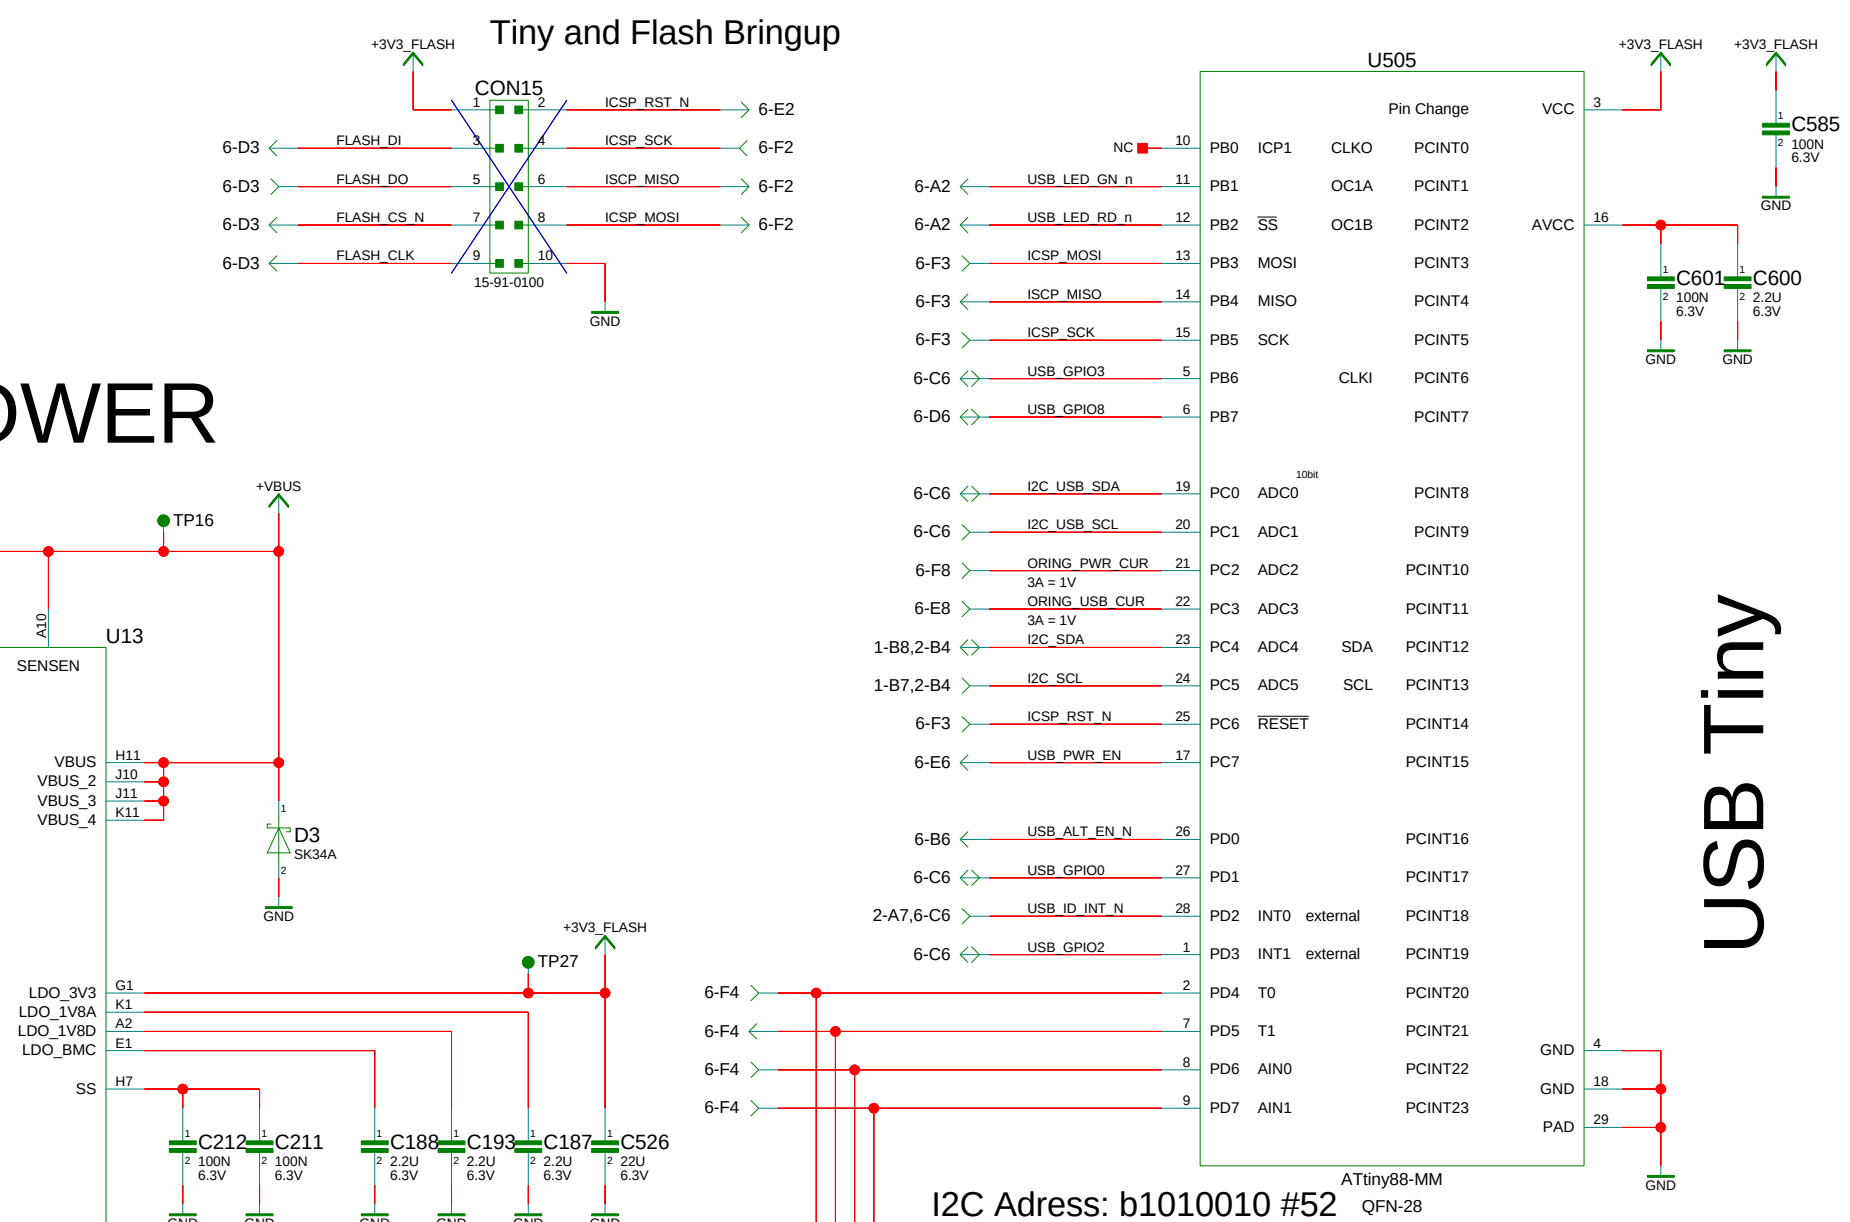

USB - PHY

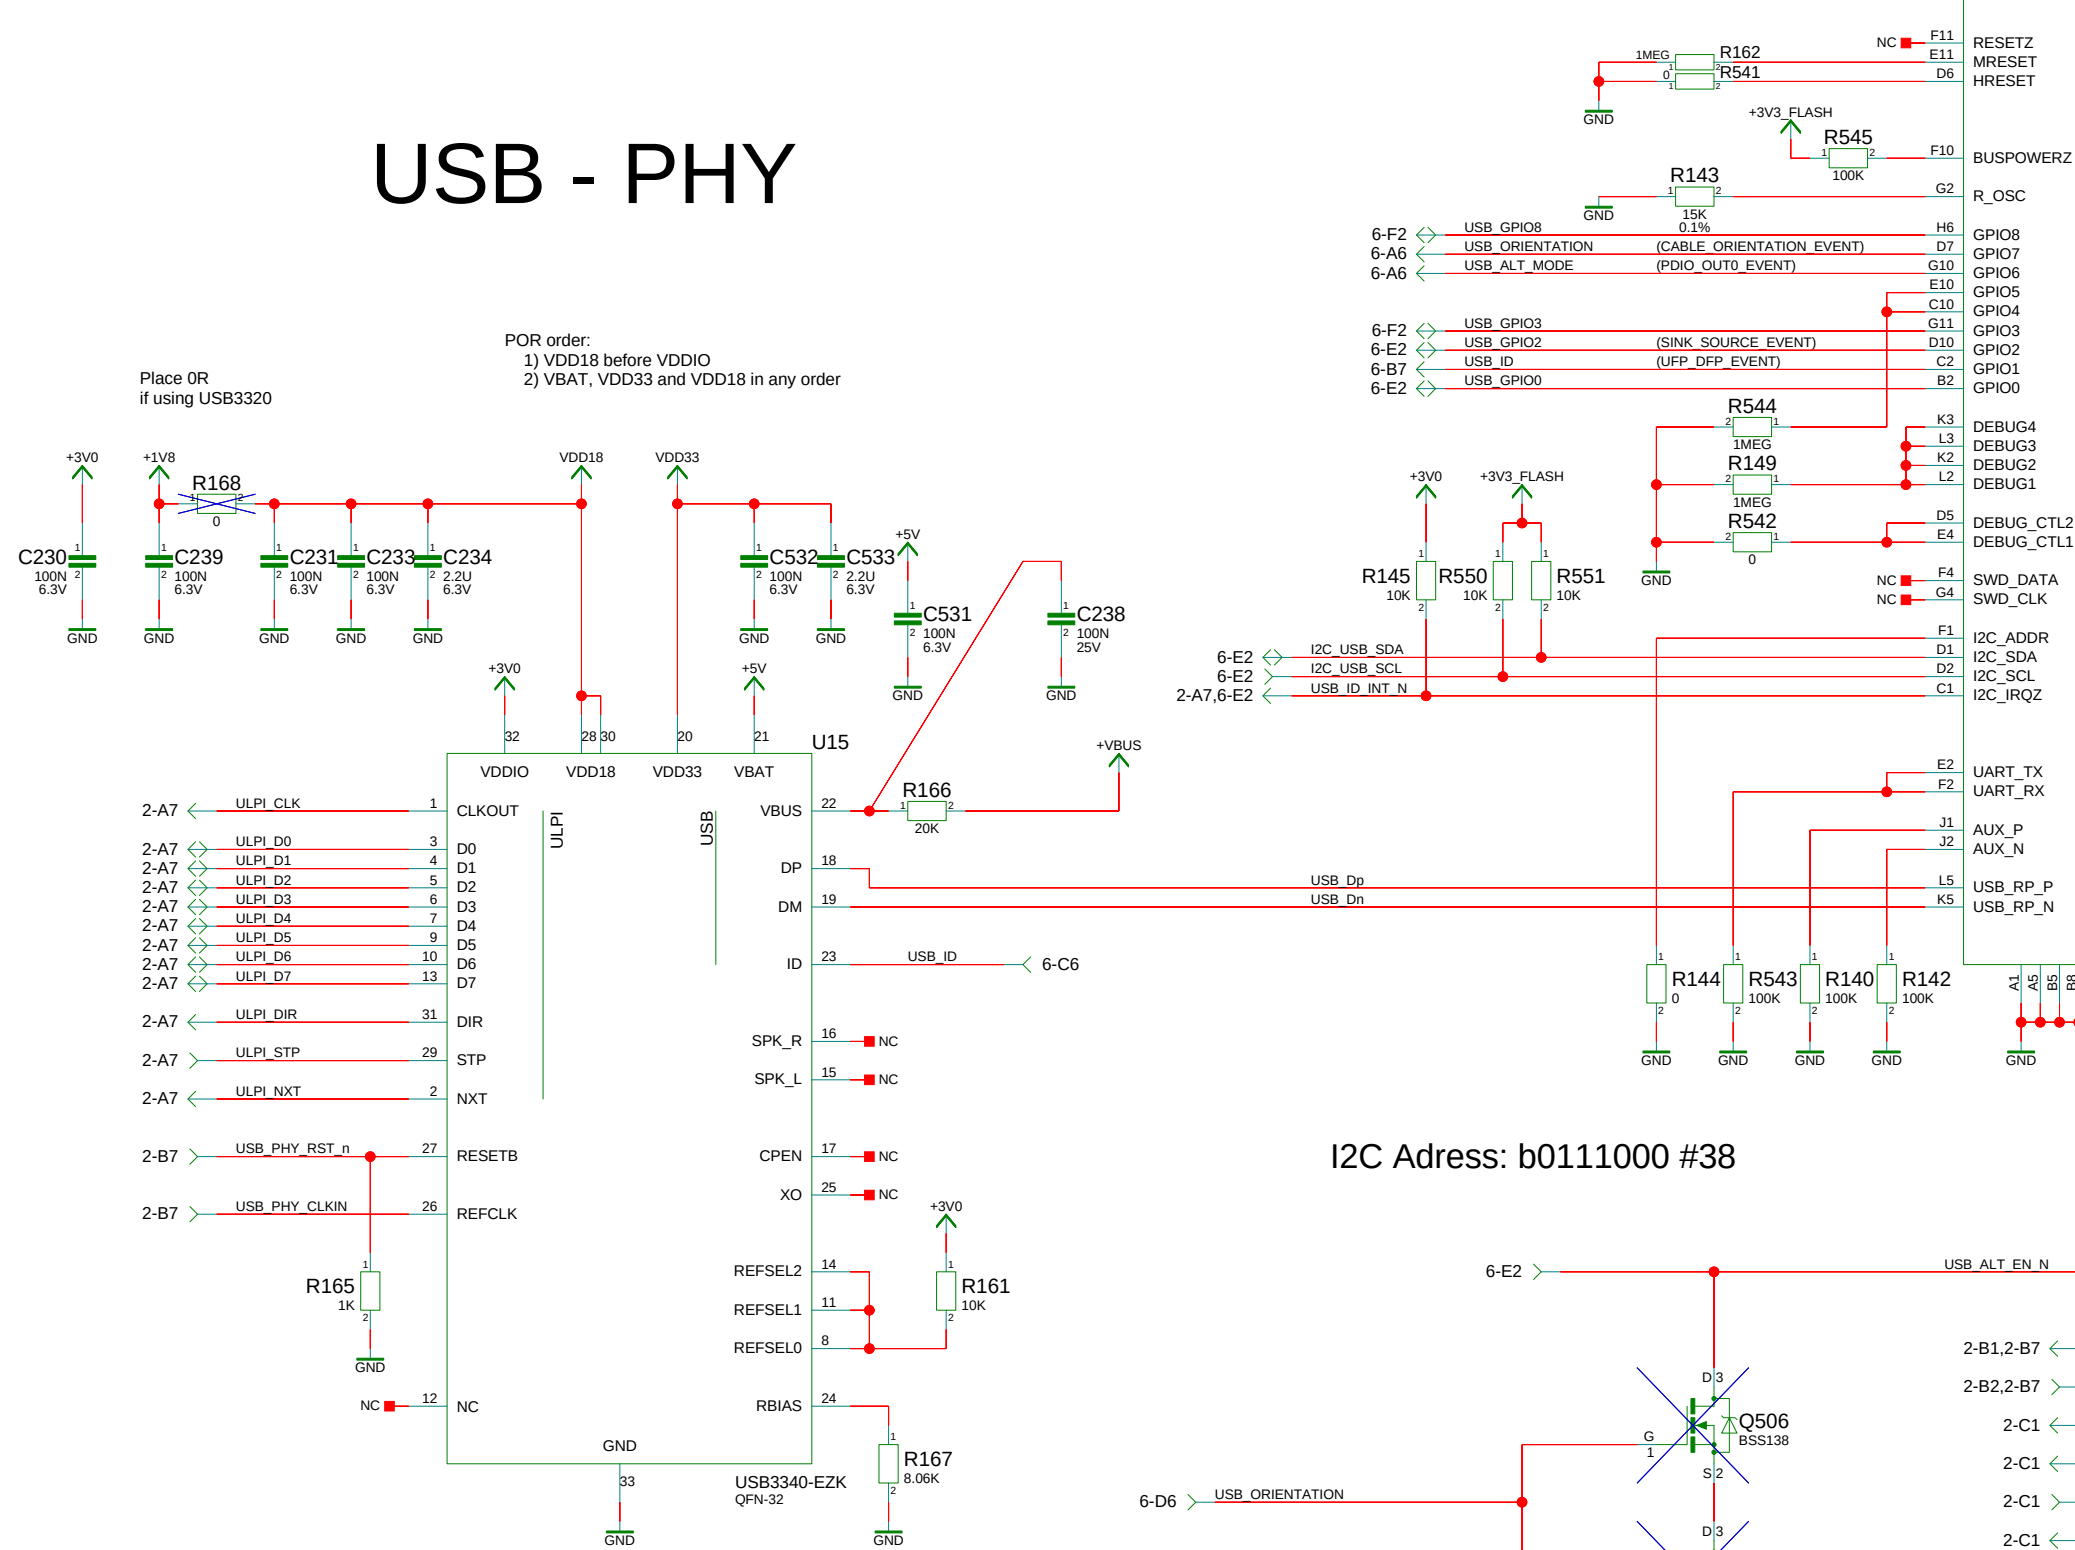

USB Type C

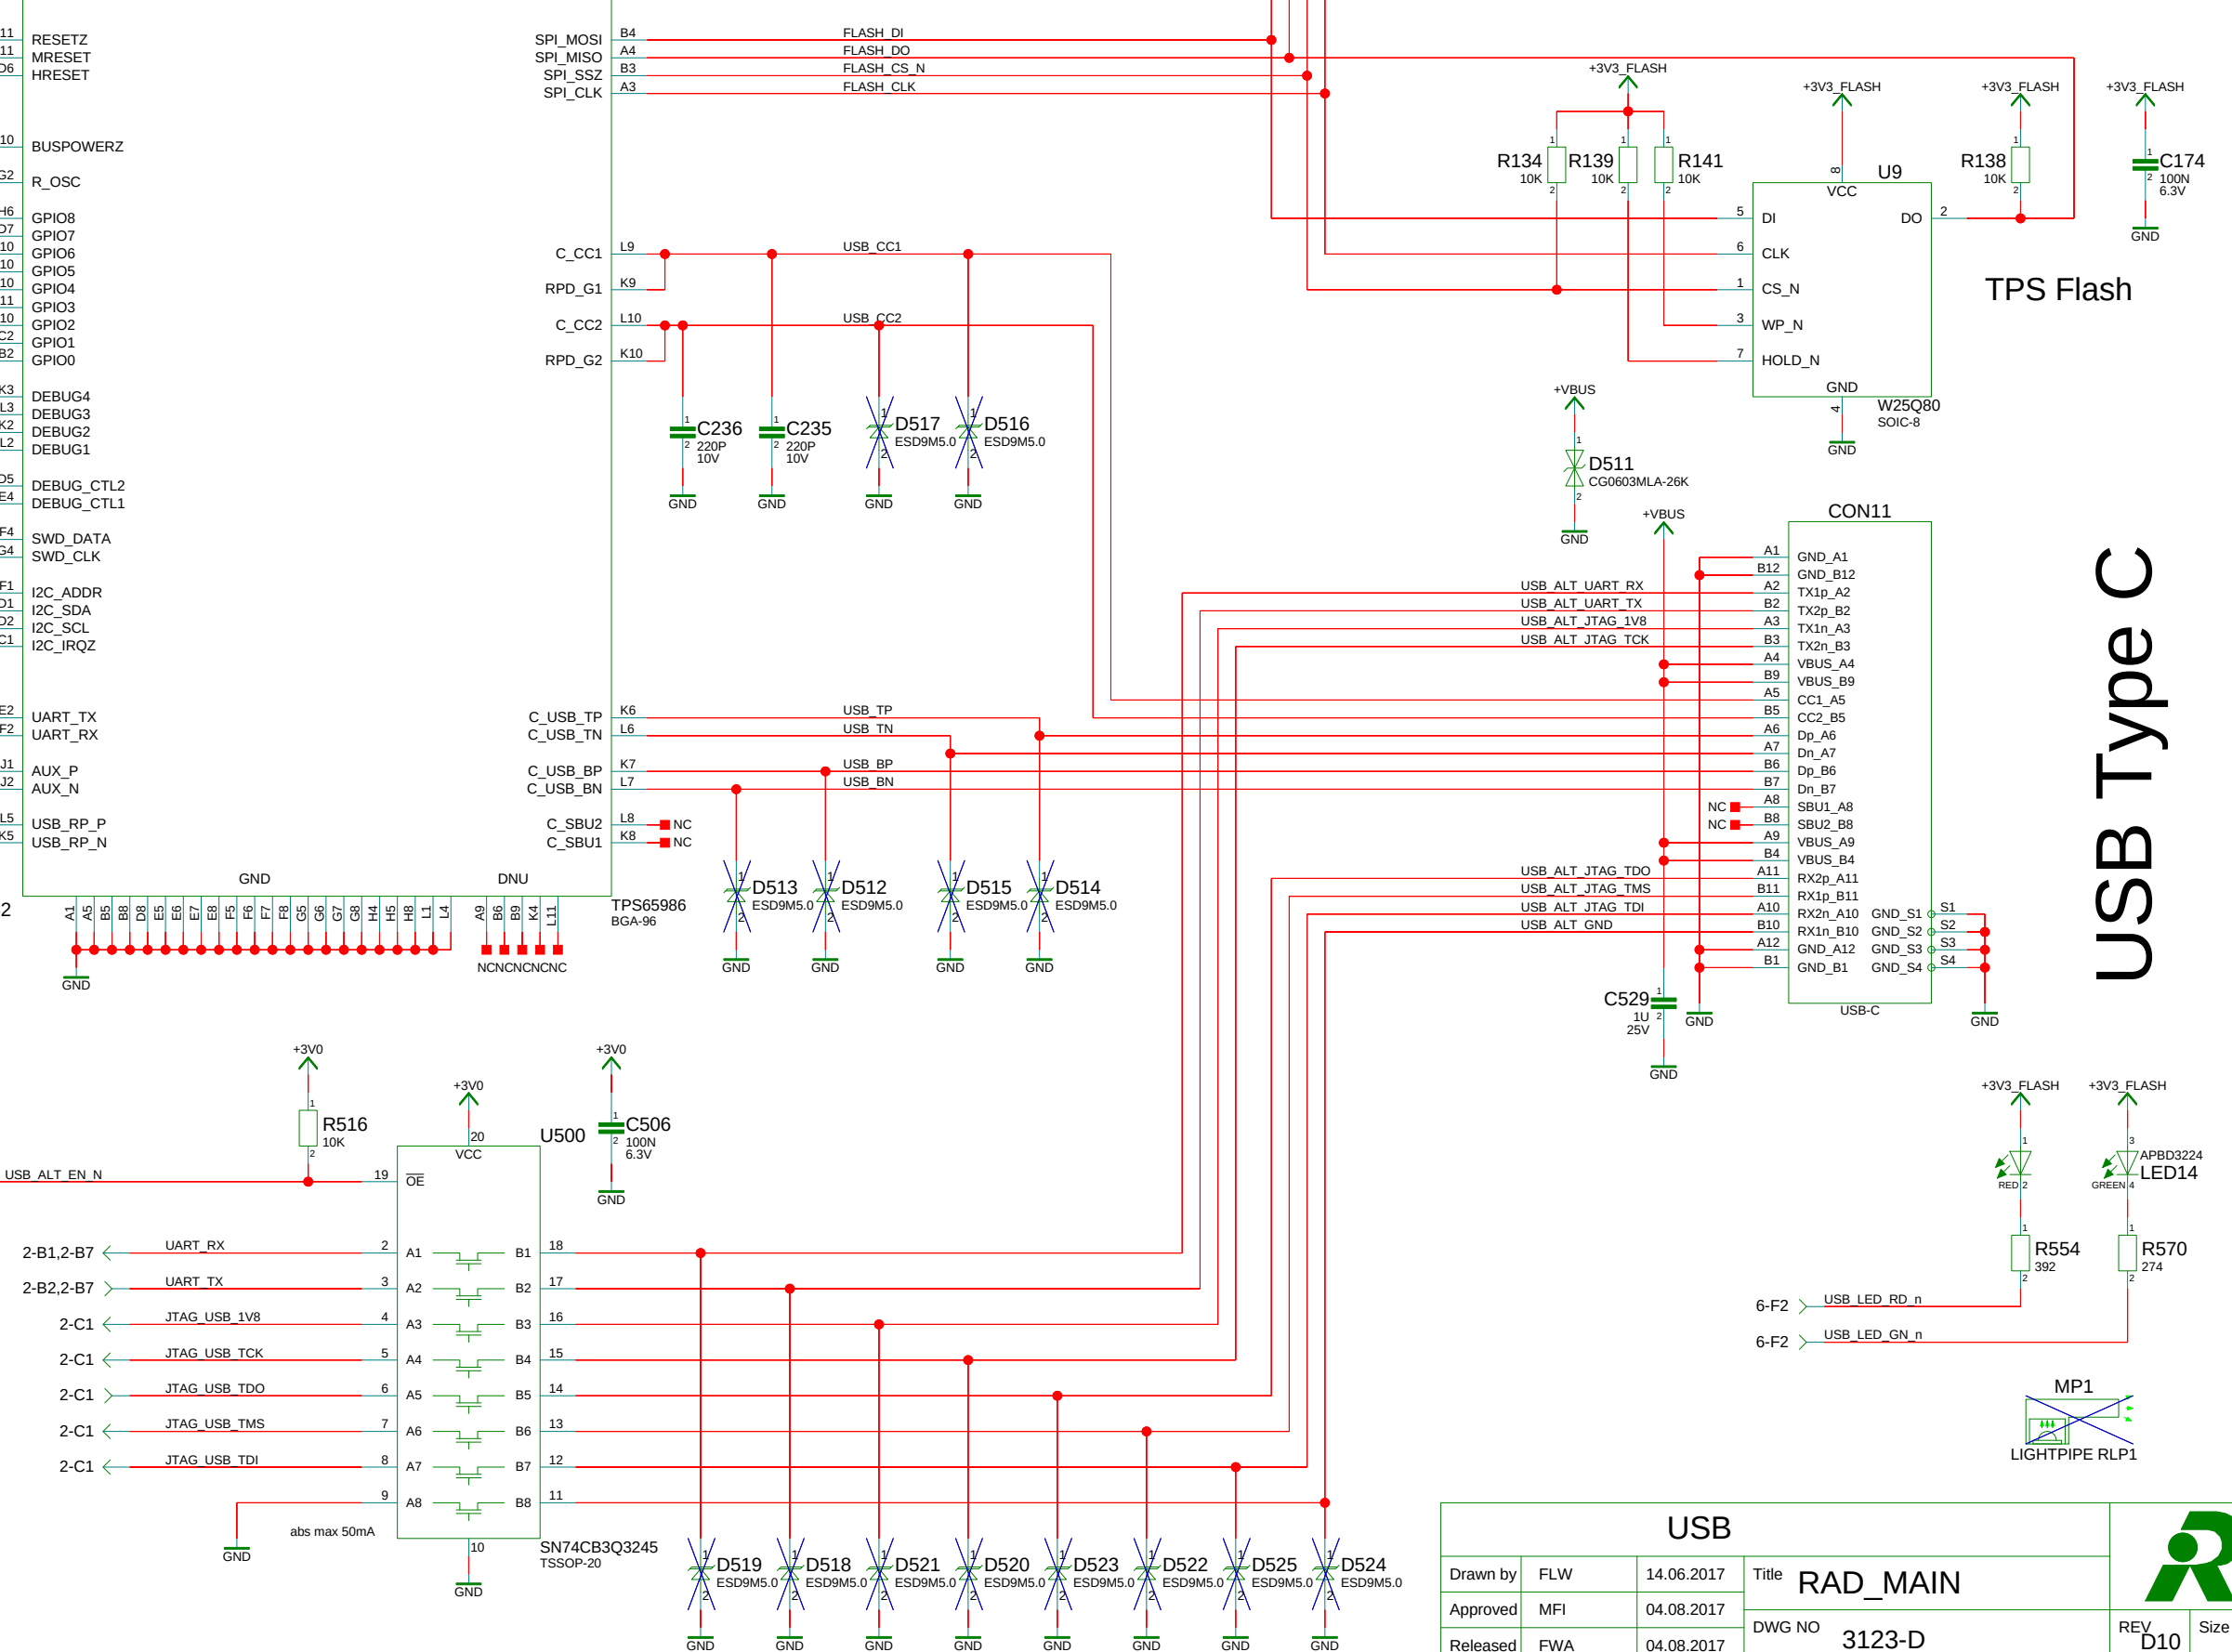

USB			
Drawn by	FLW	14.06.2017	Title RAD_MAIN
Approved	MFI	04.08.2017	DWG NO 3123-D
Released	FWA	04.08.2017	
Saved	04/08/2017:14:45		Replacement for 3123-C



