


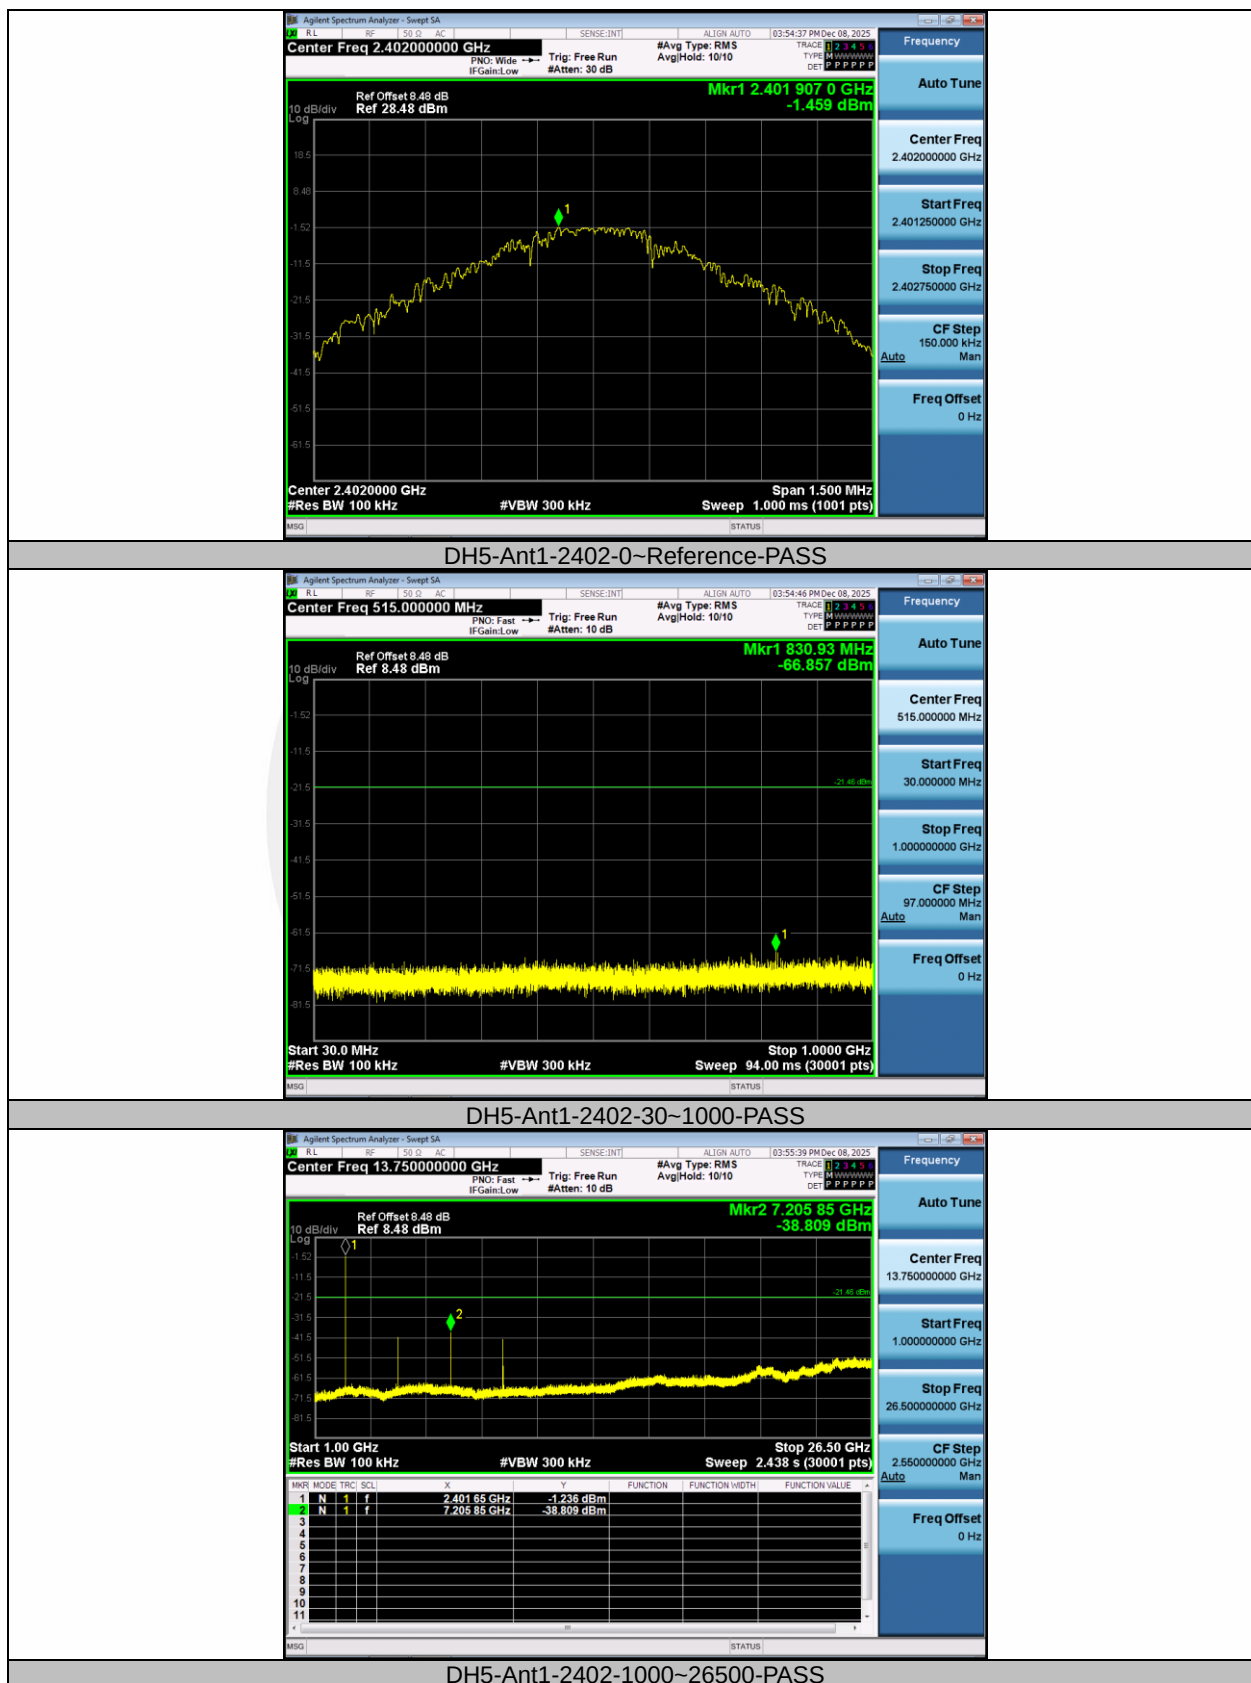
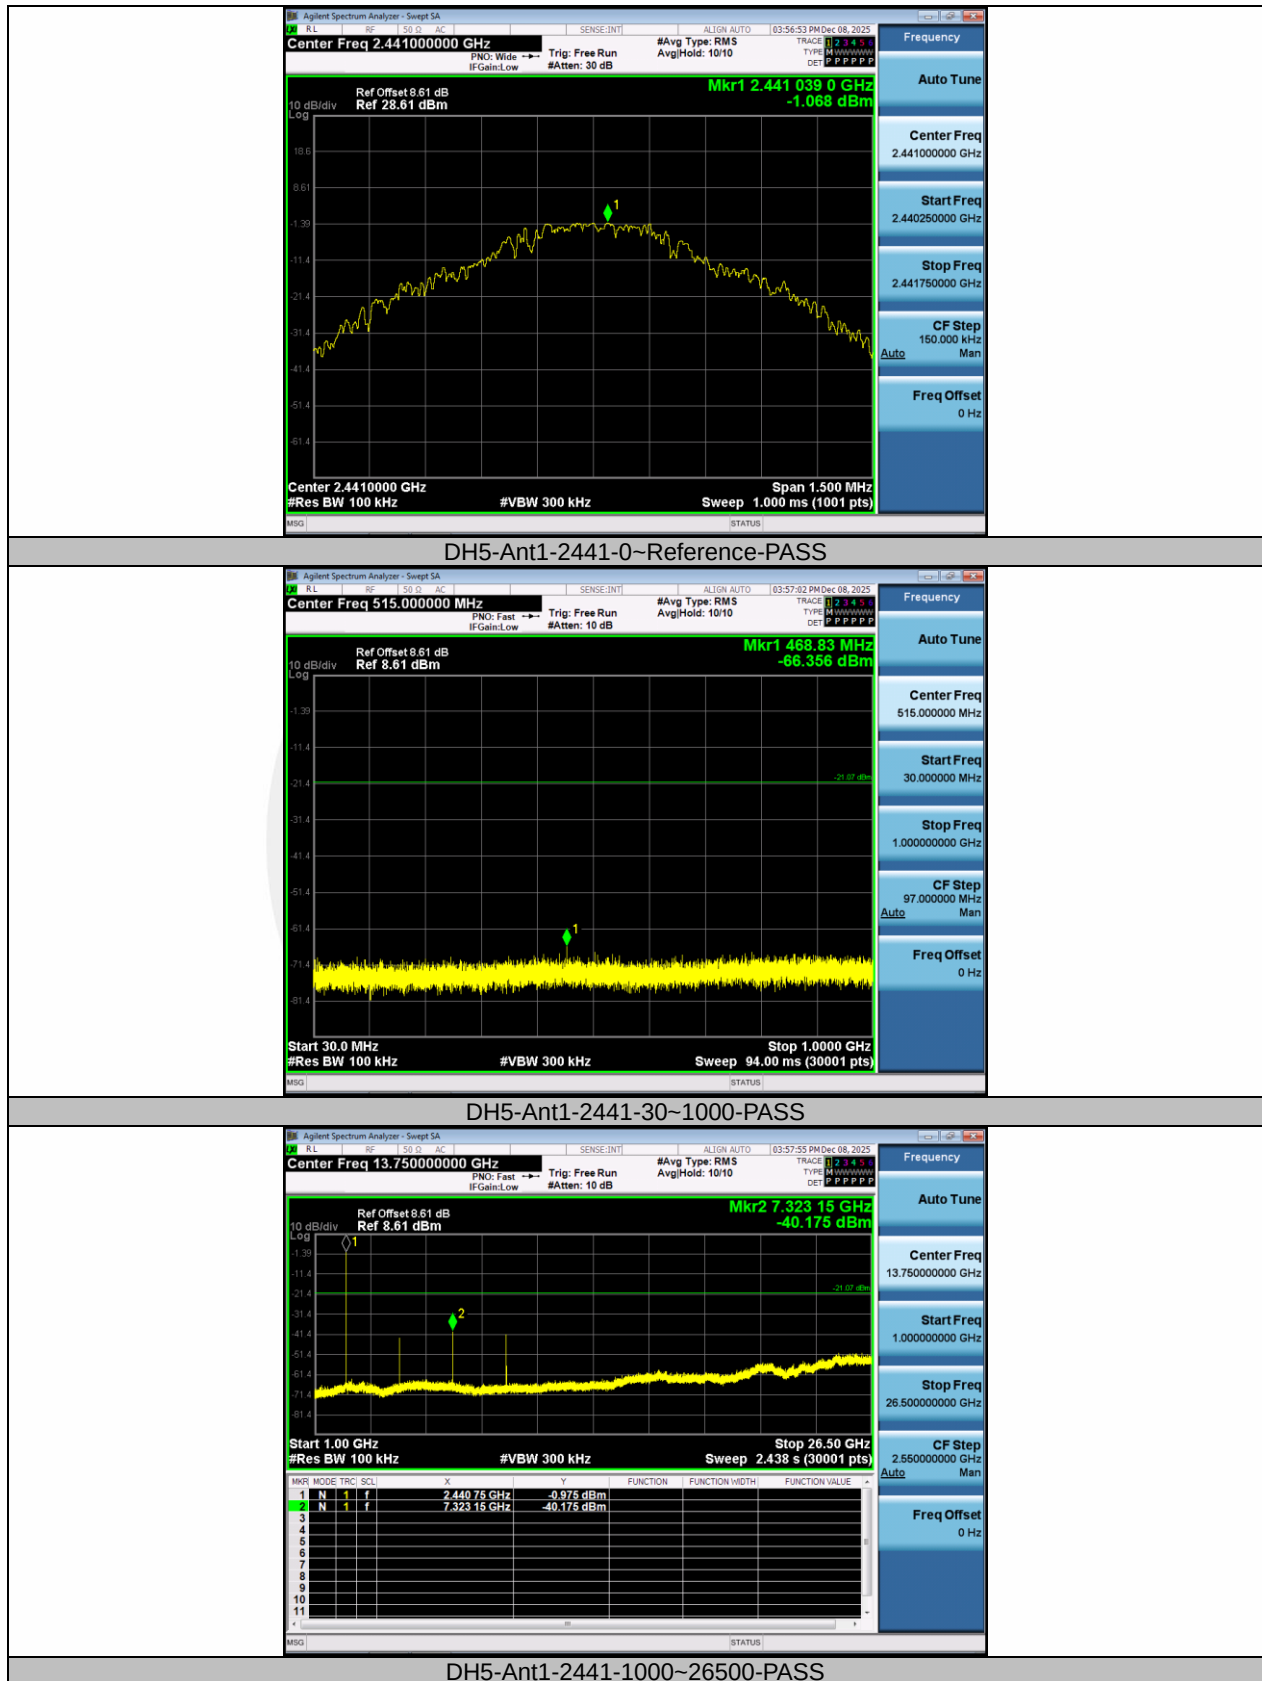



Conduceted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-1.46	-1.46	---	PASS
			30~1000	-1.46	-66.86	≤-21.46	PASS
			1000~26500	-1.46	-38.81	≤-21.46	PASS
		2441	0~Reference	-1.07	-1.07	---	PASS
			30~1000	-1.07	-66.36	≤-21.07	PASS
			1000~26500	-1.07	-40.18	≤-21.07	PASS
		2480	0~Reference	-1.13	-1.13	---	PASS
			30~1000	-1.13	-67.45	≤-21.13	PASS
			1000~26500	-1.13	-41.87	≤-21.13	PASS
2DH5	Ant1	2402	0~Reference	-1.09	-1.09	---	PASS
			30~1000	-1.09	-67.56	≤-21.09	PASS
			1000~26500	-1.09	-40.26	≤-21.09	PASS
		2441	0~Reference	-5.55	-5.55	---	PASS
			30~1000	-5.55	-47.92	≤-25.55	PASS
			1000~26500	-5.55	-42.63	≤-25.55	PASS
		2480	0~Reference	-2.24	-2.24	---	PASS
			30~1000	-2.24	-66.36	≤-22.24	PASS
			1000~26500	-2.24	-44.22	≤-22.24	PASS
3DH5	Ant1	2402	0~Reference	-0.61	-0.61	---	PASS
			30~1000	-0.61	-66.96	≤-20.61	PASS
			1000~26500	-0.61	-43.45	≤-20.61	PASS
		2441	0~Reference	-4.95	-4.95	---	PASS
			30~1000	-4.95	-66.08	≤-24.95	PASS
			1000~26500	-4.95	-41.83	≤-24.95	PASS
		2480	0~Reference	-1.57	-1.57	---	PASS
			30~1000	-1.57	-66.94	≤-21.57	PASS
			1000~26500	-1.57	-44.38	≤-21.57	PASS










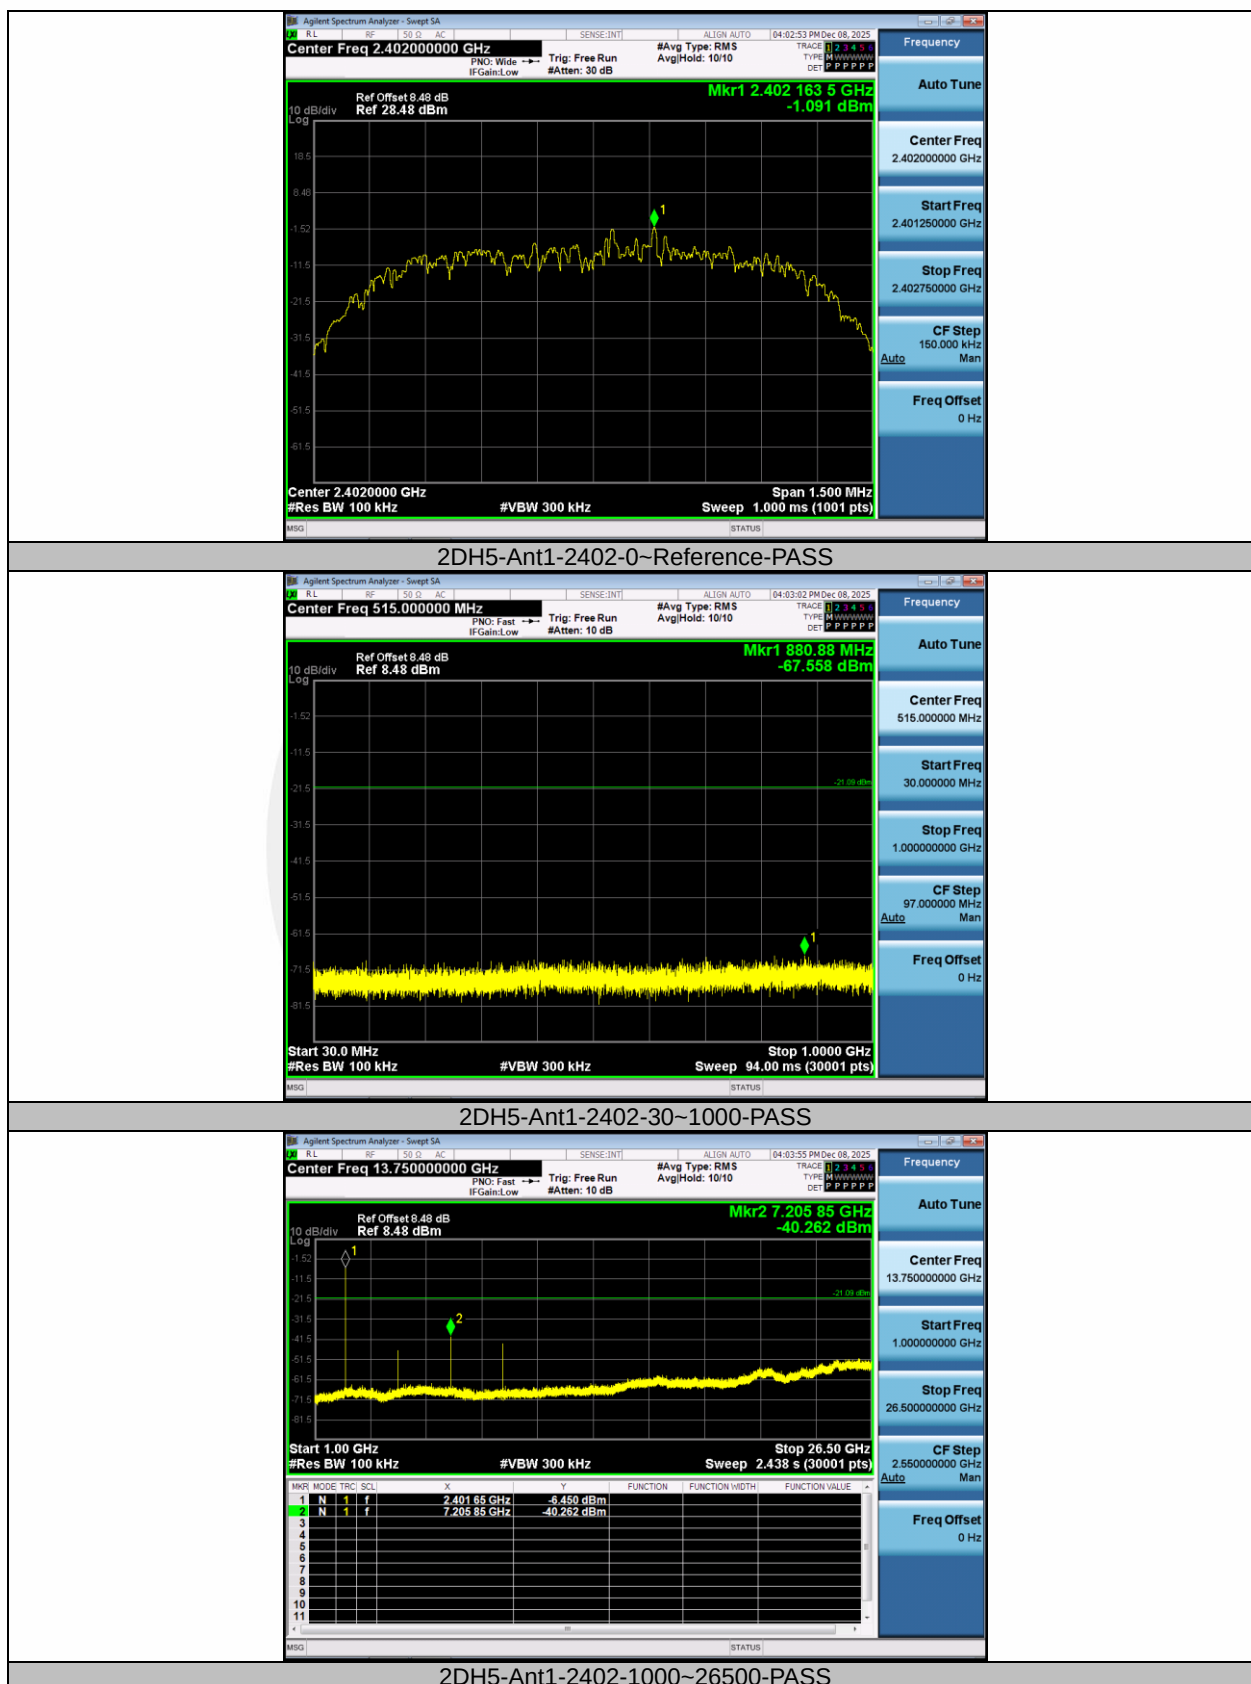


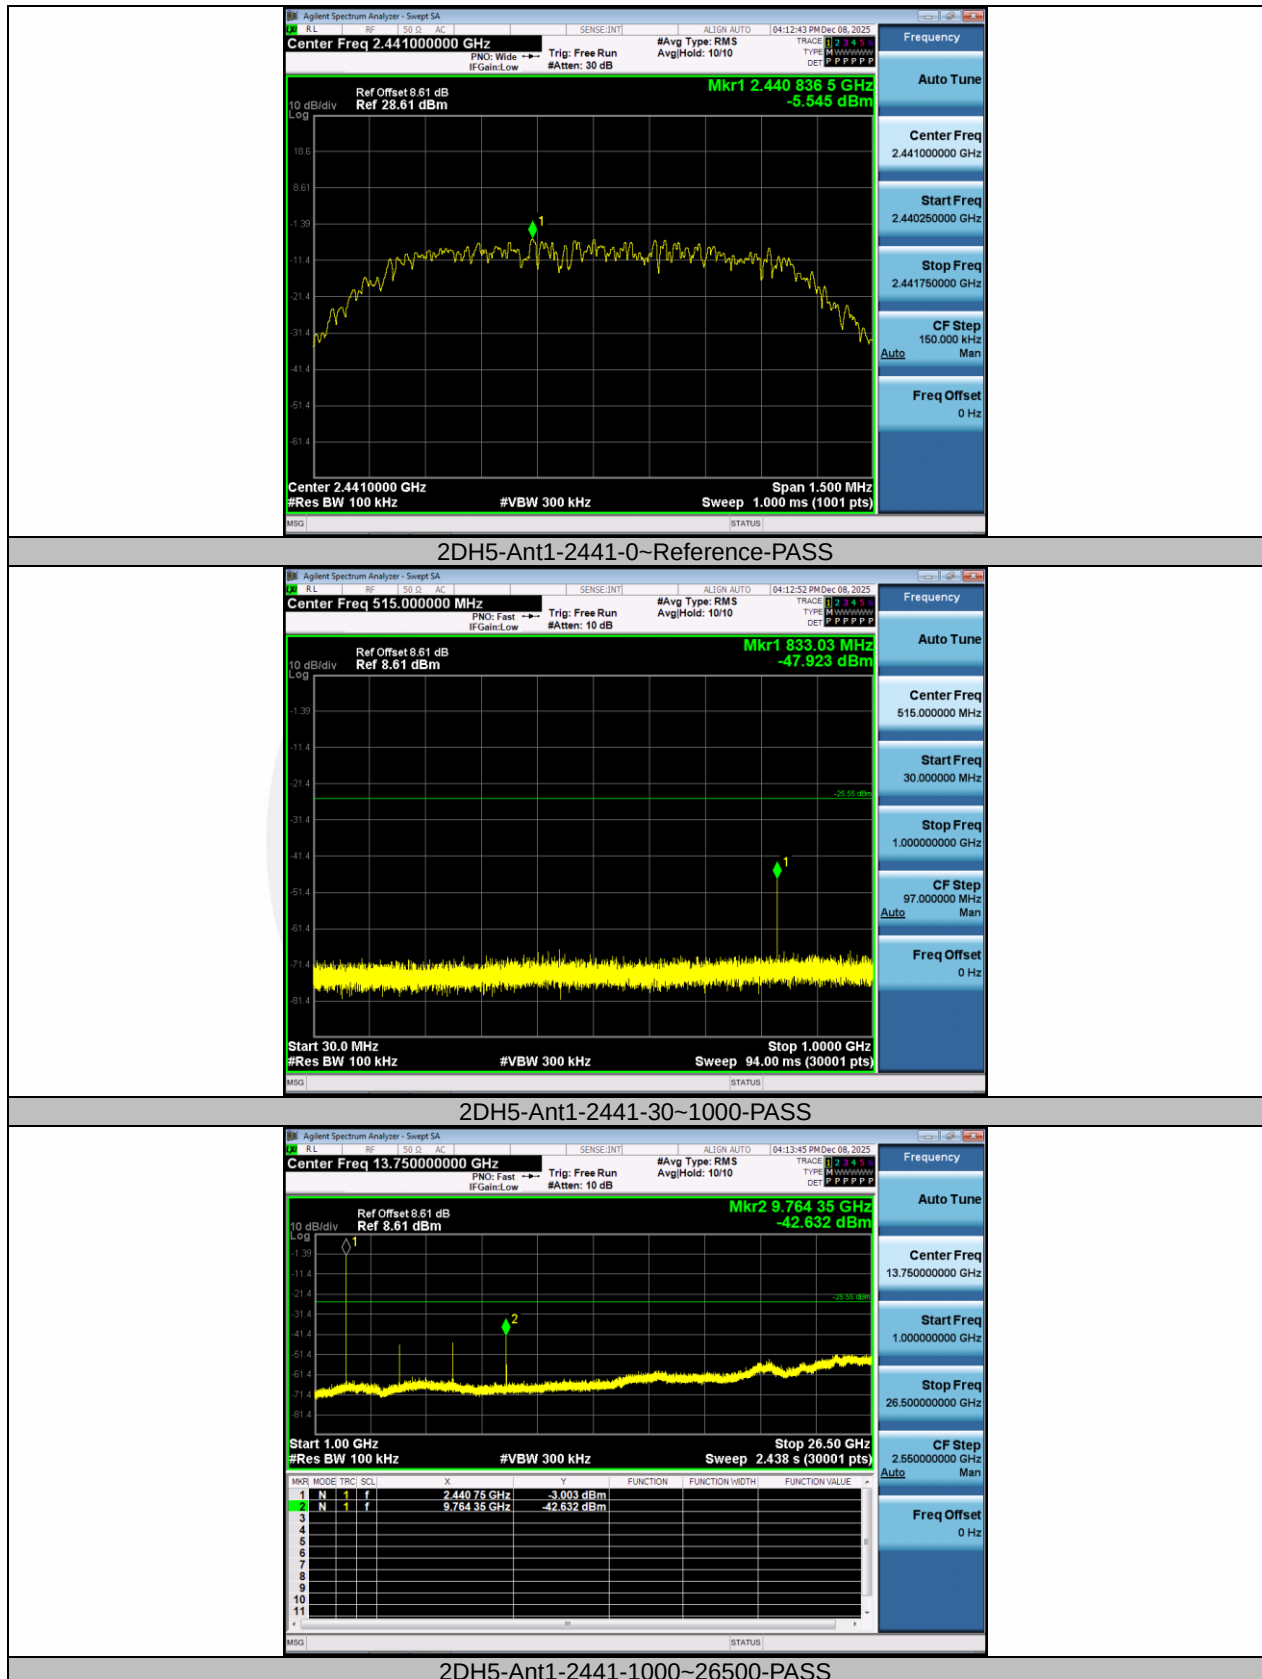

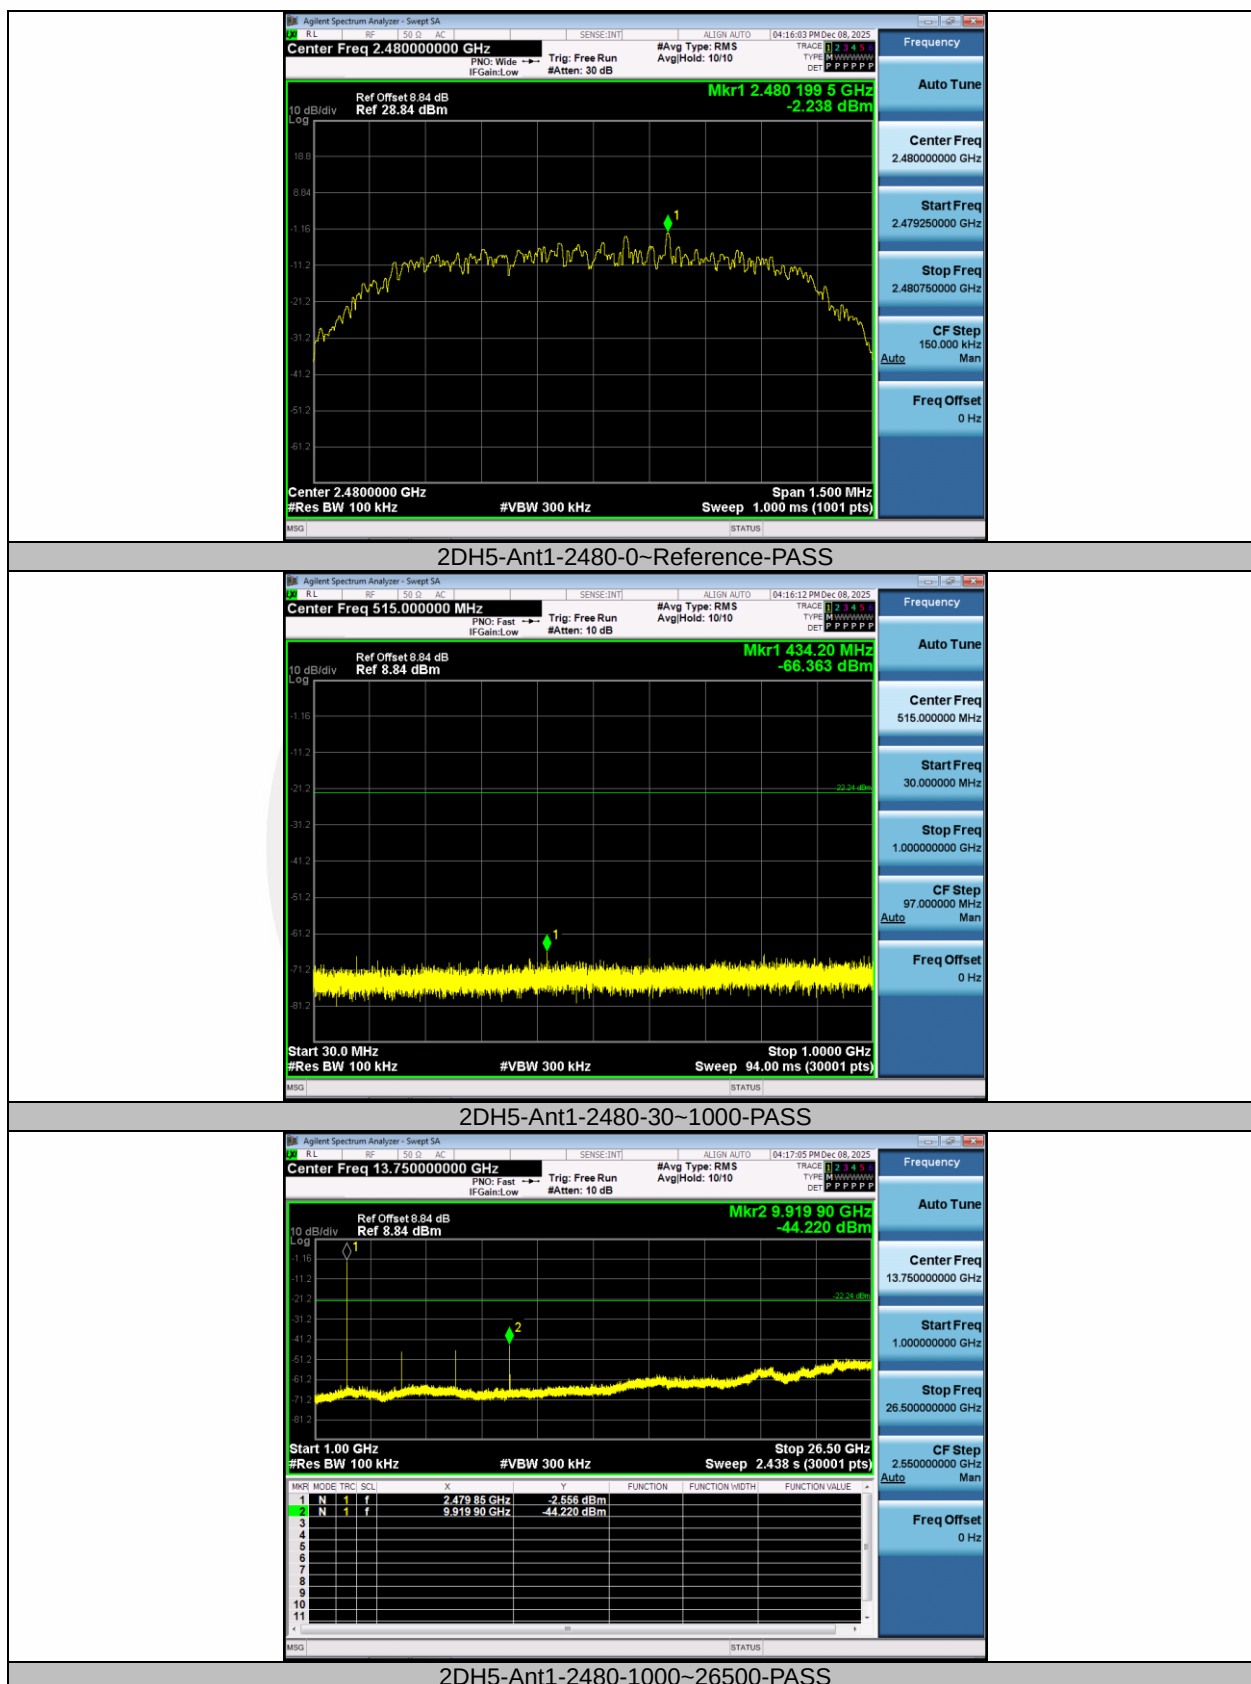

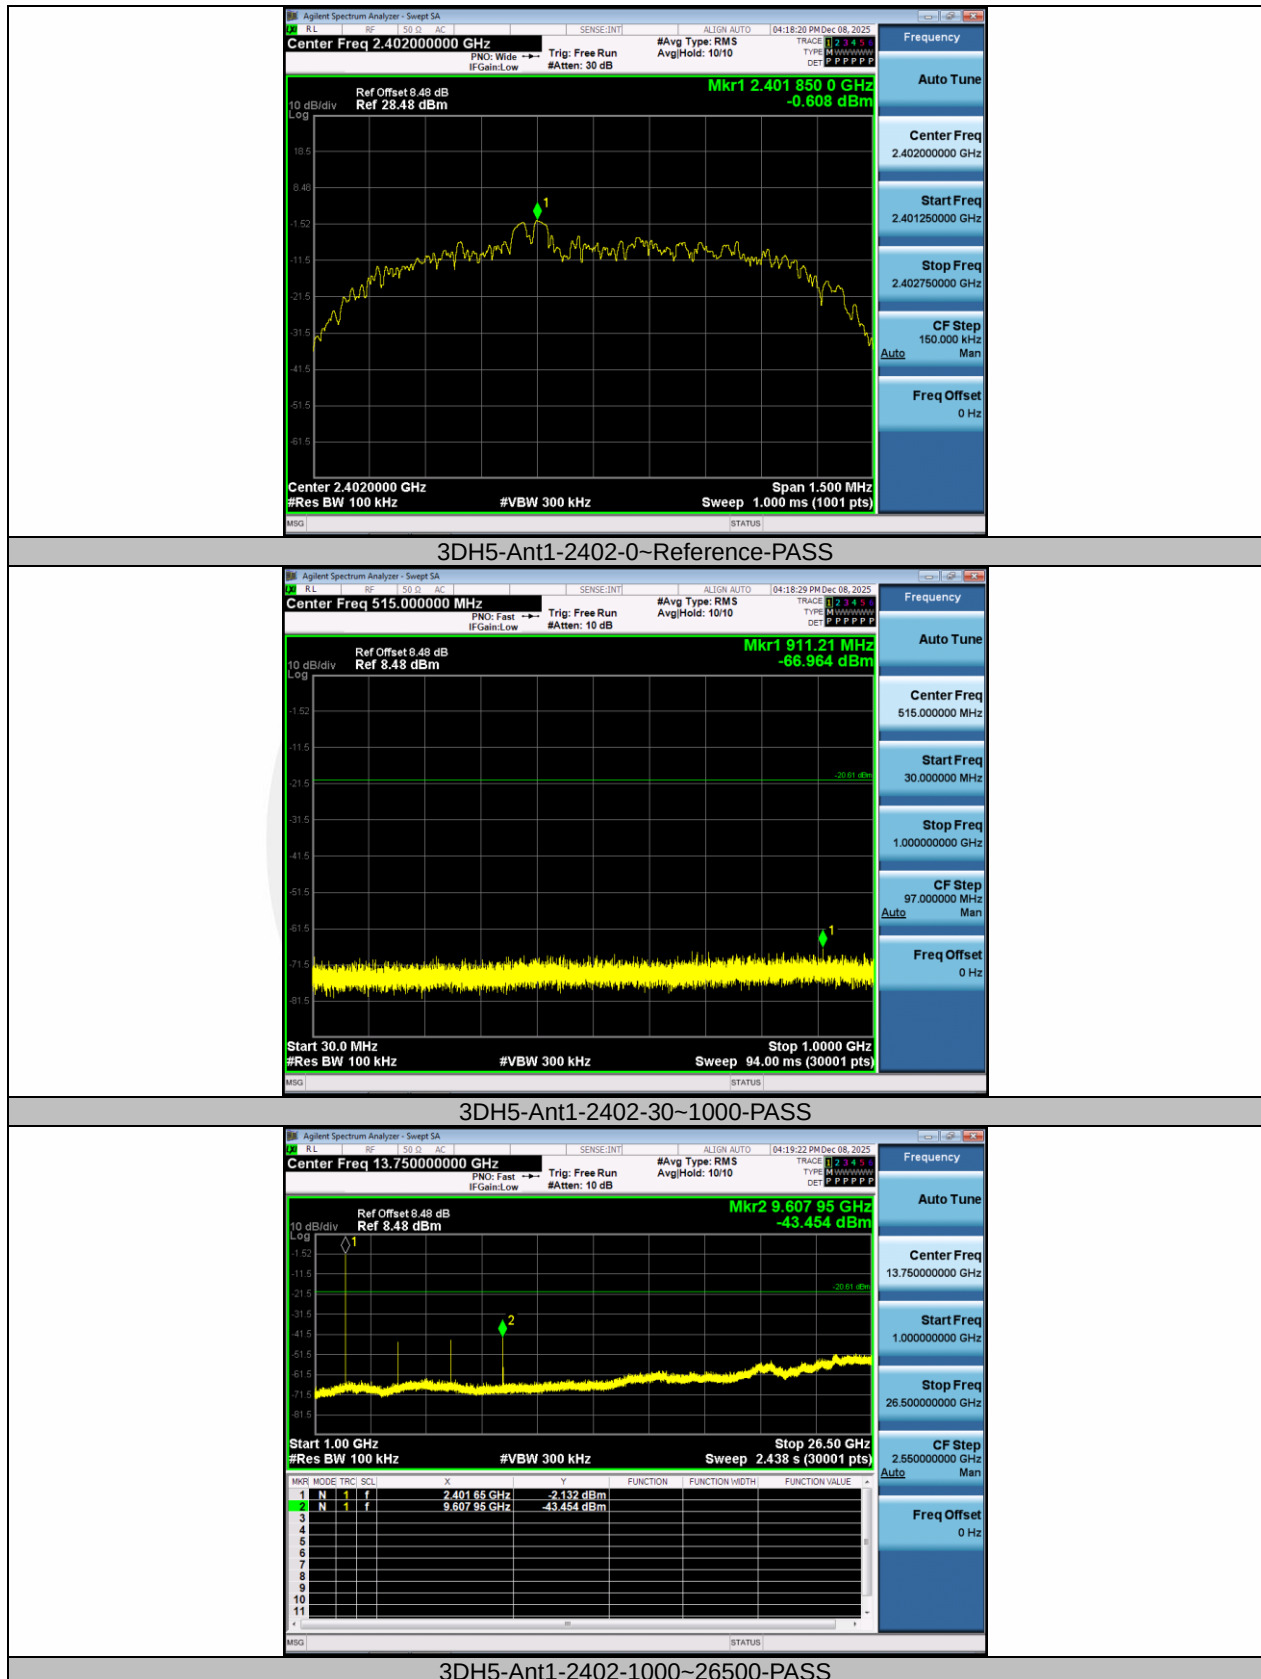

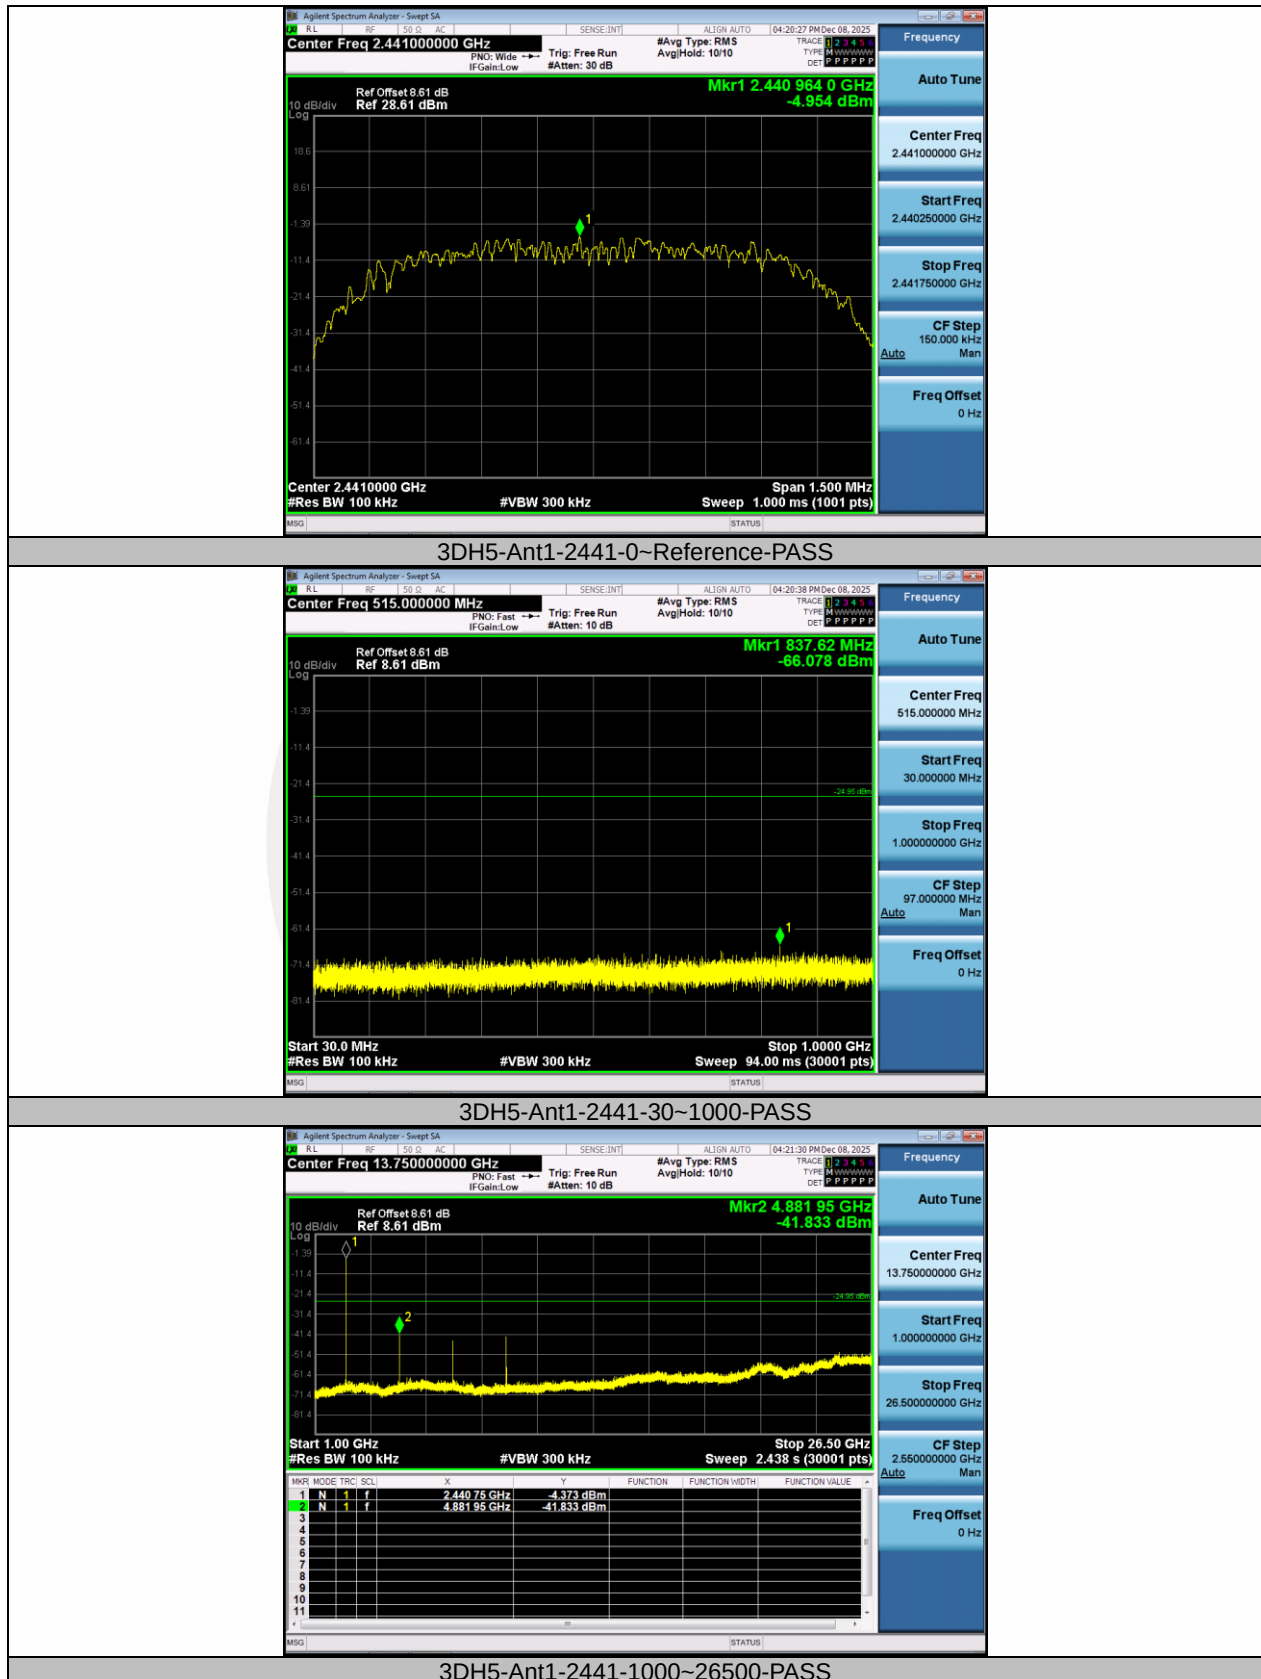

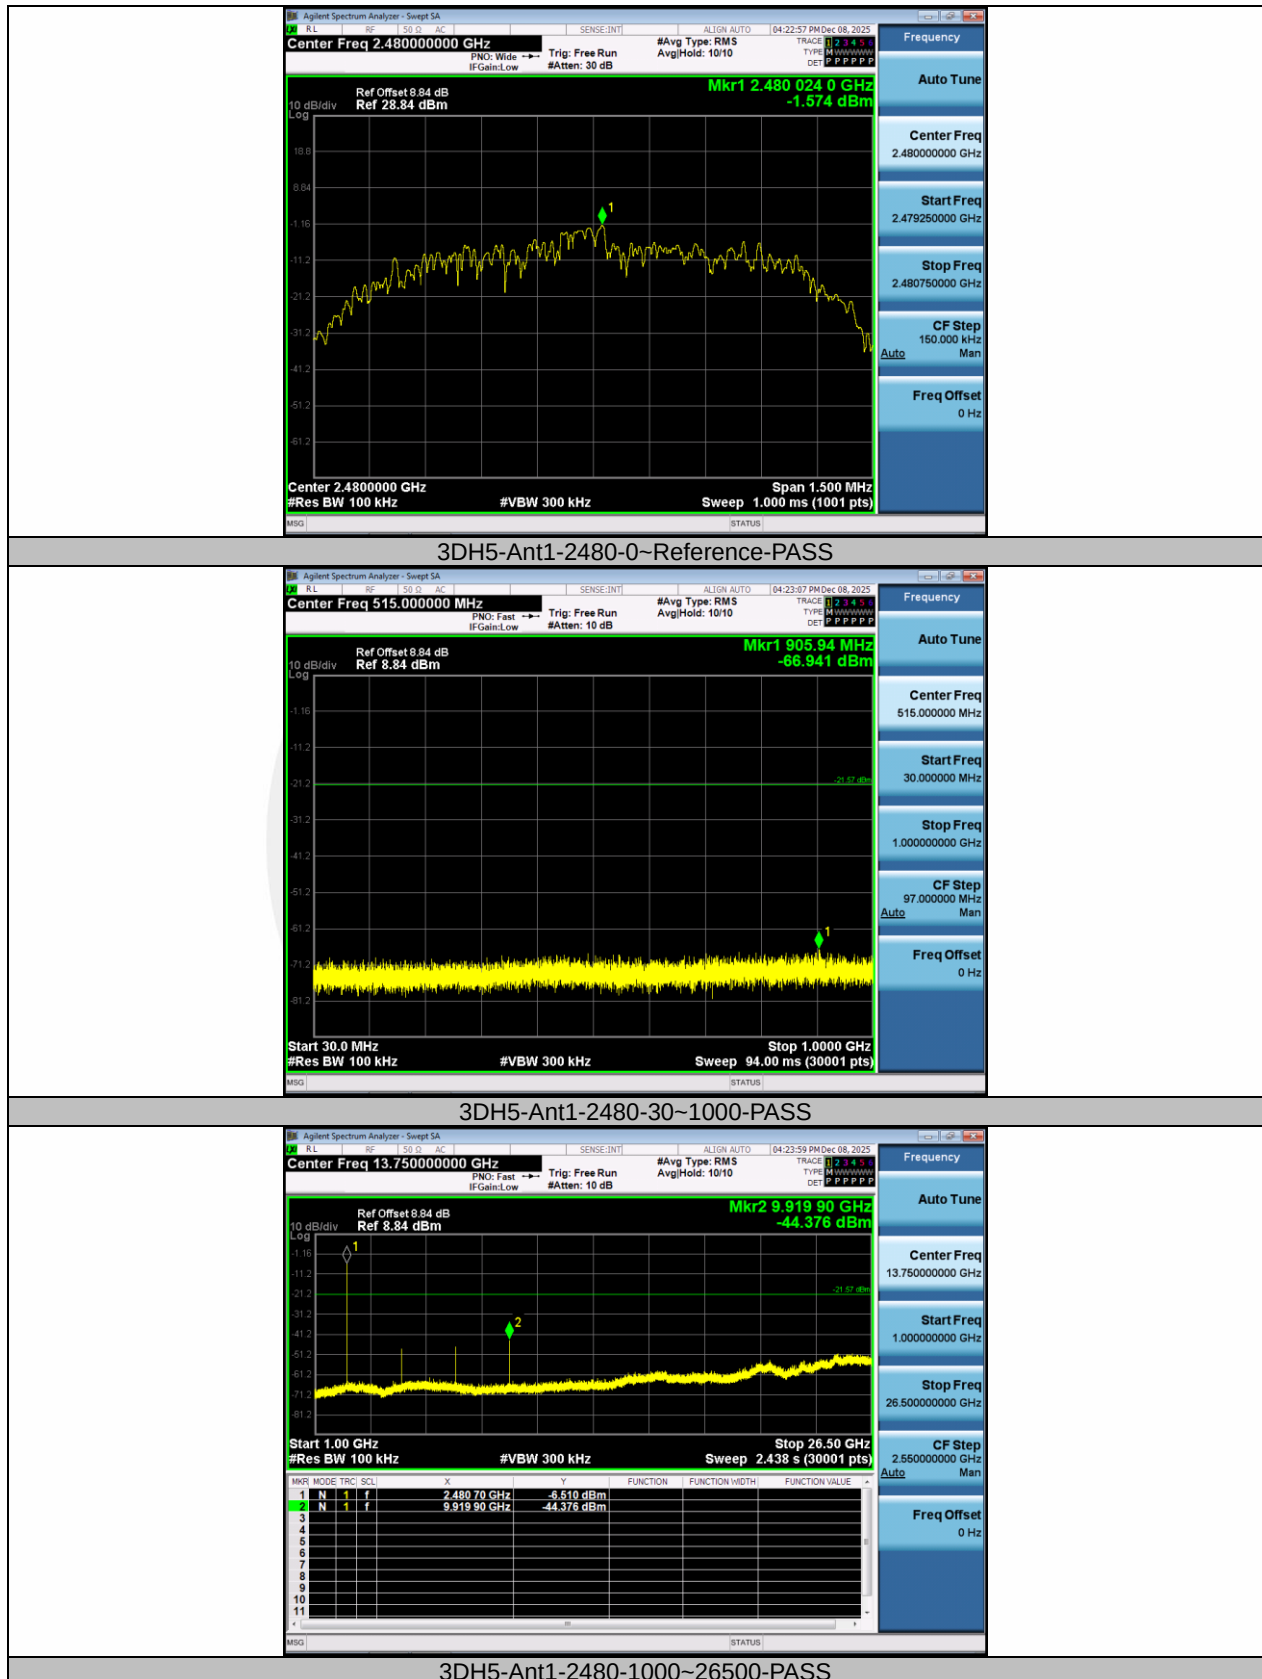

9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

Pass

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	25° C
Relative Humidity:	60%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
4996.875	V	50.56	74.00	23.44	peak
8488.125	V	58.88	74.00	15.12	peak
16788.75	V	66.97	74.00	7.03	peak
4996.875	V	31.78	54.00	22.22	AVG
8488.125	V	37.85	54.00	16.15	AVG
16788.75	V	47.23	54.00	6.77	AVG
4224.375	H	48.31	74.00	25.69	peak
8330.625	H	58.42	74.00	15.58	peak
17994.375	H	66.93	74.00	7.07	peak
4224.375	H	30.74	54.00	23.26	AVG
8330.625	H	37.57	54.00	16.43	AVG
17994.375	H	50.09	54.00	3.91	AVG

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
4987.5	V	50.44	74.00	23.56	peak
8371.875	V	58.67	74.00	15.33	peak
17938.125	V	67.27	74.00	6.73	peak
4987.5	V	31.87	54.00	22.13	AVG
8371.875	V	38.30	54.00	15.70	AVG
17938.125	V	49.18	54.00	4.82	AVG
4196.25	H	48.35	74.00	25.65	peak
8398.125	H	58.75	74.00	15.25	peak
17049.375	H	67.72	74.00	6.28	peak
4196.25	H	30.83	54.00	23.17	AVG
8398.125	H	38.36	54.00	15.64	AVG
17049.375	H	49.12	54.00	4.88	AVG

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
4168.125	V	47.83	74.00	26.17	peak
8415	V	59.14	74.00	14.86	peak
17863.125	V	67.57	74.00	6.43	peak
4168.125	V	30.65	54.00	23.35	AVG
8415	V	38.21	54.00	15.79	AVG
17863.125	V	47.20	54.00	6.80	AVG
4237.5	H	48.19	74.00	25.81	peak
8441.25	H	59.02	74.00	14.98	peak
17465.625	H	67.43	74.00	6.57	peak
4237.5	H	30.42	54.00	23.58	AVG
8441.25	H	38.17	54.00	15.83	AVG
17465.625	H	50.18	54.00	3.82	AVG

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 - (4) Only records the worst data in tabular form.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, $\pi/4$ -DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2388.29	V	46.17	74.00	27.83	peak
2388.29	V	38.44	54.00	15.56	AVG
2388.58	H	45.77	74.00	28.23	peak
2388.58	H	38.42	54.00	15.58	AVG

Test mode: GFSK Frequency: Channel 78: 2480MHz


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2484.51	V	47.18	74.00	26.82	peak
2484.51	V	38.82	54.00	15.18	AVG
2483.78	H	46.65	74.00	27.35	peak
2483.78	H	38.83	54.00	15.17	AVG

Test mode: GFSK Frequency: Hopping


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2390.00	V	44.88	74.00	29.12	peak
2483.50	V	44.93	74.00	29.07	peak
2390.00	V	38.74	54.00	15.26	AVG
2483.50	V	38.46	54.00	15.54	AVG
2390.00	H	44.31	74.00	29.69	peak
2483.50	H	44.55	74.00	29.45	peak
2390.00	H	38.84	54.00	15.16	AVG
2483.50	H	38.36	54.00	15.64	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	BT		
	Channel 0: 2402MHz	GFSK	H
		Test By: HYD	

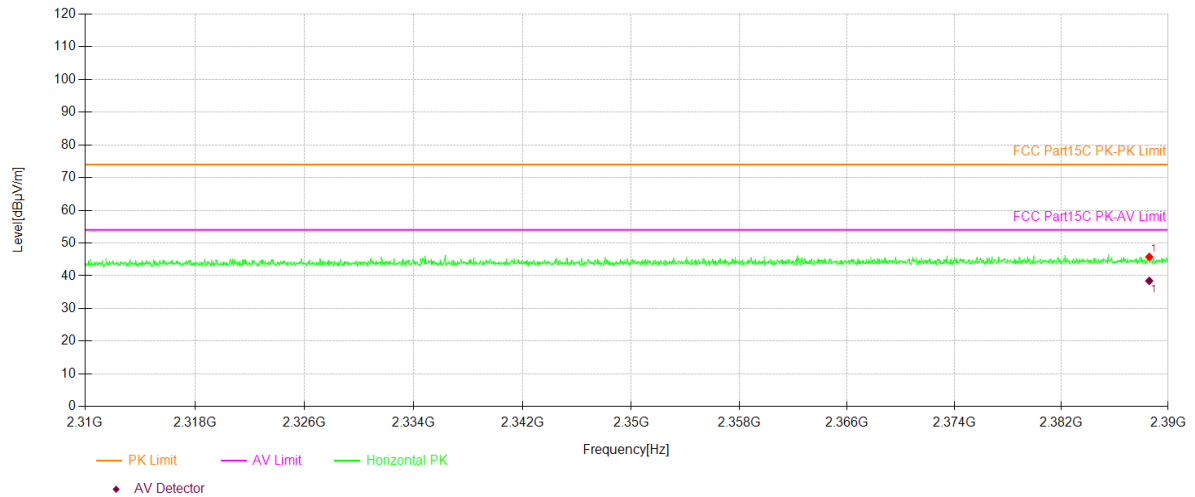


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	BT		
	Channel 0: 2402MHz	GFSK	V
		Test By: HYD	

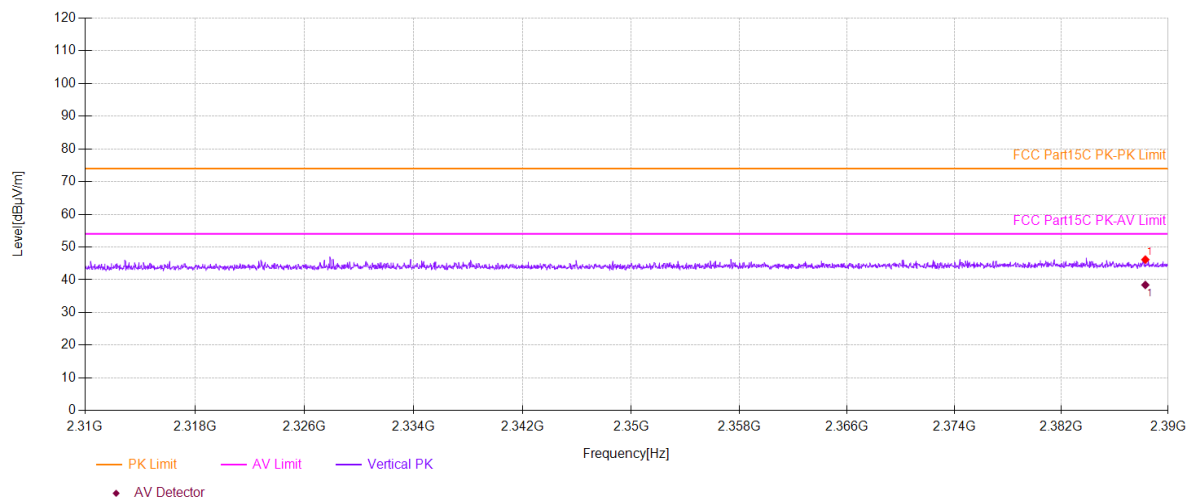

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	BT		
	Channel 78: 2480MHz	GFSK	H
		Test By: HYD	

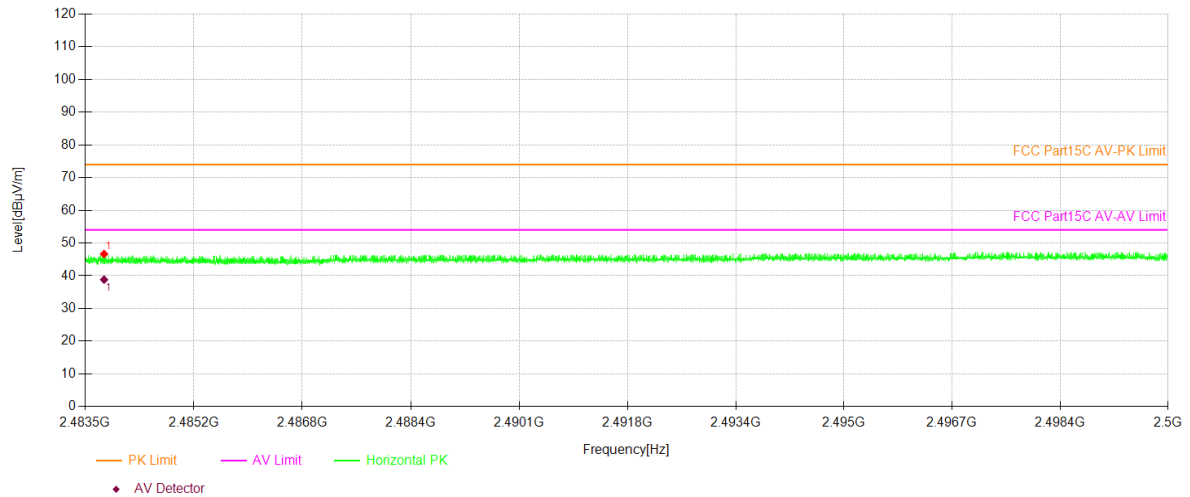

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	BT		
	Channel 78: 2480MHz	GFSK	V
		Test By: HYD	

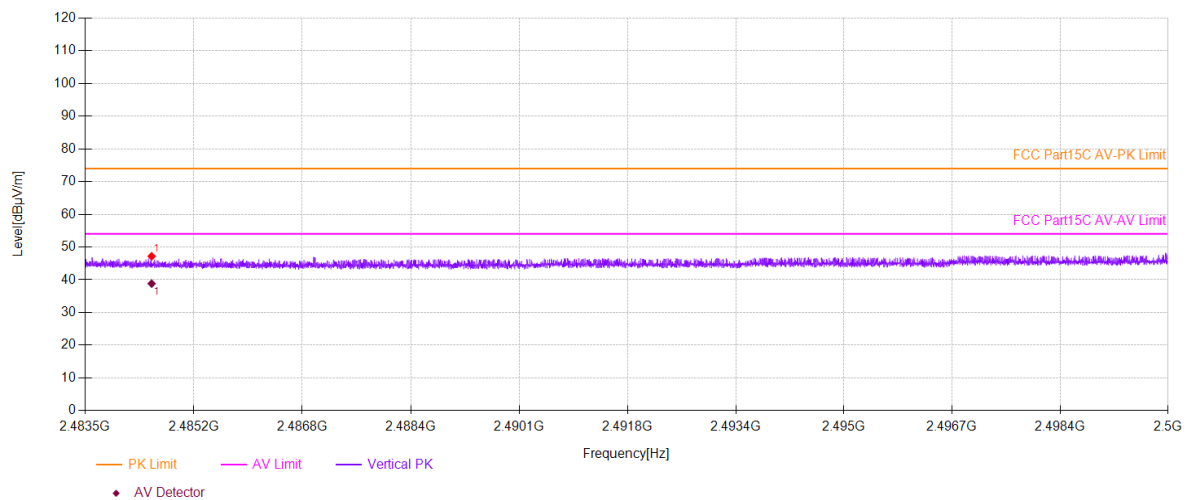


Test Model

Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
BT
Hopping

GFSK
Test By: HYD

H

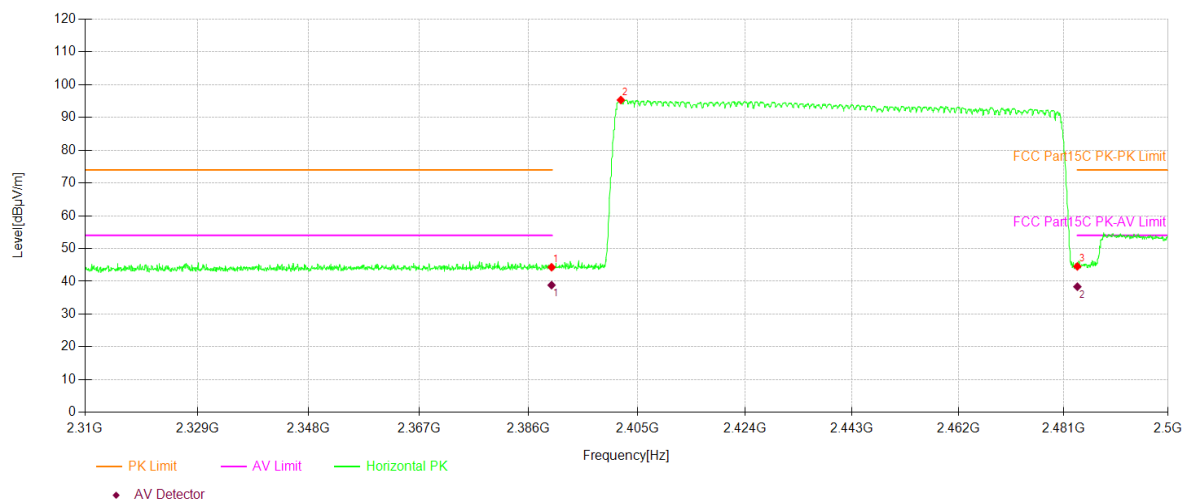


Test Model

Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
BT
Hopping

GFSK
Test By: HYD


V

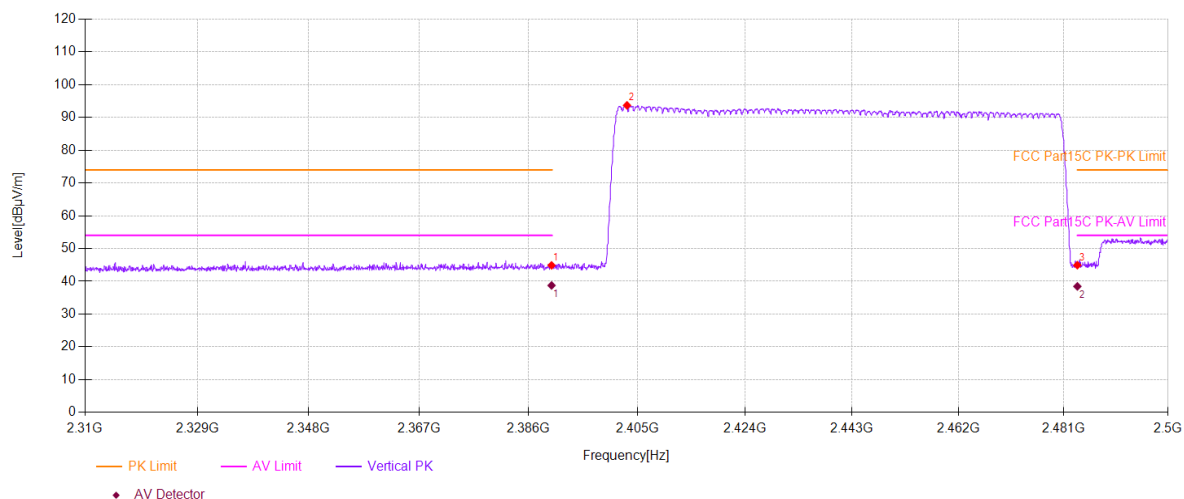

■ Spurious Emission below 1GHz (30MHz to 1GHz)


Bluetooth (GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

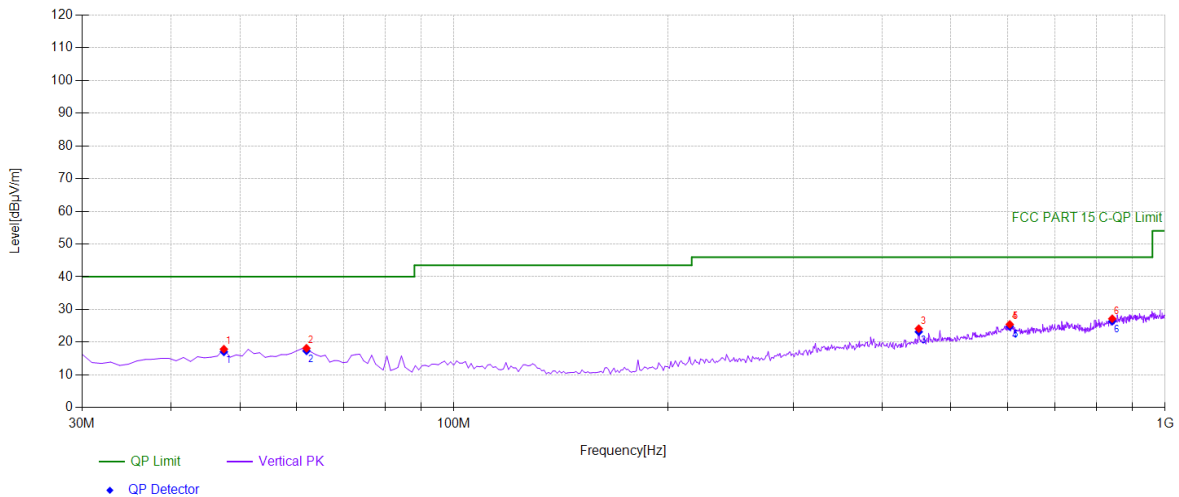

Suspected Data List								
NO	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	34.27	-16.39	17.88	PK	40.00	22.12	Vertical
2	62.042	35.85	-17.68	18.17	PK	40.00	21.83	Vertical
3	450.4304	34.74	-10.59	24.15	PK	46.00	21.85	Vertical
4	604.8148	31.83	-6.38	25.45	PK	46.00	20.55	Vertical
5	607.7277	32.03	-6.54	25.49	PK	46.00	20.51	Vertical
6	842.7027	31.42	-4.23	27.19	PK	46.00	18.81	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	17.06	40.00	22.94
2	62.042	-17.68	17.35	40.00	22.65
3	450.4304	-10.59	23.17	46.00	22.83
4	604.8148	-6.38	24.83	46.00	21.17
5	607.7277	-6.54	24.87	46.00	21.13
6	842.7027	-4.23	26.41	46.00	19.59

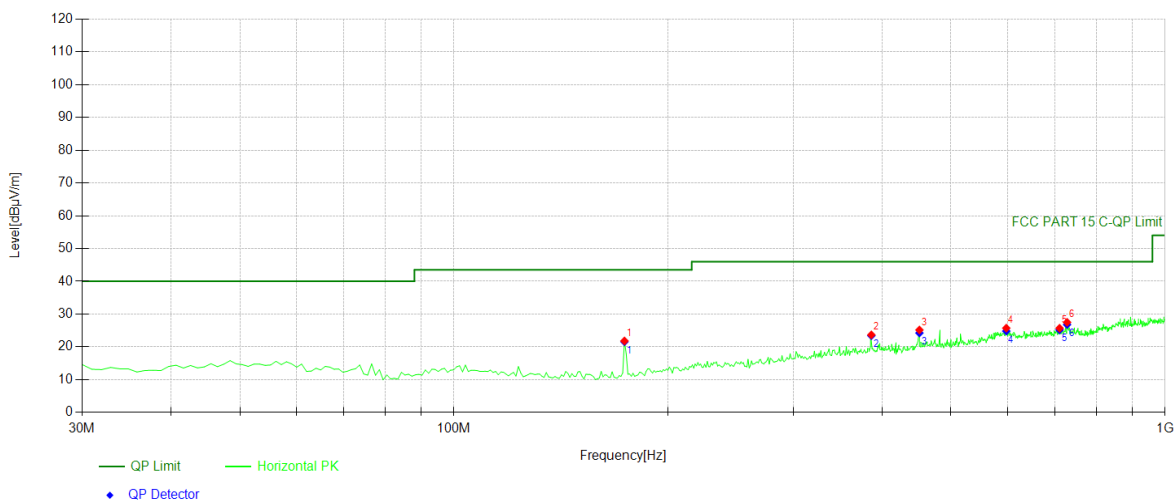


Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	173.7037	40.70	-18.87	21.83	PK	43.50	21.67	Horizontal
2	386.3463	35.19	-11.50	23.69	PK	46.00	22.31	Horizontal
3	451.4014	35.71	-10.55	25.16	PK	46.00	20.84	Horizontal
4	598.018	31.95	-6.22	25.73	PK	46.00	20.27	Horizontal
5	710.6507	31.49	-5.78	25.71	PK	46.00	20.29	Horizontal
6	728.1281	33.01	-5.50	27.51	PK	46.00	18.49	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	173.7037	-18.87	21.56	43.50	21.94
2	386.3463	-11.50	23.42	46.00	22.58
3	451.4014	-10.55	24.25	46.00	21.75
4	598.018	-6.22	24.82	46.00	21.18
5	710.6507	-5.78	25.16	46.00	20.84
6	728.1281	-5.50	26.80	46.00	19.20

Test mode: GFSK Frequency: Channel 39: 2441MHz

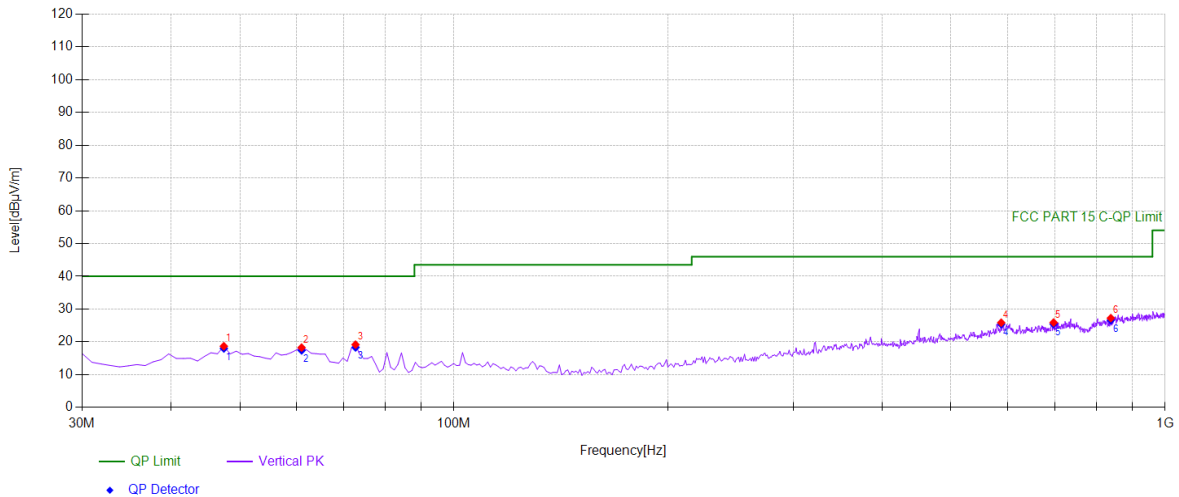


Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	35.08	-16.39	18.69	PK	40.00	21.31	Vertical
2	61.0711	35.80	-17.54	18.26	PK	40.00	21.74	Vertical
3	72.7227	38.36	-19.19	19.17	PK	40.00	20.83	Vertical
4	588.3083	32.63	-6.76	25.87	PK	46.00	20.13	Vertical
5	697.0571	31.92	-6.01	25.91	PK	46.00	20.09	Vertical
6	838.8188	31.64	-4.39	27.25	PK	46.00	18.75	Vertical

Final Data List


NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	18.01	40.00	21.99
2	61.0711	-17.54	17.42	40.00	22.58
3	72.7227	-19.19	18.33	40.00	21.67
4	588.3083	-6.76	25.39	46.00	20.61
5	697.0571	-6.01	25.43	46.00	20.57
6	838.8188	-4.39	26.61	46.00	19.39

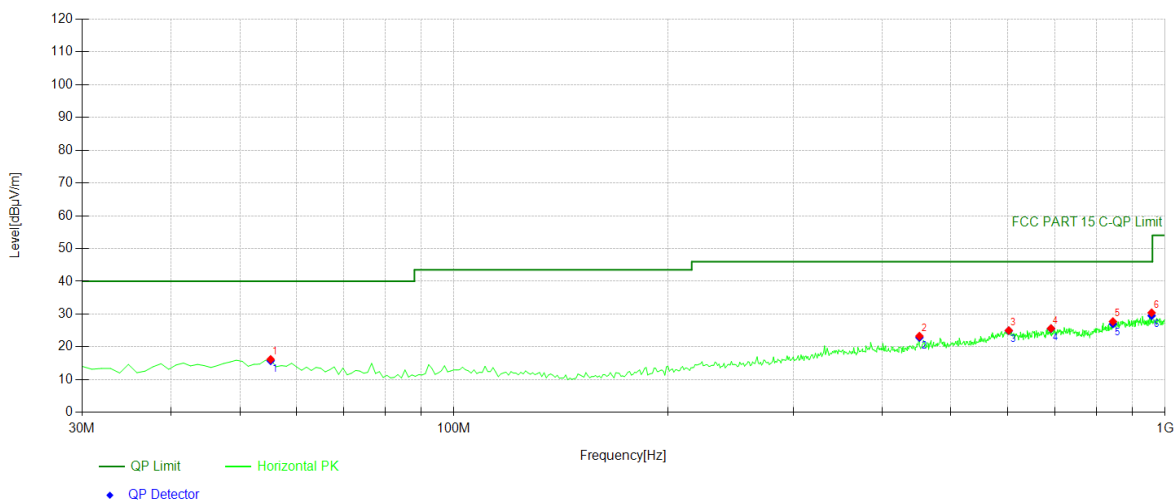

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	55.2452	32.95	-16.74	16.21	PK	40.00	23.79	Horizontal
2	451.4014	33.85	-10.55	23.30	PK	46.00	22.70	Horizontal
3	602.8729	31.27	-6.26	25.01	PK	46.00	20.99	Horizontal
4	691.2312	31.91	-6.27	25.64	PK	46.00	20.36	Horizontal
5	844.6446	31.85	-4.12	27.73	PK	46.00	18.27	Horizontal
6	957.2773	32.55	-2.13	30.42	PK	46.00	15.58	Horizontal


Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	55.2452	-16.74	15.75	40.00	24.25
2	451.4014	-10.55	22.84	46.00	23.16
3	602.8729	-6.26	24.91	46.00	21.09
4	691.2312	-6.27	25.54	46.00	20.46
5	844.6446	-4.12	26.99	46.00	19.01
6	957.2773	-2.13	29.51	46.00	16.49

Test mode: GFSK Frequency: Channel 78: 2480MHz

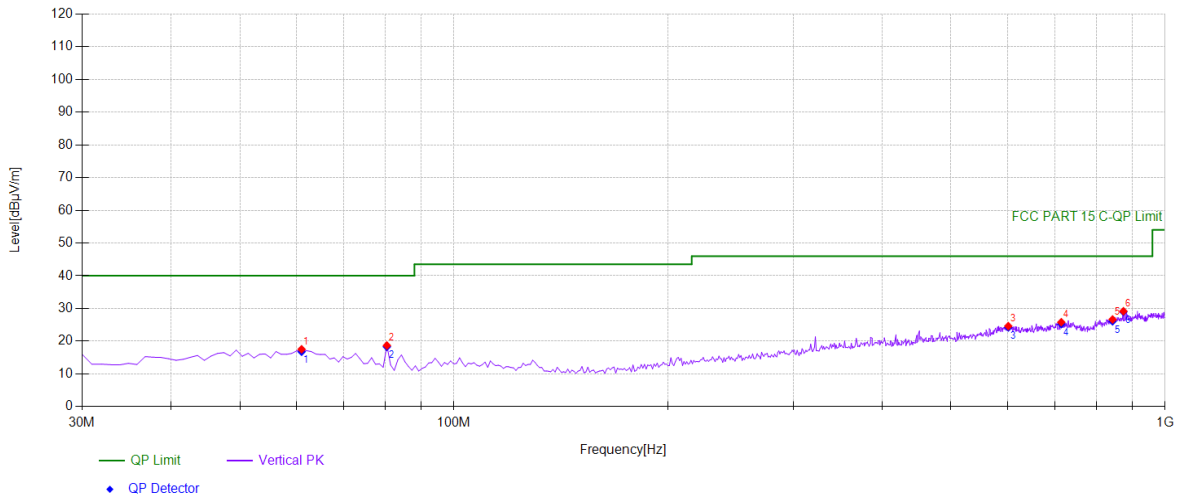

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	61.0711	35.08	-17.54	17.54	PK	40.00	22.46	Vertical
2	80.4905	38.90	-20.20	18.70	PK	40.00	21.30	Vertical
3	601.9019	30.82	-6.20	24.62	PK	46.00	21.38	Vertical
4	714.5345	31.57	-5.76	25.81	PK	46.00	20.19	Vertical
5	843.6737	30.82	-4.17	26.65	PK	46.00	19.35	Vertical
6	873.7738	32.58	-3.41	29.17	PK	46.00	16.83	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	61.0711	-17.54	16.80	40.00	23.20
2	80.4905	-20.20	18.31	40.00	21.69
3	601.9019	-6.20	24.23	46.00	21.77
4	714.5345	-5.76	25.26	46.00	20.74
5	843.6737	-4.17	26.10	46.00	19.90
6	873.7738	-3.41	28.98	46.00	17.02

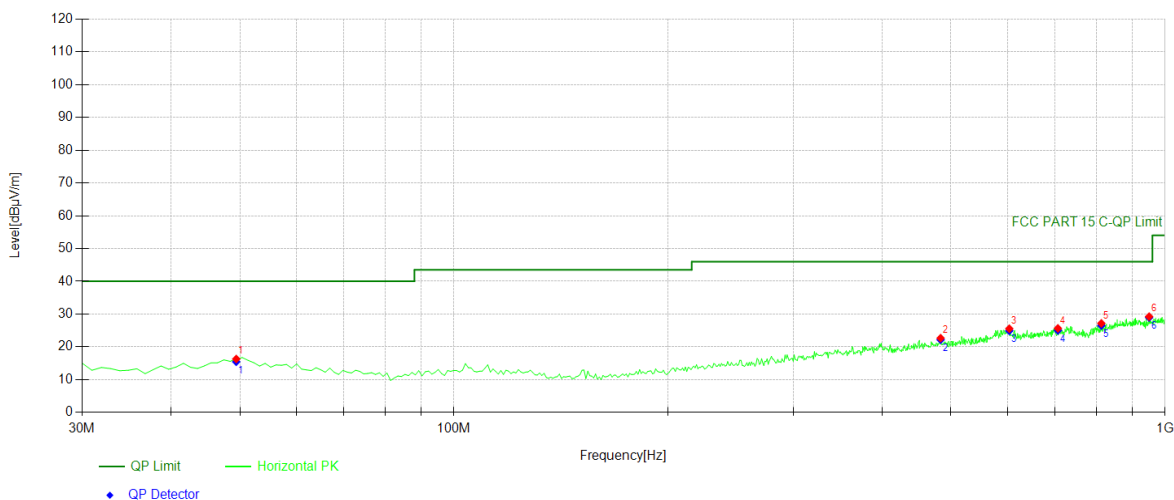

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	32.42	-16.10	16.32	PK	40.00	23.68	Horizontal
2	483.4434	32.59	-9.91	22.68	PK	46.00	23.32	Horizontal
3	603.8438	31.89	-6.32	25.57	PK	46.00	20.43	Horizontal
4	706.7668	31.48	-5.81	25.67	PK	46.00	20.33	Horizontal
5	813.5736	31.99	-4.81	27.18	PK	46.00	18.82	Horizontal
6	949.5095	31.85	-2.61	29.24	PK	46.00	16.76	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	15.47	40.00	24.53
2	483.4434	-9.91	22.19	46.00	23.81
3	603.8438	-6.32	24.91	46.00	21.09
4	706.7668	-5.81	25.01	46.00	20.99
5	813.5736	-4.81	26.52	46.00	19.48
6	949.5095	-2.61	28.94	46.00	17.06

9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207(a)

9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results


Pass

Note: The 120V & 240V voltage have been tested, and the worst result recorded was report as below

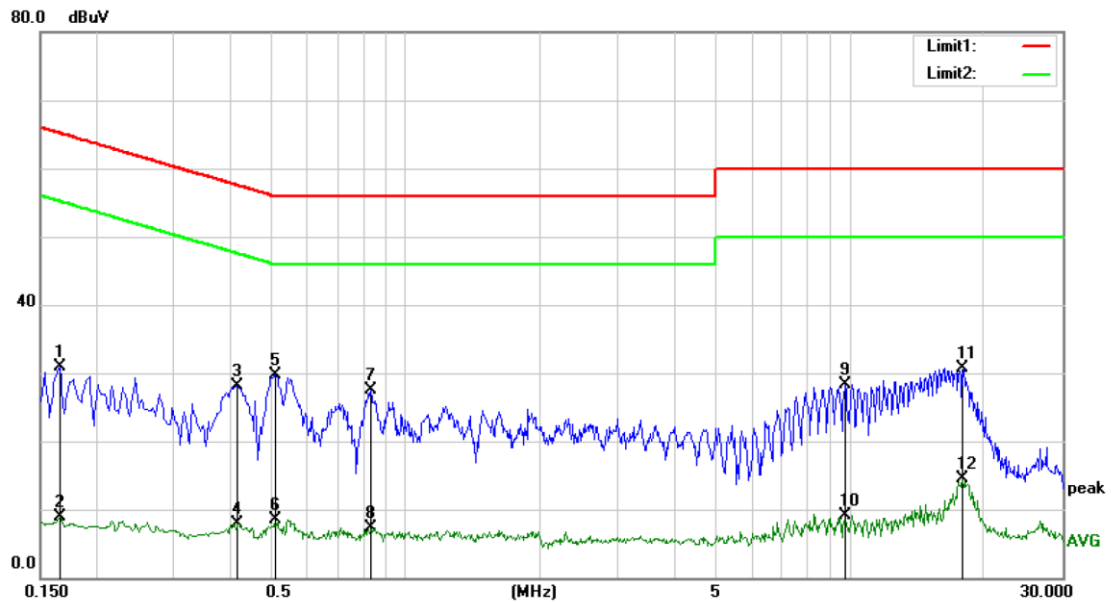

Site Conduction #1
 Mode: BT mode
 Note:
 Phase: **N** Temperature: 24.7

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1660	21.19	9.70	30.89	65.16	-34.27	QP	
2		0.1660	-0.79	9.70	8.91	55.16	-46.25	AVG	
3		0.4180	18.43	9.70	28.13	57.49	-29.36	QP	
4		0.4180	-1.83	9.70	7.87	47.49	-39.62	AVG	
5	*	0.5100	20.06	9.71	29.77	56.00	-26.23	QP	
6		0.5100	-1.28	9.71	8.43	46.00	-37.57	AVG	
7		0.8340	17.83	9.71	27.54	56.00	-28.46	QP	
8		0.8340	-2.38	9.71	7.33	46.00	-38.67	AVG	
9		9.7380	18.33	9.93	28.26	60.00	-31.74	QP	
10		9.7380	-0.89	9.93	9.04	50.00	-40.96	AVG	
11		17.9420	20.66	9.99	30.65	60.00	-29.35	QP	
12		17.9420	4.49	9.99	14.48	50.00	-35.52	AVG	

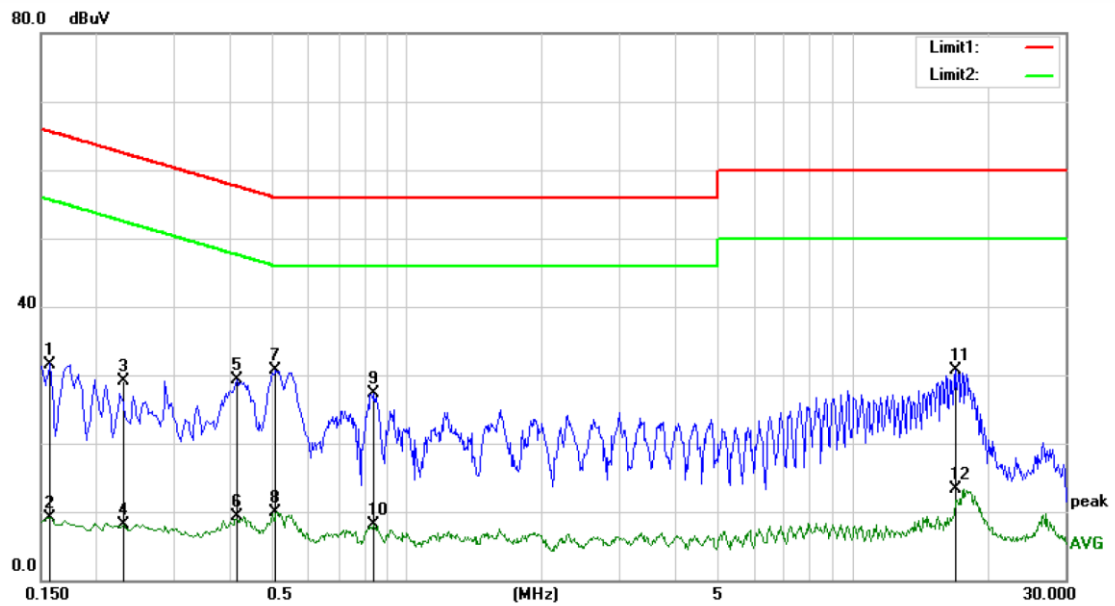

Mode: BT mode
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	21.76	9.70	31.46	65.57	-34.11	QP	
2		0.1580	-0.52	9.70	9.18	55.57	-46.39	AVG	
3		0.2300	19.43	9.70	29.13	62.45	-33.32	QP	
4		0.2300	-1.57	9.70	8.13	52.45	-44.32	AVG	
5		0.4140	19.61	9.70	29.31	57.57	-28.26	QP	
6		0.4140	-0.34	9.70	9.36	47.57	-38.21	AVG	
7	*	0.5060	20.93	9.71	30.64	56.00	-25.36	QP	
8		0.5060	0.11	9.71	9.82	46.00	-36.18	AVG	
9		0.8420	17.56	9.71	27.27	56.00	-28.73	QP	
10		0.8420	-1.64	9.71	8.07	46.00	-37.93	AVG	
11		16.9780	20.67	9.98	30.65	60.00	-29.35	QP	
12		16.9780	3.28	9.98	13.26	50.00	-36.74	AVG	

9.9 ANTENNA APPLICATION

9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.9.2 Result

PASS

- ☒ Antenna use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

Note: Please refer to the attached document Internal Photos to show the antenna connector.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---

10 APPENDIX PHOTOGRAPHS OF EUT

Please refer to the file of External Photo and Internal Photo.



11 APPENDIX PHOTOGRAPHS OF TEST SETUP

Please refer to the file of Test Setup Photo.

