

FCC PART 15 SUBPART B MEASUREMENT AND TEST REPORT

For

SHUOYING DIGITAL SCIENCE&TECHNOLOGY(CHINA)Co.,Ltd

No.187, 5th Binhai Road, Wenzhou, Zhejiang, China

E.U.T.: Car DVR

Model Name: H500S

Brand Name: N/A

FCC ID: YGB-H500

Report Number: NTC1508063F

Test Date(s): August 07, 2015 to August 15, 2015

Report Date(s): August 15, 2015

Prepared by

Dongguan Nore Testing Center Co., Ltd.


**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Rose Hu / Engineer



Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	3
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3 TEST METHODOLOGY	4
1.4 EQUIPMENT MODIFICATIONS	4
1.5 SUPPORT DEVICE	4
1.6 TEST FACILITY AND LOCATION.....	4
1.7 SUMMARY OF TEST RESULTS.....	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION	6
2.2 SPECIAL ACCESSORIES.....	6
2.3 DESCRIPTION OF TEST MODES	6
3. CONDUCTED EMISSIONS TEST	7
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	7
3.2 TEST CONDITION	7
3.3 MEASUREMENT RESULTS.....	7
4. RADIATED EMISSION TEST	10
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
4.2 MEASUREMENT PROCEDURE	10
4.3 LIMIT.....	11
4.4 MEASUREMENT RESULTS	11
5. TEST EQUIPMENT LIST.....	16

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Manufacturer/ Factory	: Shuoying Digital Science & Technology (China) Co., Ltd.
Address	: No.187, 5th Binhai Road, Binhai Industrial Park, Economic and Technological Development Zone, Wenzhou, Zhejiang, China
Power Supply	: DC 5V Come from USB Port, DC 3.7V Li-ion battery
Test voltage	: AC 120V 60Hz, AC 240V 60Hz(PC Input), Only the worst case was recorded in the report DC 3.7V Li-ion battery
Model name	: H500S
Model difference	: None
Hardware version	: H500SA-MAIN-V2.0
Software version	: 001
Serial number	: N/A
E.U.T. Type	: Class B
Operation Frequency	: Below 108MHz(Declaration by manufacturer)
Cable	: USB Line: 0.80m, Unshielded

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **YGB-H500** filing to comply with FCC Part 15 Subpart B Class B (2014).

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.
Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd.
(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China
(Full Name: Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.107	AC Power Conducted Emission	Compliant
§15.109	Radiated Emission	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories


Not available for this EUT intended for grant.

2.3 Description of test modes

The EUT has been tested under operating condition. Test mode 1: Recording, Test mode 2: Connect to PC

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

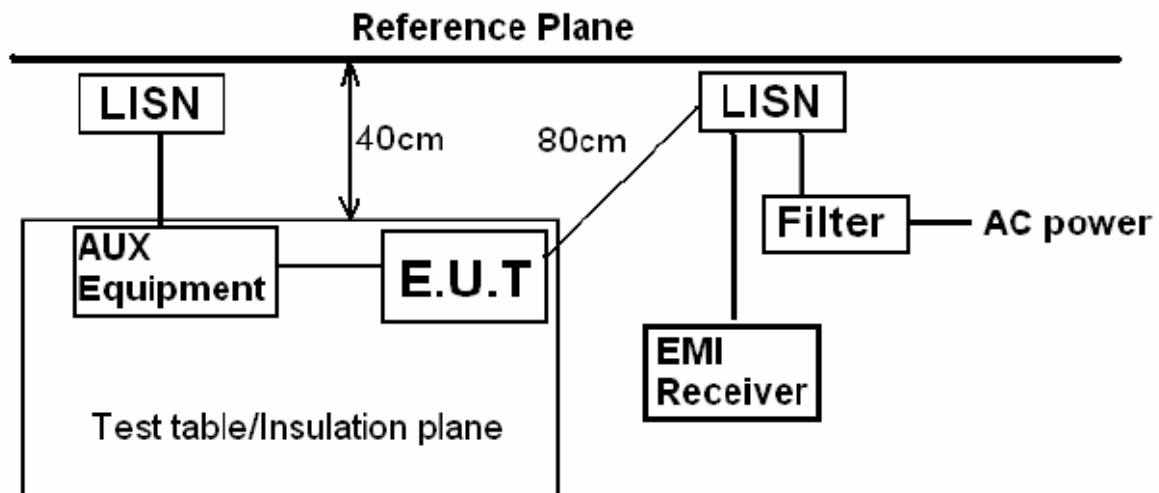

3.2 Test Condition

Test Requirement: FCC Part 15.107

The E.U.T. is put on the 0.8 m high table and connected to the AC mains through a Artificial Mains Network (AMN). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the FCC ANSI C63.10-2013 regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESCI) is set at 9 KHz.

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: Connect to PC

3.3 Measurement Results


Please refer to following plots of the worst case: AC 120V 60Hz.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-8-8 16:40:12

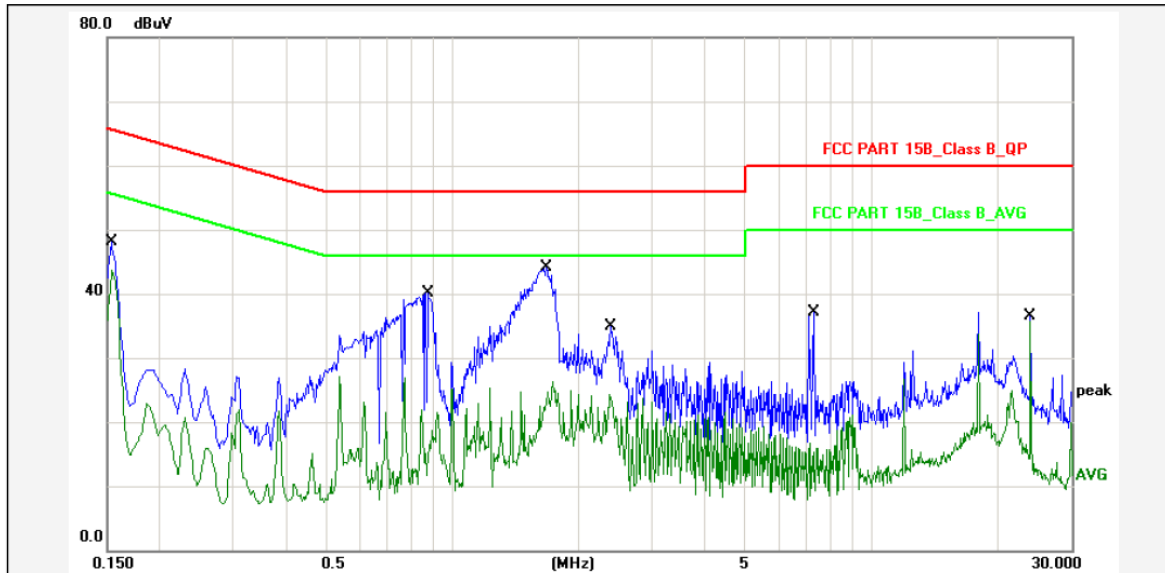

Report No.: H500S

Test Standard: FCC PART 15B_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: SHUOYING

Temp.()/Hum.(%): 24(C) / 58 %

Product: Car DVR

Power Rating: DC 5V(PC Input: AC 120V 60Hz)

Model No.: H500S

Test Engineer: Jerry

Test Mode: Connect to PC

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	35.40	46.20	65.78	-19.58	QP	P	
2	0.1539	10.80	31.00	41.80	55.78	-13.98	AVG	P	
3	0.8739	10.80	27.50	38.30	56.00	-17.70	QP	P	
4	0.8739	10.80	5.80	16.60	46.00	-29.40	AVG	P	
5	1.6780	10.80	31.70	42.50	56.00	-13.50	QP	P	
6	1.6780	10.80	11.80	22.60	46.00	-23.40	AVG	P	
7	2.3860	10.80	22.10	32.90	56.00	-23.10	QP	P	
8	2.3860	10.80	11.50	22.30	46.00	-23.70	AVG	P	
9	7.3059	10.80	24.70	35.50	60.00	-24.50	QP	P	
10	7.3059	10.80	3.10	13.90	50.00	-36.10	AVG	P	
11	23.9540	10.80	22.60	33.40	60.00	-26.60	QP	P	
12	23.9540	10.80	22.80	33.60	50.00	-16.40	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Conduction

Test Time: 2015-8-8 16:44:12

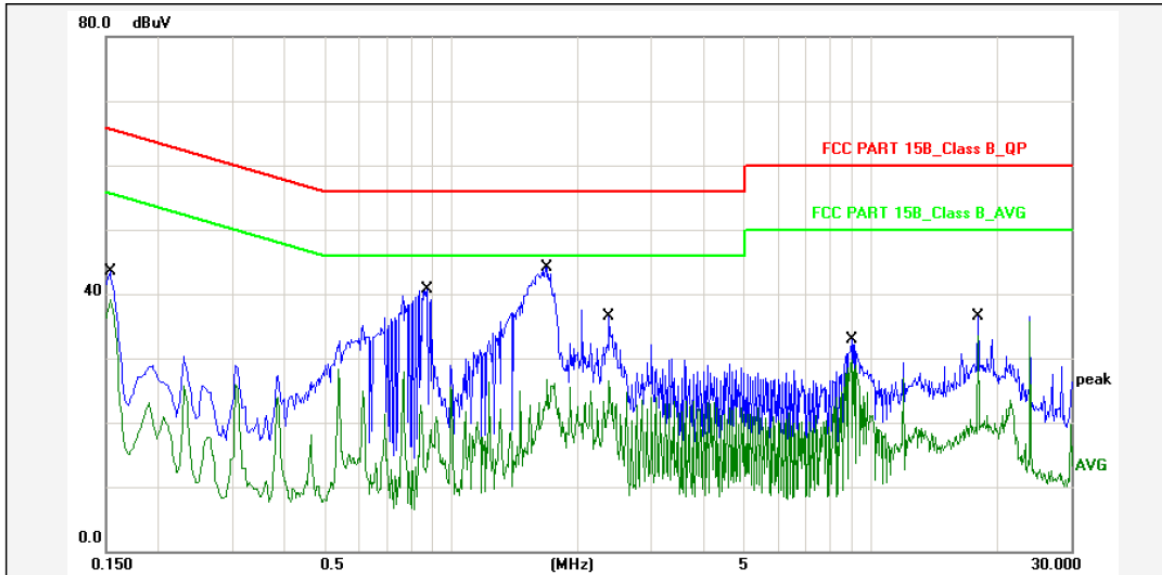

Report No.: H500S

Test Standard: FCC PART 15B_Class B_QP

Test item: Conducted Emission

Applicant: SHUOYING

Product: Car DVR

Model No.: H500S

Phase: N

Temp.()/Hum.(%): 24(C) / 58 %

Power Rating: DC 5V(PC Input: AC 120V 60Hz)

Test Engineer: Jerry

Test Mode: Connect to PC

Remark:


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	30.70	41.50	65.78	-24.28	QP	P	
2	0.1539	10.80	26.40	37.20	55.78	-18.58	AVG	P	
3	0.8780	10.80	27.80	38.60	56.00	-17.40	QP	P	
4	0.8780	10.80	5.60	16.40	46.00	-29.60	AVG	P	
5	1.6900	10.80	31.30	42.10	56.00	-13.90	QP	P	
6	1.6900	10.80	13.80	24.60	46.00	-21.40	AVG	P	
7	2.3820	10.80	23.70	34.50	56.00	-21.50	QP	P	
8	2.3820	10.80	13.90	24.70	46.00	-21.30	AVG	P	
9	8.9977	10.80	20.10	30.90	60.00	-29.10	QP	P	
10	8.9977	10.80	16.90	27.70	50.00	-22.30	AVG	P	
11	17.9659	10.80	23.70	34.50	60.00	-25.50	QP	P	
12	17.9659	10.80	20.90	31.70	50.00	-18.30	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

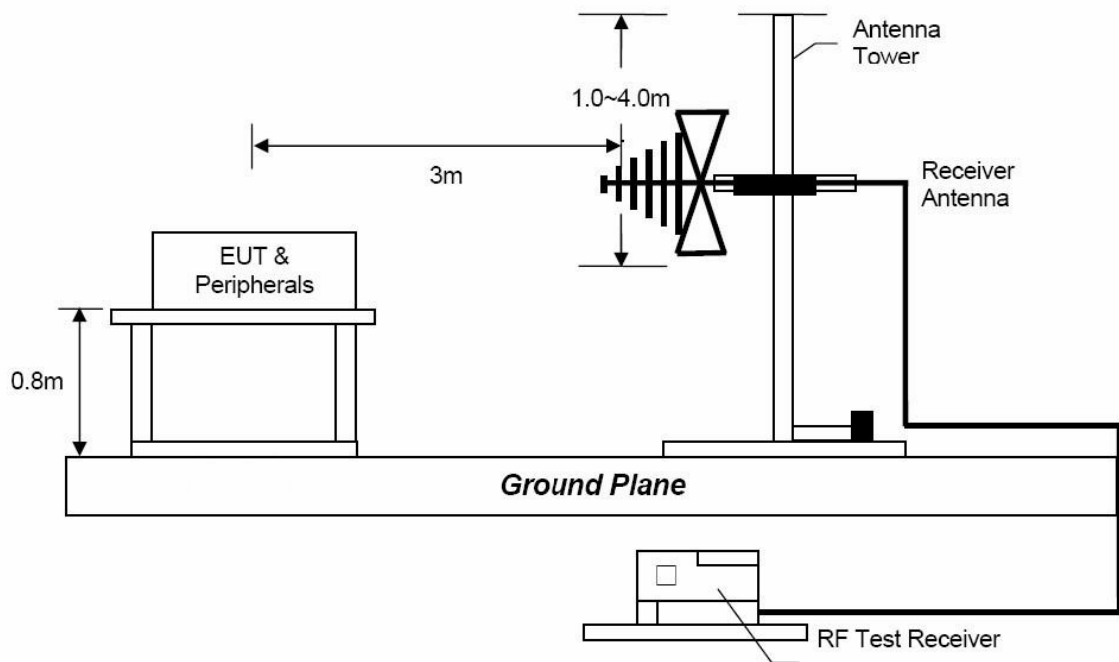

4.2 Measurement Procedure

E.U.T. and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. E.U.T. is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC ANSI C63.10-2013 on radiated emission measurement.

The bandwidth of the EMI test receiver (R&S ESCI7) is set at 120 KHz.
The frequency range from 30 MHz to 1000 MHz is checked.

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Remark : (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4 Measurement Results

For test mode: Recording,
Please refer to following plots.


For test mode: Connect to PC,
Please refer to following plots of the worst case: AC 120V 60Hz.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-8-14 17:22:26

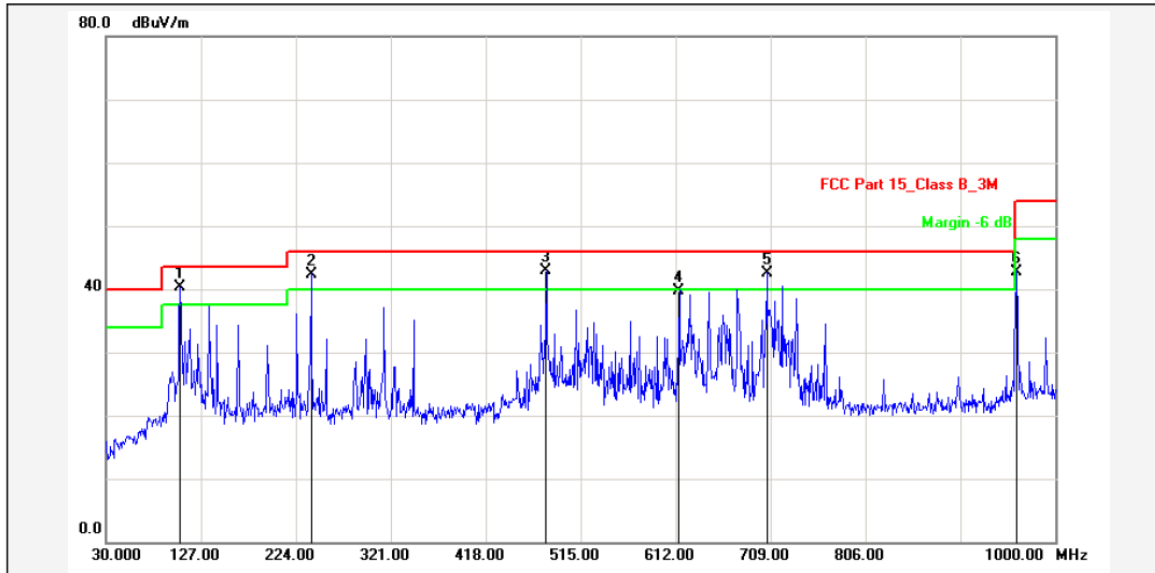

Report No.: H500S

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: SHUOYING

Product: Car DVR

Model No.: H500S

Test Distance:

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: DC 5V(PC Input AC 120V 60Hz)

Test Engineer: Stan

Test Mode: Connect to PC

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	105.6598	-11.97	52.27	40.30	43.50	-3.20	QP			P	
2	239.5200	-12.06	54.46	42.40	46.00	-3.60	QP			P	
3	480.0799	-7.21	50.11	42.90	46.00	-3.10	QP			P	
4	615.8799	-5.04	44.84	39.80	46.00	-6.20	QP			P	
5	705.1200	-3.70	46.30	42.60	46.00	-3.40	QP			P	
6	960.2300	-0.23	43.03	42.80	54.00	-11.20	QP			P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel:+86-769-22022444 Fax:+86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-8-14 17:29:27

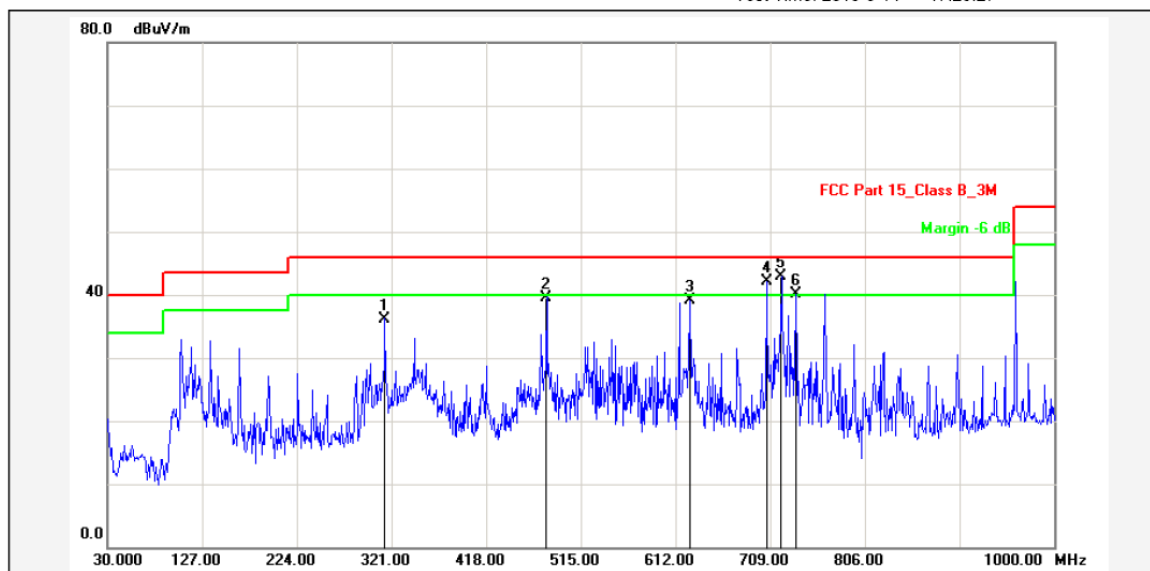

Report No.: H500S

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: SHUOYING

Product: Car DVR

Model No.: H500S

Test Distance:

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: DC 5V(PC Inpu AC 120V 60Hz)

Test Engineer: Stan

Test Mode: Connect to PC

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	314.2099	-12.09	48.29	36.20	46.00	-9.80	QP			P	
2	480.0799	-9.21	48.81	39.60	46.00	-6.40	QP			P	
3	626.5498	-6.77	45.87	39.10	46.00	-6.90	QP			P	
4	705.1200	-3.70	45.80	42.10	46.00	-3.90	QP			P	
5	720.6399	-3.28	46.18	42.90	46.00	-3.10	QP			P	
6	735.1900	-2.95	43.05	40.10	46.00	-5.90	QP			P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-8-14 17:46:30

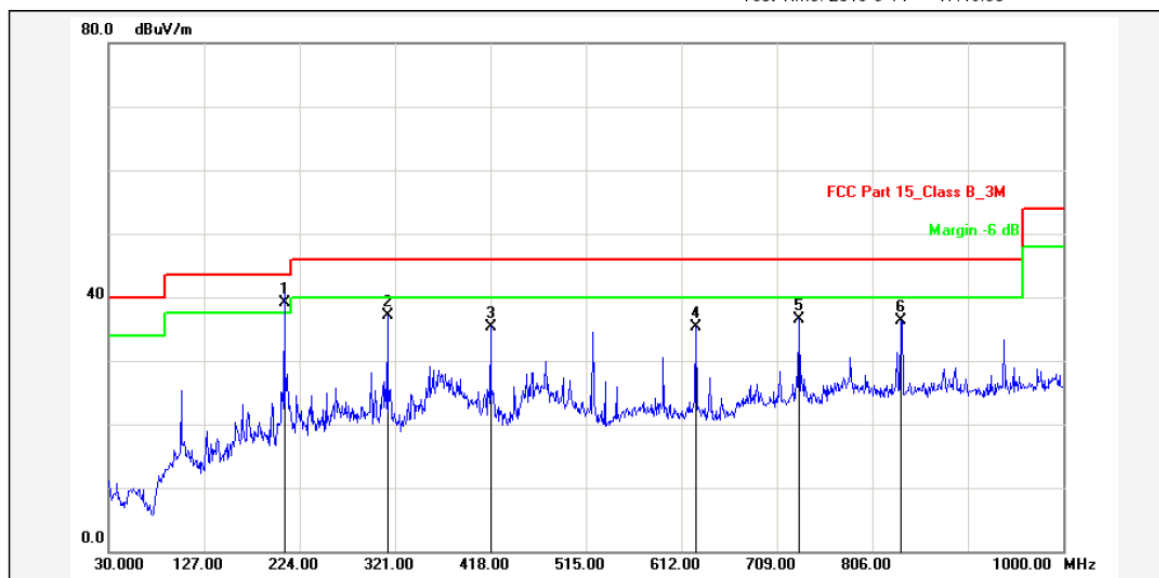

Report No.: H500S

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: SHUOYING

Product: Car DVR

Model No.: H500S

Test Distance:

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: DC 3.7V

Test Engineer: Stan

Test Mode: Recording

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	208.8200	-13.27	52.47	39.20	43.50	-4.30	QP			P	
2	313.2400	-10.11	47.21	37.10	46.00	-8.90	QP			P	
3	418.0000	-8.68	44.08	35.40	46.00	-10.60	QP			P	
4	626.5498	-5.10	40.40	35.30	46.00	-10.70	QP			P	
5	731.3096	-3.03	39.63	36.60	46.00	-9.40	QP			P	
6	835.1000	-1.37	37.67	36.30	46.00	-9.70	QP			P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-8-14 17:37:22

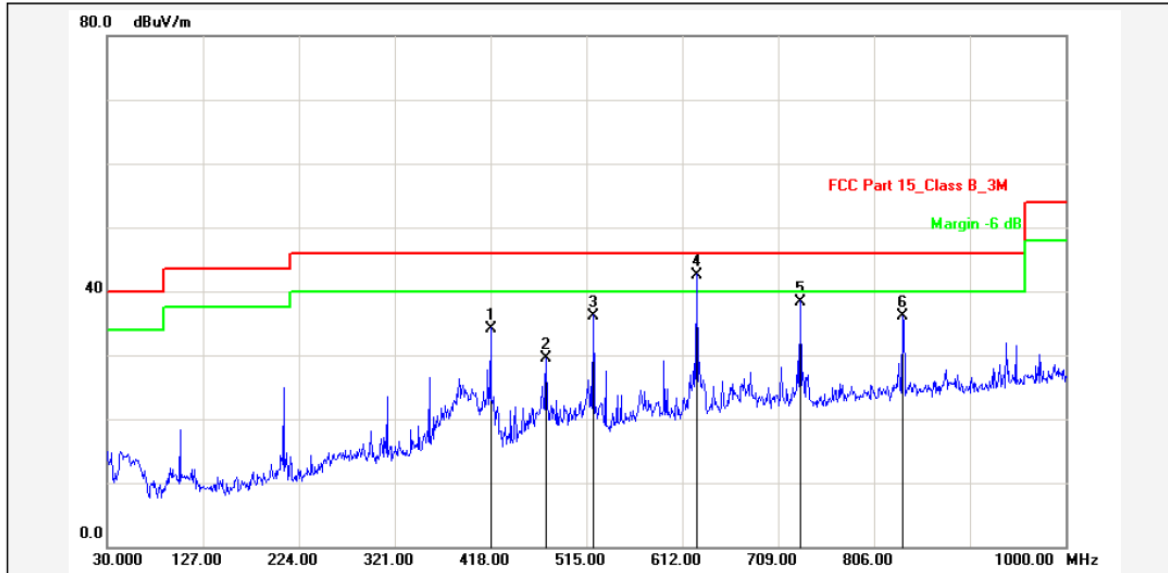

Report No.: H500S

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: SHUOYING

Product: Car DVR

Model No.: H500S

Test Distance:

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: DC 3.7V

Test Engineer: Stan

Test Mode: Recording

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	418.0000	-11.58	45.78	34.20	46.00	-11.80	QP			P	
2	474.2599	-9.35	38.85	29.50	46.00	-16.50	QP			P	
3	521.7898	-8.73	44.93	36.20	46.00	-9.80	QP			P	
4	626.5500	-6.77	49.37	42.60	46.00	-3.40	QP			P	
5	731.3100	-3.03	41.43	38.40	46.00	-7.60	QP			P	
6	835.1000	-1.37	37.47	36.10	46.00	-9.90	QP			P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

5. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 24, 2014	Nov. 23, 2015
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 27, 2014	Nov. 26, 2015
Positioning Controller	UC	UC 3000	N/A	0~360°, 1-4m	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 07, 2015	Mar. 06, 2016
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 08, 2014	Nov. 07, 2015

---End---