

RF Antenna Assembly

Specification

1. Electrical Properties :



- 1.1 Frequency Range..... 2.4GHz ~ 2.5GHz ;4.9GHz~5.825GHz
- 1.2 Impedance50 Ω Nominal
- 1.3 VSWR 1.92 :1Max.
- 1.4 Return Loss..... -10 dB Max.
- 1.5 Radiation Omni-directional
- 1.6 Gain(peak)..... 5.0dBi
- 1.7 Polarization..... Linear; Vertical
- 1.8 Admitted Power..... 1W
- 1.9 Cable..... RG-178 Coaxial Cable
- 1.10 Connector..... BIG SMA Plug Reverse

2. Physical Properties :


- 2.1 Antenna Body..... ABS
- 2.2 Antenna Base..... PC+PBT
- 2.3 Operating Temp. -10 $^{\circ}$ C ~ +60 $^{\circ}$ C
- 2.4 Storage Temp. -10 $^{\circ}$ C ~ +70 $^{\circ}$ C
- 2.5 Color Black

CG-


REV	DATE	DESCRIPTION
X1	08/29-2015	New Issue

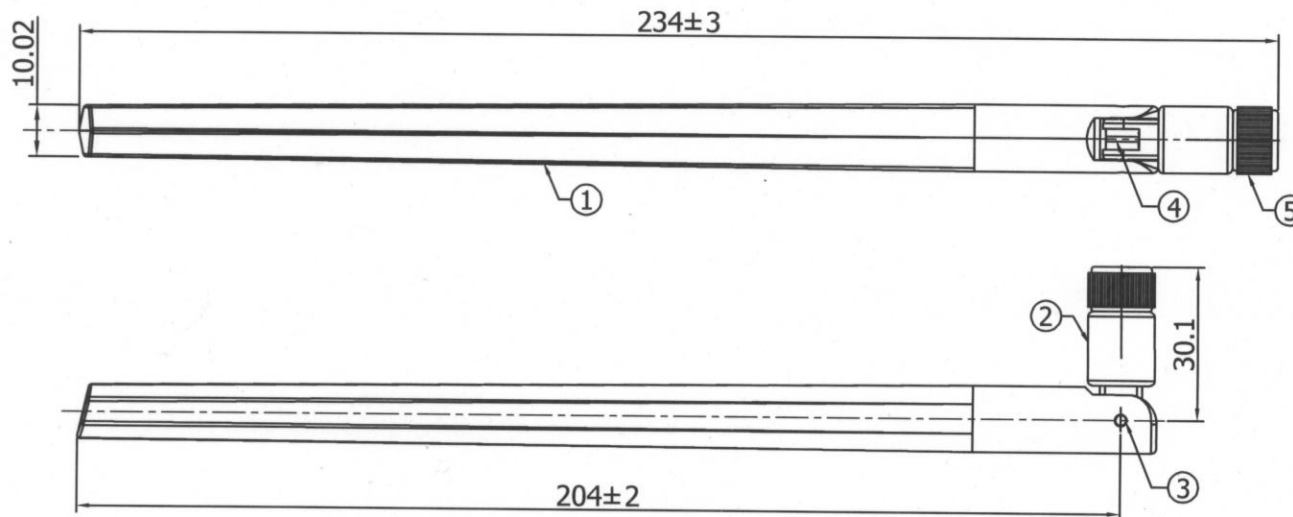

Bar Code標籤貼於外箱側面左上角共1PCS

PE Bag
Shrink Line

Packing: 4PCS/Bag

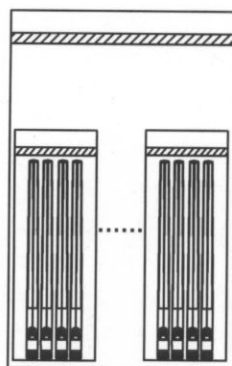

Packing : 12 PCS/Bag

5	Connector	BIG SMA Straight Plug Reverse	1	
4	Cable	RG-178 Cable, Transparency Brown,	1	
3	Rivet	POM, Color: Black	2	
2	Antenna Base	(CD-13)PC+PBT, Color: Black	1	
1	Antenna Body	(CD-752)ABS, Color: Black	1	
NO	DESCRIPTION		Q'TY	REMARK

CUSTOMER'S SINGATURE

XX.	±5.0
X.	±3.0
.X	±1.0
.XX	±0.2
.XXX	±0.1

APPROVED

CHECKED

DRAWING

CUSTOMER:

PART NO :

PART NAME:

W.Y P/NO :

REV

UNIT

新漢電腦

603ANT0087X00

RF Antenna Assembly

C1779-510002-A

SRF20151582

SHEET : 1/1

M.gear Wha Yu Group

THIS DRAWING, AND IT'S INHERANT DESIGN CONCEPTS, ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.