

TEST REPORT

Reference No...... : WTX26X06185900W009
FCC ID : YHLBLU96GC
Applicant : BLU Products, Inc.
Address : 8600 NW 36th Street, Suite #300 | Miami, FL 33166, USA
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Smart Phone
Model No...... : G96
Standards : **47 CFR FCC Part 15, Subpart B**
Date of Receipt sample ... : 2026-06-26
Date of Test..... : 2026-07-01 to 2026-07-23
Date of Issue : 2026-07-27
Test Report Form No. : WTX_FCC PART15B_001
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

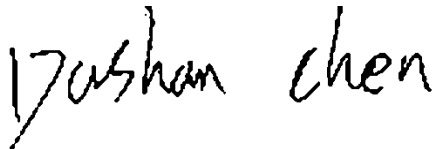

Dashan Chen/Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	11
3. CONDUCTED EMISSIONS	12
3.1 TEST PROCEDURE	12
3.2 BASIC TEST SETUP BLOCK DIAGRAM	12
3.3 ENVIRONMENTAL CONDITIONS	12
3.4 SUMMARY OF TEST RESULTS	12
4. RADIATED EMISSION	15
4.1 TEST PROCEDURE	15
4.2 BLOCK DIAGRAM OF TEST SETUP	15
4.3 TEST RECEIVER SETUP	16
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
4.5 ENVIRONMENTAL CONDITIONS	16
4.6 SUMMARY OF TEST RESULTS	16
APPENDIX PHOTOGRAPHS	29

Report version

Version No.	Date of issue	Description
Rev.00	2026-07-27	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Phone
Trade Name:	BLU
Model No.:	G96
Adding Model(s):	/
<i>Note: The sample information is provided by the customer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	Battery:DC3.87V Type-C:DC5V
Battery Capacity:	C1016656700P Rated: 6830mAh 26.44Wh, Typical: 7000mAh 27.09Wh
Rated Power:	/
Power Adapter Model:	US-BJ-1825Q Input:AC100-240V 50/60Hz 0.5A Output:DC5V3A/9V2A/12V1.5A
Lowest Internal Frequency:	/
Highest Internal Frequency:	5825MHz
Classification of ITE:	Class B

1.2 Test Standards

The tests were performed according to following standards:

47 CFR FCC Part 15, Subpart B:Unintentional Radiators.

ANSI C63.4-2014:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

ANSI C63.4a-2017:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Amendment 1:Test Site Validation

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Charging And Playing	Connect to the Adapter	AC120V 60Hz for adapter
TM2	Downloading	Connect to the Notebook	AC120V 60Hz for PC
TM3	Camera	Camera On	Battery:DC3.87V Type-C:DC5V
TM4	FM	Worst case FM 98MHz	Battery:DC3.87V Type-C:DC5V
TM5	GPS	Receive 1575.42MHz	Battery:DC3.87V Type-C:DC5V
TM6	GSM 850	Receiver	Battery:DC3.87V Type-C:DC5V
TM7	WCMDA Band 5	Receiver	Battery:DC3.87V Type-C:DC5V
TM8	LTE Band 5	Receiver	Battery:DC3.87V Type-C:DC5V

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
Type-C Cable	1.0	Unshielded	Without Ferrite	Without Chip
Earphone Cable	1.1	Unshielded	Without Ferrite	Without Chip

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
/	/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi 100-14IBD	PF0F4ABV

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emission 1#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Conducted Emission 2#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Radiated Emissions chamber A	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.70\text{dB}$
		@1GHz to 6GHz: $\pm 5.88\text{dB}$
		@6GHz to 18GHz: $\pm 5.96\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$
Radiated Emissions chamber B	Radiated	@30MHz to 1GHz: $\pm 5.36\text{dB}$
Radiated Emissions chamber C	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.28\text{dB}$
		@1GHz to 6GHz: $\pm 5.56\text{dB}$
		@6GHz to 18GHz: $\pm 5.72\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
☐ Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2026-02-05	2027-02-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
Amplifier	HP	8447F	2805A03475	2026-02-05	2027-02-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz					
Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04
Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
Amplifier	Agilent	8447D	2944A10457	2026-02-05	2027-02-04
Coaxial Cable	/	1.5MRFC-LWB3	/	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
Amplifier	HP	8447F	2944A03869	2026-02-05	2027-02-04
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz					

EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12
Amplifier	Tonscend	TAP010180 50	AP22E80623 5	2026-02-05	2027-02-04
DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
Coaxial Cable	/	RC-18G-N- M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC-18G-N- M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC-18G-N- M	/	2026-02-23	2027-02-22
☐ Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2026-02-05	2027-02-04
EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2025-11-25	2026-11-24
AC LISN	Schwarz beck	NSLK8126	8126-279	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
Coaxial Cable	/	6MRFC-DP	/	2026-02-23	2027-02-22
☒ Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2026-02-05	2027-02-04
LISN	Rohde & Schwarz	ENV 216	100097	2026-02-05	2027-02-04
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
EMI Test Software/EZ-EMC (Conducted Emission Room 1#)	Farad	3A1*CE-RE	1.1.4.3
EMI Test Software/EZ-EMC (Conducted Emission Room 2#)	Farad	3A1*CE-RE	1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

The test is conducted under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

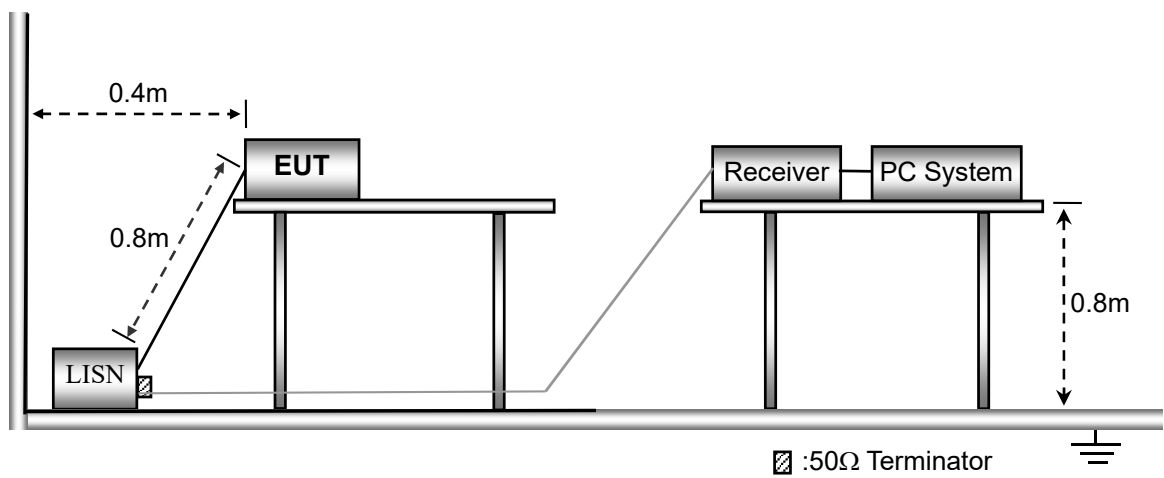


3.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results


Please find the results below:

Test mode:	TM1(worst case)	Polarity:	Line
------------	-----------------	-----------	------

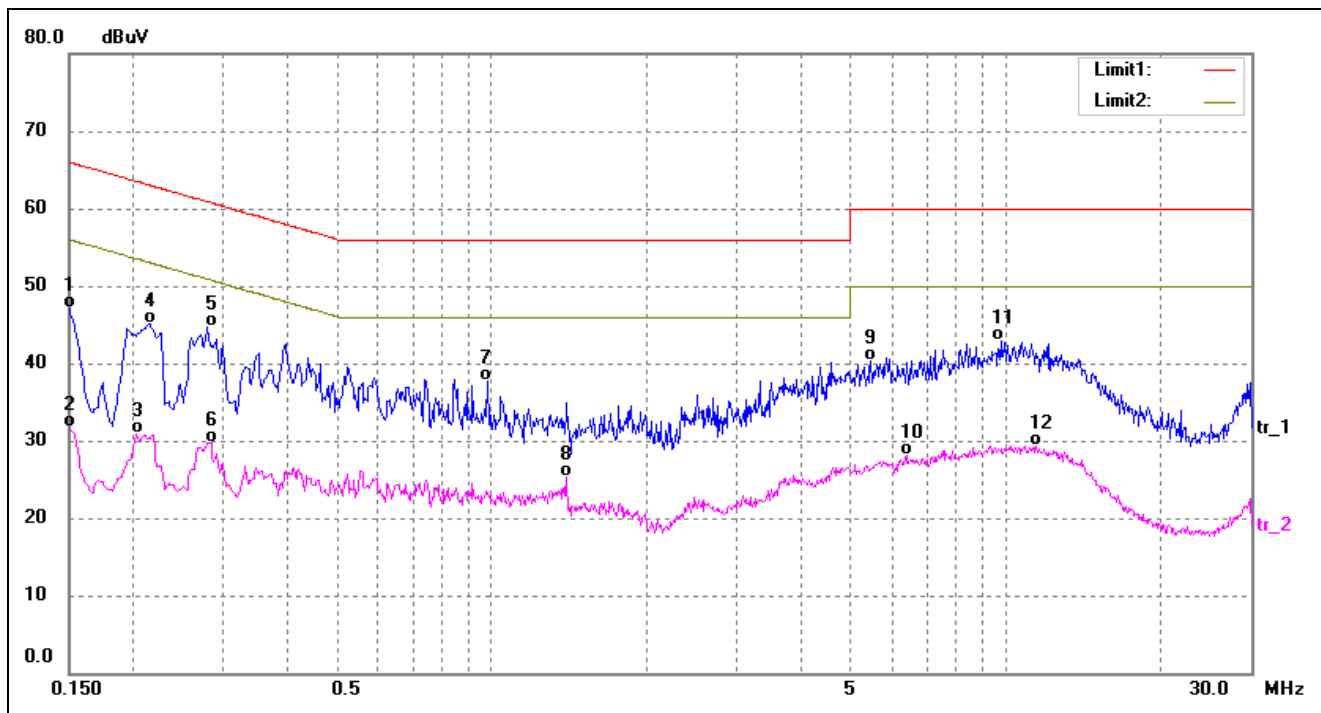

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	37.67	9.43	47.10	65.99	-18.89	QP
2	0.1500	22.18	9.43	31.61	55.99	-24.38	AVG
3	0.2020	21.26	9.63	30.89	53.52	-22.63	AVG
4	0.2140	35.49	9.63	45.12	63.04	-17.92	QP
5*	0.2779	35.17	9.63	44.80	60.88	-16.08	QP
6	0.2819	20.12	9.63	29.75	50.76	-21.01	AVG
7	0.9820	27.98	9.76	37.74	56.00	-18.26	QP
8	1.3940	15.72	9.60	25.32	46.00	-20.68	AVG
9	5.4500	30.62	9.61	40.23	60.00	-19.77	QP
10	6.4100	18.42	9.72	28.14	50.00	-21.86	AVG
11	9.7660	33.18	9.81	42.99	60.00	-17.01	QP
12	11.4940	19.64	9.72	29.36	50.00	-20.64	AVG

Test mode:	TM1(worst case)	Polarity:	Neutral
------------	-----------------	-----------	---------

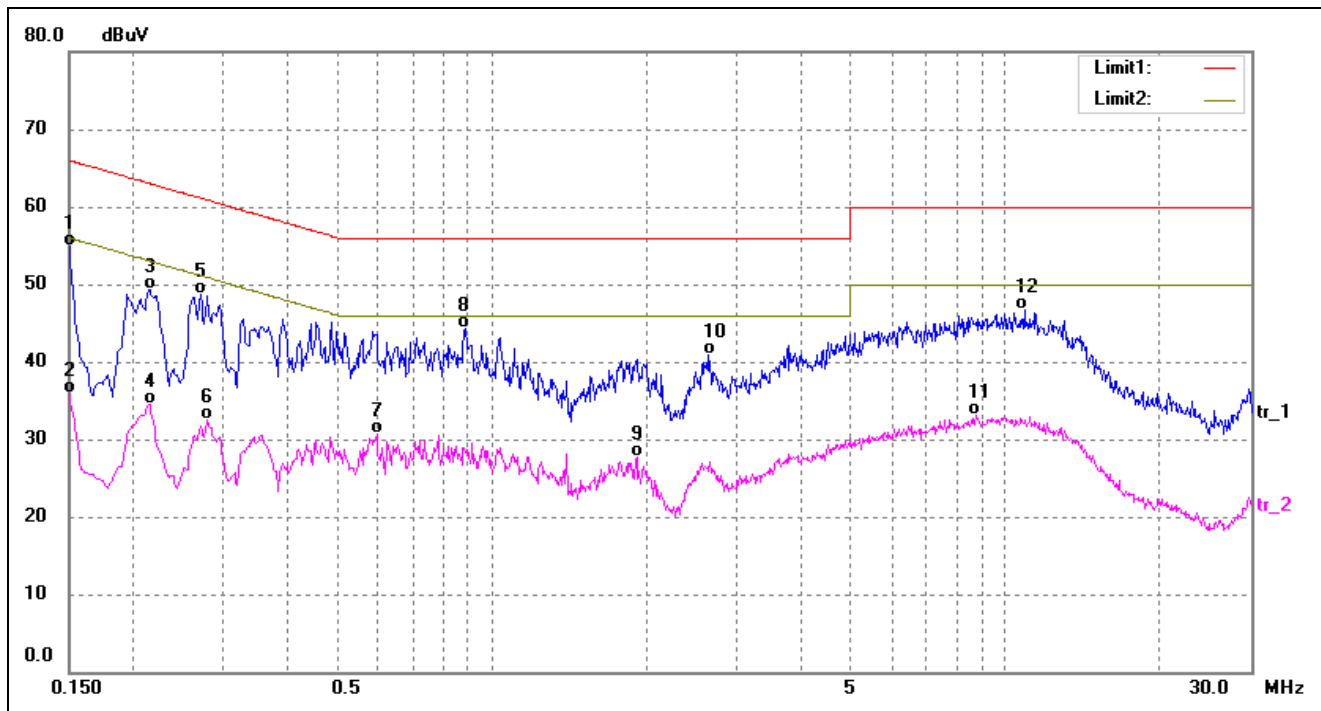

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	45.48	9.43	54.91	65.99	-11.08	QP
2	0.1500	26.43	9.43	35.86	55.99	-20.13	AVG
3	0.2140	39.75	9.63	49.38	63.04	-13.66	QP
4	0.2140	24.92	9.63	34.55	53.04	-18.49	AVG
5	0.2700	39.11	9.63	48.74	61.12	-12.38	QP
6	0.2779	22.83	9.63	32.46	50.88	-18.42	AVG
7	0.5940	21.03	9.70	30.73	46.00	-15.27	AVG
8	0.8860	34.48	9.75	44.23	56.00	-11.77	QP
9	1.9140	18.35	9.39	27.74	46.00	-18.26	AVG
10	2.6340	31.47	9.38	40.85	56.00	-15.15	QP
11	8.7620	23.21	9.80	33.01	50.00	-16.99	AVG
12	10.8620	36.96	9.76	46.72	60.00	-13.28	QP


4. RADIATED EMISSION

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

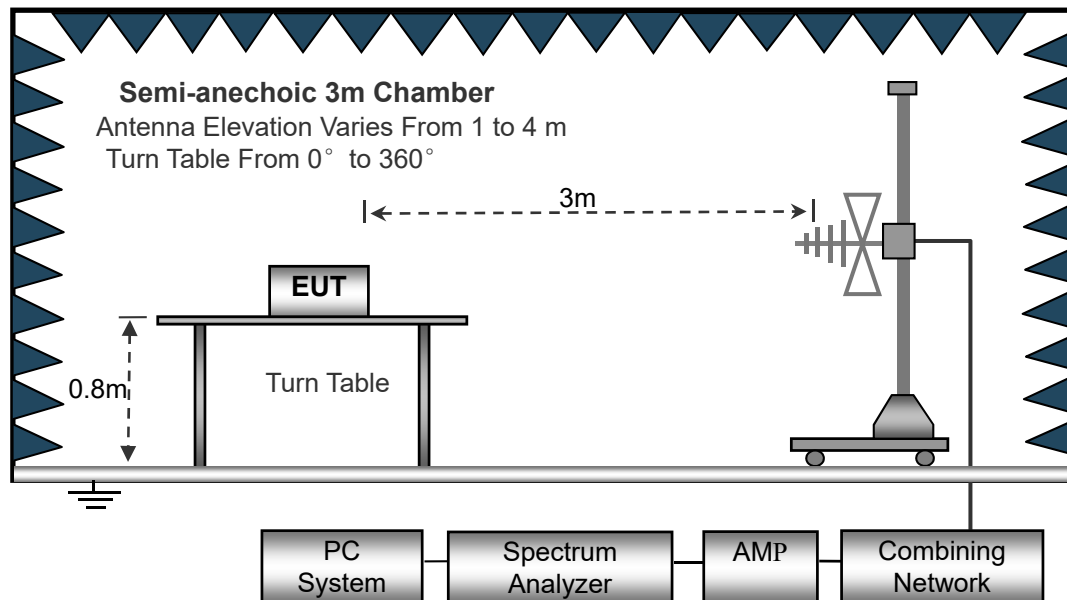

4.3 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10kHz,	RBW=120kHz,	RBW=1MHz,
VBW =30kHz	VBW=300kHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Correct}$$

$$\text{Correct} = \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions


Temperature:	24.6°C
Relative Humidity:	51 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results

Please find the results below:


Below 1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

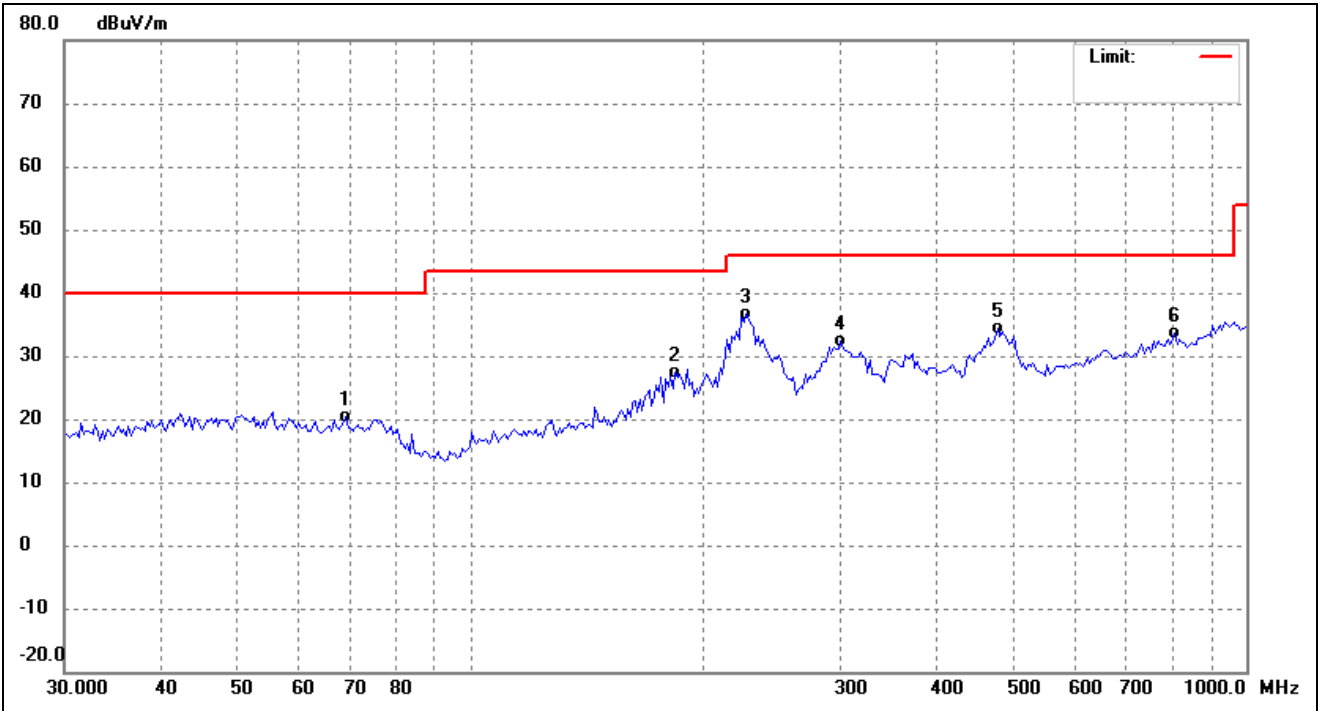


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	69.2297	30.57	-10.28	20.29	40.00	-19.71	-	-	QP
2	183.8660	37.62	-10.26	27.36	43.50	-16.14	-	-	QP
3	227.0164	48.16	-11.42	36.74	46.00	-9.26	-	-	QP
4	300.6988	40.53	-8.26	32.27	46.00	-13.73	-	-	QP
5	478.1394	38.67	-4.17	34.50	46.00	-11.50	-	-	QP
6	809.9238	32.00	1.72	33.72	46.00	-12.28	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

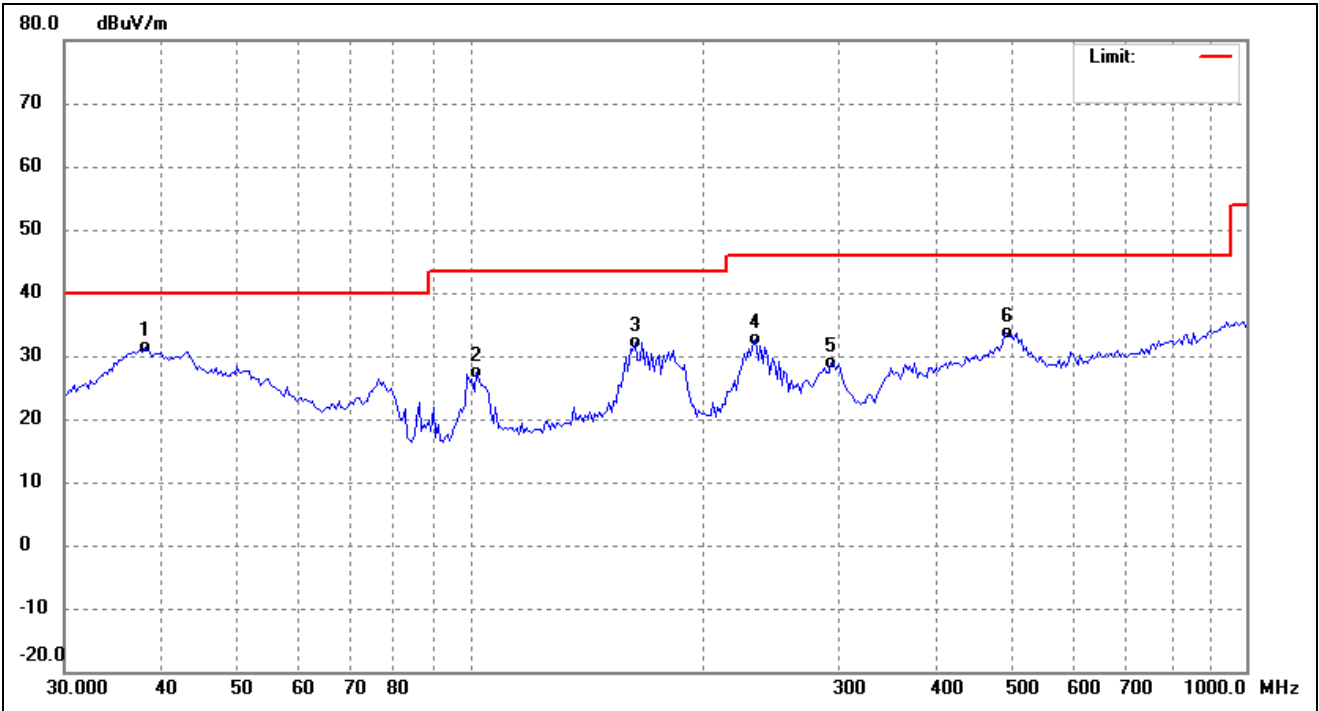


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.0964	40.34	-9.07	31.27	40.00	-8.73	-	-	QP
2	101.8931	39.77	-12.50	27.27	43.50	-16.23	-	-	QP
3	163.1622	40.53	-8.33	32.20	43.50	-11.30	-	-	QP
4	233.4880	43.39	-10.77	32.62	46.00	-13.38	-	-	QP
5	292.3642	37.34	-8.42	28.92	46.00	-17.08	-	-	QP
6	491.7699	37.51	-3.77	33.74	46.00	-12.26	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

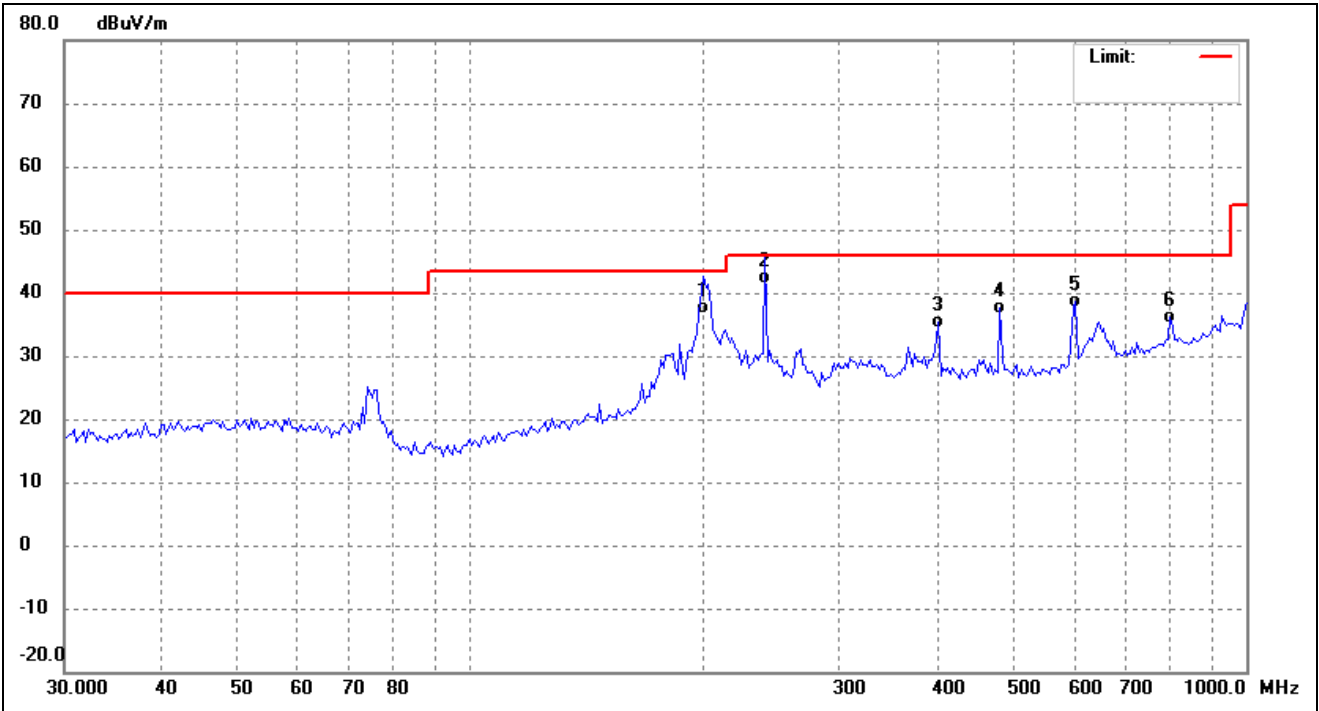


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	200.0432	49.19	-11.59	37.60	43.50	-5.90	-	-	QP
2	240.1442	52.62	-10.32	42.30	46.00	-3.70	-	-	QP
3	401.1050	41.56	-6.23	35.33	46.00	-10.67	-	-	QP
4	481.5112	41.62	-4.08	37.54	46.00	-8.46	-	-	QP
5	602.9287	39.49	-0.83	38.66	46.00	-7.34	-	-	QP
6	798.6205	34.48	1.71	36.19	46.00	-9.81	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

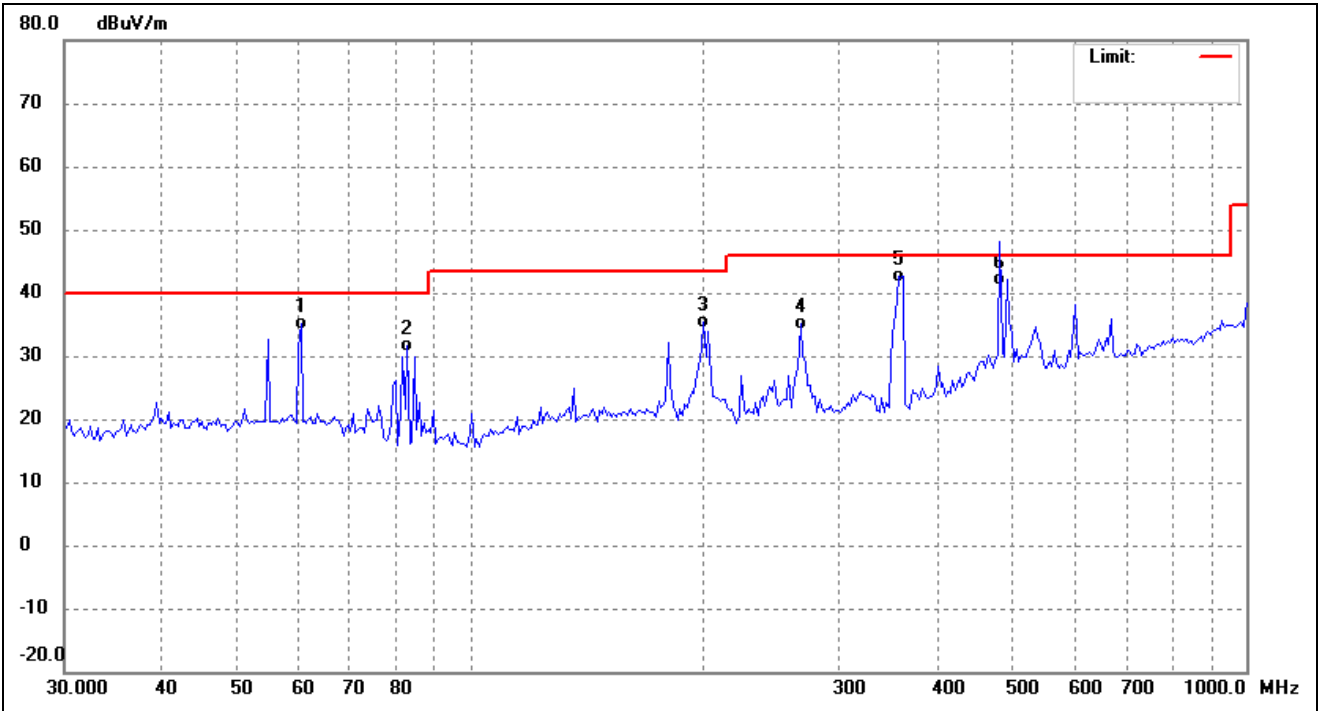


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.5769	44.08	-8.92	35.16	40.00	-4.84	-	-	QP
2	83.1076	44.47	-12.92	31.55	40.00	-8.45	-	-	QP
3	200.0432	46.95	-11.59	35.36	43.50	-8.14	-	-	QP
4	266.8395	44.52	-9.39	35.13	46.00	-10.87	-	-	QP
5	355.9397	49.95	-7.25	42.70	46.00	-3.30	-	-	QP
6	481.5112	46.16	-4.08	42.08	46.00	-3.92	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

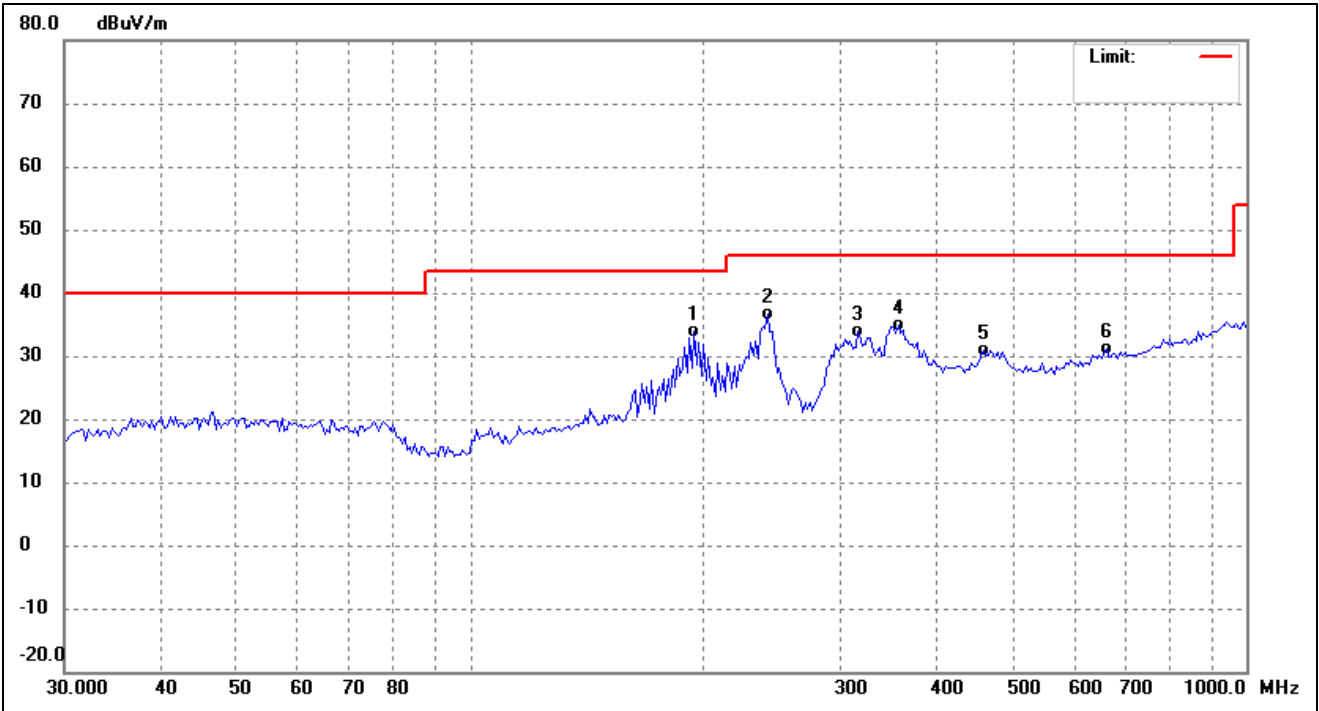


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	194.4985	45.35	-11.54	33.81	43.50	-9.69	-	-	QP
2	241.8377	46.77	-10.26	36.51	46.00	-9.49	-	-	QP
3	315.8599	41.80	-7.86	33.94	46.00	-12.06	-	-	QP
4	355.9396	42.14	-7.25	34.89	46.00	-11.11	-	-	QP
5	458.3987	35.48	-4.51	30.97	46.00	-15.03	-	-	QP
6	660.6024	31.25	-0.05	31.20	46.00	-14.80	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

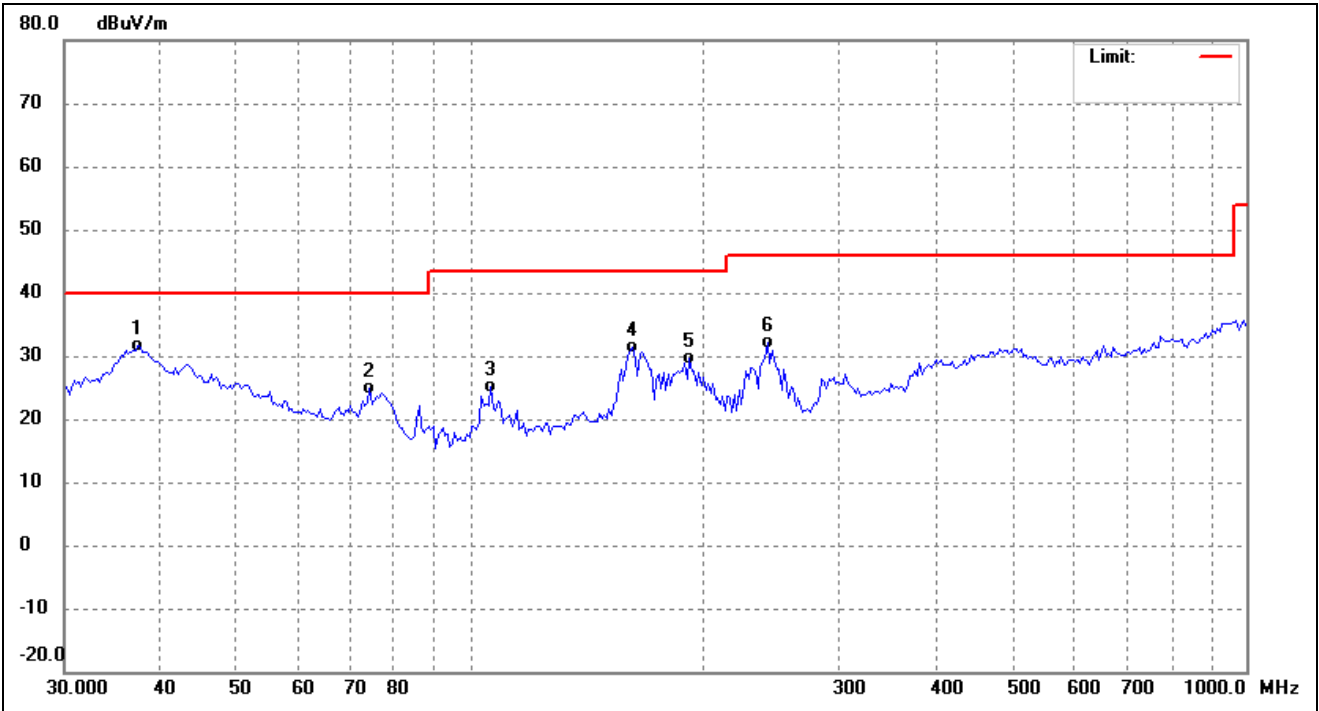


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.3017	40.86	-9.17	31.69	40.00	-8.31	-	-	QP
2	74.2696	36.05	-11.20	24.85	40.00	-15.15	-	-	QP
3	106.2812	37.00	-11.83	25.17	43.50	-18.33	-	-	QP
4	162.0197	39.58	-8.28	31.30	43.50	-12.20	-	-	QP
5	191.7841	40.94	-11.31	29.63	43.50	-13.87	-	-	QP
6	241.8377	42.43	-10.26	32.17	46.00	-13.83	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

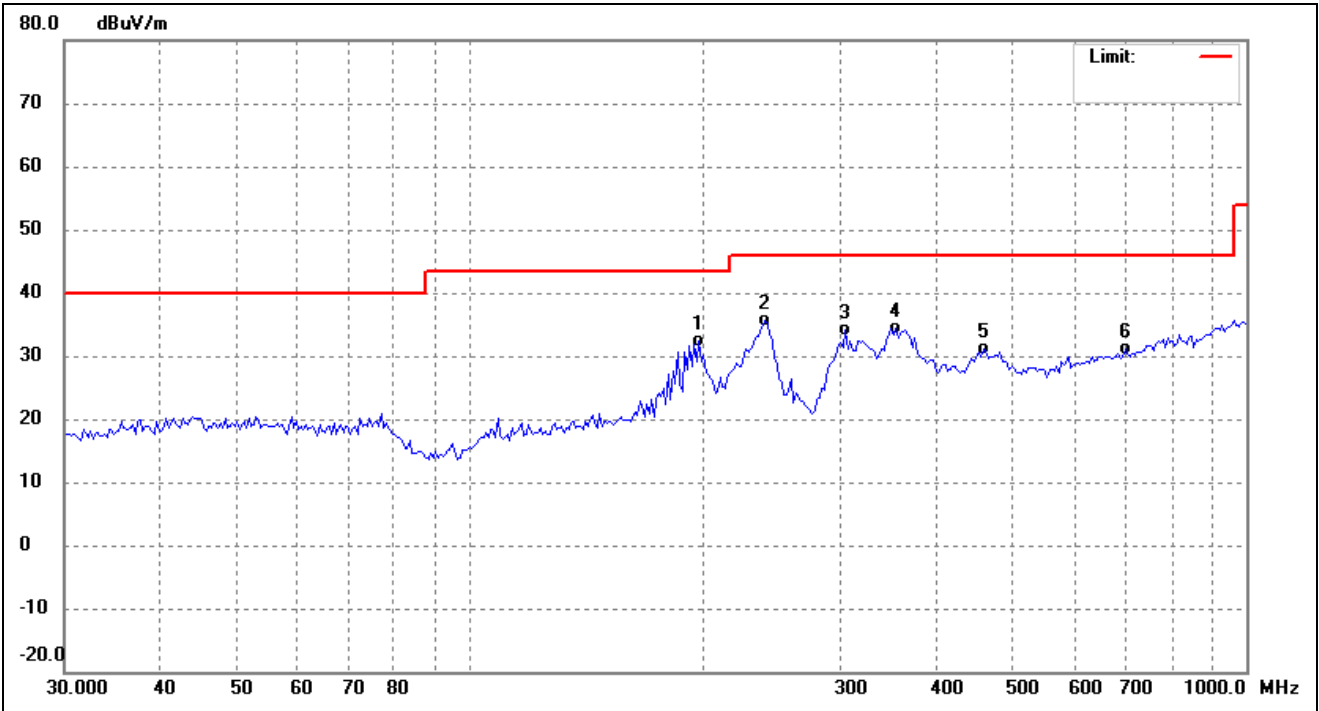


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	197.2514	43.96	-11.59	32.37	43.50	-11.13	-	-	QP
2	240.1442	45.83	-10.32	35.51	46.00	-10.49	-	-	QP
3	304.9548	42.26	-8.16	34.10	46.00	-11.90	-	-	QP
4	353.4471	41.79	-7.30	34.49	46.00	-11.51	-	-	QP
5	458.3987	35.74	-4.51	31.23	46.00	-14.77	-	-	QP
6	698.8035	30.81	0.22	31.03	46.00	-14.97	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

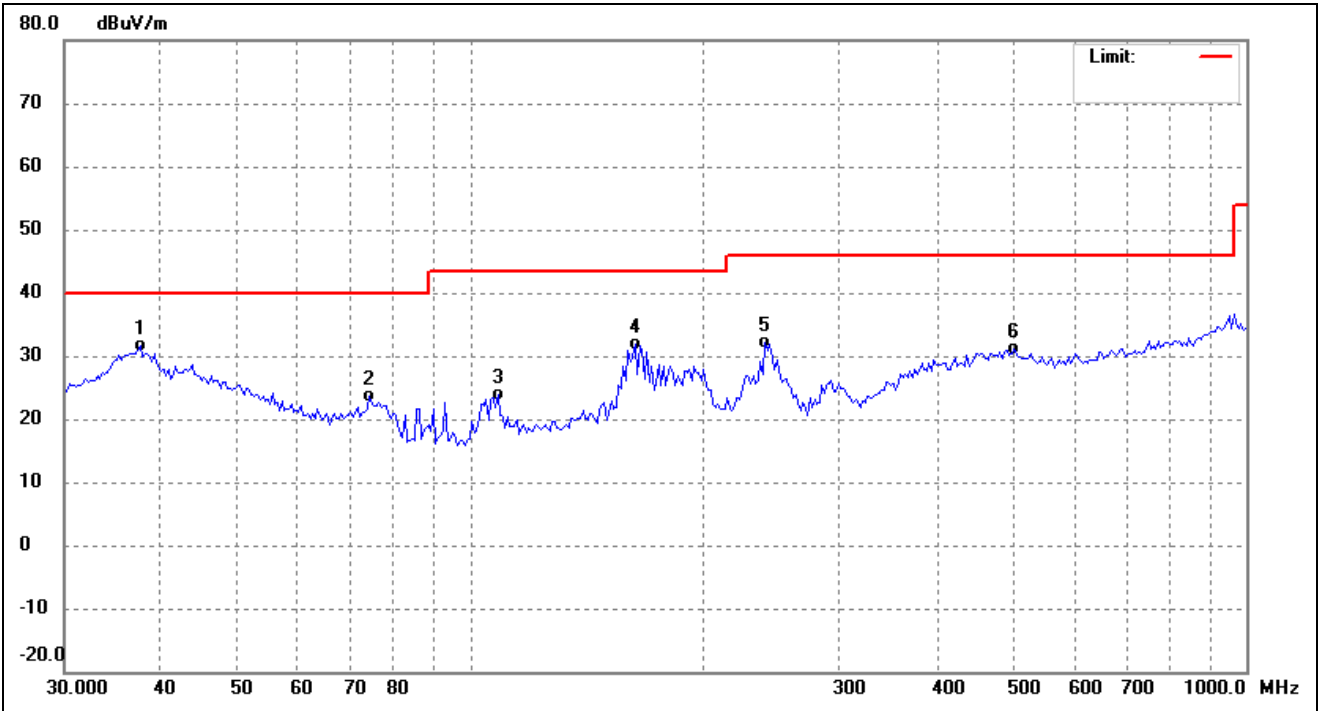


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.5648	40.85	-9.14	31.71	40.00	-8.29	-	-	QP
2	74.2696	34.82	-11.20	23.62	40.00	-16.38	-	-	QP
3	108.5455	35.45	-11.48	23.97	43.50	-19.53	-	-	QP
4	163.1623	40.29	-8.33	31.96	43.50	-11.54	-	-	QP
5	240.1442	42.53	-10.32	32.21	46.00	-13.79	-	-	QP
6	502.2472	34.53	-3.48	31.05	46.00	-14.95	-	-	QP

Test mode:	TM5	Polarity:	Horizontal
------------	-----	-----------	------------

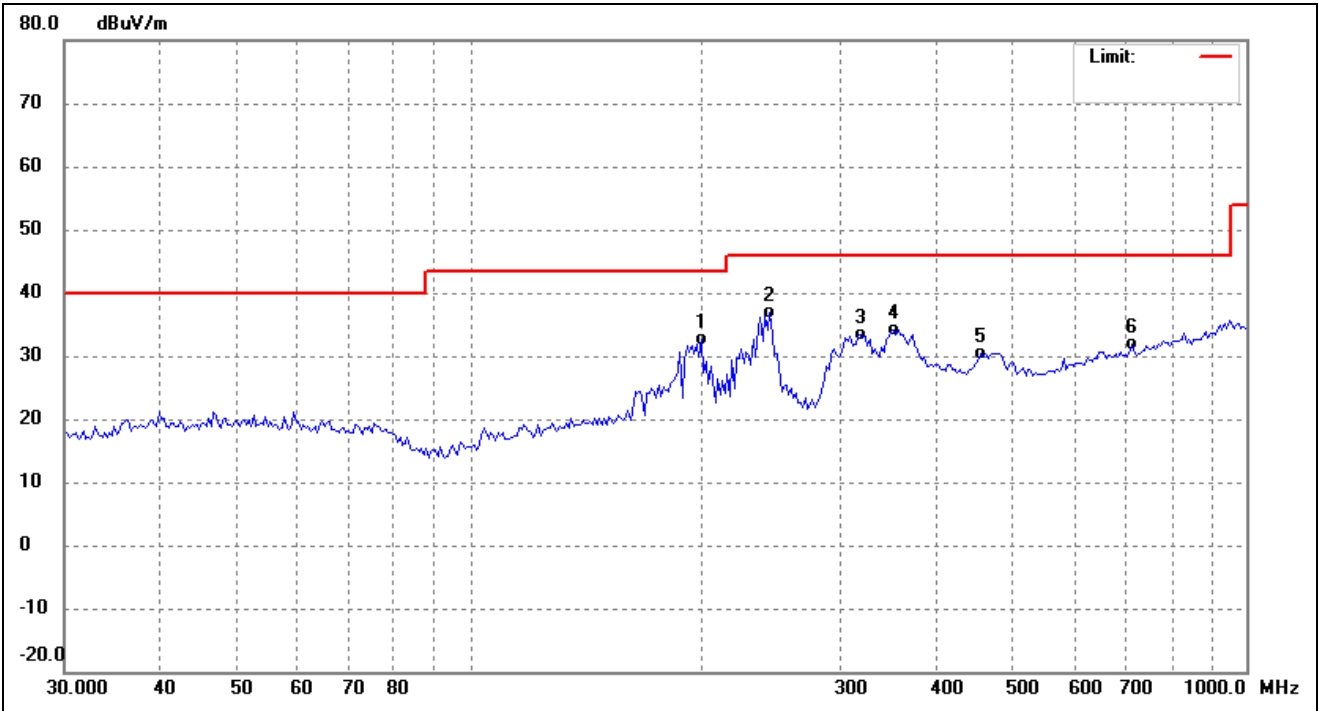

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	198.6424	44.26	-11.60	32.66	43.50	-10.84	-	-	QP
2	243.5431	46.97	-10.19	36.78	46.00	-9.22	-	-	QP
3	318.0875	41.10	-7.79	33.31	46.00	-12.69	-	-	QP
4	350.9722	41.40	-7.35	34.05	46.00	-11.95	-	-	QP
5	455.1888	35.03	-4.56	30.47	46.00	-15.53	-	-	QP
6	713.6917	31.50	0.48	31.98	46.00	-14.02	-	-	QP


Test mode:	TM5	Polarity:	Vertical
------------	-----	-----------	----------

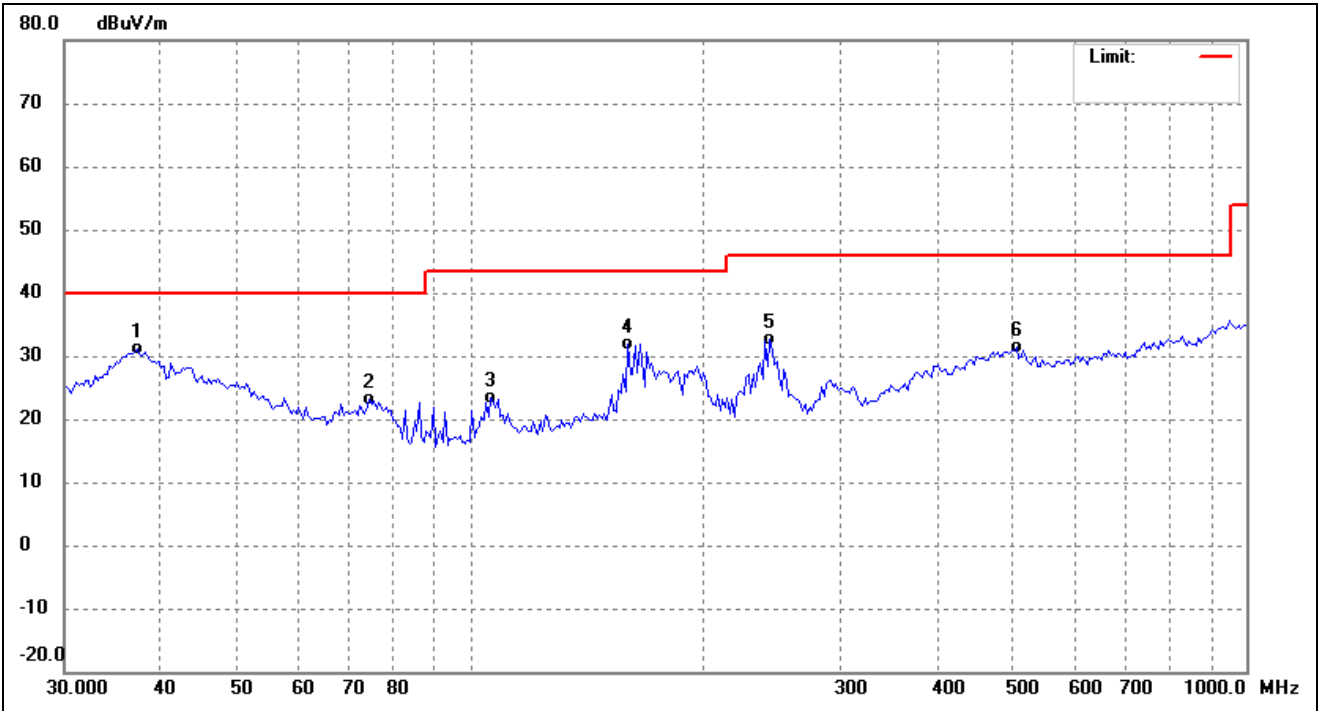

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.3017	40.19	-9.17	31.02	40.00	-8.98	-	-	QP
2	74.2696	34.43	-11.20	23.23	40.00	-16.77	-	-	QP
3	106.2812	35.27	-11.83	23.44	43.50	-20.06	-	-	QP
4	159.7586	40.08	-8.26	31.82	43.50	-11.68	-	-	QP
5	243.5431	42.93	-10.19	32.74	46.00	-13.26	-	-	QP
6	505.7891	34.81	-3.38	31.43	46.00	-14.57	-	-	QP


Above 1GHz

Test mode:	TM1 (worst case)	Polarity:	Horizontal
------------	------------------	-----------	------------

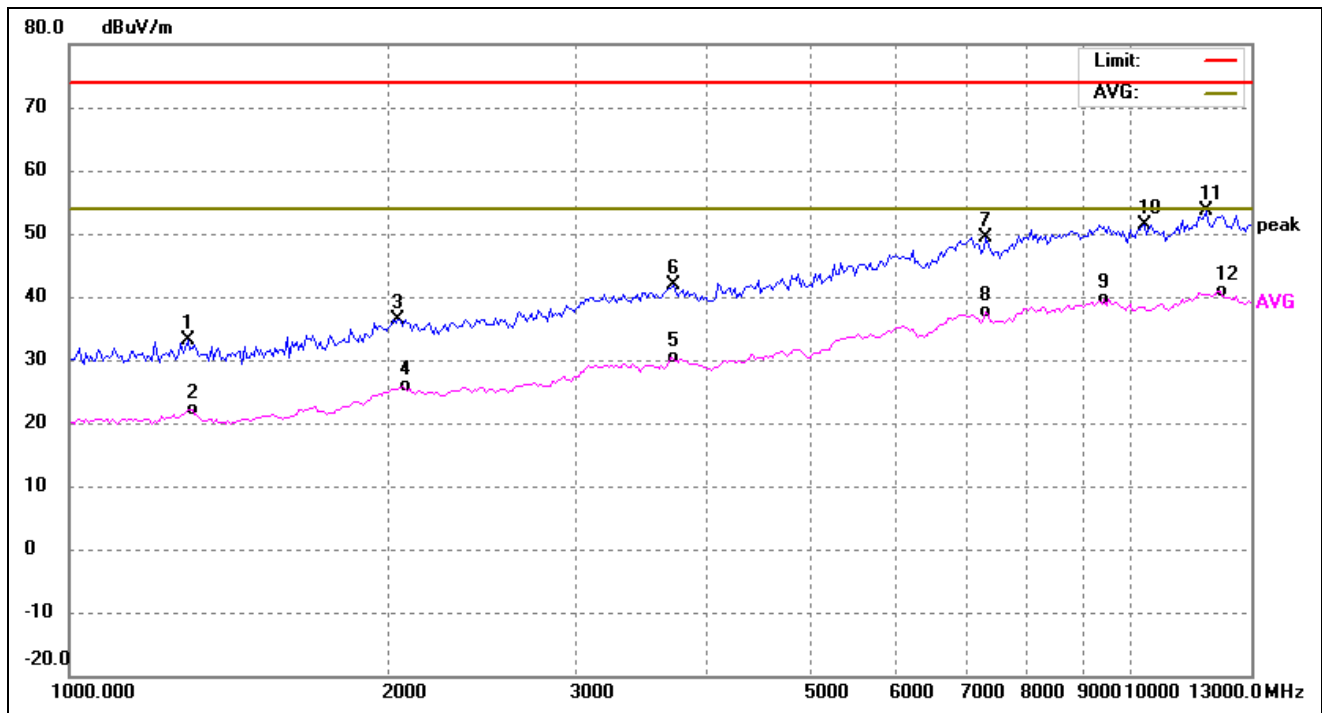

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1293.057	55.87	-22.68	33.19	74.00	-40.81	-	-	peak
2	1299.720	44.68	-22.54	22.14	54.00	-31.86	-	-	AVG
3	2043.134	55.01	-18.58	36.43	74.00	-37.57	-	-	peak
4	2064.246	44.45	-18.68	25.77	54.00	-28.23	-	-	AVG
5	3689.923	44.06	-13.65	30.41	54.00	-23.59	-	-	AVG
6	3708.938	55.47	-13.53	41.94	74.00	-32.06	-	-	peak
7	7310.044	54.49	-5.04	49.45	74.00	-24.55	-	-	peak
8	7310.044	42.66	-5.04	37.62	54.00	-16.38	-	-	AVG
9	9452.301	42.68	-3.17	39.51	54.00	-14.49	-	-	AVG
10	10315.435	54.75	-3.37	51.38	74.00	-22.62	-	-	peak
11	11790.404	54.38	-0.76	53.62	74.00	-20.38	-	-	peak
12	12159.698	41.59	-0.65	40.94	54.00	-13.06	-	-	AVG

Test mode:	TM1 (worst case)	Polarity:	Vertical
------------	------------------	-----------	----------

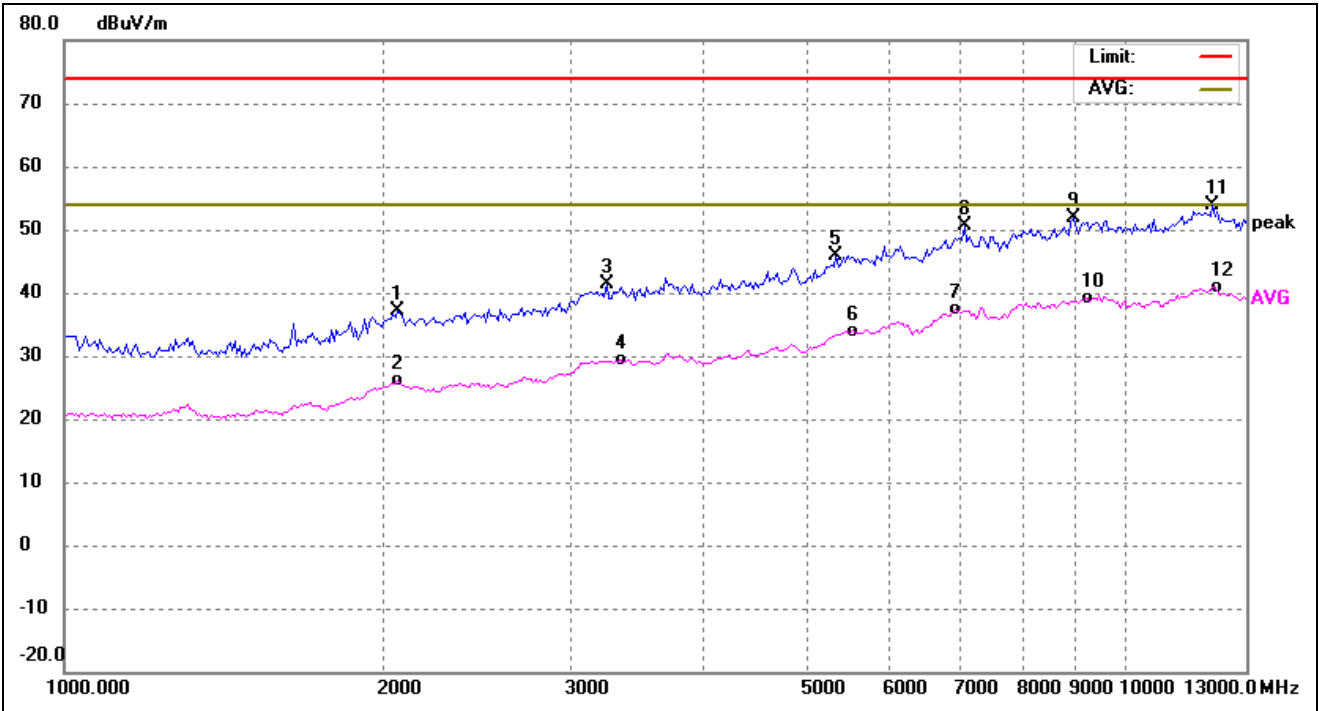

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	2064.246	55.69	-18.68	37.01	74.00	-36.99	-	-	peak
2	2064.246	44.78	-18.68	26.10	54.00	-27.90	-	-	AVG
3	3244.953	56.26	-14.83	41.43	74.00	-32.57	-	-	peak
4	3346.591	44.13	-14.79	29.34	54.00	-24.66	-	-	AVG
5	5342.525	55.71	-9.79	45.92	74.00	-28.08	-	-	peak
6	5481.612	43.38	-9.53	33.85	54.00	-20.15	-	-	AVG
7	6908.188	42.63	-5.23	37.40	54.00	-16.60	-	-	AVG
8	7051.695	56.01	-5.46	50.55	74.00	-23.45	-	-	peak
9	8932.678	56.05	-4.25	51.80	74.00	-22.20	-	-	peak
10	9212.464	42.70	-3.55	39.15	54.00	-14.85	-	-	AVG
11	12097.355	54.54	-0.64	53.90	74.00	-20.10	-	-	peak
12	12159.698	41.49	-0.65	40.84	54.00	-13.16	-	-	AVG

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****