



RF TEST REPORT



Report No.: 17070565-FCC-R3

Supersede Report No.: N/A

Applicant	BLU Products , Inc	
Product Name	Mobile phone	
Model No.	ADVANCE 4.0M	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	July 07 to 11, 2017	
Issue Date	July 12, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070565-FCC-R3
Page	3 of 33

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT	9
6.2 RADIATED EMISSIONS & RESTRICTED BAND	10
ANNEX A. TEST INSTRUMENT	17
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	18
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	29
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	32
ANNEX E. DECLARATION OF SIMILARITY	33

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070565-FCC-R3	NONE	Original	July 12, 2017

2. Customer information

Applicant Name	BLU Products , Inc
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products , Inc
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile phone
---------------------	--------------

Main Model: ADVANCE 4.0M

Serial Model: N/A

Date EUT received: July 06, 2017

Test Date(s): July 07 to 11, 2017

Equipment Category : DSS

Antenna Gain:	GSM850:-0.3dBi
	PCS1900: 0.1dBi
	UMTS-FDD Band V: -0.6dBi
	UMTS-FDD Band II: -0.8dBi
	WIFI: 0.3dBi
	Bluetooth: -0.2dBi

Antenna Type: PIFA antenna

	GSM / GPRS: GMSK
	EGPRS: GMSK, 8PSK
Type of Modulation:	UMTS-FDD: QPSK
	802.11b/g/n: DSSS, OFDM
	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

RF Operating Frequency (ies): GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WIFI: 802.11b/g/n(20M): 2412-2462 MHz
Bluetooth: 2402-2480 MHz

Number of Channels: GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V : 102CH
UMTS-FDD Band II : 277CH
WIFI :802.11b/g/n(20M): 11CH
Bluetooth: 79CH

Port: USB Port, Earphone Port

Input Power: Adapter:
Model: US-WW-0502
Input: AC100-240V~50/60Hz,0.15A
Output: DC 5.0V,500mA
Battery :
Model: C615044130L
Spec: 3.7V,1300mAh, 4.81Wh

Trade Name : BLU

FCC ID: YHLBLUADVANCE4M

Note: The difference between the old case RSZ160906003-00D and new case 17070565: Antenna and Appearance shape , accessories are the same . The only difference is added one LCD bonding pad on PCB, the other construction is the same.

So, we have retested the Radiated Emissions data in this report.

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/WIFI, the gain is -0.2dBi for Bluetooth, the gain is 0.3dBi for WIFI.

A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -0.3dBi for GSM850, 0.1dBi for PCS1900, -0.6dBi for UMTS-FDD Band V, -0.8dBi for UMTS-FDD Band II.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.


6.2 Radiated Emissions & Restricted Band

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	July 07, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges																	
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>0.009~0.490</td><td>2400/F(KHz)</td></tr><tr><td>0.490~1.705</td><td>24000/F(KHz)</td></tr><tr><td>1.705~30.0</td><td>30</td></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength (µV/m)															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
		216 960		200															
Above 960	500																		

Test Setup	The diagram illustrates the test setup for radiated emissions. It shows an Equipment Under Test (EUT) placed on a stand that is 0.8 meters high. A Loop Antenna is positioned 3 meters away from the EUT. The entire setup is on a Ground Plane. An RF Test Receiver is connected to the antenna.
------------	--

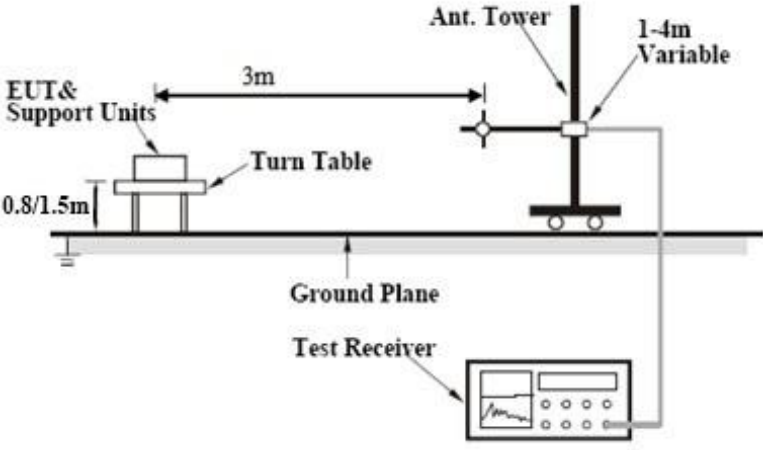	
Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Result:

Test Mode:	Transmitting Mode
------------	-------------------

Frequency range: 9KHz - 30MHz

Freq.	Detection	Factor	Reading	Result	Limit@3m	Margin
(MHz)	value	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Test Mode: Transmitting Mode

30MHz -1GHz

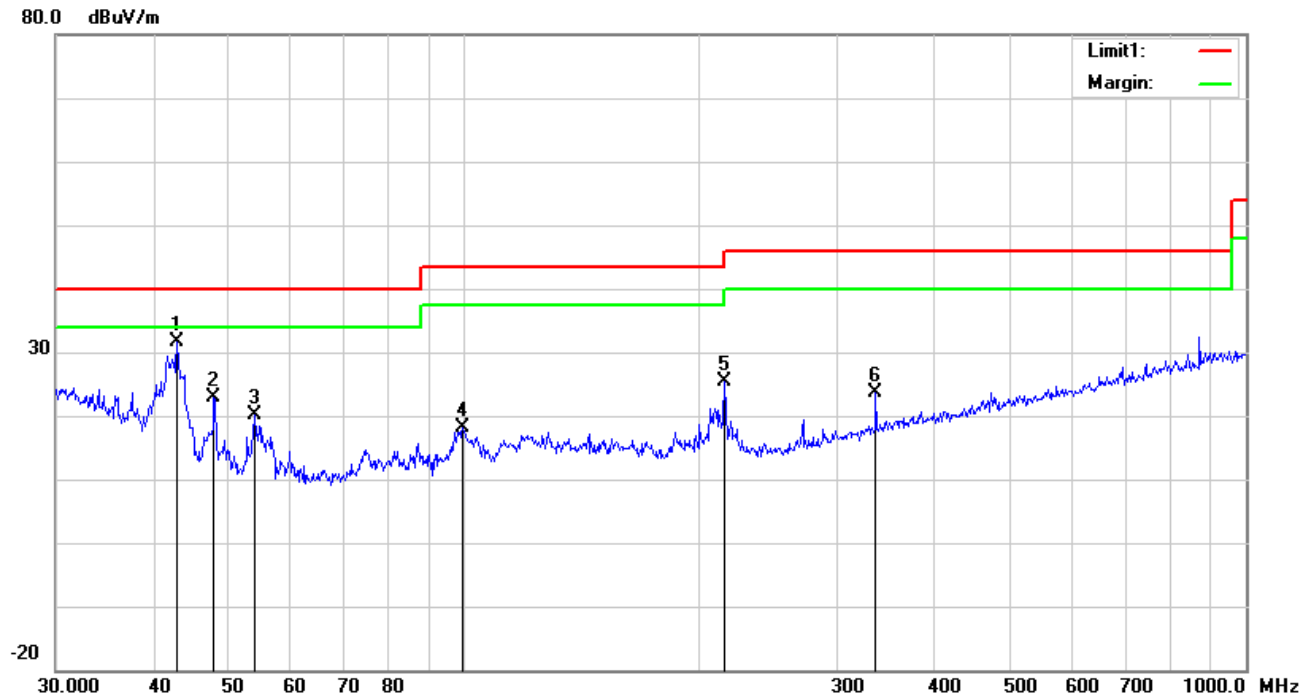


Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr ee
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	42.8998	41.19	peak	11.99	22.29	0.77	31.66	40.00	-8.34	100	359
2	H	47.8260	35.05	peak	9.36	22.34	0.78	22.85	40.00	-17.15	100	326
3	H	53.8818	33.65	peak	7.97	22.39	0.78	20.01	40.00	-19.99	100	68
4	H	99.5281	29.16	peak	10.29	22.32	1.11	18.24	43.50	-25.26	100	14
5	H	215.2678	34.33	peak	11.89	22.35	1.59	25.46	43.50	-18.04	100	49
6	H	336.0352	29.51	peak	14.36	22.19	1.97	23.65	46.00	-22.35	100	299

30MHz -1GHz

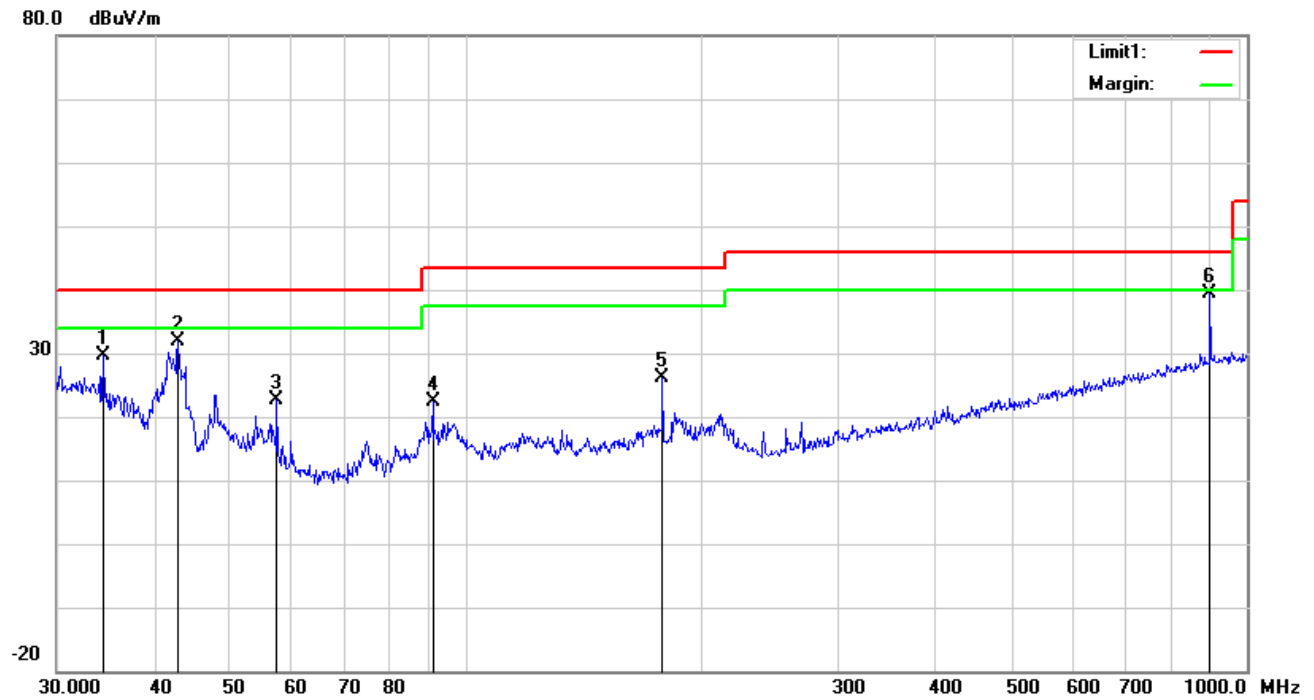

Test Data

Horizontal Polarity Plot @3m

N o.	P/ L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee (°)
1	V	34.3964	33.06	peak	18.01	22.25	0.74	29.56	40.00	-10.44	100	136
2	V	42.8998	41.34	peak	11.99	22.29	0.77	31.81	40.00	-8.19	100	100
3	V	57.3923	36.63	peak	7.59	22.40	0.77	22.59	40.00	-17.41	100	342
4	V	90.8554	35.57	peak	8.21	22.32	0.96	22.42	43.50	-21.08	200	142
5	V	178.7584	35.95	peak	11.10	22.25	1.36	26.16	43.50	-17.34	100	212
6	V	896.9965	34.82	peak	22.47	20.89	3.06	39.46	46.00	-6.54	100	95

Above 1GHz

Test Mode:	Transmitting Mode
------------	-------------------

Low Channel: 8DPSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	42.15	AV	V	33.39	7.22	48.46	34.3	54	-19.7
4804	40.36	AV	H	33.39	7.22	48.46	32.51	54	-21.49
4804	55.61	PK	V	33.39	7.22	48.46	47.76	74	-26.24
4804	54.39	PK	H	33.39	7.22	48.46	46.54	74	-27.46
5516	32.15	AV	V	34.17	8.99	48.36	26.95	54	-27.05
5516	31.28	AV	H	34.17	8.99	48.36	26.08	54	-27.92
5516	53.42	PK	V	34.17	8.99	48.36	48.22	74	-25.78
5516	51.28	PK	H	34.17	8.99	48.36	46.08	74	-27.92

Middle Channel: 8DPSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	43.25	AV	V	33.62	7.53	48.36	36.04	54	-17.96
4882	41.65	AV	H	33.62	7.53	48.36	34.44	54	-19.56
4882	56.28	PK	V	33.62	7.53	48.36	49.07	74	-24.93
4882	55.49	PK	H	33.62	7.53	48.36	48.28	74	-25.72
8974	36.51	AV	V	37.88	9.16	48.55	35	54	-19
8974	33.27	AV	H	37.88	9.16	48.55	31.76	54	-22.24
8974	58.43	PK	V	37.88	9.16	48.55	56.92	74	-17.08
8974	56.22	PK	H	37.88	9.16	48.55	54.71	74	-19.29

High Channel: 8DPSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	44.02	AV	V	33.89	7.86	48.31	37.46	54	-16.54
4960	42.16	AV	H	33.89	7.86	48.31	35.6	54	-18.4
4960	59.87	PK	V	33.89	7.86	48.31	53.31	74	-20.69
4960	57.43	PK	H	33.89	7.86	48.31	50.87	74	-23.13
17920	22.13	AV	V	43.21	19.44	44.4	40.38	54	-13.62
17920	20.15	AV	H	43.21	19.44	44.4	38.4	54	-15.6
17920	38.46	PK	V	43.21	19.44	44.4	56.71	74	-17.29
17920	36.29	PK	H	43.21	19.44	44.4	54.54	74	-19.46

Note:

1, The testing has been conformed to $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	☒
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Active Antenna (9kHz-30MHz)	AL-130	121031	10/13/2016	10/12/2017	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	☒
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View

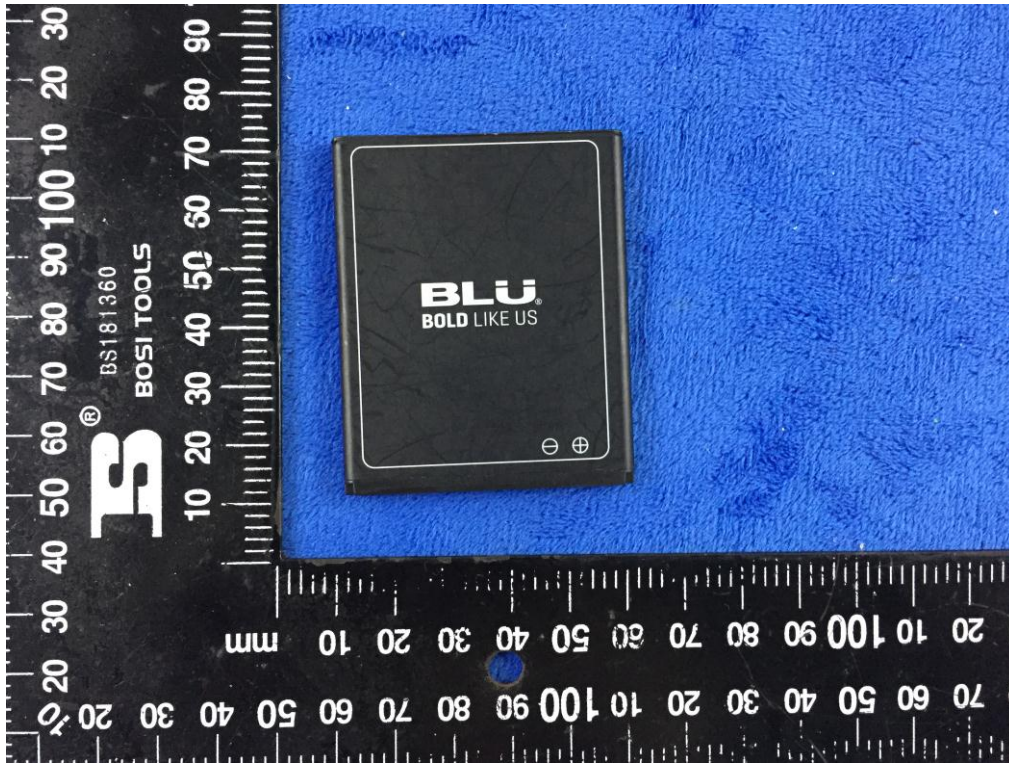


Battery - Rear View

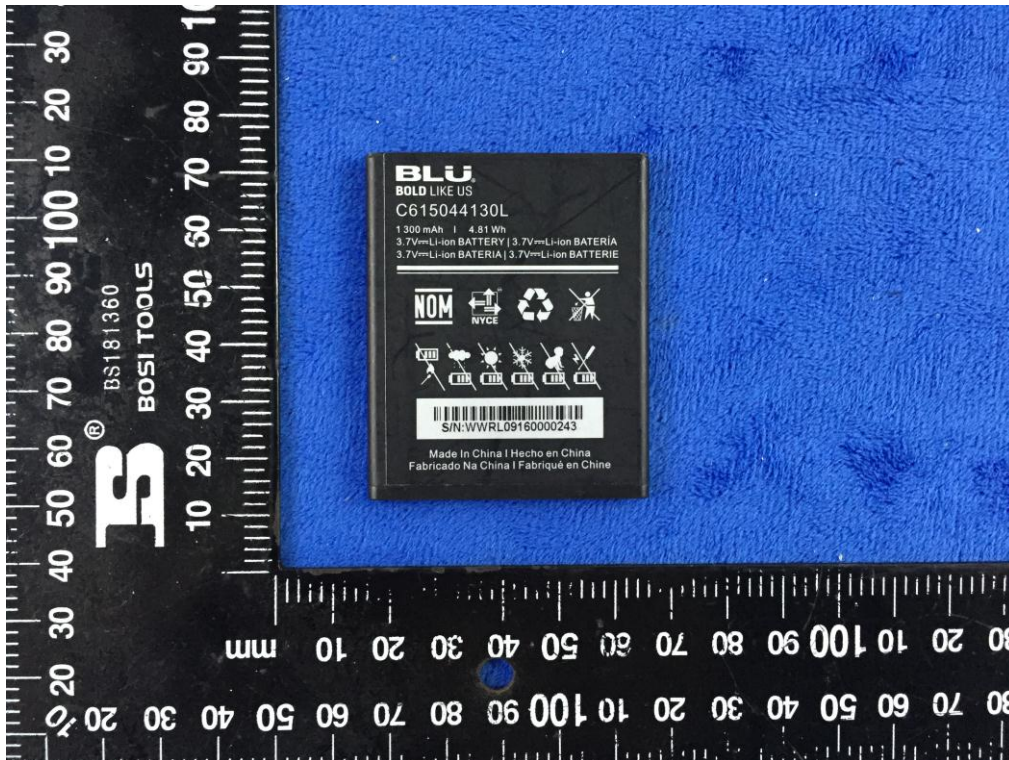


Mainboard with Shielding - Front View

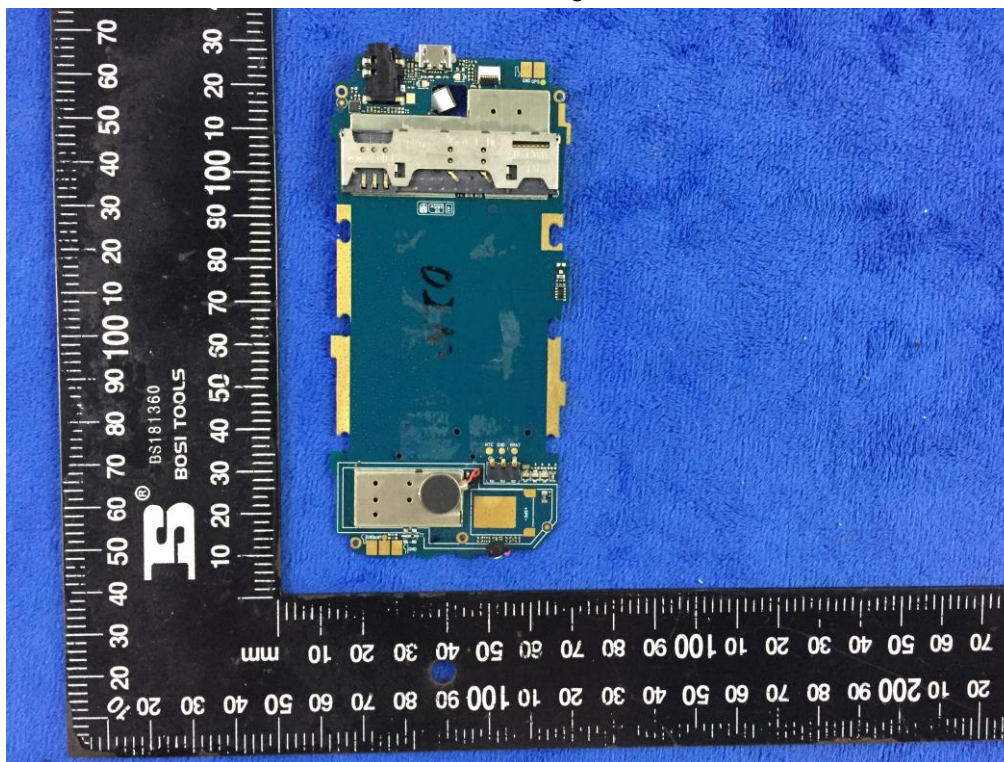


Mainboard without Shielding - Front View

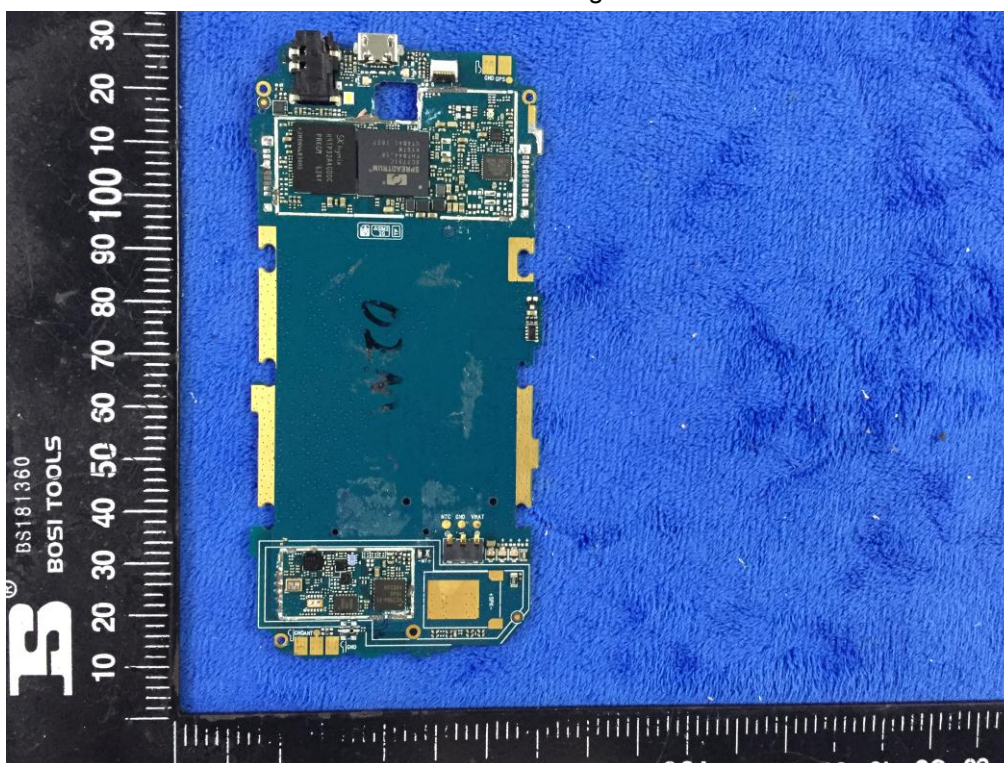


Mainboard – Rear View

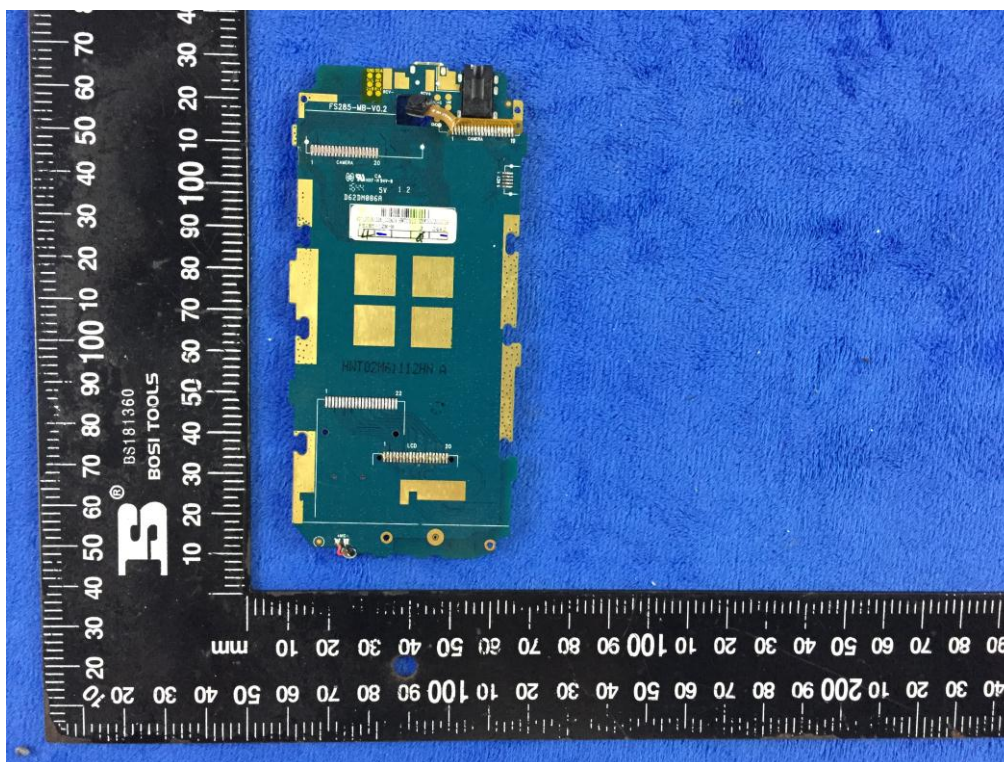


LCD bonding pads View

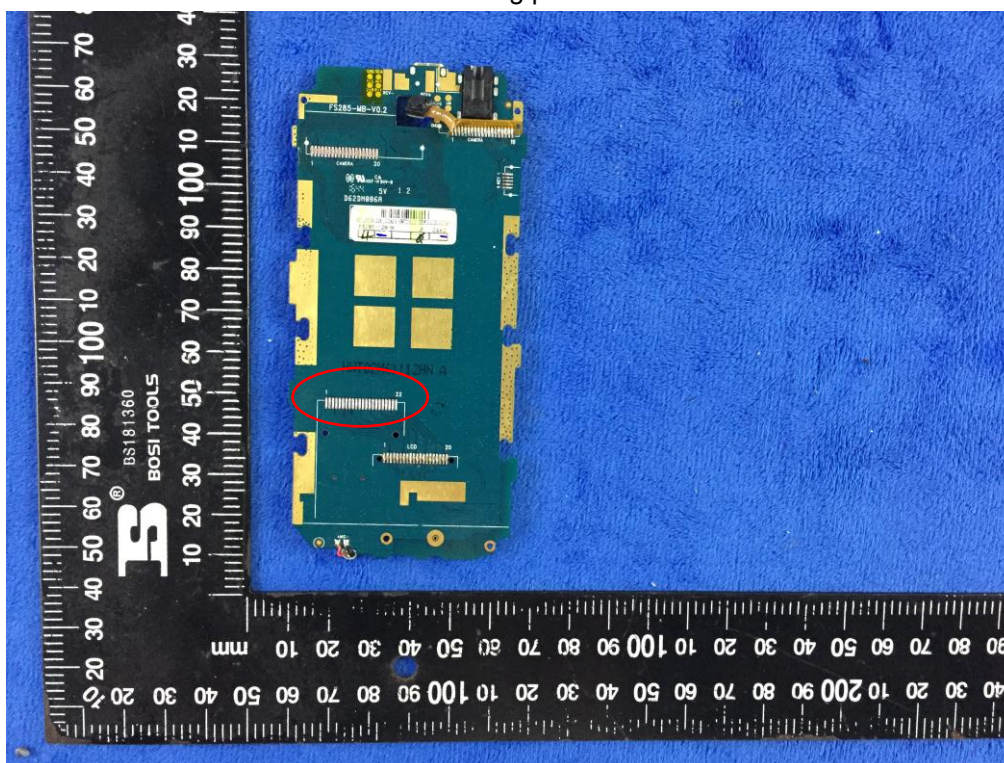


LCD – Front View

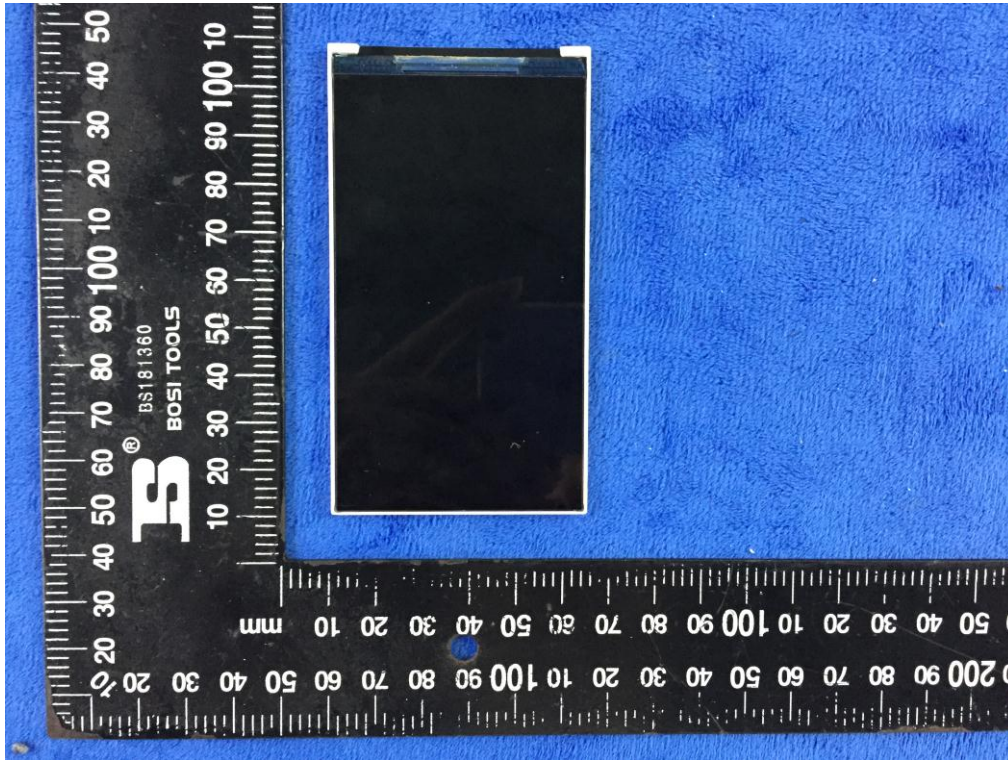


LCD – Rear View

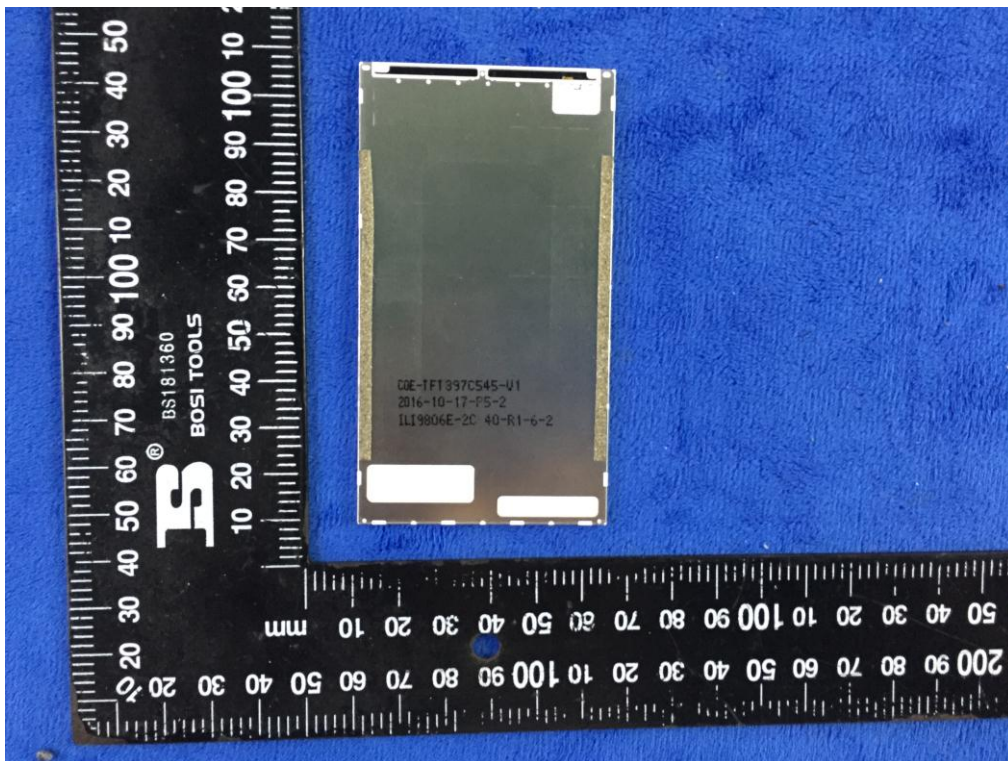


GSM/PCS/UMTS-FDD Antenna View

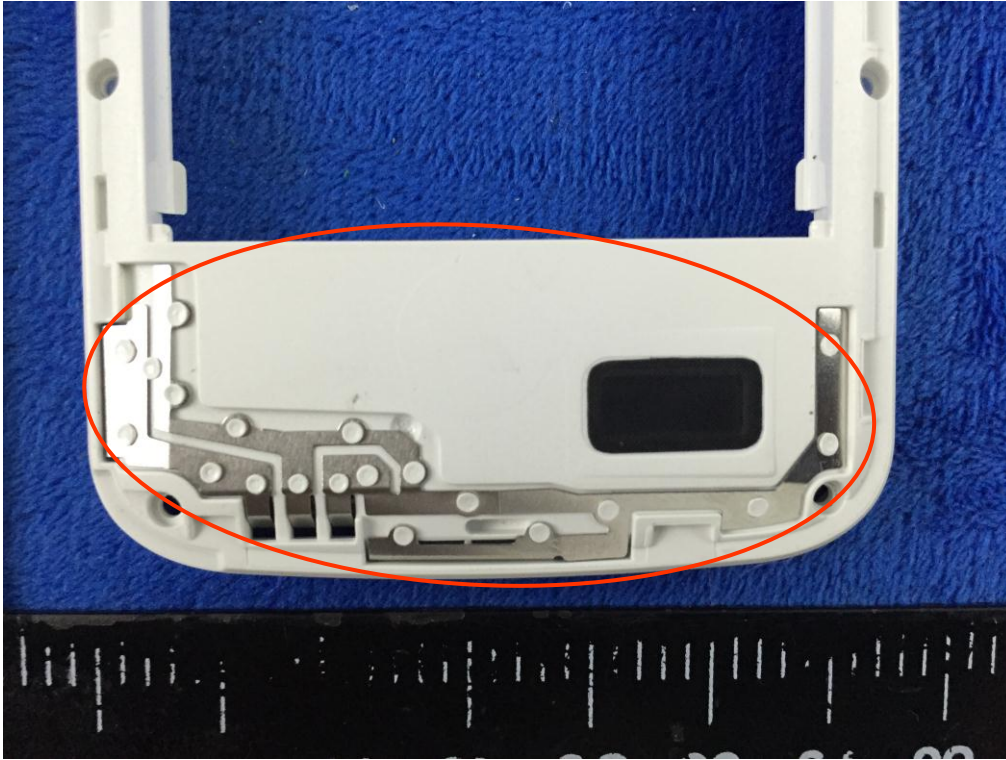


WIFI/BT - Antenna View

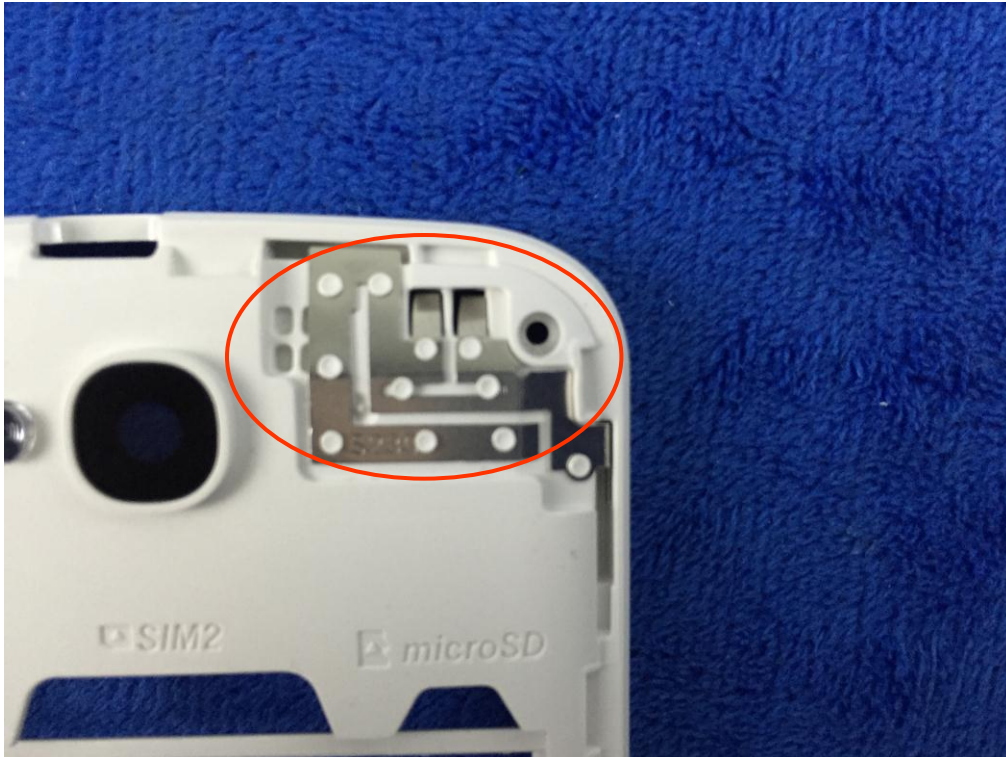

Annex B.iii. Photograph: Test Setup Photo

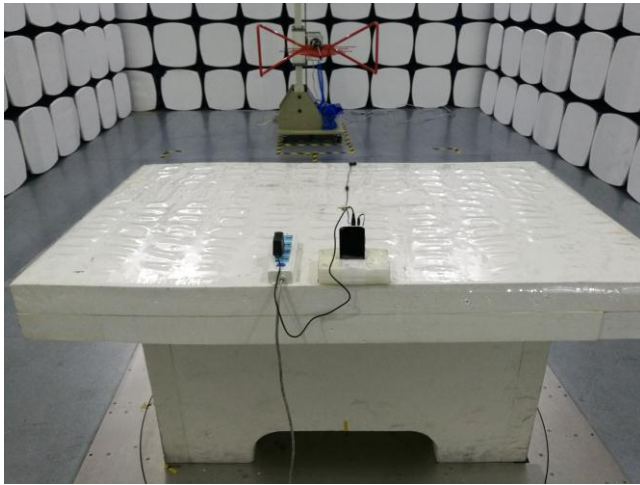

Radiated Spurious Emissions Test Setup Below 1GHz

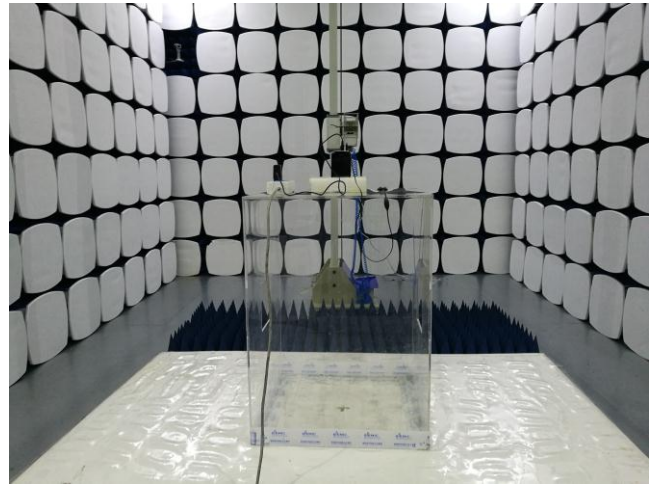


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

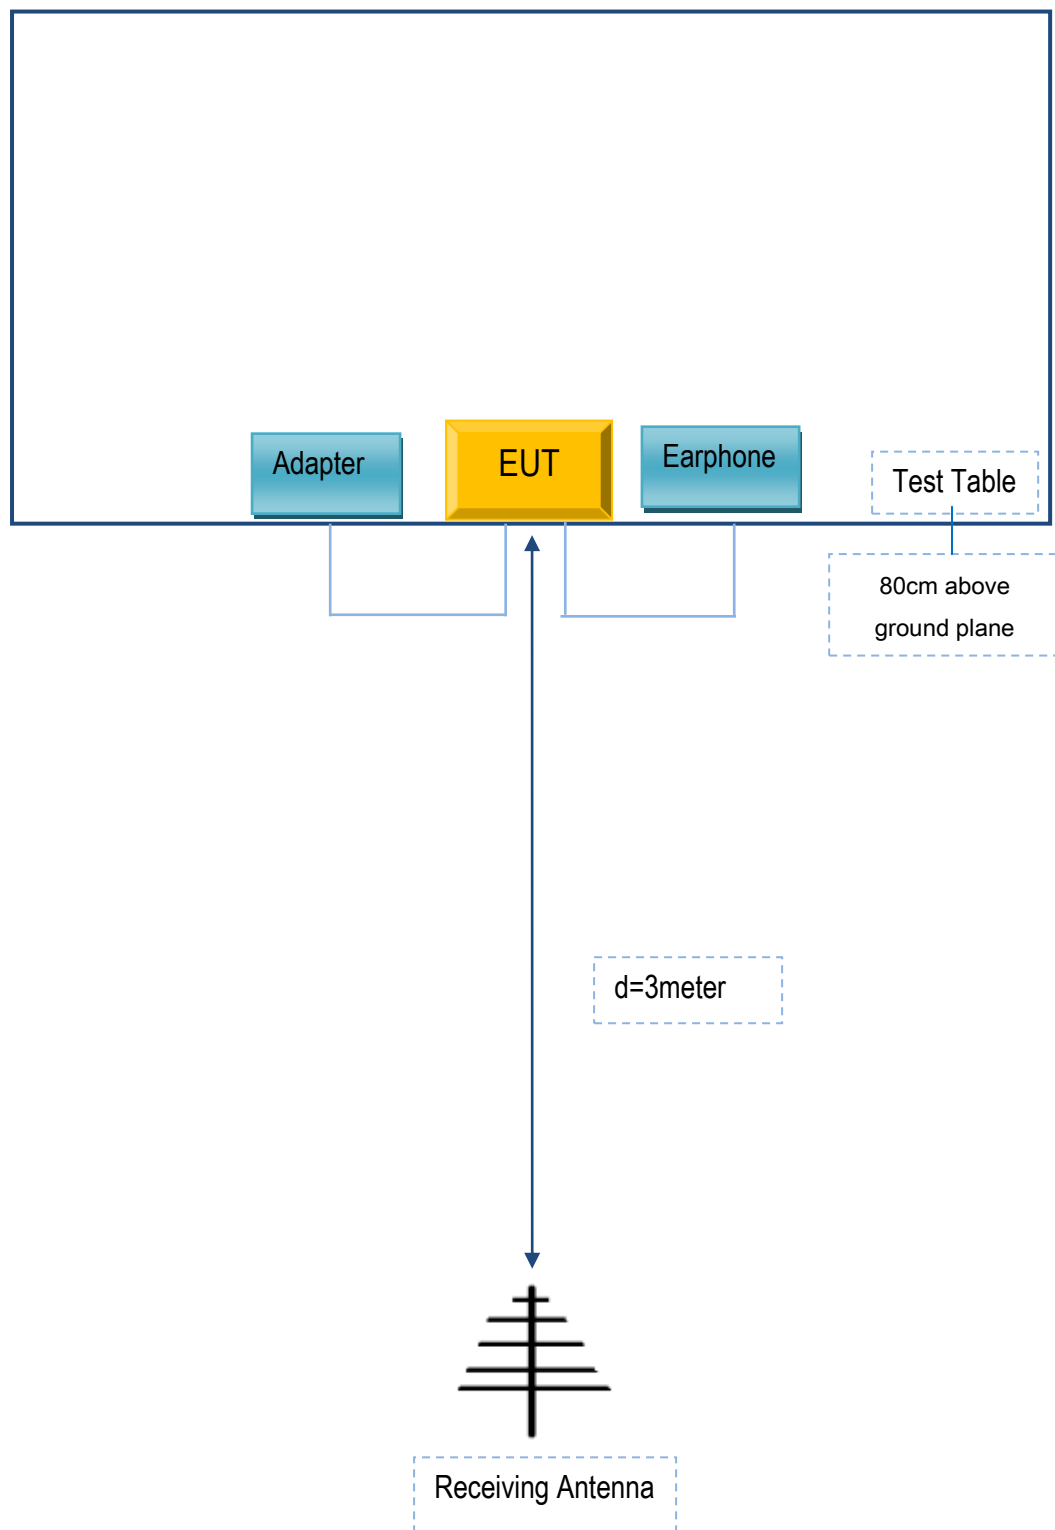

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

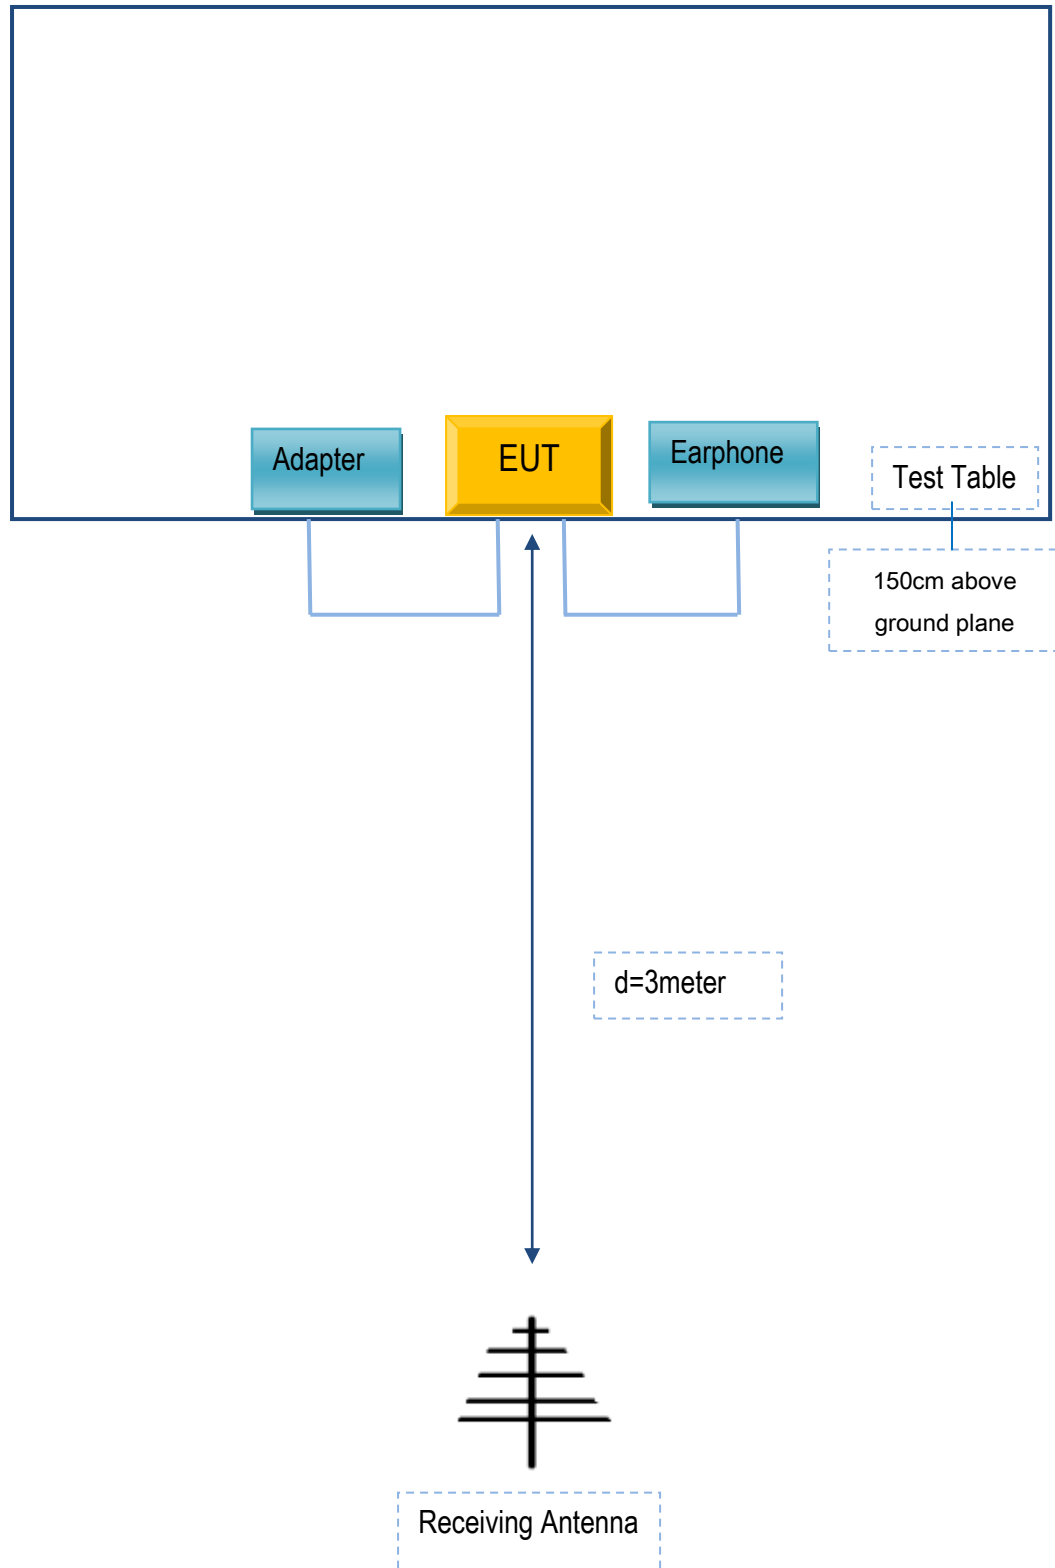

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products , Inc	Earphone	ADVANCE 4.0M	N/A
BLU Products , Inc	Adapter	US-WW-0502	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A
Earphone Cables	Un-shielding	No	0.5m	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

Declaration Letter

(Original approval holder)

Company name	BLU Products, Inc
Address	10814 NW 33rd St # 100 Doral, FL 33172

Declare that the following company:

(New approval holder)

Company name	BLU Products, Inc
Address	10814 NW 33rd St # 100 Doral, FL 33172

is here to declare that PCBA ,Antenna and Appearance shape , accessories are the same . The only difference is listed as below

(Difference from original approval holder's)

	Model	Difference
Original	ADVANCE 4.0M	Only add one LCD bonding pad on PCB
New	ADVANCE 4.0M	

and apply for own approval or certificate.

Attestation:

Date:	Name: (this must be a person)	Function:	Signature: (or official company stamp)
2017-7-13	Zeng wei		Zeng Wei