




FCC PART 27  
FCC PART 22H, PART 24E  
MEASUREMENT AND TEST REPORT

For

**BLU Products, Inc.**

10814 NW 33rd St # 100 Doral, FL 33172, United States

**FCC ID: YHLBLUDASHXL**

|                                                                                                                                                                                                                                                                       |                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                | <b>Product Type:</b><br>Mobile phone |
| <b>Report Number:</b> RSZ160912001-00D                                                                                                                                                                                                                                |                                      |
| <b>Report Date:</b> 2016-10-18                                                                                                                                                                                                                                        |                                      |
| Jesse Huang                                                                                                                                                                       |                                      |
| <b>Reviewed By:</b> Manager                                                                                                                                                                                                                                           |                                      |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan)<br>Chenghu Road, Kunshan Development Zone<br>No.248, Kunshan, Jiangsu, China<br>Tel: +86-0512-86175000<br>Fax: +86-0512-88934268<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                      |

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

|                                                                                                           |           |
|-----------------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                           | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                                  | 3         |
| OBJECTIVE .....                                                                                           | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                                        | 3         |
| TEST METHODOLOGY .....                                                                                    | 3         |
| MEASUREMENT UNCERTAINTY.....                                                                              | 4         |
| TEST FACILITY .....                                                                                       | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                                     | <b>5</b>  |
| JUSTIFICATION .....                                                                                       | 5         |
| EQUIPMENT MODIFICATIONS .....                                                                             | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                                  | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                         | 5         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                                      | <b>6</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                                                          | <b>7</b>  |
| <b>FCC §1.1307(B) &amp; §2.1093 - RF EXPOSURE INFORMATION.....</b>                                        | <b>8</b>  |
| APPLICABLE STANDARD .....                                                                                 | 8         |
| TEST RESULT .....                                                                                         | 8         |
| <b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>                                                      | <b>9</b>  |
| <b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) &amp; § 27.50 - RF OUTPUT POWER.....</b>                 | <b>10</b> |
| APPLICABLE STANDARDS.....                                                                                 | 10        |
| TEST PROCEDURE .....                                                                                      | 10        |
| TEST DATA .....                                                                                           | 10        |
| <b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 &amp; §27.53 - OCCUPIED BANDWIDTH .....</b>                | <b>18</b> |
| APPLICABLE STANDARDS.....                                                                                 | 18        |
| TEST PROCEDURE .....                                                                                      | 18        |
| TEST DATA .....                                                                                           | 18        |
| <b>§ 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b> | <b>27</b> |
| APPLICABLE STANDARDS.....                                                                                 | 27        |
| TEST PROCEDURE .....                                                                                      | 27        |
| TEST DATA .....                                                                                           | 27        |
| <b>FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) SPURIOUS RADIATED EMISSIONS.....</b>          | <b>35</b> |
| APPLICABLE STANDARDS.....                                                                                 | 35        |
| TEST PROCEDURE .....                                                                                      | 35        |
| TEST DATA .....                                                                                           | 35        |
| <b>FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES .....</b>                                    | <b>38</b> |
| APPLICABLE STANDARDS.....                                                                                 | 38        |
| TEST PROCEDURE .....                                                                                      | 38        |
| TEST DATA .....                                                                                           | 38        |
| <b>FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY .....</b>                              | <b>52</b> |
| APPLICABLE STANDARDS.....                                                                                 | 52        |
| TEST PROCEDURE .....                                                                                      | 52        |
| TEST DATA .....                                                                                           | 53        |

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *BLU Products, Inc.*'s product, model number: *DASH XL (FCC ID: YHLBLUDASHXL)* or the "EUT" in this report was a *Mobile phone*, which was measured approximately: 155 mm (L) × 83 mm (W) × 7 mm (H), rated with input voltage: DC 3.8 V battery or DC 5V from adapter.

Adapter Information:

Model: US-WW-1001

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5V, 1000 mA

*\*All measurement and test data in this report was gathered from production sample serial number: 1603258 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-09-12.*

### Objective

This type approval report is prepared on behalf of *BLU Products, Inc.* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: YHLBLUDASHXL.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Item                               |            | Uncertainty   |
|------------------------------------|------------|---------------|
| AC Power Lines Conducted Emissions |            | $\pm 3.26$ dB |
| RF conducted test with spectrum    |            | $\pm 0.9$ dB  |
| RF Output Power with Power meter   |            | $\pm 0.5$ dB  |
| Radiated emission                  | 30MHz~1GHz | $\pm 5.91$ dB |
|                                    | Above 1G   | $\pm 4.92$ dB |
| Occupied Bandwidth                 |            | $\pm 0.5$ kHz |
| Temperature                        |            | $\pm 1.0$ °C  |
| Humidity                           |            | $\pm 6\%$     |

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


### Equipment Modifications

No modifications were made to the EUT.

### Support Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number |
|-----------------|--------------------------------------|--------|---------------|
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 110605        |

### Block Diagram of Test Setup

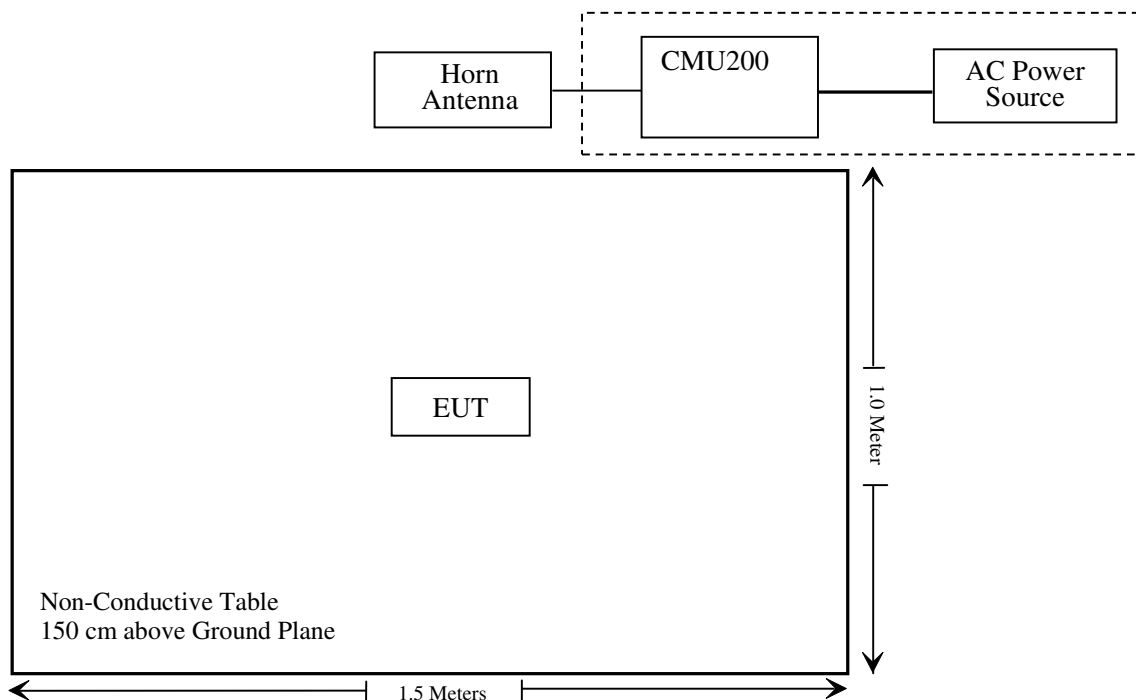

**SUMMARY OF TEST RESULTS**

| FCC Rules                                               | Description of Test                    | Result         |
|---------------------------------------------------------|----------------------------------------|----------------|
| §1.1307 (b)(1), §2.1093                                 | RF Exposure Information                | Compliance*    |
| §2.1046; § 22.913 (a);<br>§ 24.232 (c); §27.50 (d) (i)  | RF Output Power                        | Compliance     |
| § 2.1047                                                | Modulation Characteristics             | Not Applicable |
| § 2.1049; § 22.905;<br>§ 22.917; § 24.238; §27.53 (c)   | Occupied Bandwidth                     | Compliance     |
| § 2.1051; § 22.917 (a);<br>§ 24.238 (a); §27.53(c) (g)  | Spurious Emissions at Antenna Terminal | Compliance     |
| § 2.1053; § 22.917 (a);<br>§ 24.238 (a); §27.53 (c) (g) | Spurious Radiated Emissions            | Compliance     |
| § 22.917 (a);<br>§ 24.238 (a); §27.53 (c) (g);          | Band Edge                              | Compliance     |
| § 2.1055; § 22.355;<br>§ 24.235; §27.54;                | Frequency stability                    | Compliance     |

Compliance\*: Please refer to SAR report released by BACL, report number: RSZ160912001-20.

**TEST EQUIPMENT LIST**

| Manufacturer                  | Description                          | Model           | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|--------------------------------------|-----------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test</b> |                                      |                 |               |                  |                      |
| Sonoma Instrument             | Amplifier                            | 330             | 171377        | 2016-09-16       | 2017-09-16           |
| Rohde & Schwarz               | EMI Test Receiver                    | ESCI            | 100195        | 2015-11-12       | 2016-11-11           |
| Sunol Sciences                | Broadband Antenna                    | JB3             | A090314-2     | 2015-11-07       | 2016-11-06           |
| Sunol Sciences                | Broadband Antenna                    | JB3             | A090314-1     | 2015-11-07       | 2016-11-06           |
| Mini                          | Pre-amplifier                        | ZVA-183-S+      | 857001418     | 2016-09-16       | 2017-09-15           |
| DUCOMMUN                      | Pre-amplifier                        | ALN-22093530-01 | 990147        | 2016-09-16       | 2017-09-15           |
| EMCO                          | Horn Antenna                         | 3116            | 9510-2384     | 2015-11-07       | 2016-11-06           |
| Rohde & Schwarz               | Signal Analyzer                      | FSIQ26          | 100048        | 2015-11-12       | 2016-11-11           |
| Rohde & Schwarz               | Signal Analyzer                      | FSV40           | 101116        | 2016-07-04       | 2017-07-03           |
| ETS                           | Horn Antenna                         | 3115            | 6229          | 2015-11-07       | 2016-11-06           |
| ETS                           | Horn Antenna                         | 3115            | 9311-4159     | 2015-11-07       | 2016-11-06           |
| R&S                           | Auto test Software                   | EMC32           | V 09.10.0     | NCR              | NCR                  |
| HP                            | Signal Generator                     | E4421B          | 3426A01336    | 2015-11-04       | 2016-11-03           |
| BACL                          | RF cable                             | KS-LAB-012      | KS-LAB-012    | 2015-12-16       | 2016-12-15           |
| BACL                          | RF cable                             | KS-LAB-010      | KS-LAB-010    | 2015-12-16       | 2016-12-15           |
| <b>RF Conducted test</b>      |                                      |                 |               |                  |                      |
| BACL                          | TS 8997 Cable-01                     | T-KS-EMC086     | T-KS-EMC086   | 2015-12-10       | 2016-12-09           |
| BACL                          | RF cable                             | KS-LAB-012      | KS-LAB-012    | 2015-12-16       | 2016-12-15           |
| WEINSCHL                      | 3dB Attenuator                       | 5326            | N/A           | 2016-06-18       | 2017-06-18           |
| Rohde & Schwarz               | OSP120 BASE UNIT                     | OSP120          | 101247        | 2016-07-04       | 2017-07-03           |
| Rohde & Schwarz               | Signal Analyzer                      | FSIQ26          | 836131        | 2016-09-21       | 2017-09-21           |
| Rohde & Schwarz               | Signal Analyzer                      | FSIQ26          | 100048        | 2015-11-12       | 2016-11-11           |
| Rohde & Schwarz               | Universal Radio Communication Tester | CMU200          | 110605        | 2015-11-11       | 2016-11-11           |
| HONOVA                        | Power Splitter                       | ZFRSC-14-S+     | 019411452     | 2016-06-12       | 2017-06-12           |
| WEINSCHL                      | 10dB Attenuator                      | 5328            | N/A           | 2016-06-18       | 2017-06-18           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION**

---

### **Applicable Standard**

FCC§1.1307, §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RSZ160912001-20.



---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d) , Part 22H & 24E & 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

**FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER****Applicable Standards**


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

**Test Procedure***Conducted method:*

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 22 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Chris Wang on 2016-10-04.*

**Conducted Power****Cellular Band (Part 22H)**

| Mode | Channel | Frequency (MHz) | Average Output Power (dBm) | Limit (dBm) |
|------|---------|-----------------|----------------------------|-------------|
| GSM  | 128     | 824.2           | 32.06                      | 38.45       |
|      | 190     | 836.6           | 32.03                      | 38.45       |
|      | 251     | 848.8           | 31.97                      | 38.45       |

| Mode | Channel | Frequency (MHz) | Average Output Power (dBm) |         |         |         | Limit (dBm) |
|------|---------|-----------------|----------------------------|---------|---------|---------|-------------|
|      |         |                 | 1 slot                     | 2 slots | 3 slots | 4 slots |             |
| GPRS | 128     | 824.2           | 32.10                      | 31.16   | 29.59   | 28.37   | 38.45       |
|      | 190     | 836.6           | 32.08                      | 31.31   | 29.55   | 28.32   | 38.45       |
|      | 251     | 848.8           | 31.98                      | 31.25   | 29.51   | 28.28   | 38.45       |

| Mode  | Channel | Frequency (MHz) | Average Output Power (dBm) |         |         |         | Limit (dBm) |
|-------|---------|-----------------|----------------------------|---------|---------|---------|-------------|
|       |         |                 | 1 slot                     | 2 slots | 3 slots | 4 slots |             |
| EGPRS | 128     | 824.2           | 26.64                      | 25.54   | 23.17   | 21.80   | 38.45       |
|       | 190     | 836.6           | 26.64                      | 25.52   | 23.20   | 21.84   | 38.45       |
|       | 251     | 848.8           | 26.57                      | 25.44   | 23.11   | 21.75   | 38.45       |

| Mode           | Test Condition | Test Mode | 3GPP Sub Test | Average Output Power (dBm) |                  |                |
|----------------|----------------|-----------|---------------|----------------------------|------------------|----------------|
|                |                |           |               | Low Frequency              | Middle Frequency | High Frequency |
| WCDMA (Band V) | Normal         | RMC       |               | 22.07                      | 22.05            | 21.89          |
|                |                | HSDPA     | 1             | 20.95                      | 20.82            | 20.86          |
|                |                |           | 2             | 20.93                      | 20.83            | 20.85          |
|                |                |           | 3             | 20.94                      | 20.85            | 20.88          |
|                |                |           | 4             | 20.96                      | 20.86            | 20.84          |
|                |                | HSUPA     | 1             | 20.05                      | 19.82            | 19.88          |
|                |                |           | 2             | 20.04                      | 19.80            | 19.89          |
|                |                |           | 3             | 20.02                      | 19.85            | 19.82          |
|                |                |           | 4             | 20.06                      | 19.79            | 19.86          |
|                |                |           | 5             | 20.01                      | 19.82            | 19.87          |
|                |                | HSPA+     | 1             | 21.06                      | 20.88            | 20.89          |

**PCS Band (Part 24E)**

| Mode | Channel | Frequency (MHz) | Average Output Power (dBm) | Limit (dBm) |
|------|---------|-----------------|----------------------------|-------------|
| GSM  | 512     | 1850.2          | 28.89                      | 33          |
|      | 661     | 1880.0          | 28.86                      | 33          |
|      | 810     | 1909.8          | 28.75                      | 33          |

| Mode | Channel | Frequency (MHz) | Average Output Power (dBm) |         |         |         | Limit (dBm) |
|------|---------|-----------------|----------------------------|---------|---------|---------|-------------|
|      |         |                 | 1 slot                     | 2 slots | 3 slots | 4 slots |             |
| GPRS | 512     | 1850.2          | 28.92                      | 27.18   | 26.43   | 25.22   | 33          |
|      | 661     | 1880.0          | 28.93                      | 27.18   | 26.46   | 25.24   | 33          |
|      | 810     | 1909.8          | 28.83                      | 27.11   | 26.41   | 25.23   | 33          |

| Mode  | Channel | Frequency (MHz) | Average Output Power (dBm) |         |         |         | Limit (dBm) |
|-------|---------|-----------------|----------------------------|---------|---------|---------|-------------|
|       |         |                 | 1 slot                     | 2 slots | 3 slots | 4 slots |             |
| EGPRS | 512     | 1850.2          | 25.60                      | 24.25   | 22.12   | 20.66   | 33          |
|       | 661     | 1880.0          | 25.43                      | 24.18   | 21.90   | 20.40   | 33          |
|       | 810     | 1909.8          | 25.05                      | 23.78   | 21.39   | 19.92   | 33          |

| Mode             | Test Condition | Test Mode | 3GPP Sub Test | Average Output Power (dBm) |                  |                |
|------------------|----------------|-----------|---------------|----------------------------|------------------|----------------|
|                  |                |           |               | Low Frequency              | Middle Frequency | High Frequency |
| WCDMA (Band I I) | Normal         | RMC       |               | 21.58                      | 21.69            | 21.61          |
|                  |                | HSDPA     | 1             | 21.01                      | 20.36            | 20.96          |
|                  |                |           | 2             | 20.49                      | 20.37            | 20.92          |
|                  |                |           | 3             | 20.96                      | 20.29            | 20.97          |
|                  |                |           | 4             | 21.02                      | 20.33            | 20.94          |
|                  |                | HSUPA     | 1             | 21.13                      | 21.16            | 20.90          |
|                  |                |           | 2             | 20.85                      | 20.92            | 20.57          |
|                  |                |           | 3             | 20.87                      | 20.91            | 20.65          |
|                  |                |           | 4             | 20.89                      | 20.94            | 20.64          |
|                  |                |           | 5             | 20.85                      | 20.90            | 20.57          |
|                  |                | HSPA+     | 1             | 20.91                      | 20.95            | 20.74          |

**AWS Band (Part 27)**

| Mode            | Test Condition | Test Mode | 3GPP Sub Test | Average Output Power (dBm) |                  |                |
|-----------------|----------------|-----------|---------------|----------------------------|------------------|----------------|
|                 |                |           |               | Low Frequency              | Middle Frequency | High Frequency |
| WCDMA (Band IV) | Normal         | RMC       |               | 21.53                      | 21.59            | 21.48          |
|                 |                | HSDPA     | 1             | 20.34                      | 20.92            | 20.61          |
|                 |                |           | 2             | 20.58                      | 20.58            | 20.77          |
|                 |                |           | 3             | 20.55                      | 20.59            | 20.53          |
|                 |                |           | 4             | 20.56                      | 20.54            | 20.69          |
|                 |                | HSUPA     | 1             | 20.35                      | 20.52            | 20.43          |
|                 |                |           | 2             | 20.43                      | 20.31            | 20.47          |
|                 |                |           | 3             | 20.39                      | 20.33            | 20.42          |
|                 |                |           | 4             | 20.45                      | 20.37            | 20.45          |
|                 |                |           | 5             | 20.46                      | 20.32            | 20.49          |
|                 |                | HSPA+     | 1             | 20.82                      | 20.41            | 20.75          |

**Peak-to-average ratio (PAR)****Cellular Band**

| Mode | Channel | PAR (dB) | Limit (dB) |
|------|---------|----------|------------|
| GSM  | Low     | 0.27     | 13         |
|      | Middle  | 0.24     | 13         |
|      | High    | 0.26     | 13         |

| Mode  | Channel | PAR (dB) | Limit (dB) |
|-------|---------|----------|------------|
| EGPRS | Low     | 0.64     | 13         |
|       | Middle  | 0.53     | 13         |
|       | High    | 0.63     | 13         |

| Mode          | Channel | PAR (dB) | Limit (dB) |
|---------------|---------|----------|------------|
| RMC (BPSK)    | Low     | 3.22     | 13         |
|               | Middle  | 3.13     | 13         |
|               | High    | 3.25     | 13         |
| HSDPA (16QAM) | Low     | 3.24     | 13         |
|               | Middle  | 3.12     | 13         |
|               | High    | 3.27     | 13         |
| HSUPA (BPSK)  | Low     | 3.26     | 13         |
|               | Middle  | 3.04     | 13         |
|               | High    | 3.21     | 13         |

**PCS Band**

| Mode | Channel | PAR (dB) | Limit (dB) |
|------|---------|----------|------------|
| GSM  | Low     | 0.24     | 13         |
|      | Middle  | 0.22     | 13         |
|      | High    | 0.23     | 13         |

| Mode  | Channel | PAR (dB) | Limit (dB) |
|-------|---------|----------|------------|
| EGPRS | Low     | 0.44     | 13         |
|       | Middle  | 0.39     | 13         |
|       | High    | 0.43     | 13         |

| Mode          | Channel | PAR (dB) | Limit (dB) |
|---------------|---------|----------|------------|
| RMC (BPSK)    | Low     | 3.13     | 13         |
|               | Middle  | 3.04     | 13         |
|               | High    | 3.13     | 13         |
| HSDPA (16QAM) | Low     | 3.16     | 13         |
|               | Middle  | 3.01     | 13         |
|               | High    | 3.17     | 13         |
| HSUPA (BPSK)  | Low     | 3.12     | 13         |
|               | Middle  | 3.02     | 13         |
|               | High    | 3.18     | 13         |

**AWS Band**

| <b>Mode</b>      | <b>Channel</b> | <b>PAR<br/>(dB)</b> | <b>Limit<br/>(dB)</b> |
|------------------|----------------|---------------------|-----------------------|
| WCDMA<br>(BPSK)  | Low            | 2.83                | 13                    |
|                  | Middle         | 2.72                | 13                    |
|                  | High           | 2.86                | 13                    |
| HSDPA<br>(16QAM) | Low            | 2.84                | 13                    |
|                  | Middle         | 2.76                | 13                    |
|                  | High           | 2.88                | 13                    |
| HSUPA<br>(BPSK)  | Low            | 2.85                | 13                    |
|                  | Middle         | 2.78                | 13                    |
|                  | High           | 2.88                | 13                    |



**Radiated Power****GSM Mode:**

| Frequency<br>(MHz)                            | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted            |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------------|-------------------------------|------------------------------|---------------|----------------|------------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                                               |                               |                              | Height<br>(m) | Polar<br>(H/V) | S.G.<br>Level<br>(dBm) | Cable<br>loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| ERP, Cellular Band (Part 22H), Middle Channel |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 836.6                                         | 96.92                         | 282                          | 1             | H              | 25.9                   | 0.46                  | 4.75                    | 30.19                      | 38.45          | 8.26           |
| 836.6                                         | 93.30                         | 128                          | 2.4           | V              | 22.3                   | 0.46                  | 4.75                    | 26.59                      | 38.45          | 11.86          |
| EIRP, PCS Band (Part 24E), Middle Channel     |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 1880.00                                       | 79.24                         | 284                          | 1.7           | H              | 18.4                   | 0.31                  | 10.4                    | 28.49                      | 33             | 4.51           |
| 1880.00                                       | 77.57                         | 44                           | 1.5           | V              | 13.3                   | 0.31                  | 10.4                    | 23.39                      | 33             | 9.61           |

**EDGE Mode:**

| Frequency<br>(MHz)                            | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted            |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------------|-------------------------------|------------------------------|---------------|----------------|------------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                                               |                               |                              | Height<br>(m) | Polar<br>(H/V) | S.G.<br>Level<br>(dBm) | Cable<br>loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| ERP, Cellular Band (Part 22H), Middle Channel |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 836.6                                         | 92.58                         | 32                           | 1.5           | H              | 21.6                   | 0.46                  | 4.75                    | 25.89                      | 38.45          | 12.56          |
| 836.6                                         | 89.25                         | 139                          | 2.4           | V              | 18.2                   | 0.46                  | 4.75                    | 22.49                      | 38.45          | 15.96          |
| EIRP, PCS Band (Part 24E), Middle Channel     |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 1880                                          | 75.54                         | 286                          | 2.0           | H              | 14.7                   | 0.31                  | 10.4                    | 24.79                      | 33             | 8.21           |
| 1880                                          | 75.27                         | 244                          | 1.5           | V              | 11.0                   | 0.31                  | 10.4                    | 21.09                      | 33             | 11.91          |

**WCDMA Mode:**

| Frequency<br>(MHz)                               | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted            |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------------------------------------|-------------------------------|------------------------------|---------------|----------------|------------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                                                  |                               |                              | Height<br>(m) | Polar<br>(H/V) | S.G.<br>Level<br>(dBm) | Cable<br>loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| ERP, WCDMA Band V (Part 22H), Middle Channel     |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 836.6                                            | 88.12                         | 83                           | 1             | H              | 17.1                   | 0.46                  | 4.75                    | 21.39                      | 38.45          | 17.06          |
| 836.6                                            | 85.36                         | 79                           | 2.4           | V              | 14.3                   | 0.46                  | 4.75                    | 18.59                      | 38.45          | 19.86          |
| EIRP, WCDMA Band II (Part 24E), Middle Channel   |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 1880.00                                          | 71.64                         | 345                          | 1.3           | H              | 10.8                   | 0.31                  | 10.4                    | 20.89                      | 33             | 12.11          |
| 1880.00                                          | 71.37                         | 294                          | 1.6           | V              | 7.1                    | 0.31                  | 10.4                    | 17.19                      | 33             | 15.81          |
| EIRP for WCDMA Band IV (Part 27), Middle Channel |                               |                              |               |                |                        |                       |                         |                            |                |                |
| 1732.60                                          | 73.98                         | 71                           | 2.3           | H              | 11.6                   | 0.30                  | 9.90                    | 21.20                      | 30             | 8.80           |
| 1732.60                                          | 72.04                         | 17                           | 2.3           | V              | 7.2                    | 0.30                  | 9.90                    | 16.80                      | 30             | 13.20          |

**Note:**

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

## FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


### Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

### Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

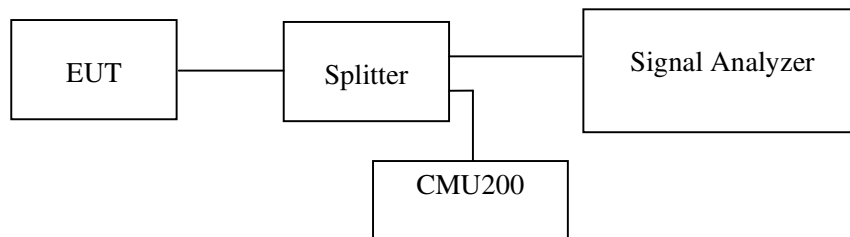

### Test Data

#### Environmental Conditions

|                    |                 |
|--------------------|-----------------|
| Temperature:       | 22~24℃          |
| Relative Humidity: | 48~53 %         |
| ATM Pressure:      | 100.0~101.0 kPa |

*The testing was performed by Chris Wang from 2016-09-30 to 2016-11-08.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following tables and plots.*

**Cellular Band (Part 22H)**

| Mode        | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|-------------|-----------------|------------------------------|--------------------------------|
| GSM(GMSK)   | 836.6           | 246.5                        | 318.6                          |
| EGPRS(8PSK) | 836.6           | 244.5                        | 316.6                          |

| Mode          | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|---------------|-----------------|------------------------------|--------------------------------|
| RMC (BPSK)    | 836.6           | 4.168                        | 4.729                          |
| HSUPA (BPSK)  | 836.6           | 4.168                        | 4.749                          |
| HSDPA (16QAM) | 836.6           | 4.148                        | 4.749                          |

**PCS Band (Part 24E)**

| Mode        | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|-------------|-----------------|------------------------------|--------------------------------|
| GSM(GMSK)   | 1880.0          | 244.5                        | 318.6                          |
| EGPRS(8PSK) | 1880.0          | 250.5                        | 322.6                          |


| Mode          | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|---------------|-----------------|------------------------------|--------------------------------|
| RMC (BPSK)    | 1880.0          | 4.188                        | 4.729                          |
| HSUPA (BPSK)  | 1880.0          | 4.188                        | 4.749                          |
| HSDPA (16QAM) | 1880.0          | 4.168                        | 4.749                          |

**AWS Band (Part 27)**


| Mode          | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|---------------|-----------------|------------------------------|--------------------------------|
| RMC (BPSK)    | 1880.0          | 4.168                        | 4.729                          |
| HSUPA (BPSK)  | 1880.0          | 4.188                        | 4.709                          |
| HSDPA (16QAM) | 1880.0          | 4.168                        | 4.769                          |

## Cellular Band (Part 22H)


## 99% Occupied &amp; 26 dB Emissions Bandwidth for GSM (GMSK) Mode

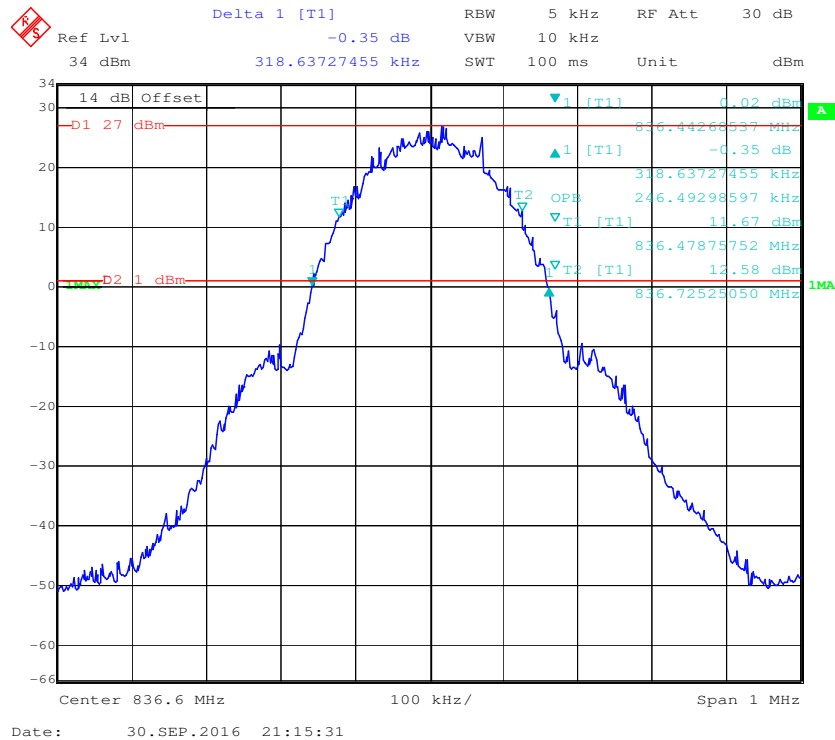


## 99% Occupied &amp; 26 dB Emissions Bandwidth for EDGE Mode


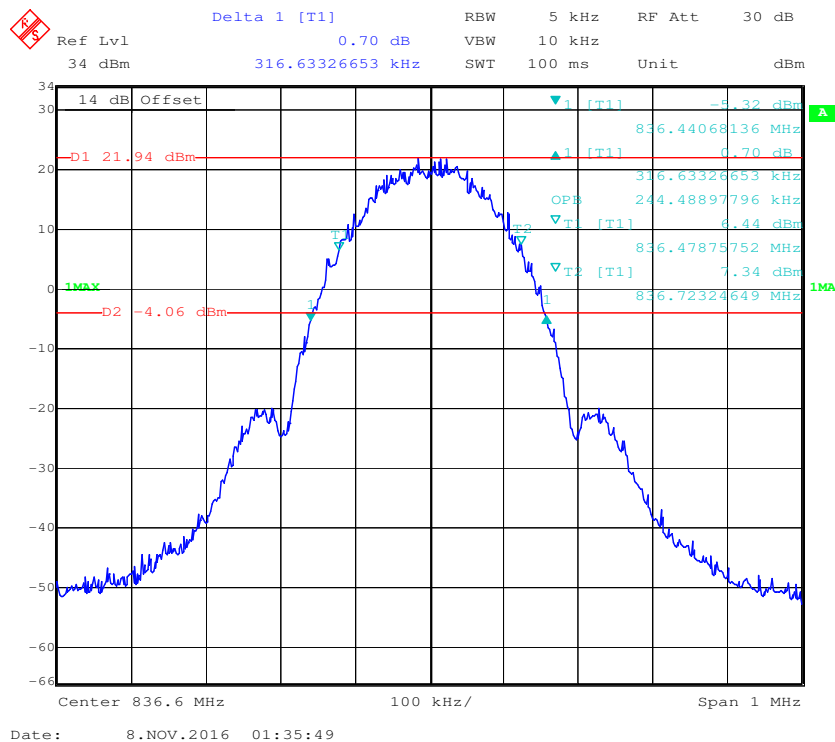




### 99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode


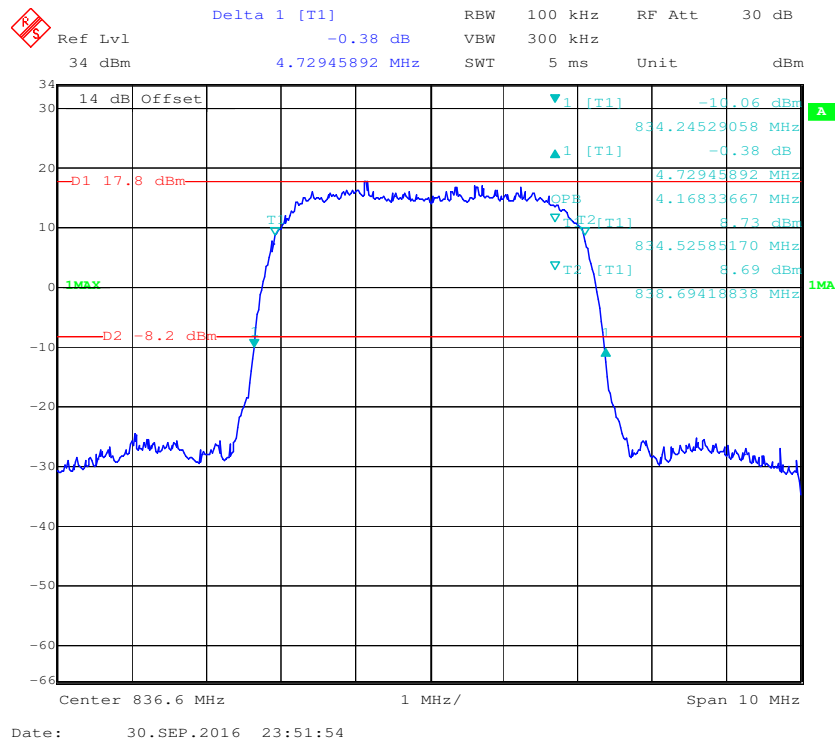


### 99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

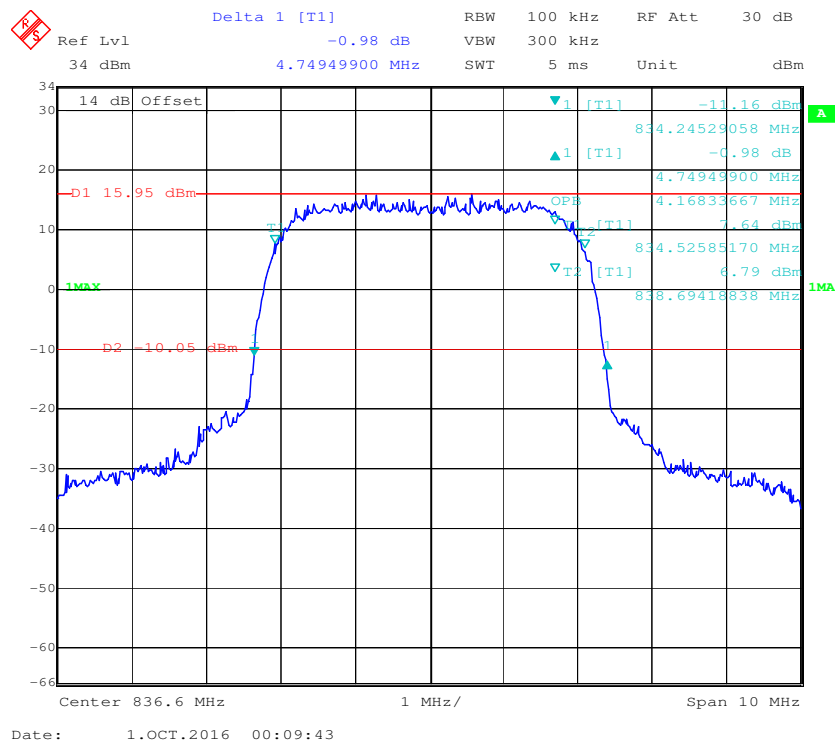

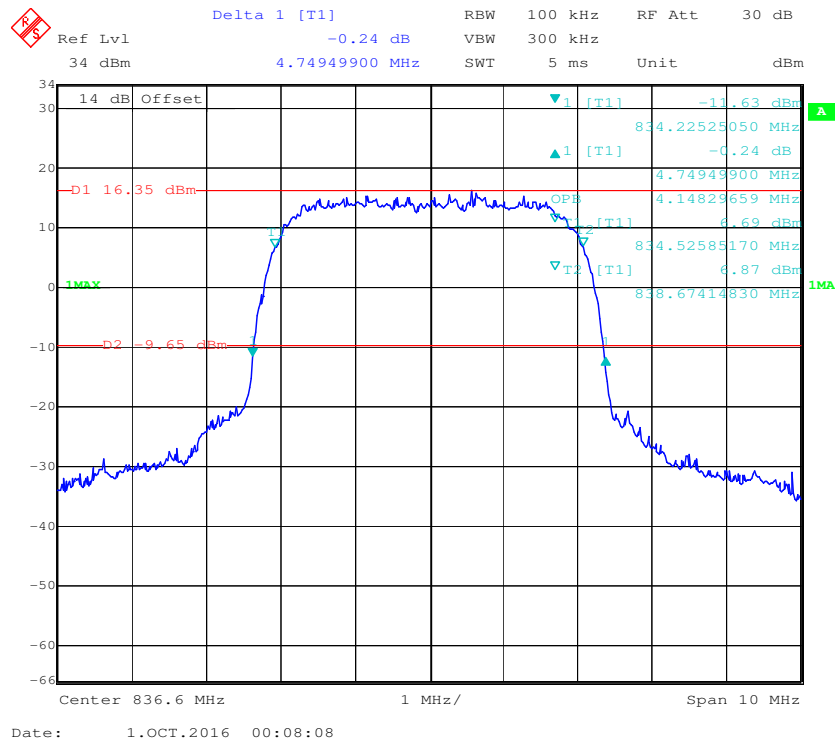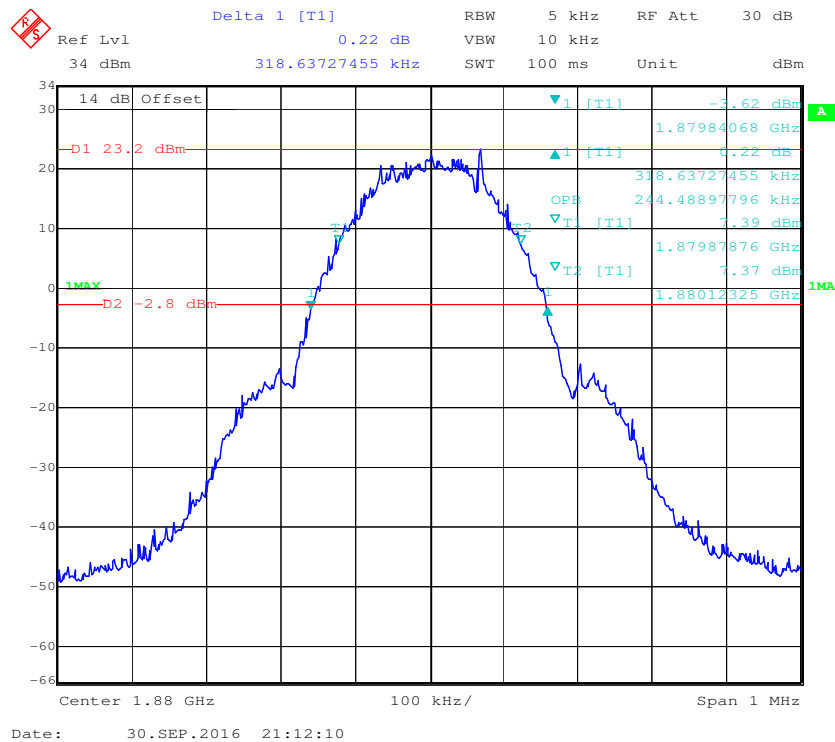**99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode****PCS Band (Part 24E)****99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode**

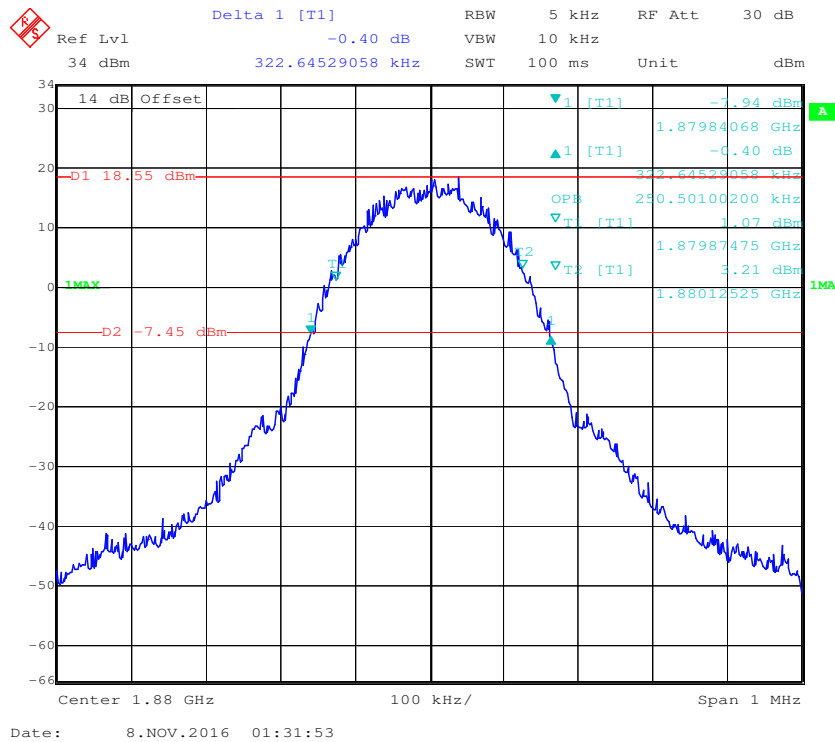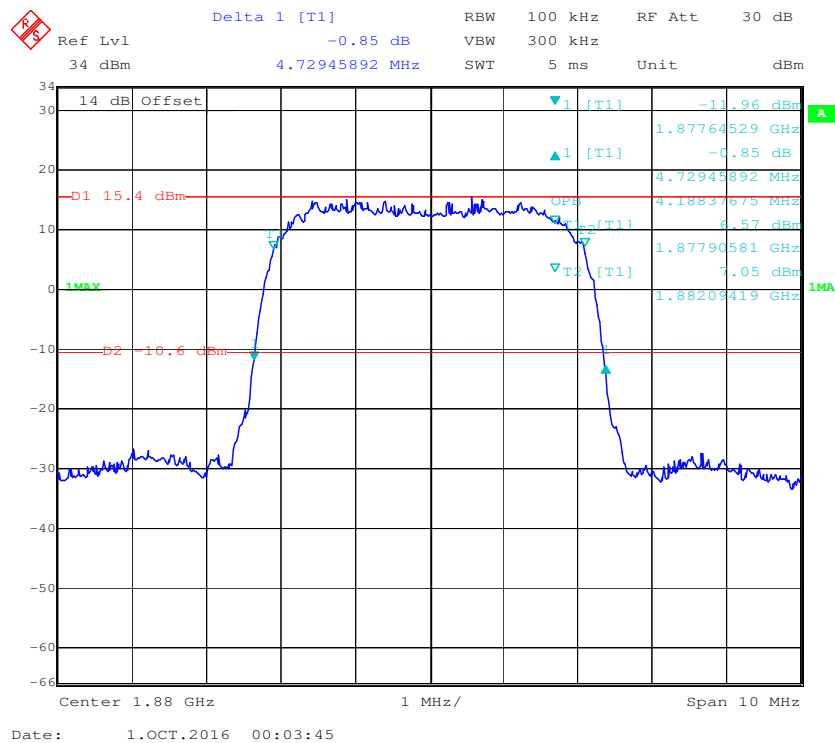
**99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode****99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode**

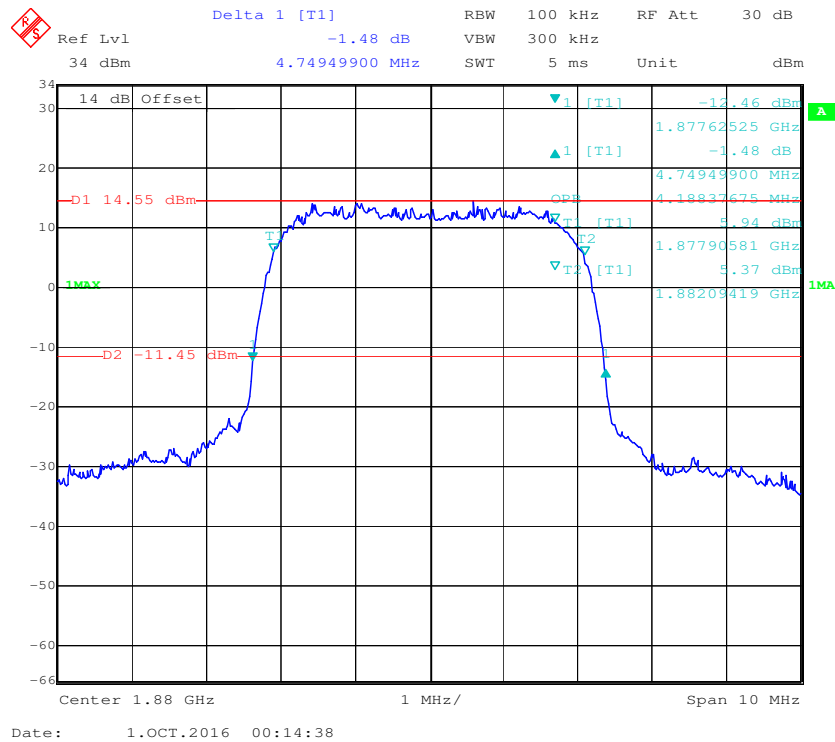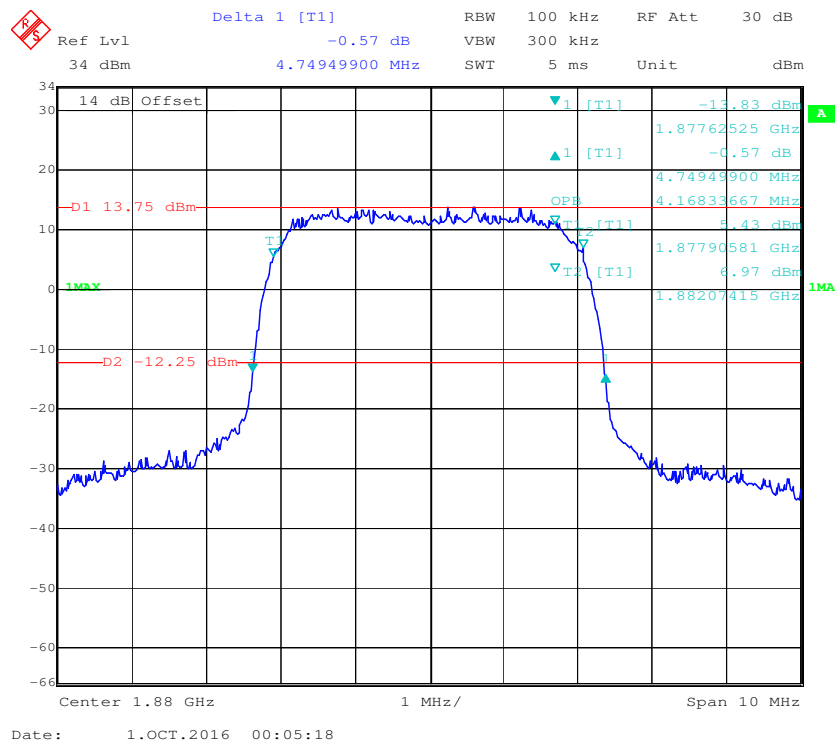**99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode****99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**




## AWS Band


## 99% Occupied &amp; 26 dB Emissions Bandwidth for RMC (BPSK) Mode

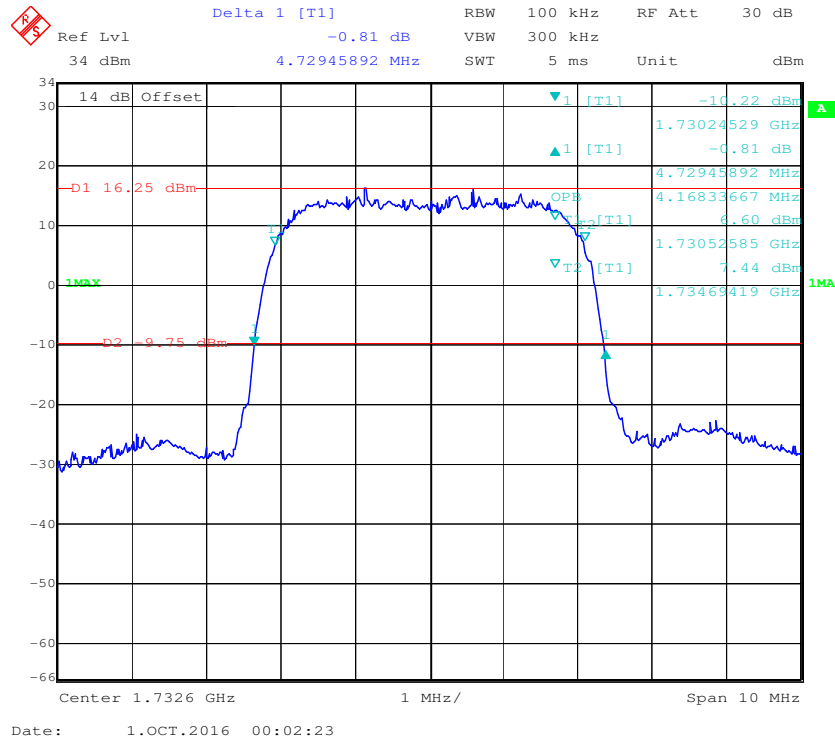

## 99% Occupied &amp; 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

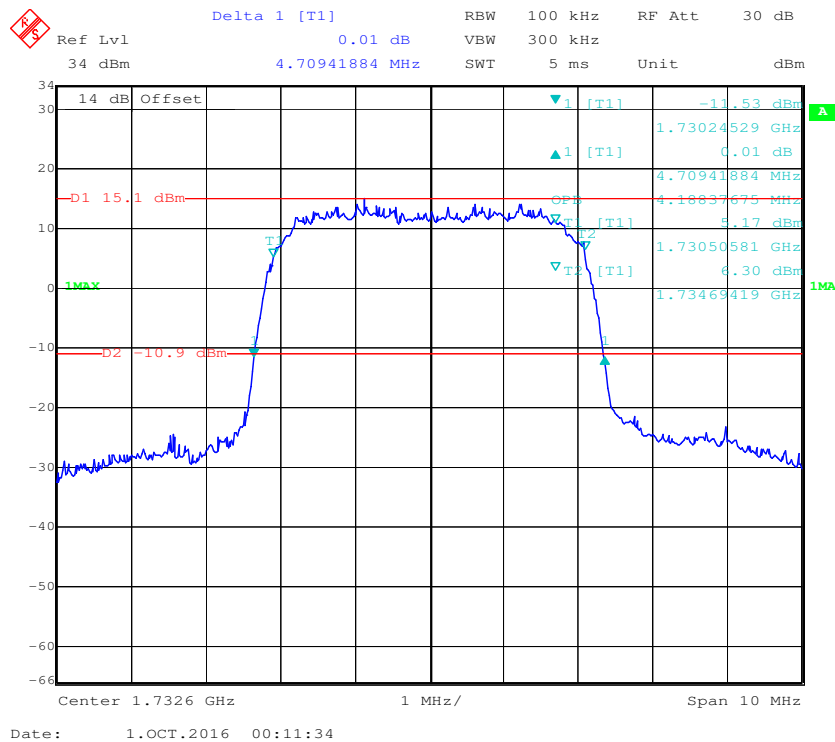

# 99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

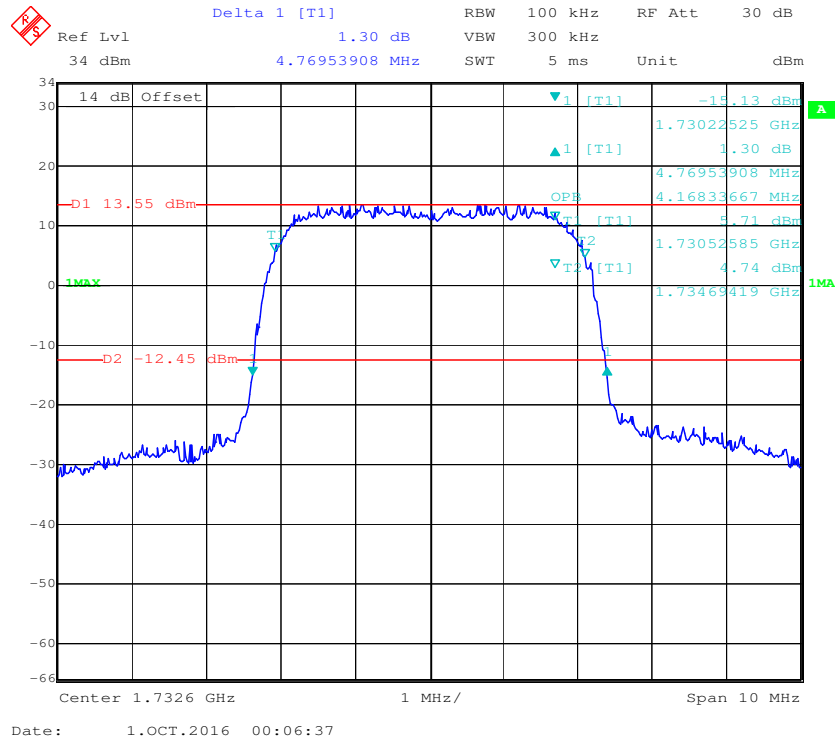

## § 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

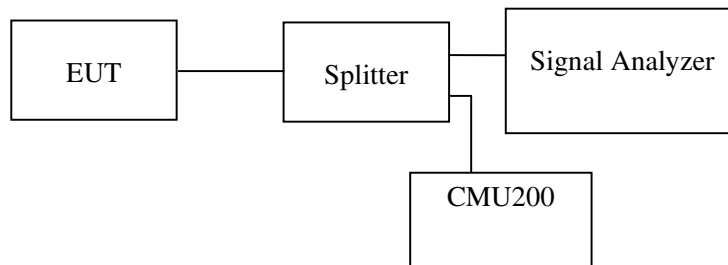


### Test Data

#### Environmental Conditions


|                    |                 |
|--------------------|-----------------|
| Temperature:       | 22~24 °C        |
| Relative Humidity: | 48~53 %         |
| ATM Pressure:      | 100.0~101.0 kPa |

The testing was performed by Chris Wang on 2016-09-30 and 2016-11-08.

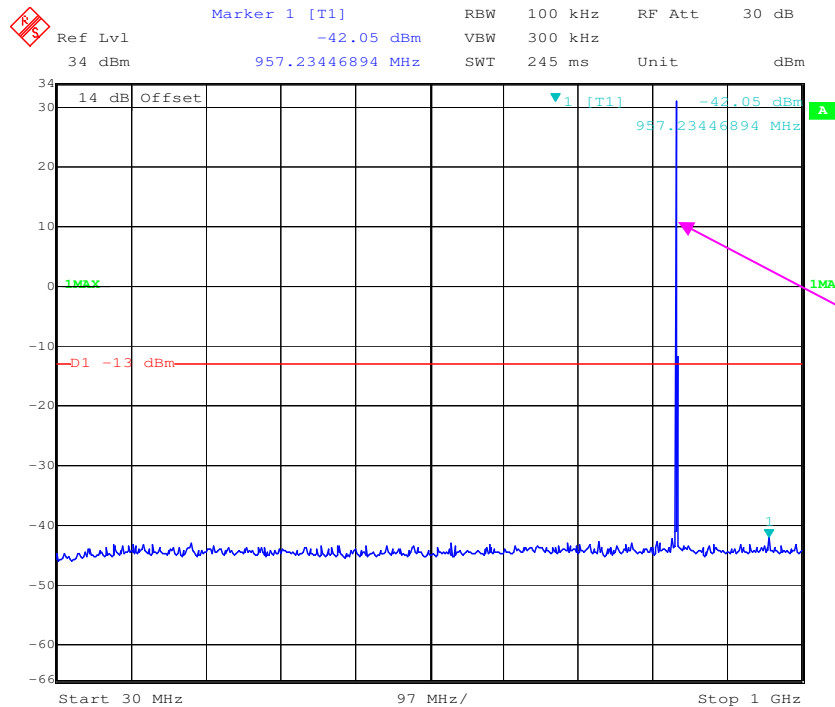**Cellular Band (Part 22H)****30 MHz – 1 GHz (GSM Mode)**


Date: 30.SEP.2016 21:22:05

Fundamental test

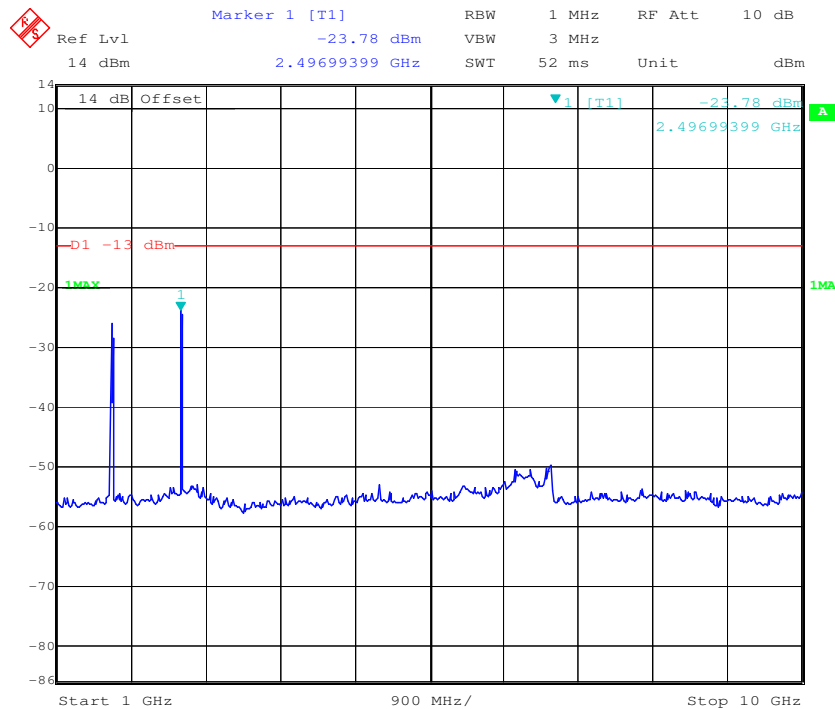
**1 GHz – 10 GHz (GSM Mode)**

Date: 8.NOV.2016 01:38:04

### 30 MHz – 1 GHz (WCDMA Mode)

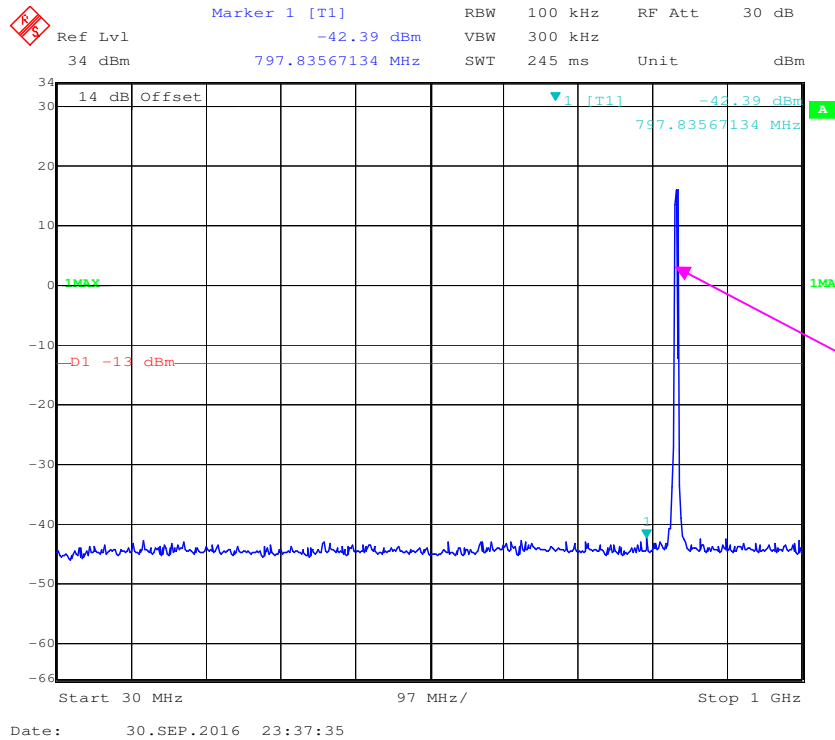


### 1 GHz – 10 GHz (WCDMA Mode)

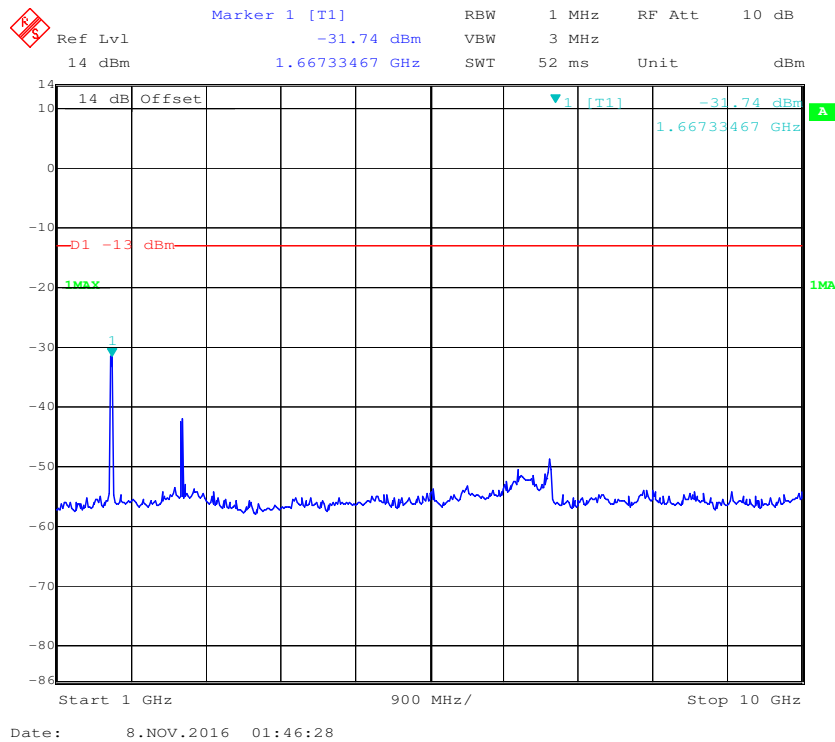


PCS Band (Part 24E)



30 MHz – 1 GHz (GSM Mode)


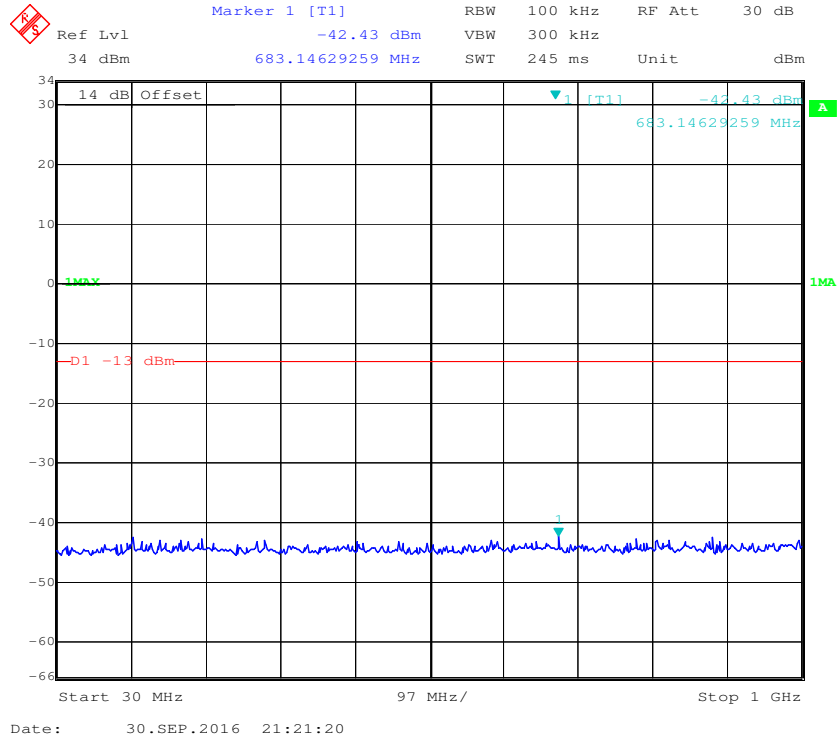


1 GHz – 2 GHz (GSM Mode)

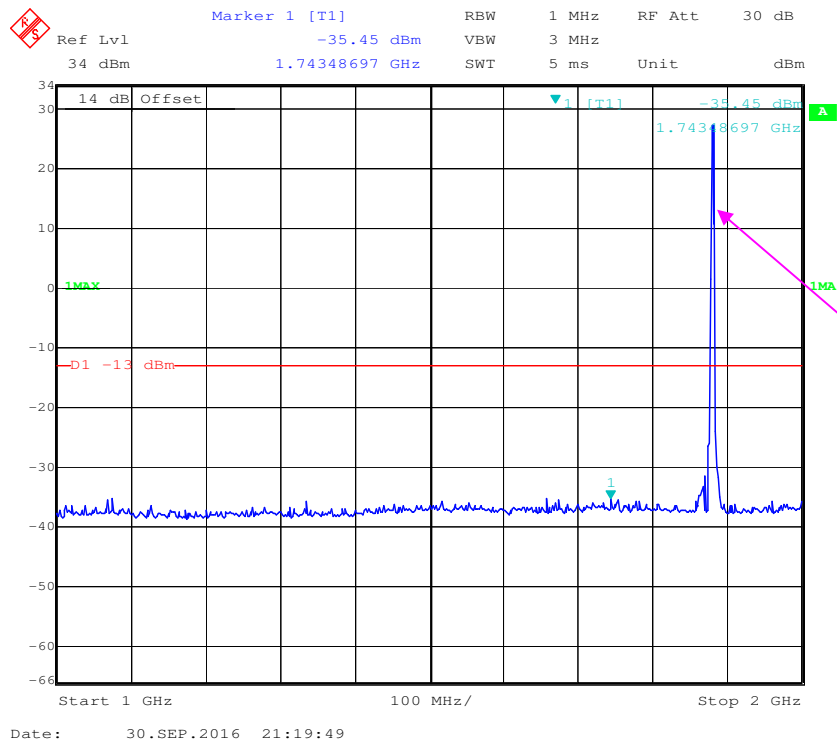

Fundamental test

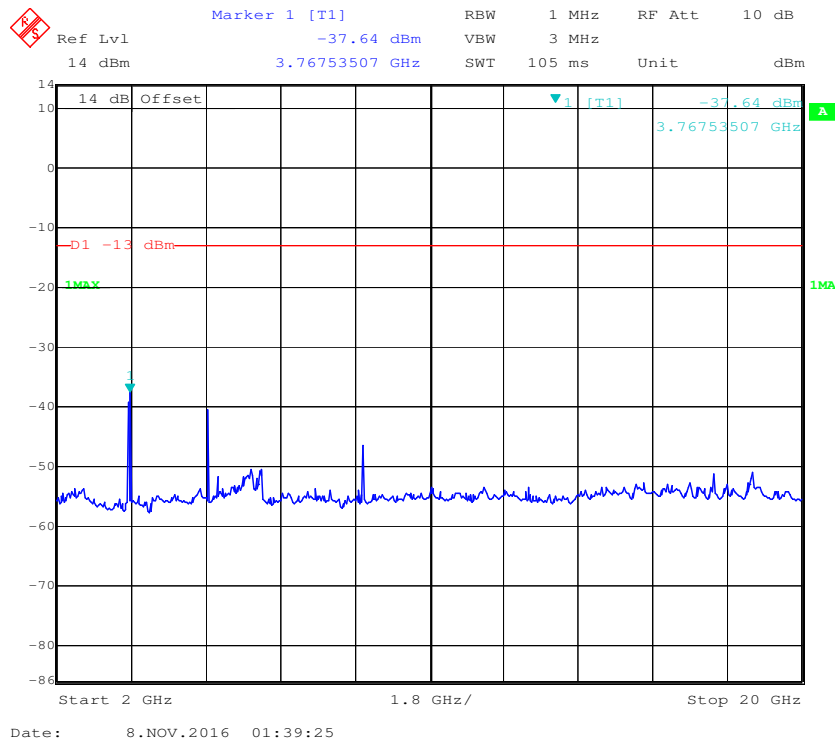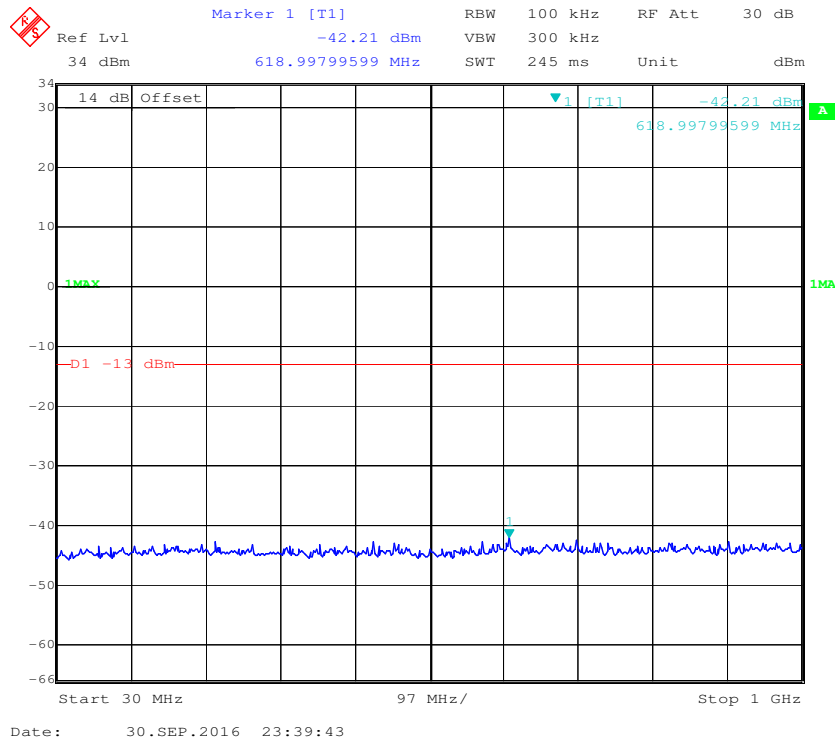
**2 GHz – 20 GHz (GSM Mode)****30 MHz – 1 GHz (WCDMA Mode)**

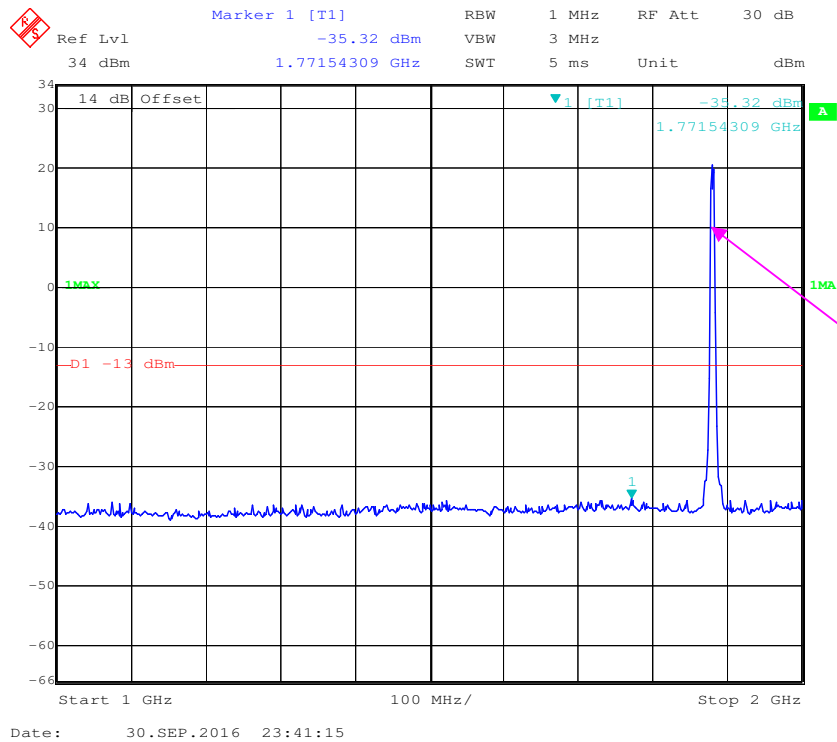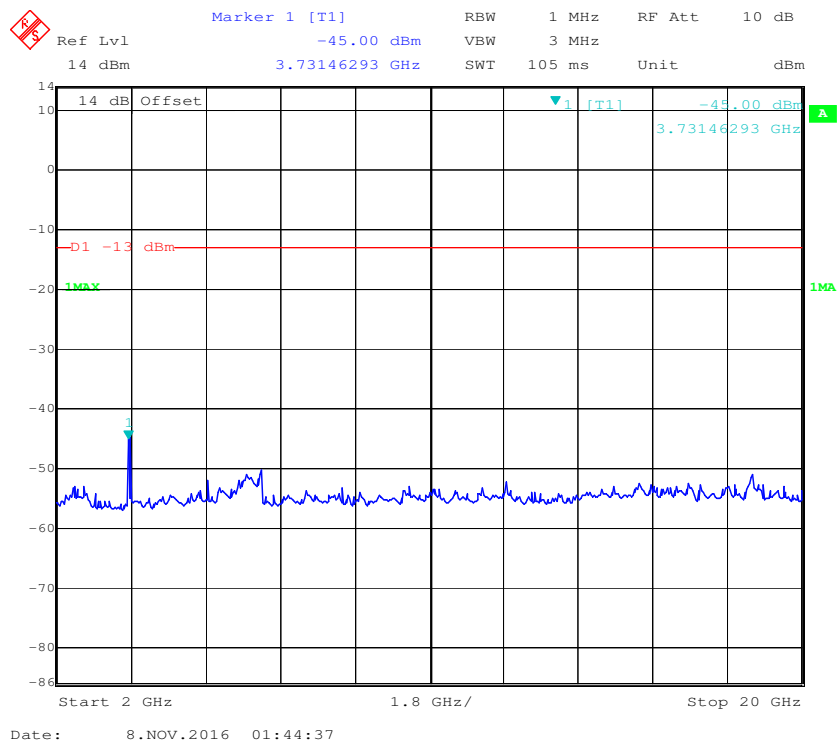**1 GHz – 2 GHz (WCDMA Mode)****2 GHz – 20 GHz (WCDMA Mode)**




# AWS Band (Part 27)


## 30 MHz – 1 GHz (WCDMA Mode)

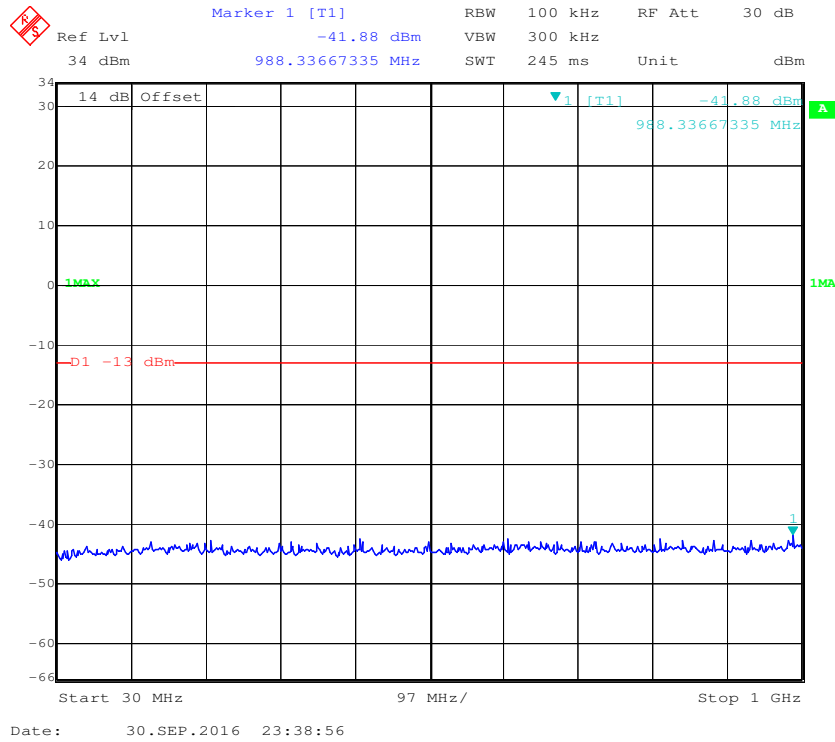

## 1 GHz – 2 GHz (WCDMA Mode)

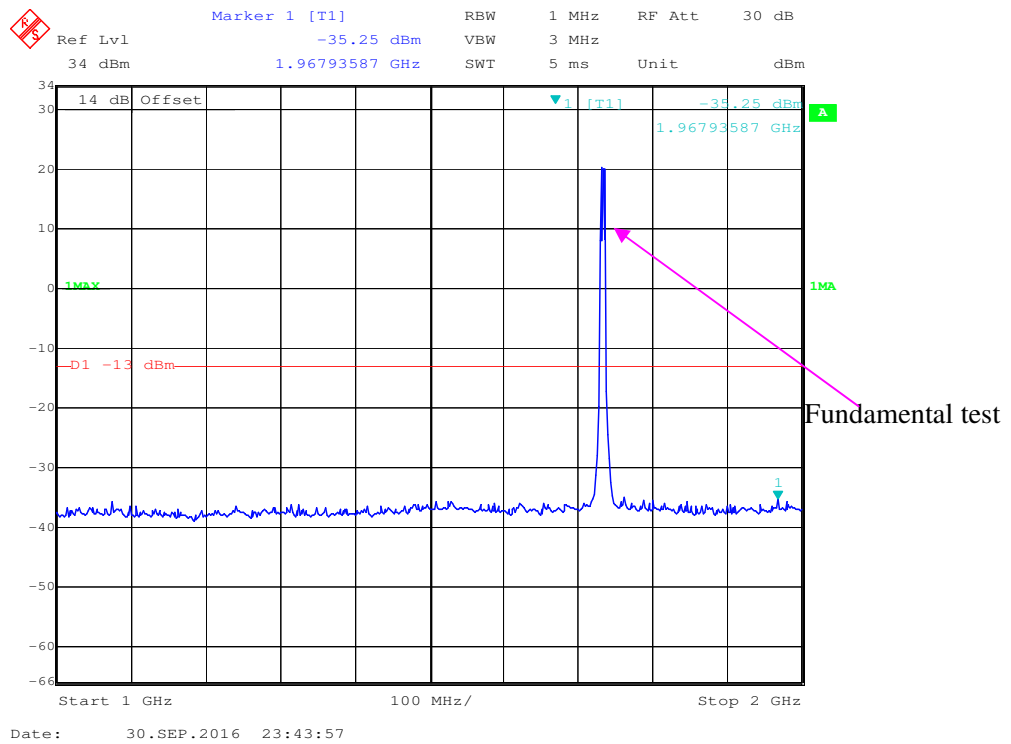

### 2 GHz – 20 GHz (WCDMA Mode)

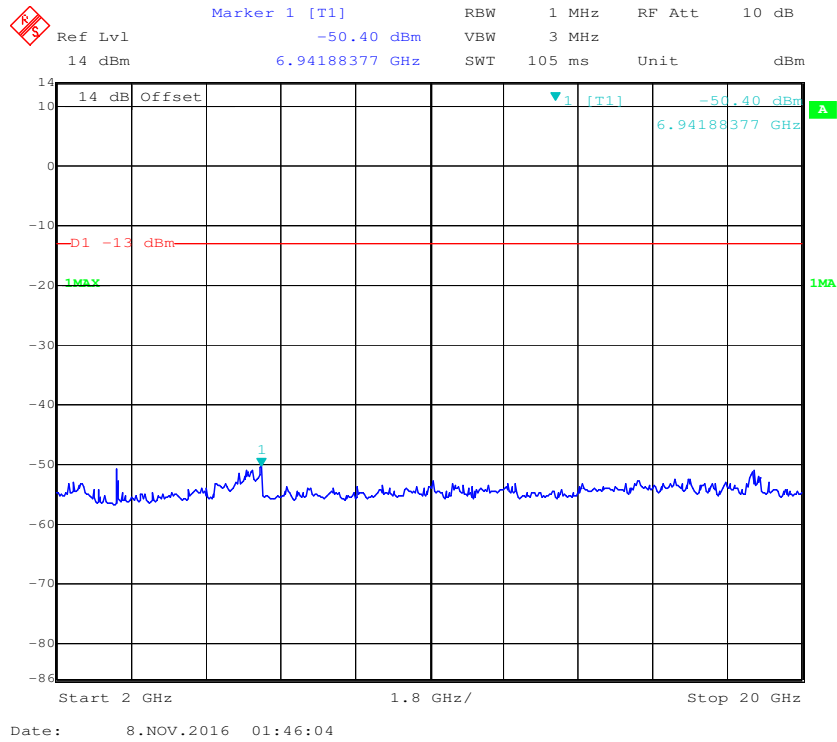

## FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) SPURIOUS RADIATED EMISSIONS

### Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TX pwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10} (\text{power out in Watts})$  or,

Spurious attenuation limit in dB =  $55 + 10 \log_{10} (\text{power out in Watts})$

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Chris Wang on 2016-10-04*

*Test mode: Transmitting*

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

**30 MHz ~ 10 GHz:**

**Cellular Band (Part 22H)**

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted          |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------|-------------------------------|------------------------------|---------------|----------------|----------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                    |                               |                              | Height<br>(m) | Polar<br>(H/V) | SG<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| GSM 850 Mode       |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 325.16             | 32.54                         | 333                          | 1.8           | H              | -64.5                | 0.28                  | 3.85                    | -60.93                     | -13            | 47.93          |
| 325.16             | 31.86                         | 322                          | 2.1           | V              | -65.1                | 0.28                  | 3.85                    | -61.53                     | -13            | 48.53          |
| 1673.20            | 54.33                         | 208                          | 2.4           | H              | -49.6                | 0.30                  | 9.40                    | -40.50                     | -13            | 27.50          |
| 1673.20            | 53.72                         | 229                          | 1.7           | V              | -51.7                | 0.30                  | 9.40                    | -42.60                     | -13            | 29.60          |
| WCDMA 850 Mode     |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 325.16             | 32.86                         | 83                           | 2.2           | H              | -64.1                | 0.28                  | 3.85                    | -60.53                     | -13            | 47.53          |
| 325.16             | 33.18                         | 194                          | 1.0           | V              | -63.8                | 0.28                  | 3.85                    | -60.23                     | -13            | 47.23          |
| 1673.20            | 52.33                         | 290                          | 1.5           | H              | -51.6                | 0.30                  | 9.40                    | -42.50                     | -13            | 29.50          |
| 1673.20            | 53.12                         | 356                          | 1.3           | V              | -52.3                | 0.30                  | 9.40                    | -43.20                     | -13            | 30.20          |

**30 MHz ~ 20 GHz:**

**PCS Band (Part 24E)**

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted          |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------|-------------------------------|------------------------------|---------------|----------------|----------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                    |                               |                              | Height<br>(m) | Polar<br>(H/V) | SG<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| GSM 1900 Mode      |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 325.16             | 31.86                         | 225                          | 2.1           | H              | -65.1                | 0.28                  | 3.85                    | -61.53                     | -13            | 48.53          |
| 325.16             | 30.67                         | 58                           | 1.9           | V              | -66.3                | 0.28                  | 3.85                    | -62.73                     | -13            | 49.73          |
| 3760.00            | 47.43                         | 13                           | 1.9           | H              | -46.3                | 2.42                  | 12.60                   | -36.12                     | -13            | 23.12          |
| 3760.00            | 43.03                         | 237                          | 2.4           | V              | -49.7                | 2.42                  | 12.60                   | -39.52                     | -13            | 26.52          |
| WCDMA 1900 Mode    |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 325.16             | 31.68                         | 144                          | 2.2           | H              | -65.3                | 0.28                  | 3.85                    | -61.73                     | -13            | 48.73          |
| 325.16             | 32.71                         | 166                          | 1.3           | V              | -64.3                | 0.28                  | 3.85                    | -60.73                     | -13            | 47.73          |
| 3760.00            | 44.23                         | 249                          | 2.2           | H              | -49.5                | 2.42                  | 12.60                   | -39.32                     | -13            | 26.32          |
| 3760.00            | 46.23                         | 312                          | 1.1           | V              | -46.5                | 2.42                  | 12.60                   | -36.32                     | -13            | 23.32          |

**30 MHz ~ 18 GHz:****AWS Band (Part 27)**

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted          |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------|-------------------------------|------------------------------|---------------|----------------|----------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                    |                               |                              | Height<br>(m) | Polar<br>(H/V) | SG<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| WCDMA Mode         |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 325.16             | 31.86                         | 352                          | 1.2           | H              | -65.1                | 0.28                  | 3.85                    | -61.53                     | -13            | 48.53          |
| 325.16             | 32.46                         | 34                           | 2.3           | V              | -64.5                | 0.28                  | 3.85                    | -60.93                     | -13            | 47.93          |
| 3465.20            | 43.97                         | 130                          | 2.4           | H              | -50.6                | 2.34                  | 12.40                   | -40.54                     | -13            | 27.54          |
| 3465.20            | 41.31                         | 291                          | 1.5           | V              | -51.2                | 2.34                  | 12.40                   | -41.14                     | -13            | 28.14          |

**Note:**

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

**FCC § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) - BAND EDGES****Applicable Standards**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to § 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to FCC § 27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

**Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

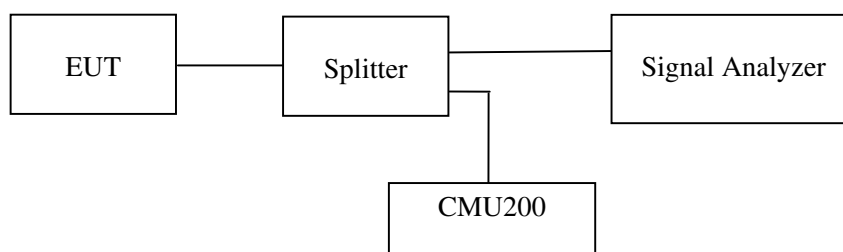**Test Data****Environmental Conditions**


|                    |                 |
|--------------------|-----------------|
| Temperature:       | 22~24 °C        |
| Relative Humidity: | 48~53 %         |
| ATM Pressure:      | 100.0~101.0 kPa |

The testing was performed by Chris Wang on 2016-09-30 and 2016-11-08.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


### Cellular Band, Left Band Edge for GSM (GMSK) Mode

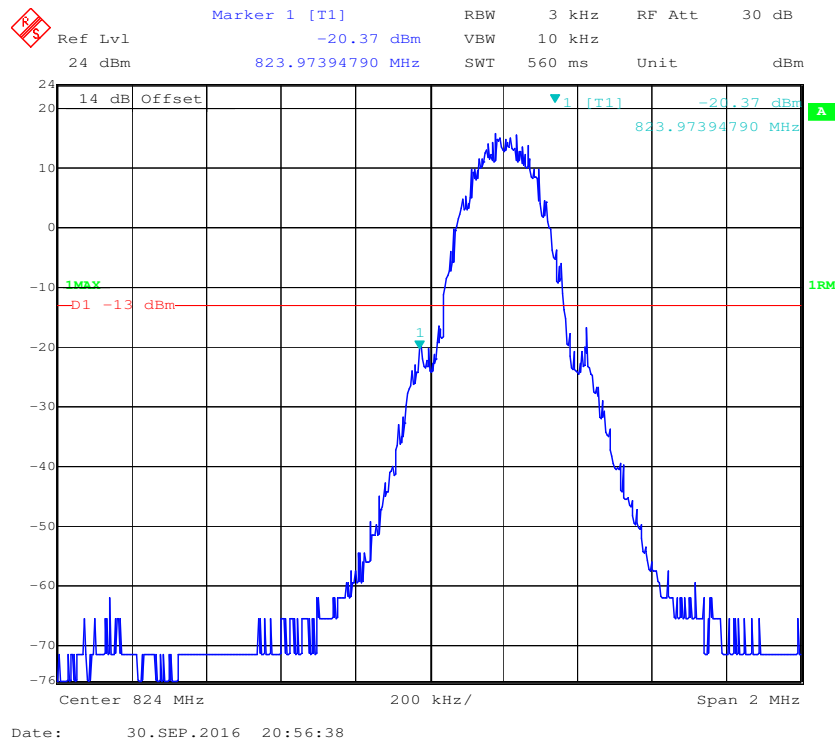


### Cellular Band, Right Band Edge for GSM (GMSK) Mode

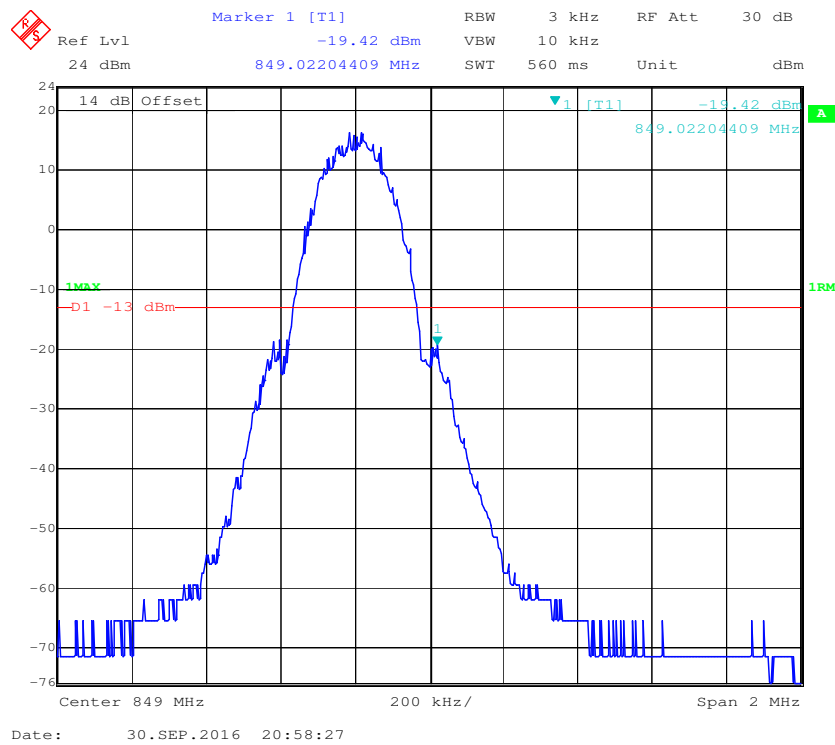

## Cellular Band, Left Band Edge for EGPRS Mode

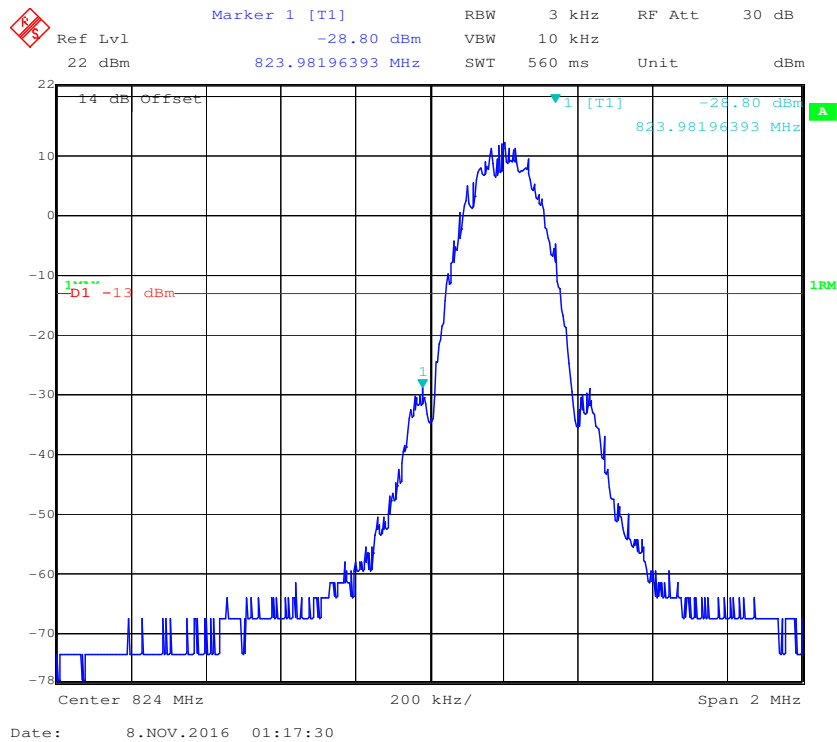


## Cellular Band, Right Band Edge for EGPRS Mode

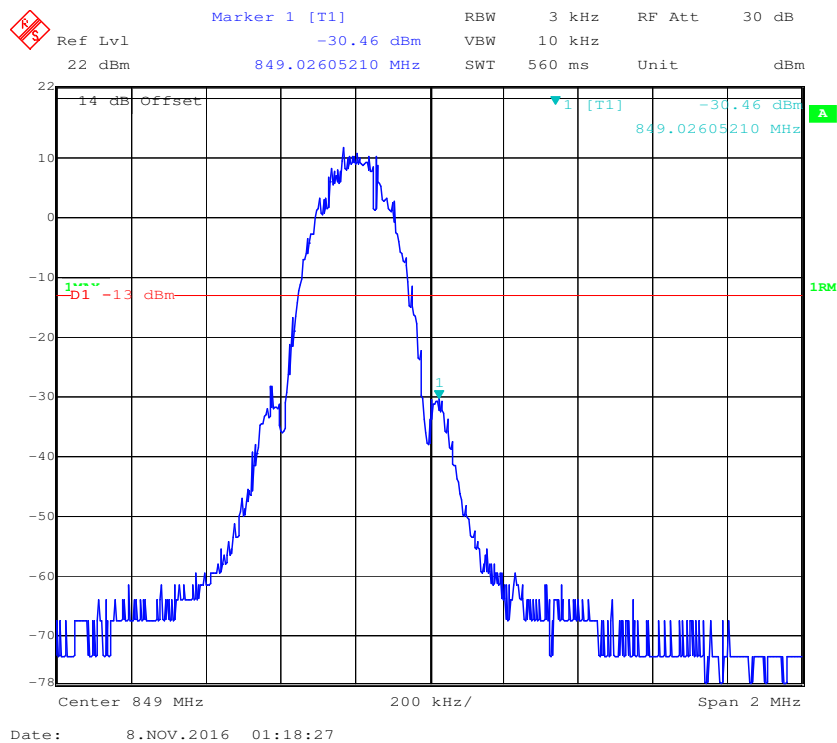





### Cellular Band, Left Band Edge for RMC (BPSK) Mode

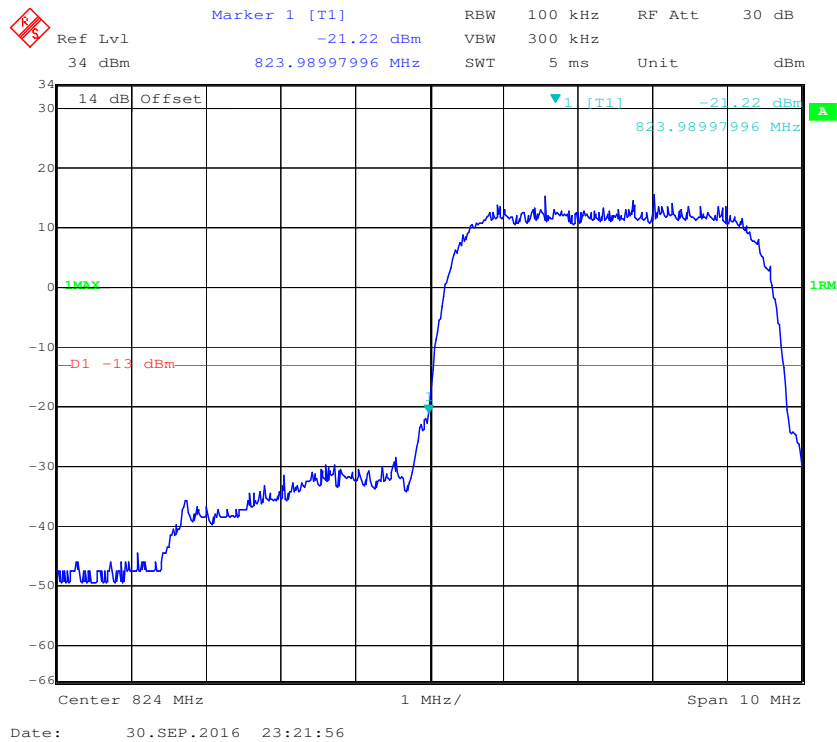


### Cellular Band, Right Band Edge for RMC (BPSK) Mode

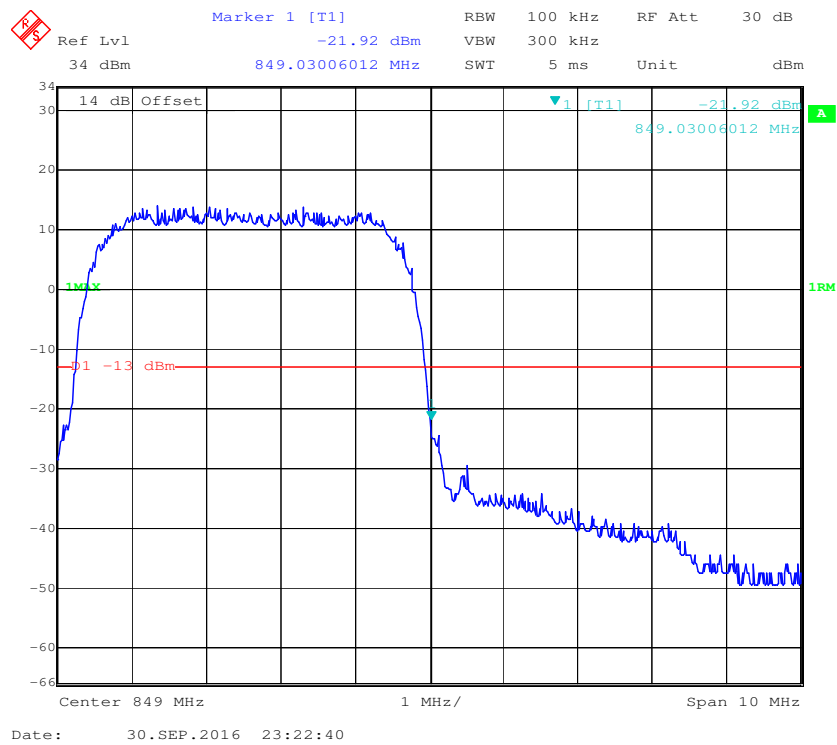


### Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

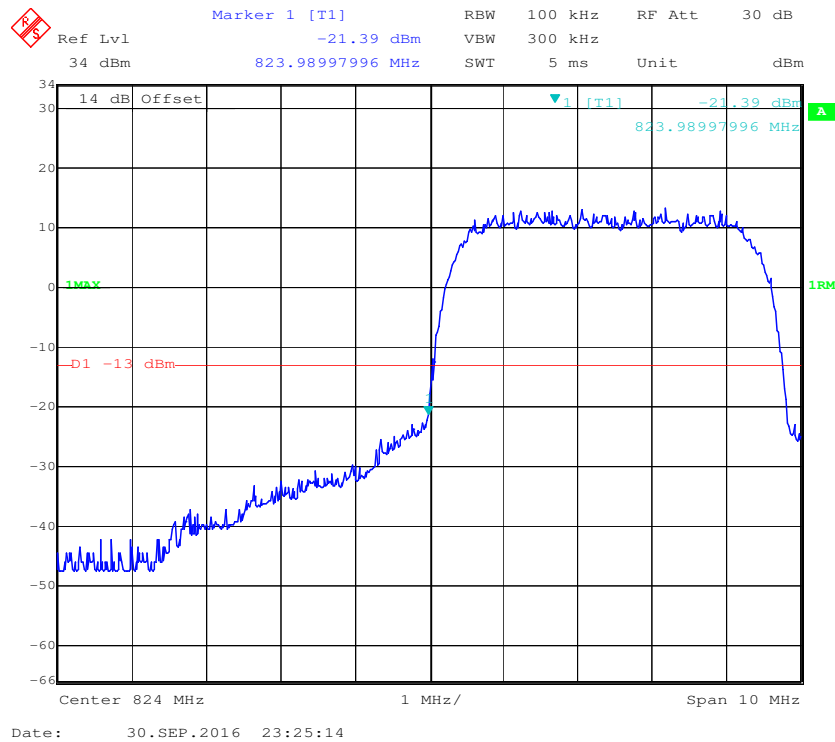


### Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

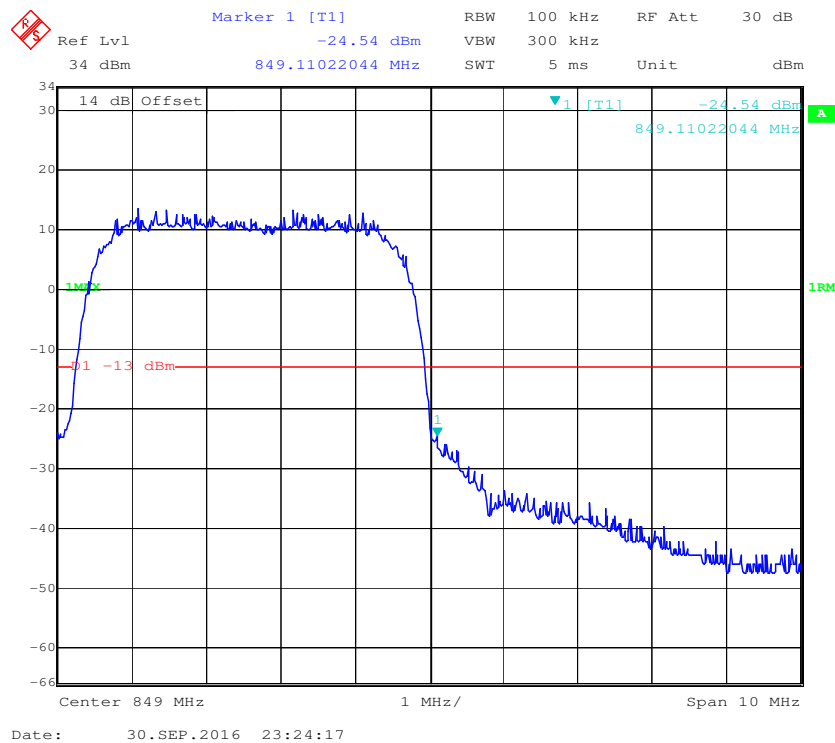


### Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

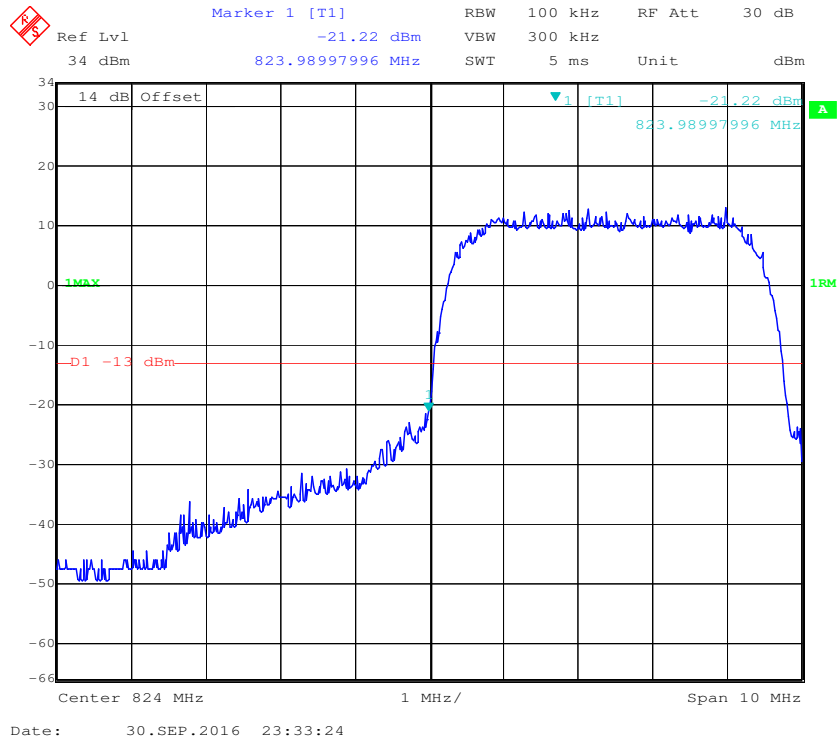


### Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

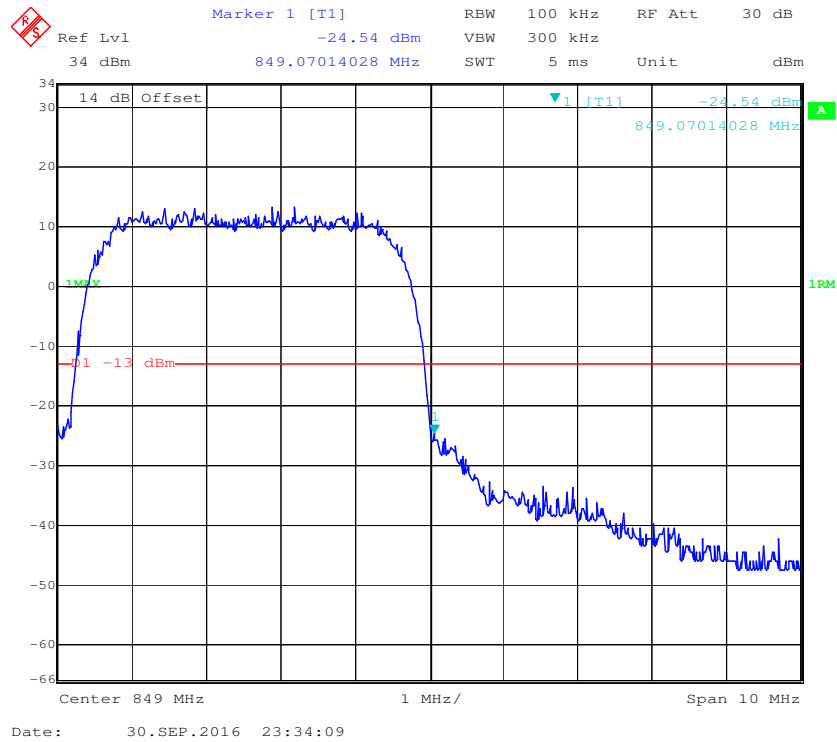


### PCS Band, Left Band Edge for GSM (GMSK) Mode

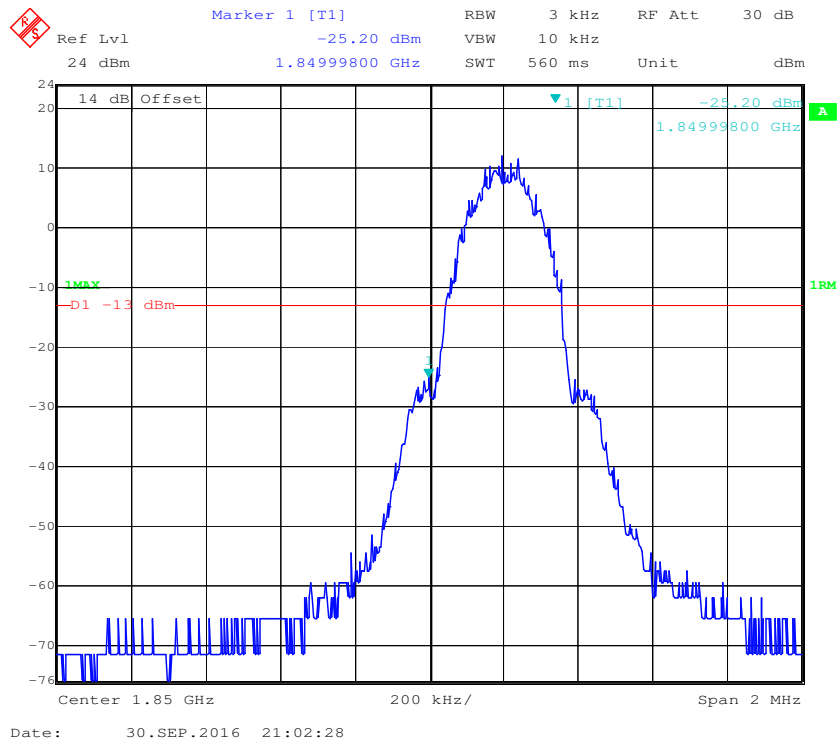


### PCS Band, Right Band Edge for GSM (GMSK) Mode

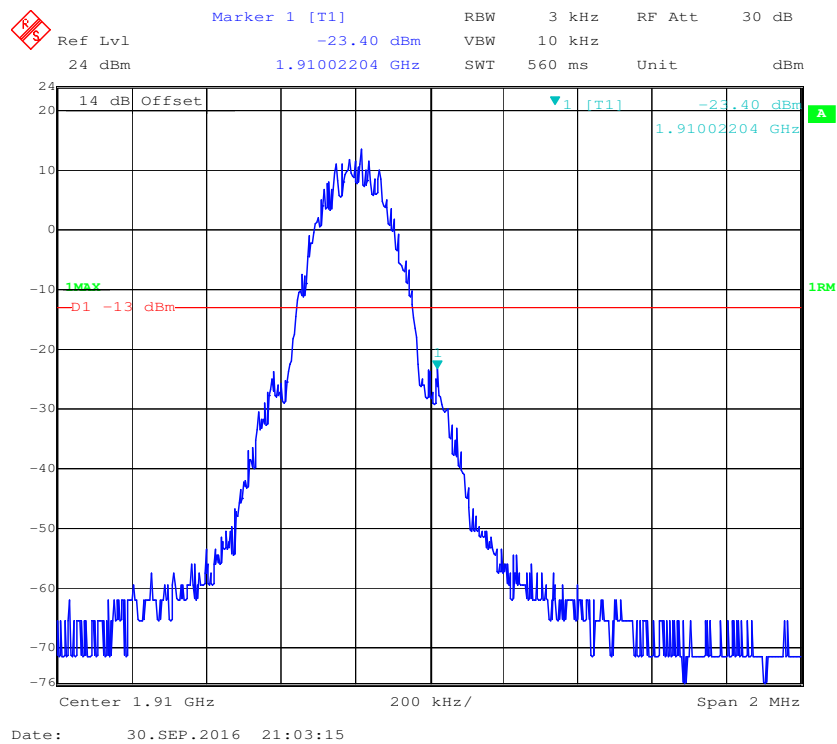


## PCS Band, Left Band Edge for EGPRS Mode

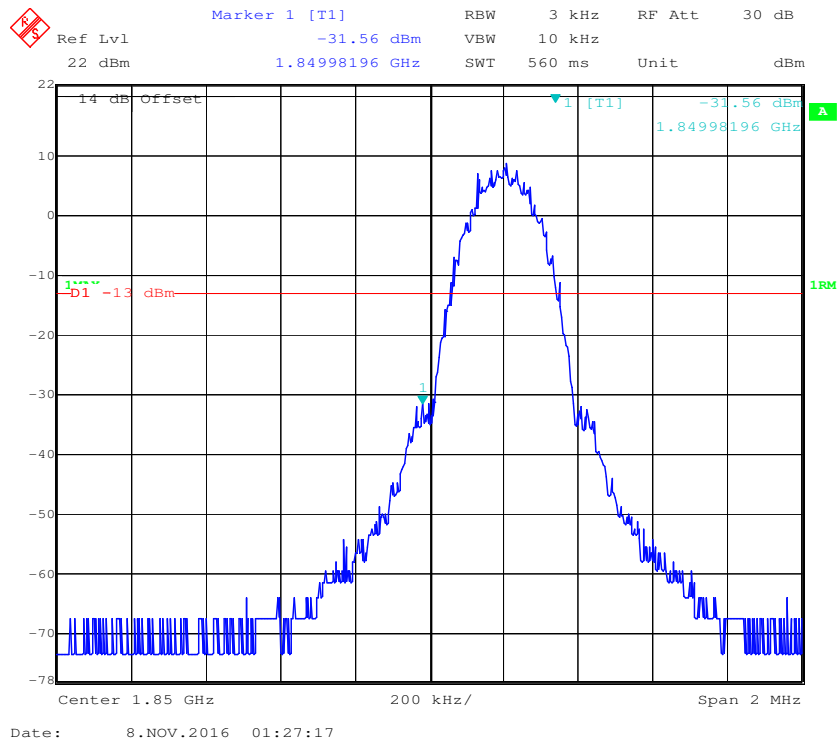


## PCS Band, Right Band Edge for EGPRS Mode

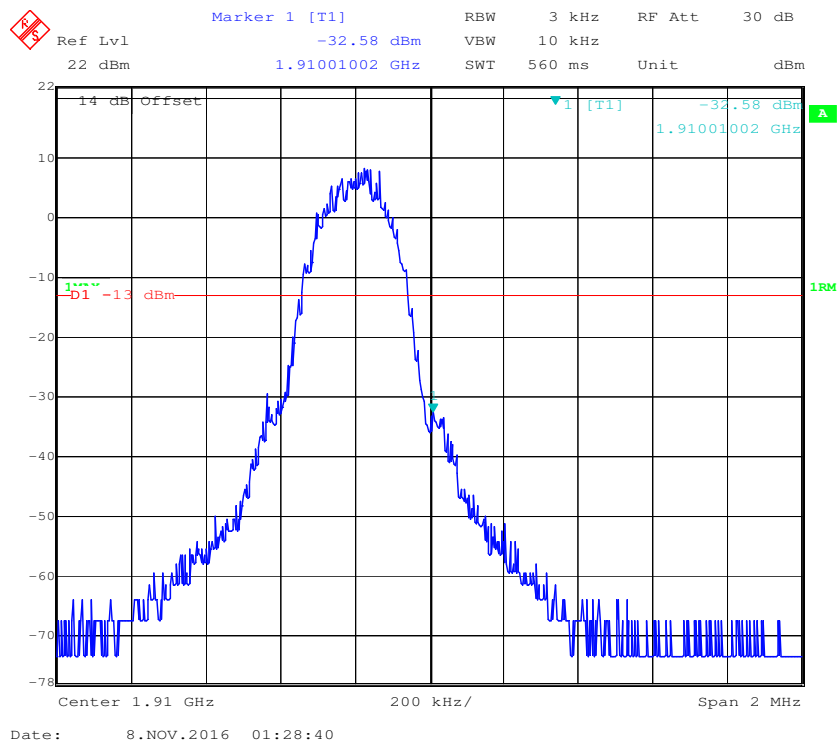


### PCS Band, Left Band Edge for RMC (BPSK) Mode

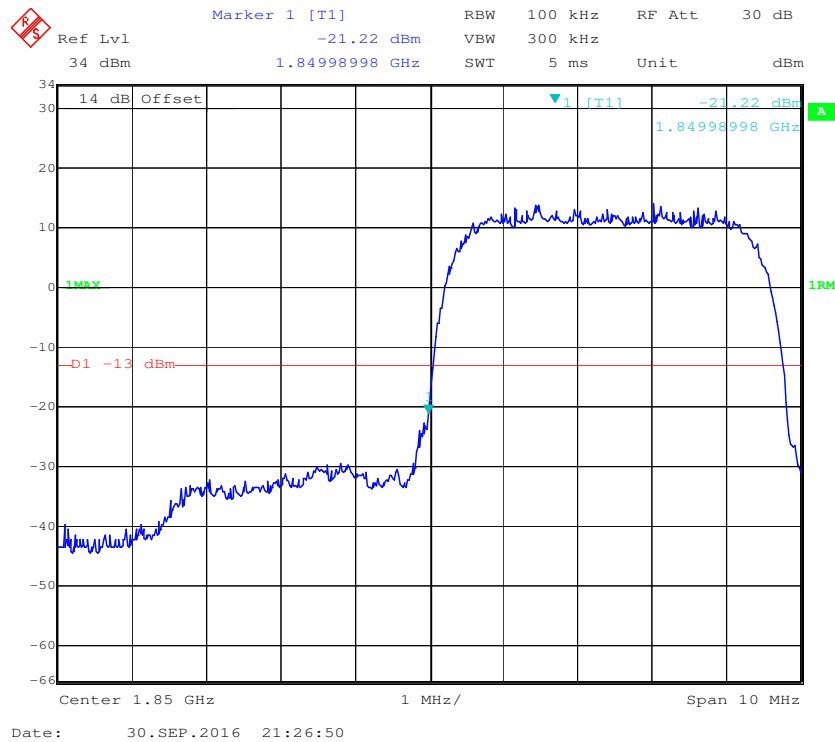


### PCS Band, Right Band Edge for RMC (BPSK) Mode

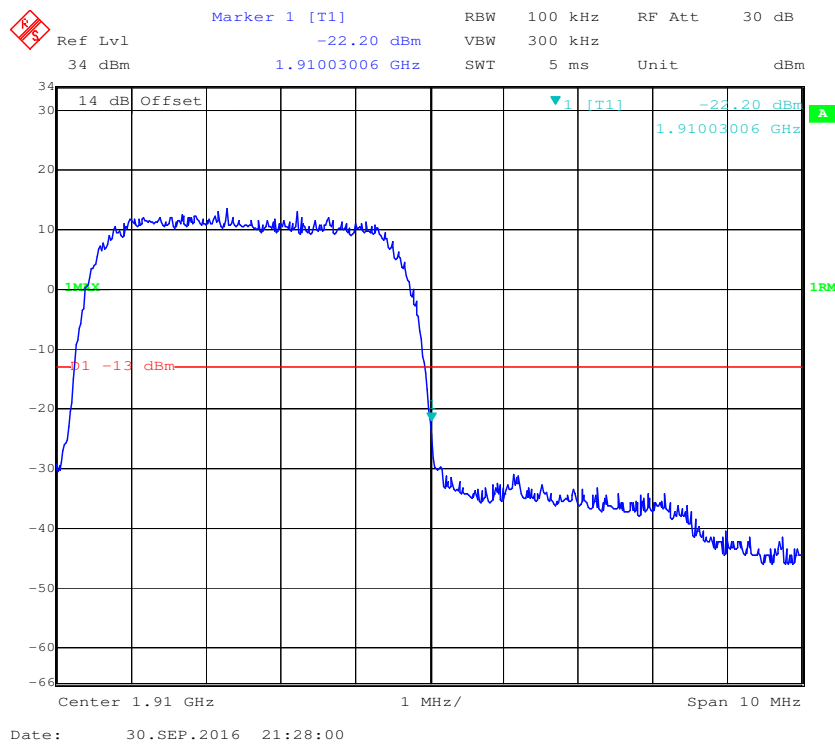


## PCS Band, Left Band Edge for HSDPA (16QAM) Mode

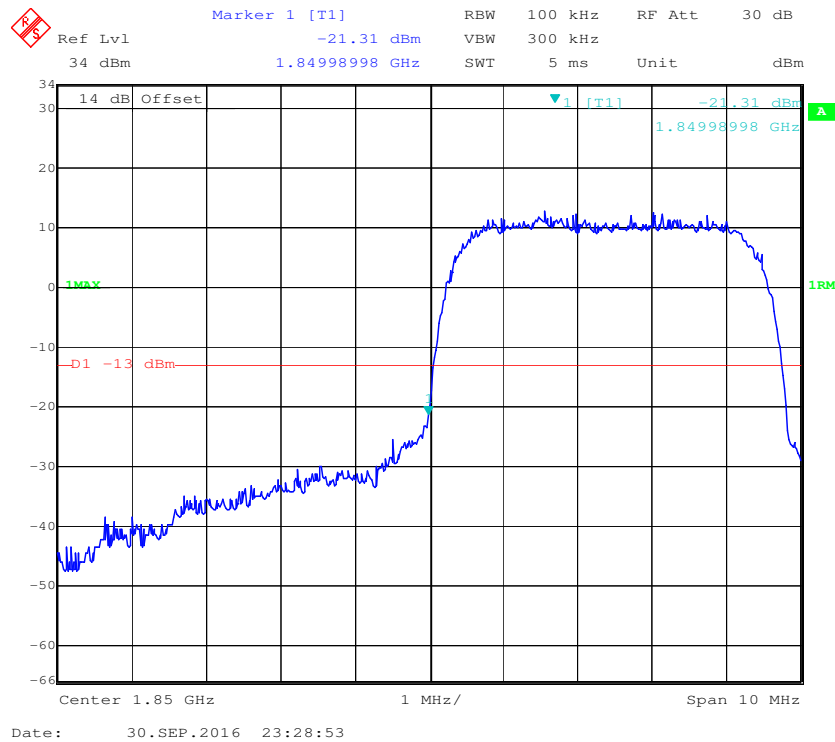


## PCS Band, Right Band Edge for HSDPA (16QAM) Mode

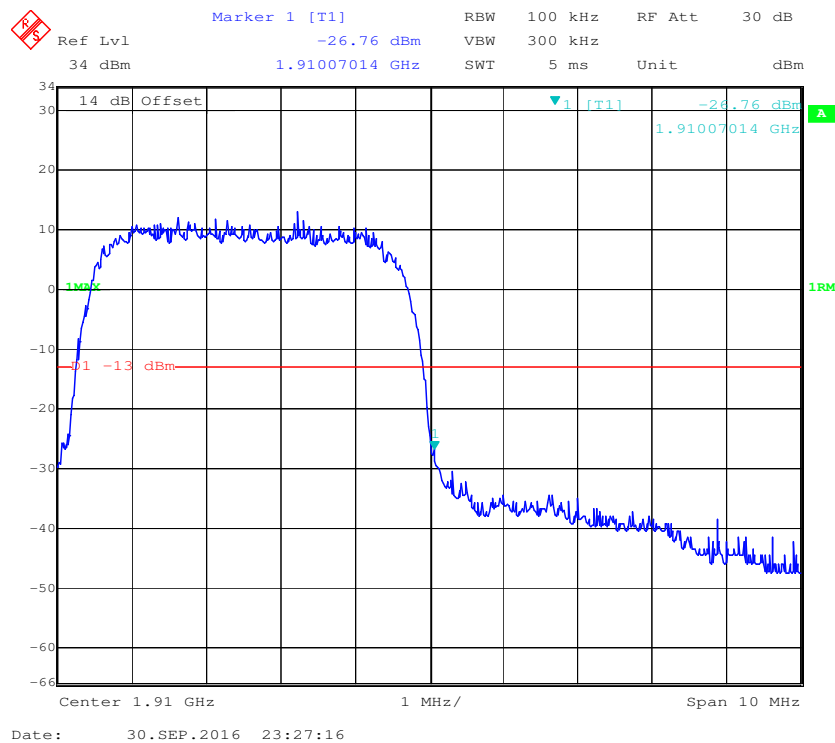

### PCS Band, Left Band Edge for HSUPA (BPSK) Mode

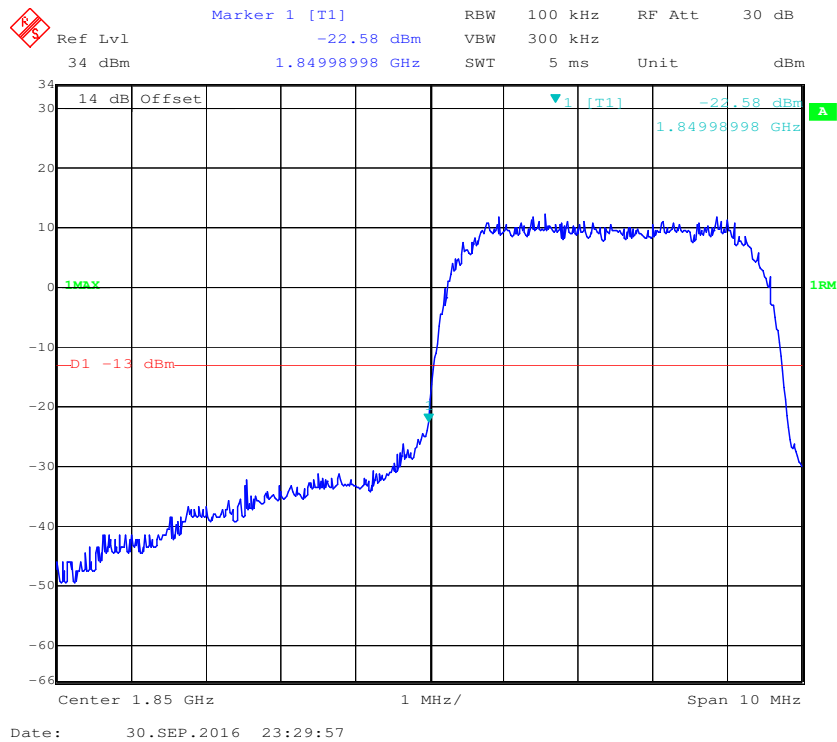


### PCS Band, Right Band Edge for HSUPA (BPSK) Mode

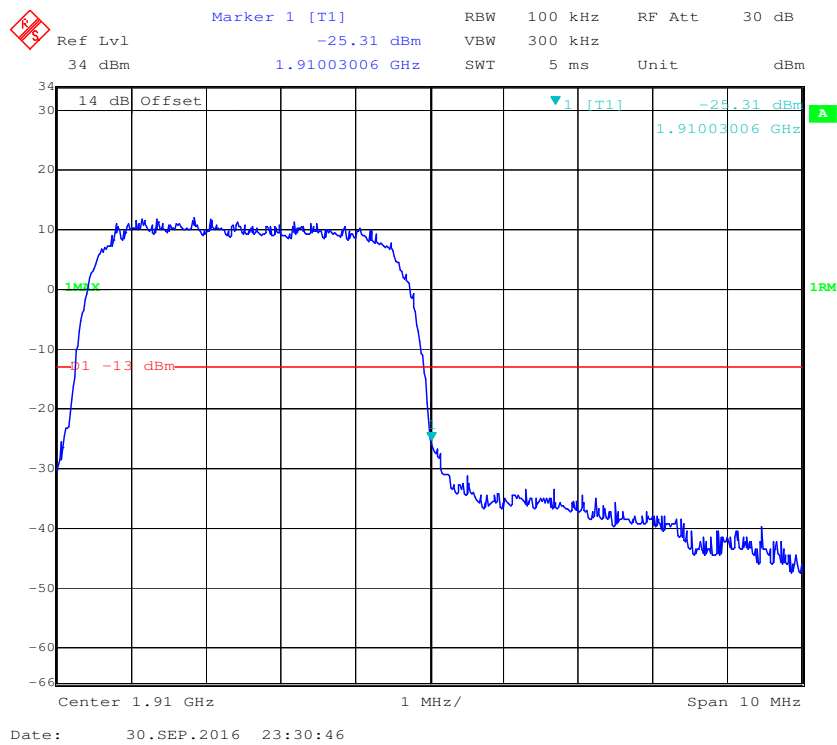





### AWS Band, Left Band Edge for RMC (BPSK) Mode

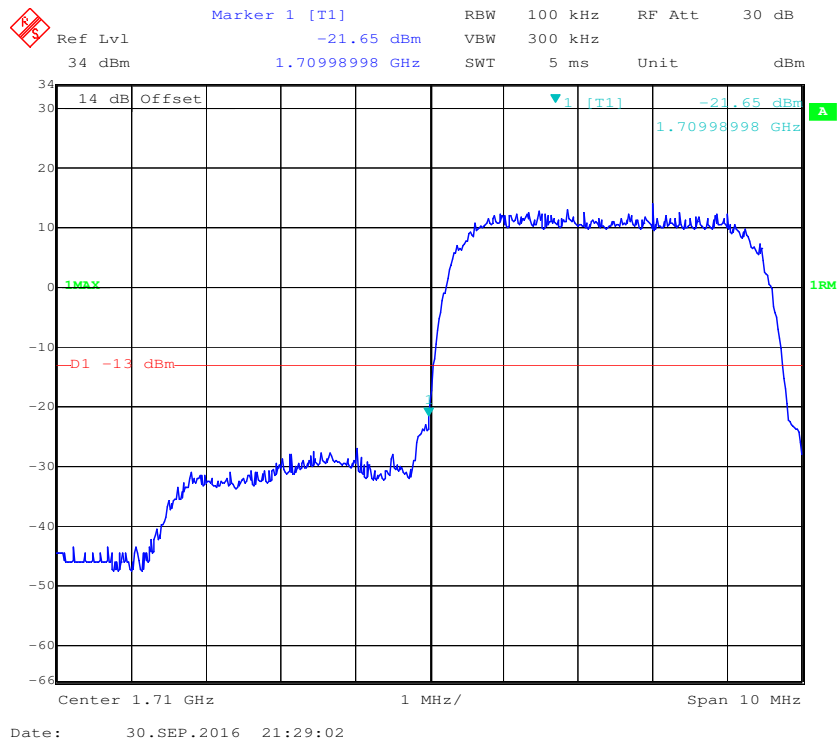


### AWS Band, Right Band Edge for RMC (BPSK) Mode

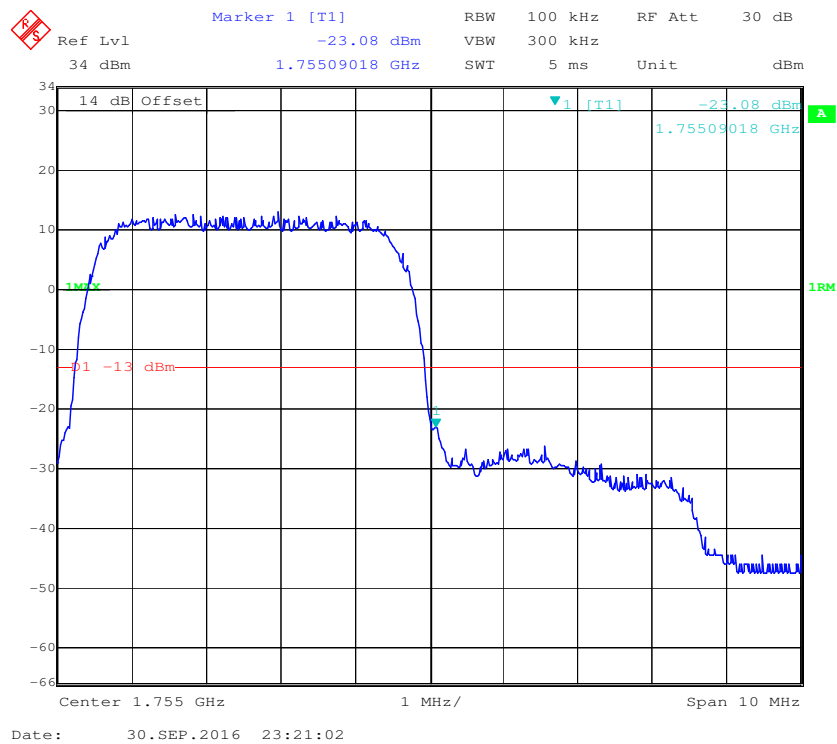


### AWS Band, Left Band Edge for HSDPA (16QAM) Mode

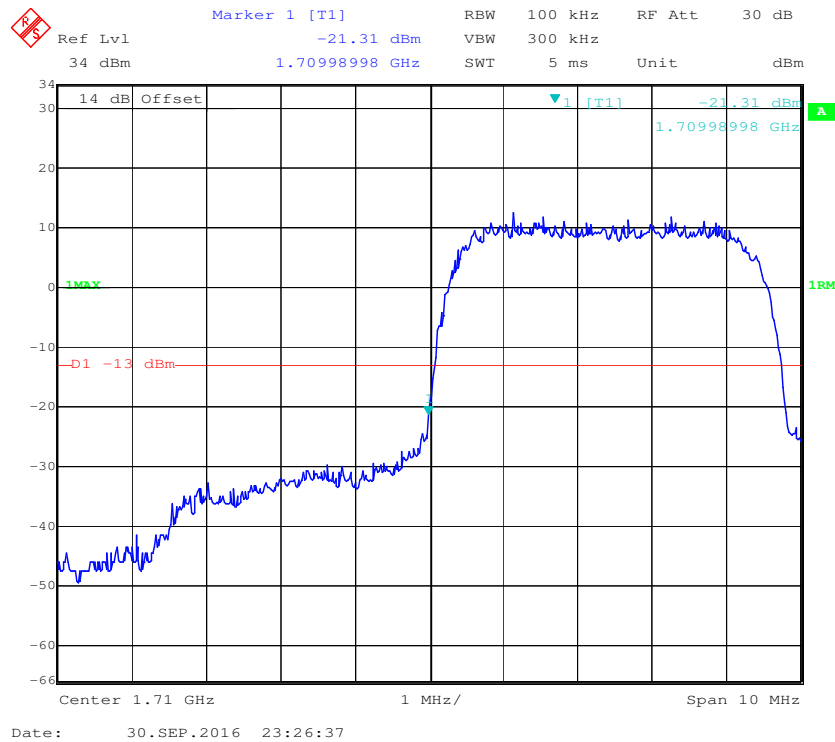


### AWS Band, Right Band Edge for HSDPA (16QAM) Mode

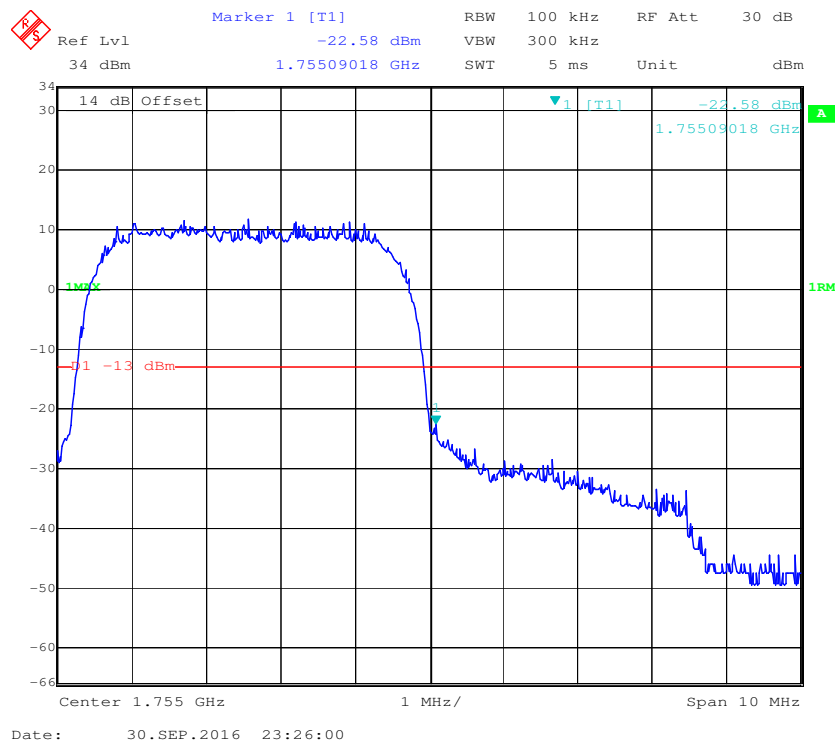

### AWS Band, Left Band Edge for HSUPA (BPSK) Mode

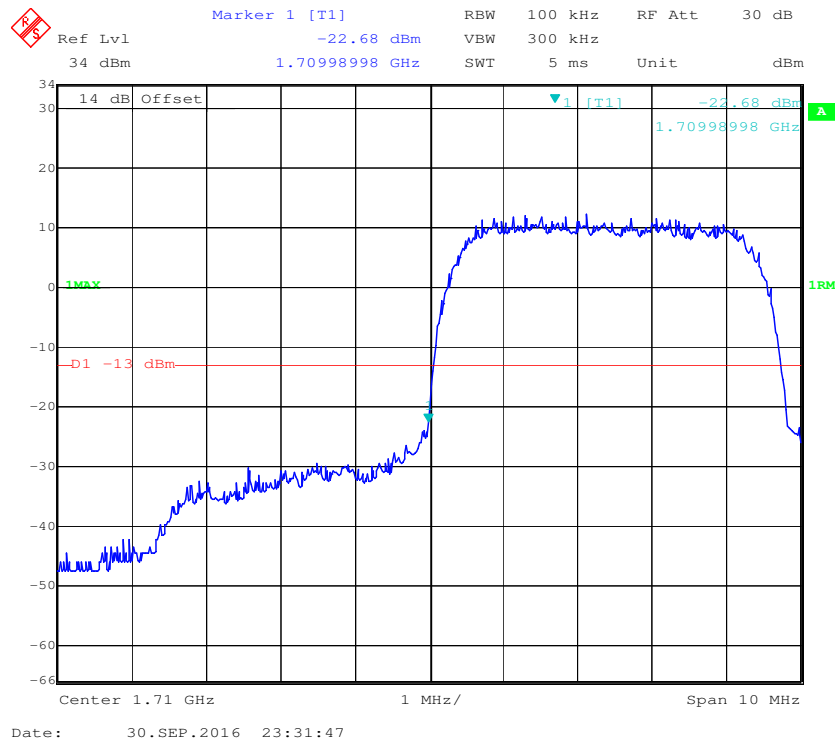

### AWS Band, Right Band Edge for HSUPA (BPSK) Mode

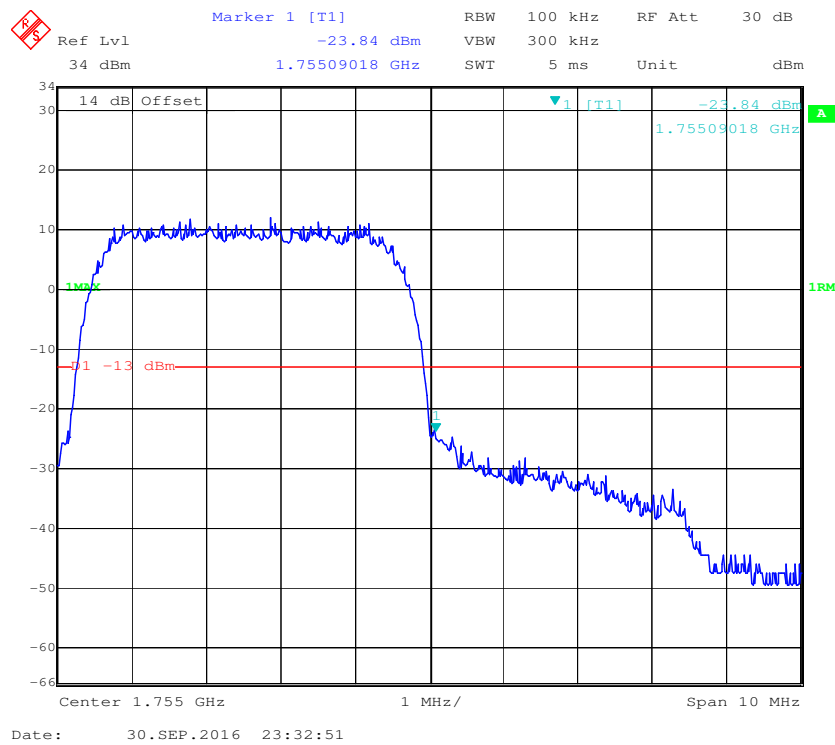

## **FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY**

### **Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

**Frequency Tolerance for Transmitters in the Public Mobile Services**

| <b>Frequency Range<br/>(MHz)</b> | <b>Base, fixed<br/>(ppm)</b> | <b>Mobile &gt; 3 watts<br/>(ppm)</b> | <b>Mobile ≤ 3 watts<br/>(ppm)</b> |
|----------------------------------|------------------------------|--------------------------------------|-----------------------------------|
| 25 to 50                         | 20.0                         | 20.0                                 | 50.0                              |
| 50 to 450                        | 5.0                          | 5.0                                  | 50.0                              |
| 450 to 512                       | 2.5                          | 5.0                                  | 5.0                               |
| 821 to 896                       | 1.5                          | 2.5                                  | 2.5                               |
| 928 to 929.                      | 5.0                          | N/A                                  | N/A                               |
| 929 to 960.                      | 1.5                          | N/A                                  | N/A                               |
| 2110 to 2220                     | 10.0                         | N/A                                  | N/A                               |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

### **Test Procedure**

**Frequency Stability vs. Temperature:** The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

**Frequency Stability vs. Voltage:** For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

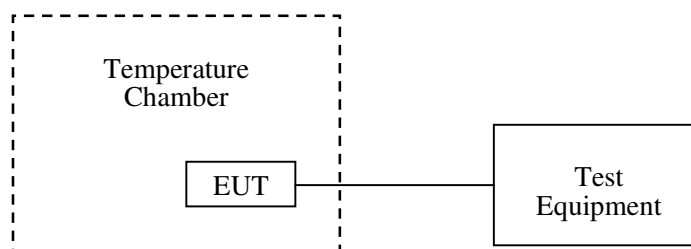

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 22 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Chris Wang on 2016-10-04*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following tables.*

**Cellular Band (Part 22H)****GSM Mode**

| Middle Channel, $f_o = 836.6$ MHz |                                   |                      |                       |             |
|-----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                               | 3.8                               | -4                   | -0.0048               | 2.5         |
| -20                               |                                   | -5                   | -0.0060               | 2.5         |
| -10                               |                                   | -3                   | -0.0036               | 2.5         |
| 0                                 |                                   | -8                   | -0.0096               | 2.5         |
| 10                                |                                   | 4                    | 0.0048                | 2.5         |
| 20                                |                                   | -4                   | -0.0048               | 2.5         |
| 30                                |                                   | -5                   | -0.0060               | 2.5         |
| 40                                |                                   | 3                    | 0.0036                | 2.5         |
| 50                                |                                   | -4                   | -0.0048               | 2.5         |
| 20                                | V min.= 3.6                       | -2                   | -0.0024               | 2.5         |
|                                   | V max.= 4.2                       | -4                   | -0.0048               | 2.5         |

**EDGE Mode**

| Middle Channel, $f_0 = 836.6$ MHz |                                   |                      |                       |             |
|-----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                               | 3.8                               | 6                    | 0.0072                | 2.5         |
| -20                               |                                   | 1                    | 0.0012                | 2.5         |
| -10                               |                                   | -3                   | -0.0036               | 2.5         |
| 0                                 |                                   | 2                    | 0.0024                | 2.5         |
| 10                                |                                   | -4                   | -0.0048               | 2.5         |
| 20                                |                                   | -2                   | -0.0024               | 2.5         |
| 30                                |                                   | -7                   | -0.0084               | 2.5         |
| 40                                |                                   | -5                   | -0.0060               | 2.5         |
| 50                                |                                   | 3                    | 0.0036                | 2.5         |
| 25                                | V min.= 3.6                       | -4                   | -0.0048               | 2.5         |
|                                   | V max.= 4.2                       | -1                   | -0.0012               | 2.5         |

**WCDMA Mode**

| Middle Channel, $f_0 = 836.6$ MHz |                                   |                      |                       |             |
|-----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                               | 3.8                               | 24                   | 0.0287                | 2.5         |
| -20                               |                                   | 25                   | 0.0299                | 2.5         |
| -10                               |                                   | 23                   | 0.0275                | 2.5         |
| 0                                 |                                   | 24                   | 0.0287                | 2.5         |
| 10                                |                                   | 22                   | 0.0263                | 2.5         |
| 20                                |                                   | 24                   | 0.0287                | 2.5         |
| 30                                |                                   | 21                   | 0.0251                | 2.5         |
| 40                                |                                   | 23                   | 0.0275                | 2.5         |
| 50                                |                                   | 21                   | 0.0251                | 2.5         |
| 25                                | V min.= 3.6                       | 24                   | 0.0287                | 2.5         |
|                                   | V max.= 4.2                       | 24                   | 0.0287                | 2.5         |

**PCS Band (Part 24E)****GSM Mode**

| Middle Channel, $f_o = 1880.0$ MHz |                                   |                      |                       |        |
|------------------------------------|-----------------------------------|----------------------|-----------------------|--------|
| Temperature (°C)                   | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30                                | 3.8                               | 14                   | 0.0074                | pass   |
| -20                                |                                   | 11                   | 0.0059                | pass   |
| -10                                |                                   | 16                   | 0.0085                | pass   |
| 0                                  |                                   | 9                    | 0.0048                | pass   |
| 10                                 |                                   | 8                    | 0.0043                | pass   |
| 20                                 |                                   | 19                   | 0.0101                | pass   |
| 30                                 |                                   | 6                    | 0.0032                | pass   |
| 40                                 |                                   | 8                    | 0.0043                | pass   |
| 50                                 |                                   | 6                    | 0.0032                | pass   |
| 25                                 | V min.= 3.6                       | 3                    | 0.0016                | pass   |
|                                    | V max.= 4.2                       | 4                    | 0.0021                | pass   |

**EDGE Mode**

| Middle Channel, $f_o = 1880.0$ MHz |                                   |                      |                       |        |
|------------------------------------|-----------------------------------|----------------------|-----------------------|--------|
| Temperature (°C)                   | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30                                | 3.8                               | -16                  | -0.0085               | pass   |
| -20                                |                                   | -9                   | -0.0048               | pass   |
| -10                                |                                   | -10                  | -0.0053               | pass   |
| 0                                  |                                   | -13                  | -0.0069               | pass   |
| 10                                 |                                   | -11                  | -0.0059               | pass   |
| 20                                 |                                   | -14                  | -0.0074               | pass   |
| 30                                 |                                   | -7                   | -0.0037               | pass   |
| 40                                 |                                   | -8                   | -0.0043               | pass   |
| 50                                 |                                   | -6                   | -0.0032               | pass   |
| 25                                 | V min.= 3.6                       | -5                   | -0.0027               | pass   |
|                                    | V max.= 4.2                       | -7                   | -0.0037               | pass   |

**WCDMA Mode**

| Middle Channel, $f_0 = 1880.0$ MHz |                                   |                      |                       |        |
|------------------------------------|-----------------------------------|----------------------|-----------------------|--------|
| Temperature (°C)                   | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30                                | 3.8                               | 28                   | 0.0149                | pass   |
| -20                                |                                   | 27                   | 0.0144                | pass   |
| -10                                |                                   | 24                   | 0.0128                | pass   |
| 0                                  |                                   | 23                   | 0.0122                | pass   |
| 10                                 |                                   | 24                   | 0.0128                | pass   |
| 20                                 |                                   | 21                   | 0.0112                | pass   |
| 30                                 |                                   | 23                   | 0.0122                | pass   |
| 40                                 |                                   | 22                   | 0.0117                | pass   |
| 50                                 |                                   | 24                   | 0.0128                | pass   |
| 20                                 | V min.= 3.6                       | 23                   | 0.0122                | pass   |
|                                    | V max.= 4.2                       | 23                   | 0.0122                | pass   |

**AWS Band (Part 27)****WCDMA Mode**

| Middle Channel, $f_0 = 1732.6$ MHz |                                     |                      |                       |             |
|------------------------------------|-------------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                   | Voltage Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                                | 3.8                                 | 29                   | 0.0167                | pass        |
| -20                                |                                     | 28                   | 0.0162                | pass        |
| -10                                |                                     | 21                   | 0.0121                | pass        |
| 0                                  |                                     | 21                   | 0.0121                | pass        |
| 10                                 |                                     | 22                   | 0.0127                | pass        |
| 20                                 |                                     | 23                   | 0.0133                | pass        |
| 30                                 |                                     | 22                   | 0.0127                | pass        |
| 40                                 |                                     | 21                   | 0.0121                | pass        |
| 50                                 |                                     | 20                   | 0.0115                | pass        |
| 25                                 | V min.= 3.6                         | 26                   | 0.0150                | pass        |
| 25                                 | V max.= 4.2                         | 26                   | 0.0150                | pass        |

\*\*\*\*\* END OF REPORT \*\*\*\*\*